



TS278R00

2A Ultra Low Dropout Voltage Regulator w/Disable

ITO-220-4L



1 2 3 4

ITO-220-4SL



1 2 3 4

Pin assignment:

1. Input

2. Output

3. Gnd

4. Enable

Low Dropout Voltage 0.5V max.

General Description

The TS278R00 Series is a low-dropout voltage regulator suitable for various electronic equipments. It provides constant voltage power source with ITO-220 4 lead full mold package.

Dropout voltage of TS278R00 Series is below 0.5V in full rated current (2A). This regulator has various functions such as a peak current protection, thermal shut down, over voltage protection and an output disable function.

Features

- ✧ Ultra Low Dropout performance 0.5Vmax. 2A
- ✧ Over Current Protection, Thermal Shutdown
- ✧ Over Voltage Protection, Short Circuit Protection
- ✧ With Output Disable Function
- ✧ $\pm 2.4\%$ Typical Total output
- ✧ TO-220 Full-Mold Package (4Pin)


Ordering Information

Part No.	Operating Temp.	Package
TS278RxxCI4	-40 ~ 125 °C	ITO-220-4L
TS278RxxCI4S		ITO-220-4SL

Note: Where xx denotes voltage option,

33=3.3V, 05=5.0V, 08=8.0V, 09=9.0V, 12=12V

Block Diagram

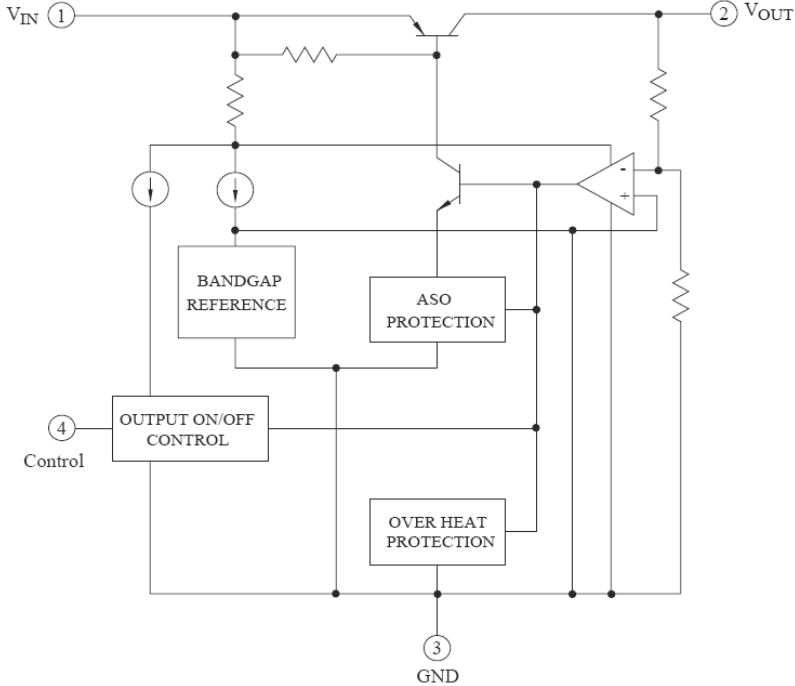


The block diagram illustrates the internal architecture of the TS278R00. It features an input terminal (1) labeled V_{IN} and an output terminal (2) labeled V_{OUT} . The circuit includes a feedback network with resistors and a compensation capacitor. Key functional blocks include a BANDGAP REFERENCE, an ASO PROTECTION (Automatic Short Circuit Protection) block, an OVER HEAT PROTECTION block, and an OUTPUT ON/OFF CONTROL block. The control pin (4) is labeled 'Control'. The ground pin (3) is labeled 'GND'. The diagram shows the interconnection of these blocks, including the error amplifier and the output stage transistors.




Absolute Maximum Ratings							
Parameter		Symbol	Value	Unit	Remark		
Input Voltage		Vin	30	V	--		
Disable Voltage		Vdis	30	V	--		
Output Current		Io	2.0	A	--		
Power Dissipation 1		Pd1	1.5	W	No heat sink		
Power Dissipation 2		Pd2	15	W	With heat sink		
Junction Temperature		Tj	-40~+125	°C	--		
Thermal Resistance, Junction-to Case(Note2)		Rθjc	4.31	°C / W	--		
Thermal Resistance, Junction-to Air(Note2)		Rθja	48.83	°C / W	--		
Thermal Shutdown Temperature		Ttsd	150	°C	--		
Electrical Characteristics							
TS278R00 Series (Vin=Note 6, Io=1.0A, Ta=25°C , unless otherwise specified).							
Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	TS278R33	Vo		3.22	3.3	3.38	V
	TS278R05			4.88	5.0	5.12	
	TS278R08			7.80	8.0	8.20	
	TS278R09			8.78	9.0	9.22	
	TS278R12			11.7	12	12.3	
Load Regulation		REGload	5mA<Io<2A	--	0.1	2.0	%
Line Regulation		REGline	Note 7	--	0.5	2.5	%
Ripple Rejection Ratio		RR	Note1	45	55	--	dB
Dropout Voltage		Vdrop	Io=2A	--	--	0.5	V
Disable Voltage High		VdisH	Output Active	2.0	--	--	V
Disable Voltage Low		VdisL	Output Disabled	--	--	0.8	V
Disable Bias Current High		IdisH	Vdis=2.7V	--	--	20	uA
Disable Bias Current Low		IdisL	Vdis=0.4V	--	--	-0.4	mA
Quiescent Current		Iq	Io=0A	--	--	10	mA
Note: 1. These parameters, although guaranteed, are not 100% tested in production. 2. Junction -to -case thermal resistance test environments. 3. Pneumatic heat sink fixture. 4. Clamping pressure 60psi through 12mm diameter cylinder. 5. Thermal grease applied between PKG and heat sink fixture 6. TS278R33: Vin=5V, TS278R05: Vin=7V, TS278R08: Vin=10V, TS278R09: Vin=11V, TS278R12: Vin=15V 7. TS278R33: Vin=4~10V, TS278R05: Vin=6~12V, TS278R08: Vin=9~25V, TS278R09: Vin=10~25V, TS278R12: Vin=13~29V							


Standard Test Circuit

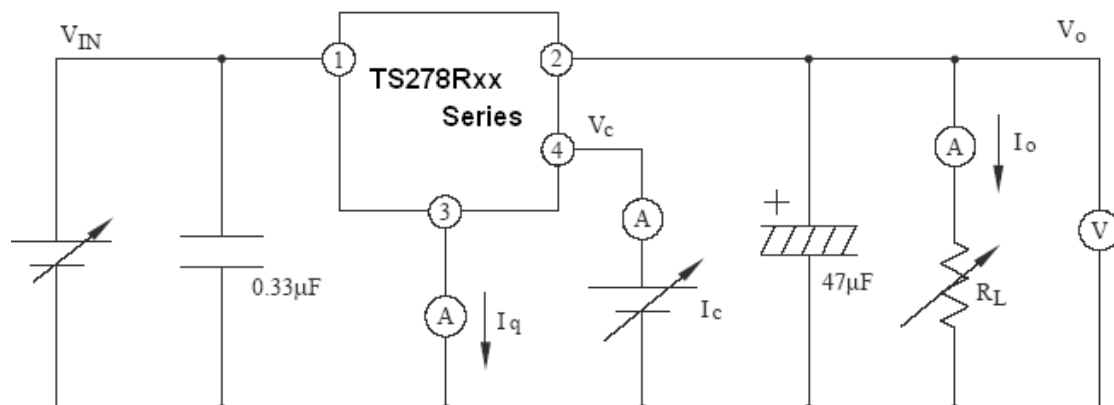


Ripple Rejection Test Circuit

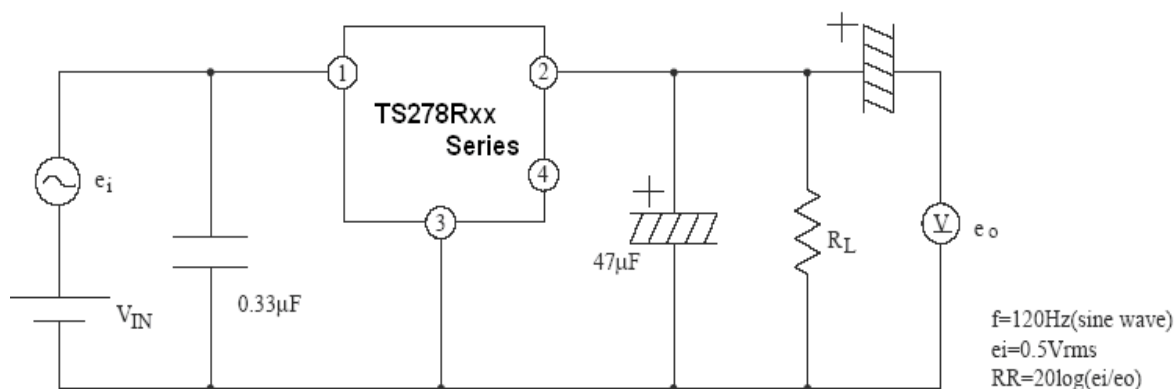

Standard Application Circuit

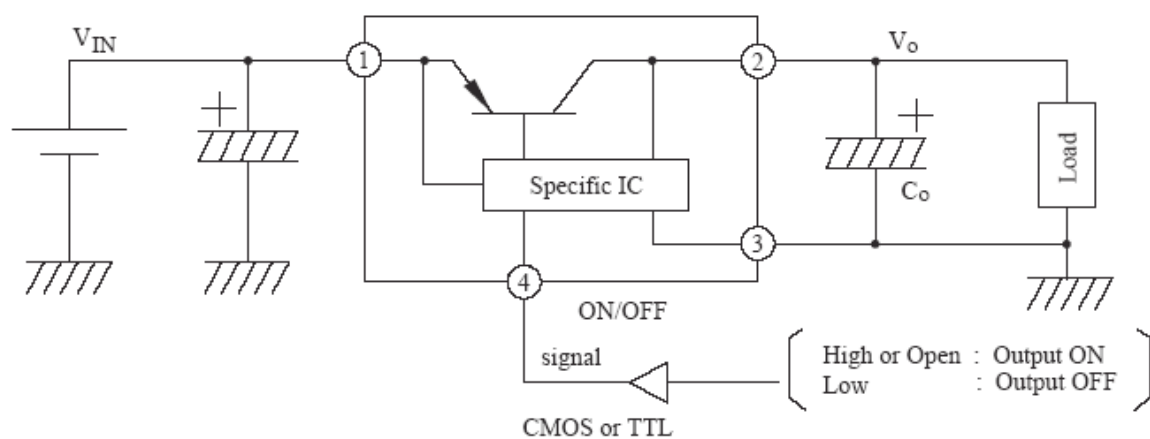


ITO-220-4L Mechanical Drawing

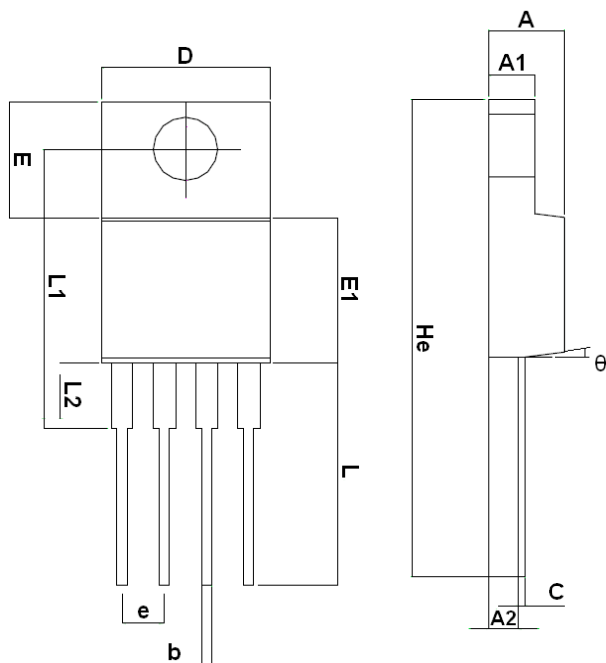

ITO-220-4L DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.42	4.72	0.174	0.186
A1	2.69	2.89	0.136	0.114
A2	1.68	1.88	0.066	0.074
D	10.00	10.20	0.394	0.402
E	6.85	7.05	0.269	0.278
E1	8.54	8.74	0.336	0.344
L	13.15	13.55	0.518	0.533
L2	16.56	16.76	0.652	0.660
L2	3.60	3.80	0.142	0.150
He	28.44	28.92	1.119	1.159
C	0.48		0.019	
E	2.54(TYP)		0.1(TYP)	
b	0.635(TYP)		0.025(TYP)	
θ	4°	7°	4°	7°

ITO-220-4SL Mechanical Drawing

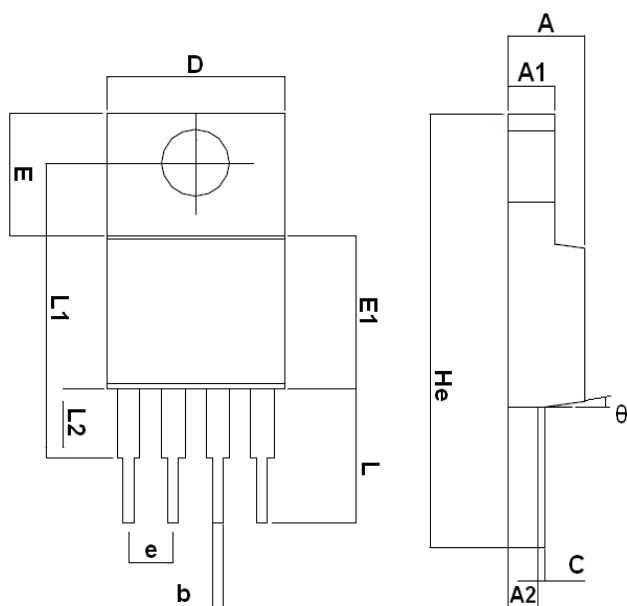

ITO-220-4SL DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.42	4.72	0.174	0.186
A1	2.69	2.89	0.136	0.114
A2	1.68	1.88	0.066	0.074
D	10.00	10.20	0.394	0.402
E	6.85	7.05	0.269	0.278
E1	8.54	8.74	0.336	0.344
L	8.32	8.72	0.328	0.343
L2	16.56	16.76	0.652	0.660
L2	3.60	3.80	0.142	0.150
He	23.72	24.72	0.934	0.973
C	0.48		0.019	
E	2.54(TYP)		0.1(TYP)	
b	0.635(TYP)		0.025(TYP)	
θ	4°	7°	4°	7°