

- ☆ 最高工作电压 400VDC
- ☆ 通用性强，应用范围广泛。
- ☆ 对 10KHz~30MHz 内的共模和差模干扰均有良好抑制效果




◆ 技术参数

额定电压:	400VDC	工作频率:	直流
试验电压:	线---线: 1500VDC	绝缘电阻:	>60MΩ @60VDC
(60S)	线---地: 1500VDC	工作温度:	-25°C~+85°C

滤波器型号	额定电流 @40°C			外型尺寸	电路参数			
					L (mH)	Cx(uF)	Cy(nF)	R(MΩ)
SH220-6 /??	6A	M4	L1	B1	6.2	0.47	100	1.0
SH220-10 /??	10A	M4	L1	H1	5.0	0.47	100	1.0
SH220-20 /??	20A	M6	L1	H2	2.5	1.0	100	0.47
SH220-30 /??	30A	M6	---	H5	2.5	1.0	100	0.47
SH230-40 /??	40A	M6	---	E	1.0	2.2	100	0.22


型号中的“/??”是要求注明端接方式代号。如：SH220D-6/L1 表示滤波器型号为 SH220-6 端接方式为焊片式

◆ 电路原理图

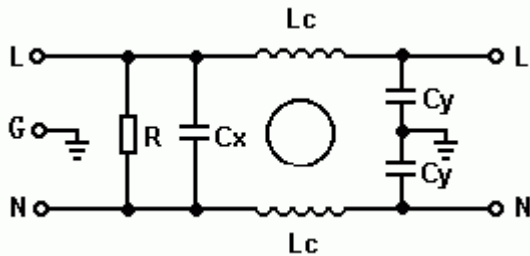


◆ 外型尺寸


(单位 mm)

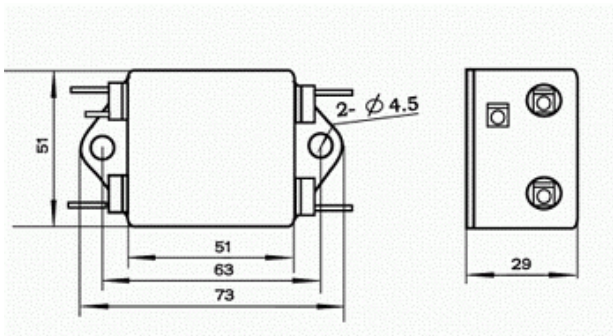


B1

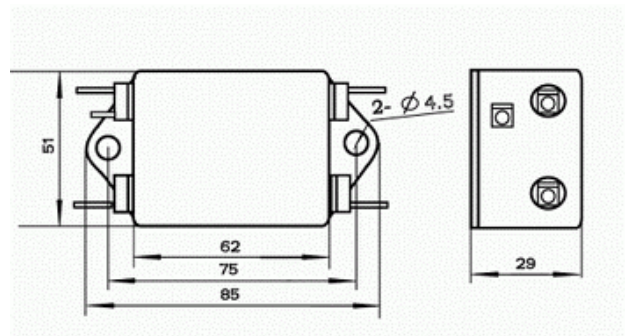


H1

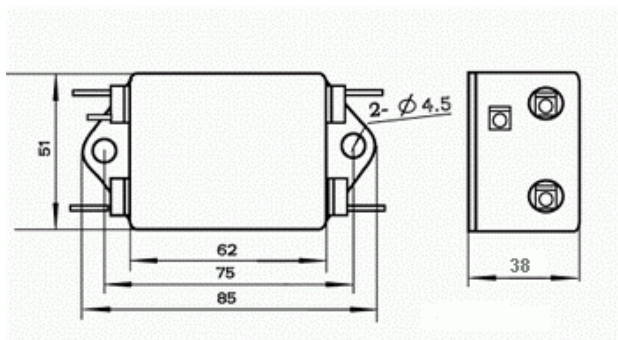

H2

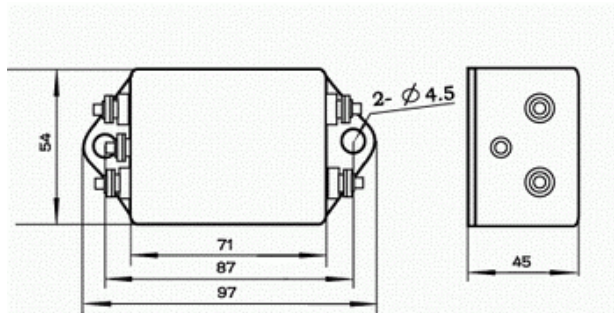

H5

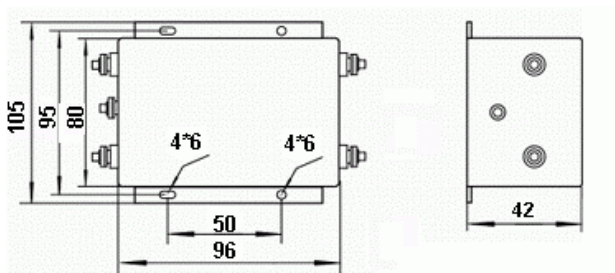


E


◆ **插入损耗**

(测试依据 CISPR17; @50/50 Ω 系统)


—— 共模 - - - - 差模

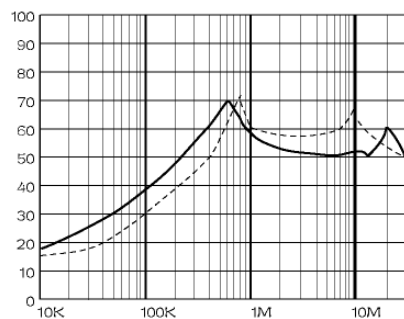


10A

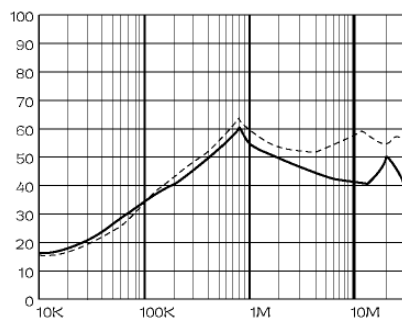


20A

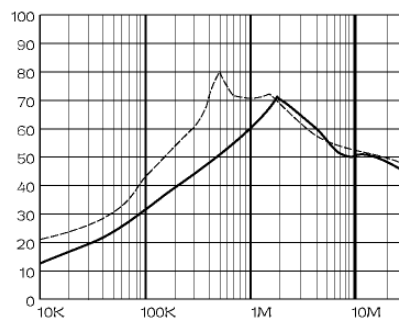

30A

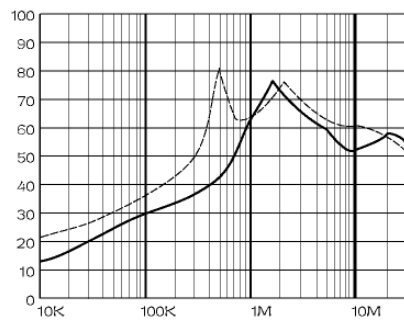

50A

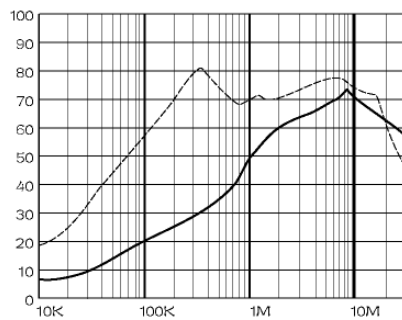

75A

100A