

SSMA 连接器系列

主要性能指标

特性阻抗: 50ohm

频率: DC-40GHz

驻波: DC-40GHz 1.20:1 max

耐久性: 500 次

工作温度: -60°C ~ +165°C


界面: 符合 MIL-STD-348A

材料/表面处理

壳体: 303 不锈钢, 抛光/钝化


内导体: 铍青铜, 镀金

绝缘体: PEI & PTFE

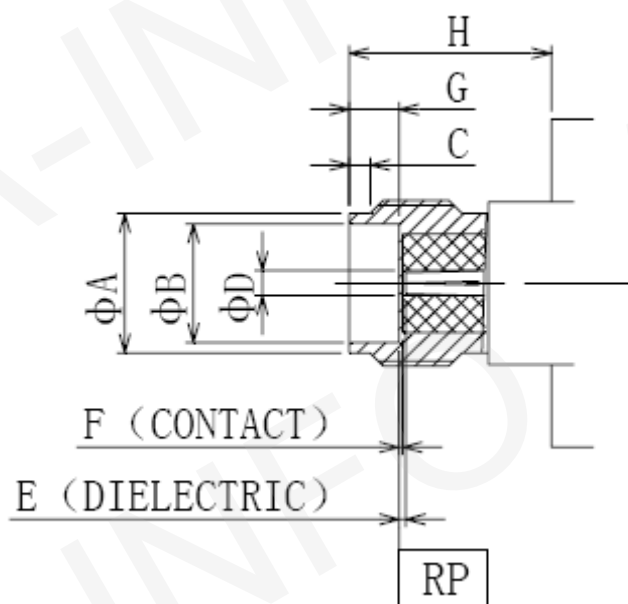


SSMA Female(K) (mm)		
	最小	最大
A	3.85	4.05
B	3.23	3.28
C	0.9	1.1
D	0.8373	0.8627
E	0	0.03
F	0	0.04
G	1.79	1
H	7.8	8.0


SSMA 系列可拆卸式法兰连接器

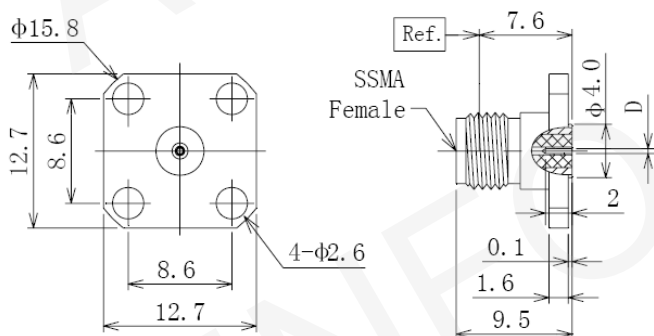


型号	D
HPC6110-12	0.012inch/0.30mm
HPC6110-15	0.015inch/0.38mm
HPC6110-18	0.018inch/0.46mm
HPC6110-20	0.020inch/0.51mm

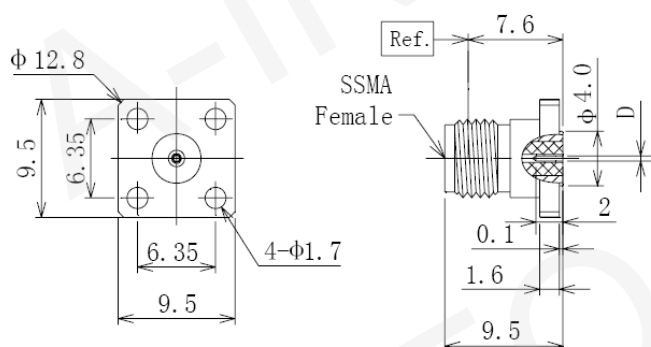


型号	D
HPC6111-12	0.012inch/0.30mm
HPC6111-15	0.015inch/0.38mm
HPC6111-18	0.018inch/0.46mm
HPC6111-20	0.020inch/0.51mm

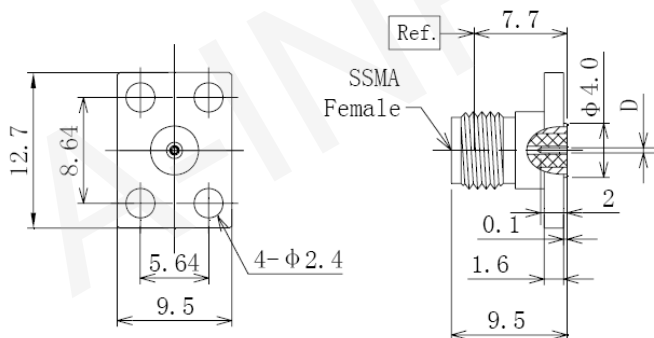


型号	D
HPC6112-12	0.012inch/0.30mm
HPC6112-15	0.015inch/0.38mm
HPC6112-18	0.018inch/0.46mm
HPC6112-20	0.020inch/0.51mm

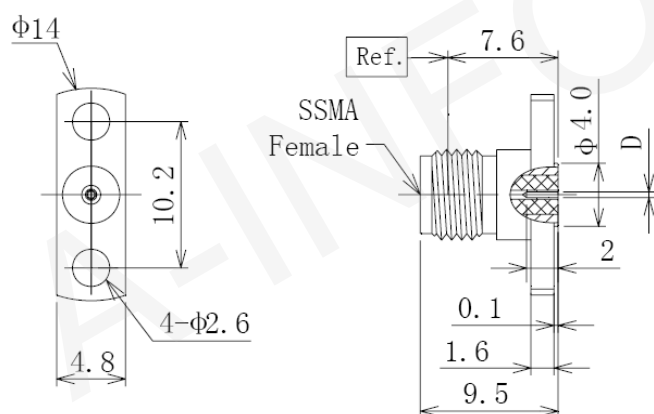


型号	D
HPC6113-12	0.012inch/0.30mm
HPC6113-15	0.015inch/0.38mm
HPC6113-18	0.018inch/0.46mm
HPC6113-20	0.020inch/0.51mm

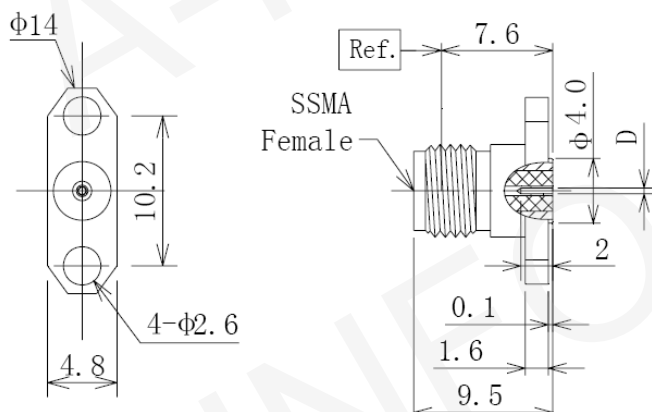

型号	D
HPC6114-12	0.012inch/0.30mm
HPC6114-15	0.015inch/0.38mm
HPC6114-18	0.018inch/0.46mm
HPC6114-20	0.020inch/0.51mm

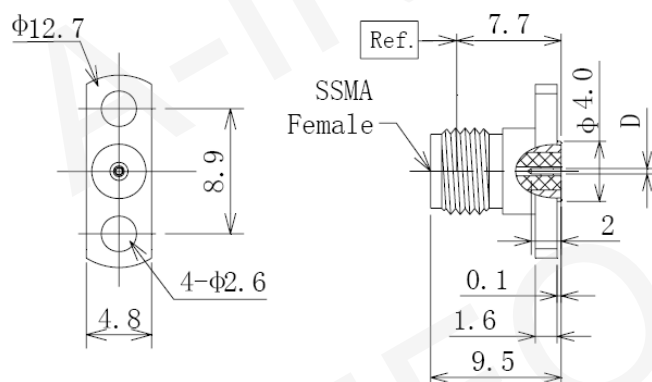

型号	D
HPC6115-12	0.012inch/0.30mm
HPC6115-15	0.015inch/0.38mm
HPC6115-18	0.018inch/0.46mm
HPC6115-20	0.020inch/0.51mm

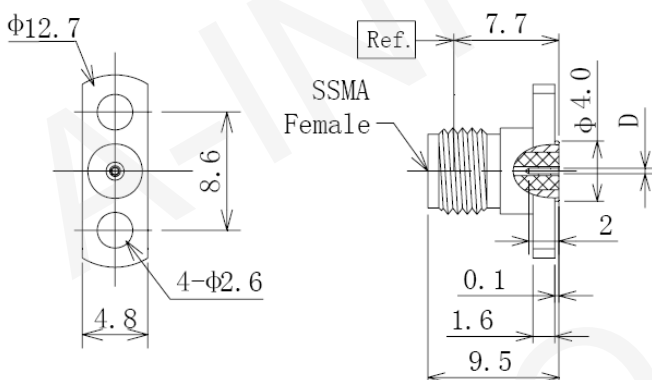

型号	D
HPC6116-12	0.012inch/0.30mm
HPC6116-15	0.015inch/0.38mm
HPC6116-18	0.018inch/0.46mm
HPC6116-20	0.020inch/0.51mm