

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 741503

FEATURES AND SPECIFICATIONS

Features and Benefits

- Easily applied without soldering and reliable without accidental disconnects
- Low cost alternative to DIP switches
- Increases current flow and decreases resistance vs DIP switches
- Dual beam terminals: 2 points of contact per pin
- Open and closed top versions
- Stackable end-to-end and side-to-side

Reference Information

Product Specification: PS-7859

Packaging: Bag

UL File No.: E29179 (H)

CSA File No.: LR19980A

Mates With: All C-Grid breakaway headers

Designed In: Inches

Electrical

Voltage: 250V

Current: 5.0A

Contact Resistance: 15mΩ max. Gold

Dielectric Withstanding Voltage: 1500V

Insulation Resistance: 100K MΩ min.

Mechanical

Contact Retention to Housing: 26.69N (4 lb)

Mating Force: 4.448N (6 lb)

Unmating Force: 0.98N (1 lb)

Durability: 25 cycles Tin/Lead and 200 cycles Gold

Physical

Housing: Glass-filled polyester, UL 94V-0

Contact: Phosphor Bronze

Plating: See Table


Operating Temperature: -40 to +105°C



2.54mm (.100") Pitch
C-Grid®
Shunt/Jumper


7859

2-Circuit



CATALOG DRAWING (FOR REFERENCE ONLY)

Not For Use With C-Grid III™ Components

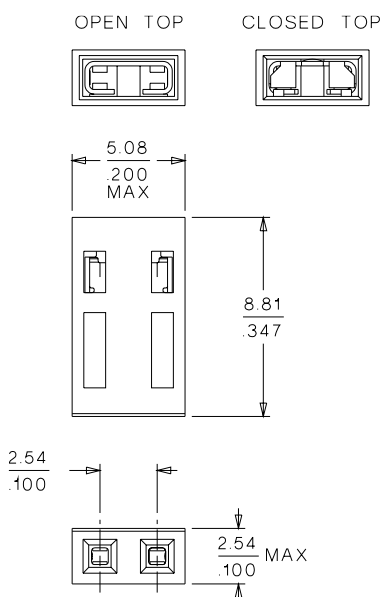

ORDERING INFORMATION

Open Top		Closed Top	
Order No.	Plating	Order No.	Plating
• 15-29-1024	15μ" Gold	15-29-1025	15μ" Gold
• 15-29-1026	30μ" Gold	15-29-1027	30μ" Gold
• 15-38-1024	150μ" Tin/Lead	15-38-1026	150μ" Tin/Lead

• US Standard Product, available through Molex franchised distributors



PRODUCT SPECIFICATION



LANGUAGE

ENGLISH

C-Grid 7859 Series Two-Circuit Shunt

1.0 SCOPE

This specification covers the test criteria and performance requirements of the 2.54 mm (.100 inch) centerline (pitch) two-circuit shunt.

2.0 PRODUCT DESCRIPTION

2.1 Product Name and Series Number

C-Grid shunt 7859 series available in both open top version which accommodates mated pin lengths from 5.08mm (.200 inch) minimum and longer and closed top version which accommodates mated pin lengths from 5.08mm (.200 inch) to 6.86mm (.270 inch)

2.2 Part Numbers, dimensions, materials, platings and markings

See appropriate sales drawing for information

2.3 Safety Agency Approvals

2.3.1 Underwriters Laboratories Inc.: File No. E29179

2.3.2 Canadian Standards Association: File No. LR19980

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

3.1 Molex documents

SDA-7859-2***N sales drawing for open top version

SDA-7859-2A***N sales drawing for closed top version

PK-70873-0815

4.0 RATINGS

4.1 Current: 5.0 Amperes with 30°C rise over ambient

4.2 Operating temperature: -40°C to +105°C

	REVISE ON PC ONLY		TITLE	TWO-CIRCUIT SHUNT	
	D	SEE SHEET 1			
			THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	REV	DESCRIPTION			
DOCUMENT NO. PS - 7859				FILE NAME PS7859.DOC	SHEET 2



PRODUCT SPECIFICATION





LANGUAGE

ENGLISH

5.0 PERFORMANCE

5.1 Electrical

Item	Test Condition	Requirement
Contact Resistance (Low Level)	Mate connectors with a maximum voltage of 20 mV and a current of 100 mA	30 milliohms maximum
Contact Resistance (Rated)	Measure contact resistance at rated current	30 milliohms maximum
Insulation Resistance	Mate connectors with a voltage of 500 VDC for 1 minute	1×10^5 Megohms minimum
Dielectric Withstanding Voltage	Mate connectors with a voltage of 1000 VAC for 1 minute Connectors to be oriented as shown below, In either configuration.	No breakdown Regardless of configuration

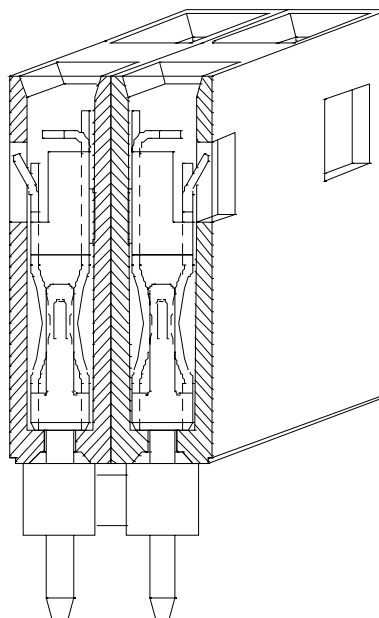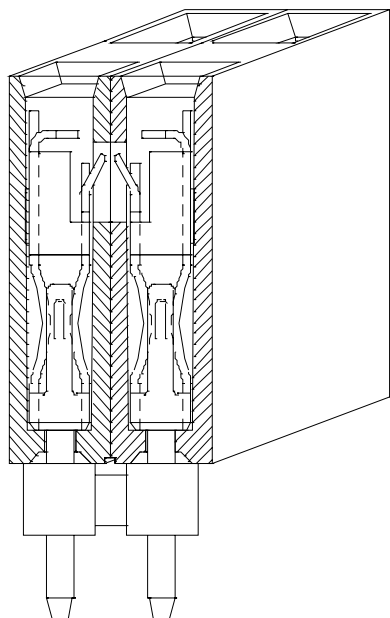

	REVISE ON PC ONLY		TITLE TWO-CIRCUIT SHUNT THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
D	SEE SHEET 1			
REV	DESCRIPTION			
DOCUMENT NO. PS - 7859			FILE NAME PS7859.DOC	SHEET 3



PRODUCT SPECIFICATION

**LANGUAGE****ENGLISH**

5.2 Mechanical

Item	Test Condition	Requirement
Connector Insertion/ Withdrawal Forces	Insert and withdraw a connector at a rate of $(25 \pm 6 \text{ mm})/1 \pm \frac{1}{4}$ inch per minute	
	Plating: .000150 min.tin/lead over .000050 min. nickel overall Maximum mate force: After 1 cycle = 6.12 lbs. After 5 cycles = 5.71 lbs. After 10 cycles = 2.74 lbs. After 25 cycles = 2.66 lbs.	Minimum unmate force: After 1 cycle = 3.84 lbs. After 5 cycles = 3.25 lbs. After 10 cycles = 0.79 lbs. After 25 cycles = 0.31 lbs.
	Plating: .00015 min. gold over .000050 min. nickel overall Maximum mate force: After 1 cycle = 2.37 lbs After 50 cycles = 1.72 lbs After 100 cycles = 1.71 lbs. After 200 cycles = 1.70 lbs.	Minimum unmate force: After 1 cycle = 1.26 lbs. After 50 cycles = 1.07 lbs. After 100 cycles = 1.05 lbs. After 200 cycles = 1.04 lbs.
	Plating: .000030 min. gold over .000050 min. nickel overall Maximum mate force: After 1 cycles = 2.61 lbs. After 50 cycles = 1.24 lbs. After 100 cycles = 1.24 lbs. After 200 cycles = 1.22 lbs.	Minimum unmate force: After 1 cycle = 1.20 lbs. After 50 cycles = 0.78 lbs. After 100 cycles = 0.78 lbs. After 200 cycles = 0.68 lbs.
Terminal Retention Force In Housing	Axial pullout force on the terminal in the housing at a rate of $(25 \pm 6 \text{ mm})/1 \pm \frac{1}{4}$ inch per minute	4.0 pounds minimum
Durability	Mate connector up to 25 cycles for tin/lead plating and 200 cycles for gold plating at a maximum rate of 10 cycles per minute prior to Environmental Tests	Maximum contact resistance change: 10 milliohms

REVISE ON PC ONLY		TITLE TWO-CIRCUIT SHUNT	THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
D	SEE SHEET 1		
REV	DESCRIPTION		
DOCUMENT NO. PS - 7859		FILE NAME PS7859.DOC	SHEET 4



PRODUCT SPECIFICATION



LANGUAGE

ENGLISH

Cont'd...

Item	Test Condition	Requirement
Vibration	Amplitude: (1.9 mm)/.076" peak-to-peak Sweep: 10-55-10 Hz in one minute Duration: 2 hours in each axis x, y, & z	Maximum contact resistance change: 10 milliohms
Mechanical Shock	50 G's with three sine waveform shocks, both directions in each axis (x, y, & z)	Maximum contact resistance change: 10 milliohms
Normal Force	Apply a perpendicular force at a rate of (25 ± 6mm)/1 ± ¼ inch per minute	100 grams minimum

REVISE ON PC ONLY		TITLE
D	SEE SHEET 1	TWO-CIRCUIT SHUNT
REV	DESCRIPTION	THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
DOCUMENT NO. PS - 7859		FILE NAME PS7859.DOC
		SHEET 5



PRODUCT SPECIFICATION

**LANGUAGE**

ENGLISH

5.3 Environmental

Item	Test Condition		Requirement
Thermal Shock	Mate connectors exposed to 10 cycles of:		Appearance: No damage
	Temperature (C°)	Duration (minutes)	Maximum contact resistance change: 10 milliohms
	-40 +0, -3 +105 +3, -0	30 30	
Thermal Aging	Mate connectors exposes to 240 hours at 105 ± 2°C		Appearance: No damage Maximum contact resistance change: 10 milliohms
Humidity (Steady State)	Mate connectors exposed to 40 ± 2°C, 90-95% RH, for 240 hours per MIL-STD-202F, Method 103B, Test Condition A		Appearance: No damage Maximum contact resistance change: 10 milliohms
Humidity (Cyclic)	Test mate connectors per MIL-STD-202F, Method 106E, excluding steps 7a and 7b		Appearance: No damage Maximum contact resistance change: 10 milliohms

	REVISE ON PC ONLY		TITLE TWO-CIRCUIT SHUNT		
D	SEE SHEET 1				
REV	DESCRIPTION		THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
DOCUMENT NO. PS - 7859				FILE NAME PS7859.DOC	SHEET 6



PRODUCT SPECIFICATION



LANGUAGE

ENGLISH

cont'd

Item	Test Condition	Requirement
Fretting	Mate connectors exposed for 500 cycles Temperature (°C) Duration (minutes) +25 ± 10 30 +70 +3, -0 30	Appearance: No damage Maximum contact resistance change:
Temperature Rise and Current Cycling	Mate the connectors and measure the temperature rise at the rated current after 96 hours, then after 45 minutes ON, 15 minutes OFF for 240 hours, and finally at the rated current after 96 hours.	Maximum temperature rise: 30°C over ambient Maximum contact resistance change: 10 milliohms



Reference Test Report Nos.: 2281, 2445, 4146, 4147

REVISE ON PC ONLY		TITLE
D	SEE SHEET 1	TWO-CIRCUIT SHUNT
THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
REV	DESCRIPTION	
DOCUMENT NO. PS - 7859		FILE NAME PS7859.DOC
		SHEET 7



EDP NO.	ENG NO.	FINISH
15-38-1024	A-7859-2164	TIN OVERALL
15-29-1024	A-7859-2554	15 GOLD
15-29-1026	A-7859-2561	30 GOLD

PART IDENTIFICATION:

A-7859-2***
└ PLATING SPECIFICATION

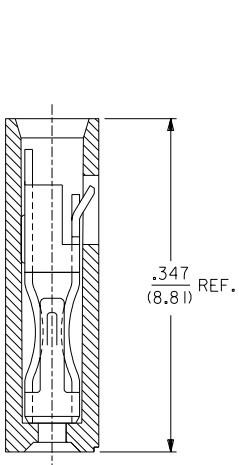

SECTION A-A

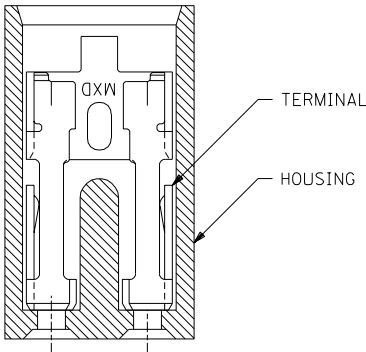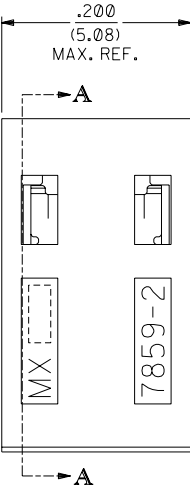

SECTION B-B

NOTES:

- THIS PRODUCT CONFORMS TO MOLEX PRODUCT SPEC. PS-7859.
- TO BE USED WITH .025/(0.64) SQUARE PINS.
- MINIMUM MATING PIN LENGTH: .200/(5.08)
- PRODUCT IS PACKAGED IN BOXES PER PK-70873-0815

FINISH SPECIFICATION

- TIN OVERALL - .000150 MINIMUM TIN PLATE OVER .000050 MINIMUM NICKEL UNDERPLATE.
- 15 GOLD - .000015 MINIMUM GOLD PLATE IN SELECT AREA OVER .000050 MINIMUM NICKEL UNDERPLATE OVERALL.
- 30 GOLD - .000030 MINIMUM GOLD PLATE IN SELECT AREA OVER .000050 MINIMUM NICKEL UNDERPLATE OVERALL.

MATERIAL:

- HOUSING: GLASS FILLED POLYESTER; 94V-0; COLOR: BLACK.
- TERMINAL: PHOSPHOR BRONZE ALLOY

NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE LABELED *COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC*. CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

DIMENSIONS SHOWN (METRIC) INCH		▽ = 0		▼ = 0		REVISE ONLY ON CAD SYSTEM	
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		TITLE		SALES ASSY - SHUNT 2-CIRCUIT TERMINAL W/OPEN END			
INCH		METRIC		MOLEX INCORPORATED		SHEET NO.	DATE
3 PLACE	± .005	---		U.S.A.		1 OF 1	02/07/91
2 PLACE	± .01	± 0.13		LISE,ILL. 60532			
1 PLACE	---	± 0.25		PART NO.		DRWG. NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDA-7859-2***N			
DRWG. BY AAB	CHK'D. BY	FILE NAME 57859X1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
APP'D. BY MJM	SCALE 10: 1			DIV. D SIZE C			