


2.00mm (.079") Pitch MicroBlade™ Wire-to-Board Header 53014 Vertical



Features and Benefits

- Sizes 2 to 15 circuits
- Locking windows provide secure mating

Reference Information

Packaging: Bag
UL File No.: E29179
CSA File No.: LR19980
Mates With: 51004
Designed In: Millimeters

Electrical

Voltage: 125V

Current:

AWG	24	26	28	30-34
	2.0A	1.5A	1.0A	0.5A

Contact Resistance: 20 milliohms max.

Dielectric Withstanding Voltage: 500V AC/1 min.

Insulation Resistance: 1000 Megohms min.

Physical

Housing: Glass-filled 6/6 nylon, UL 94V-0

Contact: Phosphor Bronze

Plating: Tin


Operating Temperature: -20 to +85°C

Circuits	Order No.	Lead-free
2	53014-0210	Yes
3	53014-0310	
4	53014-0410	
5	53014-0510	
6	53014-0610	
7	53014-0710	
8	53014-0810	

Circuits	Order No.	Lead-free
9	53014-0910	Yes
10	53014-1010	
11	53014-1110	
12	53014-1210	
13	53014-1310	
14	53014-1410	
15	53014-1510	

www.molex.com/customer.html?seriesNumber=53014

2.00mm (.079") Pitch MicroBlade™ Wire-to-Board Header 53015 Right Angle

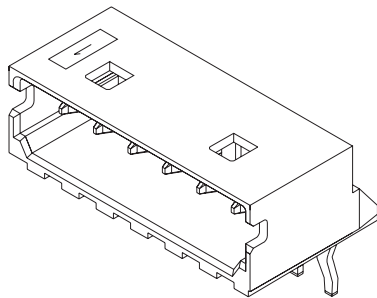

Features and Benefits

- Sizes 2 to 15 circuits
- Locking windows provides secure mating

Reference Information

Packaging: Bag
UL File No.: E29179
CSA File No.: LR19980
Mates With: 51004
Designed In: Millimeters

Electrical

Voltage: 125V

Current:

AWG	24	26	28	30-34
	2.0A	1.5A	1.0A	0.5A

Contact Resistance: 20 milliohms max.

Dielectric Withstanding Voltage: 500V AC/1 min.

Insulation Resistance: 1000 Megohms min.

Physical

Housing: Glass-filled 6/6 nylon, UL 94V-0

Contact: Phosphor Bronze

Plating: Tin

Operating Temperature: -20 to +85°C

Circuits	Order No.	Lead-free
2	53015-0210	Yes
3	53015-0310	
4	53015-0410	
5	53015-0510	
6	53015-0610	
7	53015-0710	
8	53015-0810	

Circuits	Order No.	Lead-free
9	53015-0910	Yes
10	53015-1010	
11	53015-1110	
12	53015-1210	
13	53015-1310	
14	53015-1410	
15	53015-1510	