



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/20/06'		

SINGLE ROW
N:NUMBER OF CONTACTS
A/B:CUSTOMER LENGTH AVAILABLE

- NOTES:
1. MATERIAL
1.1 INSULATOR:PBT(UL 94V-0).
1.2 CONTACT MATERIAL:COPPER ALLOY.
2. SPECIFICATION
2.1 CURRENT RATING:1.5 Amp.
2.2 INSULATION RESISTANCE:1000MΩ Min.
2.3 DIELECTRIC WITHSTANDING:600VAC.
2.4 CONTACT RESISTANCE:50mΩ Max.
2.5 OPERATING TEMPERATURE:-40°C TO+105°C.
3. PRODUCT NUMBER CODE:
DS1029-07 - X X X X X X
- DIM.A B YPE
1: TYPE 1
- MOUNTING TYPE
R: RIGHT ANGLE TYPE
- HOUSING COLOR
B:BLACK
- CONNECTOR PLATING
8: FULL GOLD FLASH
- CONECT TYPE
P:PLUG
- No.OF CONTACTS
1*1-1*40

TABLE A

TYPE	Dimension			Pin Length (mm)
	A	B	C	
1	6.00	3.00	6.00	26.00
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				

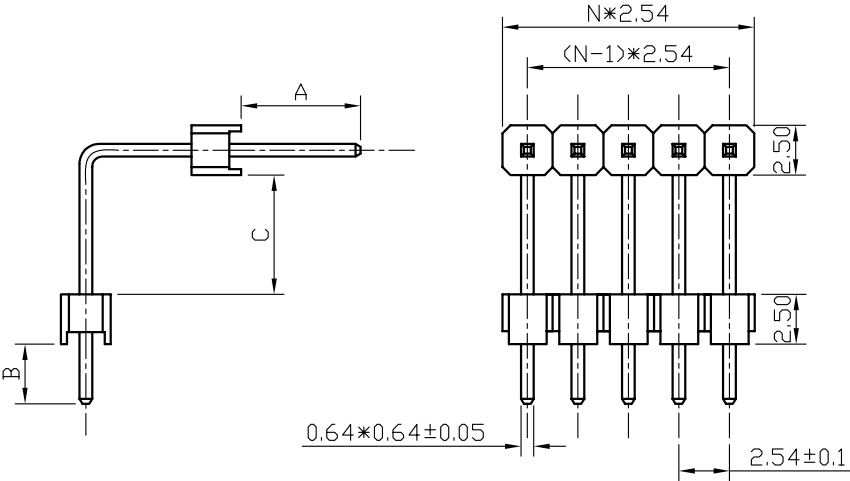

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS		2.54mm PITCH PIN HEADER RIGHT ANGLE
.X	±0.38	.X	±3°	SHEET SIZE	mm	A4
.XX	±0.25	.XX	±2°			SERIES DS1029-07 SERIES
2	CONTACT		COPPER ALLOY			
1	HOUSING		THERMOPLASTIC			
ITEM	PART NAME	PART NO.	MATERILAS			



青岛韦思特电子有限公司