

< L/S band internally matched power GaAs FET >

MGFS52BN2122A

2.1 – 2.2 GHz BAND / 160W

DESCRIPTION

The MGFS52BN2122A is a 160W push-pull type GaAs power FET especially designed for use in 2.1 – 2.2GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

FEATURES

Push-pull configuration


- High output power
Pout=160W (TYP.) @f=2.17GHz
- High power gain
GLP=12.0dB (TYP.) @f=2.17GHz
- High power added efficiency
P.A.E.=48% (TYP.) @f=2.17GHz

APPLICATION

- 2.1-2.2GHz band power amplifier for W-CDMA Base Station

QUALITY

- IG

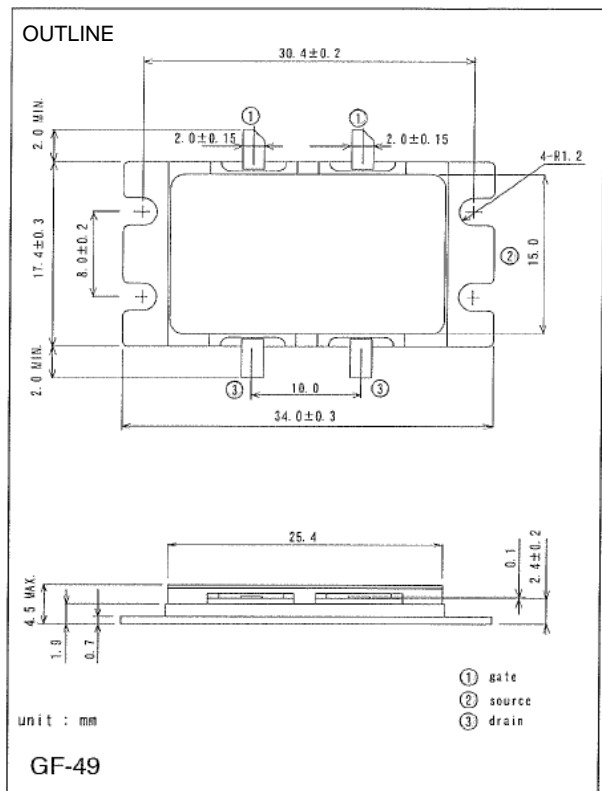

RECOMMENDED BIAS CONDITIONS

- VDS=12V • ID=4.0A • RG=5ohm for each gate

Absolute maximum ratings (Ta=25°C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain breakdown voltage	-20	V
VGSO	Gate to source breakdown voltage	-10	V
PT *1	Total power dissipation	187.5	W
Tch	Channel temperature	175	°C
Tstg	Storage temperature	-65 to +175	°C

*1 : Tc=25°C

Keep Safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measure such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Electrical characteristics (Ta=25°C)


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
GLP	Linear Power Gain	VDS=12V, ID(RF off)=4.0A, f=2.17GHz Pin=32dBm	11	12	-	dB
Pout	Output Power	VDS=12V, ID(RF off)=4.0A, f=2.17GHz Pin=43dBm	50.8	51.8	-	dBm
ID	Drain current	Pin=43dBm	-	23	30	A
P.A.E.	Power added efficiency		-	48	-	%
Rth(ch-c) *2	Thermal resistance	delta Vf method	-	0.55	0.8	°C/W

*2 : Channel-case


MGFS52BN2122A TYPICAL CHARACTERISTICS

P_{out} , I_d , PAE , GAIN , Δ GAIN , Δ PHASE vs. P_{in} (CW 1-tone)





f=2.11GHz

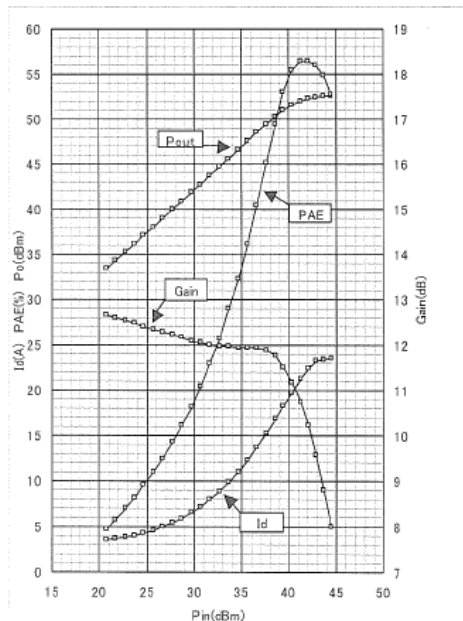

f=2.14GHz

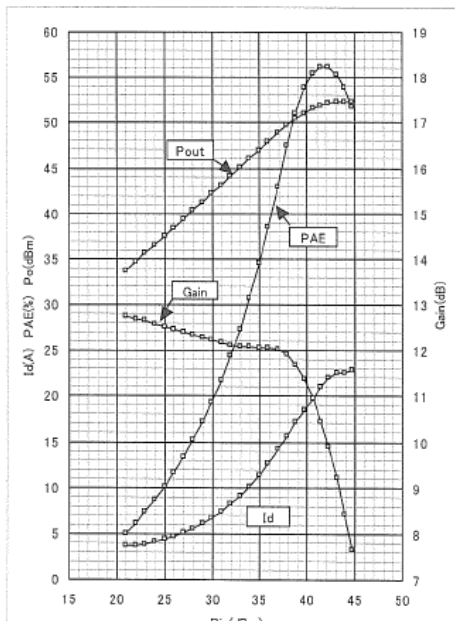



f=2.17GHz

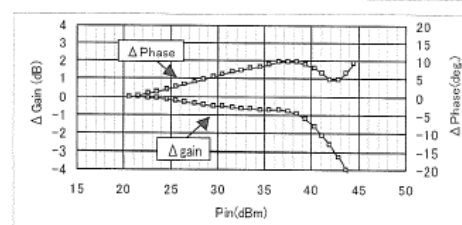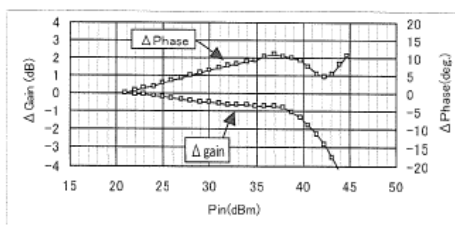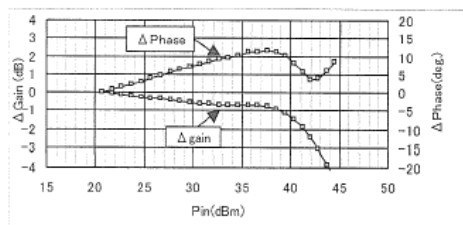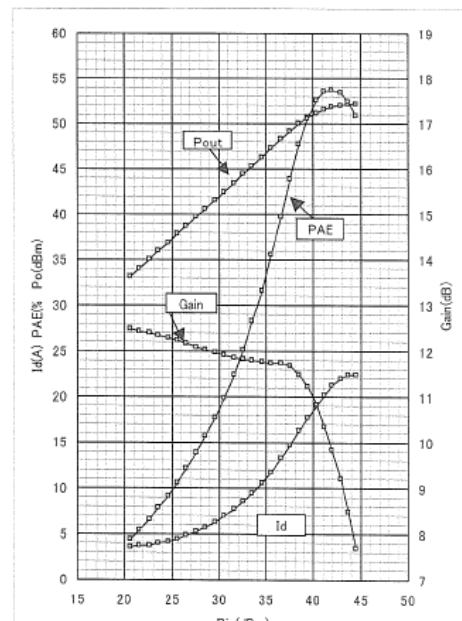



Test Condition : $V_{ds}=12V, I_{dq}=4A, T_a=25deg.C$

Pout , Id , PAE , GAIN , Δ GAIN , Δ PHASE vs. Pin (CW 1-tone)



f=2.11GHz

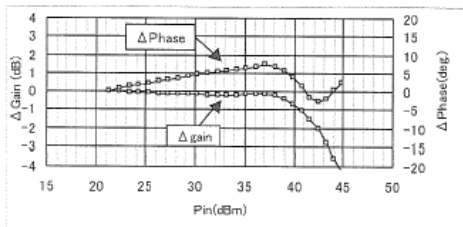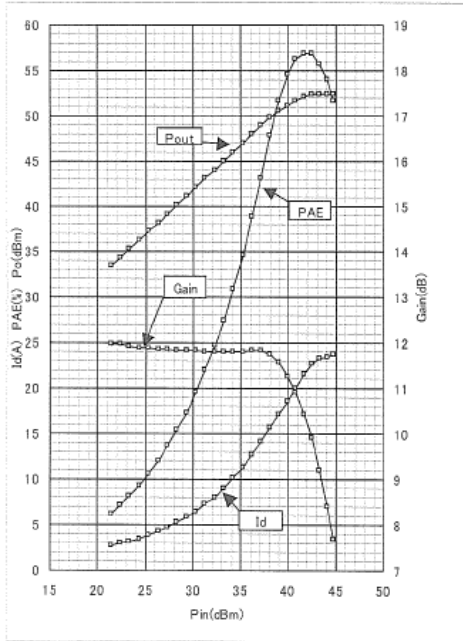

f=2.14GHz

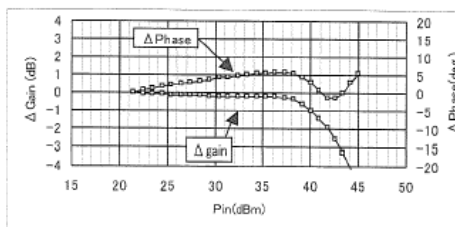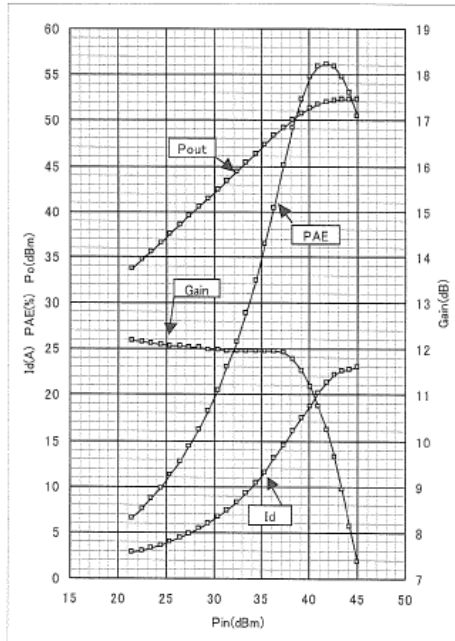

f=2.17GHz

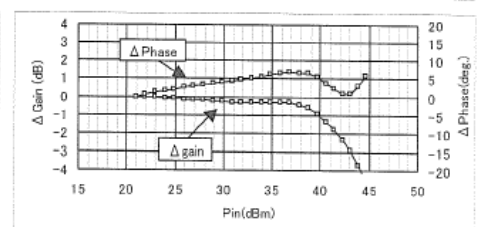
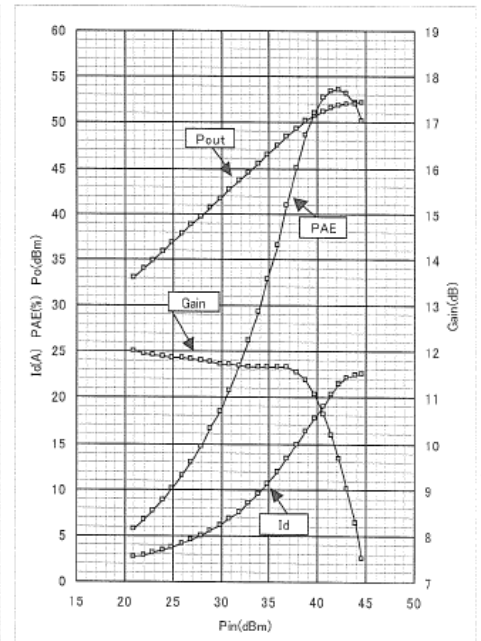


Test Condition : Vds=12V, Idq=2A, Ta=25deg.C



IM3 , IM5 , Id , PAE , GAIN vs. Pout

(W-CDMA signal , 2-tone 3GPP test model 1 w/64DPCH)



f=2.11GHz

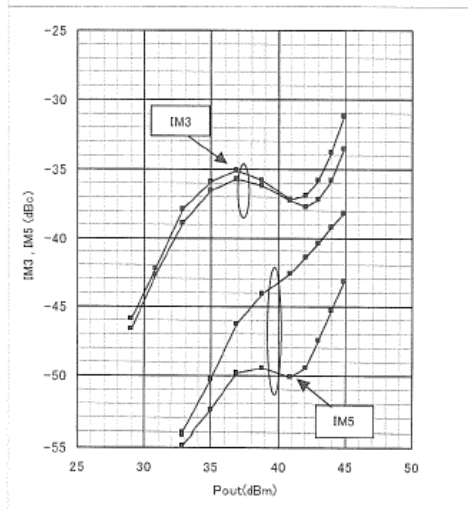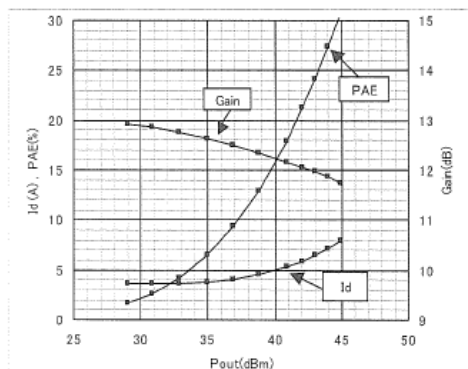

f=2.14GHz

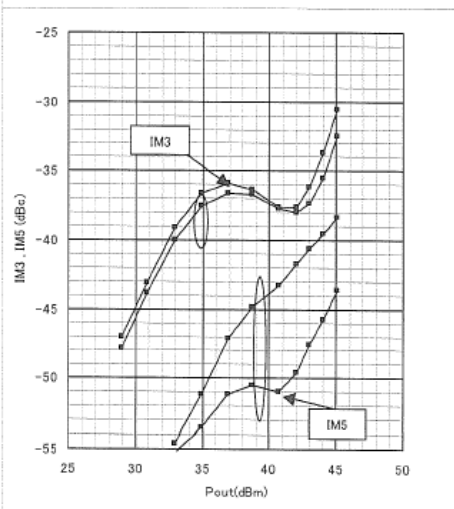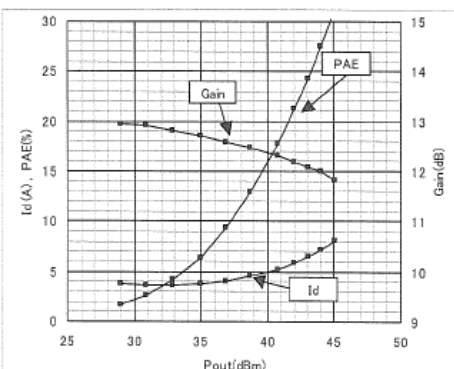

f=2.17GHz

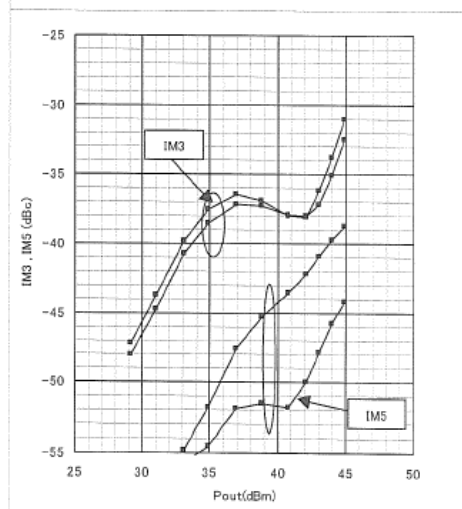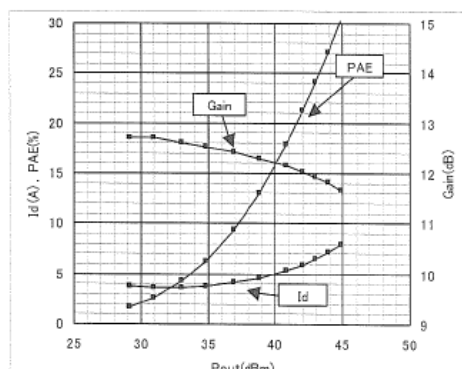

Test Condition : Vds=12V, Idq=4A, Ta=25deg.C

MGFS52BN2122A

2.1 – 2.2 GHz BAND / 160W







IM3 , IM5 , Id , PAE , GAIN vs. Pout

(W-CDMA signal , 2-tone 3GPP test model 1 w/64DPCH)

f=2.11GHz

f=2.14GHz


f=2.17GHz

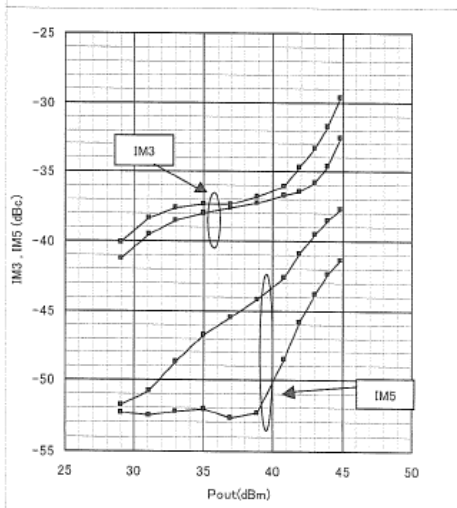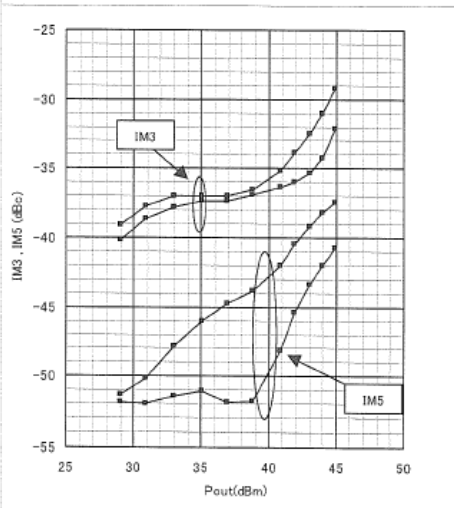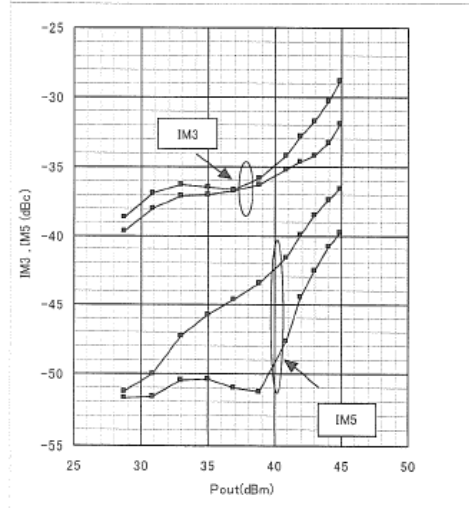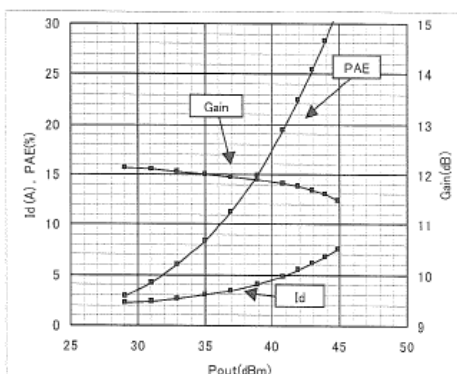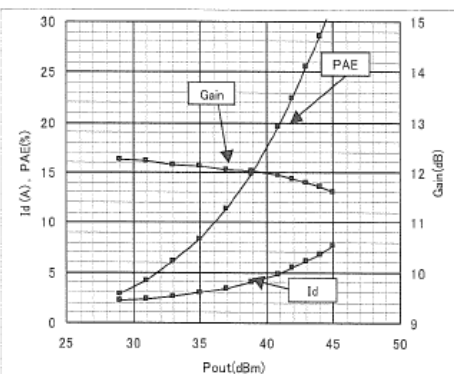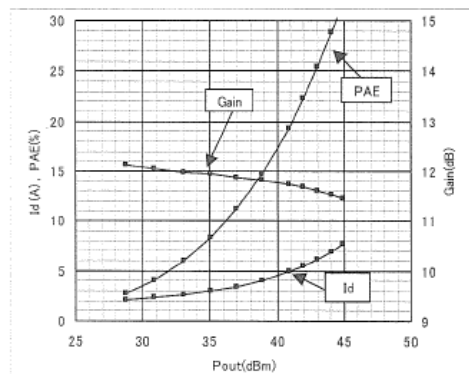

Test Condition : Vds=12V, Idq=2A, Ta=25deg.C

MGFS52BN2122A

MGFS52BN2122A RF TEST FIXTURE


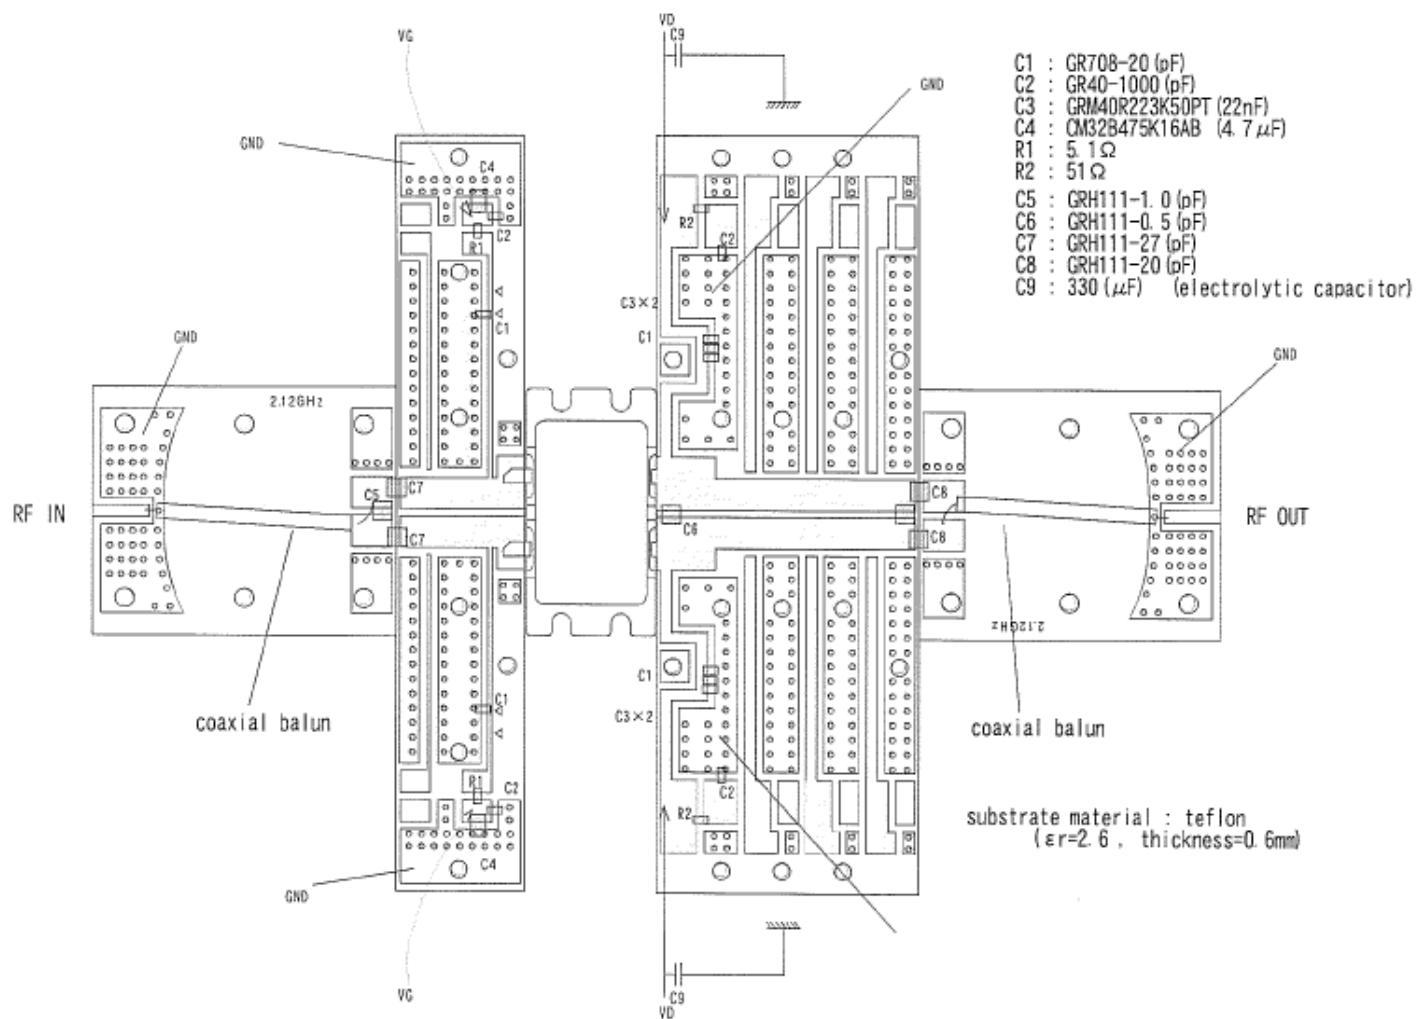


< L/S band internally matched power GaAs FET >

MGFS52BN2122A

2.1 – 2.2 GHz BAND / 160W

MGFS52BN2122A S-parameters(Ta=25deg.C , VDS=12(V),IDS=2.0(A) for one side FET)

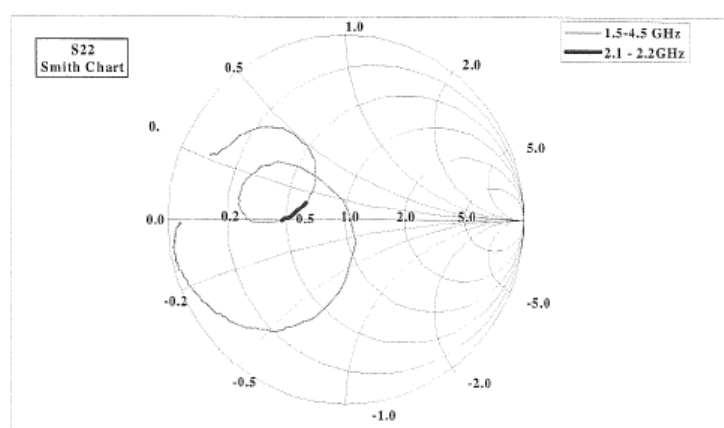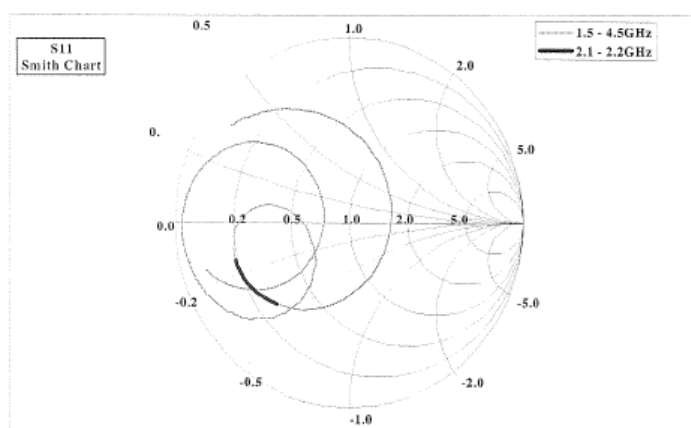

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.MitsubishiElectric.com/>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.