



7



8

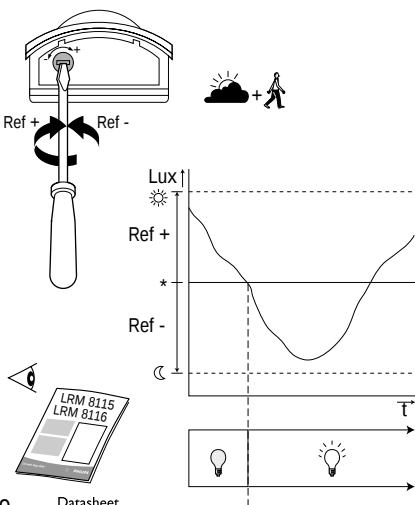

9


3222 636 40101

02/2002

Printed in EU

Data subject to change

<http://www.controls4lighting.com>

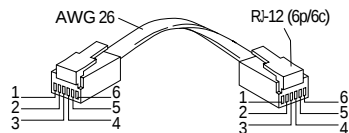

Telejack connectors

Pin/core	Colour wire	Function
1	White	12-24 VDC
2	Black	Common
3	Red	
4	Green	
5	Yellow	
6	Blue	Signal

Supply Voltage *	12 to 24 VDC
Supply Current	8mA LED off 10mA LED on
"Signal" Output	Normally open  $< 50 \text{ mA}$

* I short circuit < 1A

 www.controls4lighting.com

10

□ LRM 8115 movement detector, long range

○ LRM 8116 movement detector, wide angel

Installation instructions

Instructions de montage

Montageanweisung

Montagevoorschrift

Istruzioni di montaggio

Instrucciones de montaje

Installationsvejledning



PHILIPS


Let's make things better




PHILIPS

Let's make things better


dimensions in mm

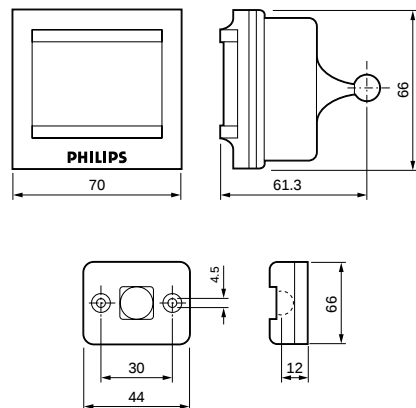


1

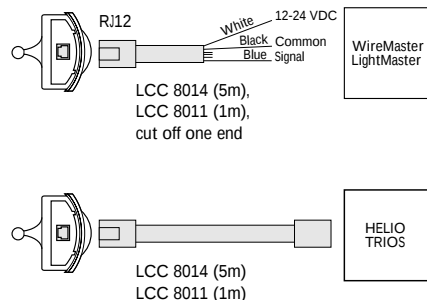


2

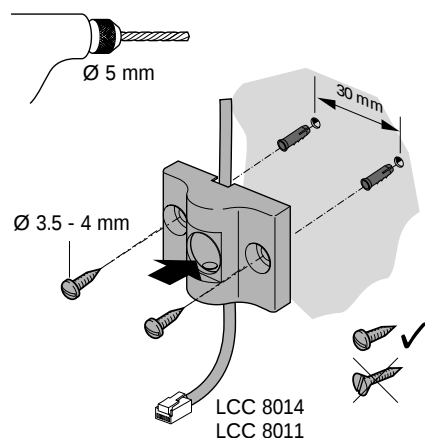


3

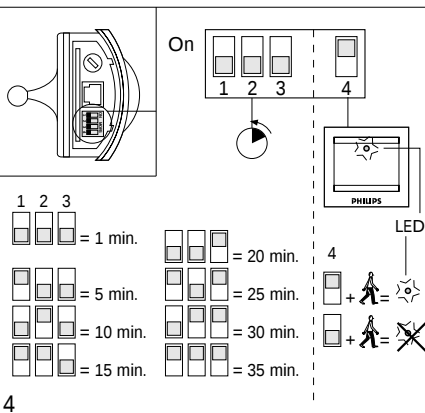

4

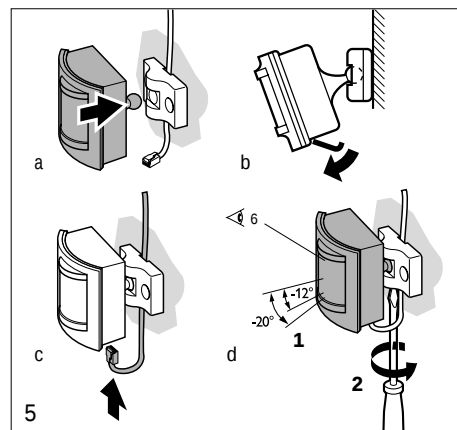

5

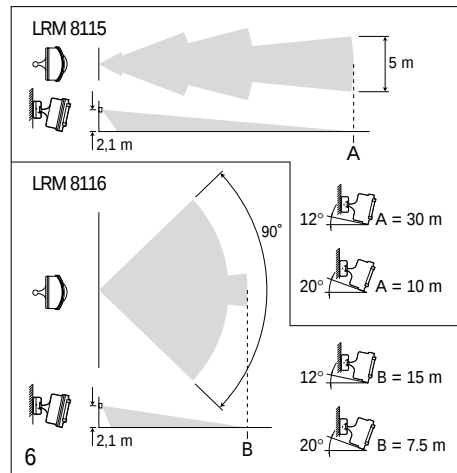

6