

PROFESSIONAL AUDIO SYSTEM >>>

E SERIES

PROFESSIONAL SOUND REINFORCEMENT SYSTEM

DK-100E Product
DK-120E Product
DK-150E Product
DK-215E Product



owner's manual



仅供中国地区使用

PROFESSIONAL PERIPHERAL PRODUCT

E SERIES SPERFORM

E系列以杰出的性能及完美的声音艺术效果.隐藏式把手设计与安装吊挂点相结合,加上E系列独特的吊装,以便安装在天花板以及墙壁上,精确的高低音分频设计,使之具有令人惊异的音响效果,广泛应用于歌舞厅,中小型演出,礼堂,厅堂及多功能会议室等场所.

E series by outstanding performance and perfect sound artistic effects. The hideaway type unifies the hand design and the installment point of suspension, in addition E series unique hoisting, with the aim of installing on the ceiling as well as the wall, the precise high bass frequency division design, enables it to have the amazing acoustics, widely applies in the song ballroom, middle and small scale performance, assembly hall, places and so on main hall and multi-purpose conference rooms.

产 品 目 录

TBALE OF CONTENTS

1. E SERIES SPERFORM
2. DK-100E PERIPHERAL PRODUCT
3. DK-120E PERIPHERAL PRODUCT
4. DK-150E PERIPHERAL PRODUCT
5. DK-215E PERIPHERAL PRODUCT

E SERIES

MODEL: DK-100E

舞台音箱 Stage speaker

LET EFFECT BECOMES

3

OUR BRAND



特性 | Features

- 二音路全频设计 Two-way full-frequency sound design
- 多角度箱体设计 Multi-angle box design
- 倒相式低频辐射 Inverted phase-low-frequency radiation
- 覆盖角度90° X 90° Coverage angle of 90° X 90°

箱体 | Physical

- 箱体 18mm进口桦木夹板 Enclosure 18mm birch plywood with structured
- 表面 黑色耐腐防水粗点喷漆 Finish Wear-resistant textured black paint
- 面罩 椭圆形孔黑色铁网 Grille Oval black hole Rail Network
- 吊挂点 15XM8悬吊 (吊环) Hanging position 15XM8 suspension (rings)
- 连接器 SPEAKON NL4 X 2 Connectors SPEAKON NL4 X 2

频率响应 | Frequency Response




描述 | Descriptions

使用1个高效率10"低音单元和1个1.5"压缩驱动器,号角采用特殊塑料材料最新技术设计并具有波导式辐射。高音单元采用最新的纳米钛技术设计,其音质细而亮丽柔和且频响宽。系统中已内置优化设计分频网络使其在大功率工作时不会产生频点漂移,其中高频段设计更为人性化在近距离时选择FLAT(平衡)档位而在远距离时选择BOOST(提升)档位。

Use a high-efficiency 10" woofer and a 1.5" compression driver, the clarion call for a special fiberglass material with the latest technology to design and gradually open-angle radiation. Tweeter use of the latest nano-titanium technology in design and sound soft and delicate acoustic pressure the wide frequency response. System design has been optimized built-in frequency in the power network to work will not have a frequency drift, high frequency design more humane closer to choose FLAT (balanced) stalls in the selection of long-distance BOOST (upgrading) stalls.

结构示意图 | Construction drawing

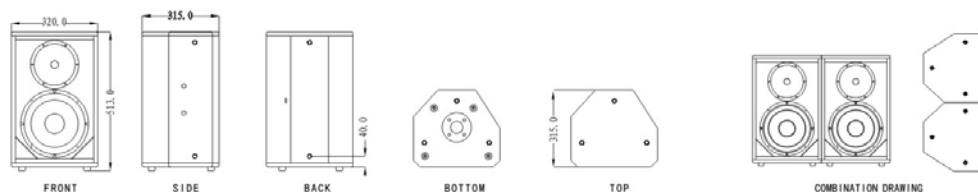

技术规格 | Technique specification

Model 型号	DK-100E
(Power Rated) 额定功率	250W(RMS)
(Frequency Range) 频率响应	65Hz-20KHz
(Rated Impedance) 额定阻抗	8Ω
(Sensitivity 1W.1m) 灵敏度	93dB
(Cell Fabric) 单元结构	1×10" 低音(woofer), 1×1.34"高音(tweeter)
(Max SPL) 最大声压	123dB
(Dispersion H V) 指向性	90° × 90°
(Color) 颜色	黑色 Black
(Size(mm) (W×D×H) 尺寸	320×315×513mm
(Net Weight KG) 净重	14KG

MODEL: DK-120E

舞台音箱 Stage speaker

E SERIES


» 特性 | Features

- 二音路全频设计
- 多角度箱体设计
- 倒相式低频辐射
- 覆盖角度90° X 50°
- Two-way full-frequency sound design
- Multi-angle box design
- Inverted phase-low-frequency radiation
- Coverage angle of 90° X 50°

» 箱体 | Physical

- 箱壳 18mm进口桦木夹板
- 表面 黑色耐磨防水粗点喷漆
- 面罩 椭圆形孔黑色铁网
- 吊挂件 2个吊环
- 连接器 SPEAKON NL4 X 2
- 吊挂点 6XM8悬吊 (吊环)
- Enclosure 18mm birch plywood with structured
- Finish 黑色耐磨防水粗点喷漆
- Grille 椭圆形孔黑色铁网
- Suspension hardware 两个吊环
- Connectors SPEAKON NL4 X 2
- Hanging point 6XM8 suspension (rings)

» 频率响应 | Frequency Response

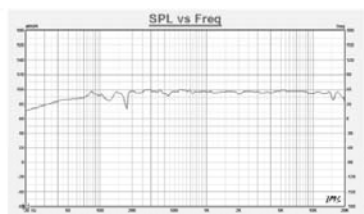


» 描述 | Descriptions

使用1个高效率12"低音单元和1个1.5"压缩驱动器, CD式号角采用特殊玻璃钢材料最新技术设计并具有多角度辐射。高音单元采用最新的纳米钛技术设计, 其音质细而亮丽柔和且频响宽。系统中已内置优化设计分频网络使其在大功率工作时不会产生频点漂移, 其中高频段设计更为人性化在近距离时选择FLAT (平衡) 档位而在远距离时选择BOOST (提升) 档位。

Use a high-efficiency 12" woofer and a 1.5" compression driver, the clarion call for a special fibreglass material with the latest technology to design and gradually open-angle radiation. Tweeter use of the latest nano-titanium technology in design and sound soft and delicate acoustic pressure the wide frequency response. System design has been optimized built-in frequency in the power network to work will not have a frequency drift, high frequency design more humane closer to choose FLAT (balanced) stalls in the selection of long-distance BOOST (upgrading) stalls.

» 结构示意图 | Construction drawing

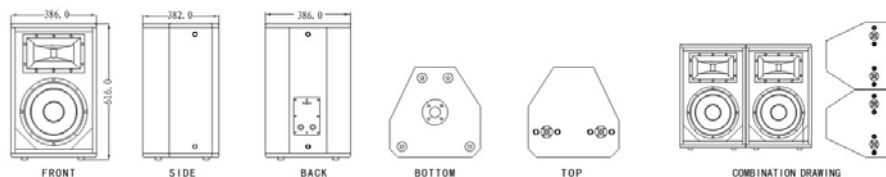

■ 技术规格 | Technique specification

Model 型号	DK-120E
(Power Rated) 额定功率	300W(RMS)
(Frequency Range) 频率响应	55Hz-18KHz
(Rated Impedance) 额定阻抗	8Ω
(Sensitivity 1W.1m) 灵敏度	99dB
(Cell Fabric) 单元结构	1×12" 低音(woofer), 1×1.34"高音(tweeter)
(Max SPL) 最大声压	128dB
(Dispersion H×V) 指向性	90° × 50°
(Color) 颜色	黑色 Black
(Size(mm) (W×D×H) 尺寸	386×382×616mm
(NetWeight KG) 净重	22KG

E SERIES

MODEL: DK-150E

舞台音箱 Stage speaker



特性 | Features

- 二音路全频设计 Two-way full-frequency sound design
- 多角度箱体设计 Multi-angle box design
- 倒相式低频辐射 Inverted phase-low-frequency radiation
- 覆盖角度90° X 50° Coverage angle of 90° X 50°

箱体 | Physical

- 箱体 18mm进口桦木夹板 Enclosure 18mm birch plywood with structured
- 表面 黑色耐磨防水粗点喷漆 Finish Wear-resistant textured black paint
- 面罩 椭圆形孔黑色铁网 Grille Oval black hole Rail Network
- 吊挂件 2个吊环 Suspension hardware two rings
- 连接器 SPEAKON NL4 X 2 Connectors SPEAKON NL4 X 2
- 吊挂点 6XM8悬吊 (吊环) Handing point 6XM8 suspension (rings)

频率响应 | Frequency Response



描述 | Descriptions

使用1个高效率15"低音单元和1个1.73"压缩驱动器, CD式号角采用特殊玻璃钢材料最新技术设计并具有多角度辐射。高音单元采用最新的纳米钛技术设计, 其音质细而亮丽柔和且频响宽。系统中已内置优化设计分频网络使其在大功率工作时不会产生频点漂移, 其中高频段设计更为人性化在近距离时选择FLAT (平衡) 档位而在远距离时选择BOOST (提升) 档位。

Use a high-efficiency 15" woofer and a 1.73" compression driver, the clarion call for a special fibreglass material with the latest technology to design and gradually open-angle radiation. Tweeter use of the latest nano-titanium technology in design and sound soft and delicate acoustic pressure the wide frequency response. System design has been optimized built-in frequency in the power network to work will not have a frequency drift, high frequency design more humane closer to choose FLAT (balanced) stalls in the selection of long-distance BOOST (upgrading) stalls.

结构示意图 | Construction drawing



技术规格 | Technique specification

Model 型号	DK-150E
(Power Rated) 额定功率	400W(RMS)
(Frequency Range) 频率响应	45Hz-19KHz
(Rated Impedance) 额定阻抗	8Ω
(Sensitivity 1W.1m) 灵敏度	100dB
(Cell Fabric) 单元结构	1×15" 低音(woofer), 1×1.73" 高音(tweeter)
(Max SPL) 最大声压	132dB
(Dispersion H×V) 指向性	90° × 50°
(Color) 颜色	黑色 Black
(Size(mm) (W×D×H) 尺寸	480×482×834mm
(Net Weight KG) 净重	38.5KG

MODEL: DK-215E

舞台音箱 Stage speaker

E SERIES


特性 | Features

- 二音路全频设计 Two-way full-frequency sound design
- 梯形箱体设计 Trapezoid box design
- 倒相式低频辐射 Inverted phase-low-frequency radiation
- 覆盖角度90° X 50° Coverage angle of 90° X 50°

箱体 | Physical

- 箱壳 18mm进口桦木夹板 Enclosure 18mm birch plywood with structured
- 表面 黑色耐腐防水粗点喷漆 Finish Wear-resistant textured black paint
- 面罩 椭圆形孔黑色铁网 Grille Oval black hole Rail Network
- 吊挂件 2个吊环 Suspension hardware two rings
- 连接器 SPEAKON NL4 X 2 Connectors SPEAKON NL4 X 2
- 吊挂点 10XM8悬吊 (吊环) Hanging point 10XM8 suspension (rings)


频率响应 | Frequency Response

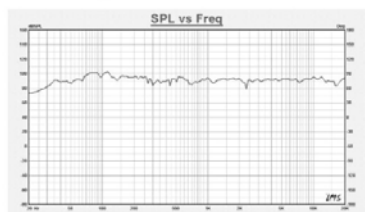

描述 | Descriptions

使用2个高效率15"低音单元和1个1.7"压缩驱动器，CD式号角采用特殊玻璃钢材料最新技术设计并具有多角度辐射。高音单元采用最新的纳米钛技术设计，其音质细而亮丽柔和且频响宽。系统中已内置优化设计分频网络使其在大功率工作时不会产生频点漂移，其中高频段设计更为人性化在近距离时选择FLAT（平衡）档位而在远距离时选择BOOST（提升）档位。Use two high-efficiency 15" woofer and a 1.7" compression driver, the clarion call for a special fibreglass material with the latest technology to design and gradually open-angle radiation. Tweeter use of the latest nano-titanium technology in design and sound soft and delicate acoustic pressure the wide frequency response. System design has been optimized built-in frequency in the power network to work will not have a frequency drift, high frequency design more humane closer to choose FLAT (balanced) stalls in the selection of long-distance BOOST (upgrading) stalls.

结构示意图 | Construction drawing

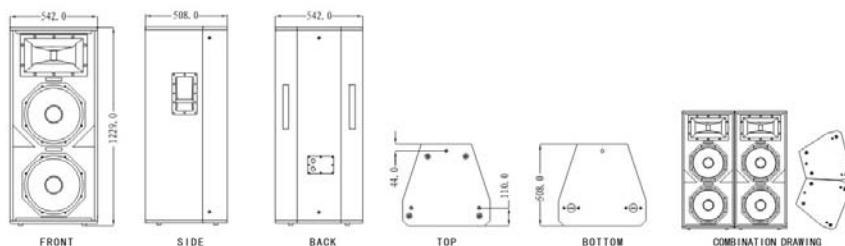

技术规格 | Technique specification

Model 型号	DK-215E
(Power Rated) 额定功率	800W(RMS)
(Frequency Range) 频率响应	40Hz-19KHz
(Rated Impedance) 额定阻抗	4Ω
(Sensitivity 1W.1m) 灵敏度	103dB
(Cell Fabric) 单元结构	2×15"低音(woofer), 1×2"高音(tweeter)
(Max SPL) 最大声压	138dB
(Dispersion H×V) 指向性	90° × 50°
(Color) 颜色	黑色 Black
(Size(mm) (W×D×H) 尺寸	542×508×1229mm
(Net Weight KG) 净重	70.5KG



Professional sound systems
Dardankings Audio Manufacturingco. , LTD
SonicArk (U. K) International Holdings LTD.
15 Talbot Road, Lancashire. UK PR1, 8NX
www.sonicark.com