


NPN/PNP SILICON POWER DARLINGTON TRANSISTORS

TIP122F NPN
TIP127F PNP
TO-220FP

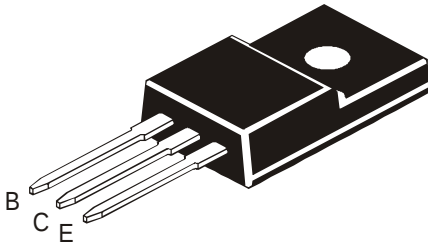

Designed for General-Purpose Amplifier and Low-Speed Switching Applications.

ABSOLUTE MAXIMUM RATINGS(Ta=25deg C)

DESCRIPTION	SYMBOL	VALUE	UNIT
Collector -Base Voltage	VCBO	100	V
Collector -Emitter Voltage	VCEO	100	V
Emitter Base Voltage	VEBO	5.0	V
Collector Current -Continuous	IC	5.0	A
Collector Current (Peak)	ICM	8.0	A
Base Current	IB	120	mA
Total Power Dissipation @ Tc=25 deg C	PD	65	W
Derate Above 25 deg C		0.52	W/deg C
Total Power Dissipation @ Ta=25 deg C	PD	2.0	W
Derate Above 25 deg C		0.016	W/deg C
Unclamped Inductive Load Energy (1)	E	50	mj
Junction Temperature	Tj	150	deg C
Storage Temperature Range	Tstg	-65 to +150	deg C

THERMAL RESISTANCE

From Junction to Ambient	Rth(j-a)	62.5	deg C/W
From Junction to Case	Rth(j-c)	1.92	deg C/W


(1) IC=1A, L=100mH,P.R.F.=10Hz, VCC=20V, RBE=100 ohms

ELECTRICAL CHARACTERISTICS (Ta=25 deg C Unless Specified)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Collector Emitter (sus) Voltage	VCEO (sus) *	IC=100mA, IB=0	100	-	V
Collector Cut off Current	ICBO	VCB=100V, IE=0	-	0.2	mA
	ICEO	IB=0, VCE=50V	-	0.5	mA
Emitter Cut off Current	IEBO	VEB=5V, IC=0	-	2.0	mA
	VCE(Sat)*	IC=3A, IB=12mA	-	2.0	V
Collector Emitter Saturation Voltage		IC=5A, IB=20mA	-	4.0	V
	VBE(on) *	IC=3A, VCE=3V	-	2.5	V
Base Emitter on Voltage	hFE*	IC=0.5A, VCE=3V	1.0	-	K
		IC=3A, VCE=3V	1.0	-	K

ELECTRICAL CHARACTERISTICS (Ta=25 deg C Unless Specified)			TIP122F/127F		
DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Small Signal Current Gain	/hfe/	IC=3A, VCE=4V f=1MHz	4.0	-	
Output Capacitance	Cob	Cob=10V, IE=0, f=0.1MHz			
		PNP	-	300	pF
		NPN	-	200	pF
*Pulse test: Pulse Width=300 us; Duty Cycle=2%					

TO-220FP (Fully Isolated) Plastic Package

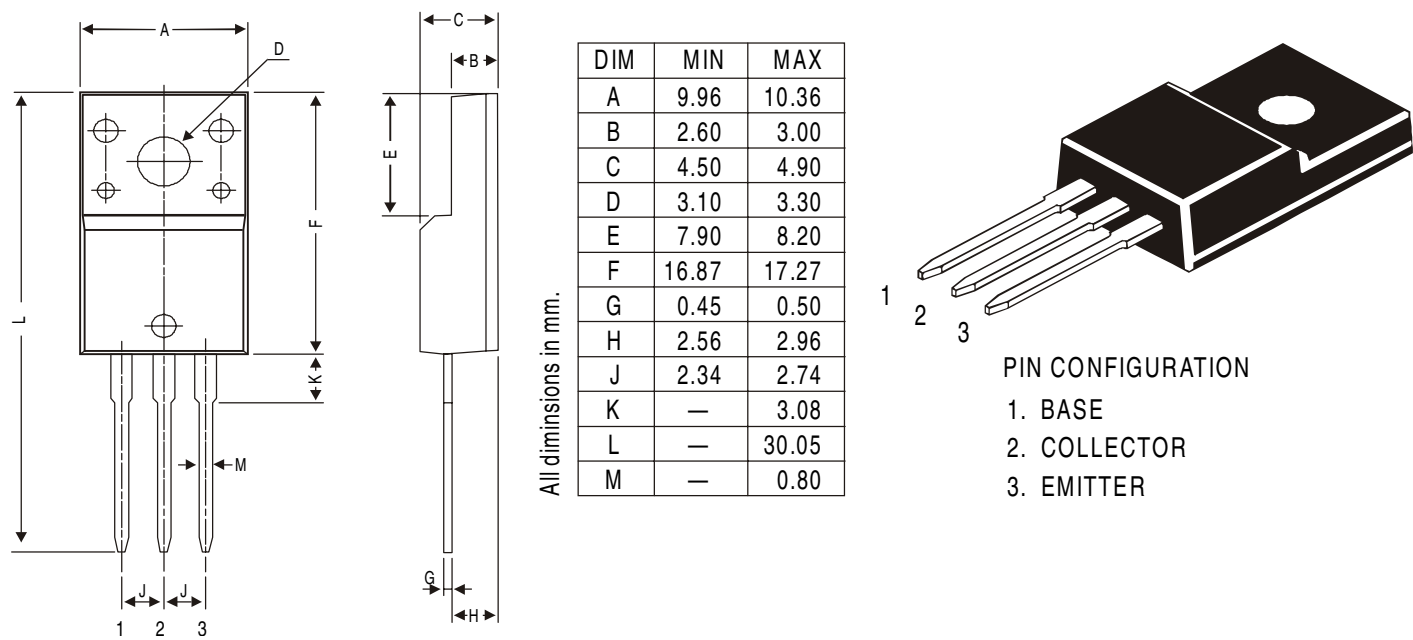

Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-220FP	200 pcs/polybag	396 gm/200 pcs	3" x 7.5" x 7.5"	1.0K	17" x 15" x 13.5"	16.0K	36 kgs
	50 pcs/tube	120 gm/50 pcs	3.5" x 3.7" x 21.5"	1.0K	19" x 19" x 19"	10.0K	29 kgs