


Silicon Variable Capacitance Diode

- For tuning of extended frequency band in VHF TV/ VTR tuners

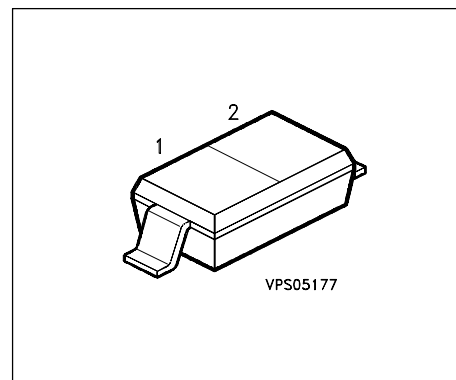

Type	Marking	Ordering Code	Pin Configuration			Package
BB 619C	yellow S	Q62702-B683	1 = C	2 = A		SOD-123

Maximum Ratings

Parameter	Symbol	Values	Unit
Diode reverse voltage	V_R	30	V
Peak reverse voltage ($R \geq 5k\Omega$)	V_{RM}	35	
Forward current	I_F	20	mA
Operating temperature range	T_{op}	- 55 ... + 125	°C
Storage temperature	T_{stg}	- 55 ... + 150	

Thermal Resistance


Junction - ambient	R_{thJA}	≤ 450	K/W
--------------------	------------	------------	-----

Electrical Characteristics at $T_A=25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics					
Reverse current $V_R = 30\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$ $V_R = 30\text{ V}$, $T_A = 85\text{ }^{\circ}\text{C}$	I_R	- -	- -	10 200	nA
AC characteristics					
Diode capacitance $V_R = 1\text{ V}$, $f = 1\text{ MHz}$ $V_R = 2\text{ V}$, $f = 1\text{ MHz}$ $V_R = 25\text{ V}$, $f = 1\text{ MHz}$ $V_R = 28\text{ V}$, $f = 1\text{ MHz}$	C_T	36 27 2.5 2.4	39 30.2 2.72 2.55	42 33.2 3.05 2.8	pF
Capacitance ratio $V_R = 2\text{ V}$, $V_R = 25\text{ V}$, $f = 1\text{ MHz}$	C_{T2}/C_{T25}	9.5	11.1	-	-
Capacitance ratio $V_R = 1\text{ V}$, $V_R = 28\text{ V}$, $f = 1\text{ MHz}$	C_{T1}/C_{T28}	13.5	15.3	-	
Capacitance matching $V_R = 28\text{ V}$, $f = 1\text{ MHz}$	$\Delta C_T/C_T$	-	-	2.5	%
Series resistance $V_R = 5\text{ V}$, $f = 470\text{ MHz}$	r_s	-	0.6	-	Ω
Series inductance	L_s	-	2.5	-	nH


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

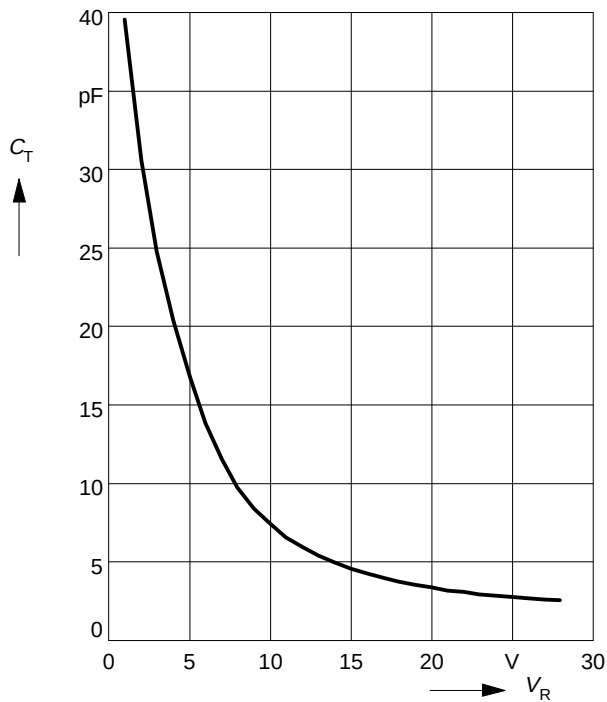


Temperature coefficient of the diode capacitance $T_{Cc} = f(V_R)$

$f = 1\text{MHz}$

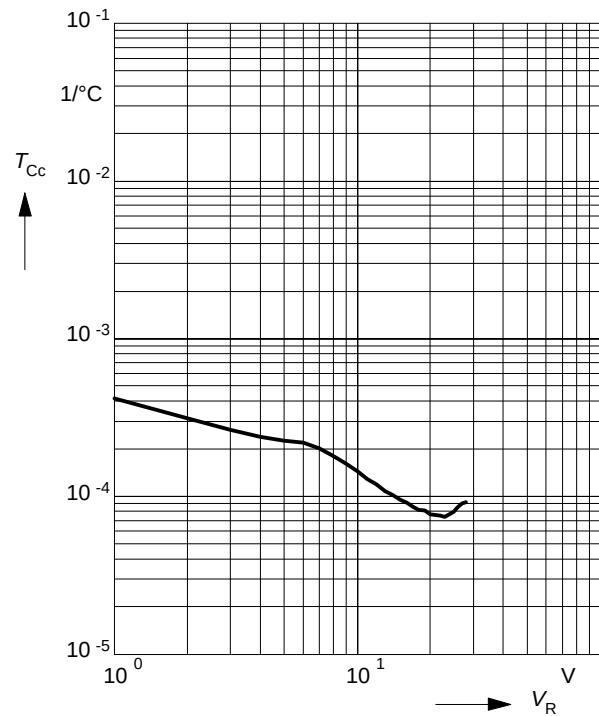

Reverse current $I_R = f(T_A)$

$V_R = 28\text{V}$

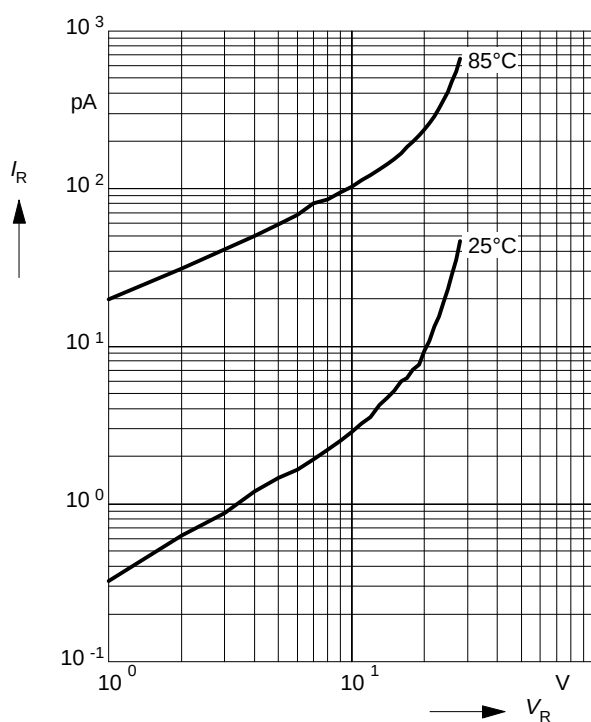

Reverse current $I_R = f(V_R)$

$T_A = \text{Parameter}$

