
IBM Proventia Management SiteProtector SP2001 Quick Start Guide

This document guides you through the process of connecting and performing the initial configuration of your IBM® Proventia® Management SiteProtector SP2001 appliance.

Front panel



Rear panel

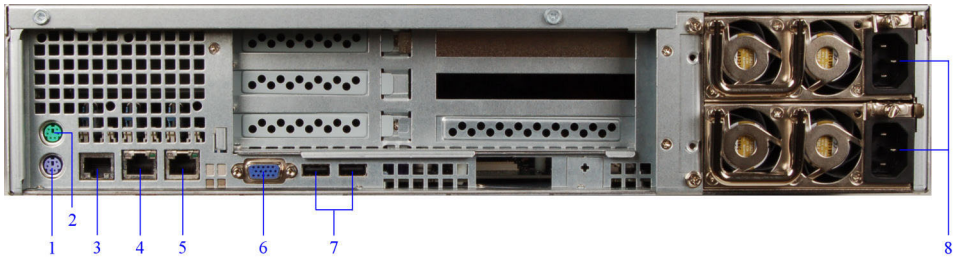

Rear panel

1. Keyboard port
2. Mouse port
3. Serial port
4. Management Interface (NIC)
5. Unused port
6. VGA port
7. USB ports
8. Power supplies

© Copyright IBM Corp. 2009

Before you begin

This document provides connection and initial configuration information for the IBM Proventia Management SiteProtector SP2001.

The steps you perform here will allow you remote network access to the appliance so that you can perform more advanced configuration tasks. You will find more advanced configuration information in the *IBM Proventia Management SiteProtector SP2001 Hardware Configuration Guide*, available on the Web at `http://www.iss.net/support/documentation`.

Gather materials

✓	Materials
☐	IBM Proventia Management SiteProtector SP2001
☐	Ethernet cable (included with appliance)
☐	2 power cords (included with appliance)

Gather network information

Use this table to record important network information you need to configure the appliance:

Settings	Your Settings
IP Address	_____ . _____ . _____ . _____
Subnet Mask	_____ . _____ . _____ . _____
Default Gateway	_____ . _____ . _____ . _____
DNS Server	_____ . _____ . _____ . _____
Hostname	_____

Gather Product Key

Use this space to record the Product Key of the appliance's operating system.

This Product Key can be found on the Certificate of Authenticity that is affixed to the appliance. You will need it in the event of a system restore.

Product Key _____

Connect the Appliance

Procedure

1. Connect both power cords to the appliance to prevent warning signals from sounding.
2. Connect the network to the management interface using the supplied Ethernet cable.
3. Turn on the appliance. The power button is located on the back of the appliance.
4. When the LCD display reads ″IBM ISS Proventia SP2001,″ proceed to Initial Configuration.



Initial configuration

Enter the network information you gathered earlier.

Procedure

1. Press **Enter** on the LCD panel. "Appliance PIN" appears in the LCD menu.
2. If you want to specify a personal identification number that users must enter to configure the appliance, press **Enter**, specify a 4-digit number in the field provided, and then press **Enter** again.

   Note: Use the **Up** and **Down** buttons to specify digits and the **Right** and **Left** buttons to navigate between the fields.
3. To configure the appliance to communicate with other devices, navigate to the Configuration menu (using the **Up** and **Down** buttons), then press the **Enter** button to go into the network configuration. Enter the information the same way you entered information in Step 2.
   - IP Address (required)
   - Subnet Mask
   - Default Gateway
   - DNS Server
   - Host Name

   Note: A reboot occurs after you complete your network configuration.

Next Steps

Install a Console

Select a local workstation on which to install a SiteProtector Console.

Procedure

1. From this local workstation, point a Web browser to the Proventia Management SiteProtector SP2001's management address: `https://<configured address>:3994`.
2. Read and accept the End User License Agreement. The system then displays the Proventia Management SiteProtector SP2001 home page with the following three links:

- SiteProtector Web Access
- Install SiteProtector Console
- IBM Internet Security Systems

3. Right-click the **Install SiteProtector Console** link, and then select **Save/Run** from the pop-up menu.
4. Follow the steps on the installation wizard to install the SiteProtector Console on the local workstation.

Launch Console and log in

Procedure

1. Launch the SiteProtector Console.
2. Right-click the **My Sites** node in the left pane.
3. Select **New → Site**.
4. Enter the following information:

Option	Description
Server	The IP address configured during initial configuration.
User	Administrator
Password	ISSADMIN

Configure advanced settings

See the *SP2001 Hardware Configuration Guide* for detailed information.

Procedure

1. Change the Administrative Password.
2. Change the Database (SA) Password.

Configure your Site

The *IBM Proventia Management SiteProtector Configuration Guide* walks you through other important tasks such as configuring your security policy, creating firewall rules to protect your network, tracking alerts, and monitoring important system information.

This edition applies to model SP2001 of the IBM Proventia Management SiteProtector™ appliance and to all subsequent releases and modifications until otherwise indicated in new editions.

© Copyright International Business Machines Corporation 2009. US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

(P) PN: 51J2499 (2P) EC: L68137

Printed in the USA.