Quick Installation Guide

English | 繁中 | 简中 | 日本語 | Français | Español | Deutsch | Português | Italiano | Türkçe | Polski | Русский | Česky | Svenska | العربية

ST7501

Video Management Software

VIVOTEK

Table of Contents

ST7501 Installation *2*

Installing the ST7501 Software 2

ST7501 LiveClient Configuration *4*

Activating ST7501 LiveClient 4

ST7501 LiveClient User Interface 4

How to Add Devices 5

ST7501 Playback Configuration *8*

Activating ST7501 Playback 8

ST7501 Playback User Interface 8

How to View Recorded Video 9

ST7501 Installation

Installing the ST7501 Software

1. Run **ST7501_Setup.exe** on your computer, and specify a location to install the program.





2. Select the items you want to install, then click **Next** to continue.




Client applications

Server application


3. Assign a username and password for the ST7501 Server.



a. ST7501 server will by default store the recorded media file under c:\Recording. Click **Browse** ... to change the path if you plan to store the data under another path. Then click **Next** to continue.

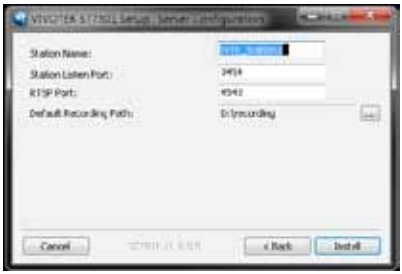

b. Wait for the installation process to complete, then click **Close** to exit the installation program.

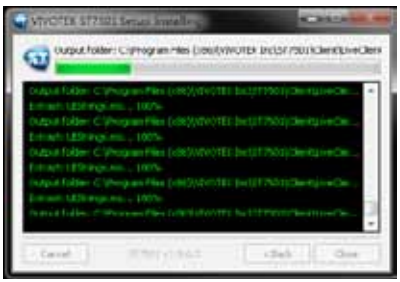


ST7501 LiveClient Configuration

Activating ST7501 LiveClient

1. After installation, run the **ST7501 LiveClient** program.
2. Enter the **IP Address**, **User Name**, **Password** and **Communication Port** of the ST7501 Server.
3. Click **Login**, the monitoring window will be displayed.



ST7501 LiveClient User Interface

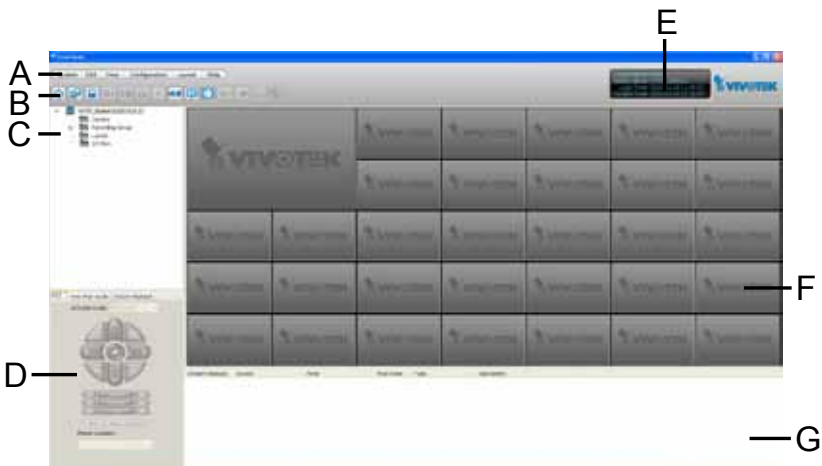



A. Menu bar B. Quick access bar C. Hierarchical management tree
D. Camera control panel E. Status panel F. Live video monitoring window G. Event window

How to Add Devices

Select a station from the hierarchical management tree; click **Configuration > Camera Management > Batch insert camera** on the menu bar (or **right-click** the target station, then select **Camera Management > Batch insert camera**). The Batch Insert window will pop up.



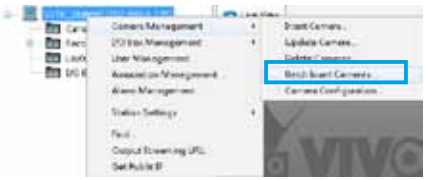

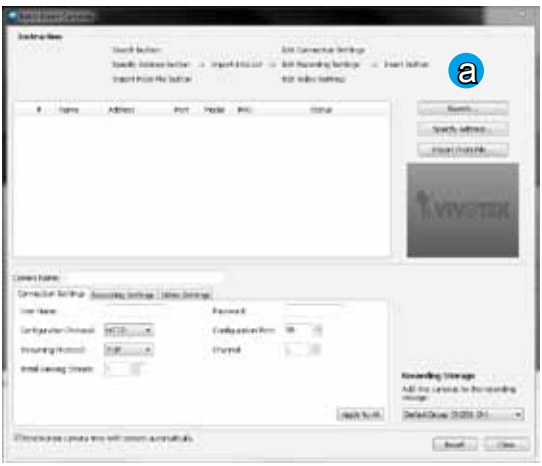


a. Click **Search** to open the **Search Camera** window.

b. You can select to search for "all cameras" or "cameras which are not inserted" using the checkcircles on top.

c. You may also specify the search condition using the following criteria:


- IP Range: Enter a range of IP addresses (in Classs C dotted-decimal notation) to narrow down the list;
- IP with prefix: Type in the prefix of the IP address to narrow down the list.
- Model with prefix: The user can type in part of the model name or the complete model name of the cameras to narrow down the search.

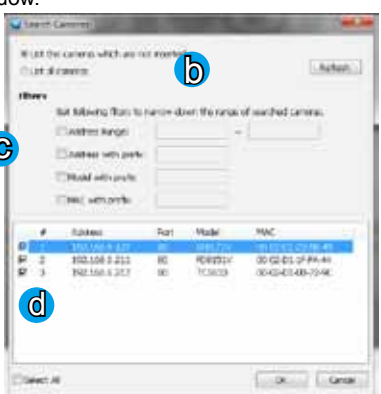

- MAC with prefix: You can key in the prefix of the MAC address of the cameras to narrow down the search.

d. When search is filtered, you can select the cameras each by a single click or check **Select All** to add them in the batch insert list. Then click **OK** to finish searching.


e. All selected cameras will be displayed on the batch insert list with the associated information and the connection status. When you click on a camera, a live view will display on the right side for you to identify the cameras on the list. If you want to remove a camera from the list, click the trash can icon to delete it.

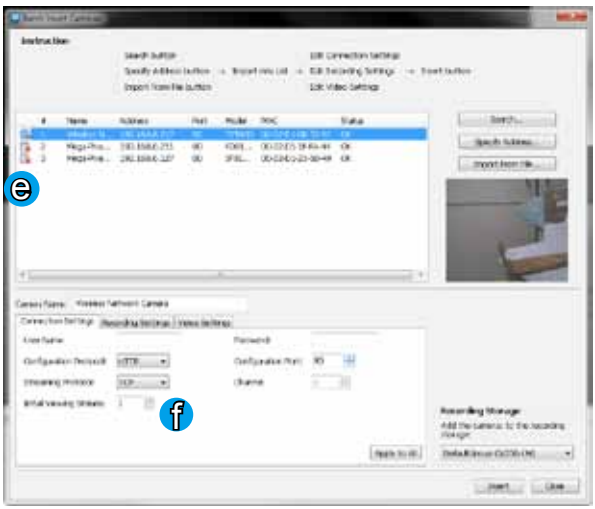

f. At the bottom of the window, there is a field for you to alter the camera settings including Connection Settings and Recording Settings. You can apply the new settings to each camera on the list, or click **Apply to All** to apply the same configurations to all the cameras. For more information about Connection Settings and Recording Settings, please refer to your User Manual.

g. Click **Exit** to close the camera management window and return to the monitoring window.

h. Back to the main window, you will find the newly-inserted devices displayed under the station and the live video in the video cell.

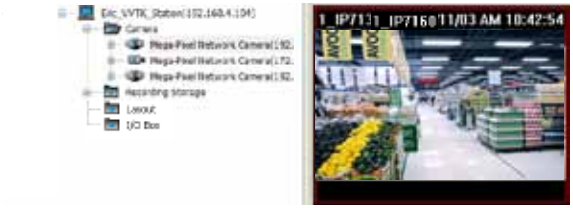


ST7501 Playback Configuration

Activating ST7501 Playback

1. After installation, run the **ST7501 Playback** program.
2. Enter the **IP Address, User Name, Password** and **Communication Port** of the ST7501 Server.
3. Click **Login**, the playback window will be displayed.




ST7501 Playback User Interface

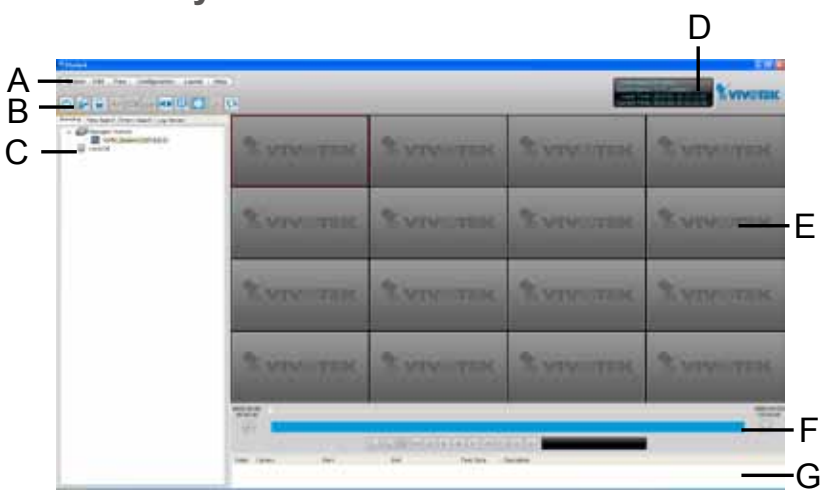

A. Menu bar B. Quick access bar C. Query panel (Browsing/ Time search/ Event search/ Log viewer) D. Status panel E. Recorded video playback window F. Playback control panel G. Video clips list


How to View Recorded Video

1. On the **Browsing** page, **right-click** a station, device, or date item and click **Refresh** to display the recorded video clips.

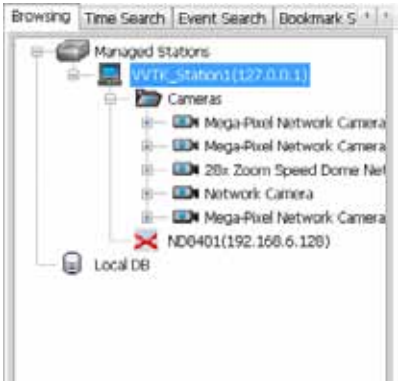


You can also use the tabbed menus to search for recorded videos via **Time**, **Event**, **Bookmark** menus, and so on.

2. Click a **date** item on the hierarchical management tree. The corresponding recorded video clips will be listed on the video clip list. **Double-click** a video clip or **drag-and-drop** it to one of the video cells.

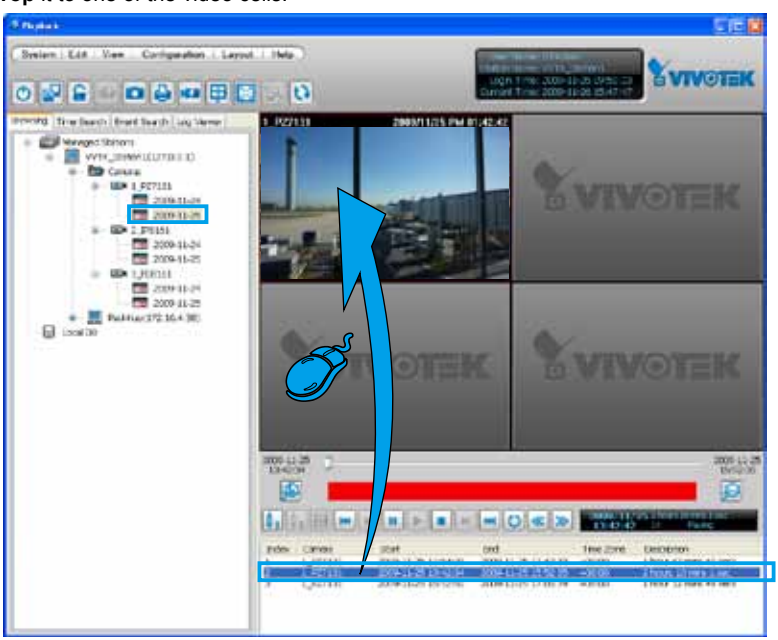

3. If you want to review all clips recorded on the same date, select a date then **drag-and-drop** it to one of the video cells.

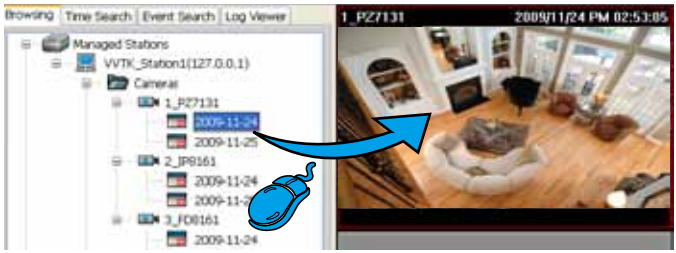



Ver.1.2
Copyright© 2014 VIVOTEK INC. All rights reserved.

VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
| **T:** +886-2-82455282 | **F:** +886-2-82455532 | **E:** sales@vivotek.com

VIVOTEK USA, INC.
2050 Ringwood Avenue, San Jose, CA 95131
| **T:** 408-773-8686 | **F:** 408-773-8298 | **E:** salesusa@vivotek.com

VIVOTEK Netherlands B.V.
Busplein 36, 1315KV, Almere, The Netherlands
| **T:** +31 (0)36 5389 149 | **F:** +31 (0)36 5389 111 | **E:** saleseurope@vivotek.com