EDIMAX
NETWORKING PEOPLE TOGETHER

EW-7438RPn V2

安裝指南

08-2013 / v1.0

Edimax Technology Co., Ltd.
No.3, Wu-Chuan 3rd Road, Wu-Gu, New Taipei City 24891, Taiwan
Email: support@edimax.com.tw

Edimax Technology Europe B.V.
Nijverheidsweg 25, 5683 CJ Best, The Netherlands
Email: support@edimax.nl



Edimax Computer Company
3350 Scott Blvd., Bldg.15 Santa Clara, CA 95054, USA
Live Tech Support: 1(800) 652-6776
Email: support@edimax.com

I. 产品信息

I-1. 包装内容











- EW-7438RPn
- CD 光盘（快速安装指南及用户手册）
- 快速安装指南
- 网络线
- 联机密码卡

I-2. 系统需求

-
  无线讯号延伸/ 无线桥接模式: 使用现有 2.4GHz 无线网络
- AP 模式: Cable/DSL 调制解调器
- 配备 2.4GHz 802.11/b/g/n 无线网卡的计算机及浏览器(IE 8 或以上版本、Google Chrome®、Firefox® 或最新版 Safari®)

I-3. LED 指示灯

LED 名称	灯号颜色	LED 状态	说明
讯号强度  **2.4GHz**	橘色	恒亮	接收讯号极佳 (信号强度 60 - 100%)
		慢速闪烁	接收讯号良好 (信号强度 40 – 60%)
		快速闪烁	接收讯号不良 (信号强度 < 40%)
		不亮	未侦测到讯号、或在 LED 关闭模式下

无线讯号 	绿灯	闪烁	数据传输中
		不亮	未启用无线讯号或在 LED 关闭模式下
电源 	绿灯	恒亮	设备已正确供电并启动
		闪烁	设备未启动，未正确供电，或在 LED 关闭模式下
		不亮	设备未启动，未正确供电，或在 LED 关闭模式下
WPS 	绿灯	恒亮	WPS 联机已建立(LED 灯会持续恒亮约 5 分钟，代表联机已成功建立)
		闪烁	WPS 联机中（正在等待另一 WPS 设备的连接）
		不亮	未建立 WPS 连接或在 LED 关闭的模式
LAN 有线网络 	绿灯	恒亮	LAN 口已连接
		闪烁	LAN 端口数据传输中
		不亮	LAN 口未连接


LED 灯可以在设定网页中的“进阶设定”中设定停用。如果您设定了停用 LED，那么所有的指示灯都会熄灭，而这与讯号延伸器的状态无任何关系。

II. 安装


EW-7438RPn 有三种操作模式，您可依您的网络环境需求来选择。各操作模式说明如下:

无线讯号延伸器模式	EW-7438RPn 可连接至您现有的无线网络并请延伸其无线讯号 **建议架设 EW-7438RPn 的最佳位置:** 大约是在您现有的无线分享器/ AP 和讯号死角之间的中间区。建议您，讯号延伸器要可以从现有无线分享器/AP 接收到至少 60％的讯号强度。
无线网卡/ 无线桥接模式	EW-7438RPn 可透过网络线连接您的有线网络设备(如游戏机或 Smart TV)，做为无线网卡或无线网桥来使用。 **建议架设 EW-7438RPn 的最佳位置:** 在无线讯号覆盖范围内、接近您有线网络装置的地方。
无线 AP 模式	EW-7438RPn 可透过网络线连接您现有的有线分享器，作为无线 AP 来使用，让您的网络设备能透过它无线上网。

1. EW-7438RPn 插入靠近电源插座，并将其启动。

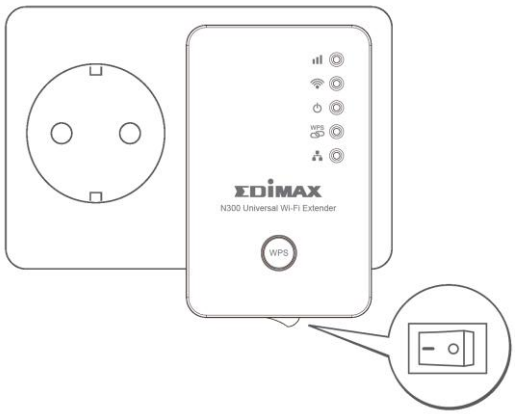

2. 绿色电源指示灯( )在开机时会闪烁，待 EW-7438RPn 开机完成，绿色电源灯号( )将会转为恒亮状态。

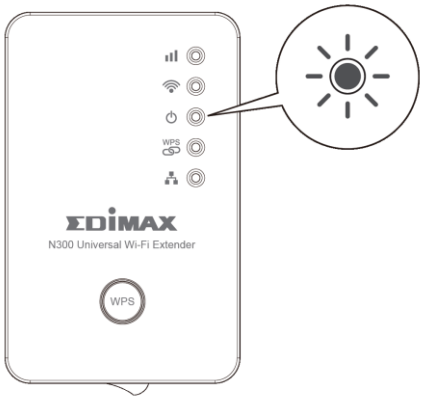


3. 请使用您的上网设备(如：计算机、平板或智能手机)搜寻 SSID 为“Edimax.Setup”的 Wi-Fi 无线讯号，并且与它联机。

若您使用计算机联机，请您先拔除网络线。若您使用手机或平板上网，请注意其操作系统须为 iOS 4.3 或 Android 4.x 以上版本

SSID(Edimax.Setupxx)的最后两码会依据您的装置而有不同，例如：Edimax.Setup c1。而您可已在产品包装随附的联机密码卡上，找到您独有的 SSID。



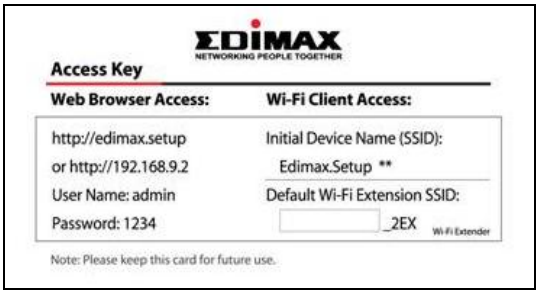


4. 开启网络浏览器，(若您未被自动导引至下列”开始”窗口画面，请在网址列输入 ***http://edimax.setup***) 请点选”开始”启动安装步骤。





若您无法连至 http://edimax.setup，请先确认您的计算机是设定为动态 IP 地址(进一步说明，请参考使用手册)。

5. 请为您的 EW-7438RPn 选择一种操作模式

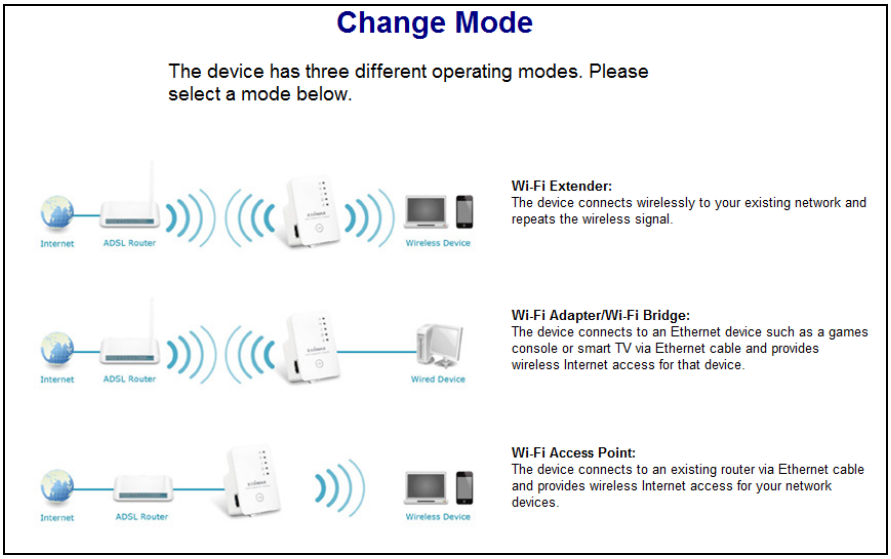


6. 请跟着画面指示完成安装您选择的模式。本手册接下来的说明将以”无线讯号延伸器模式”做为范例，若您还希望了解其他模式，请参照 CD 使用手册或 **VI. AP 模式**

7. 请详阅如下画面说明”如何为您的 EW-7438RPn 选择最佳的架设位置”后，点选”下一步”。您将可以在下一页中检视您的讯号强度。




8. 请在表列中选择您要联机的无线网络，并输入该无线网络的联机密码。您同时也可以为您的 EW-7438RPn 输入新的 SSID。接着，请点选”下一步”。

出厂默认 EW-7438RPn 所延伸的无线网络 SSID 为”您现有的无线分享器/无线 AP 的 SSID +_2EX”，例如，您 router 的 SSID 为 YourSSID，则您的 EW-7438RPn 的 SSID 即为 YourSSID_2EX。您可以在”讯号延伸器装置 SSID”一栏自行更改 EW-7438RPn 的 SSID。

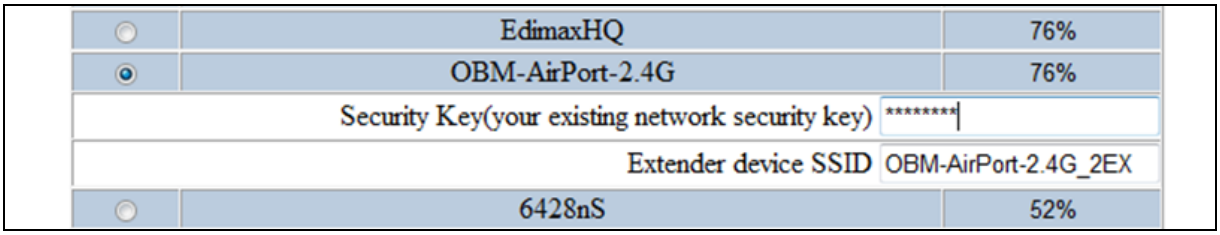

除非您希望联机至一已隐藏网络，否则请勿勾选”联机至隐藏 SSID 网络”。欲了解进一步说明，请参照使用手册。


9. 请稍待 EW-7438RPn 进行联机测试。

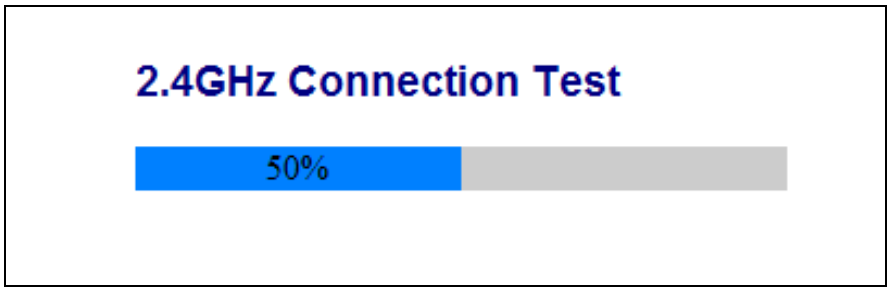


若 EW-7438RPn 无法自您的无线分享器或无线 AP 取得 IP 地址，您将会看到以下讯息窗口。请点选”Static IP (静态 IP 地址)”，指定一个 IP 地址给 EW-7438RPn，欲了解进一步说明，请参照使用手册。




10. 待联机测试完成，接着请点选”启用”重新启动本产品。

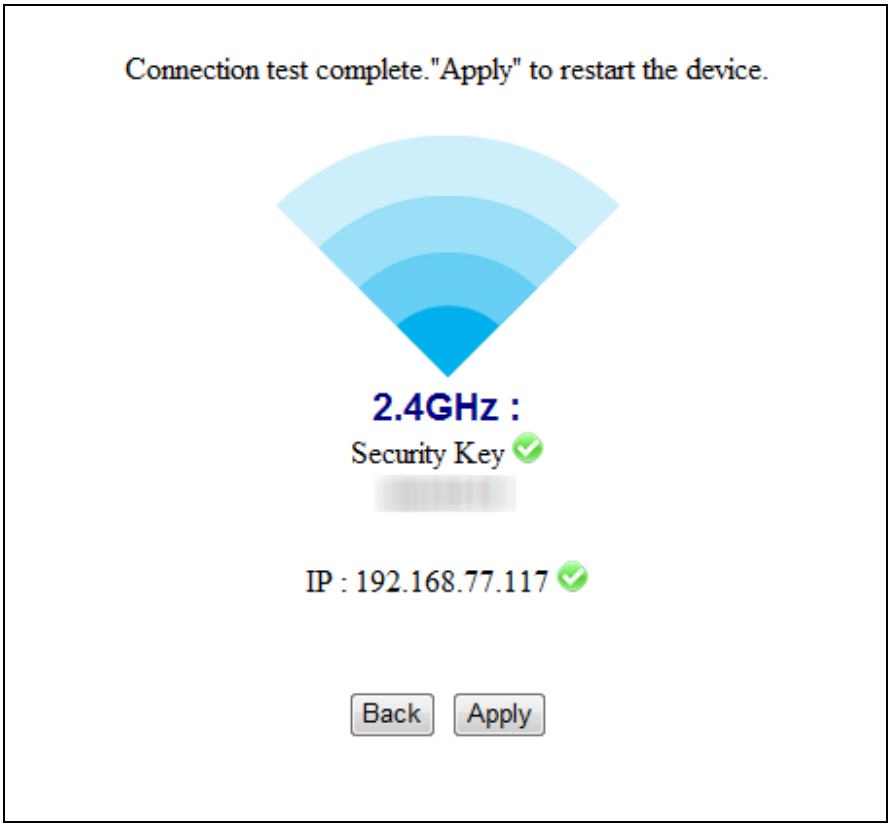

系统重启中，请耐心稍待。

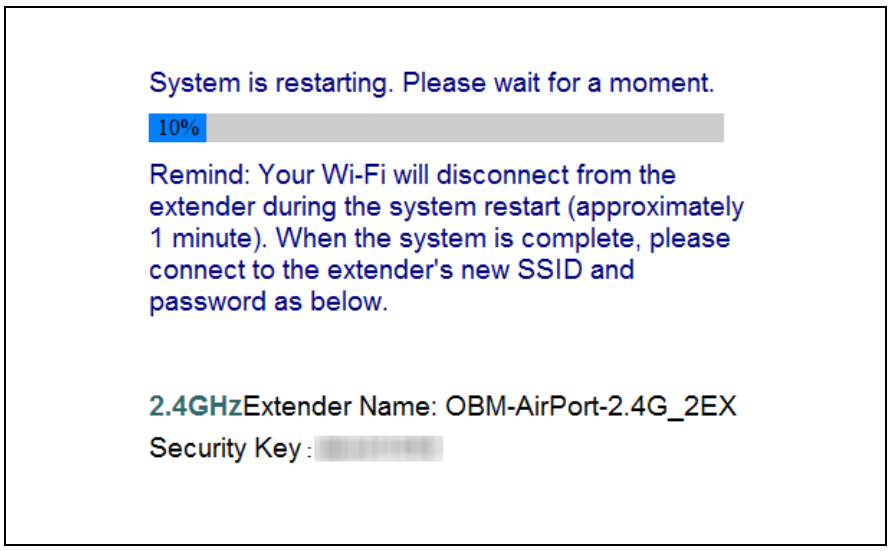

11. 在 EW-7238RPD 重新启动后，您会看到如下讯息窗口恭贺您完成设定，代表着 EW-7438RPn 正在运作或已准备好可使用。
机身上的橘色讯号强度 LED 指示灯恒亮或闪烁， 会取决于前端联机无线 Router/AP 的无线讯号强度。

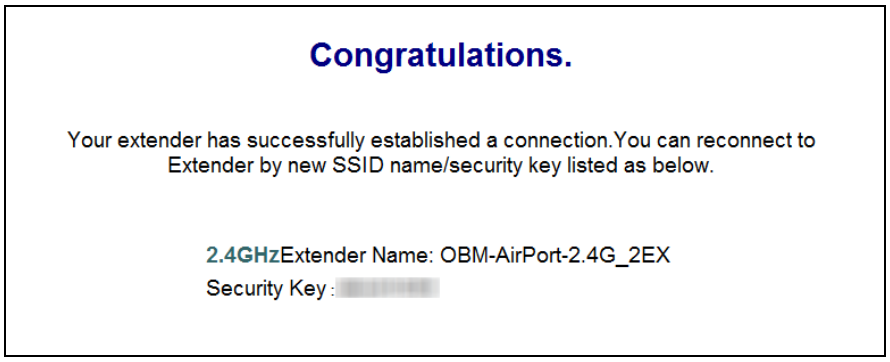

12. 请关闭浏览器窗口。现在，您的上网设备，如计算机、智能手机或平板等，可以联机至 EW-7438RPn 的新 SSID，透过 EW-7438RPn 所延伸的无线讯号上网，而不用联机到分享器。


联机至 EW-7438RPn 的密码和联机至 Router 的密码相同

※ 您可透过网页设定接口来进行更多进阶设定，(请参照 **IV.** 网页设定接口或 CD 使用手册)

III.重置恢复出厂预设

如果您遭遇到 EW-7438RPn 的使用问题或者您想要更改 EW-7438RPn 的操作模式，您可以将 EW-7438RPn 重置为出厂设定。这个动作会将所有设定都恢复成出厂默认值。

1. 请按压 WPS/Reset 按键(至少 10 秒钟)直到绿色电源 LED ( )开始闪烁。

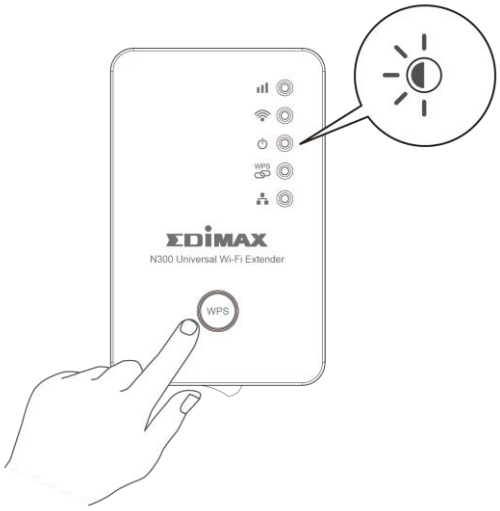

2. 请稍待 EW-7438RPn 重新启动。当绿色电源 LED 灯恒亮起，即表示 EW-7438RPn 已可进行设定。

IV. 网页设定接口

在完成设定后，您可以联机至 EW-7438RPn 的网页设定接口，进行进阶设定。

1. 进入 EW-7438RPn 的网页设定接口，请您在浏览器的网址列输入 http://edimax.setup，接着按 Enter 确认，联机至该网址。




2.此时，您会看到，提示登录的讯息窗口，请输入默认的用户名称”admin”，密码”1234”

Windows:



Mac:

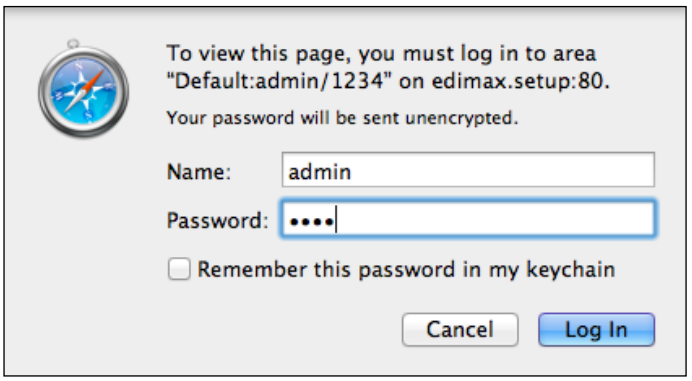


3. 接着，您将会进入”状态及信息”页面。请使用左侧菜单选单操作。欲了解进一步说明，请参照 CD 使用手册。

V. WPS 设定

若您的无线分享器/无线 AP 支持 WPS (Wi-Fi Protected Setup)功能，那么您可以使用此方式来快速设定 EW-7438RPn。

1. 请按住无线分享器/无线 AP 上的 WPS 按钮约 2 秒钟 ，启动 WPS 功能 (若非 EDIMAX 品牌产品，请参考其使用手册)

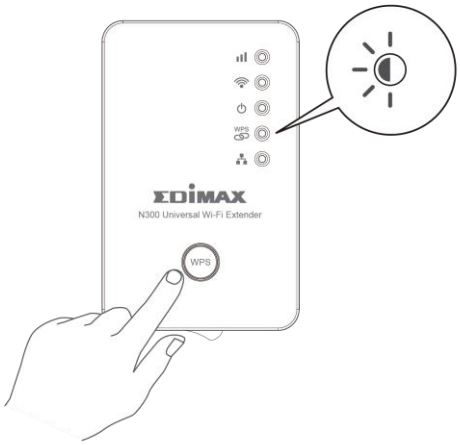


2. 请接着在**两分钟内**，按住 EW-7438RPn 上的 WPS 按键(约两秒)启动 WPS 联机功能。此时 EW-7438RPn 的绿色 WPS LED 指示灯会呈现闪烁状态，表示 WPS 联机功能正在进行中。

3. 当 EW-7438RPn 的绿色 WPS LED 灯号转为恒亮(恒亮状态会持续约 5 分钟)，即表示 WPS 联机已成功建立。

VI. AP 模式

若您要让 EW-7438RPn 在 AP 模式下运作，请先确认您已将 EW-7438RPn 以网络线连接至您现有的无线分享器，如下图示。

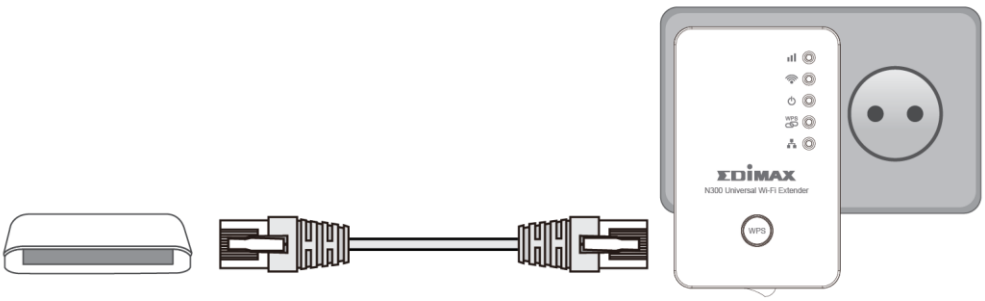

在设定之时，选择”AP”模式(请参照 II. 安装 步骤 5.)，并依循画面指示。当设定完成时，将您的无线装置联机到 EW-7438RPn 的新 SSID。

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio technician for help.

FCC Caution

This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

Federal Communications Commission (FCC) Radiation Exposure Statement

This equipment complies with FCC radiation exposure set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 2.5cm (1 inch) during normal operation.

Federal Communications Commission (FCC) RF Exposure Requirements

SAR compliance has been established in the laptop computer(s) configurations with PCMCIA slot on the side near the center, as tested in the application for certification, and can be used in laptop computer(s) with substantially similar physical dimensions, construction, and electrical and RF characteristics. Use in other devices such as PDAs or lap pads is not authorized. This transmitter is restricted for use with the specific antenna tested in the application for certification. The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

R&TTE Compliance Statement

This equipment complies with all the requirements of DIRECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND THE COUNCIL of March 9, 1999 on radio equipment and telecommunication terminal equipment and the mutual recognition of their conformity (R&TTE). The R&TTE Directive repeals and replaces in the directive 98/13/EEC (Telecommunications Terminal Equipment and Satellite Earth Station Equipment) As of April 8, 2000.

Safety

This equipment is designed with the utmost care for the safety of those who install and use it. However, special attention must be paid to the dangers of electric shock and static electricity when working with electrical equipment. All guidelines of this and of the computer manufacture must therefore be allowed at all times to ensure the safe use of the equipment.

EU Countries Intended for Use

The ETSI version of this device is intended for home and office use in Austria, Belgium, Bulgaria, Cyprus, Czech, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Turkey, and United Kingdom. The ETSI version of this device is also authorized for use in EFTA member states: Iceland, Liechtenstein, Norway, and Switzerland.

EU Countries Not Intended for Use

None

EU Declaration of Conformity

English: This equipment is in compliance with the essential requirements and other relevant provisions of Directive 2006/95/EC, 2011/65/EC.

Français: Cet équipement est conforme aux exigences essentielles et autres dispositions de la directive 2006/95/CE, 2011/65/CE.

Čeština: Toto zařízení je v souladu se základními požadavky a ostatními příslušnými ustanoveními směrnic 2006/95/ES, 2011/65/ES.

Polski: Urządzenie jest zgodne z ogólnymi wymaganiami oraz szczególnymi warunkami określonymi Dyrektywą UE 2006/95/EC, 2011/65/EC..

Română: Acest echipament este în conformitate cu cerinţele esenţiale şi alte prevederi relevante ale Directivei 2006/95/CE, 2011/65/CE.

Русский: Это оборудование соответствует основным требованиям и положениям Директивы 2006/95/EC, 2011/65/EC.

Magyar: Ez a berendezés megfelel az alapvető követelményeknek és más vonatkozó irányelveknek (2006/95/EK, 2011/65/EK).

Türkçe: Bu cihaz 2006/95/EC, 2011/65/EC direktifleri zorunlu istekler ve diğer hükümlerle ile uyumludur.

Українська: Обладнання відповідає вимогам і умовам директиви 2006/95/EC, 2011/65/EC.

Slovenčina: Toto zariadenie spĺňa základné požiadavky a ďalšie príslušné ustanovenia smerníc 2006/95/ES, 2011/65/ES.

Deutsch: Dieses Gerät erfüllt die Voraussetzungen gemäß den Richtlinien 2006/95/EC, 2011/65/EC.

Español: El presente equipo cumple los requisitos esenciales de la Directiva 2006/95/EC, 2011/65/EC.

Italiano: Questo apparecchio è conforme ai requisiti essenziali e alle altre disposizioni applicabili della Direttiva 2006/95/CE, 2011/65/CE.

Nederlands: Dit apparaat voldoet aan de essentiële eisen en andere van toepassing zijnde bepalingen van richtlijn 2006/95/EC, 2011/65/EC..

Português: Este equipamento cumpre os requesitos essênciais da Directiva 2006/95/EC, 2011/65/EC.

Norsk: Dette utstyret er i samsvar med de viktigste kravene og andre relevante regler i Direktiv 2006/95/EC, 2011/65/EC.

Svenska: Denna utrustning är i överensstämmelse med de väsentliga kraven och övriga relevanta bestämmelser i direktiv 2006/95/EG, 2011/65/EG.

Dansk: Dette udstyr er i overensstemmelse med de væsentligste krav og andre relevante forordninger i direktiv 2006/95/EC, 2011/65/EC.

suomen kieli: Tämä laite täyttää direktiivien 2006/95/EY, 2011/65/EY oleelliset vaatimukset ja muut asiaankuuluvat määräykset.

FOR USE IN AT BE CY CZ DK EE FI FR DE GR HU IE IT LV LT LU MT NL PL PT SK SI ES SE GB IS LI NO CH BG RO TR

N20379

АЯ46

WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Declaration of Conformity

We, Edimax Technology Co., Ltd., declare under our sole responsibility, that the equipment described below complies with the requirements of the European R&TTE directive 2006/95/EC, and directive 2011/65/EC(RoHS) .

Equipment: **N300 Universal Wi-Fi Extender**
Model No.: **EW-7438RPn**

The following European standards for essential requirements have been followed:

Spectrum: **ETSI EN 300 328 V1.8.1**
EMC: **EN 301 489-1 V1.9.2 (2011-09);**
EN 301 489-17 V2.2.1 (2012-09)
EMF: **EN 50385:2002**
Safety (LVD): **IEC 60950-1:2005 (2nd Edition);**
EN-60950-1:2006+A11:2009+A1:2010+A12:2011

Edimax Technology Europe B.V.
Nijverheidsweg 25,
5683 CJ BEST
THE NETHERLANDS


a company of :
Edimax Technology Co., Ltd.,
No. 3, Wu Chuan 3rd Road,
Wu-Ku Industrial Park,
New Taipei City, Taiwan

Signature:

Printed Name: Vivian Ma
Title: Director
Edimax Technology Europe B.V.

CE

Date of Signature: September 15, 2013
Signature:



Printed Name: Albert Chang
Title: Director
Edimax Technology Co., Ltd.

Notice According to GNU General Public License Version 2

This product includes software that is subject to the GNU General Public License version 2. The program is free software and distributed without any warranty of the author. We offer, valid for at least three years, to give you, for a charge no more than the costs of physically performing source distribution, a complete machine-readable copy of the corresponding source code.

Das Produkt beinhaltet Software, die den Bedingungen der GNU/GPL-Version 2 unterliegt. Das Programm ist eine sog. „Free Software“, der Autor stellt das Programm ohne irgendeine Gewährleistungen zur Verfügung. Wir bieten Ihnen für einen Zeitraum von drei Jahren an, eine vollständige maschinenlesbare Kopie des Quelltextes der Programme zur Verfügung zu stellen – zu nicht höheren Kosten als denen, die durch den physikalischen Kopiervorgang anfallen.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation’s software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author’s protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors’ reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone’s free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The ‘“Program’“, below, refers to any such program or work, and a ‘“work based on the Program’“ means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term ‘“modification’“.) Each licensee is addressed as ‘“you’“.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program’s source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep

intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License.

Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and '"any later version'", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM '"AS IS'" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.