

Wireless-G Router for 3G/UMTS Broadband

Package Contents

- Wireless-G Router for 3G/UMTS Broadband
- Setup CD-ROM
- User Guide and Quick Installation on CD-ROM
- AC Power Supply with UK, Euro, and Australia Plug Adapters
- Car Power Adapter
- Ethernet Cable

Model No: **WRT54G3GV2-VF**



There are two ways to set up the Router for Internet connection. Select one.

1. Broadband WAN and 3G/UMTS Broadband
2. 3G/UMTS Broadband Only

Before you begin, make sure that you have the following:


Broadband WAN and 3G/UMTS Broadband

- Activated 3G/UMTS broadband service from Vodafone
- Vodafone 3G/UMTS broadband device service information
- Broadband modem
- Settings for your broadband Internet connection

3G/UMTS Broadband Only

- Activated 3G/UMTS broadband service from Vodafone
- Vodafone 3G/UMTS broadband device service information

A. Insert the Setup CD-ROM into your CD-ROM drive. The Setup Wizard should run automatically, and the *Welcome* screen should appear. If it does not, click your taskbar's **Start** button and select **Run**. In the *Open* field, enter **D:\SetupWizard.exe** (where "D" is the letter of your CD-ROM drive).

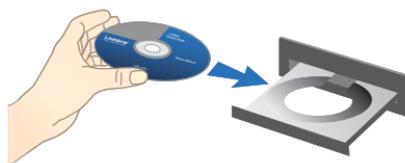

Insert the CD

B. Select your preferred language from the drop down menu. To begin installation, click the **Click Here to Start** button.



Click Here to Start


- C.** To accept the license agreement, click **Next**.



Accept the License Agreement

- D.** Make sure the Router is powered off. Insert the Vodafone 3G/UMTS Broadband Device into the Router's PC Card slot or USB port.

Click **Next**.

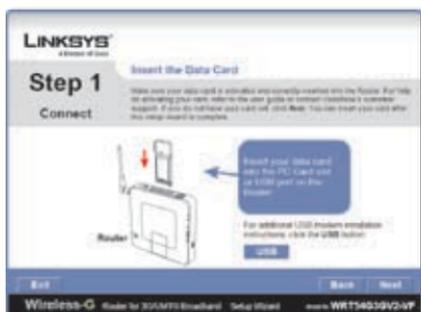

Insert the Vodafone 3G/UMTS Broadband Device

- E.** If you have a cable or DSL connection, keep the screen's default, **Yes**, and then click **Next**. Proceed to the section, "1 Broadband WAN and 3G./UMTS Broadband".

If you do not have a cable or DSL connection, select **No** on this screen, and then click **Next**. Proceed to the section, "2 3G/UMTS Broadband Only".



Add Another Internet Connection

1 Broadband WAN and 3G/UMTS Broadband

- A.** Make sure the Router is powered off. Disconnect the network cable from your computer. (This is the cable that connects the computer to your modem.)


Click **Next**.

- B.** Connect the cable from the modem to the Modem port on the Router. (This is the same cable that you just disconnected from your computer in step A.)


Click **Next**.

- C.** Connect the included yellow network cable to the Ethernet network port of your computer.


Click **Next**.

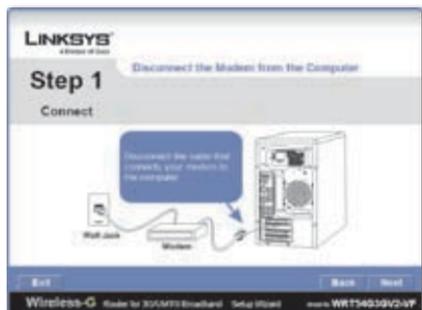

Disconnect the Modem

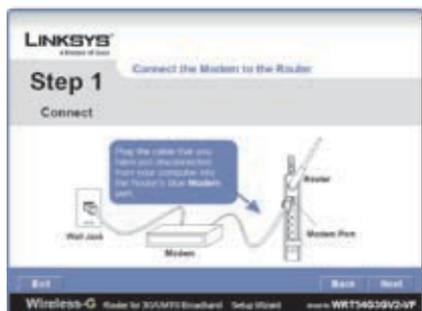

Connect the Modem to the Router

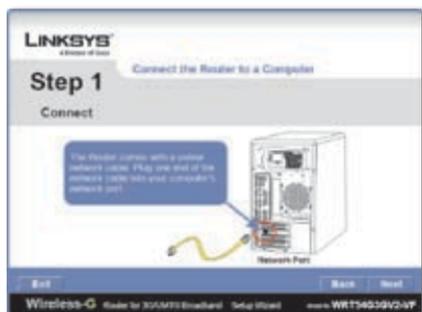

Connect the Network Cable to the Computer

- D.** Connect the other end of the yellow cable to one of the yellow Ethernet ports labeled 1-4 on the side panel of the Router.

Repeat steps C and D to connect additional computers or other devices to the Router. (Additional network cables are not included.)

Click **Next**.


- E.** Connect the power adapter to the Router's Power port. Plug the cord into an electrical outlet (if needed, attach the included, appropriate power plug adapter).

Click **Next**.


- F.** The Power LED will flash for about a minute during the self-test. It will be solidly lit when the self-test is complete.

If the Power LED does not stop flashing, refer to "Appendix A: Troubleshooting" in the User Guide on the CD-ROM.


Click **Next**.

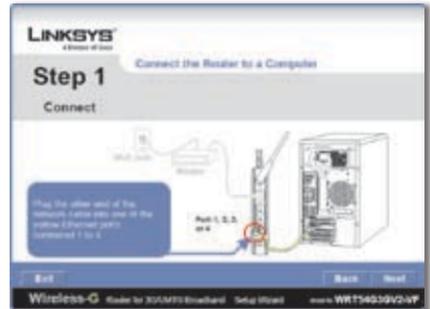

Connect the Network Cable to the Router

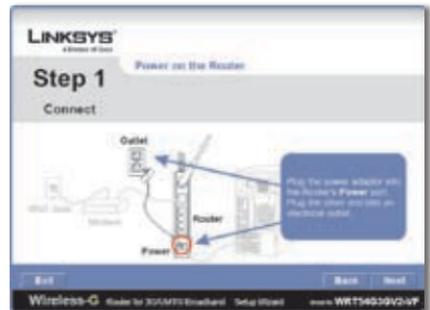

Connect to Power

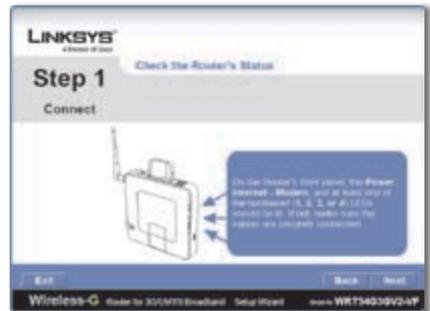

Check the Router's Status

- G.** Follow the on-screen instructions to complete the setup and configuration.




NOTE: For advanced configuration changes, refer to “Chapter 3: Advanced Configuration” in the User Guide on the CD-ROM.

2 3G/UMTS Broadband Only

- A.** Connect the included yellow network cable to the Ethernet network port of your computer.

Click **Next**.

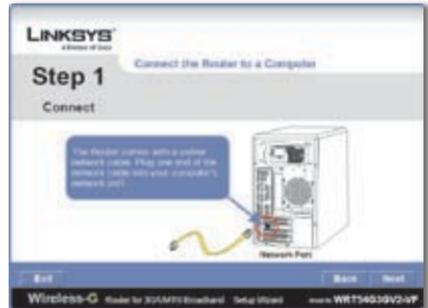


Connect the Network Cable to the Computer

- B.** Connect the other end of the yellow cable to one of the yellow Ethernet ports labeled 1-4 on the side panel of the Router.

Repeat steps A and B to connect additional computers or other devices to the Router. (Additional network cables are not included.)


Click **Next**.

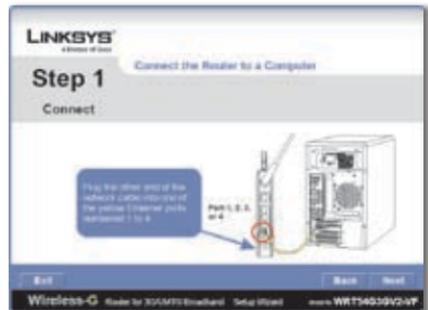

Connect the Network Cable to the Router

- C.** Connect the power adapter to the Router's Power port. Plug the other end into an electrical outlet (if needed, attach the included, appropriate power plug adapter).

Click **Next**.

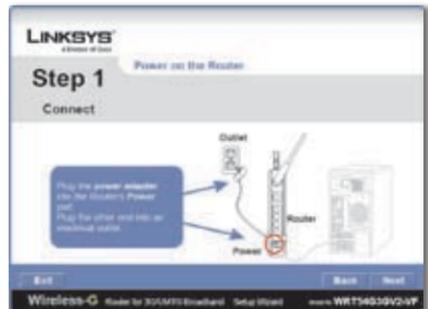


Connect to Power

- D.** The Power LED will flash for about a minute during the self-test. It will be solidly lit when the self-test is complete.

If the Power LED does not stop flashing, refer to “Appendix A: Troubleshooting” in the User Guide on the CD-ROM.

Click **Next**.

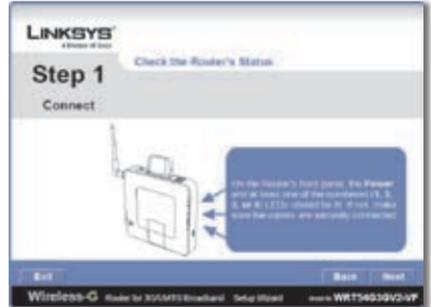

Check the Router's Status

- E.** Follow the on-screen instructions to complete the setup and configuration.



NOTE: For advanced configuration changes, refer to “Chapter 3: Advanced Configuration” in the User Guide on the CD-ROM.

Vodafone	Mobile	Phone	Email
Australia	1555	+355 69 144	www.vodafone.al/mobileconnect
France	900	+33 6 1000 1900	www.sfr.fr
Germany	1234	+49 800 172 1234	www.vodafone.de
Greece	1399	+30 6944 40 1399	www.vodafone.gr
Ireland	1850 287 000	+353 429331999	www.vodafone.ie/business
Italy	42005	800-100195	www.vodafone.it
Netherlands	1200	+31 654 500 100	www.vodafone.nl
New Zealand	0800-921-021	+64 9 355 2007	www.vodafone.co.nz/3grouter
Portugal	1214	+351911214000	www.vodafone.pt
Spain	122	+34 607 122 000	www.empresas.vodafone.es
Sweden	222	+46 708 222 222	www.telenor.se
United Kingdom	191	+44 7836 191 191	www.vodafone.co.uk/mobileconnect

For contact details or to get support for your Vodafone Mobile Connect card, reference the Vodafone Customer Contact document that came with the 3G/UMTS broadband router. For additional information or troubleshooting help, refer to the User Guide on the Setup CD-ROM.

Website

www.support.vodafone.com or www.linksys.com/vodafone.



Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2008 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders.

LINKSYS[®]
A Division of Cisco
www.linksys.com