

# ESET SMART SECURITY 8

## User Guide

(intended for product version 8.0 and higher)

Microsoft® Windows® 8.1 / 8 / 7 / Vista / XP / Home Server 2003 / Home Server 2011

[Click here to download the most recent version of this document](#)

## ESET SMART SECURITY

**Copyright ©2015 by ESET, spol. s r. o.**

ESET Smart Security was developed by ESET, spol. s r. o.

For more information visit [www.eset.com](http://www.eset.com).

All rights reserved. No part of this documentation may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning, or otherwise without permission in writing from the author.

ESET, spol. s r. o. reserves the right to change any of the described application software without prior notice.

Worldwide Customer Support: [www.eset.com/support](http://www.eset.com/support)

REV. 1/16/2015

# Contents

<b>1. ESET Smart Security.....</b>	<b>5</b>
1.1 What's new in version 8.....	6
1.2 System requirements.....	6
1.3 Prevention.....	7
<b>2. Installation.....</b>	<b>8</b>
2.1 Live installer.....	8
2.2 Offline installation.....	9
2.2.1 Advanced settings.....	10
2.3 Product activation.....	10
2.4 Entering username and password.....	11
2.5 Upgrading to a more recent version.....	11
2.6 First scan after installation.....	12
<b>3. Beginner's guide.....</b>	<b>13</b>
3.1 The main program window.....	13
3.2 Updates.....	15
3.3 Trusted zone setup.....	16
3.4 Anti-Theft.....	17
3.5 Parental control tools.....	17
<b>4. Work with ESET Smart Security.....</b>	<b>18</b>
4.1 Computer.....	19
4.1.1 Antivirus and antispyware.....	20
4.1.1.1 Real-time file system protection.....	20
4.1.1.1.1 Advanced scan options.....	21
4.1.1.1.2 Cleaning levels.....	22
4.1.1.1.3 When to modify real-time protection configuration.....	23
4.1.1.1.4 Checking real-time protection.....	23
4.1.1.1.5 What to do if real-time protection does not work.....	23
4.1.1.2 Computer scan.....	23
4.1.1.2.1 Custom scan launcher.....	24
4.1.1.2.2 Scan progress.....	25
4.1.1.2.3 Scan profiles.....	26
4.1.1.3 Startup scan.....	26
4.1.1.3.1 Automatic startup file check.....	27
4.1.1.4 Idle-state scanning.....	27
4.1.1.5 Exclusions.....	27
4.1.1.6 ThreatSense engine parameters setup.....	29
4.1.1.6.1 Objects.....	29
4.1.1.6.2 Options.....	29
4.1.1.6.3 Cleaning.....	30
4.1.1.6.4 Extensions.....	30
4.1.1.6.5 Limits.....	30
4.1.1.6.6 Other.....	31
4.1.1.7 An infiltration is detected.....	31
4.1.1.8 Document protection.....	33
4.1.2 Removable media.....	33
4.1.3 Device control.....	33
4.1.3.1 Device control rules.....	34
4.1.3.2 Adding Device control rules.....	35
4.1.4 HIPS.....	36
4.1.5 Gamer mode.....	38
<b>4.2 Network.....</b>	<b>39</b>
4.2.1 Filtering modes.....	40
4.2.1.1 Learning mode.....	41
4.2.2 Firewall profiles.....	42
4.2.3 Configuring and using rules.....	42
4.2.3.1 Rules setup.....	43
4.2.3.1.1 Detailed view of all rules.....	44
4.2.3.2 Editing rules.....	45
4.2.4 Configuring zones.....	45
4.2.4.1 Network authentication.....	46
4.2.4.1.1 Zone authentication - Client configuration.....	46
4.2.4.1.2 Zone authentication - Server configuration.....	48
4.2.5 Establishing connection - detection.....	49
4.2.6 Logging.....	50
4.2.7 System integration.....	50
<b>4.3 Web and email.....</b>	<b>51</b>
4.3.1 Email client protection.....	52
4.3.1.1 Integration with email clients.....	52
4.3.1.1.1 Email client protection configuration.....	53
4.3.1.2 IMAP, IMAPS scanner.....	53
4.3.1.3 POP3, POP3S filter.....	54
4.3.1.4 Antispam protection.....	55
4.3.1.4.1 Adding addresses to whitelist and blacklist.....	56
4.3.1.4.2 Marking messages as spam.....	56
4.3.2 Web access protection.....	57
4.3.2.1 HTTP, HTTPS.....	57
4.3.2.2 URL address management.....	58
4.3.3 Protocol filtering.....	59
4.3.3.1 Web and email clients.....	59
4.3.3.2 Excluded applications.....	60
4.3.3.3 Excluded IP addresses.....	61
4.3.3.3.1 Add IPv4 address.....	61
4.3.3.3.2 Add IPv6 address.....	61
4.3.3.4 SSL protocol checking.....	62
4.3.3.4.1 Certificates.....	62
4.3.3.4.1.1 Trusted certificates.....	62
4.3.3.4.1.2 Excluded certificates.....	63
4.3.3.4.1.3 Encrypted SSL communication.....	63
4.3.4 Anti-Phishing protection.....	63
<b>4.4 Parental control.....</b>	<b>64</b>
4.4.1 Web page content filtering.....	67
4.4.2 Blocked and allowed web pages.....	68
<b>4.5 Updating the program.....</b>	<b>68</b>
4.5.1 Update settings.....	71
4.5.1.1 Update profiles.....	72
4.5.1.2 Advanced update setup.....	72
4.5.1.2.1 Update mode.....	72
4.5.1.2.2 Proxy server.....	73
4.5.1.2.3 Connecting to the LAN.....	73

4.5.2	Update rollback.....	74	5.7.2	How to create rescue CD.....	107
4.5.3	How to create update tasks .....	75	5.7.3	Target selection.....	107
<b>4.6</b>	<b>Tools.....</b>	<b>76</b>	5.7.4	Settings.....	107
4.6.1	Log files.....	77	5.7.4.1	Folders.....	108
4.6.1.1	Log maintenance .....	78	5.7.4.2	ESET Antivirus .....	108
4.6.2	Scheduler.....	78	5.7.4.3	Advanced settings.....	108
4.6.3	Protection statistics .....	80	5.7.4.4	Internet protocol.....	109
4.6.4	Watch activity.....	80	5.7.4.5	Bootable USB device.....	109
4.6.5	ESET SysInspector.....	81	5.7.4.6	Burn .....	109
4.6.6	ESET Live Grid .....	81	5.7.5	Working with ESET SysRescue .....	109
4.6.6.1	Suspicious files .....	82	5.7.5.1	Using ESET SysRescue.....	110
4.6.7	Running processes.....	83	<b>5.8</b>	<b>Command Line.....</b>	<b>110</b>
4.6.8	Network connections.....	84	<b>6.</b>	<b>Glossary.....</b>	<b>112</b>
4.6.9	Quarantine .....	86	<b>6.1</b>	<b>Types of infiltration.....</b>	<b>112</b>
4.6.10	Proxy server setup .....	87	6.1.1	Viruses.....	112
4.6.11	Alerts and notifications.....	87	6.1.2	Worms.....	112
4.6.11.1	Message format.....	88	6.1.3	Trojans.....	112
4.6.12	Submission of samples for analysis.....	89	6.1.4	Rootkits .....	113
4.6.13	System updates .....	89	6.1.5	Adware .....	113
<b>4.7</b>	<b>User interface .....</b>	<b>89</b>	6.1.6	Spyware.....	113
4.7.1	Graphics .....	90	6.1.7	Packers.....	114
4.7.2	Alerts and notifications.....	90	6.1.8	Potentially unsafe applications .....	114
4.7.2.1	Advanced setup.....	90	6.1.9	Potentially unwanted applications.....	114
4.7.3	Hidden notification windows .....	91	6.1.10	Botnet.....	114
4.7.4	Access setup.....	91	<b>6.2</b>	<b>Types of remote attacks.....</b>	<b>114</b>
4.7.5	Program menu .....	91	6.2.1	DoS attacks.....	115
4.7.6	Context menu .....	92	6.2.2	DNS Poisoning.....	115
<b>5.</b>	<b>Advanced user .....</b>	<b>93</b>	6.2.3	Worm attacks .....	115
<b>5.1</b>	<b>Profile manager.....</b>	<b>93</b>	6.2.4	Port scanning.....	115
<b>5.2</b>	<b>Keyboard shortcuts.....</b>	<b>93</b>	6.2.5	TCP desynchronization.....	115
<b>5.3</b>	<b>Diagnostics.....</b>	<b>94</b>	6.2.6	SMB Relay .....	116
<b>5.4</b>	<b>Import and export settings.....</b>	<b>94</b>	6.2.7	ICMP attacks.....	116
<b>5.5</b>	<b>Idle state detection.....</b>	<b>95</b>	<b>6.3</b>	<b>ESET Technology.....</b>	<b>116</b>
<b>5.6</b>	<b>ESET SysInspector .....</b>	<b>95</b>	6.3.1	Exploit Blocker .....	116
5.6.1	Introduction to ESET SysInspector.....	95	6.3.2	Advanced Memory Scanner.....	116
5.6.1.1	Starting ESET SysInspector.....	95	6.3.3	Vulnerability Shield.....	117
5.6.2	User Interface and application usage.....	96	6.3.4	ESET Live Grid .....	117
5.6.2.1	Program Controls.....	96	6.3.5	Botnet protection .....	117
5.6.2.2	Navigating in ESET SysInspector.....	97	6.3.6	Java Exploit Blocker.....	117
5.6.2.2.1	Keyboard shortcuts.....	99	<b>6.4</b>	<b>Email.....</b>	<b>118</b>
5.6.2.3	Compare.....	100	6.4.1	Advertisements .....	118
5.6.3	Command line parameters .....	101	6.4.2	Hoaxes.....	118
5.6.4	Service Script .....	101	6.4.3	Phishing.....	119
5.6.4.1	Generating Service script.....	102	6.4.4	Recognizing spam scams.....	119
5.6.4.2	Structure of the Service script.....	102	6.4.4.1	Rules.....	119
5.6.4.3	Executing Service scripts.....	104	6.4.4.2	Whitelist.....	120
5.6.5	FAQ.....	105	6.4.4.3	Blacklist .....	120
5.6.6	ESET SysInspector as part of ESET Smart Security.....	106	6.4.4.4	Exception list.....	120
<b>5.7</b>	<b>ESET SysRescue .....</b>	<b>106</b>	6.4.4.5	Server-side control.....	120
5.7.1	Minimum requirements.....	106			

# 1. ESET Smart Security

ESET Smart Security represents a new approach to truly integrated computer security. The most recent version of the ThreatSense® scanning engine, combined with our custom Personal firewall and Antispam modules, utilizes speed and precision to keep your computer safe. The result is an intelligent system that is constantly on alert for attacks and malicious software that might endanger your computer.

ESET Smart Security is a complete security solution that combines maximum protection and a minimal system footprint. Our advanced technologies use artificial intelligence to prevent infiltration by viruses, spyware, trojan horses, worms, adware, rootkits, and other threats without hindering system performance or disrupting your computer.

## Features and benefits

<b>Antivirus and antispyware</b>	Proactively detects and cleans more known and unknown viruses, worms, trojans and rootkits. <b>Advanced heuristics</b> technology flags even never-before-seen malware, protecting you from unknown threats and neutralizing them before they can do any harm. <b>Web access protection</b> and <b>Anti-Phishing</b> works by monitoring communication between web browsers and remote servers (including SSL). <b>Email client protection</b> provides control of email communication received through the POP3(S) and IMAP(S) protocols.
<b>Regular updates</b>	Regularly updating virus signature database and program modules is the best method for ensuring the maximum level of security on your computer.
<b>ESET Live Grid (Cloud-powered Reputation)</b>	You can check the reputation of running processes and files directly from ESET Smart Security.
<b>Device control</b>	Automatically scans all USB flash drives, memory cards and CDs/DVDs. Blocks removable media based on type of media, manufacturer, size and other attributes.
<b>HIPS functionality</b>	You can customize the behavior of the system in greater detail; specify rules for the system registry, active processes and programs, and fine-tune your security posture.
<b>Gamer mode</b>	Postpones all pop-up windows, updates or other system-intensive activities to conserve system resources for gaming or other full-screen activities.

## Features in ESET Smart Security

<b>Parental control</b>	Protects your family from potentially offensive web content by blocking various website categories.
<b>Intelligent Firewall</b>	Firewall module prevents unauthorized users from accessing your computer and taking advantage of your personal data.
<b>ESET Antispam</b>	Spam represents up to 80 percent of all email communication. Antispam protection serves to protect against this problem.
<b>ESET Anti-Theft</b>	ESET Anti-Theft expands user-level security in the case of a lost or stolen computer. Once users install ESET Smart Security and ESET Anti-Theft, their device will be listed in the web interface. The web interface allows users to manage their ESET Anti-Theft configuration and perform actions such as switching computers to the missing state.

A license needs to be active in order for features of ESET Smart Security to be operational. It is recommended that you renew your license several weeks before the license for ESET Smart Security expires.

## 1.1 What's new in version 8

ESET Smart Security version 8 features many small improvements:

- **A new Smart mode for HIPS** – is placed between Automatic and Interactive mode. Ability to identify suspicious activities and malicious processes in the system.
- **A new Botnet protection** – helps discover malware through analyzing its network communication patterns and protocols.
- **Enhanced Exploit blocker** – Designed to fortify commonly exploited application types such as web browsers, PDF readers, email clients and MS Office components. Exploit blocker now supports Java and helps improve detection and protection from these kind of vulnerabilities.
- **Device control** – A replacement of Removable media control used in version 5 and 6. This module allows you to scan, block or adjust extended filters/permissions and define a users ability to access and work with a given device.
- **Vulnerability shield** – An extension of firewall that improves detection of known vulnerabilities on the network level.
- **Advanced memory scanner** – Works in combination with Exploit Blocker to strengthen protection against malware that has been designed to evade detection by antimalware products through the use of obfuscation and/or encryption.
- **Firewall improvements** – In the new version of ESET Smart Security, you can adjust and manage IDS exceptions and the temporary IP address blacklist. The IDS detection notification system is now more user-friendly and informative.
- **Anti-phishing improvements** – ESET Smart Security now blocks scam sites as well as phishing sites. Improved submission of suspicious sites and false positive sites by users.
- **Specialized cleaner** – A bundle of the top 3-5 most prevalent critical malware threats.
- **Faster and more reliable installation** – Including an initial scan which runs automatically 20 minutes after installation or reboot.
- **Mail plugin compatibility** – Our plugin now integrates with Office 2013 and Windows Live Mail.
- **Improved compatibility in Windows 8/8.1** – ESET SysRescue is now fully functional on Windows 8. Toast notifications are now shown in the Windows 8 environment, notifying you of HIPS detections or file detections that require user interaction or downloads of potentially unwanted applications.

## 1.2 System requirements

For the seamless operation of ESET Smart Security, the system should meet the following hardware and software requirements:

Processors Supported: Intel® or AMD x86-x64

Operating Systems: Microsoft® Windows® 8.1/8/7/Vista/XP SP3+ 32-bit/XP SP2+ 64-bit/Home Server 2003 SP2 32-bit/Home Server 2011 64-bit

## 1.3 Prevention

When you work with your computer, and especially when you browse the Internet, please keep in mind that no antivirus system in the world can completely eliminate the risk of [infiltrations](#) and [attacks](#). To provide maximum protection and convenience, it is essential that you use your antivirus solution correctly and adhere to several useful rules:

### Update regularly

According to statistics from ESET Live Grid, thousands of new, unique infiltrations are created each day in order to bypass existing security measures and bring profit to their authors – all at the expense of other users. The specialists at the ESET Virus Lab analyze these threats on a daily basis and prepare and release updates in order to continually improve the level of protection for our users. To ensure the maximum effectiveness of these updates it is important that updates are configured properly on your system. For more information on how to configure updates, see the [Update setup](#) chapter.

### Download security patches

The authors of malicious software often exploit various system vulnerabilities in order to increase the effectiveness of spreading malicious code. With this in mind, software companies watch closely for any vulnerabilities in their applications to appear and release security updates to eliminate potential threats on a regular basis. It is important to download these security updates as they are released. Microsoft Windows and web browsers such as Internet Explorer are two examples of programs for which security updates are released on a regular schedule.

### Back up important data

Malware writers usually do not care about users' needs, and the activity of malicious programs often leads to total malfunction of an operating system and the loss of important data. It is important to regularly back up your important and sensitive data to an external source such as a DVD or external hard drive. This will make it far easier and faster to recover your data in the event of system failure.

### Regularly scan your computer for viruses

Detection of more known and unknown viruses, worms, trojans and rootkits are handled by the Real-time file system protection module. This means that every time you access or open a file, it is scanned for a malware activity. We recommend that you run a full Computer scan at least once a month because malware signatures may vary and the virus signature database updates itself each day.

### Follow basic security rules

This is the most useful and most effective rule of all – always be cautious. Today, many infiltrations require user intervention in order to be executed and distributed. If you are cautious when opening new files, you will save considerable time and effort that would otherwise be spent cleaning infiltrations. Here are some useful guidelines:

- Do not visit suspicious websites with multiple pop-ups and flashing advertisements.
- Be careful when installing freeware programs, codec packs, etc. Only use safe programs and only visit safe Internet websites.
- Be cautious when opening email attachments, particularly those from mass-mailed messages and messages from unknown senders.
- Don't use an Administrator account for everyday work on your computer.

## 2. Installation

There are several methods for installing ESET Smart Security on your computer. Installation methods may vary depending on country and means of distribution:


- [Live installer](#) can be downloaded from the ESET website. The installation package is universal for all languages (choose a desired language). Live installer itself is a small file; additional files required to install ESET Smart Security will be downloaded automatically.
- [Offline installation](#) – This type of installation is used when installing from a product CD/DVD. It uses an *.msi* file that is larger than the Live installer file and does not require an internet connection or additional files for the completion of installation.

**Important:** Make sure that no other antivirus programs are installed on your computer before you install ESET Smart Security. If two or more antivirus solutions are installed on a single computer, they may conflict with each other. We recommend that you uninstall any other antivirus programs on your system. See our [ESET Knowledgebase article](#) for a list of uninstaller tools for common antivirus software (available in English and several other languages).

### 2.1 Live installer

Once you have downloaded the *Live installer* installation package, double-click the installation file and follow the step-by-step instructions in the installer window.

**Important:** For this type of installation you must be connected to Internet.

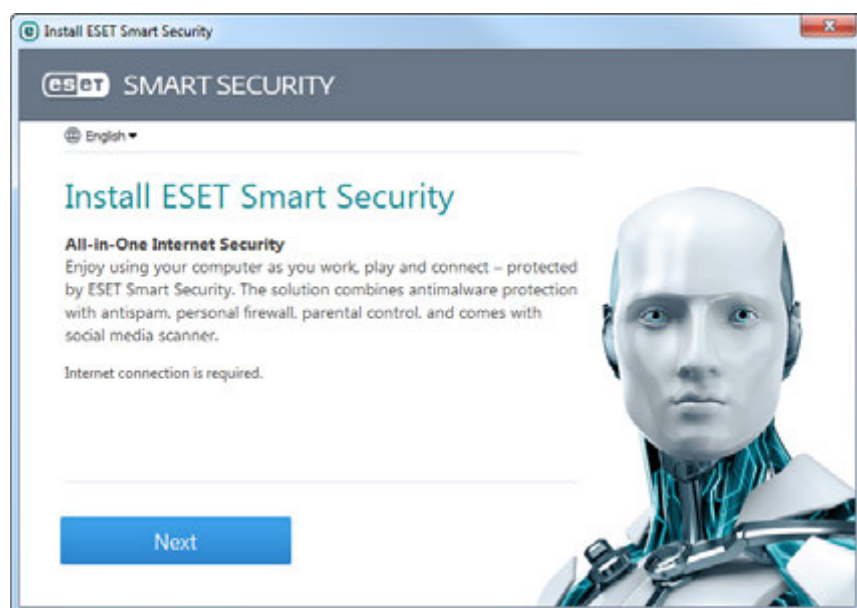

Select your desired language from the **Select product language** drop-down menu and click **Install**. Allow a few moments for installation files to download.

After you accept the **End-User License Agreement**, you will be prompted to configure **ESET Live Grid**. [ESET Live Grid](#) helps ensure that ESET is immediately and continuously informed about new threats in order to protect our customers. The system allows you to submit new threats to the ESET Virus Lab where they are analyzed, processed and added to the virus signature database.

By default, **Yes, I want to participate** is selected, which will activate this feature.

The next step in the installation process is to configure detection of potentially unwanted applications. Potentially unwanted applications are not necessarily malicious, but can negatively affect the behavior of your operating system. See the [Potentially unwanted applications](#) chapter for more details.

Click **Next** to start the installation process.



## 2.2 Offline installation


Once you launch the offline installation (.msi) package, the installation wizard will guide you through the setup process.



First, the program checks to see if a newer version of ESET Smart Security is available. If a newer version is found you will be notified in the first step of the installation process. If you select **Download and install new version**, the new version will be downloaded and installation will continue. This check box is visible only when there is a version newer than the version you are installing available.

Next, the End-User License Agreement will be displayed. Please read the agreement and click **Accept** to acknowledge your acceptance of the End-User License Agreement. After you accept, installation will continue.

For more instructions about installation steps, **ESET Live Grid** and **Detection of potentially unwanted applications**, follow the instructions in the aforementioned section (see [“Live installer”](#)).

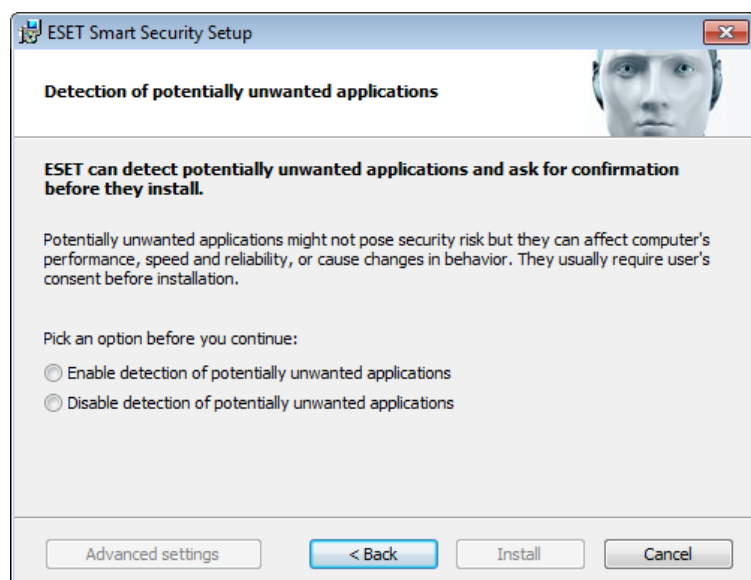

Installation mode provides configuration options appropriate for most users. These settings provide excellent security, easy setup and high system performance. **Advanced settings** are designed for users who have experience with fine-tuning programs and who wish to modify advanced settings during installation. Click **Install** to start the installation process and to bypass Advanced settings.

### 2.2.1 Advanced settings

After selecting **Advanced settings**, you will be prompted to select a location for the installation. By default, the program installs to the following directory:

*C:\Program Files\ESET\ESET Smart Security\*

Click **Browse...** to change this location (not recommended).

Click **Next** to configure your Internet connection. If you use a proxy server, it must be correctly configured for virus signature updates to work. If you are not sure whether you use a proxy server to connect to the Internet, select **Use the same settings as Internet Explorer (Recommended)** and click **Next**. If you do not use a proxy server, select **I do not use a proxy server**.

To configure your proxy server settings, select **I use a proxy server** and click **Next**. Enter the IP address or URL of your proxy server in the **Address** field. In the **Port** field, specify the port where the proxy server accepts connections (3128 by default). In the event that the proxy server requires authentication, enter a valid **Username** and **Password** to grant access to the proxy server. Proxy server settings can also be copied from Internet Explorer if desired. To do this, click **Apply** and confirm the selection.

Custom installation allows you to define how automatic program updates will be handled on your system. Click **Change...** to access Advanced settings.

If you do not want program components to be updated, select **Never update program components**. Select **Ask before downloading program components** to display a confirmation window each time the system attempts to download program components. To download program component upgrades automatically, select **Always update program components**.

**NOTE:** After a program component update, a restart is usually required. We recommend selecting **If necessary, restart computer without notifying**.

The next installation window offers the option to set a password to protect your program settings. Select **Protect configuration settings with a password** and enter your password into the **New password** and **Confirm new password** fields. This password will be required to change or access the settings of ESET Smart Security. When both password fields match, click **Next** to continue.

To complete the next installation steps, **ESET Live Grid** and **Detection of potentially unwanted applications**, follow the instructions in the Live installer section (see [“Live installer”](#)).

Next, select a filtering mode for the ESET Personal firewall. Four filtering modes are available for the ESET Smart Security Personal firewall. The behavior of the firewall changes based on the selected mode. [Filtering modes](#) also influences the level of user interaction required.

To disable the [first scan after installation](#) that is normally performed when installation finishes to check for malicious code, deselect the check box next to **Enable scan after installation**. Click **Install** in the **Ready to install** window to complete installation.

## 2.3 Product activation

After the installation is complete, you will be prompted to activate your product.

There are several methods for activating your product. Availability of a particular activation scenario in the activation window may vary depending on the country, as well as the means of distribution (CD/DVD, ESET web page, etc.).


If you purchased a retail boxed version of the product, select **Activate using an Activation Key**. The Activation Key is usually located inside or on the back side of the product package. The Activation Key must be entered as supplied for activation to be successful.

If you received a Username and Password, select **Activate using a Username and Password** and enter your credentials into the appropriate fields.

If you would like to evaluate ESET Smart Security before making a purchase, select **Activate Trial License**. Fill in your email address and country to activate ESET Smart Security for a limited time. Your test license will be emailed to you. Trial licenses can only be activated once per customer.

If you do not have a license and would like to buy one, click **Purchase License**. This will redirect you to the website of your local ESET distributor.

Select **Activate Later** if you would like to quickly evaluate our product and do not wish to activate it immediately, or if you would like to activate your product at a later time.

You can also activate your copy of ESET Smart Security directly from the program. Click the [Program menu](#) icon located in the top right corner or right-click on the ESET Smart Security icon in the system tray  and select **Activate your product...** from the menu.

## 2.4 Entering username and password

For optimal functionality, it is important that the program is automatically updated. This is only possible if the correct Username and Password are entered in **Update setup**.

If you did not enter your Username and Password during installation, you can do so now. In the main program window, click **Help and support** and then **Activate License** and enter the license data you received with your ESET security product into the Product activation window.

When entering your **Username** and **Password**, it is important to type them exactly as they are written:

- The username and password are case sensitive and the hyphen in the username is necessary.
- The password is ten characters long and all lowercase.
- We do not use the letter L in passwords (use the number one (1) instead).
- A big 'O' is the number zero (0), a little 'o' is the lowercase letter o.

We recommend copying and pasting the data from the registration email to ensure accuracy.

## 2.5 Upgrading to a more recent version


New versions of ESET Smart Security are issued to implement improvements or fix issues that cannot be resolved by automatic updates to program modules. Upgrading to a more recent version can be accomplished in several ways:

1. Automatically, by means of a program update.  
Since the program upgrade is distributed to all users and may have an impact on certain system configurations, it is issued after a long testing period to ensure functionality with all possible system configurations. If you need to upgrade to a newer version immediately after its release, use one of the methods below.
2. Manually, in the main program window by clicking **Install/Check for updates** in the **Update** section.
3. Manually, by downloading and installing a more recent version over the previous one.

## 2.6 First scan after installation

After installing ESET Smart Security, a computer scan will start 20 minutes after installation or computer restart in order to check for malicious code.

You can also start a computer scan manually from the main program window by clicking **Computer scan > Smart scan**. For more information about computer scans, see the section [Computer scan](#).

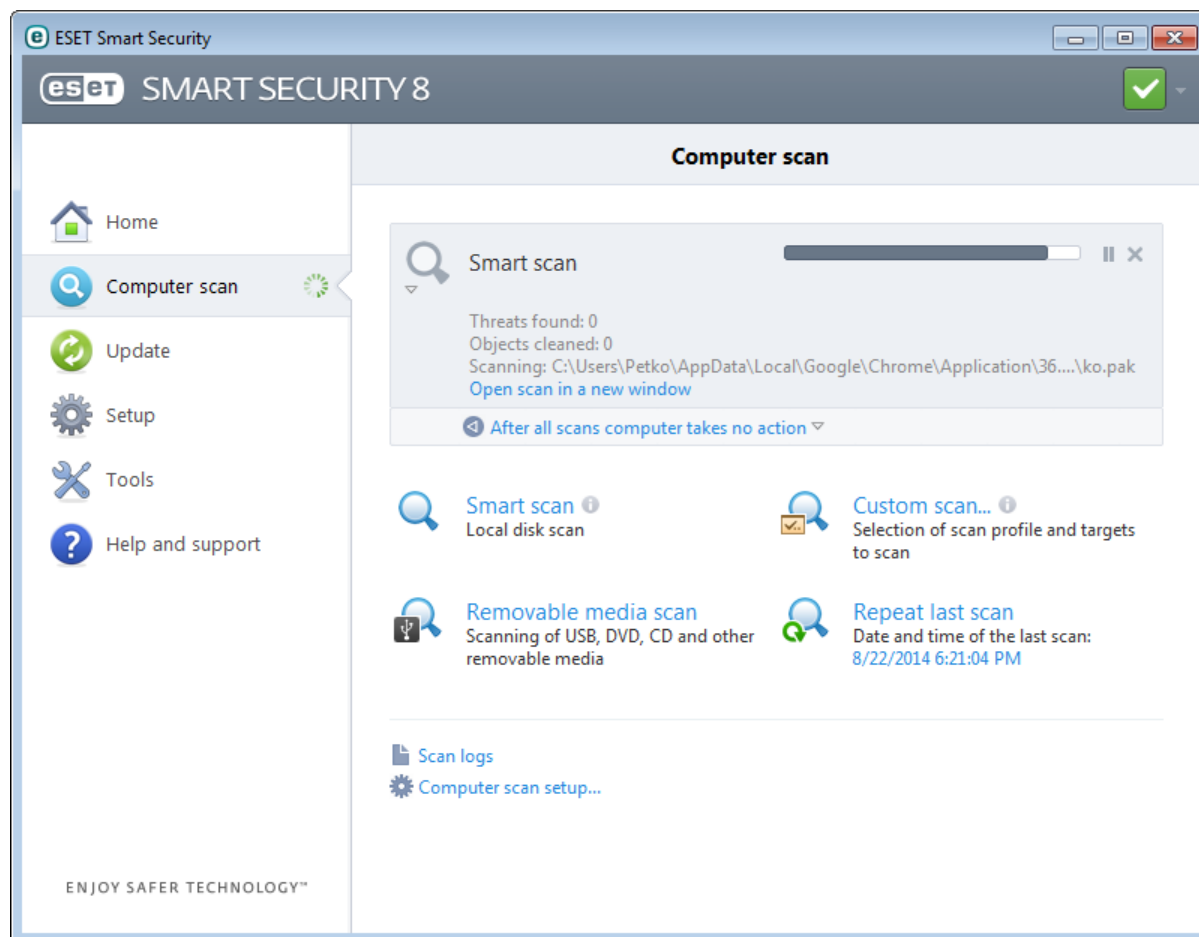

## 3. Beginner's guide

This chapter provides an initial overview of ESET Smart Security and its basic settings.

### 3.1 The main program window

The main program window of ESET Smart Security is divided into two main sections. The primary window on the right displays information that corresponds to the option selected from the main menu on the left.

The following is a description of options within the main menu:

**Home** – Provides information about the protection status of ESET Smart Security.


**Computer scan** – This option allows you to configure and launch a Smart scan or Custom scan.

**Update** – Displays information about virus signature database updates.

**Setup** – Select this option to adjust your security level for Computer, Web and email, Network and Parental control.

**Tools** – Provides access to Log files, Protection statistics, Watch activity, Running processes, Network connections, Scheduler, , ESET SysInspector and ESET SysRescue.

**Help and support** – Provides access to help files, the [ESET Knowledgebase](#), the ESET website and links to open a Customer Care support request.

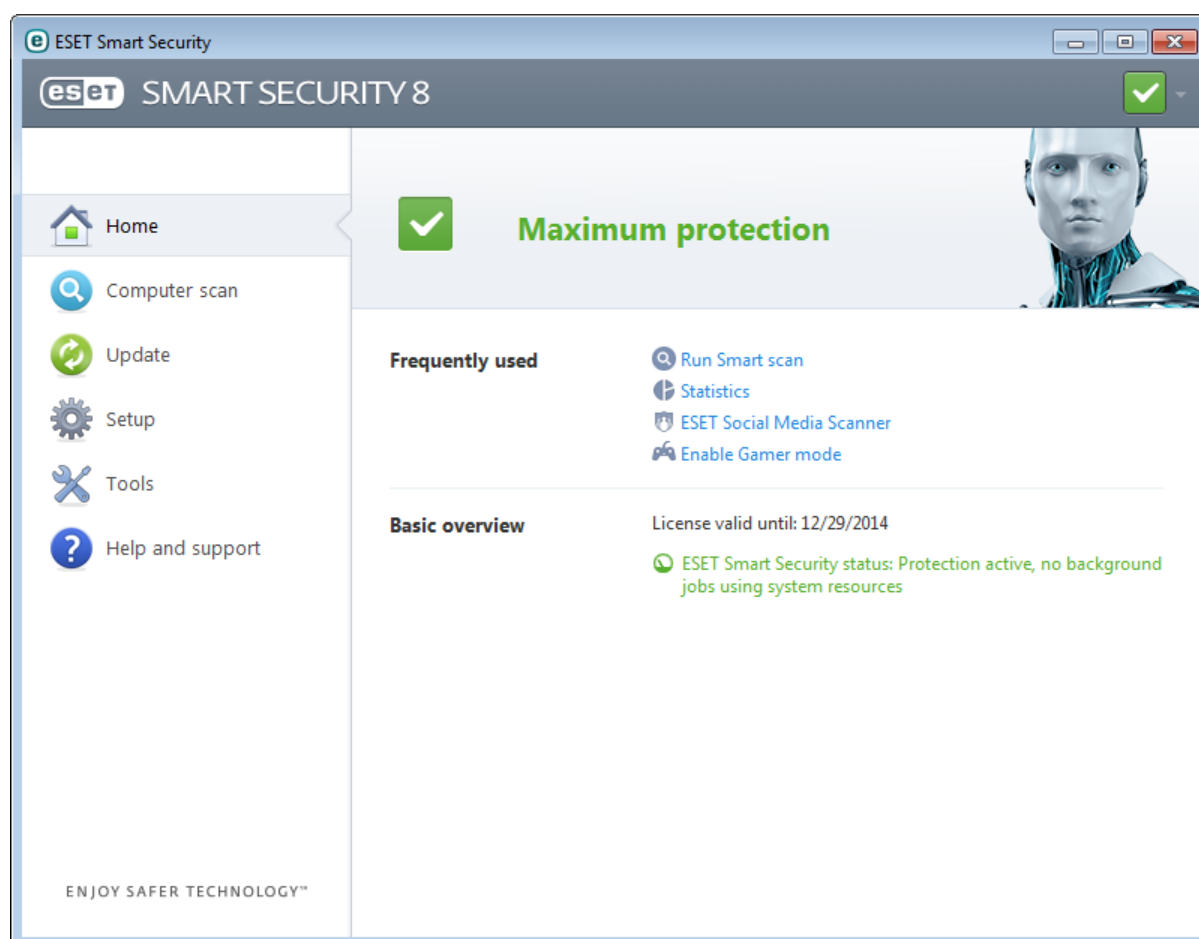


The **Home** screen informs you about the security and current protection level of your computer. The status window also displays Frequently used features in ESET Smart Security. Information about the program's expiration date can also be found here under **Basic overview**.

 The green icon and green **Maximum protection** status indicates that maximum protection is ensured.

## What to do if the program doesn't work properly?

If the modules enabled are working properly, the Protection status icon will be green. A red exclamation point or orange notification indicates that maximum protection is not ensured. Additional information about the protection status of each module, as well as suggested solutions for restoring full protection, will be displayed under **Home**. To change the status of individual modules, click **Setup** and select the desired module.

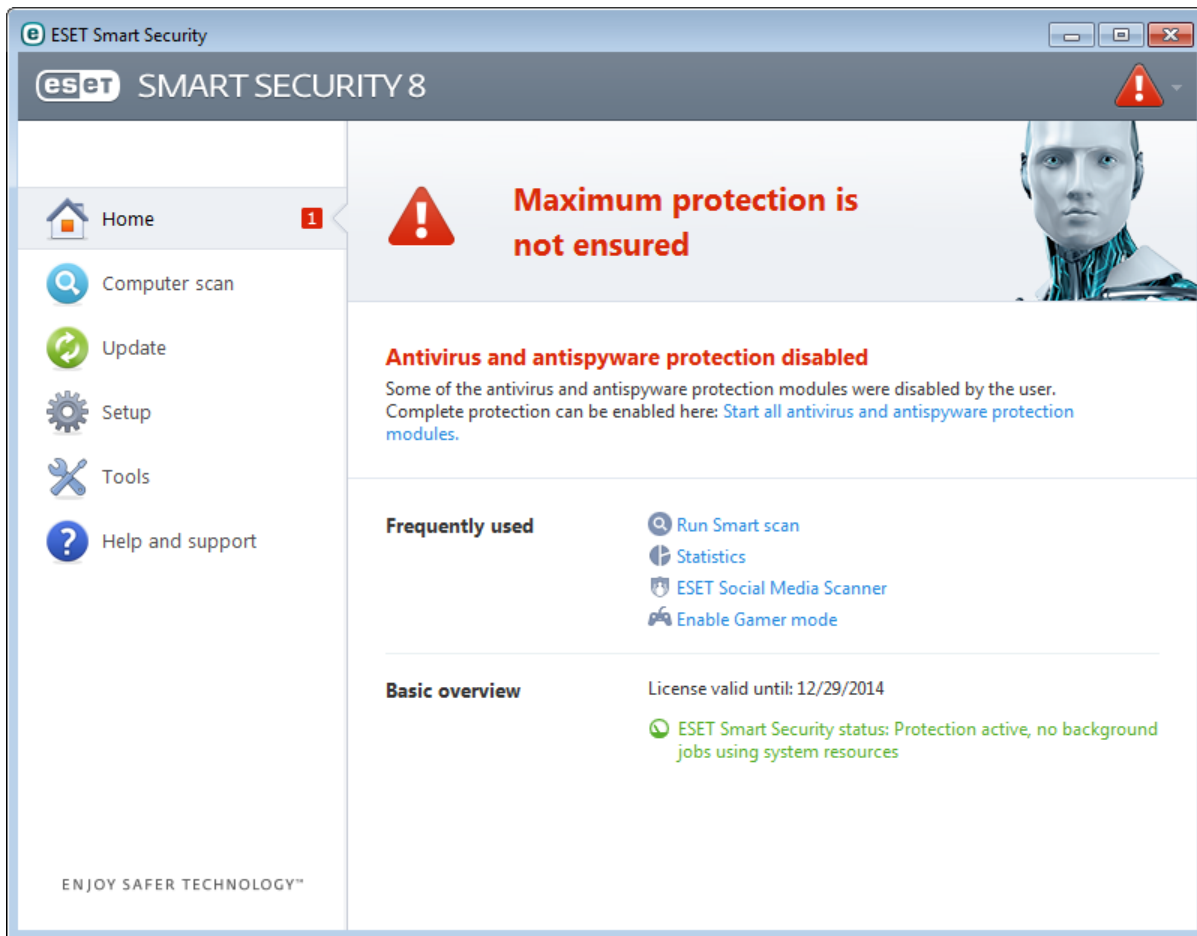

The red icon and red Maximum protection is not ensured status signals critical problems. There are several reasons this status may be displayed, for example:

- **Product not activated** – You can activate ESET Smart Security from **Home** by clicking either **Activate product** or **Buy now** under protection status.
- **Virus signature database is out of date** – This error will appear after several unsuccessful attempts to update the virus signature database. We recommend that you check the update settings. The most common reason for this error is incorrectly entered [authentication data](#) or incorrectly configured [connection settings](#).
- **Antivirus and antispyware protection disabled** – You can re-enable antivirus and antispyware protection by clicking on **Start all antivirus and antispyware protection modules**.
- **ESET Personal firewall disabled** – This problem is signaled also by a security notification next to the **Network** item on your desktop. You can re-enable network protection by clicking on **Enable firewall**.
- **License expired** – This is indicated by the Protection status icon turning red. The program is not able to update after the license expires. We recommend following the instructions in the alert window to renew your license.



The orange icon indicates that protection of your computer is limited. For example, there is a problem updating the program or your license is nearing its expiration date. There are several possible reasons this status may be displayed, for example:

- **Anti-Theft optimization warning** – This device is not optimized for ESET Anti-Theft. For example, a

Phantom account does not exist initially, but is a security feature that is triggered automatically when you mark a device as missing. You may need to create a Phantom account using the [Optimization](#) feature in the ESET Anti-Theft web interface.


- **Gamer mode enabled** – Enabling [Gamer mode](#) is a potential security risk. By enabling this feature, all pop-up windows are disabled and the activity of the scheduler will be completely stopped.
- **Your license will expire soon** – This is indicated by the protection status icon displaying an exclamation point next to the system clock. After your license expires, the program will not be able to update and the Protection status icon will turn red.

If you are unable to solve a problem using the suggested solutions, click **Help and support** to access the help files or search the [ESET Knowledgebase](#). If you still need assistance, you can submit a support request. ESET Customer Care will respond quickly to your questions and help find a resolution.


## 3.2 Updates

Updating the virus signature database and updating program components is an important part of protecting your system against malicious code. Pay careful attention to their configuration and operation. In the main menu, click **Update** and then click **Update now** to check for a virus signature database update.

If the Username and Password were not entered during the activation of ESET Smart Security you will be prompted for them at this point.

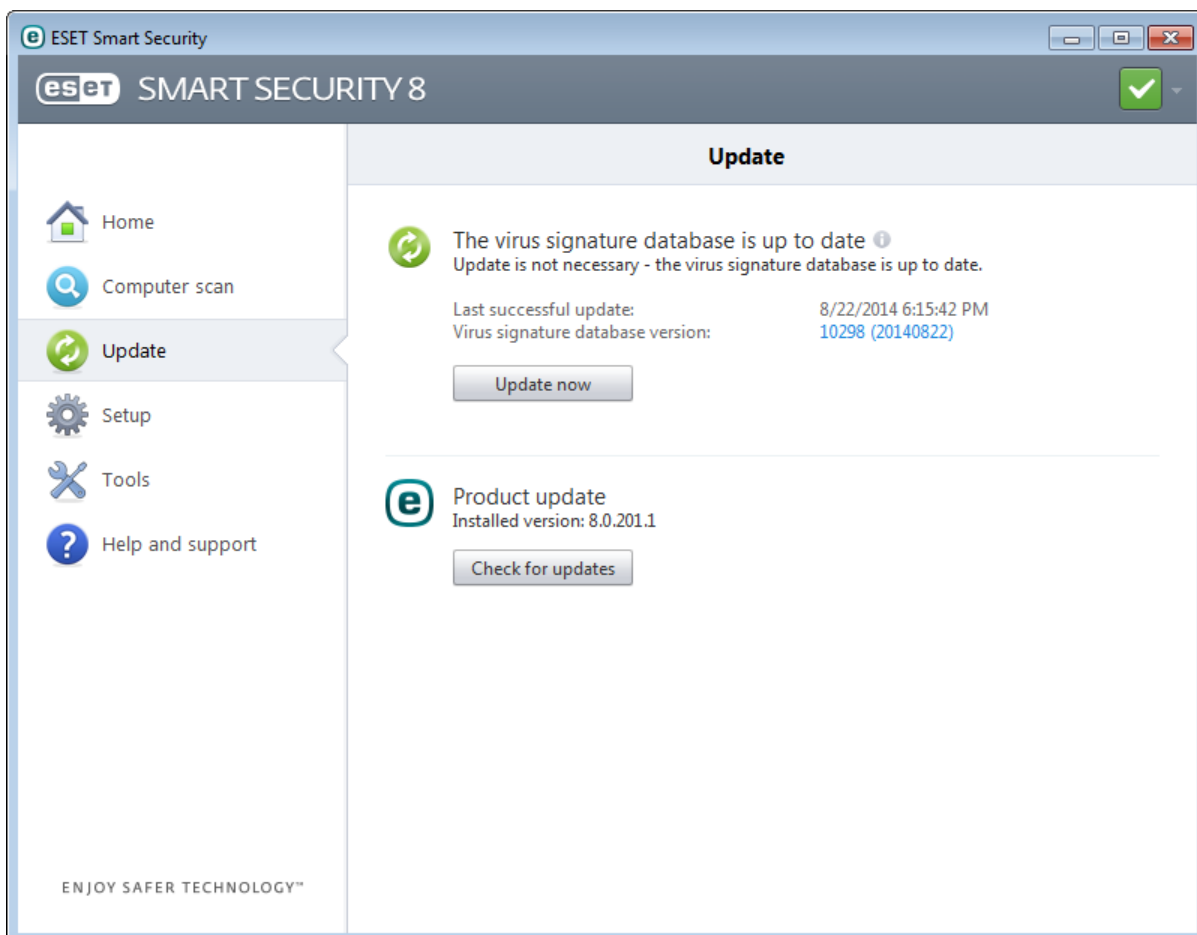


The Advanced setup window (click **Setup** in the main menu and then click **Enter advanced setup...**, or press **F5** on your keyboard) contains additional update options. Click **Update > Settings** in the Advanced setup tree to the left. To configure advanced update options such as update mode, proxy server access and LAN connections, click **Setup...** in the **Update** window.

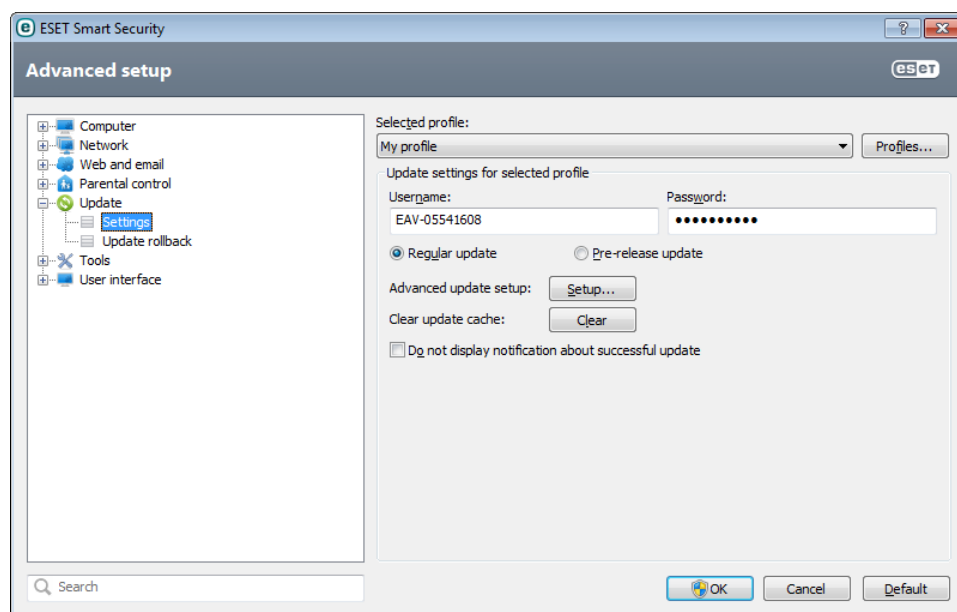

### 3.3 Trusted zone setup

It is necessary to configure the Trusted zone to protect your computer in a network environment. You can allow other users to access your computer by configuring the Trusted zone to allow sharing. Click **Setup > Network > Change the protection mode of your computer in the network....** A window will display options allowing you to choose the desired protection mode of your computer in the network.

Trusted zone detection occurs after ESET Smart Security installation and whenever your computer connects to a new network. Therefore, there is usually no need to define the Trusted zone. By default, when a new zone is detected a dialog window will prompt you to set the protection level for that zone.

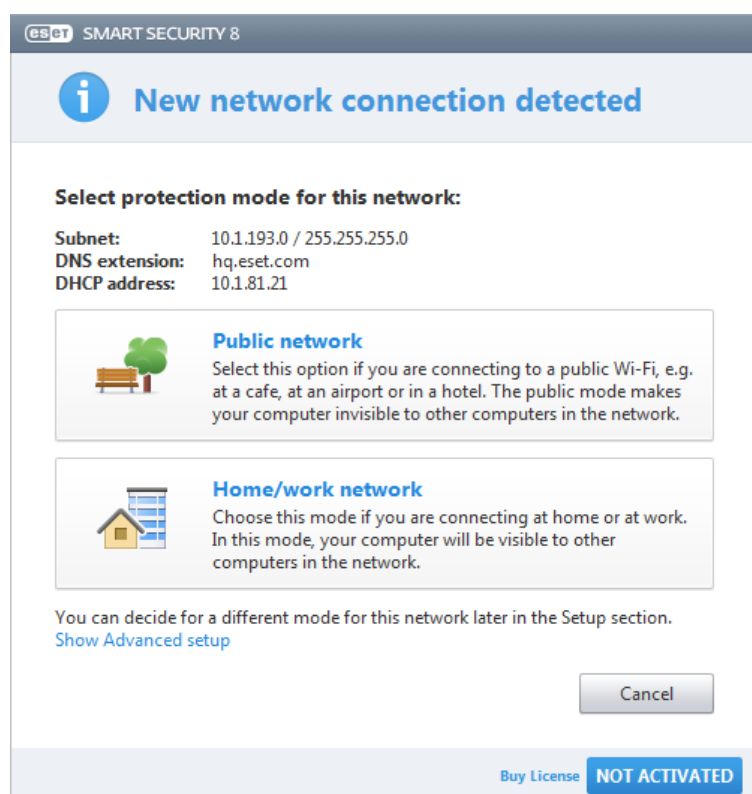

**Warning:** An incorrect trusted zone configuration may pose a security risk to your computer.



**NOTE:** By default, workstations from a Trusted zone are granted access to shared files and printers, have incoming RPC communication enabled and have remote desktop sharing available.


For more details about this feature please read the following ESET Knowledgebase article:

[New network connection detected in ESET Smart Security](#)

### 3.4 Anti-Theft

To protect your computer in case of a loss or theft, choose from the following options to register your computer with the ESET Anti-Theft system.

1. After a successful activation click **Enable Anti-Theft** to activate ESET Anti-Theft features for the computer you just registered.

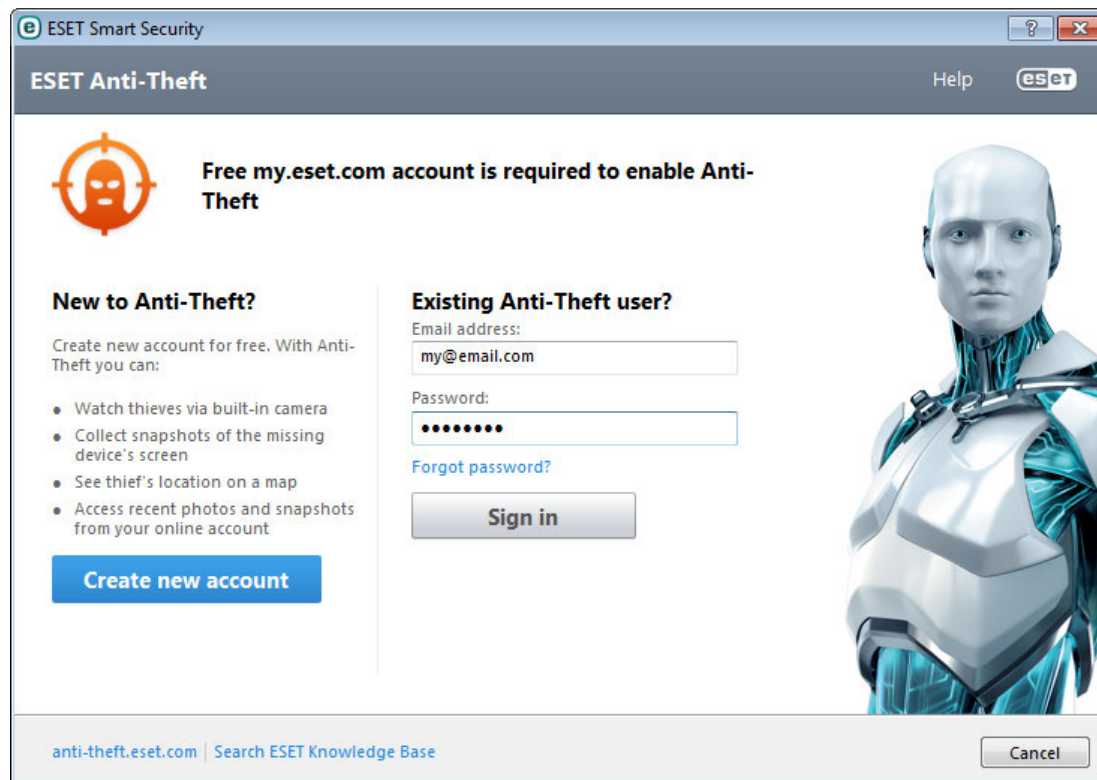

2. If you see the **ESET Anti-Theft is available** message in the **Home** pane of ESET Smart Security, consider activating this feature for your computer. Click **Enable ESET Anti-Theft** to associate your computer with ESET Anti-Theft.
3. From the main program window click **Setup**, and then click **ESET Anti-Theft** and follow the instructions in the pop-up window.

**Note:** ESET Anti-Theft does not run on Microsoft Windows Home Servers.

For more instructions about ESET Anti-Theft computer association and to learn how it works see [How to add a new device](#).


### 3.5 Parental control tools

If you have already enabled Parental control in ESET Smart Security, you must also configure Parental control for desired user accounts in order for Parental control to function properly.

When Parental controls are active but user accounts have not been configured, **Parental control is not set up** will be displayed in the **Home** pane of the main program window. Click **Set up rules now** and refer to the [Parental control](#) chapter for instructions on how to create specific restrictions for your children to protect them from potentially offensive material.

## 4. Work with ESET Smart Security

The ESET Smart Security setup options allow you to adjust the protection levels of your computer and network.

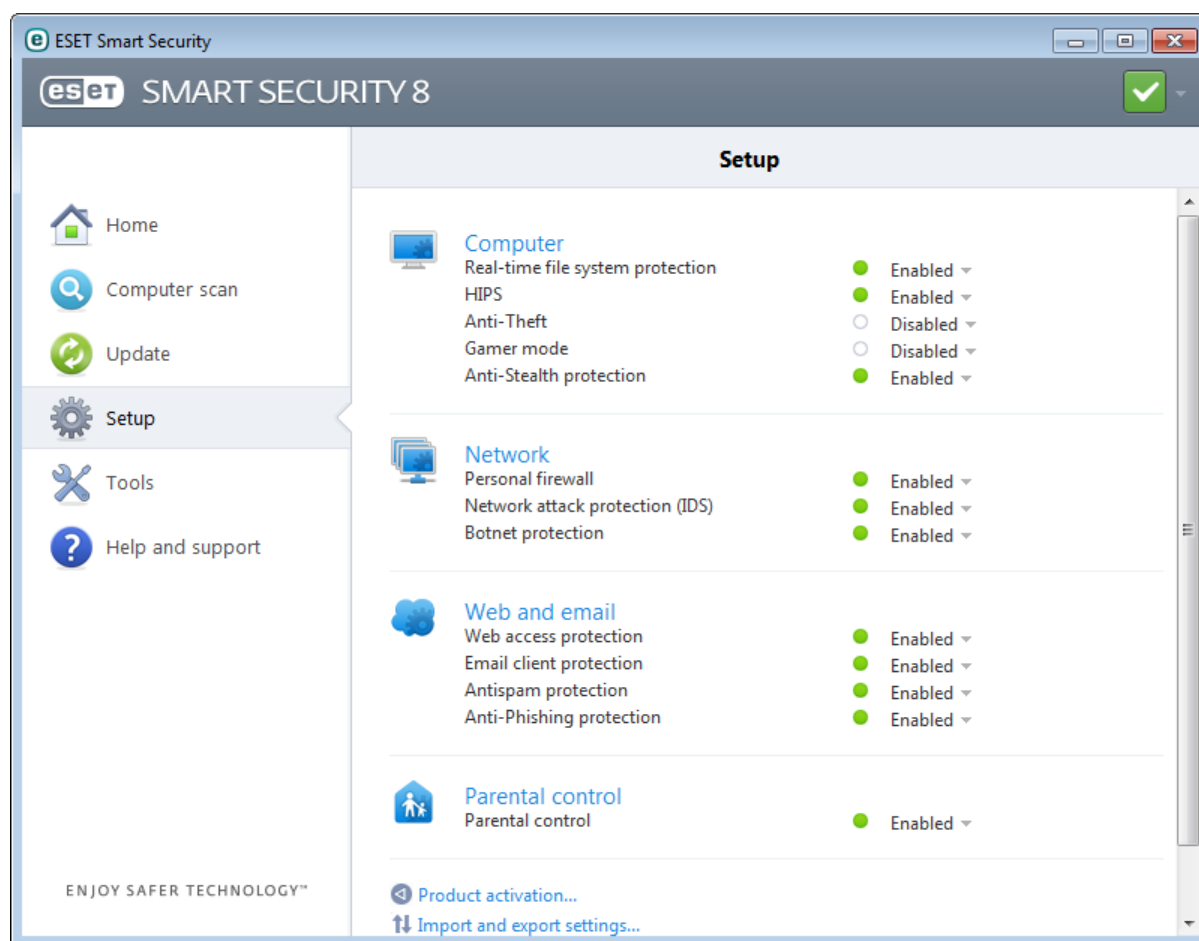

The **Setup** menu contains following:

- **Computer**
- **Network**
- **Web and Email**
- **Parental control**

Click any component to adjust the advanced settings of the corresponding protection module.

**Computer** protection setup allows you to enable or disable the following components:

- **Real-time file system protection** – All files are scanned for malicious code when they are opened, created or run on your computer.
- **HIPS** – The [HIPS](#) system monitors the events within the operating system and reacts to them according to a customized set of rules.
- **Anti-Theft** – You can also enable or disable [ESET Anti-Theft](#) from here.
- **Gamer mode** – Enables or disables [Gamer mode](#). You will receive a warning message (potential security risk) and the main window will turn orange after enabling Gamer mode.
- **Anti-Stealth protection** – Detects dangerous programs, such as [rootkits](#), which hide themselves from the operating system and ordinary testing techniques.

The **Network** section allows you to enable or disable the [Personal firewall](#), Network attack protection (IDS) and [Botnet protection](#).

Parental control lets you block webpages that may contain potentially offensive material. In addition, parents can prohibit access to more than 40 pre-defined website categories and over 140 subcategories.

**Web and Email** protection setup allows you to enable or disable the following components:

- **Web access protection** – If enabled, all traffic through HTTP or HTTPS is scanned for malicious software.
- **Email client protection** – Monitors communication received through POP3 and IMAP protocol.
- **Anti-Phishing protection** – Filters websites suspected of distributing content intended to manipulate users into submitting confidential information.
- **Antispam protection** – Scans unsolicited email, i.e., spam.

To re-enable the protection of the disabled security component, click **Disabled** and then **Enable**.


**NOTE:** When disabling protection using this method, all disabled parts of protection will be enabled after a computer restart.

There are additional options at the bottom of the setup window. Use the **Product activation...** link to open a registration form that will activate your ESET security product and send you an email with your authentication data (username and password). To load setup parameters using an *.xml* configuration file, or to save the current setup parameters to a configuration file, use the **Import and export settings...** option.

## 4.1 Computer

The **Computer** module can be found in the **Setup** pane after clicking on the **Computer** title. It shows an overview of all protection modules. To turn off individual modules temporarily, click **Enabled** > **Disable for...** next to the desired module. Note that this may decrease the protection level of your computer. To access detailed settings for each module, click **Configure...**

Click **Edit exclusions...** to open the [Exclusion](#) setup window, which allows you to exclude files and folders from scanning.

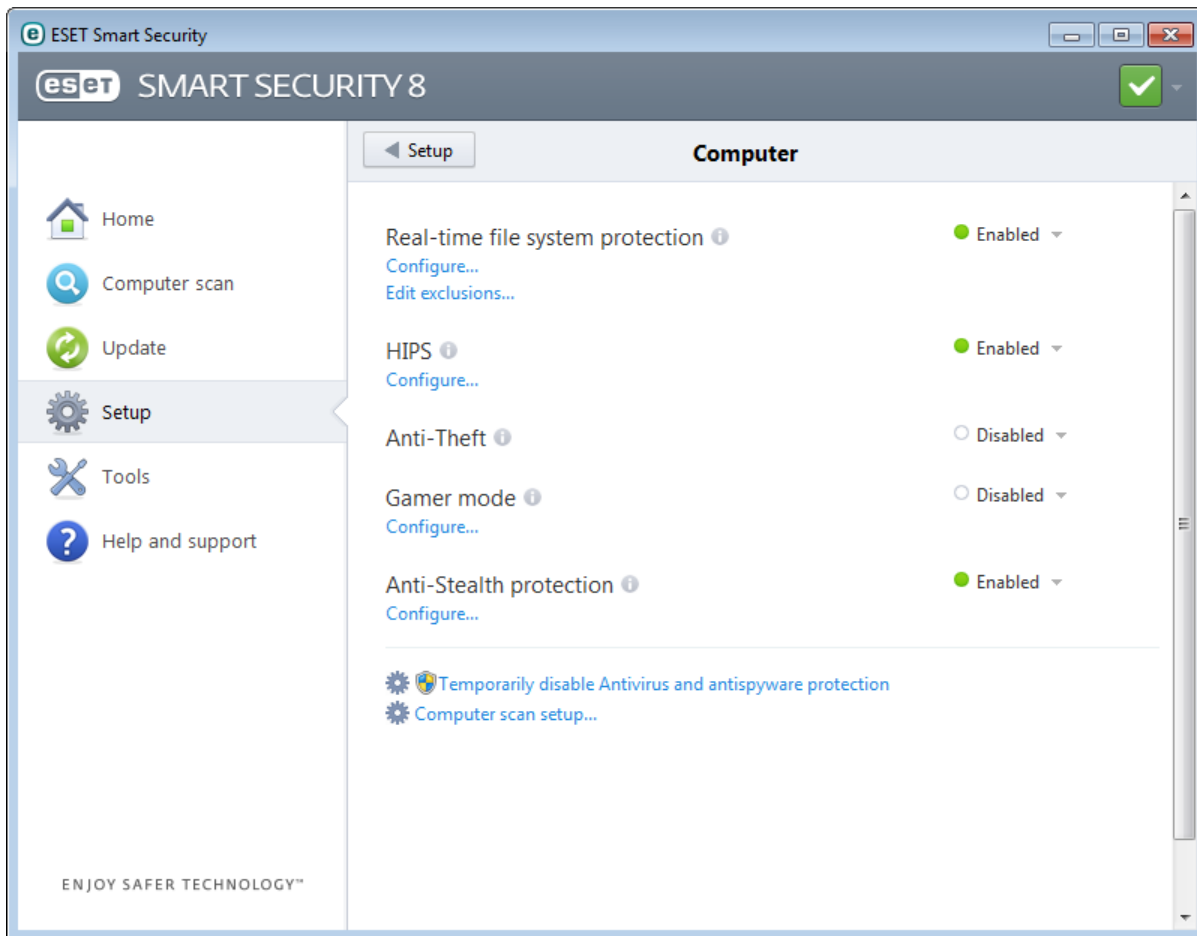

**Temporarily disable Antivirus and antispayware protection** – Disables all antivirus and antispayware protection modules. When you disable protection, the **Temporary disable protection** window will open, allowing you to determine how long protection is disabled by selecting a value from the **Time interval** drop-down menu.. Click **OK** to confirm.

**Computer scan setup...** – Click to adjust the parameters of the on-demand scanner (manually executed scan).

#### 4.1.1 Antivirus and antispyware

Antivirus and antispyware protection guards against malicious system attacks by controlling file, email and Internet communication. If a threat with malicious code is detected, the Antivirus module can eliminate it by first blocking it and then cleaning, deleting or moving it to quarantine.

Scanner options for all protection modules (e.g. Real-time file system protection, Web access protection, ...) allow you to enable or disable detection of the following:

- **Potentially unwanted applications** (PUAs) are not necessarily intended to be malicious, but may affect the performance of your computer in a negative way.  
Read more about these types of applications in the [glossary](#).
- **Potentially unsafe applications** refers to legitimate commercial software that has the potential to be misused for malicious purposes. Examples of potentially unsafe applications include remote access tools, password-cracking applications, and keyloggers (programs recording each keystroke typed by a user). This option is disabled by default.  
Read more about these types of applications in the [glossary](#).
- **Suspicious applications** include programs compressed with [packers](#) or protectors. These types of protectors are often exploited by malware authors to evade detection.

Anti-Stealth technology is a sophisticated system that provides the detection of dangerous programs such as [rootkits](#), which are able to hide themselves from the operating system. This means it is not possible to detect them using ordinary testing techniques.


##### 4.1.1.1 Real-time file system protection

Real-time file system protection controls all antivirus-related events in the system. All files are scanned for malicious code at the moment they are opened, created or run on your computer. Real-time file system protection is launched at system startup.

Real-time file system protection checks all types of media and is triggered by various system events such as accessing a file. Using ThreatSense technology detection methods (as described in the [ThreatSense engine parameter setup](#) section), Real-time file system protection can be configured to treat newly created files differently than existing files. For example, you can configure Real-time file system protection to more closely monitor newly created files.

To ensure a minimal system footprint when using real-time protection, files that have already been scanned are not scanned repeatedly (unless they have been modified). Files are scanned again immediately after each virus signature database update. This behavior is configured using **Smart optimization**. If this feature is disabled, all files are scanned each time they are accessed. To modify this option, press **F5** to open the Advanced setup window and expand **Computer > Antivirus and antispyware > Real-time file system protection**. Click **Setup...** next to **ThreatSense engine parameter setup > Other** and select or deselect **Enable Smart optimization**.

By default, Real-time file system protection launches at system startup and provides uninterrupted scanning. In special cases (for example, if there is a conflict with another real-time scanner), real-time protection can be disabled by deselecting **Start Real-time file system protection automatically** in the **Real-time file system protection** section of Advanced setup.

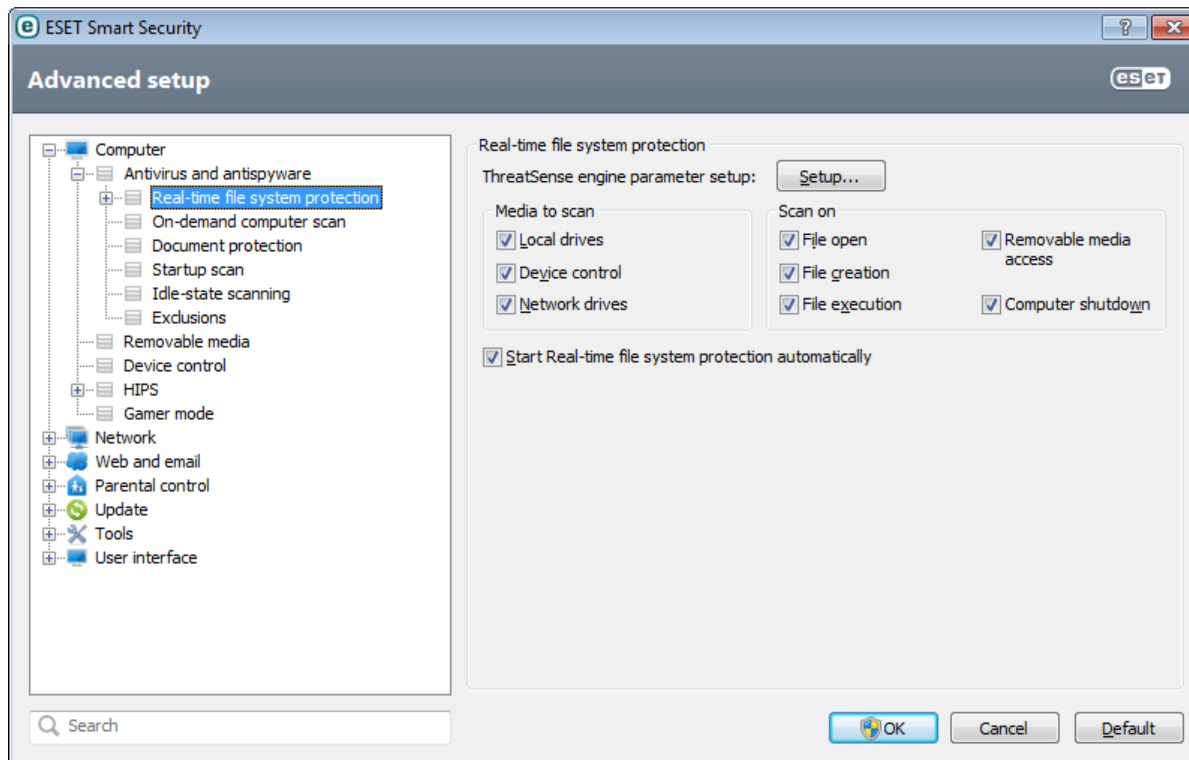

## Media to scan

By default, all types of media are scanned for potential threats:

**Local drives** – Controls all system hard drives.

**Device control** – Disk Storage, CD/DVDs, etc.

**Network drives** – Scans all mapped drives.

We recommend that you keep the default settings and only modify them in specific cases, such as when scanning certain media significantly slows data transfers.

## Scan on (Event-triggered scanning)

By default, all files are scanned upon opening, creation or execution. We recommend that you keep these default settings, as they provide the maximum level of real-time protection for your computer:

- **File open** – Enables or disables scanning of opened files.
- **File creation** – Enables or disables scanning of newly created or modified files.
- **File execution** – Enables or disables scanning of executed files.
- **Removable media access** – Enables or disables scanning triggered by accessing particular removable media with storage space.
- **Computer Shutdown** – Enables or disables scanning triggered by computer shutdown.

### 4.1.1.1.1 Advanced scan options

More detailed setup options can be found under **Computer > Antivirus and antispyware > Real-time system protection > Advanced setup**.

#### Additional ThreatSense parameters for newly created and modified files

The probability of infection in newly-created or modified files is comparatively higher than in existing files. For this reason, the program checks these files with additional scanning parameters. Along with common signature-based scanning methods, advanced heuristics are used which can detect new threats before the virus signature database update is released. In addition to newly-created files, scanning is also performed on **Self-extracting archives** (.sfx) and **Runtime packers** (internally compressed executable files). By default, archives are scanned up to the 10th nesting level and are checked regardless of their actual size. To modify archive scan settings, deselect **Default archive scan settings**.

## Additional ThreatSense parameters for executed files

- **Advanced heuristics on file execution** – By default, [Advanced heuristics](#) is used when files are executed. When enabled, we strongly recommend keeping [Smart optimization](#) and ESET Live Grid enabled to mitigate impact on system performance.
- **Advanced heuristics on executing files from removable media** – If you wish to exclude some removable media (USB) ports from being scanned by advanced heuristics on file execution, click **Exceptions...** to open the removable media drive exclusions window. In this window, you can customize the settings by selecting or deselecting the check boxes that represent each port.

### 4.1.1.1.2 Cleaning levels


Real-time protection has three cleaning levels (to access, click **Setup...** in the **Real-time file system protection** section and then click **Cleaning**).

**No cleaning** – Infected files will not be cleaned automatically. The program will display a warning window and allow the user to choose an action. This level is designed for more advanced users who know which steps to take in the event of an infiltration.

**Standard cleaning** – The program will attempt to automatically clean or delete an infected file based on a predefined action (depending on the type of infiltration). Detection and deletion of an infected file is signaled by a notification the bottom-right corner of the screen. If it is not possible to select the correct action automatically, the program provides other follow-up actions. The same happens when a predefined action cannot be completed.

**Strict cleaning** – The program will clean or delete all infected files. The only exceptions are the system files. If it is not possible to clean them, the user is prompted to select an action by a warning window.

**Warning:** If an archive contains a file or files which are infected, there are two options for dealing with the archive. In standard mode (Standard cleaning), the whole archive would be deleted if all the files it contains are infected files. In **Strict cleaning** mode, the archive would be deleted if it contains at least one infected file, regardless of the status of the other files in the archive.

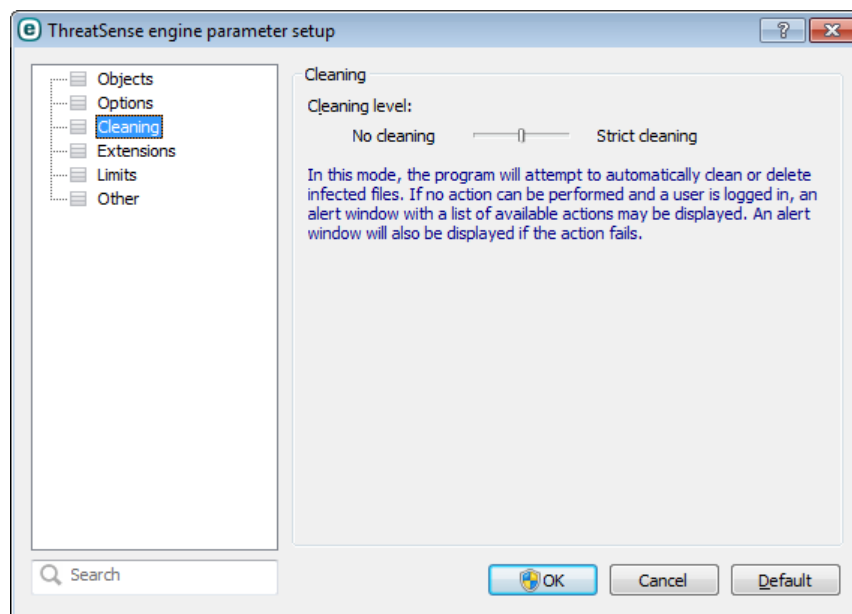

#### 4.1.1.1.3 When to modify real-time protection configuration

Real-time protection is the most essential component of maintaining a secure system. Always be careful when modifying its parameters. We recommend that you only modify its parameters in specific cases.

After installing ESET Smart Security, all settings are optimized to provide the maximum level of system security for users. To restore the default settings, click **Default** at the bottom-right of the **Real-time file system protection** window (**Advanced setup** > **Computer** > **Antivirus and antispyware** > **Real-time file system protection**).

#### 4.1.1.1.4 Checking real-time protection

To verify that real-time protection is working and detecting viruses, use a test file from eicar.com. This test file is a harmless file detectable by all antivirus programs. The file was created by the EICAR company (European Institute for Computer Antivirus Research) to test the functionality of antivirus programs. The file is available for download at <http://www.eicar.org/download/eicar.com>

**NOTE:** Before performing a real-time protection check, it is necessary to disable the [firewall](#). If the firewall is enabled, it will detect the file and prevent test files from downloading.

#### 4.1.1.1.5 What to do if real-time protection does not work

In this chapter, we describe problems that may arise when using real-time protection and how to troubleshoot them.

##### Real-time protection is disabled

If real-time protection was inadvertently disabled by a user, it needs to be reactivated. To reactivate real-time protection, navigate to **Setup** in the main program window and click **Real-time file system protection**.

If real-time protection is not initiated at system startup, it is usually because **Start Real-time file system protection automatically** is deselected. To enable this option, navigate to **Advanced setup (F5)** and click **Computer** > **Antivirus and antispyware** > **Real-time file system protection** in the **Advanced setup** tree. In the **Advanced setup** section at the bottom of the window, make sure that the **Start Real-time file system protection automatically** check box is selected.

##### If Real-time protection does not detect and clean infiltrations

Make sure that no other antivirus programs are installed on your computer. If two real-time protection shields are enabled at the same time, they may conflict with each other. We recommend that you uninstall any other antivirus programs on your system before installing ESET.

##### Real-time protection does not start

If real-time protection is not initiated at system startup (and **Start Real-time file system protection automatically** is enabled), it may be due to conflicts with other programs. For assistance resolving this issue, please contact ESET Customer Care.

#### 4.1.1.2 Computer scan

The on-demand scanner is an important part of your antivirus solution. It is used to perform scans of files and folders on your computer. From a security standpoint, it is essential that computer scans are not just run when an infection is suspected, but regularly as part of routine security measures. We recommend that you perform regular in-depth scans of your system to detect viruses that are not captured by [Real-time file system protection](#) when they are written to the disk. This can happen if Real-time file system protection is disabled at the time, the virus database is obsolete or the file is not detected as a virus when it is saved to the disk.

Two types of **Computer scan** are available. **Smart scan** quickly scans the system with no need for further configuration of the scan parameters. **Custom scan** allows you to select from predefined scan profiles designed to target specific locations, and also lets you choose specific scan targets.

## Smart scan

Smart scan allows you to quickly launch a computer scan and clean infected files with no need for user intervention. The advantage of Smart scan is it is easy to operate and does not require detailed scanning configuration. Smart scan checks all files on local drives and automatically cleans or deletes detected infiltrations. The cleaning level is automatically set to the default value. For more detailed information on types of cleaning, see [Cleaning](#).

## Custom scan

Custom scan lets you specify scanning parameters such as scan targets and scanning methods. The advantage of Custom scan is the ability to configure the parameters in detail. Configurations can be saved to user-defined scan profiles, which can be useful if scanning is repeatedly performed with the same parameters.

## Removable media scan

Similar to Smart scan – quickly launch a scan of removable media (such as CD/DVD/USB) that are currently connected to the computer. This may be useful when you connect a USB flash drive to a computer and wish to scan its content for malware and other potential threats.

This type of scan can be also initiated by clicking **Custom scan**, and then selecting **Removable media** from the **Scan targets** drop-down menu and clicking **Scan**.

See [Scan progress](#) for more information about the scanning process.

We recommend that you run a computer scan at least once a month. Scanning can be configured as a scheduled task from **Tools > Scheduler**. How to schedule a weekly computer scan?

### 4.1.1.2.1 Custom scan launcher


If you wish not to scan entire disk space but only a specific target, you can use the Custom scan tool by clicking **Computer scan > Custom scan** and select an option from the **Scan targets** drop-down menu or select specific targets from the folder (tree) structure.

Scan targets window allows you to define which objects (memory, drives, sectors, files and folders) are scanned for infiltrations. Select targets from the tree structure, which lists all devices available on the computer. The **Scan targets** drop-down menu allows you to select predefined scan targets.

- **By profile settings** – Selects targets set in the selected scan profile.
- **Removable media** – Selects diskettes, USB storage devices, CD/DVD.
- **Local drives** – Selects all system hard drives.
- **Network drives** – Selects all mapped network drives.
- **No selection** – Cancels all selections.

To quickly navigate to a scan target or to directly add a desired target (folder or file(s)), enter it in the blank field below the folder list. This is only possible if no targets were selected in the tree structure and the **Scan targets** menu is set to **No selection**.



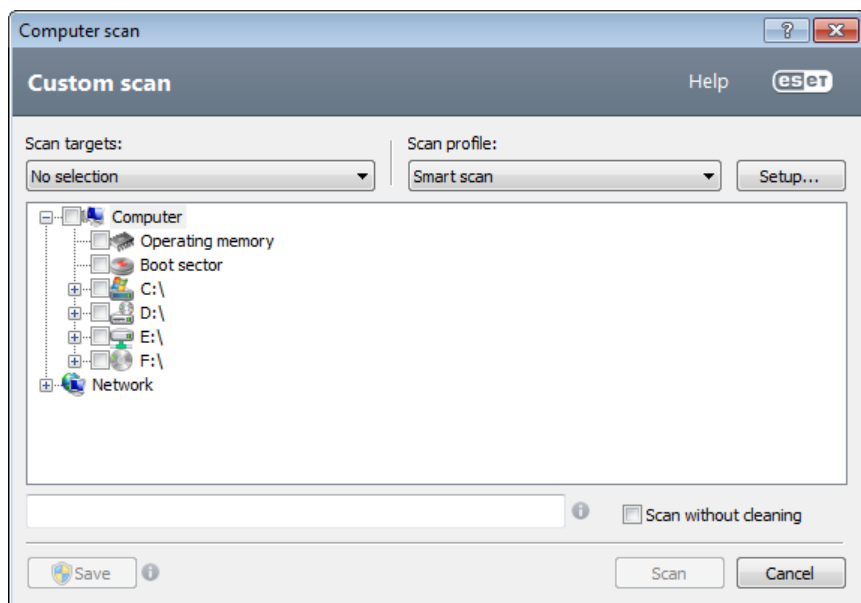

Infected items are not cleaned automatically. Scanning without cleaning can be used to obtain an overview of the current protection status. If you are only interested in scanning the system without additional cleaning actions, select **Scan without cleaning**. Furthermore, you can choose from three cleaning levels by clicking **Setup... > Cleaning**. Information about scanning is saved to a scan log.

You can choose a profile from the **Scan profile** drop-down menu to be used for scanning chosen targets. The default profile is **Smart scan**. There are two more pre-defined scan profiles called **In-depth scan** and **Context menu scan**. These scan profiles use different [ThreatSense engine parameters](#). Click **Setup...** to set up chosen scan profile from the Scan profile menu in detail. The available options are described in [Scanner setup](#).

Click **Save** to save changes made to your target selection, including selections made within the folder tree structure.

Click **Scan** to execute the scan using the custom parameters that you have set.

**Scan as Administrator** allows you to execute the scan under the Administrator account. Click this if the current user doesn't have privileges to access the appropriate files to be scanned. Note that this button is not available if the current user cannot call UAC operations as Administrator.

#### 4.1.1.2.2 Scan progress

The scan progress window shows the current status of the scan and information about the number of files found that contain malicious code.

**NOTE:** It is normal that some files, such as password protected files or files being exclusively used by the system (typically *pagefile.sys* and certain log files), cannot be scanned.

The progress bar shows the percentage of already-scanned objects compared to objects still waiting to be scanned. This value is derived from the total number of objects included in a scan.


#### Tips:

Click the magnifier or arrow to show details about the scan that is currently running.

You can run another parallel scan by clicking **Smart scan** or **Custom scan...**

**Objects** – Shows the total number of scanned files, threats found and threats cleaned during a scan.

**Target** – The name of the currently scanned object and its location.

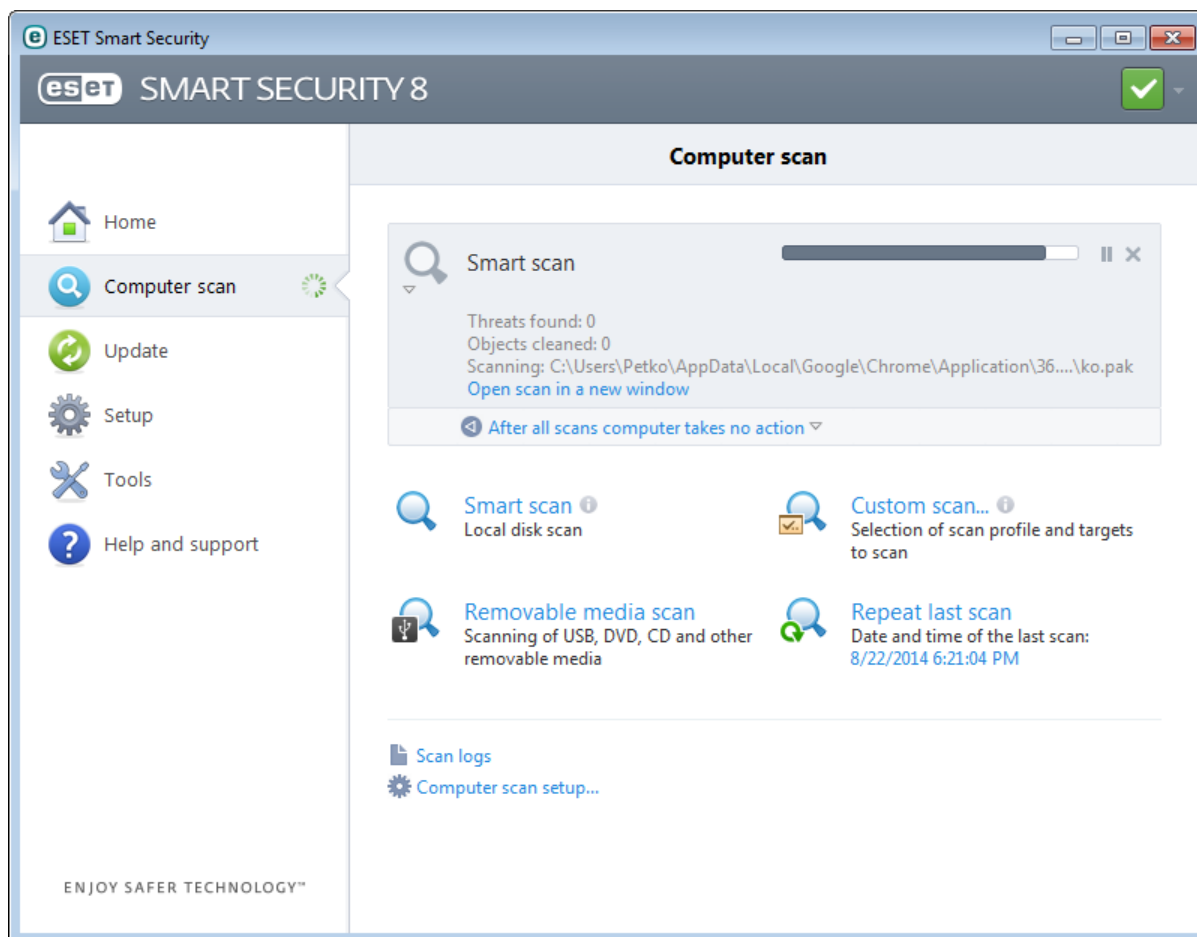

**After all scans computer takes no action** – Triggers a scheduled shutdown or reboot when the computer scan finishes. Once the scan has finished, a shutdown confirmation dialog window will open with a 60 second timeout. Click this option again to deactivate the selected action.

#### 4.1.1.2.3 Scan profiles

Your preferred scan parameters can be saved for future scanning. We recommend that you create a different profile (with various scan targets, scan methods and other parameters) for each regularly used scan.

To create a new profile, open the Advanced setup window (F5) and click **Computer > Antivirus and antispyware > On-demand computer scan > Profiles....** The **Configuration profiles** window includes the **Selected profile** drop-down menu that lists existing scan profiles and the option to create a new one. To help you create a scan profile to fit your needs, see the [ThreatSense engine parameters setup](#) section for a description of each parameter of the scan setup.

**Example:** Suppose that you want to create your own scan profile and the Smart scan configuration is partially suitable, but you don't want to scan runtime packers or potentially unsafe applications and you also want to apply **Strict cleaning**. In the **Configuration profiles** window, click **Add....** Enter the name of your new profile in the **Profile name** field and select **Smart scan** from the **Copy settings from profile** drop-down menu. Adjust the remaining parameters to meet your requirements and save your new profile.

#### 4.1.1.3 Startup scan

By default the automatic startup file check will be performed on system startup and during virus signature database updates. This scan is dependent upon the [Scheduler configuration and tasks](#).

The startup scan options is part of a **System startup file check** scheduler task. To modify its settings, navigate to **Tools > Scheduler**, click on **Automatic startup file check** and then **Edit....** In the last step, the [Automatic startup file check](#) window will appear (see the following chapter for more details).

For detailed instructions about Scheduler task creation and management, see Creating new tasks.

#### 4.1.1.3.1 Automatic startup file check

When creating a System startup file check scheduled task, you have several options to adjust the following parameters:

The **Scan level** drop-down menu specifies the scan depth for files run at system startup. Files are arranged in ascending order according to the following criteria:

- **Only the most frequently used files** (least files scanned)
- **Frequently used files**
- **Commonly used files**
- **Rarely used files**
- **All registered files** (most files scanned)

Two specific **Scan level** groups are also included:

- **Files run before user login** – Contains files from locations that may be accessed without the user being logged in (includes almost all startup locations such as services, browser helper objects, winlogon notify, Windows scheduler entries, known dll's, etc.).
- **Files run after user login** – Contains files from locations that may only be accessed after a user has logged in (includes files that are only run by a specific user, typically files in `HKEY_CURRENT_USER\SOFTWARE\Microsoft\Windows\CurrentVersion\Run`).

Lists of files to be scanned are fixed for each aforementioned group.

**Scan priority** – The level of priority used to determine when a scan will start:

- **Normal** – at an average system load
- **Lower** – at a low system load
- **Lowest** – when the system load is the lowest possible
- **When idle** – the task will be performed only when the system is idle

#### 4.1.1.4 Idle-state scanning

The idle-state scanner can be configured and enabled in **Advanced setup** under **Computer > Antivirus and antispyware > Idle-state scanning**. When the computer is in idle state, a silent computer scan is performed on all local drives. See [Idle state detection triggers](#) for a full list of conditions that must be met in order to trigger the idle-state scanner.

By default, the idle-state scanner will not run when the computer (notebook) is operating on battery power. You can override this setting by selecting the check box next to **Run even if the computer is on the battery** in Advanced setup.

Select **Enable logging** in Advanced setup to record a computer scan output in the [Log files](#) section (from the main program window click **Tools > Log files** and select **Computer scan** from the **Log** drop-down menu).

The last setting here is [ThreatSense engine parameter setup](#). Click **Setup...** if you want to modify several scan parameters (for example, detection methods).

#### 4.1.1.5 Exclusions

Exclusions enable you to exclude files and folders from scanning. To ensure that all objects are scanned for threats, we recommend only creating exclusions when it is absolutely necessary. However, there are situations where you may need to exclude an object, for example large database entries that would slow your computer during a scan or software that conflicts with the scan.

To exclude an object from scanning:


1. Click **Add...**,
2. Enter the path to an object or select it in the tree structure.

You can use wildcards to cover a group of files. A question mark (?) represents a single variable character whereas

an asterisk (\*) represents a variable string of zero or more characters.

### Examples

- If you wish to exclude all files in a folder, type the path to the folder and use the mask "\*. \*".
- To exclude an entire drive including all files and subfolders, use the mask "D:\\*".
- If you want to exclude doc files only, use the mask "\*.doc".
- If the name of an executable file has a certain number of characters (and characters vary) and you only know the first one for sure (say "D"), use the following format: "D????.exe". Question marks replace the missing (unknown) characters.

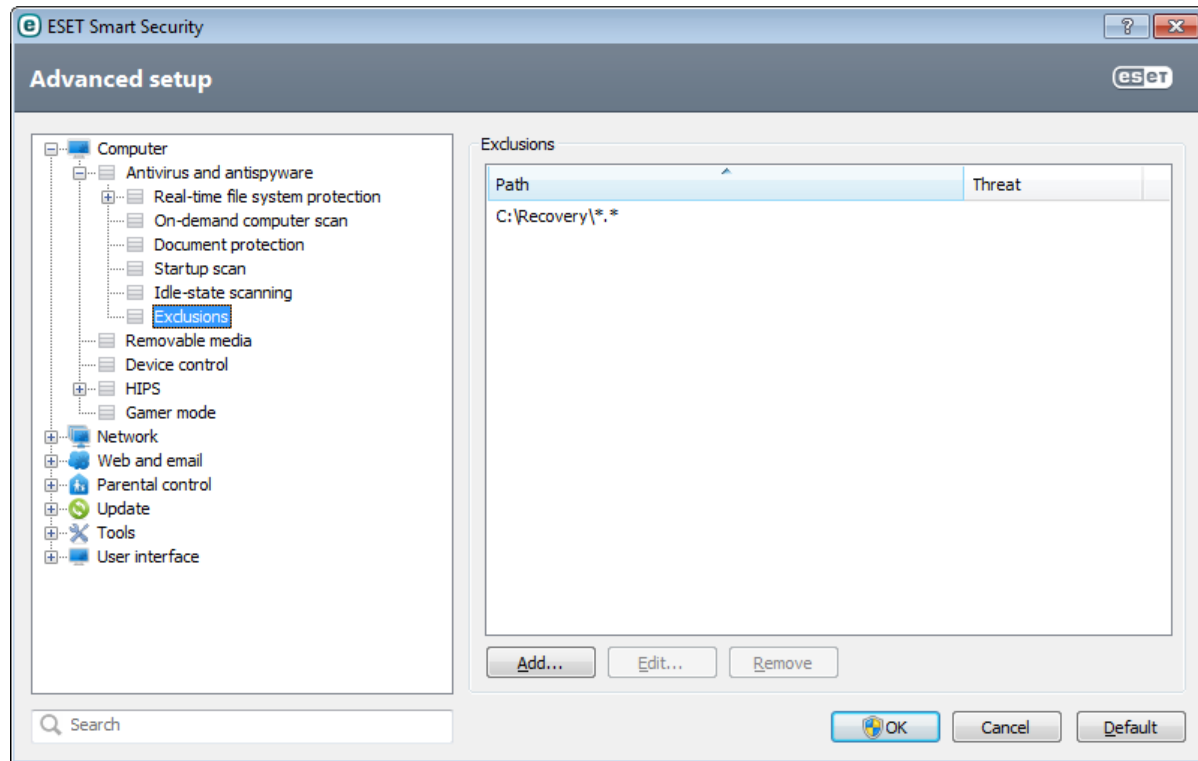

**Note:** A threat within a file will not be detected by the Real-time file system protection module or Computer scan module if a file meets the criteria for exclusion from scanning.

**Path** – Path to excluded files and folders.

**Threat** – If there is a name of a threat next to an excluded file, it means that the file is only excluded for the given threat, not completely. If that file becomes infected later with other malware, it will be detected by the antivirus module. This type of exclusion can only be used for certain types of infiltrations and it can be created either in the threat alert window reporting the infiltration (click **Show advanced options** and then select **Exclude from detection**), or by clicking **Setup > Quarantine** and then right-clicking the quarantined file and selecting **Restore and exclude from detection** from the context menu.

**Add...** – Excludes objects from detection

**Edit...** – Enables you to edit selected entries

**Remove** – Removes selected entries

#### 4.1.1.6 ThreatSense engine parameters setup

ThreatSense is technology comprised of many complex threat detection methods. This technology is proactive, which means it also provides protection during the early spread of a new threat. It uses a combination of code analysis, code emulation, generic signatures and virus signatures which work in concert to significantly enhance system security. The scanning engine is capable of controlling several data streams simultaneously, maximizing the efficiency and detection rate. ThreatSense technology also successfully eliminates rootkits.

ThreatSense engine setup options allow you to specify several scan parameters:

- File types and extensions that are to be scanned,
- The combination of various detection methods,
- Levels of cleaning, etc.

To enter the setup window, click **Setup...** in the Advanced setup window for any module that uses ThreatSense technology (see below). Different security scenarios may require different configurations. With this in mind, ThreatSense is individually configurable for the following protection modules:

- Real-time file system protection,
- Document protection,
- Email client protection,
- Web access protection,
- Computer scan.

ThreatSense parameters are highly optimized for each module, and their modification can significantly influence system operation. For example, changing parameters to always scan runtime packers, or enabling advanced heuristics in the Real-time file system protection module could result in a system slow-down (normally, only newly-created files are scanned using these methods). We recommend that you leave the default ThreatSense parameters unchanged for all modules except Computer scan.

##### 4.1.1.6.1 Objects

The **Objects** section allows you to define which computer components and files will be scanned for infiltrations.

**Operating memory** – Scans for threats that attack the operating memory of the system.

**Boot sectors** – Scans boot sectors for the presence of viruses in the master boot record.

**Email files** – The program supports the following extensions: DBX (Outlook Express) and EML.

**Archives** – The program supports the following extensions: ARJ, BZ2, CAB, CHM, DBX, GZIP, ISO/BIN/NRG, LHA, MIME, NSIS, RAR, SIS, TAR, TNEF, UUE, WISE, ZIP, ACE, and many others.

**Self-extracting archives** – Self-extracting archives (SFX) are archives needing no specialized programs – archives – to decompress themselves.

**Runtime packers** – After executing, runtime packers (unlike standard archive types) decompress in memory. In addition to standard static packers (UPX, yoda, ASPack, FSG, etc.), the scanner supports (thanks to code emulation) many more types of packers.

##### 4.1.1.6.2 Options

Use the **Options** section to select the methods used when scanning the system for infiltrations. The following options are available:

**Heuristics** – A heuristic is an algorithm analyzing the (malicious) activity of programs. The main advantage is the ability to identify malicious software which did not exist, or was not identified by previous virus signatures databases. The disadvantage is the small probability of false alarms.

**Advanced heuristics/DNA/Smart signatures** – Advanced Heuristics is one of the technologies used by ESET Smart Security to provide proactive threat detection. It provides the ability to detect unknown malware based on its functionality through emulation. This new binary translator helps bypass anti-emulation tricks used by malware

writers. Its latest version introduces a completely new way of code emulation based on binary translation. This new binary translator helps to bypass anti-emulation tricks used by malware writers. In addition to these improvements, DNA-based scanning has been significantly updated to allow for better generic detections and address current malware more accurately.

**ESET Live Grid** – Using ESET reputation technology, information about scanned files is verified against data from the cloud-based [ESET Live Grid](#) to improve detection and scanning speed.

#### 4.1.1.6.3 Cleaning

The cleaning settings determine the behavior of the scanner while cleaning infected files. There are [3 levels of cleaning](#).

#### 4.1.1.6.4 Extensions

An extension is a part of a file name delimited by a period. An extension defines the type and content of a file. This section of the ThreatSense parameter setup lets you define the types of files to scan.

By default, all files are scanned regardless of their extension. Any extension can be added to the list of files excluded from scanning. If **Scan all files** is deselected, the list changes to show all currently scanned file extensions.

To enable the scanning of files without an extension, select **Scan extensionless files**. **Do not scan extensionless files** becomes available when **Scan all files** is enabled.

Excluding files is sometimes necessary if scanning certain file types prevents the program that is using certain extensions from running properly. For example, it may be advisable to exclude the .edb, .eml and .tmp extensions when using Microsoft Exchange servers.

Using the **Add** and **Remove** buttons, you can allow or prohibit scanning of specific file extensions. Typing an **Extension** activates the **Add** button, which adds the new extension to the list. Select an extension in the list and then click **Remove** to delete that extension from the list.

The special symbols \* (asterisk) and ? (question mark) can be used. The asterisk substitutes any character string, and the question mark substitutes any symbol. Particular care should be taken when specifying excluded addresses, because the list should only contain trusted and safe addresses. Similarly, it is necessary to ensure that the symbols \* and ? are used correctly in this list.

To scan the default set of extensions only, click **Default** and click **Yes** when prompted to confirm.

#### 4.1.1.6.5 Limits

The Limits section allows you to specify the maximum size of objects and levels of nested archives to be scanned:

**Maximum object size** – Defines the maximum size of objects to be scanned. The given antivirus module will then scan only objects smaller than the size specified. This option should only be changed by advanced users who may have specific reasons for excluding larger objects from scanning. Default value: *unlimited*.

**Maximum scan time for object (sec.)** – Defines the maximum time value for scanning of an object. If a user-defined value has been entered here, the antivirus module will stop scanning an object when that time has elapsed, regardless of whether the scan has finished. Default value: *unlimited*.

**Archive nesting level** – Specifies the maximum depth of archive scanning. Default value: *10*.

**Maximum size of file in archive** – This option allows you to specify the maximum file size for files contained in archives (when they are extracted) that are to be scanned. Default value: *unlimited*.

If scanning of an archive is prematurely terminated for these reasons, the archive check box will remain deselected.

**Note:** We do not recommend changing the default values; under normal circumstances, there should be no reason to modify them.

#### 4.1.1.6.6 Other

You can configure the following options in the **Other** section:

**Log all objects** – If this option is selected, the log file will show all the scanned files, even those not infected. For example, if an infiltration is found within an archive, the log will list also clean files contained within the archive.

**Enable Smart optimization** – With Smart Optimization enabled, the most optimal settings are used to ensure the most efficient scanning level, while simultaneously maintaining the highest scanning speeds. The various protection modules scan intelligently, making use of different scanning methods and applying them to specific file types. If the Smart Optimization is disabled, only the user-defined settings in the ThreatSense core of the particular modules are applied when performing a scan.

When configuring ThreatSense engine parameters setup for a Computer scan, the following options are also available:

**Scan alternate data streams (ADS)** – Alternate data streams used by the NTFS file system are file and folder associations which are invisible to ordinary scanning techniques. Many infiltrations try to avoid detection by disguising themselves as alternate data streams.

**Run background scans with low priority** – Each scanning sequence consumes a certain amount of system resources. If you work with programs that place a high load on system resources, you can activate low priority background scanning and save resources for your applications.

**Preserve last access timestamp** – Select this option to keep the original access time of scanned files instead of updating them (for example, for use with data backup systems).

**Scroll scan log** – This option allows you to enable/disable log scrolling. If selected, information scrolls upwards within the display window.

#### 4.1.1.7 An infiltration is detected


Infiltrations can reach the system from various entry points such as webpages, shared folders, via email or from removable devices (USB, external disks, CDs, DVDs, diskettes, etc.).

##### Standard behavior

As a general example of how infiltrations are handled by ESET Smart Security, infiltrations can be detected using:


- Real-time file system protection
- Web access protection
- Email client protection
- On-demand computer scan

Each uses the standard cleaning level and will attempt to clean the file and move it to [Quarantine](#) or terminate the connection. A notification window is displayed in the notification area at the bottom right corner of the screen. For more information about cleaning levels and behavior, see [Cleaning](#).

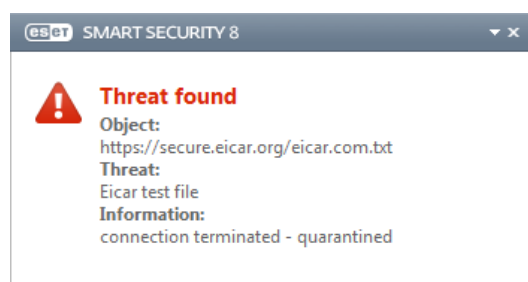

## Cleaning and deleting

If there is no predefined action to take for Real-time file system protection, you will be prompted to select an option in the alert window. Usually the options **Clean**, **Delete** and **No action** are available. Selecting **No action** is not recommended, as this will leave infected files uncleaned. The exception to this is when you are sure that a file is harmless and has been detected by mistake.

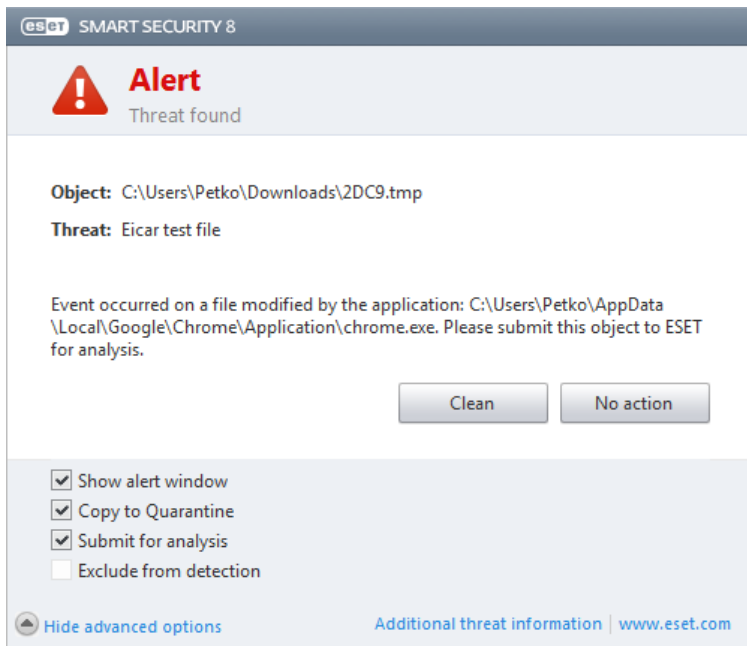

Apply cleaning if a file has been attacked by a virus that has attached malicious code to the file. If this is the case, first attempt to clean the infected file in order to restore it to its original state. If the file consists exclusively of malicious code, it will be deleted.

If an infected file is “locked” or in use by a system process, it will usually only be deleted after it is released (normally after a system restart).

## Multiple threats

If any infected files were not cleaned during Computer scan (or the Cleaning level was set to **No Cleaning**), an alert window prompting you to select actions for those files is displayed. Select actions for the files (actions are set individually for each file in the list) and then click **Finish**.

## Deleting files in archives

In Default cleaning mode, the entire archive will be deleted only if it contains infected files and no clean files. In other words, archives are not deleted if they also contain harmless clean files. Use caution when performing a Strict cleaning scan, with Strict cleaning enabled an archive will be deleted if it contains at least one infected file regardless of the status of other files in the archive.

If your computer is showing signs of a malware infection, e.g., it is slower, often freezes, etc., we recommend that you do the following:

- Open ESET Smart Security and click Computer scan
- Click **Smart scan** (for more information, see [Computer scan](#))
- After the scan has finished, review the log for the number of scanned, infected and cleaned files

If you only want to scan a certain part of your disk, click **Custom scan** and select targets to be scanned for viruses.



#### 4.1.1.8 Document protection

The Document protection feature scans Microsoft Office documents before they are opened, as well as files downloaded automatically by Internet Explorer such as Microsoft ActiveX elements. Document protection provides a layer of protection in addition to Real-time file system protection, and can be disabled to enhance performance on systems that are not exposed to a high volume of Microsoft Office documents.

**Integrate into system** activates the protection system. To modify this option, press F5 to open the Advanced setup window and click **Computer > Antivirus and antispyware > Document protection** in the Advanced setup tree.


This feature is activated by applications that use Microsoft Antivirus API (e.g., Microsoft Office 2000 and higher, or Microsoft Internet Explorer 5.0 and higher).

#### 4.1.2 Removable media

ESET Smart Security provides automatic removable media (CD/DVD/USB/...) scanning. This module allows you to scan an inserted media. This may be useful if the computer administrator wishes to prevent the users from using removable media with unsolicited content.

To modify behavior of the action that will be performed when a removable media is inserted into the computer (CD/DVD/USB/...), press **F5** to open the Advanced setup window and expand **Computer > Antivirus and antispyware > Removable media** and select the default action in the **Action to take after inserting removable media** drop-down menu. If the **Show scan options** option is selected, a notification will display which allows you to choose a desired action:

- **Scan now** – An on-demand computer scan of the inserted removable media device will be performed.
- **Scan later** – No action will be performed and the **New device detected** window will be closed.
- **Setup...** – Opens the Removable media setup section.

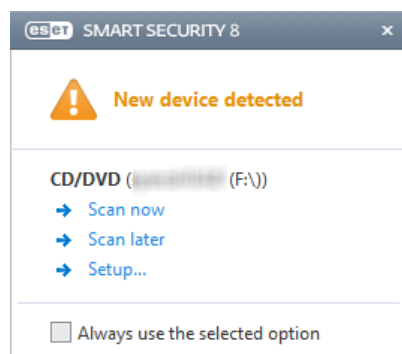

#### 4.1.3 Device control

ESET Smart Security provides automatic device (CD/DVD/USB/...) control. This module allows you to scan, block or adjust extended filters/permissions and define a users ability to access and work with a given device. This may be useful if the computer administrator wishes to prevent use of devices with unsolicited content by users.

##### Supported external devices

- Disk Storage
- CD/DVD
- FireWire Storage

**Note:** Device control in ESET Endpoint Security or ESET Endpoint Antivirus used in a corporate environment supports more types of external devices.

Device control setup options can be modified in **Advanced setup (F5) > Computer > Device control**.


Selecting the check box next to **Integrate into system** activates the Device control feature in ESET Smart Security; you will need to restart your computer for this change to take effect. Once Device control is enabled, **Configure rules...** will become active, allowing you to open the [Device control rules editor](#) window.

If the inserted external device applies an existing rule that performs the **Block** action, a notification window will

pop-up in the lower right corner and access to the device will not be granted.

#### 4.1.3.1 Device control rules

The **Device control rules editor** window displays existing rules and allows for precise control of external devices that users connect to the computer.

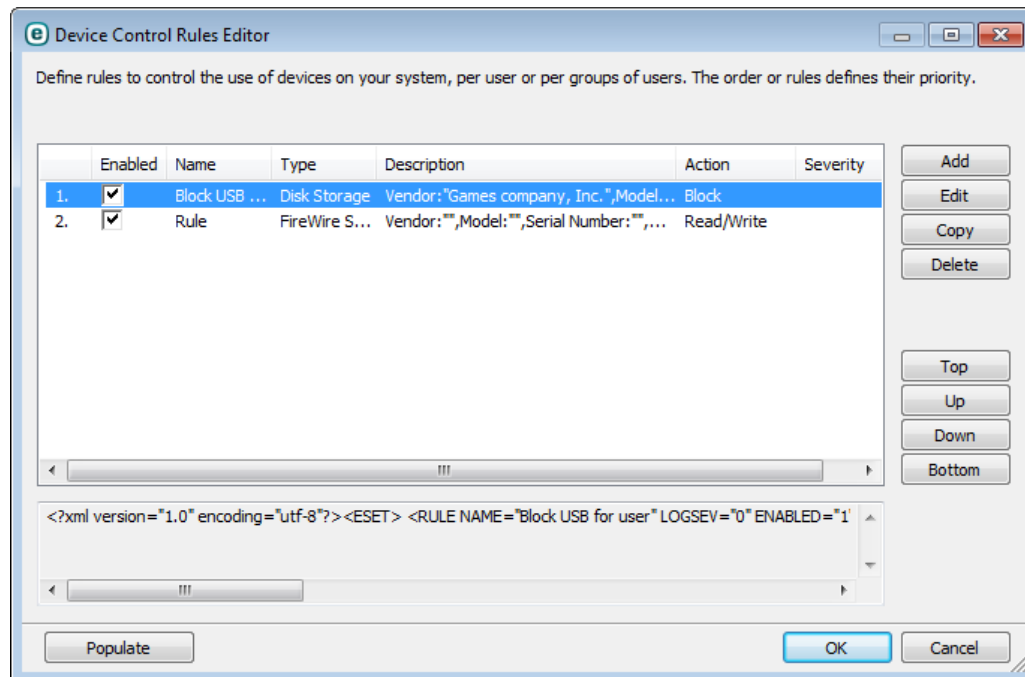

Particular devices can be allowed or blocked per user or user group and based on additional device parameters that can be specified in the rule configuration. The list of rules contains several descriptions of a rule such as name, type of external device, action to perform after connecting an external device to your computer and log severity.

Click **Add** or **Edit** to manage a rule. Click **Copy** to create a new rule with predefined options used for another selected rule. XML strings displayed when clicking a rule can be copied to the clipboard to help system administrators to export/import these data and use them, for example in ESET Remote Administrator.

By pressing CTRL and clicking, you can select multiple rules and apply actions, such as deleting or moving them up or down the list, to all selected rules. The **Enabled** check box disables or enables a rule; this can be useful if you don't wish to delete a rule permanently in case you wish to use it in the future.


The control is accomplished by rules that are sorted in the order determining their priority, with higher priority rules on top.

You can right-click a rule to display the context menu. Here you can set the log entries verbosity (severity) of a rule. Log entries can be viewed from the main window of ESET Smart Security in **Tools** > [Log files](#).

Click **Populate** to auto-populate removable media device parameters for devices connected to your computer.

### 4.1.3.2 Adding Device control rules

A Device control rule defines the action that will be taken when a device meeting the rule criteria is connected to the computer.

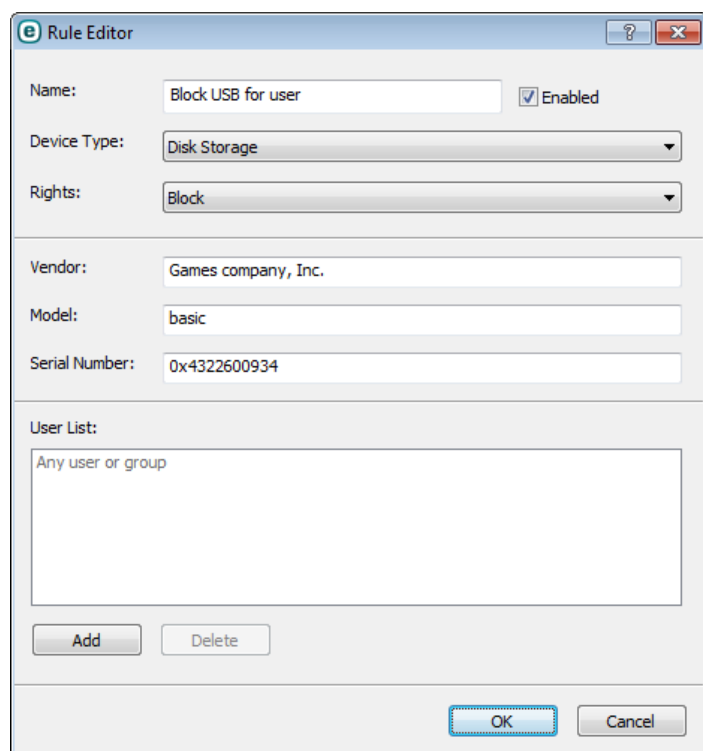

The screenshot shows the 'Rule Editor' window. It has a title bar with a question mark and a close button. The main area contains several fields: 'Name' with the text 'Block USB for user' and a checked 'Enabled' checkbox; 'Device Type' with a dropdown menu showing 'Disk Storage'; 'Rights' with a dropdown menu showing 'Block'; 'Vendor' with the text 'Games company, Inc.'; 'Model' with the text 'basic'; and 'Serial Number' with the text '0x4322600934'. Below these fields is a 'User List' section with a text box containing 'Any user or group' and two buttons, 'Add' and 'Delete'. At the bottom right are 'OK' and 'Cancel' buttons.

Enter a description of the rule into the **Name** field for better identification. Selecting the check box next to **Enabled** disables or enables this rule; this can be useful if you don't wish to delete the rule permanently.

#### Device type

Choose the external device type from the drop-down menu (Disk Storage / CD/DVD...). The types of devices are inherited from the operating system and can be seen in the system Device manager providing a device is connected to the computer. The **CD/DVD** device type in the drop-down menu refers to the storage of data on an optically readable medium (e.g. CDs, DVDs). Storage devices cover external disks or conventional memory card readers connected via USB or FireWire. Smart card readers encompass readers of smart cards with an embedded integrated circuit, such as SIM cards or authentication cards. Examples of imaging devices are scanners or cameras, these devices do not provide information about users, only about their actions. This means that imaging devices can only be blocked globally.

#### Rights

Access to non-storage devices can be either allowed or blocked. By contrast, rules for storage devices allow for selecting one of the following rights:

- **Block** – Access to the device will be blocked.
- **Read Only** – Only reading access to the device will be allowed.
- **Read/Write** – Full access to the device will be allowed.

Other parameters that can be used to fine-tune rules and tailor them to devices. All parameters are case-insensitive:

- **Vendor** – Filtering by vendor name or ID.
- **Model** – The given name of the device.
- **Serial number** – External devices usually have their own serial numbers. In the case of a CD/DVD, this is the serial number of the given media, not the CD drive.

**Note:** If the above three descriptors are empty, the rule will ignore these fields while matching. Filtering parameters in all text fields are case-sensitive and no wildcards (\*, ?) are supported. They must be written exactly

as delivered by the vendor.

**Tip:** In order to figure out the parameters of a device, create an allowing rule for the appropriate type of devices, connect the device to your computer and then check the device details in the [Device control log](#).

Rules can be limited to certain users or user groups by adding them to the **User list**:

- **Add** – Opens the **Object type: Users or Groups** dialog window that allows you to select desired users.
- **Delete** – Removes the selected user from the filter.

Note that not all devices can be limited by user rules, (for example imaging devices do not provide information about users, only about invoked actions.)

#### 4.1.4 HIPS

**Host-based Intrusion Prevention System (HIPS)** protects your system from malware and unwanted activity attempting to negatively affect your computer. HIPS utilizes advanced behavioral analysis coupled with the detection capabilities of network filtering to monitor running processes, files and registry keys. HIPS is separate from Real-time file system protection and is not a firewall; it monitors only processes running within the operating system.

HIPS settings are located in **Advanced setup (F5)**. To access HIPS in the Advanced setup tree, click **Computer > HIPS**. The HIPS state (enabled/disabled) is displayed in the ESET Smart Security main window, in the **Setup** pane on the right side of the Computer section.

**Warning:** Changes to HIPS settings should only be made by an experienced user.

ESET Smart Security has built-in *Self-defense* technology that prevents malicious software from corrupting or disabling your antivirus and antispyware protection. *Self-defense* protects files and registry keys considered crucial to the function of ESET Smart Security and ensures that potentially malicious software has no privileges to make any modifications to these locations.

Changes to the **Enable HIPS** and **Enable Self-defense** settings will take effect after Windows is restarted. Disabling the **HIPS** system also requires a computer restart to take effect.

**Exploit Blocker** is designed to fortify commonly exploited application types such as web browsers, PDF readers, email clients and MS Office components. Read more about this type of protection in the [glossary](#).

**Advanced memory scanner** works in combination with Exploit Blocker to strengthen protection against malware that has been designed to evade detection by antimalware products through the use of obfuscation and/or encryption. Read more about this type of protection in the [glossary](#).


HIPS Filtering can be performed in one of four modes:

- **Automatic mode with rules** – Operations are enabled and a set of pre-defined rules are used protect your system.
- **Smart mode** – User will be notified only about very suspicious events.
- **Interactive mode** – User will be prompted to confirm operations.
- **Policy-based mode** – Operations not defined by a rule can be blocked.
- **Learning mode** – Operations are enabled and a rule is created after each operation. Rules created in this mode can be viewed in the **Rule editor**, but their priority is lower than the priority of rules created manually or rules created in automatic mode. After selecting **Learning mode**, the **Notify about learning mode expiration in X days** option becomes active. After the time period defined in the **Notify about learning mode expiration in X days** is over, learning mode is disabled again. The maximum time period is 14 days. After this time period is over, a pop-up window will open in which you can edit the rules and select a different filtering mode.


The HIPS system monitors events inside the operating system and reacts accordingly based on rules similar to the rules used by the personal firewall in ESET Smart Security. Click **Configure rules...** to open the HIPS rule management window. Here you can select, create, edit or delete rules.

In the following example, we will demonstrate how to restrict unwanted behavior of applications:

1. Name the rule and select **Block** from the **Action** drop-down menu.
2. Open the **Target applications** tab. Leave the **Source applications** tab blank to apply your new rule to all applications attempting to perform any of the selected operations in the **Operations** list on applications in the **Over these applications** list.
3. Select **Modify state of another application** (all operations are described in product help, which can be accessed by pressing F1).
4. **Add** one or several applications you wish to protect.
5. Select the **Notify user** check box to display a notification any time that a rule is applied.
6. Click **OK** to save the new rule.

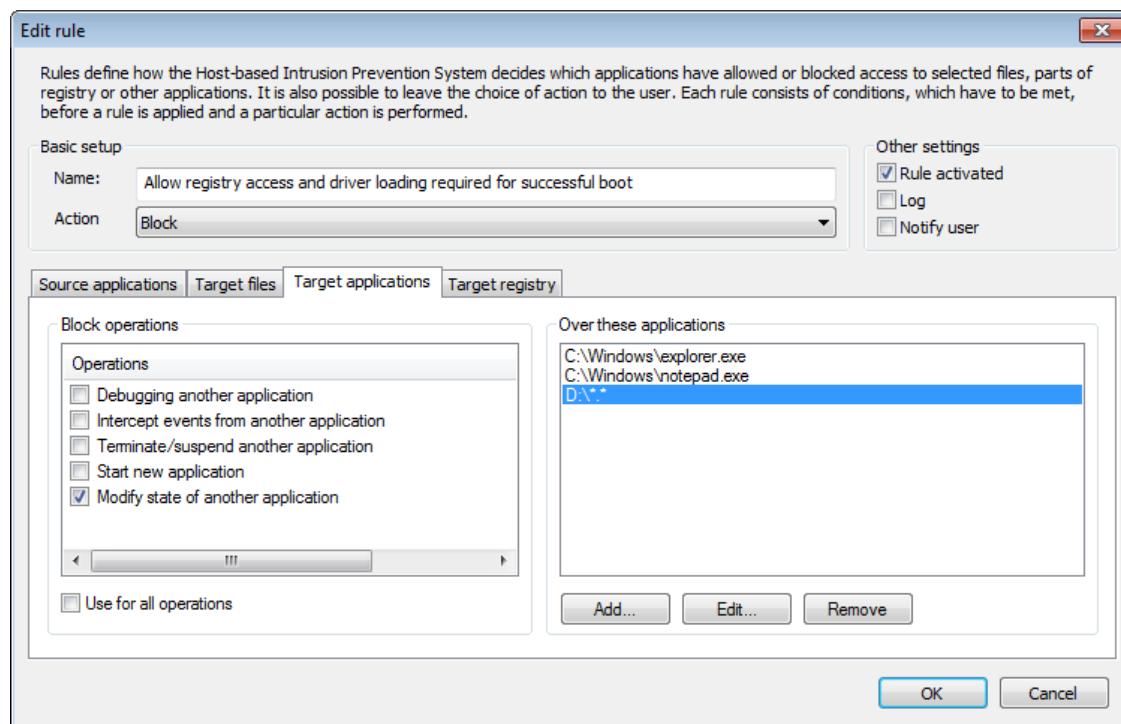

If you select **Ask** as the default action, ESET Smart Security will display a dialog window every time an operation is run. You can choose to **Deny** or **Allow** the operation. If you do not choose an action, an action will be selected based on the pre-defined rules.

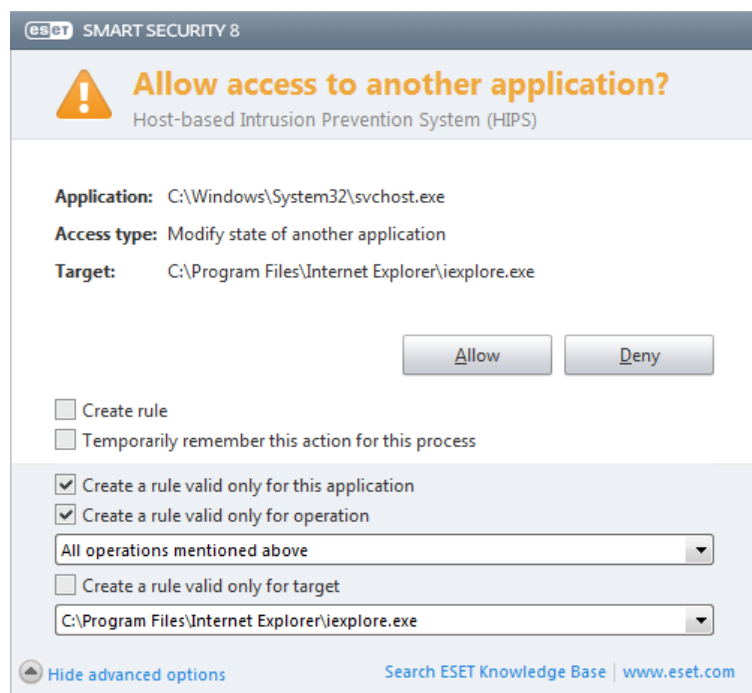

The **Allow access to another application** dialog window allows you to create a rule based on any new action that HIPS detects and then define the conditions under which to allow or deny that action. Click **Show advanced options** to define the exact parameters for your new rule. Rules created this way are considered equal to rules created

manually, so a rule created from a dialog window can be less specific than the rule that triggered that dialog window. This means that after creating such a rule, the same operation can trigger another dialog window if the parameters that your previous rule set do not apply to the situation.

**Temporarily remember this action for this process** causes an action (**Allow / Deny**) to be used until a change of rules or filtering modes, a HIPS module update or a system restart. After any of these actions, temporary rules will be deleted.

#### 4.1.5 Gamer mode

Gamer mode is a feature for users that demand uninterrupted usage of their software, do not wish to be disturbed by pop-up windows and want to minimize CPU usage. Gamer mode can also be used during presentations that cannot be interrupted by antivirus activity. By enabling this feature, all pop-up windows are disabled and the activity of the scheduler will be completely stopped. System protection still runs in the background but does not demand any user interaction.

You can enable or disable Gamer mode in the main program window by clicking **Setup > Computer > Enable** under **Gamer mode**; or you can enable Gamer mode in the Advanced setup tree (F5) by expanding **Computer**, clicking **Gamer mode** and selecting the check box next to **Enable Gamer mode**. Enabling Gamer mode is a potential security risk, so the protection status icon in the taskbar will turn orange and display a warning. You will also see this warning in the main program window where you will see **Gamer mode enabled** in orange.

By selecting **Enable Gamer mode when running applications in full screen automatically**, Gamer mode will start whenever you initiate a full-screen application and will automatically stop after you exit the application. This is especially useful for starting Gamer mode immediately after starting a game, opening a full screen application or starting a presentation.


You can also select **Disable Gamer mode automatically after X minutes** to define the amount of time after which Gamer mode will automatically be disabled (default value is 1 minute).

**NOTE:** If the Personal firewall is in Interactive mode and Gamer mode is enabled, you might have trouble connecting to the Internet. This can be problematic if you start a game that connects to the Internet. Normally, you would be asked to confirm such an action (if no communication rules or exceptions have been defined), but user interaction is disabled in Gamer mode. The solution is to define a communication rule for every application that might be in conflict with this behavior or to use a different [Filtering mode](#) in the Personal firewall. Keep in mind that if Gamer mode is enabled and you go to a webpage or an application that might be a security risk, it may be blocked but you will not see any explanation or warning because user interaction is disabled.

## 4.2 Network

The Personal firewall controls all network traffic to and from the system. This is accomplished by allowing or denying individual network connections based on specified filtering rules. It provides protection against attacks from remote computers and enables blocking of some services. It also provides antivirus protection for HTTP, POP3 and IMAP protocols. This functionality represents a very important element of computer security.

Personal firewall configuration can be found in the **Setup** pane under **Network**. Here, you can adjust the filtering mode, rules and detailed settings. You can also access more detailed settings of the program.

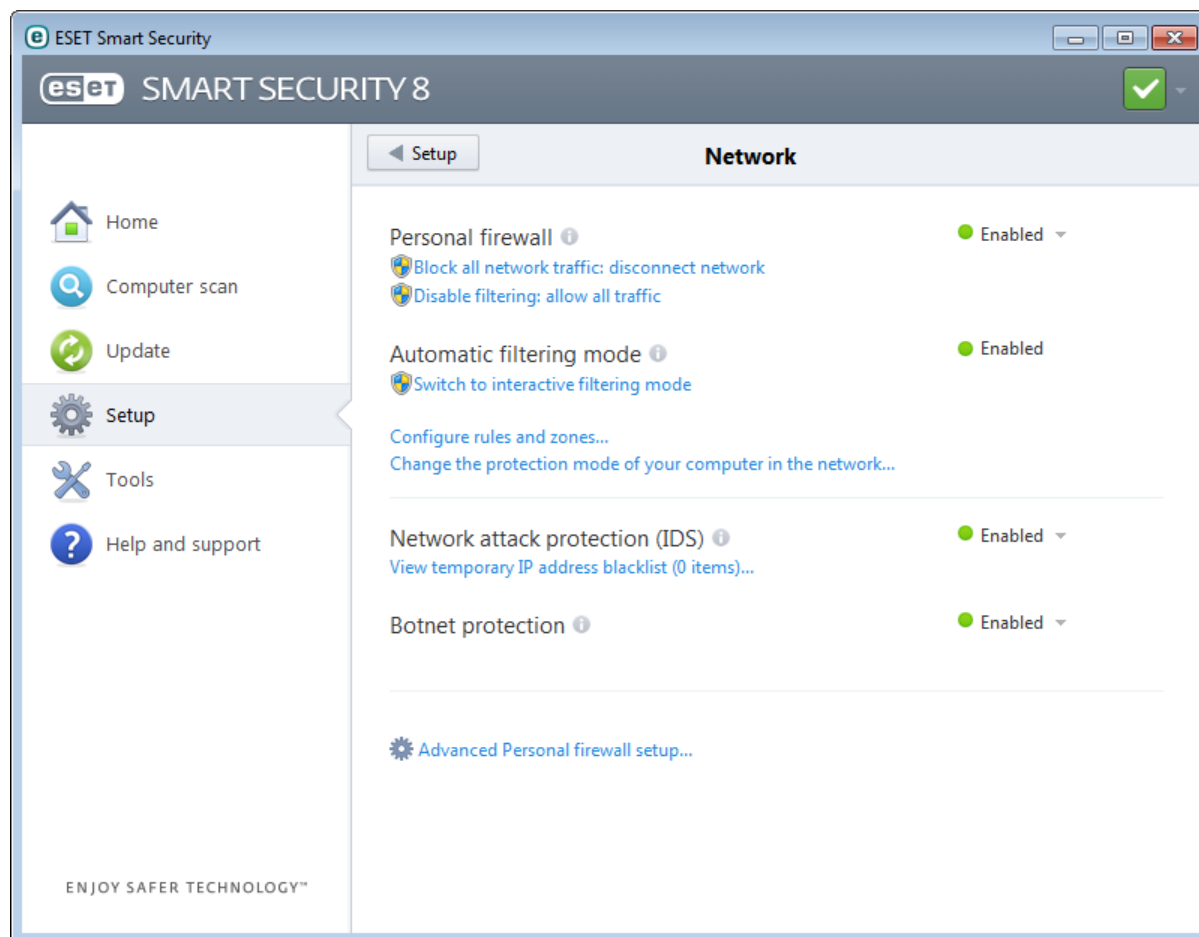

### Personal firewall

**Block all network traffic: disconnect network.** All inbound and outbound communication will be blocked by the Personal firewall. Use this option only if you suspect critical security risks that require the system to be disconnected from the network.

**Disable filtering: allow all traffic** is the opposite of blocking all network traffic. If selected, all Personal firewall filtering options are turned off and all incoming and outgoing connections are permitted. This has the same effect as no firewall being present. While Network traffic filtering is in **Blocking** mode, clicking **Switch to filtering mode** will re-enable the firewall.

**Automatic filtering mode** (when Automatic filtering mode is enabled) – To change the filtering mode, click **Switch to interactive filtering mode**.

**Interactive filtering mode** (when Interactive filtering mode is enabled) – To change the filtering mode, click **Switch to automatic filtering mode (with user-defined rules)**.

**Configure rules and zones...** – Opens the Zone and rule setup window, which allows you to define how the firewall will handle network communication.

**Change the protection mode of your computer in the network...** – This setting defines how accessible your computer is to other computers on the network – select between strict or allowed protection mode.

**Network attack protection (IDS)** – Analyses the content of network traffic and protects from network attacks. Any traffic which is considered harmful will be blocked.


**View temporary IP address blacklist...** – View a list of IP addresses that have been detected as the source of attacks and added to the blacklist to block connection for a certain period of time. For more information, click this option and then press F1.

**Botnet protection** – Quickly and accurately spots malware on the system.

**Advanced Personal firewall setup...** – Allows you to access the advanced firewall setup options.

#### 4.2.1 Filtering modes

Four filtering modes are available for the ESET Smart Security Personal firewall. Filtering modes can be found in **Advanced setup (F5)** by clicking **Network > Personal firewall**. The behavior of the firewall changes based on the selected mode. Filtering modes also influence the level of user interaction required.

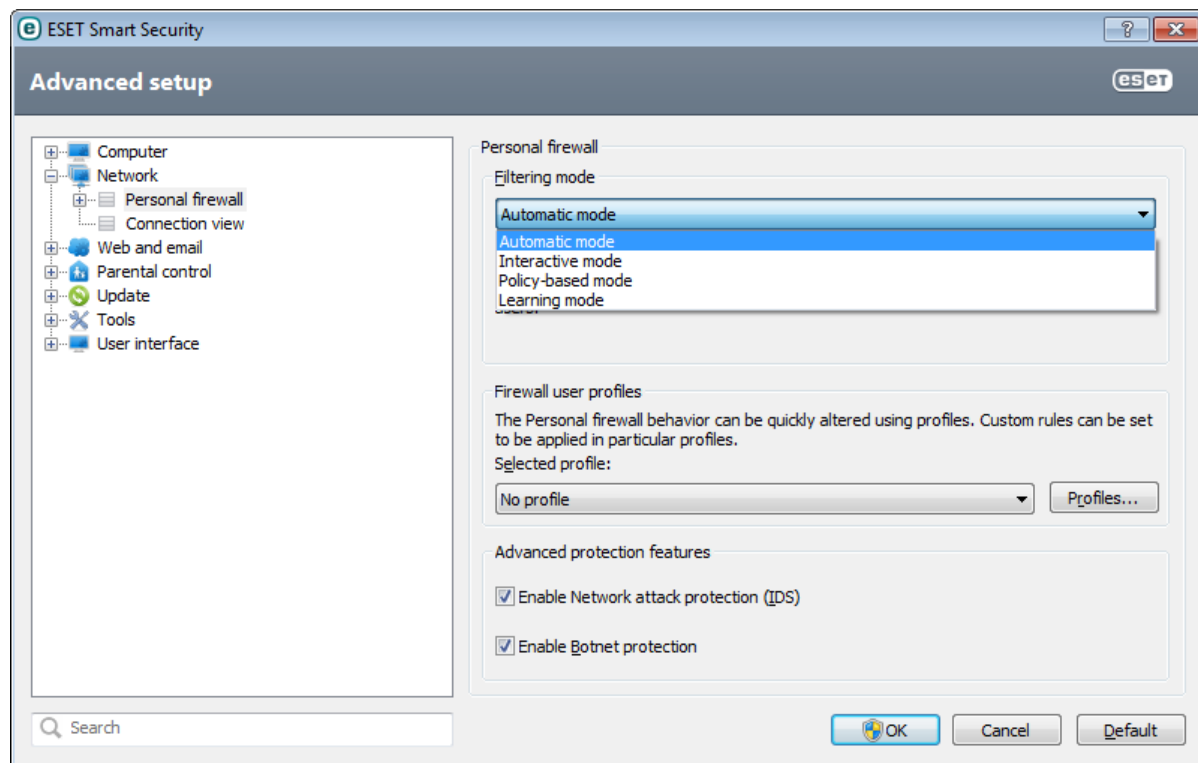

Filtering can be performed in one of four modes:

**Automatic mode** – The default mode. This mode is suitable for users who prefer easy and convenient use of the firewall with no need to define rules. However, you can also add custom, user-defined rules. Automatic mode allows all outbound traffic for the given system and blocks all new connections initiated from the network side.

**Interactive mode** – Allows you to build a custom configuration for your Personal firewall. When a communication is detected and no existing rules apply to that communication, a dialog window reporting an unknown connection will be displayed. The dialog window gives the option of allowing or denying the communication, and the decision to allow or deny can be remembered as a new rule for the Personal firewall. If you choose to create a new rule at this time, all future connections of this type will be allowed or blocked according to the rule.

**Policy-based mode** – Blocks all connections which are not defined by a specific rule that allows them. This mode allows advanced users to define rules that permit only desired and secure connections. All other unspecified connections will be blocked by the Personal firewall.

**Learning mode** – Automatically creates and saves rules; this mode is suitable for initial configuration of the Personal firewall. No user interaction is required, because ESET Smart Security saves rules according to predefined parameters. Learning mode is not secure, and should only be used until all rules for required communications have been created.



## Firewall user profiles

[Profiles](#) are a tool to control the behavior of the ESET Smart Security Personal firewall.

### Advanced protection features

**Enable Network attack protection (IDS)** – Allows you to activate a functionality from IDS and advanced options (Incoming RPC communication over SMB and Intrusion detection settings) independently from Personal firewall.

**Enable Botnet protection** – Selected check box activates this feature in order to protect your computer from this type of attacks. For more information about this type of attack and type of Botnet protection technology, see also topics [Botnet](#) and [Botnet protection](#).

**NOTE:** You can create an IDS exception when Botnet attacks your computer. An exception can be modified in **Advanced setup (F5) > Network > Personal firewall > IDS exceptions**.

#### 4.2.1.1 Learning mode

The Learning mode feature in ESET Smart Security's Personal firewall automatically creates and saves a rule for each communication that has been established in the system. No user interaction is required, because ESET Smart Security saves rules according to the predefined parameters.

This mode is not safe, and is recommended only for initial configuration of the Personal firewall.

Activate Learning mode in **Setup > Network > Personal Firewall > Learning mode** to display Learning mode options. This section includes the following items:

**Warning:** While in Learning mode, the Personal firewall does not filter communication. All outgoing and incoming communications are allowed. In this mode, your computer is not fully protected by the Personal firewall.

**Communication type** – Select individual principles of rule creation for each type of communication. There exist four types of communication:

- **Inbound traffic from the Trusted zone** – An example of an incoming connection within the trusted zone would be a remote computer from within the trusted zone attempting to establish communication with a local application running on your computer.
- **Outbound traffic to the Trusted zone** – A local application attempting to establish a connection to another computer within the local network, or within a network in the trusted zone.
- **Inbound Internet traffic** – A remote computer attempting to communicate with an application running on the computer.
- **Outbound Internet traffic** – A local application attempting to establish a connection to another computer.

**Rule creation policy** – This section allows you to define parameters to be added into newly created rules.

**Add local port** – Includes the local port number of the network communication. For outgoing communications, random numbers are usually generated. For this reason, we recommend enabling this option only for incoming communications.

**Add application** – Includes the name of the local application. This option is suitable for future application-level rules (rules which define communication for an entire application). For example, you can enable communication only for a web browser or email client.

**Add remote port** – Includes the remote port number of the network communication. For example you can allow or deny a specific service associated with a standard port number (HTTP – 80, POP3 – 110, etc.)

**Add remote IP address / Trusted zone** – A remote IP address or zone can be used as a parameter for new rules defining all network connections between the local system and that remote address / zone. This option is suitable if you want to define actions for a certain computer or a group of networked computers.

**Maximum number of different rules for an application** – If an application communicates through different ports to various IP addresses, etc., the firewall in learning mode creates appropriate count of rules for this application. This option allows you to limit the number of rules that can be created for one application. This option is active when **Add remote port** is enabled.

**Notify about learning mode expiration in X days** – Specifies the number of days after which ESET Smart Security will notify the user that Learning mode is still active. This option is intended to prevent the user from operating the Personal firewall in Learning mode for an extended period of time. We recommend switching the Personal firewall to Learning mode only for a short time, while the user initiates typical connections. Network communications which are saved during the Learning mode period can be used as the foundation for a permanent set of rules.

#### 4.2.2 Firewall profiles

Profiles can be used to control the behavior of the ESET Smart Security Personal firewall. When creating or editing a Personal firewall rule, you can assign it to a specific profile or have it apply to every profile. When you select a profile, only the global rules (rules with no profile specified) and the rules that have been assigned to that profile are applied. You can create multiple profiles with different rules assigned to easily alter the Personal firewall behavior.

Click **Profiles...** (see figure in section [Filtering modes](#)) to open the **Firewall profiles** window where you can **Add**, **Edit** or **Remove** profiles. Note that in order to **Edit** or **Remove** a profile, it must not be selected from the **Selected profile** drop-down menu. When adding or editing a profile, you can also define the conditions that trigger it.

When creating a profile, you can select events that will trigger the profile. The following options are available:

- **Do not switch automatically** – The automatic trigger is turned off (the profile must be activated manually).
- **When the automatic profile becomes invalid and no other profile is activated automatically (default profile)** – When the automatic profile becomes invalid (ie. if the computer is connected to an untrusted network – see section [Network authentication](#)) and another profile is not activated in its place (the computer is not connected to another trusted network), the Personal firewall will switch to this profile. Only one profile can use this trigger.
- **If this zone is authenticated** – This profile will be triggered when the specified zone is authenticated (see section [Network authentication](#)).

When the Personal firewall switches to another profile, a notification will appear in the lower right corner by the system clock.

#### 4.2.3 Configuring and using rules

Rules represent a set of conditions used to meaningfully test all network connections and all actions assigned to these conditions. Using Personal firewall rules, you can define the action that is taken when different types of network connections are established. To access the rule filtering setup, navigate to **Advanced setup (F5) > Network > Personal firewall > Rules and zones**.

Click **Setup...** in the **Trusted zone** section to display the Trusted zone setup window. **Do not display dialog with Trusted zone settings...** allows the user to disable the trusted zone setup window each time the presence of a new subnet is detected. The currently specified zone configuration is automatically used.

**NOTE:** If the Personal firewall is set to **Automatic mode**, some settings are not available.

Click [Setup...](#) in the **Zone and rule editor** section to display the **Zone setup** window, where an overview of either rules or zones is displayed (based on the currently selected tab). The window is divided into two sections. The upper section lists all rules in a shortened view. The lower section displays details about the rule currently selected in the upper section. The bottom of the window has **New**, **Edit**, and **Delete (Del)** buttons, which allow you to configure rules.

Connections can be divided into incoming and outgoing connections. Incoming connections are initiated by a remote computer attempting to establish a connection with the local system. Outgoing connections work in the opposite way – the local system contacts a remote computer.

If a new unknown communication is detected, you must carefully consider whether to allow or deny it. Unsolicited, unsecured or unknown connections pose a security risk to the system. If such a connection is established, we recommend that you pay particular attention to the remote computer and the application attempting to connect to your computer. Many infiltrations try to obtain and send private data, or download other malicious applications to host workstations. The Personal firewall allows you to detect and terminate such connections.

**Display information about application** allows you to define how applications will be displayed in the list of rules. The following options are available:


- **Full path** – Full path to the application's executable.
- **Description** – Description of the application.
- **Name** – Name of the application's executable.

Select what type of rules will be displayed in the [Rules setup section](#) using the **Rules to display** list:

- **Only user defined rules** – Displays only those rules created by the user.
- **User and predefined rules** – Displays all user-defined and default pre-defined rules.
- **All rules (including system)** – All rules are displayed.

#### 4.2.3.1 Rules setup

Rules setup allows you to view all rules applied to traffic generated by individual applications within trusted zones and the Internet. By default, rules are added automatically according to user reactions to a new communication. To view more information about an application at the bottom of this window, click the name of the application.

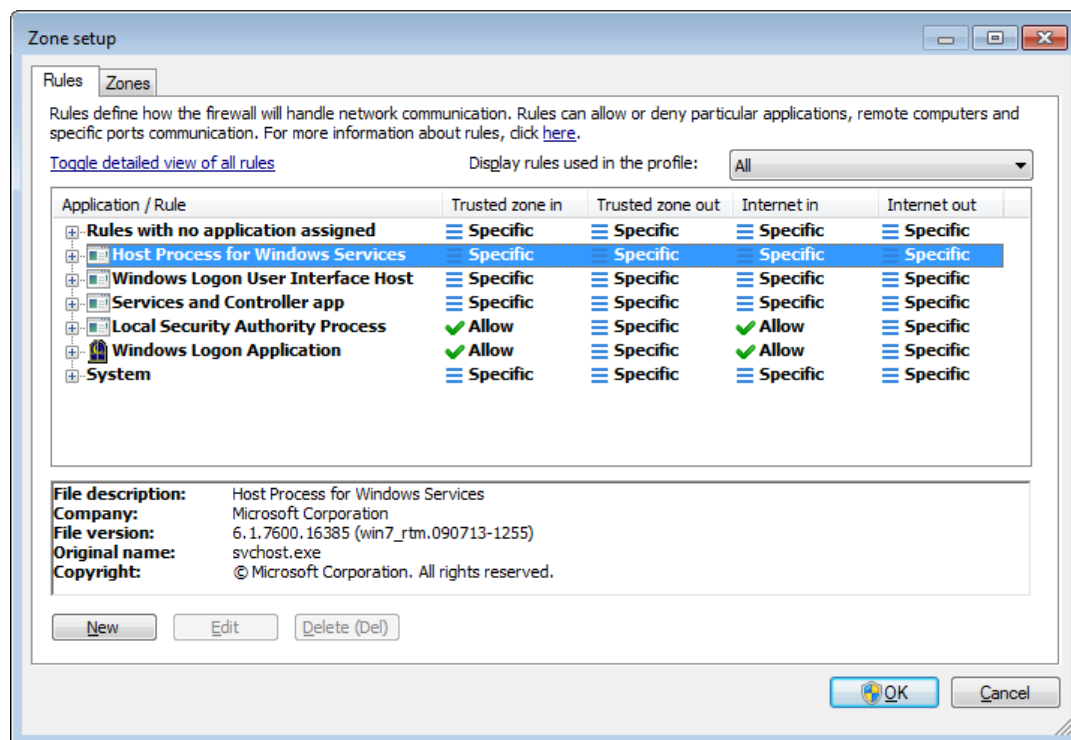

At the beginning of each line corresponding to a rule, there is a button allowing you to expand/collapse (+/-) the information. Click on the name of the application in the **Application / Rule** column to display information about the rule at the bottom of this window. You can use the contextual menu to change the display mode. The contextual menu can be also used for adding, editing and deleting rules.

**Trusted zone in/out** – Actions related to incoming or outgoing communication within the Trusted zone.

**Internet in/out** – Internet connection related actions to incoming or outgoing communication.


For each type (direction) of communication, you can select the following actions:

- **✓ Allow** – To allow communication.
- **? Ask** – You will be prompted to allow or deny each time communication is established.
- **✗ Deny** – To deny communication.
- **≡ Specific** – Cannot be classified with respect to the other actions. For example, if an IP address or port is allowed through the Personal firewall it cannot be classified with certainty, whether incoming or outgoing communications of a related application are allowed.

When installing a new application that accesses the network or when modifying an existing connection (remote side, port number, etc.), a new rule must be created. To edit an existing rule, click the **Rules** tab and then click **Edit**.

### 4.2.3.1.1 Detailed view of all rules

To see the following information in the Zone and rule setup window, click **Toggle detailed view of all rules**.

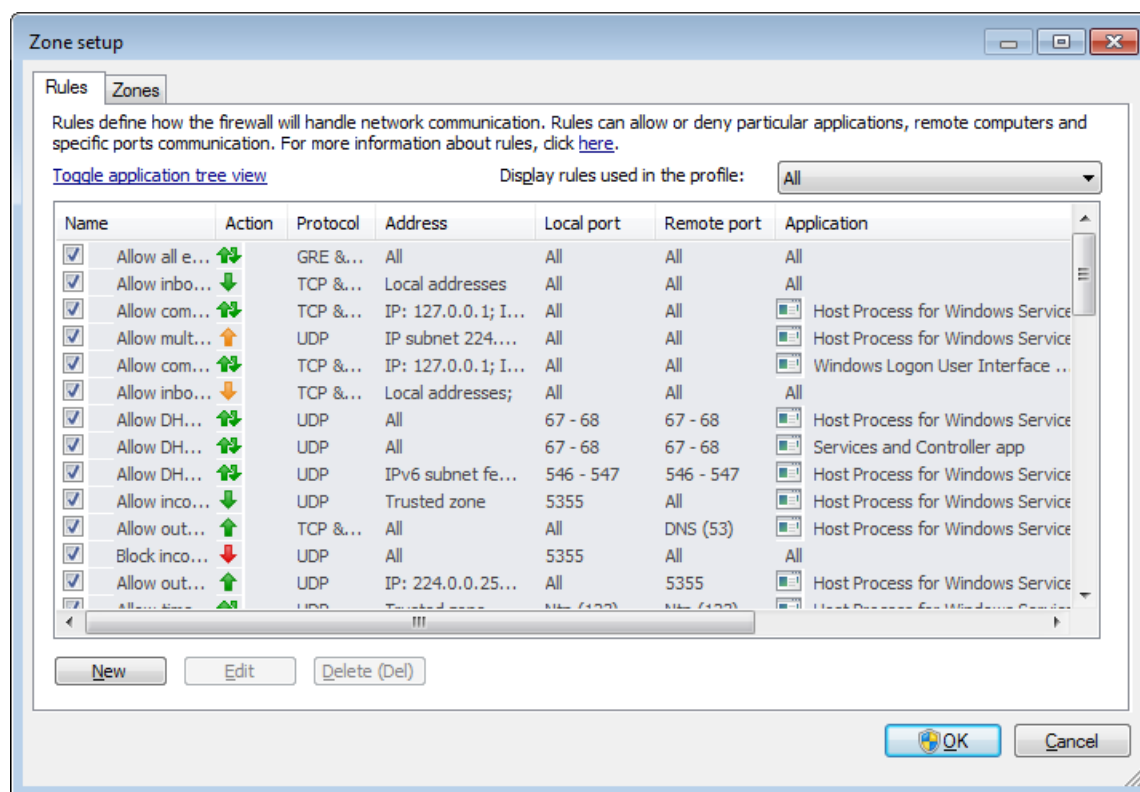

**Name** – Name of rule, check box must be selected to activate the rule.

**Action** – Shows the direction of communication and action.

- ↑ Outgoing connections are allowed
- ↓ Outgoing connections are blocked
- ↕ Incoming connections are allowed
- ↓ Incoming connections are blocked
- ↕ All connections are allowed
- ↕ All connections trigger a dialog window prompting you to select allow or deny
- ↓ All connections are blocked

**Protocol** – Communication protocol.

**Address** – Address of remote computer.

**Local port** – Port of local computer.

**Remote port** – Port of remote computer.

**Application** – Indicates the application to which the rule applies.

**Modified** – Date of the last modification.

**Profile** – Select the profile from **Display rules used in the profile** drop-down menu to display the profile's rules filter.

**Created/Modified** – Name of the user who modified the rule.

**New** – Click to create a new rule.

**Edit** – Click to edit existing rules.

**Delete (Del)** – Click to delete existing rules.

#### 4.2.3.2 Editing rules

Modification is required each time any of the monitored parameters are changed. In this case, the rule cannot fulfill the conditions and the specified action cannot be applied. If parameters have changed, the given connection may be refused, which can result in problems with operation of the application in question. An example is a change of network address or port number for the remote side.

The upper part of the window contains three tabs:

- **General** – Specify a rule name, the direction of the connection, the action, the protocol and the profile to which the rule will apply.
- **Local** – Displays information about the local side of the connection, including the number of the local port or port range and the name of the communicating application.
- **Remote** – This tab contains information about the remote port (port range). It also allows you to define a list of remote IP addresses or zones for a given rule.

**Protocol** represents the transfer protocol used for the rule. Click **Select protocol...** to open the Protocol selection window.

All rules are enabled **For every** profile by default. Alternatively, select a custom firewall profile using the **Profiles...** button.

If you click **Log**, the activity connected with the rule will be recorded in a log. **Notify user** displays a notification when the rule is applied.

At the bottom of all three tabs is a summary of the rule. You will see the same information if you click the rule in the main window (**Tools > Network connections**; right-click the rule and select **Show details** (see chapter [Network connections](#))).

When creating a new rule, you have to enter a name for the rule into the **Name** field. Select the direction to which the rule applies from the **Direction** drop-down menu. Select the action to be executed when a communication meets the rule from the **Action** drop-down menu.

A good example of adding a new rule is allowing your Internet browser to access the network. In this example, the following must be configured:

- In the **General** tab, enable outgoing communication via the TCP and UDP protocol.
- Add the process representing your browser application (for Internet Explorer it is iexplore.exe) in the **Local** tab.
- In the **Remote** tab, enable port number 80 only if you wish to allow standard Internet browsing activities.

#### 4.2.4 Configuring zones

In the **Zone setup** window you can specify the zone name, description, network address list and zone authentication (see also [Zone authentication – Client configuration](#)).

A zone represents a collection of network addresses that create one logical group. Each address in a given group is assigned similar rules defined centrally for the whole group. One example of such a group is the **Trusted zone**. The Trusted zone represents a group of network addresses which are fully trusted and not blocked by the Personal firewall in any way.

These zones can be configured using the **Zones** tab in the **Zone and rule setup** window by clicking the **Edit** button. Enter a **Name** for the zone, a **Description**, and add a remote IP address by clicking the **Add IPv4/IPv6 address** button.

#### 4.2.4.1 Network authentication

For mobile computers, it is recommended that you verify the network credibility of the network that you are connecting to. The Trusted zone is identified by the local IP address of the network adapter. Mobile computers often enter networks with IP addresses that are similar to the trusted network. If the Trusted zone settings are not manually switched to **Public network**, the Personal firewall will continue to use the **Home/work network** mode.

To prevent this type of situation, we recommended using zone authentication.

##### 4.2.4.1.1 Zone authentication - Client configuration

In the **Zone and rule setup** window, click the **Zones** tab and create a new zone using the name of the zone authenticated by the server. Then click **Add IPv4 address** and select the **Subnet** option to add a subnet mask that contains the authentication server.

Click the **Zone authentication** tab. Each zone can be set to authenticate to the server. The zone (its IP address and subnet) will be valid after it is successfully authenticated – for example actions such as switching to a firewall profile and adding an address/subnet of the zone to the Trusted Zone will be performed **only** after successful authentication.

Enable **IP addresses/subnets in the zone will become valid...** to make a zone that will become invalid if authentication is unsuccessful. To select a Personal firewall profile to be activated after a successful zone authentication, click **Profiles...**

If you select **Add addresses/subnets of the zone to the Trusted Zone**, the addresses/subnets of the zone will be added to the Trusted zone after successful authentication (recommended). If authentication is unsuccessful, the addresses will not be added to the Trusted zone. If **Switch to profile with the same name automatically (a new profile will be created)** is selected, a new profile will be created after successful authentication. Click **Profiles...** to open the [Firewall profiles](#) window.

Authentication by local network configuration

Authentication will succeed if all selected conditions for the active connection are met. Both IPv4 and IPv6 addresses are allowed. Multiple addresses are separated with a semicolon.

Adapter configuration to fulfill

Local Area Connection Populate with selected connection settings

General adapter settings

☒ When the current DNS suffix is (example: company.com):  
hq.eset.com

☒ When DNS server's IP address is:  
10.1.96.106; 10.1.96.107

☒ When DHCP server's IP address is:  
10.1.81.21

☒ When WINS server's IP address is:

☒ When the local IP address is:  
10.1.193.63; fe80::d20:3796:ddab:7f67

☒ When gateway's IP address is:  
10.1.193.1

☒ Network adapter type:

☐ Virtual adapter (VPN, tunnel, ...)

☒ Physical network adapter

Wireless connection settings

☐ When wireless SSID is:

☐ When connection profile is:

☐ When connection is secured

General settings for all adapters (applicable for multiple network adapters)

☐ Only one connection is active

☐ No wireless connection is established

☐ No unsecured wireless connection is established

OK Cancel

There are two authentication types available:


##### 1) Using ESET authentication server

Zone authentication searches for a specific server in the network and uses asymmetric encryption (RSA) to

authenticate the server. The authentication process is repeated for each network your computer connects to. Click **Setup...** and specify a server name, server listening port and a public key that corresponds to the private server key (see section [Zone authentication – Server configuration](#)). The server name can be entered in the form of an IP address, DNS or NetBios name. The server name can be followed by a path specifying the location of the key on the server (e.g., *server\_name/directory1/directory2/authentication*). Enter multiple servers, separated by semicolons, to serve as alternate servers if the first one is unavailable.

The public key can be a file of one of the following types:

- PEM encrypted public key (.pem)  
This key can be generated using the ESET Authentication Server (see section [Zone authentication – Server configuration](#)).
- Encrypted public key
- Public key certificate (.crt)

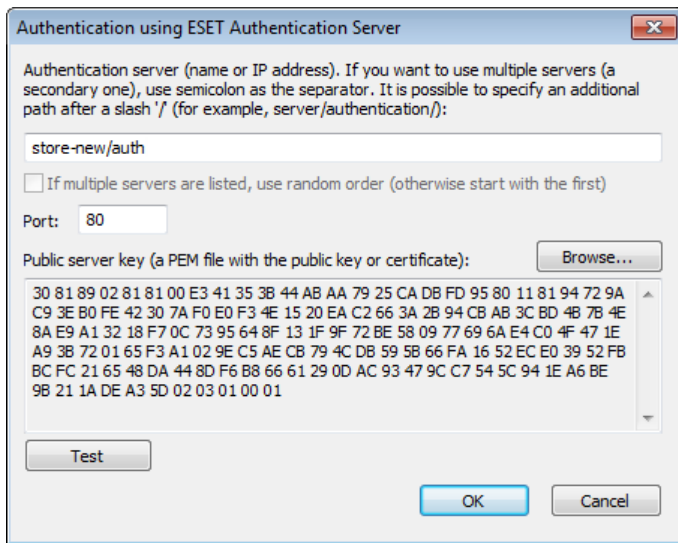

To test your settings, click **Test**. If authentication is successful, a *Server authentication successful* notification will appear. If authentication is not configured properly, one of the following error messages will appear:

*Server authentication failed. Maximum time for authentication elapsed.*

The authentication server is inaccessible. Check the server name/IP address and/or verify the Personal firewall settings of the client as well as the server section.

*An error has occurred while communicating with the server.*

The authentication server is not running. Start the authentication server service (see section [Zone authentication – Server configuration](#)).

*The name of the authentication zone does not match the server zone.*

The configured zone name does not correspond with the authentication server zone. Review both zones and ensure their names are identical.

*Server authentication failed. Server address not found in the list of addresses for the given zone.*


The IP address of the computer running the authentication server is outside the defined IP address range of the current zone configuration.

*Server authentication failed. Probably an invalid public key was entered.*

Verify that the public key specified corresponds to the private server key. Also verify that the public key file is not corrupted.

## 2) By local network configuration

Authentication is performed based on the local network adapter parameters. A zone is authenticated if all selected parameters for the active connection are valid.

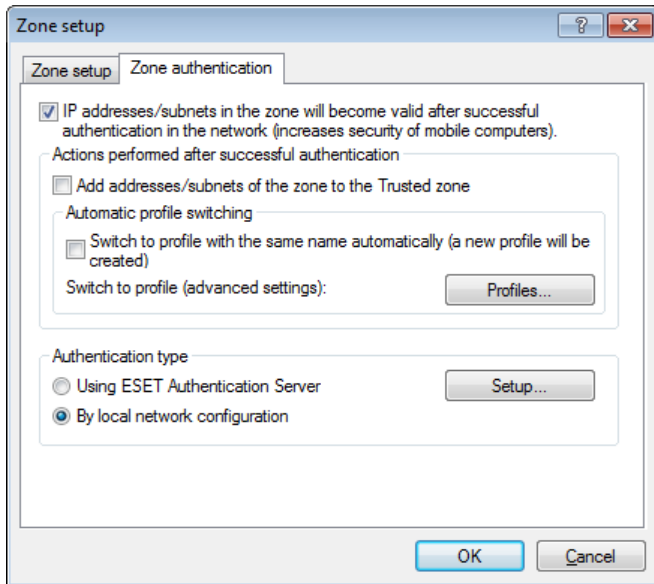

#### 4.2.4.1.2 Zone authentication - Server configuration

The authentication process can be executed by any computer/server connected to the network that is to be authenticated. The ESET Authentication Server application needs to be installed on a computer/server that is always accessible for authentication whenever a client attempts to connect to the network. The installation file for the ESET Authentication Server application is available for download on ESET's website.

After you install the ESET Authentication Server application, a dialog window will appear (you can access the application by clicking **Start > Programs > ESET > ESET Authentication Server**).


To configure the authentication server, enter the authentication zone name, the server listening port (default is 80) as well as the location to store the public and private key pair. Next, generate the public and private key that will be used in the authentication process. The private key will remain on the server while the public key needs to be imported on the client side in the Zone authentication section when setting up a zone in the firewall setup.



## 4.2.5 Establishing connection - detection

The Personal firewall detects each newly-created network connection. The active firewall mode determines which actions are performed for the new rule. If **Automatic mode** or **Policy-based mode** is activated, the Personal firewall will perform predefined actions with no user interaction.

Interactive mode displays an informational window that reports detection of a new network connection, supplemented with detailed information about the connection. You can opt to allow the connection or refuse (block) it. If you repeatedly allow the same connection in the dialog window, we recommend that you create a new rule for the connection. To do this, select **Remember action (create rule)** and save the action as a new rule for the Personal firewall. If the firewall recognizes the same connection in the future, it will apply the existing rule without requiring user interaction.

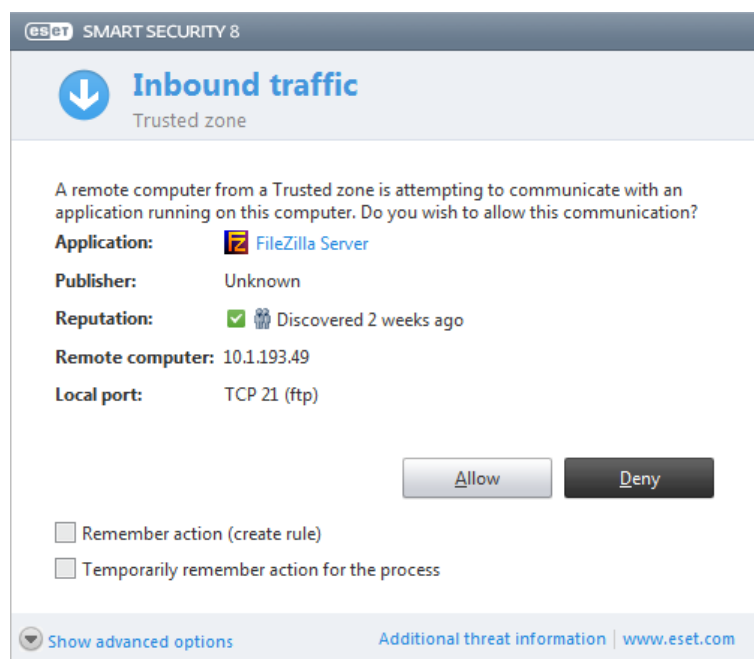

Please be careful when creating new rules and only allow connections that you know are secure. If all connections are allowed, then the Personal firewall fails to accomplish its purpose. These are the important parameters for connections:

- **Remote side** – Only allow connections to trusted and known addresses.
- **Local application** – It is not advisable to allow connections for unknown applications and processes.
- **Port number** – Communication on common ports (e.g., web traffic – port number 80) should be allowed under normal circumstances.

In order to proliferate, computer infiltrations often use the Internet and hidden connections to help them infect remote systems. If rules are configured correctly, a Personal firewall becomes a useful tool for protection against a variety of malicious code attacks.

### 4.2.6 Logging

The ESET Smart Security Personal firewall saves all important events in a log file, which can be viewed directly from the main menu. Click **Tools > Log files** and then select **Personal firewall** from the **Log** drop-down menu.

The log files can be used to detect errors and reveal intrusions into your system. ESET Personal firewall logs contain the following data:

- Date and time of event
- Name of event
- Source
- Target network address
- Network communication protocol
- Rule applied, or name of worm, if identified
- Application involved
- User

A thorough analysis of this data can help detect attempts to compromise system security. Many other factors indicate potential security risks and allow you to minimize their impact: frequent connections from unknown locations, multiple attempts to establish connections, unknown applications communicating or unusual port numbers used.

### 4.2.7 System integration


The ESET Smart Security Personal firewall can operate at several levels:

- **All features active** – The Personal firewall is fully integrated and its components are active by default. If your computer is connected to a large network, or to the internet, we recommend that you leave this option enabled. This is the most secure Personal firewall setting and offers a high level of protection.
- **Personal firewall is inactive** – The Personal firewall is integrated in the system and mediates network communication but does not check for threats.
- **Only scan application protocols** – Only components of the Personal firewall that provide scanning of application protocols (HTTP, POP3, IMAP and their secured versions) are active. If the application protocols are not scanned, protection is carried out at the level of real-time file system protection and on-demand computer scan.
- **Personal firewall is completely disabled** – Select this option to completely disengage the Personal firewall. No scanning is performed. This can be useful when testing – if an application is blocked, you can check to see if it is blocked by the firewall. This is the least secure option; use caution when disabling the firewall completely.

**Postpone Personal firewall module update until a computer restart** – Personal firewall updates will only be downloaded and installed following a computer restart.

## 4.3 Web and email

Web and email configuration can be found in the **Setup** pane by clicking on **Web and email**. From here you can access more detailed settings of the program.

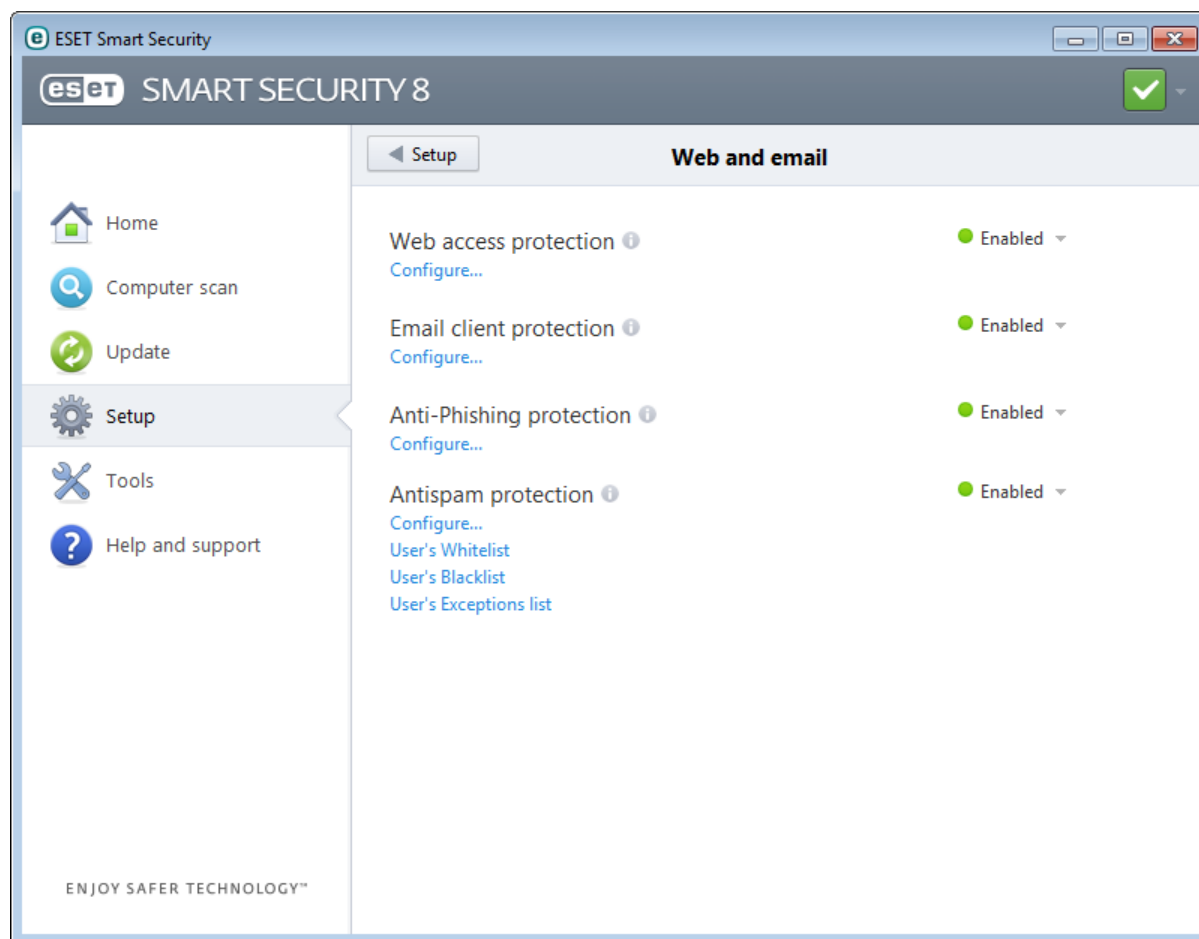

Internet connectivity is a standard feature for personal computers. Unfortunately, the Internet has become the primary medium for distributing malicious code. For this reason it is essential that you carefully consider your **Web access protection** settings.

Click **Configure** to open web/email/anti-phishing/antispam protection settings in Advanced setup.

**Email client protection** provides control of email communications received through POP3 and IMAP protocol. Using the plug-in program for your email client, ESET Smart Security provides control of all communications to and from your email client (POP3, MAPI, IMAP, HTTP).

**Anti-Phishing protection** allows you to block web pages known to distribute phishing content. We strongly recommend that you leave Anti-Phishing enabled.

**Antispam protection** filters unsolicited email messages.

- **User's Whitelist** – Opens a dialog window where you can add, edit or delete email addresses that are considered safe. Email messages received from addresses listed in the [Whitelist](#) will not be scanned for spam.
- **User's Blacklist** – Opens a dialog window where you can add, edit or delete email addresses that are considered unsafe. Email messages received from addresses listed in the [Blacklist](#) will be assessed as spam.
- **User's Exceptions list** – Opens a dialog window where you can add, edit or delete email addresses that may be spoofed and used for sending spam. Email messages received from addresses listed in the Exception list will always be scanned for spam. By default, the Exception list contains all email addresses from existing email client accounts.

You can disable the web/email/anti-phishing/antispam protection module temporarily by clicking **Enabled**.

### 4.3.1 Email client protection

Email protection provides control of email communication received through the POP3 and IMAP protocols. Using the plug-in for Microsoft Outlook and other e-mail clients, ESET Smart Security provides control of all communications from the email client (POP3, MAPI, IMAP, HTTP). When examining incoming messages, the program uses all the advanced scanning methods included in the ThreatSense scanning engine. This means that detection of malicious programs takes place even before being matched against the virus signature database. Scanning of POP3 and IMAP protocol communications is independent of the email client used.

The options for this functionality are available through **Advanced setup > Web and email > Email client protection**.

**ThreatSense engine parameter setup** – The advanced virus scanner setup enables you to configure scan targets, detection methods, etc. Click **Setup...** to display the detailed virus scanner setup window.

After an email has been checked, a notification with the scan result can be appended to the message. You can elect to **Append tag messages to received and read mail** or **Append tag messages to sent mail**. Be aware that on rare occasions tag messages may be omitted in problematic HTML messages or forged by some viruses. The tag messages can be added to received and read email, sent email or both. The available options are:

- **Never** – No tag messages will be added at all.
- **To infected email only** – Only messages containing malicious software will be marked as checked (default).
- **To all scanned email** – The program will append messages to all scanned email.

**Append note to the subject of received and read/sent infected email** – Select this check box if you want email protection to include a virus warning in the subject of an infected email. This feature allows for simple, subject-based filtering of infected emails (if supported by your email program). It also increases the level of credibility for the recipient and if an infiltration is detected, provides valuable information about the threat level of a given email or sender.

**Template added to the subject of infected email** – Edit this template if you wish to modify the subject prefix format of an infected email. This function will replace the message subject "Hello" with a given prefix value "[virus]" to the following format: "[virus] Hello". The variable %VIRUSNAME% represents the detected threat.

#### 4.3.1.1 Integration with email clients

Integration of ESET Smart Security with email clients increases the level of active protection against malicious code in email messages. If your email client is supported, integration can be enabled in ESET Smart Security. When integration is activated, the ESET Smart Security toolbar is inserted directly into the email client, allowing for more efficient email protection. Integration settings are available through **Setup > Enter advanced setup... > Web and email > Email client protection > Email client integration**.

Email clients that are currently supported include Microsoft Outlook, Outlook Express, Windows Mail, Windows Live Mail. For a complete list of supported email clients and their versions, refer to the following [ESET Knowledgebase article](#).

Select the check box next to **Disable checking upon inbox content change** if you are experiencing a system slowdown when working with your email client. This can occur when retrieving email from the Kerio Outlook Connector Store.

Even if integration is not enabled, email communication is still protected by the email client protection module (POP3, IMAP).

#### 4.3.1.1.1 Email client protection configuration

The Email client protection module supports the following email clients: Microsoft Outlook, Outlook Express, Windows Mail, Windows Live Mail. Email protection works as a plug-in for these programs. The main advantage of the plug-in is that it is independent of the protocol used. When the email client receives an encrypted message, it is decrypted and sent to the virus scanner.

##### Email to scan

**Received email** – Toggles checking of received messages.

**Sent email** – Toggles checking of sent messages.

**Read email** – Toggles checking of read messages.

##### Action to be performed on infected email

**No action** – If enabled, the program will identify infected attachments, but will leave emails without taking any action.

**Delete email** – The program will notify the user about infiltration(s) and delete the message.

**Move email to the Deleted items folder** – Infected emails will be moved automatically to the **Deleted items** folder.

**Move email to folder** – Specify the custom folder where you want to move infected emails when detected.

##### Other

**Repeat scan after update** – Toggles rescanning after a virus signature database update.


**Accept scan results from other modules** – If this is selected, the email protection module accepts scan results of other protection modules.

#### 4.3.1.2 IMAP, IMAPS scanner

The Internet Message Access Protocol (IMAP) is another Internet protocol for email retrieval. IMAP has some advantages over POP3, for example, multiple clients can simultaneously connect to the same mailbox and maintain message state information such as whether or not the message has been read, replied to or deleted. ESET Smart Security provides protection for this protocol regardless of the email client used.

The protection module providing this control is automatically initiated at system startup and is then active in memory. IMAP protocol control is performed automatically without the need to reconfigure the email client. By default, all communication on port 143 is scanned, but other communication ports can be added if necessary. Multiple port numbers must be delimited by a comma.

Encrypted communication will be not scanned. To enable the scanning of encrypted communication and view the scanner setup, navigate to [SSL protocol checking](#) in Advanced setup section, click **Web and email > Protocol filtering > SSL** and enable the **Always scan SSL protocol** option.

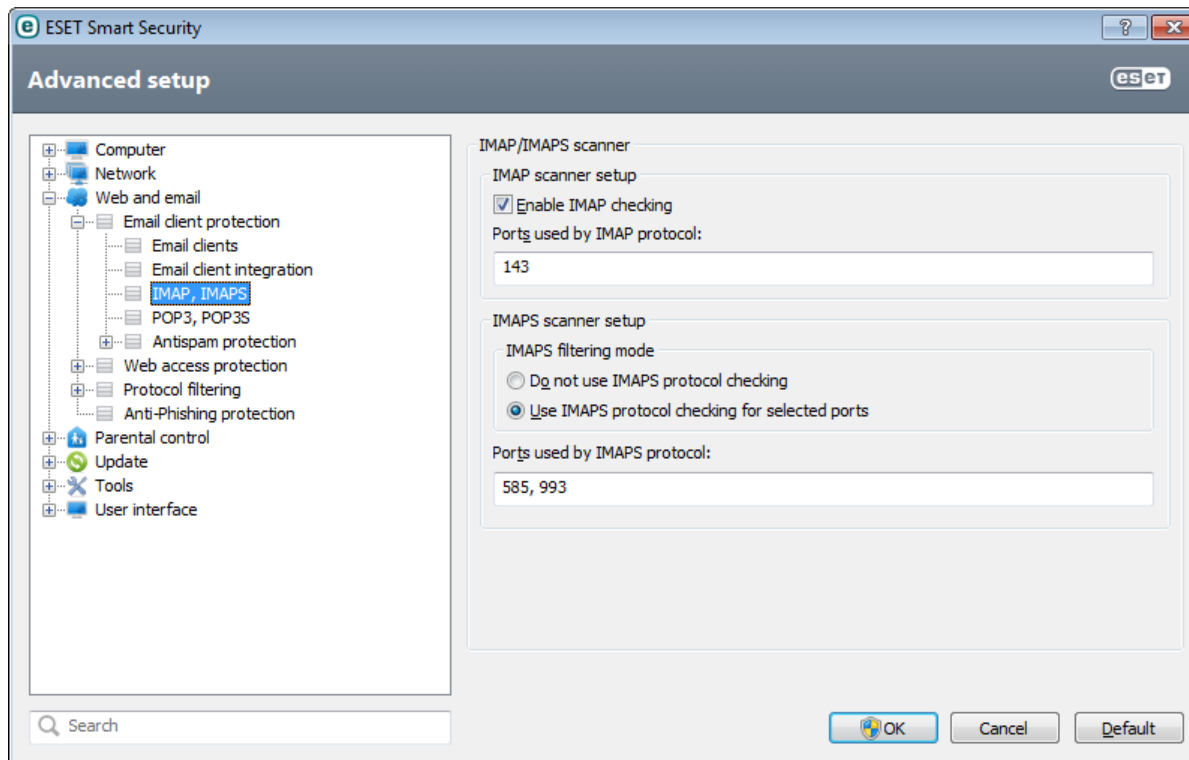

#### 4.3.1.3 POP3, POP3S filter

The POP3 protocol is the most widespread protocol used to receive email communication in an email client application. ESET Smart Security provides protection for this protocol regardless of the email client used.

The protection module providing this control is automatically initiated at system startup and is then active in memory. For the module to work correctly, please make sure it is enabled – POP3 protocol checking is performed automatically without requiring re-configuration of the email client. By default, all communication on port 110 is scanned, but other communication ports can be added if necessary. Multiple port numbers must be delimited by a comma.

Encrypted communication will be not scanned. To enable the scanning of encrypted communication and view the scanner setup, navigate to [SSL protocol checking](#) in Advanced setup section, click **Web and email > Protocol filtering > SSL** and enable the **Always scan SSL protocol** option.

In this section, you can configure POP3 and POP3S protocol checking.

**Enable POP3 protocol checking** – If enabled, all traffic through POP3 is monitored for malicious software.

**Ports used by POP3 protocol** – A list of ports used by the POP3 protocol (110 by default).

ESET Smart Security also supports POP3S protocol checking. This type of communication uses an encrypted channel to transfer information between server and client. ESET Smart Security checks communications utilizing the SSL (Secure Socket Layer), and TLS (Transport Layer Security) encryption methods.


**Do not use POP3S checking** – Encrypted communication will not be checked.

**Use POP3S protocol checking for selected ports** – Check this option to enable POP3S checking only for ports defined in **Ports used by POP3S protocol**.

**Ports used by POP3S protocol** – A list of POP3S ports to check (995 by default).

#### 4.3.1.4 Antispam protection

Unsolicited email, called spam, ranks among the greatest problems of electronic communication. Spam represents up to 80 percent of all email communication. Antispam protection serves to protect against this problem. Combining several email security principles, the Antispam module provides superior filtering to keep your inbox clean.

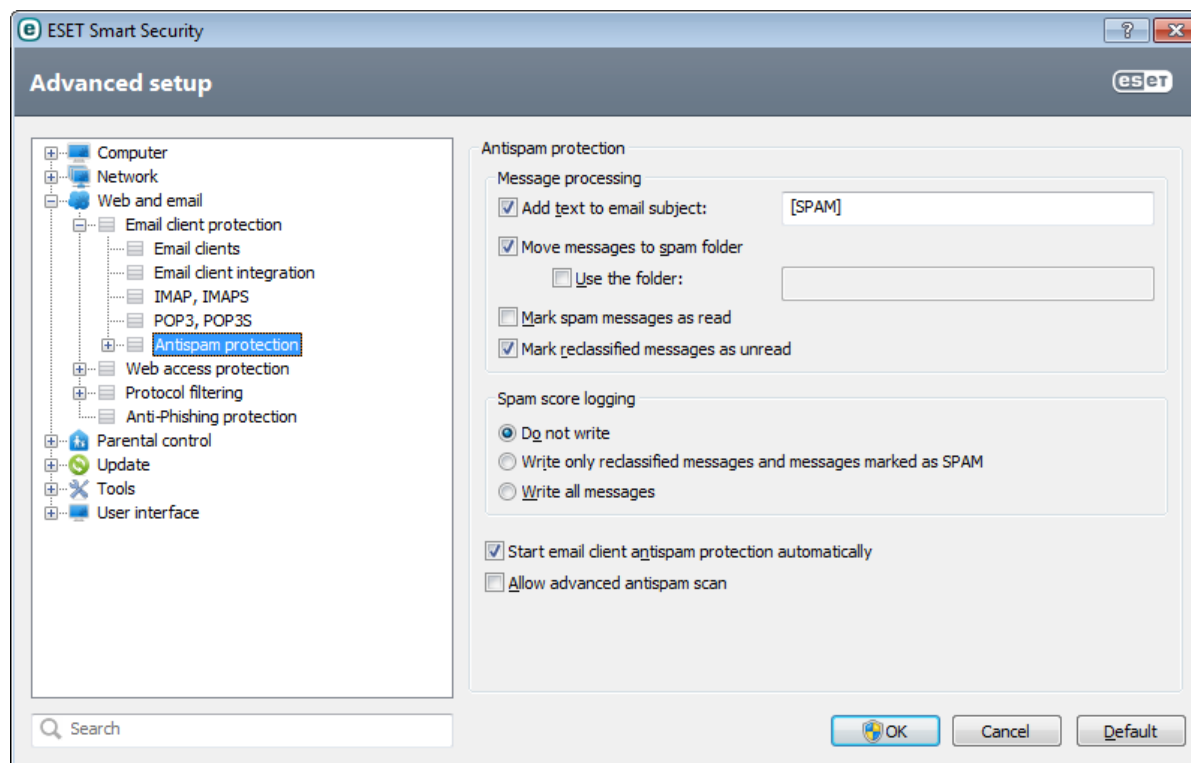

One important principle for spam detection is the ability to recognize unsolicited email based on predefined trusted addresses (whitelist) and spam addresses (blacklist). All addresses from your contact list are automatically added to the whitelist, as well as all other addresses you mark as safe.

The primary method used to detect spam is the scanning of email message properties. Received messages are scanned for basic Antispam criteria (message definitions, statistical heuristics, recognizing algorithms and other unique methods) and the resulting index value determines whether a message is spam or not.

Antispam protection in ESET Smart Security allows you to set different parameters to work with mailing lists. Options are as follows:

##### Message processing

**Add text to email subject** – Enables you to add a custom prefix string to the subject line of messages that have been classified as spam. The default is "[SPAM]".

**Move messages to spam folder** – When enabled, spam messages will be moved to the default junk email folder.

**Use the folder** – This option moves spam to a user-defined folder.

**Mark spam messages as read** – Select this to automatically mark spam as read. It will help you to focus your attention on "clean" messages.

**Mark reclassified messages as unread** – Messages originally classified as spam, but later marked as "clean" will be displayed as unread.

## Spam score logging

The ESET Smart Security Antispam engine assigns a spam score to every scanned message. The message will be recorded in the [antispam log](#) (**ESET Smart Security > Tools > Log files > Antispam protection**).

- **Do not write** – The **Score** cell in the Antispam protection log will be empty.
- **Write only reclassified messages and messages marked as SPAM** – Select this if you want to record a spam score for messages marked as SPAM.
- **Write all messages** – All messages will be recorded to the log with a spam score.

**Start email client antispam protection automatically** – When enabled, antispam protection will be activated automatically on system startup.

**Allow advanced antispam control** – Additional antispam databases will be downloaded, increasing antispam capabilities and producing better results.

ESET Smart Security supports Antispam protection for Microsoft Outlook, Outlook Express, Windows Mail, Windows Live Mail.

### 4.3.1.4.1 Adding addresses to whitelist and blacklist

Email addresses belonging to people you communicate with frequently can be added to the whitelist to ensure that no message originating from a whitelist address is ever classified as spam. Known spam addresses can be added to the blacklist and always be classified as spam. To add a new address to the whitelist or blacklist, right-click the email and select **ESET Smart Security > Add to Whitelist** or **Add to Blacklist**, or click the **Trusted address** or **Spam address** button in the ESET Smart Security Antispam toolbar in your email client.

Similarly, the same process applies to spam addresses. If an email address is listed on the blacklist, each email message which arrives from that address is classified as spam.

### 4.3.1.4.2 Marking messages as spam

Any message viewed in your email client can be marked as spam. To do so, right-click the message and click **ESET Smart Security > Reclassify selected messages as spam**, or click **Spam address** in the ESET Smart Security Antispam toolbar located in the upper section of your email client.


Reclassified messages are automatically moved to the SPAM folder, but the sender's email address is not added to the Blacklist. Similarly, messages can be classified as “not spam”. If messages from the **Junk E-mail** folder are classified as not spam, they are moved to their original folder. Marking a message as not spam does not automatically add the sender's address to the Whitelist.



### 4.3.2 Web access protection

Internet connectivity is a standard feature in a personal computer. Unfortunately, it has also become the main medium for transferring malicious code. Web access protection works by monitoring communication between web browsers and remote servers, and complies with HTTP (Hypertext Transfer Protocol) and HTTPS (encrypted communication) rules.

We strongly recommend that Web access protection is enabled. This option can be accessed from the main window of ESET Smart Security by navigating to **Setup > Web and email > Web access protection**. Access to known web pages with malicious content is always blocked.

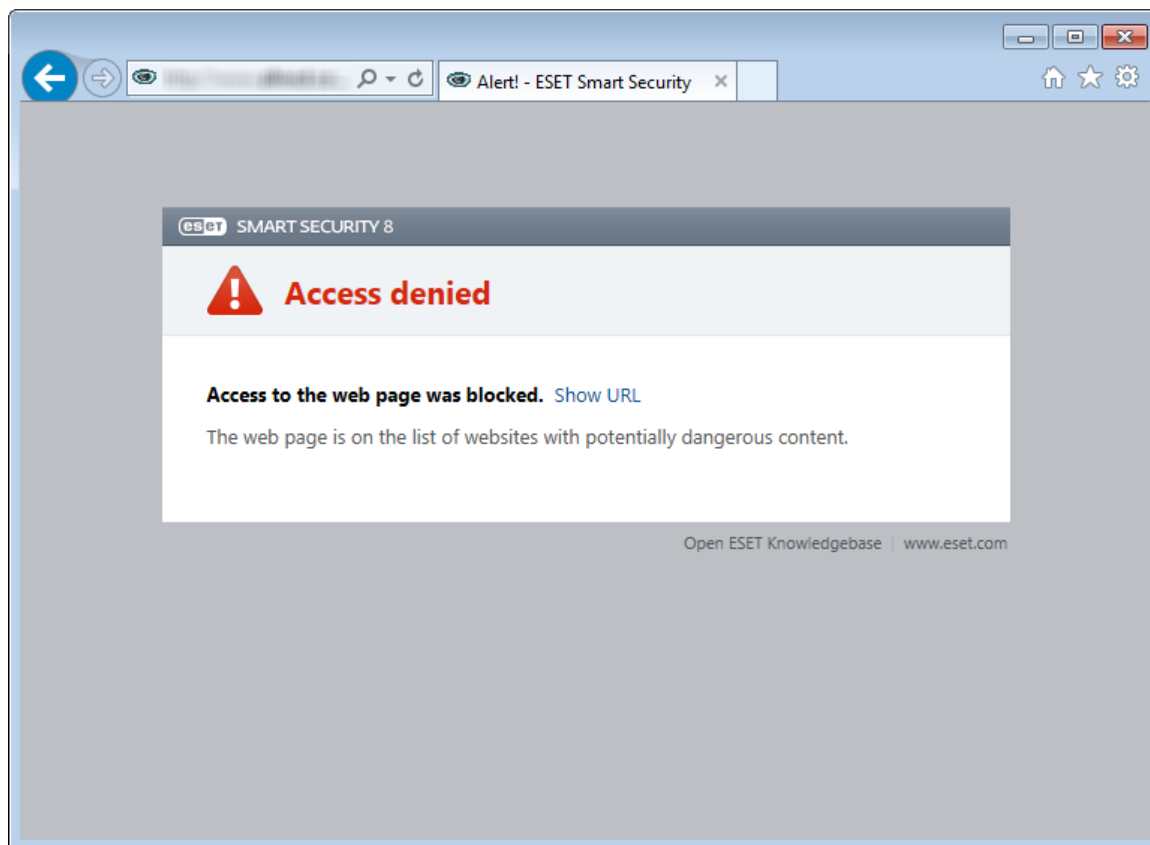

#### 4.3.2.1 HTTP, HTTPS

By default, ESET Smart Security is configured to use the standards of most Internet browsers. However, the HTTP scanner setup options can be modified in **Advanced setup (F5) > Web and email > Web access protection > HTTP, HTTPS**. In the main **HTTP/HTTPS scanner** window, you can select or deselect **Enable HTTP checking**. You can also define the port numbers used for HTTP communication. By default, the port numbers 80 (HTTP), 8080 and 3128 (for Proxy server) are predefined.

ESET Smart Security supports HTTPS protocol checking. HTTPS communication uses an encrypted channel to transfer information between server and client. ESET Smart Security checks communications utilizing the SSL (Secure Socket Layer), and TLS (Transport Layer Security) encryption methods. HTTPS checking can be performed in the following modes:

**Do not use HTTPS protocol checking** – Encrypted communication will not be checked.

**Use HTTPS protocol checking for selected ports** – The program will only check those applications that are specified in the [Web and email clients](#) section and that use ports defined in **Ports used by HTTPS protocol**. Port 443 is set by default.


Encrypted communication will be not scanned. To enable the scanning of encrypted communication and view the scanner setup, navigate to [SSL protocol checking](#) in Advanced setup section, click **Web and email > Protocol filtering > SSL** and enable the **Always scan SSL protocol** option.

### 4.3.2.2 URL address management

The URL address management section enables you to specify HTTP addresses to block, allow or exclude from checking. **Add**, **Edit**, **Remove** and **Export** are used to manage the lists of addresses. Websites in the list of blocked addresses will not be accessible. Websites in the list of excluded addresses are accessed without being scanned for malicious code. If you select **Allow access only to URL addresses in the list of allowed addresses**, only addresses present in the list of allowed addresses will be accessible, while all other HTTP addresses will be blocked.

If you add a URL address to the **List of addresses excluded from filtering**, the address will be excluded from scanning. You can also allow or block certain addresses by adding them to the **List of allowed addresses** or **List of blocked addresses**. Click **Lists...**, to open the **HTTP address/mask lists** window where you can **Add** or **Remove** lists of addresses. In order to add an HTTPS URL addresses to the list, **Always scan [SSL protocol](#)** must be selected.

In all lists, the special symbols \* (asterisk) and ? (question mark) can be used. The asterisk substitutes any character string, and the question mark substitutes any symbol. Particular care should be taken when specifying excluded addresses, because the list should only contain trusted and safe addresses. Similarly, it is necessary to ensure that the symbols \* and ? are used correctly in this list. See [Add HTTP address / domain mask](#) for how a whole domain including all subdomains can be matched safely. To activate a list, select the **List active** option. If you want to be notified when entering an address from the current list, select **Notify when applying address from the list**.

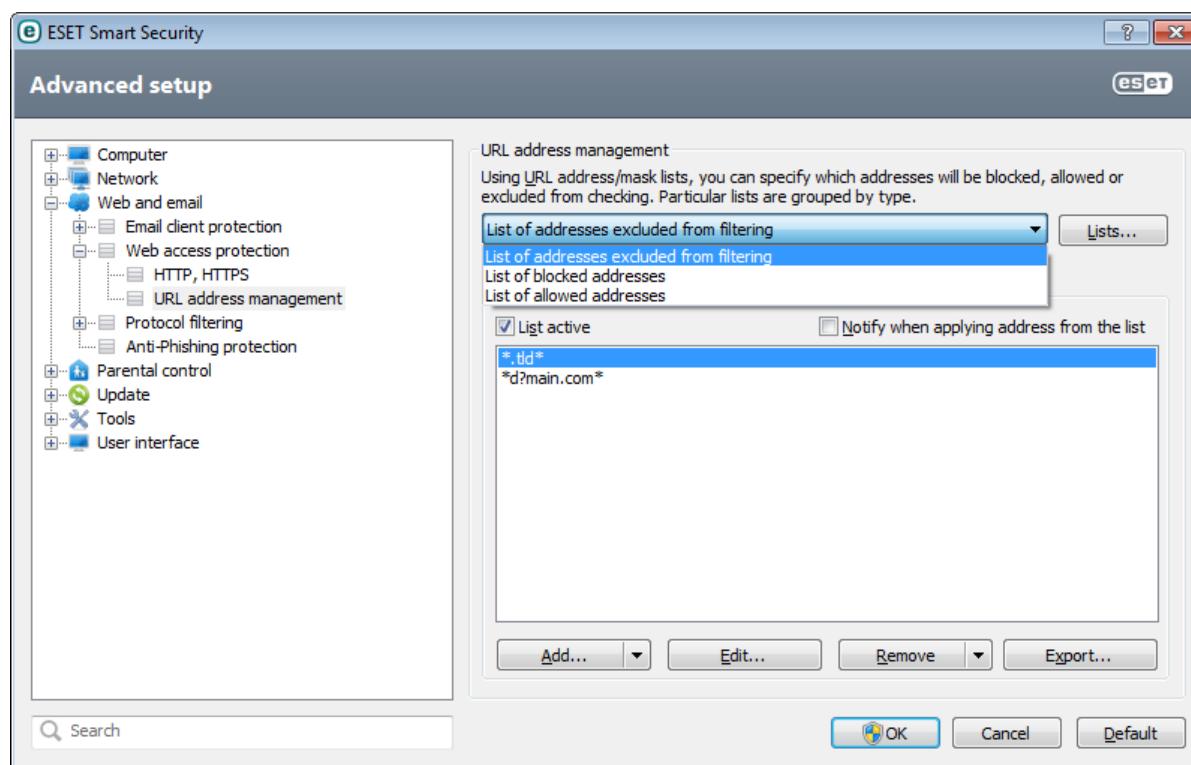

**Add.../From file** – Allows you to add an address to the list, either manually (click **Add**), or from a simple text file (click **From file**). The **From file** option allows you to add multiple URL addresses/masks saved in a text file.

**Edit...** – Manually edit addresses – for example by adding a mask ("\*" and "?").

**Remove/Remove all** – Click **Remove** to delete the selected address from the list. To delete all addresses, select **Remove all**.

**Export...** – Save addresses from the current list to a simple text file.

### 4.3.3 Protocol filtering

Antivirus protection for the application protocols is provided by the ThreatSense scanning engine, which seamlessly integrates all advanced malware scanning techniques. The control works automatically, regardless of the Internet browser or email client used. For encrypted (SSL) communication see **Protocol filtering > SSL**.

**Enable application protocol content filtering** – If enabled, all HTTP(S), POP3(S) and IMAP(S) traffic will be checked by the antivirus scanner.

**NOTE:** Starting with Windows Vista Service Pack 1, Windows 7 and Windows Server 2008, the new Windows Filtering Platform (WFP) architecture is used to check network communication. Since the WFP technology uses special monitoring techniques, the following options are not available:

- **HTTP, POP3 and IMAP ports** – Limits routing the traffic to the internal proxy server only for the corresponding ports.
- **Applications marked as web browsers and email clients** – Limits routing the traffic to the internal proxy server only for the applications marked as browsers and email clients (**Web and email > Protocol filtering > Web and email clients**).
- **Ports and applications marked as web browsers or email clients** – Enables routing of all traffic on the corresponding ports as well as all the communication of the applications marked as browsers and email clients on the internal proxy server.

#### 4.3.3.1 Web and email clients

**NOTE:** Starting with Windows Vista Service Pack 1 and Windows Server 2008, the new Windows Filtering Platform (WFP) architecture is used to check network communication. Since WFP technology uses special monitoring techniques, the **Web and email clients** section is not available.


Because of the enormous amount of malicious code circulating the Internet, safe Internet browsing is a very important aspect of computer protection. Web browser vulnerabilities and fraudulent links help malicious code enter the system unnoticed which is why ESET Smart Security focuses on web browser security. Each application accessing the network can be marked as an Internet browser. The check box is two-state:

- **Deselected** – Communication of applications is filtered only for specified ports.
- **Selected** – Communication is always filtered (even if a different port is set).

### 4.3.3.2 Excluded applications

To exclude communication of specific network-aware applications from content filtering, select them in the list. HTTP/POP3/IMAP communication of the selected applications will not be checked for threats. We recommend using this option only for applications that do not work properly with their communication being checked.

Running applications and services will be available here automatically. Click **Add...** to manually select an application not shown on the protocol filtering list.

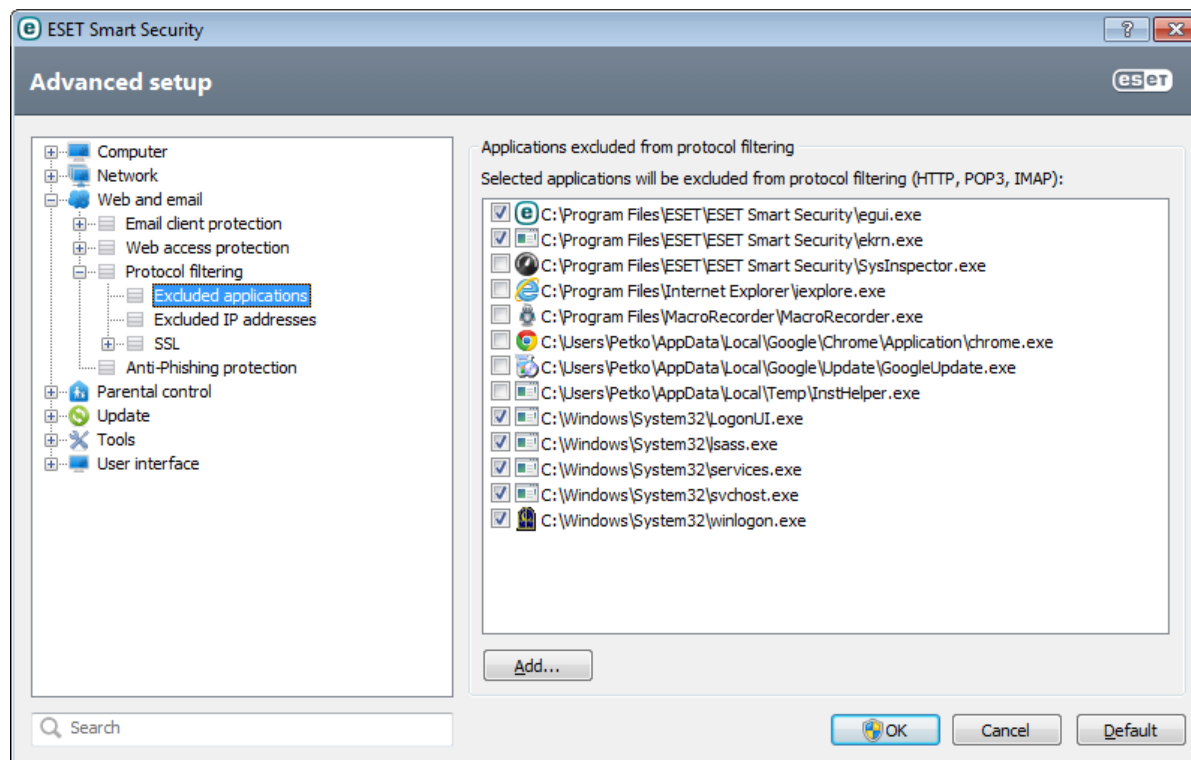


### 4.3.3.3 Excluded IP addresses

The entries in the list will be excluded from protocol content filtering. HTTP/POP3/IMAP communication from/to the selected addresses will not be checked for threats. We recommend that you only use this option for addresses that are known to be trustworthy.

**Add IPv4/IPv6 address** – Click to add an IP address/address range/subnet of a remote point to which a rule is applied.

**Remove** – Remove selected entries from the list.

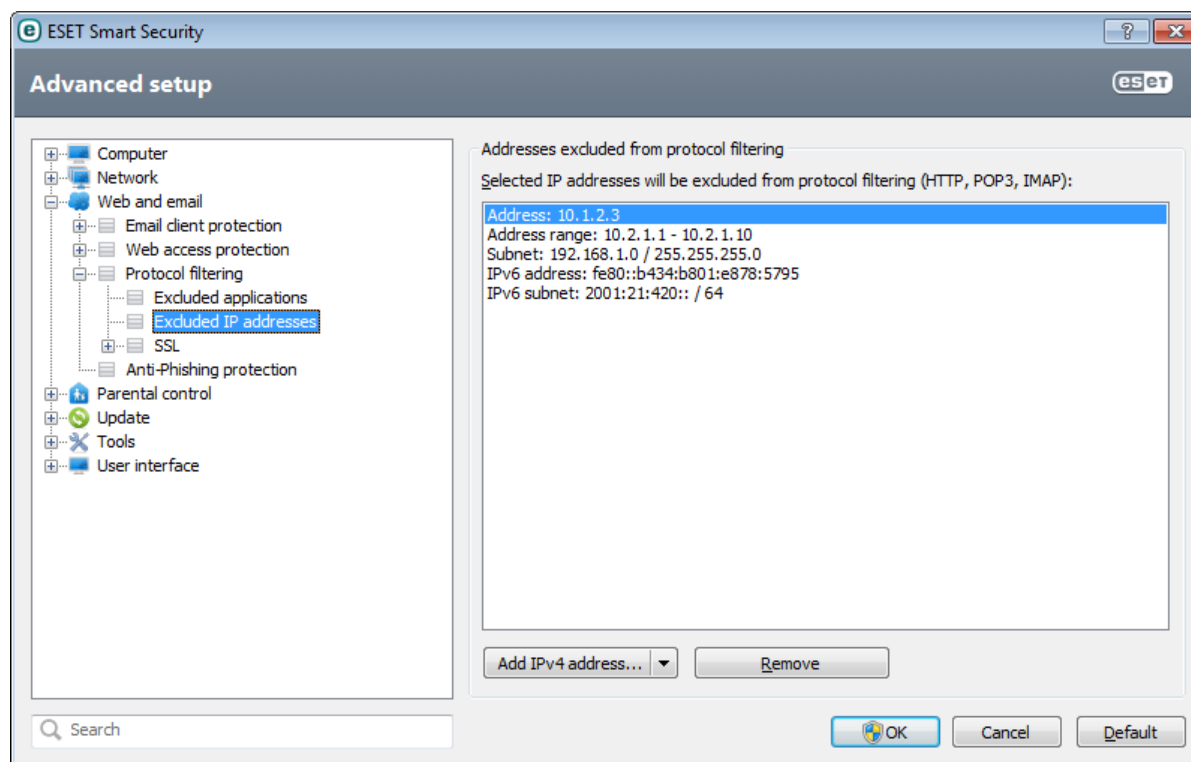

#### 4.3.3.3.1 Add IPv4 address

This allows you to add an IP address/address range/subnet of a remote point to which a rule is applied. Internet Protocol version 4 is the older but still the most widely used.

**Single address** – Adds the IP address of an individual computer for which the rule is to be applied (for example *192.168.0.10*).

**Address range** – Enter the starting and ending address IP address to specify the IP range (of several computers) for which the rule is to be applied (for example *192.168.0.1* to *192.168.0.99*).

**Subnet** – Subnet (a group of computers) defined by an IP address and mask.

For example, *255.255.255.0* is the network mask for the *192.168.1.0/24* prefix, that means *192.168.1.1* to *192.168.1.254* address range.

#### 4.3.3.3.2 Add IPv6 address

This allows you to add an IPv6 address/subnet of a remote point for which the rule is applied. It is the newest version of the Internet protocol and will replace the older version 4.

**Single address** – Adds the IP address of an individual computer for which the rule is to be applied (for example *2001:718:1c01:16:214:22ff:fec9:ca5*).

**Subnet** – Subnet (a group of computers) is defined by an IP address and mask (for example: *2002:c0a8:6301:1::1/64*).

#### 4.3.3.4 SSL protocol checking

ESET Smart Security enables you to check protocols encapsulated in SSL protocol. You can use various scanning modes for SSL protected communications using trusted certificates, unknown certificates, or certificates that are excluded from SSL-protected communication checking.

**Always scan SSL protocol** – Select this option to scan all SSL protected communications except communications protected by certificates excluded from checking. If a new communication using an unknown, signed certificate is established, you will not be notified and the communication will automatically be filtered. When you access a server with an untrusted certificate that is marked as trusted (it is added to the trusted certificates list), communication to the server is allowed and the content of the communication channel is filtered.

**Ask about non-visited sites (exclusions can be set)** – If you enter a new SSL protected site (with an unknown certificate), an action selection dialog is displayed. This mode allows you to create a list of SSL certificates that will be excluded from scanning.

**Do not scan SSL protocol** – If selected, the program will not scan communications over SSL.

**Apply created exceptions based on certificates** – Activates using exclusions specified in excluded and trusted certificates for scanning SSL communication. This option is available if you select **Always scan SSL protocol**.

**Block encrypted communication utilizing the obsolete protocol SSL v2** – Communication using the earlier version of the SSL protocol will automatically be blocked.

##### 4.3.3.4.1 Certificates

For SSL communication to work properly in your browsers/email clients, it is essential that the root certificate for ESET be added to the list of known root certificates (publishers). **Add the root certificate to known browsers** should be enabled. Select this option to automatically add the ESET root certificate to the known browsers (for example, Opera and Firefox). For browsers using the system certification store, the certificate is added automatically (e.g. Internet Explorer). To apply the certificate to unsupported browsers, click **View Certificate > Details > Copy to File...** and then manually import it into the browser.

In some cases, the certificate cannot be verified using the Trusted Root Certification Authorities store (e.g. VeriSign). This means that the certificate is self-signed by someone (e.g. administrator of a web server or a small business company) and considering this certificate as trusted is not always a risk. Most large businesses (for example banks) use a certificate signed by TRCA. If **Ask about certificate validity** is selected (selected by default), the user will be prompted to select an action to take when encrypted communication is established. An action selection dialog will be displayed where you can decide to mark the certificate as trusted or excluded. If the certificate is not present in the TRCA list, the window is **red**. If the certificate is on the TRCA list, the window will be **green**.

You can select **Block communication that uses the certificate** to always terminate an encrypted connection to the site that uses the unverified certificate.

If the certificate is invalid or corrupt, it means that the certificate expired or was incorrectly self-signed. In this case, we recommend that you block the communication that uses the certificate.

##### 4.3.3.4.1.1 Trusted certificates

In addition to the integrated Trusted Root Certification Authorities store where ESET Smart Security stores trusted certificates, you can create a custom list of trusted certificates that can be viewed in **Advanced setup (F5) > Web and email > Protocol filtering > SSL > Certificates > Trusted certificates**. ESET Smart Security will check the content of encrypted communications utilizing certificates in this list.

To delete the selected items from the list, click **Remove**. Click **Show** (or double-click the certificate) to display information about the selected certificate.

#### 4.3.3.4.1.2 Excluded certificates

The Excluded certificates section contains certificates that are considered safe. The content of encrypted communications utilizing the certificates in the list will not be checked for threats. We recommend only excluding web certificates that are guaranteed to be safe and where communication utilizing the certificates does not need to be checked. To delete selected items from the list, click **Remove**. Click **Show** (or double-click the certificate) to display information about the selected certificate.

#### 4.3.3.4.1.3 Encrypted SSL communication

If the computer is configured for SSL protocol scanning, a dialog window prompting you to choose an action may be opened when there is an attempt to establish an encrypted communication (using an unknown certificate). The dialog window contains the following information: name of the application that initiated the communication and name of the certificate used.

If the certificate is not located in the Trusted Root Certification Authorities store, it is considered to be untrusted.

The following actions are available for certificates:

**Yes** – The certificate will be temporarily marked as trusted – the alert window will not be displayed on the next attempt to use the certificate for the duration of the current session.

**Yes, always** – Marks the certificate as trusted and adds it to the list of trusted certificates – no alert windows will be displayed for trusted certificates.

**No** – Marks the certificate as untrusted for the current session – the alert window will be displayed on the next attempt to use the certificate.

**Exclude** – Adds the certificate to the list of excluded certificates – data transferred over the given encrypted channel will not be checked at all.

### 4.3.4 Anti-Phishing protection


The term phishing defines a criminal activity that uses social engineering (the manipulation of users in order to obtain confidential information). Phishing is often used to gain access to sensitive data such as bank account numbers, PIN numbers and more. Read more about this activity in the [glossary](#). ESET Smart Security provides anti-phishing protection, web pages known to distribute this type of content can be blocked.

We strongly recommend that you enable Anti-Phishing in ESET Smart Security. This option can be accessed from **Advanced setup** (F5) by navigating to **Web and email > Anti-Phishing protection**.

Please see also our [Knowledgebase article](#) for an updated and more detailed version of this help page.

#### Accessing a phishing website

When you access a phishing website, you will receive the following dialog in your web browser. By clicking **Proceed to the site** (**not recommended**), you will be able to access the website without a warning message.

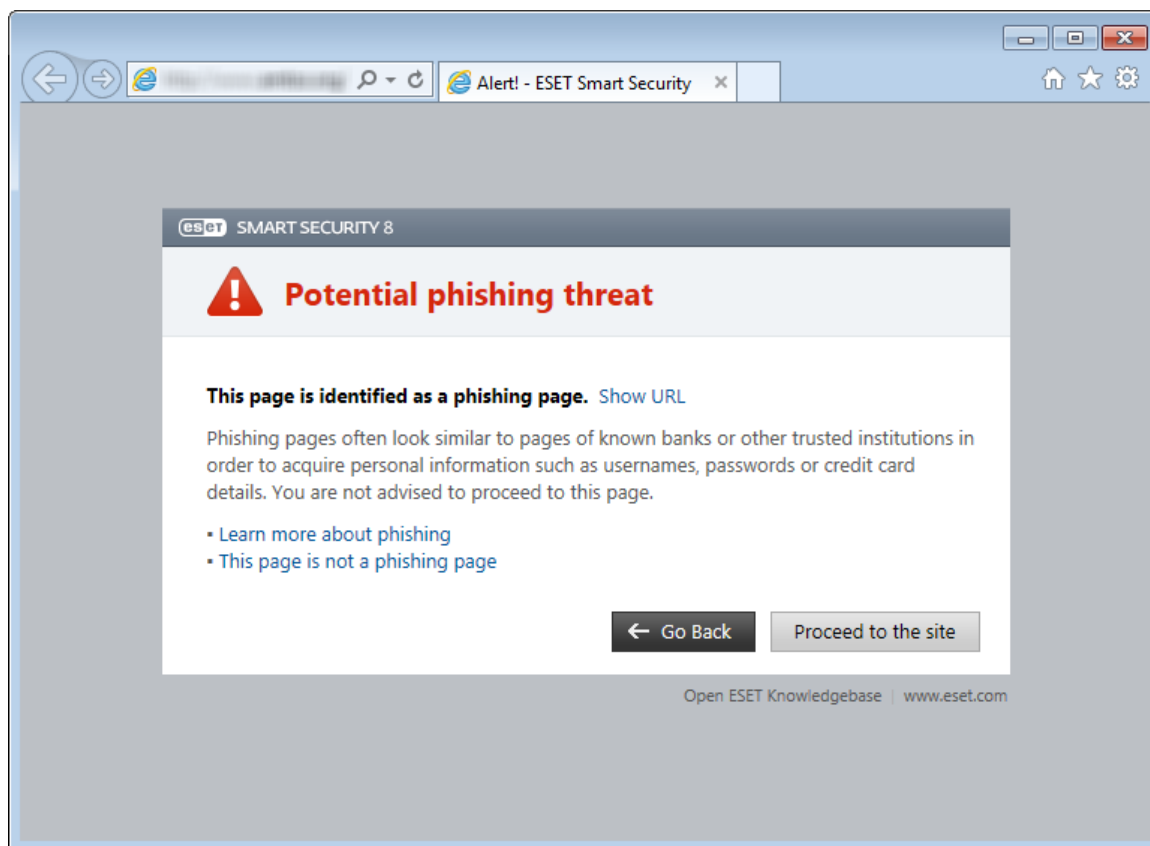

**NOTE:** Potential phishing websites that have been whitelisted will expire after several hours by default. To allow a website permanently, you can use the [URL address management](#) tool. From **Advanced setup** (F5) click **Web and email** > **Web access protection** > **URL address management** and from the **URL address management** drop-down menu select **List of allowed addresses** and add your website to this list.

### Phishing site reporting

The [Report a phishing site](#) link enables you to report a phishing/malicious website to ESET for analysis.

**NOTE:** Before submitting a website to ESET, make sure it meets one or more of the following criteria:

- the website is not detected at all,
  - the website is incorrectly detected as a threat. In this case, please refer to the [Remove phishing site](#) link.
- Alternatively, you can submit the website by email. Send your email to [samples@eset.com](mailto:samples@eset.com). Remember to use a descriptive subject and enclose as much information about the website as possible (e.g., the website you referred it from, how did you hear about it, ...).

## 4.4 Parental control

The Parental control module allows you to configure parental control settings, which provide parents with automated tools to help protect their children and set restrictions for using devices and services. The goal is to prevent children and young adults from accessing pages with inappropriate or harmful content.


Parental control lets you block webpages that may contain potentially offensive material. In addition, parents can prohibit access to more than 40 pre-defined website categories and over 140 subcategories.

To activate Parental control for a specific user account, follow the steps below:

1. By default Parental control is disabled in ESET Smart Security. There are two methods for activating Parental control:
  - Click **Disabled** in the **Setup** pane from the main program window and change the Parental control state to **Enabled**.
  - Press F5 to access the **Advanced Setup** tree, select **Parental Control** and then select the check box next to **Integrate into system**.



2. Click **Setup > Parental control** from the main program window. Even though **Enabled** appears next to **Parental control**, you must configure Parental control for the desired account by clicking **Not defined**. In the Account setup window enter an age to determine the level of access and recommended age-appropriate web pages. Parental control will now be enabled for the specified user account. Click **Setup** under an account name to customize categories you want to allow or block in the [Web page content filtering](#) tab. To allow or block custom web pages that do not match a category, click the [Blocked and allowed web pages](#) tab.

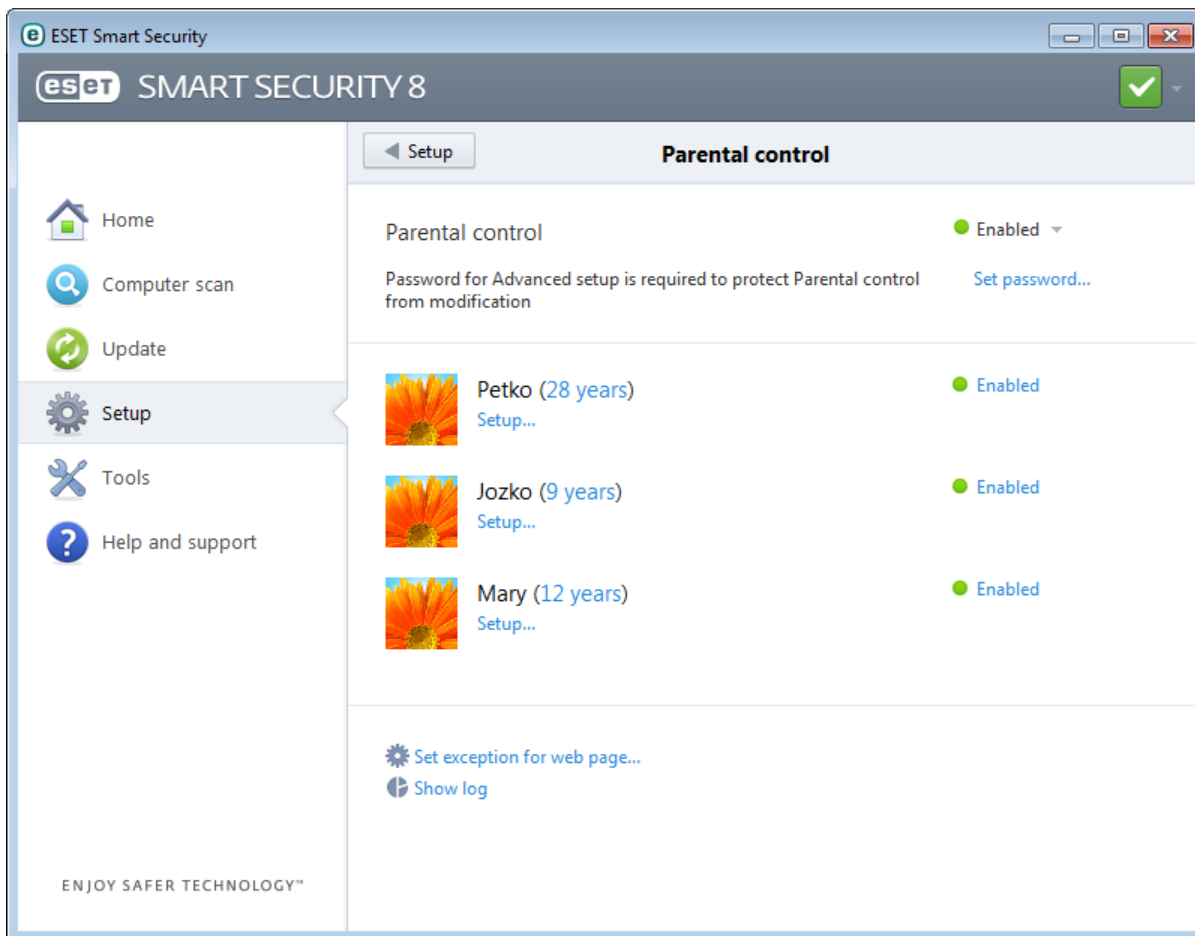

If you click **Parental control** in the **Setup** pane from the main product window of ESET Smart Security, you will see that the main window is divided into three sections.

### 1. Parental control

After deselecting **Enabled** on the right, a **Temporarily disable protection** window will appear. Here you can set the time interval for which protection is disabled. The option then changes to **Disabled** and all following settings will be hidden.

It is important to protect the settings in ESET Smart Security with a password. This password can be set in the [Access setup](#) section. If no password is set the following warning will appear under the **Parental control** option – **Password for Advanced setup is required to protect Parental control from modification**; **Set password...** will be visible. The restrictions set in Parental control only affect the standard user accounts. Because an Administrator can override any restriction, they will not have any effect.

HTTPS (SSL) communication is not filtered by default. Therefore, Parental control cannot block web pages that begin with <https://>. To enable this feature, select **Enable** next to the **Filtering of encrypted (HTTPS) websites is not enabled** warning message, or select **Always scan SSL protocol** in **Advanced setup > Web and email > Protocol filtering > SSL configuration** section.

**Note:** Parental control requires [Application protocol content filtering](#), [HTTP protocol checking](#) and [Personal firewall system integration](#) to be enabled in order to function properly. All of these functionalities are enabled by default.

### 2. Windows user accounts

If you have created a role for an existing account, it will be shown here with the **Enabled** attribute. Clicking **Enabled**


will toggle Parental control for the account. Under an active account, click [Setup...](#) to see the list of allowed categories of web pages for this account and blocked and allowed web pages.

**Important:** To create a new account (for example, for a child), use the following step-by-step instructions for Windows 7 or Windows Vista:

1. Open **User Accounts** by clicking the **Start** button (located at the bottom left side of your desktop), clicking **Control Panel** and then clicking **User Accounts**.
2. Click **Manage another account**. If you are prompted for an administrator password or confirmation, type the password or provide confirmation.
3. Click **Create a new account**.
4. Type the name you want to give the user account, click an account type, and then click **Create Account**.
5. Reopen the Parental control pane by clicking again from the main program window of ESET Smart Security to **Setup > Parental control**.

### 3. The last section contains two options

**Set exception for web page...** – This is a quick way to set an exception for a web page for the selected account. Enter the URL address of the web page into the **URL** field and select the account from the list below. If you select the **Block** check box, the web page will be blocked for this account. If you leave this check box deselected, the web page will be allowed.

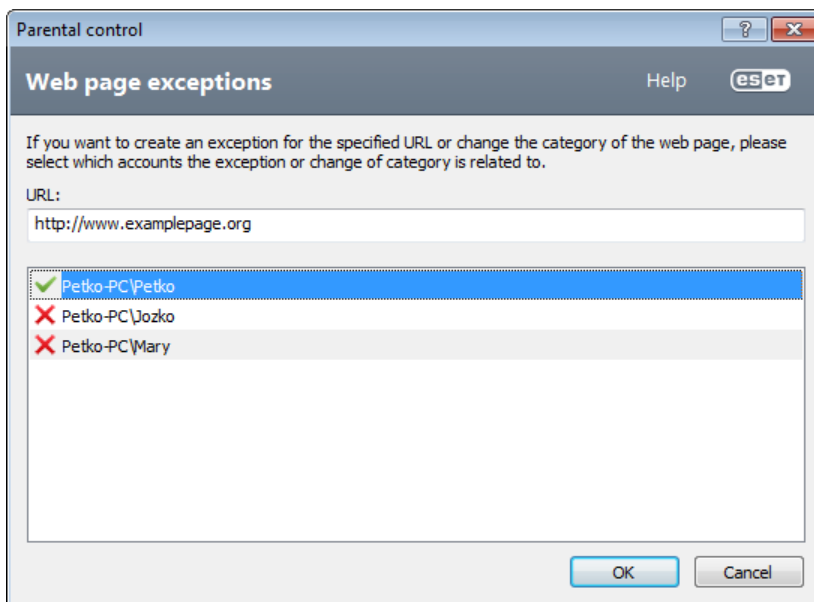


Exceptions defined here are superior to the categories defined for the selected account(s). For example, if the account has the **News** category blocked, but you have defined an allowed news webpage as an exception, the account can access the allowed webpage. You can check the changes made here in the [Blocked and allowed web pages](#) section.

**Show log** – This shows a detailed log of the Parental control activity (blocked pages, the account the page was blocked for, reason, etc.). You can also filter this log based on the criteria you choose by clicking **Filter...**

#### 4.4.1 Web page content filtering


If the check box next to a category is selected, it is allowed. Deselect the check box next to a specific category to block it for the selected account.

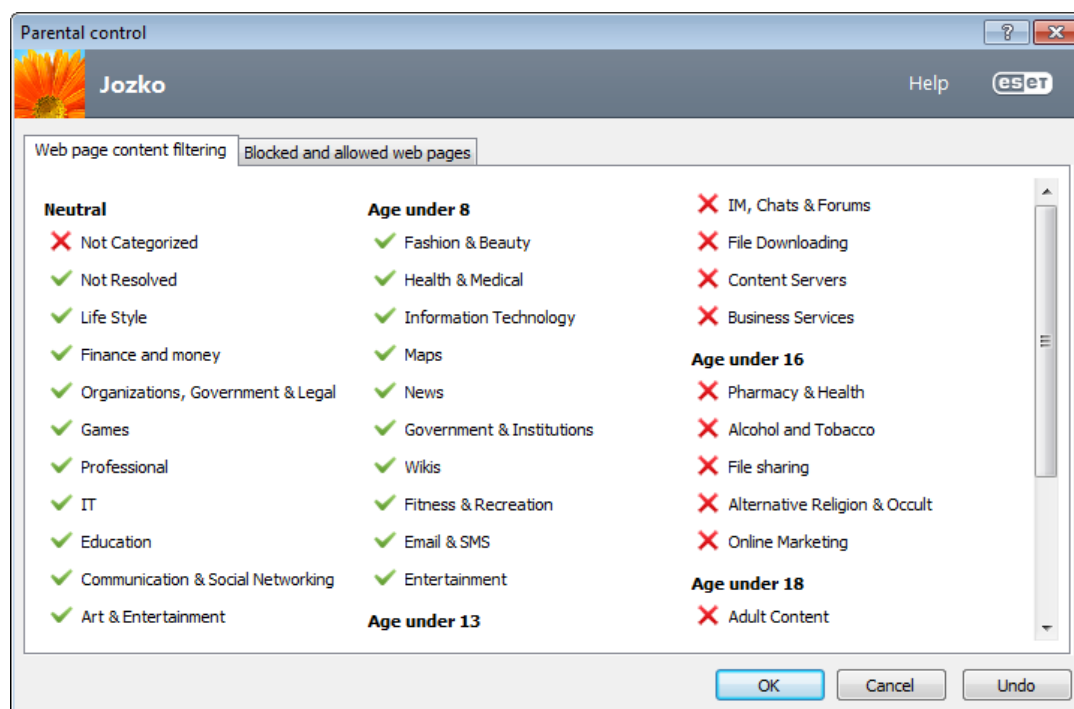


Moving the mouse over a category will show you a list of web pages that fall into that category. Here are some examples of categories (groups) that users might not be familiar with:

- **Miscellaneous** – Usually private (local) IP addresses such as intranet, 127.0.0.0/8, 192.168.0.0/16, etc. When you get a 403 or 404 error code, the website will also match this category.
- **Not resolved** – This category includes web pages that are not resolved because of an error when connecting to the Parental control database engine.
- **Not categorized** – Unknown web pages that are not yet in the Parental control database.
- **File sharing** – These web pages contain large amounts of data such as photos, videos or e-books. There is a risk that these sites contain potentially offensive material or adult content.

## 4.4.2 Blocked and allowed web pages

Enter a URL address into the blank field under the list, select **Allow** or **Block** and click **Add** to add it to the list. To delete an URL address from the list, click the remove button .

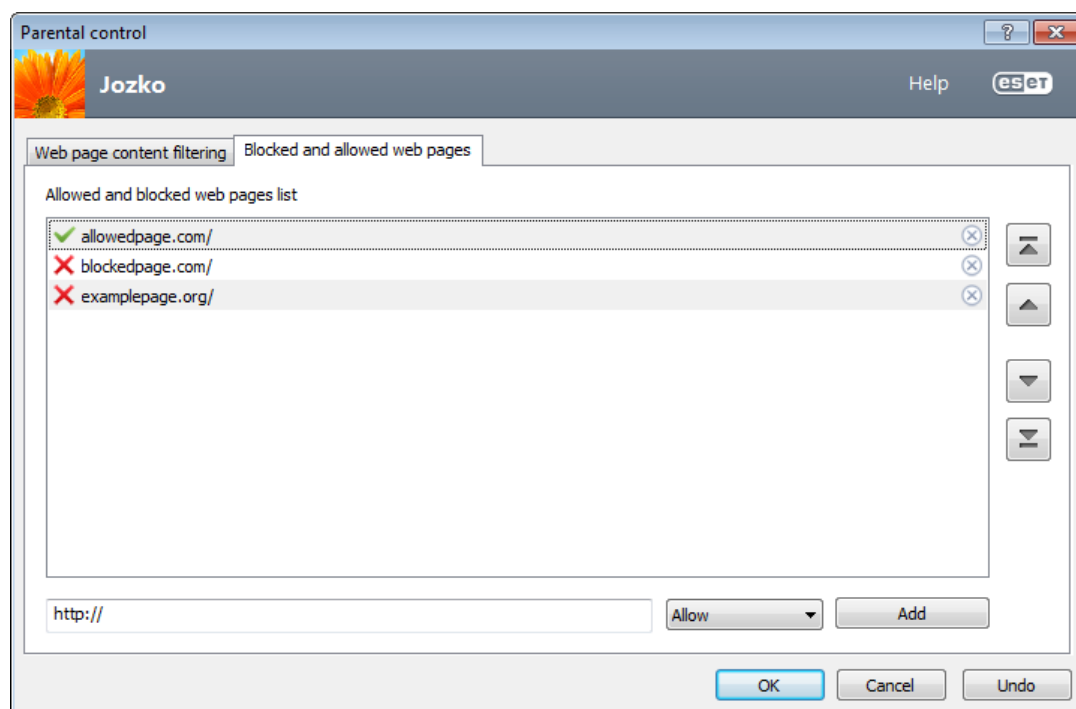

In the URL address list, the special symbols \* (asterisk) and ? (question mark) cannot be used. For example, web page addresses with multiple TLDs must be entered manually (*examplepage.com*, *examplepage.sk*, etc.). When you enter a domain to the list, all content located on this domain and all subdomains (e.g. *sub.examplepage.com*) will be blocked or allowed based on your choice of URL-based action.

**Note:** Blocking or allowing a specific web page can be more accurate than blocking or allowing a whole category of web pages. Be careful when changing these settings and adding a category/web page to the list.


## 4.5 Updating the program

Regularly updating ESET Smart Security is the best method to ensure the maximum level of security on your computer. The Update module ensures that the program is always up to date in two ways, by updating the virus signature database and by updating system components.

By clicking **Update** in the main program window, you can view current update status including the date and time of the last successful update and if an update is needed. The primary window also contains the virus signature database version. This numeric indicator is an active link to ESET's website, listing all signatures added within the given update.

In addition to automatic updates, you can click **Update now** to trigger an update manually. Updating the virus signature database and updating program components are important parts of maintaining complete protection against malicious code. Please pay attention to their configuration and operation. If you did not enter your License details (Username and Password) during installation, you can enter your Username and Password when updating to access ESET's update servers.

**NOTE:** Your Username and Password are provided by ESET after purchasing ESET Smart Security.

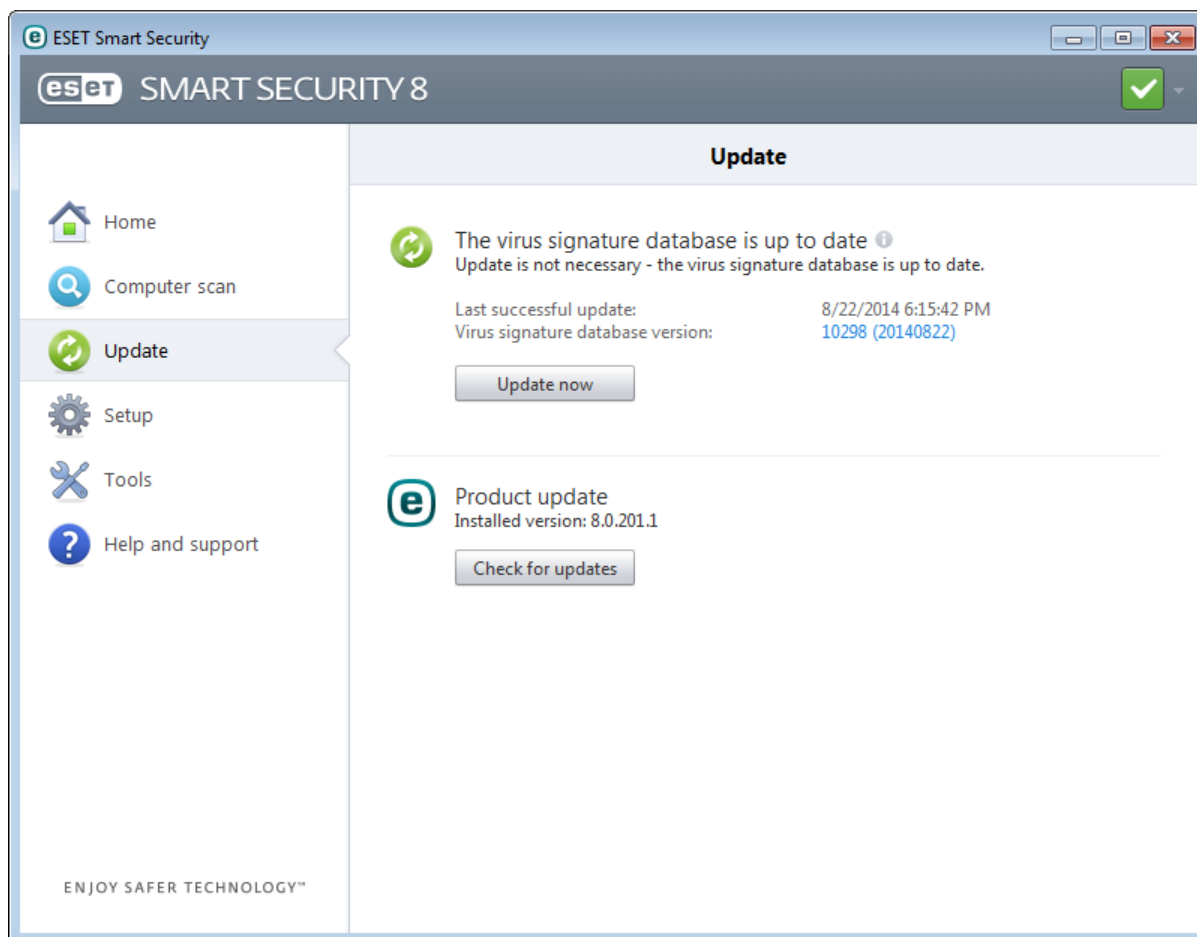


**Last successful update** – The date of the last update. If you do not see a recent date, your virus signature database may not be current.

**Virus signature database version** – The virus signature database number, which is also an active link to the ESET website. Click it to view a list of all signatures added within the given update.

Click **Check for updates** to detect the latest available version of ESET Smart Security.

### Update process


After clicking **Update now**, the download process begins. A download progress bar and remaining time to download will be displayed. To interrupt the update, click **Cancel update**.

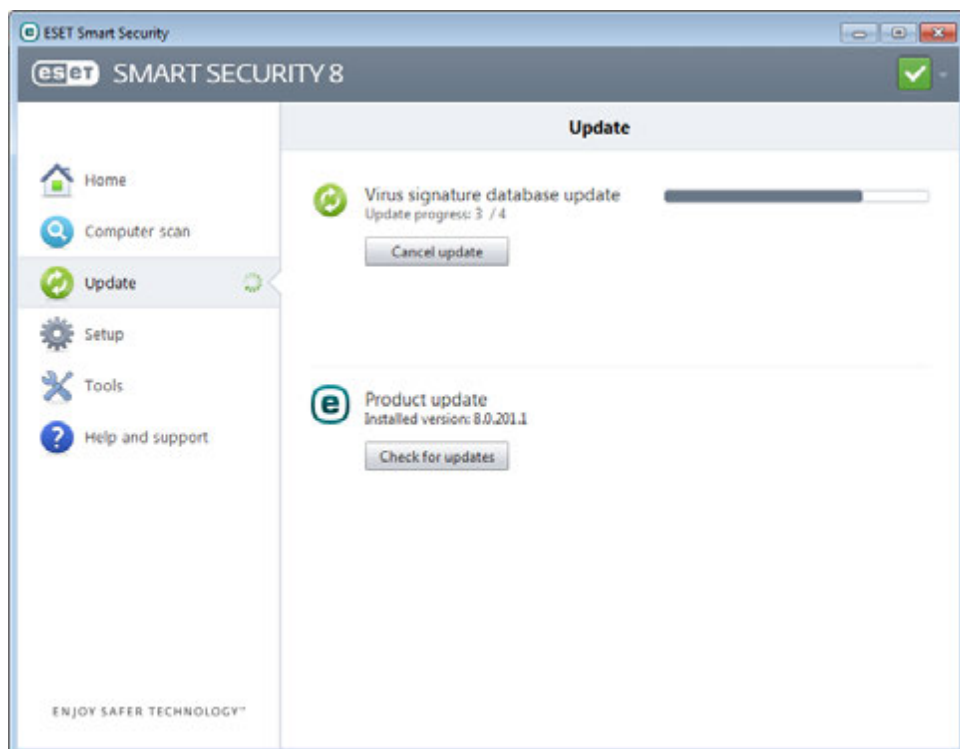

**Important:** Under normal circumstances, when updates are downloaded properly the message **Update is not necessary – the virus signature database is up to date** will appear in the **Update** window. If this is not the case, the program is out of date and more vulnerable to infection. Please update the virus signature database as soon as possible. Otherwise, one of the following messages will be displayed:

The previous notification is related to the following two **Virus signature database update ended with an error** messages about unsuccessful updates:


1. **Invalid Username and/or Password** – The Username and Password have been incorrectly entered in update setup. We recommend that you check your [authentication data](#). The Advanced setup window (click **Setup** from the main menu and then click **Enter advanced setup...**, or press F5 on your keyboard) contains additional update options. Click **Update > Settings** in the Advanced setup tree to enter a new Username and Password.
2. **Server not found** – A possible cause of the error is incorrect [Internet connection settings](#). We recommend that you check your Internet connectivity (by opening any website in your web browser). If the website does not open, it is likely that an Internet connection is not established or there are connectivity problems with your computer. Please check with your Internet Service Provider (ISP) if you do not have an active Internet connection.

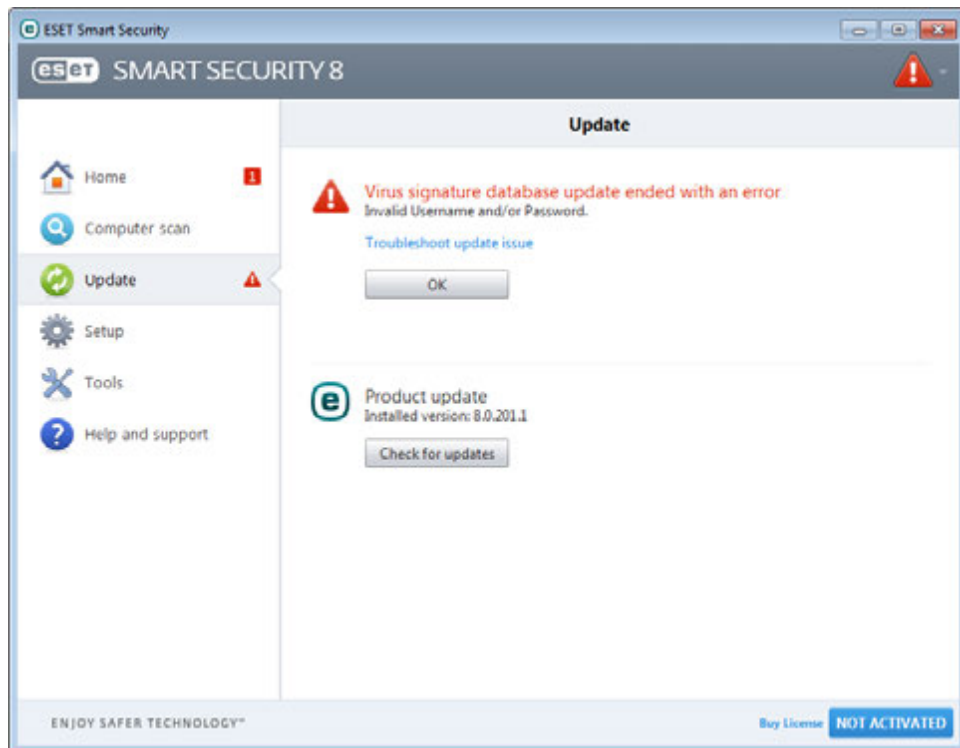

#### 4.5.1 Update settings

Update setup options are available from the **Advanced setup** tree (F5 key) by clicking **Update > Settings**. This section specifies update source information, such as the update servers and authentication data for these servers. In the home version of ESET products you are not able to choose own update server. Update files will automatically be downloaded from the ESET server with the least network traffic. The **Update server** drop-down menu is only available in ESET Endpoint Antivirus or ESET Endpoint Security.

For updates to be downloaded properly, it is essential that all update information is entered correctly. If you use a firewall, please make sure that the program is allowed to communicate with the Internet (HTTP communication is enabled).

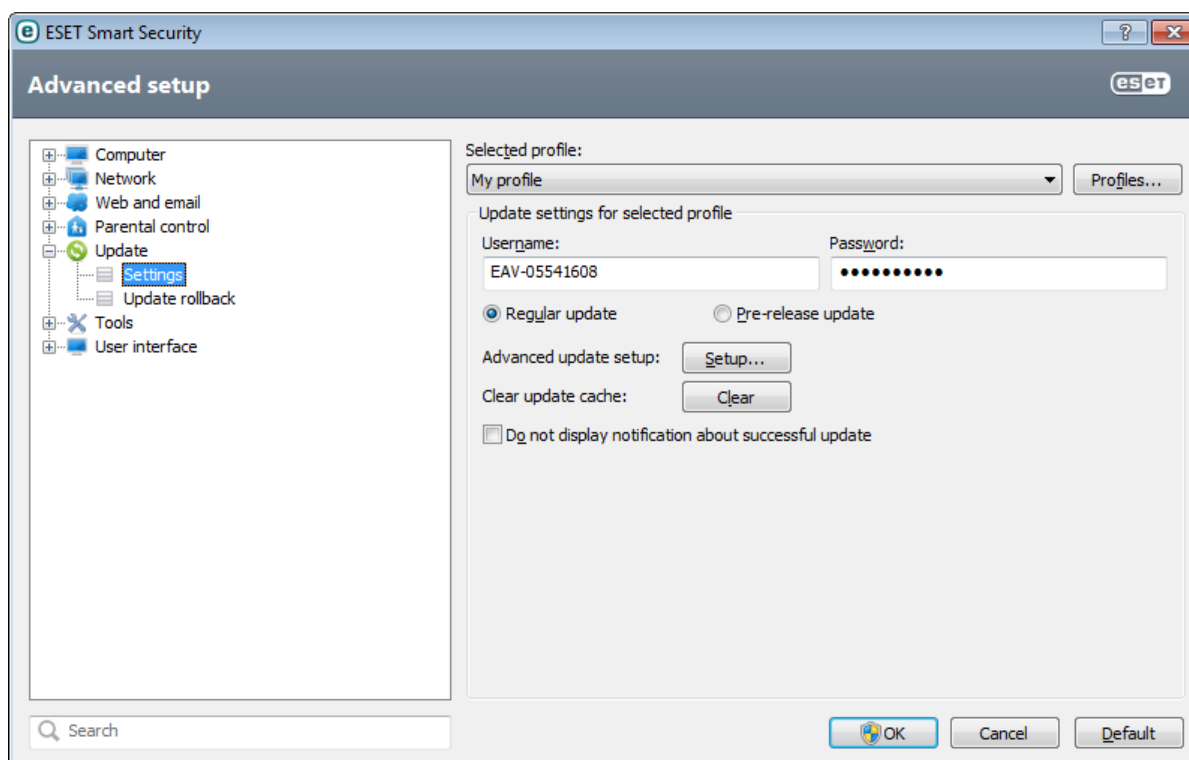

Your current update profile is displayed in the **Selected profile** drop-down menu. Click **Profiles...** to create a new profile.

Authentication for update servers is based on the **Username** and **Password** generated and sent to you after purchase. By default, no verification is required and the **Username** and **Password** fields are left empty.

Pre-release updates (the **Pre-release update** option) are updates that have gone through thorough internal testing and will be available to the general public soon. You can benefit from enabling pre-release updates by having access to the most recent detection methods and fixes. However, pre-release updates might not be stable enough at all times and SHOULD NOT be used on production servers and workstations where maximum availability and stability is required. The list of current modules can be found in **Help and support > About ESET Smart Security**. It is recommended that basic users leave the **Regular update** option selected by default.

Click **Setup...** next to **Advanced update setup** to display a window containing advanced update options.

If you experience problems with an update, click **Clear** to delete temporary update files.

**Do not display notification about successful update** – Turns off the system tray notification at the bottom right corner of the screen. It is useful to select this option if a full screen application or a game is running. Please note that [Gamer mode](#) will disable all notifications.

#### 4.5.1.1 Update profiles

Update profiles can be created for various update configurations and tasks. Creating update profiles is especially useful for mobile users who need an alternative profile for Internet connection properties that regularly change.

The **Selected profile** drop-down menu displays the currently selected profile and is set to **My profile** by default. To create a new profile, click **Profiles...** and then click **Add...** and enter your own **Profile name**. When creating a new profile, you can copy settings from an existing one by selecting it from the **Copy settings from profile** drop-down menu.

#### 4.5.1.2 Advanced update setup

To view the Advanced update setup, click **Setup...** Advanced update setup options include the configuration of **Update mode**, **HTTP Proxy** and **LAN**.

##### 4.5.1.2.1 Update mode

The **Update mode** tab contains options related to the program component update. The program enables you to predefine its behavior when a new program component upgrade is available.

Program component updates (PCUs) include new features or make changes to features from previous versions. PCUs can be performed automatically without user intervention, or you can choose to be notified each time a PCU is performed. After a program component update is installed, a computer restart may be required. In the **Program component update** section, three options are available:

- **Never update program components** – Program component updates will not be performed at all. This option is suitable for server installations, since servers can usually be restarted only when they are undergoing maintenance.
- **Always update program components** – A program component update will be downloaded and installed automatically. Please remember that a computer restart may be required.
- **Ask before downloading program components** – The default option. You will be prompted to confirm or refuse program component updates when they become available.

After a program component update, it may be necessary to restart your computer to provide full functionality of all modules. The **Restart after program component upgrade** section allows you to select one of the following options:

- **Never restart computer** – You will not be asked to restart, even if it is required. Please note that this is not recommended, since your computer might not work properly until the next restart.
- **Offer computer restart if necessary** – The default option. After a program component update, you will be prompted to restart your computer in a dialog window.
- **If necessary, restart computer without notifying** – After a program component upgrade, your computer will be restarted (if required).



**NOTE:** Selecting the most appropriate option depends on the workstation where the settings will be applied. Please be aware that there are differences between workstations and servers. For example, restarting the server automatically after a program upgrade could cause serious damage.

If the **Ask before downloading update** option is selected, a notification will display when a new update is available.

If the update file size is greater than the value specified in the **Ask if an update file is greater than** field, the program will display a notification.

The **Regularly check for latest product version** option will enable the **Regular checking for latest product version** scheduled task (see [Scheduler](#)).

#### 4.5.1.2.2 Proxy server

To access the proxy server setup options for a given update profile, click **Update** in the Advanced setup tree (F5) and then click **Setup...** to the right of **Advanced update setup**. Click the **HTTP Proxy** tab and select one of the three following options:

- **Use global proxy server settings**
- **Do not use proxy server**
- **Connection through a proxy server**

Selecting the **Use global proxy server settings** option will use the proxy server configuration options already specified in the **Tools > Proxy server** branch of the Advanced setup tree.

Select **Do not use proxy server** to specify that no proxy server will be used to update ESET Smart Security.

The **Connection through a proxy server** option should be selected if:

- A proxy server should be used to update ESET Smart Security that is different from the proxy server specified in the global settings (**Tools > Proxy server**). If so, the settings should be specified here: **Proxy server** address, communication **Port**, plus **Username** and **Password** for the proxy server if required.
- The proxy server settings were not set globally, but ESET Smart Security will connect to a proxy server for updates.
- Your computer is connected to the Internet via a proxy server. The settings are taken from Internet Explorer during program installation, but if they are subsequently changed (e.g. if you change your ISP), please check that the HTTP proxy settings listed in this window are correct. Otherwise the program will not be able to connect to the update servers.

The default setting for the proxy server is **Use global proxy server settings**.

**NOTE:** Authentication data such as **Username** and **Password** is intended for accessing the proxy server. Complete these fields only if a username and password are required. Please note that these fields are not for your Username/Password for ESET Smart Security, and should only be completed if you know you need a password to access the internet via a proxy server.

#### 4.5.1.2.3 Connecting to the LAN

When updating from a local server with an NT-based operating system, authentication for each network connection is required by default.

To configure such an account, click the **LAN** tab. The **Connect to LAN as** section offers the **System account (default)**, **Current user**, and **Specified user** options.

Select the **System account (default)** option to use the system account for authentication. Normally, no authentication process takes place if there is no authentication data supplied in the main update setup section.

To ensure that the program authenticates using a currently logged-in user account, select **Current user**. The drawback of this option is that the program is not able to connect to the update server if no user is currently logged in.

Select **Specified user** if you want the program to use a specific user account for authentication. Use this method when the default system account connection fails. Please be aware that the specified user account must have access to the update files directory on the local server. Otherwise, the program will not be able to establish a connection

and download updates.

**Warning:** When either **Current user** or **Specified user** is selected, an error may occur when changing the identity of the program to the desired user. We recommend entering the LAN authentication data in the main update setup section. In this update setup section, the authentication data should be entered as follows: *domain\_name\user* (if it is a workgroup, enter *workgroup\_name\name*) and password. When updating from the HTTP version of the local server, no authentication is required.


Select **Disconnect from server after update** if connection to the server remains active even after updates have been downloaded.

#### 4.5.2 Update rollback

If you suspect that a new update of the virus database and/or program modules may be unstable or corrupt, you can roll back to the previous version and disable updates for a set period of time. Alternatively, you can enable previously disabled updates if you had postponed them indefinitely.


ESET Smart Security records snapshots of virus signature database and program modules for use with the *rollback* feature. In order to create virus database snapshots, leave **Create snapshots of update files** check box selected. The **Number of locally stored snapshots** field defines the number of previous virus database snapshots stored.

If you click **Roll back (Advanced setup (F5) > Update > Update rollback)**, you have to select a time interval from the **Suspend updates** drop-down menu that represents the period of time that the virus signature database and program module updates will be paused.

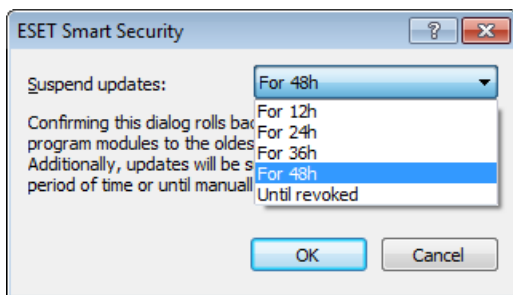

Select **Until revoked** to postpone regular updates indefinitely until you restore update functionality manually. Because it represents a potential security risk, we do not recommend selecting this option.

If a rollback is performed, the **Roll back** button changes to **Allow updates**. No updates will be allowed for the time interval selected from the **Suspend updates** drop-down menu. The virus signature database version is downgraded to the oldest available and stored as a snapshot in the local computer file system.

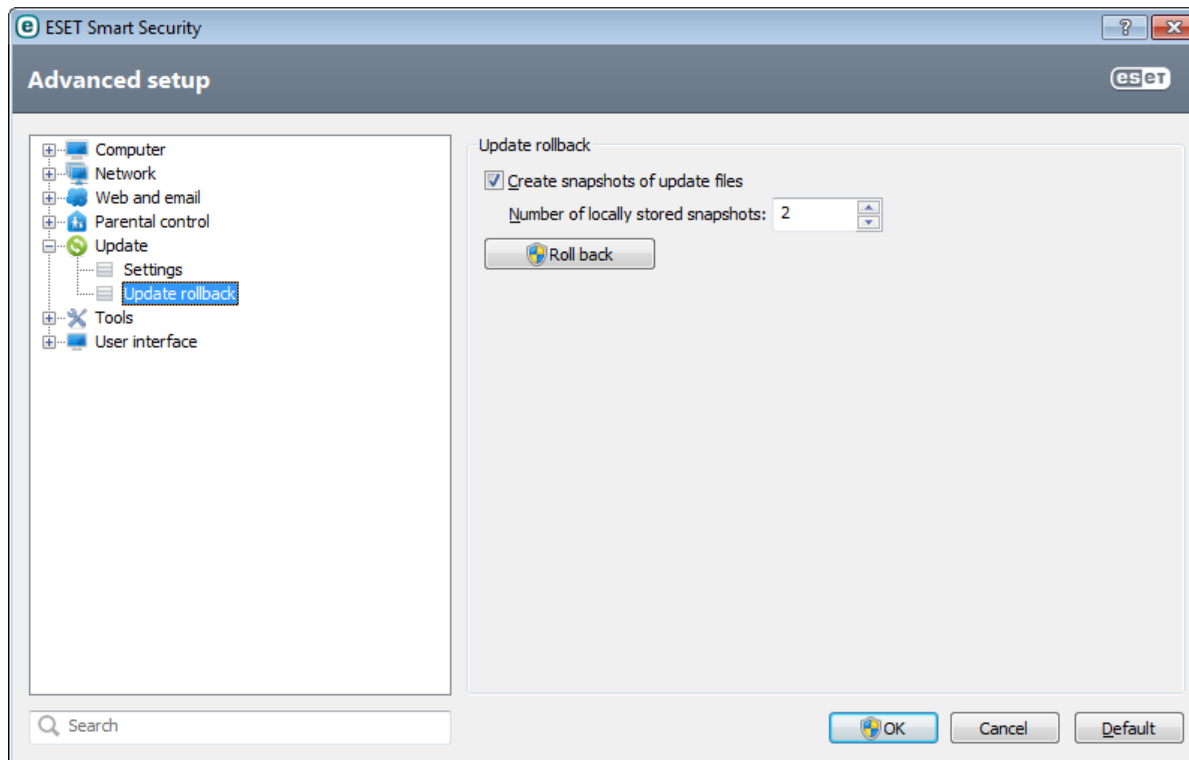

**Example:** Let the number 6871 be the most recent version of virus signature database. 6870 and 6868 are stored as a virus signature database snapshots. Note that 6869 is not available because, for example, the computer was turned off and a more recent update was made available before 6869 was downloaded. If the **Number of locally stored snapshots** field is set to 2 and you click **Roll back**, the virus signature database (including program modules) will be restored to version number 6868. This process may take some time. Check whether the virus signature database version has downgraded from the main program window of ESET Smart Security in the [Update](#) section.

### 4.5.3 How to create update tasks

Updates can be triggered manually by clicking **Update virus signature database** in the primary window displayed after clicking **Update** from the main menu.

Updates can also be run as scheduled tasks. To configure a scheduled task, click **Tools > Scheduler**. By default, the following tasks are activated in ESET Smart Security:

- **Regular automatic update**
- **Automatic update after dial-up connection**
- **Automatic update after user logon**

Each update task can be modified to meet your needs. In addition to the default update tasks, you can create new update tasks with a user-defined configuration. For more details about creating and configuring update tasks, see section [Scheduler](#).

## 4.6 Tools

The **Tools** menu includes modules that help simplify program administration and offers additional options for advanced users.



This menu includes the following tools:

- [Log files](#)
- [Protection statistics](#)
- [Watch activity](#)
- [Running processes](#) (if ESET Live Grid is enabled in ESET Smart Security)
- [Scheduler](#)
- [Quarantine](#)
- [Network connections](#) (if Personal firewall is [integrated](#) in ESET Smart Security)
- [ESET SysInspector](#)

**Submit file for analysis** – Allows you to submit a suspicious file for analysis to the ESET Virus Lab. The dialog window displayed after clicking this option is described in the [Submission of files for analysis](#) section.

**ESET SysRescue** – Launches the ESET SysRescue creation wizard.

**Note:** ESET SysRescue may not be available for Windows 8 in older versions of ESET security products. In this case we recommend that you upgrade your product or create an ESET SysRescue disk on another version of Microsoft Windows.

**ESET Social Media Scanner** – Link to a social media application (e.g. Facebook) intended to protect social media users against threats. This application is independent from other ESET products and is completely free.

### 4.6.1 Log files

Log files contain information about all important program events that have occurred and provide an overview of detected threats. Logging is an essential part of system analysis, threat detection and troubleshooting. Logging is performed actively in the background with no user interaction. Information is recorded based on the current log verbosity settings. It is possible to view text messages and logs directly from the ESET Smart Security environment, as well as to archive logs.

Log files are accessible from the main program window by clicking **Tools > Log files**. Select the desired log type from the **Log** drop-down menu. The following logs are available:

- **Detected threats** – The threat log offers detailed information about infiltrations detected by ESET Smart Security. The information includes the time of detection, name of infiltration, location, the performed action and the name of the user logged in at the time the infiltration was detected. Double-click any log entry to display its details in a separate window.
- **Events** – All important actions performed by ESET Smart Security are recorded in the event log. The event log contains information about events and errors that have occurred in the program. It is designed for system administrators and users to solve problems. Often the information found here can help you find a solution for a problem occurring in the program.
- **Computer scan** – Results of all completed manual or planned scans are displayed in this window. Each line corresponds to a single computer control. Double-click any entry to view details of the respective scan.
- **HIPS** – Contains records of specific [HIPS](#) rules which were marked for recording. The protocol shows the application that triggered the operation, the result (whether the rule was permitted or prohibited) and the created rule name.
- **Personal firewall** – The firewall log displays all remote attacks detected by the Personal firewall. Here you will find information about any attacks on your computer. The *Event* column lists the detected attacks. The *Source* column tells you more about the attacker. The *Protocol* column reveals the communication protocol used for the attack. Analysis of the firewall log may help you to detect system infiltration attempts in time to prevent unauthorized access to your system.
- **Filtered websites** – This list is useful if you want to view a list of websites that were blocked by [Web access protection](#) or [Parental control](#). In these logs you can see time, URL address, user and application that created a connection to the particular website.
- **Antispam protection** – Contains records related to email messages that were marked as spam.
- **Parental control** – Shows web pages blocked or allowed by Parental control. The *Match type* and *Match values* columns tell you how the filtering rules were applied.
- **Device control** – Contains records of removable media or devices that were connected to the computer. Only devices with respective Device control rules will be recorded to the log file. If the rule does not match a connected device, a log entry for a connected device will not be created. Here you can also see details such as device type, serial number, vendor name and media size (if available).

In each section, the displayed information can be directly copied to the clipboard (keyboard shortcut Ctrl + C) by selecting the entry and clicking **Copy**. To select multiple entries, the CTRL and SHIFT keys can be used.

You can show the context menu by right-clicking a specific entry. The following options are available in the context menu:

- **Filter records of the same type** – After activating this filter, you will only see records of the same type (diagnostics, warnings, ...).
- **Filter.../Find...** – When enabled, a **Log filtering** window will pop up where you can define the filtering criteria.
- **Clear filter** – Clears all filter settings (as described above).
- **Copy all** – Copies information about all the records in the window.
- **Delete/Delete all** – Deletes the selected record(s) or all the records displayed – this action requires administrator privileges.
- **Export** – Exports information about the record(s) in XML format.
- **Don't block similar events in the future** – This option is visible in firewall log only. Adds an IDS exception from selected activity to Personal firewall.
- **Scroll log** – Leave this option enabled to auto scroll old logs and watch active logs in the **Log files** window.

#### 4.6.1.1 Log maintenance

The Logging configuration of ESET Smart Security is accessible from the main program window. Click **Setup > Enter advanced setup... > Tools > Log files**. The logs section is used to define how the logs will be managed. The program automatically deletes older logs in order to save hard disk space. You can specify the following options for log files:

**Minimum logging verbosity** – Specifies the minimum verbosity level of events to be logged.

- **Diagnostic** – Logs information needed to fine-tune the program and all records above.
- **Informative** – Records informative messages, including successful update messages, plus all records above.
- **Warnings** – Records critical errors and warning messages.
- **Errors** – Errors such as "*Error downloading file*" and critical errors will be recorded.
- **Critical** – Logs only critical errors (error starting Antivirus protection, Personal firewall, etc...).

Log entries older than the specified number of days in the **Automatically delete records older than X days** field will automatically be deleted.

**Optimize log files automatically** – If checked, log files will be automatically be defragmented if the percentage is higher than value specified in the **If the number of unused records exceeds (%)** field.

Click **Optimize now** to begin defragmenting the log files. All empty log entries are removed during this process, which improves performance and log processing speed. This improvement can be observed especially if the logs contain a large number of entries.

#### 4.6.2 Scheduler

Scheduler manages and launches scheduled tasks with predefined configuration and properties.

The Scheduler can be accessed from the ESET Smart Security main program window by clicking **Tools > Scheduler**. The **Scheduler** contains a list of all scheduled tasks and configuration properties such as the predefined date, time and scanning profile used.

The Scheduler serves to schedule the following tasks: virus signature database update, scanning task, system startup file check and log maintenance. You can add or delete tasks directly from the main Scheduler window (click **Add...** or **Delete** at the bottom). Right click anywhere in the Scheduler window to perform the following actions: display detailed information, perform the task immediately, add a new task, and delete an existing task. Use the checkboxes at the beginning of each entry to activate/deactivate the tasks.


By default, the following scheduled tasks are displayed in **Scheduler**:

- **Log maintenance**
- **Regular automatic update**
- **Automatic update after dial-up connection**
- **Automatic update after user logon**
- **Regular checking for latest product version** (see [Update mode](#))
- **Automatic startup file check** (after user logon)
- **Automatic startup file check** (after successful update of the virus signature database)
- **Automatic first scan**

To edit the configuration of an existing scheduled task (both default and user-defined), right-click the task and click **Edit...** or select the task you want to modify and click **Edit...**

### Add a new task

1. Click **Add...** at the bottom of the window.
2. Select the desired task from the pull-down menu.
3. Enter a name of the task and select one of the timing options:
  - **Once** – The task will be performed only once, at the predefined date and time.
  - **Repeatedly** – The task will be performed at the specified interval (in hours).
  - **Daily** – The task will run each day at the specified time.
  - **Weekly** – The task will run once or more times a week, on the selected day(s) and time.
  - **Event triggered** – The task will be performed on a specified event.
4. Depending on the timing option you choose in the previous step, one of the following dialog windows will be displayed:
  - **Once** – The task will be performed at the predefined date and time.
  - **Repeatedly** – The task will be performed at the specified time interval.
  - **Daily** – The task will run repeatedly each day at the specified time.
  - **Weekly** – The task will be run on the selected day and time.
5. If the task could not be run at the predefined time, you can specify when it will be performed again:
  - Wait until the next scheduled time
  - Run the task as soon as possible
  - Run the task immediately if the time since the last task execution exceeds -- hours
6. In the last step you can review the task to be scheduled. Click **Finish** to apply the task.

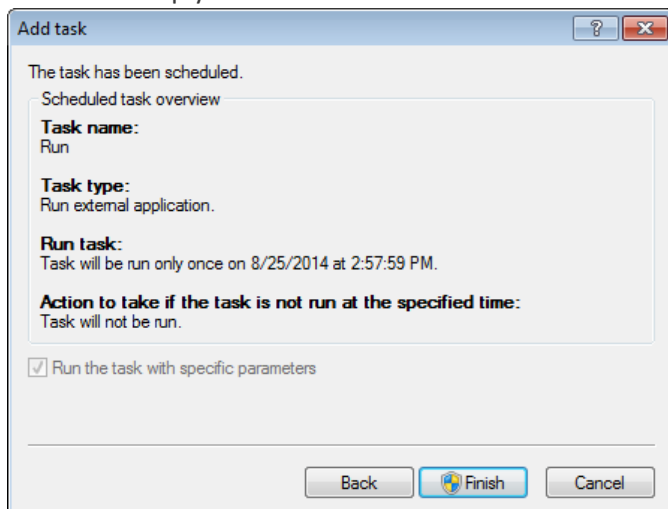

### 4.6.3 Protection statistics

To view a graph of statistical data related to ESET Smart Security's protection modules, click **Tools > Protection statistics**. Select the desired protection module from the **Statistics** drop-down menu to see the corresponding graph and legend. If you mouse over an item in the legend, only the data for that item will display in the graph.


The following statistic graphs are available:

- **Antivirus and Antispyware protection** – Displays the number of infected and cleaned objects.
- **File system protection** – Only displays objects that were read or written to the file system.
- **Email client protection** – Only displays objects that were sent or received by email clients.
- **Web access and Anti-Phishing protection** – Only displays objects downloaded by web browsers.
- **Email client antispam protection** – Displays the history of antispam statistics since the last startup.

Below the statistics graphs, you can see the number of total scanned objects, latest scanned object and the statistics timestamp. Click **Reset** to clear all statistics information.

### 4.6.4 Watch activity

To see the current **File system activity** in graph form, click **Tools > Watch activity**. At the bottom of the graph is a timeline that records file system activity in real-time based on the selected time span. To change the time span, click **Step: 1...** located at the bottom-right of the window.

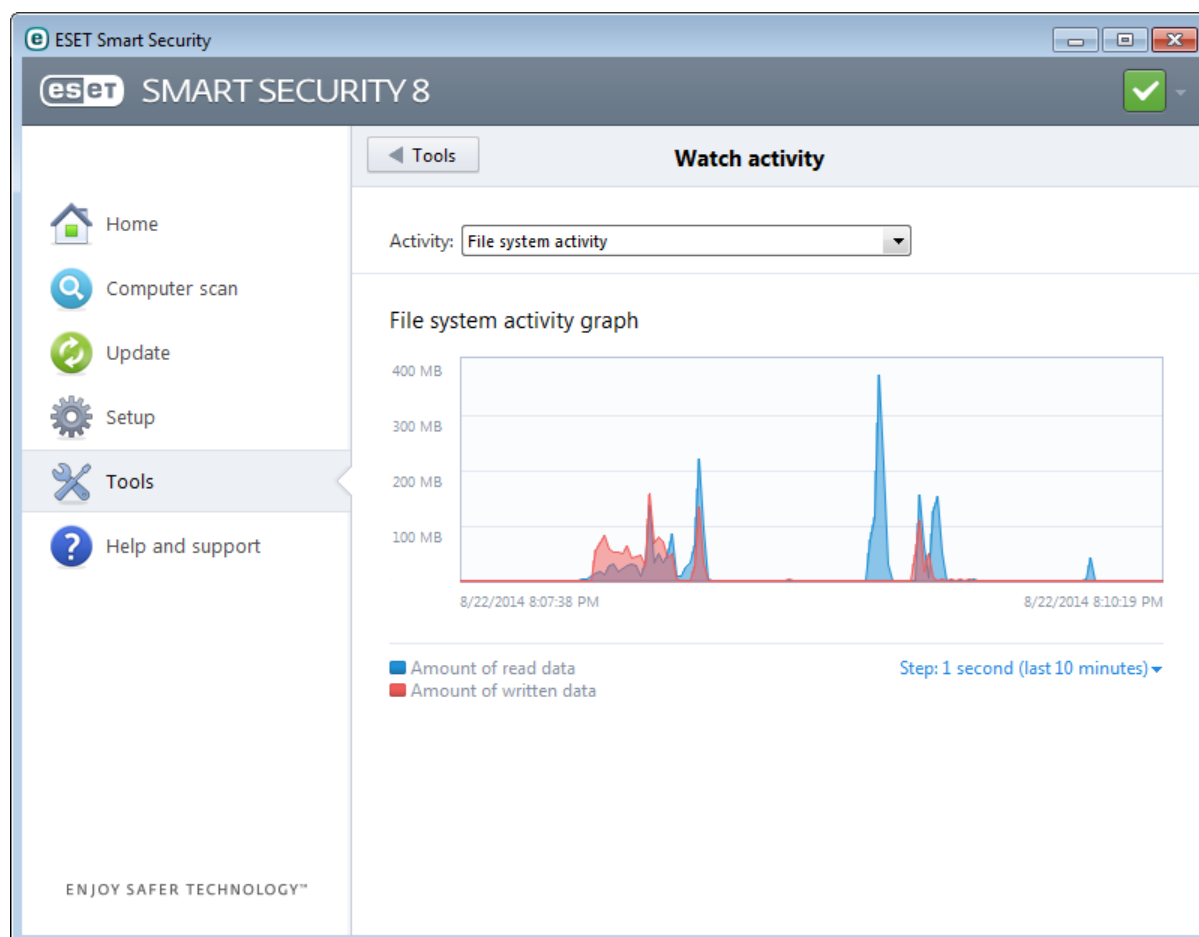

The following options are available:

- **Step: 1 second (last 10 minutes)** – The graph refreshes every second and the timeline covers the last 10 minutes
- **Step: 1 minute (last 24 hours)** – The graph is refreshed every minute and the timeline covers the last 24 hours
- **Step: 1 hour (last month)** – The graph is refreshed every hour and the timeline covers the last month
- **Step: 1 hour (selected month)** – The graph is refreshed every hour and the timeline covers the last X selected months

The vertical axis of the **File system activity graph** represents read data (blue) and written data (red). Both values are



given in KB (kilobytes)/MB/GB. If you mouse over either read data or written data in the legend below the graph, the graph will only display data for that activity type.

You can also select **Network activity** from the **Activity** drop-down menu. The graph display and options for **File system activity** and **Network activity** are the same except that the latter displays received data (red) and sent data (blue).

#### 4.6.5 ESET SysInspector

[ESET SysInspector](#) is an application that thoroughly inspects your computer and gathers detailed information about system components such as installed drivers and applications, network connections or important registry entries and assesses the risk level of each component. This information can help determine the cause of suspicious system behavior that may be due to software or hardware incompatibility or malware infection.

The SysInspector window displays the following information about created logs:

- **Time** – The time of log creation.
- **Comment** – A short comment.
- **User** – The name of the user who created the log.
- **Status** – The status of log creation.

The following actions are available:

- **Compare** – Compares two existing logs.
- **Create...** – Creates a new log. Please wait until the ESET SysInspector log is complete (**Status** shown as Created).
- **Delete** – Removes selected logs from the list.

After right-clicking one or more selected logs, the following options are available from the context menu:

- **Show** – Opens the selected log in ESET SysInspector (same function as double-clicking a log).
- **Delete all** – Deletes all logs.
- **Export...** – Exports the log to an *.xml* file or zipped *.xml*.

#### 4.6.6 ESET Live Grid

ESET Live Grid (built on the ESET ThreatSense.Net advanced early warning system) utilizes data that ESET users have submitted worldwide and sends it to the ESET Virus Lab. By providing suspicious samples and metadata from the wild, ESET Live Grid enables us to react immediately to needs of our customers and keep ESET responsive to the latest threats. Read more about ESET Live Grid in the [glossary](#).

A user can check the reputation of [running processes](#) and files directly from the program's interface or contextual menu with additional information available from ESET Live Grid. There are two options:

1. You can choose not to enable ESET Live Grid. You will not lose any functionality in the software, but, in some cases, ESET Smart Security may respond faster to new threats than virus signature database update.
2. You can configure ESET Live Grid to submit anonymous information about new threats and where the new threatening code is contained. This file can be sent to ESET for detailed analysis. Studying these threats will help ESET update its threat detection capabilities.

ESET Live Grid will collect information about your computer related to newly-detected threats. This information may include a sample or copy of the file in which the threat appeared, the path to that file, the filename, the date and time, the process by which the threat appeared on your computer and information about your computer's operating system.

By default, ESET Smart Security is configured to submit suspicious files to the ESET Virus Lab for detailed analysis. Files with certain extensions such as *.doc* or *.xls* are always excluded. You can also add other extensions if there are particular files that you or your organization wants to avoid sending.

The ESET Live Grid setup menu provides several options for enabling / disabling ESET Live Grid, which serves to submit suspicious files and anonymous statistical information to ESET labs. It is accessible from the Advanced setup tree by clicking **Tools > ESET Live Grid**.

**Participate in ESET Live Grid (recommended)** – Enables / disables ESET Live Grid, which serves to submit suspicious files and anonymous statistical information to ESET labs.

**Do not submit statistics** – Select this option if you do not want to submit anonymous information gathered by ESET Live Grid about your computer. This information is related to newly detected threats, which may include the name of the infiltration, information about the date and time it was detected, the version of ESET Smart Security, information about your computer's operating system version and Location settings. The statistics are normally delivered to ESET servers once or twice a day.

**Do not submit files** – Suspicious files, resembling infiltrations in their content or behavior, are not submitted to ESET for analysis by means of ESET Live Grid technology.

**Advanced setup...** – Opens a window with additional ESET Live Grid settings.

If you have used ESET Live Grid before and have disabled it, there may still be data packages to send. Even after deactivating, such packages will be sent to ESET on the next occasion. Afterwards, no further packages will be created.

#### 4.6.6.1 Suspicious files

The **Files** tab in ESET Live Grid advanced setup allows you to configure how threats are submitted to ESET Virus Labs for analysis.

If you find a suspicious file, you can submit it for analysis to our ThreatLabs. If it is a malicious application, its detection will be added to the next virus signature update.


**Exclusion filter** – The Exclusion filter allows you to exclude certain files/folders from submission. The files listed will never be sent to ESET's labs for analysis, even if they contain a suspicious code. For example, it may be useful to exclude files that may carry confidential information, such as documents or spreadsheets. The most common file types are excluded by default (.doc, etc.). You can add to the list of excluded files if desired.

**Contact email (optional)** – Your contact email can be included with any suspicious files and may be used to contact you if further information is required for analysis. Please note that you will not receive a response from ESET unless more information is needed.

Select **Enable logging** to create an event log to record file and statistical information submissions. This will enable logging to the [Event log](#) when files or statistics are sent.

### 4.6.7 Running processes

Running processes displays the running programs or processes on your computer and keeps ESET immediately and continuously informed about new infiltrations. ESET Smart Security provides detailed information on running processes to protect users with [ESET Live Grid](#) technology.

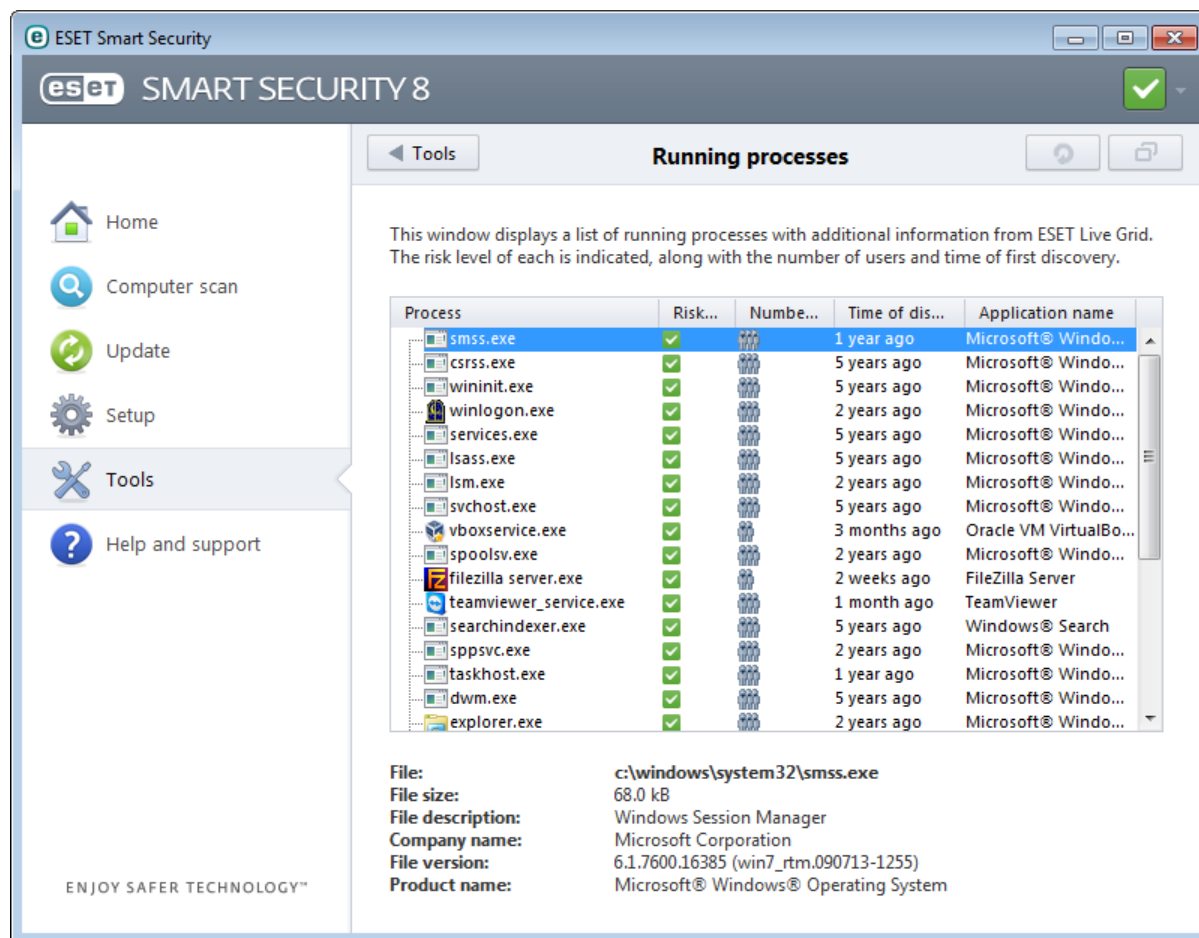

**Process** – Image name of the program or process that is currently running on your computer. You can also use the Windows Task Manager to see all running processes on your computer. You can open Task Manager by right-clicking an empty area on the taskbar and then clicking **Task Manager**, or by pressing Ctrl+Shift+Esc on your keyboard.

**Risk level** – In most cases, ESET Smart Security and ESET Live Grid technology assign risk levels to objects (files, processes, registry keys, etc.) using a series of heuristic rules that examine the characteristics of each object and then weigh their potential for malicious activity. Based on these heuristics, objects are assigned a risk level from **1 – Fine (green)** to **9 – Risky (red)**.

**NOTE:** Known applications marked as **Fine (green)** are definitely clean (whitelisted) and will be excluded from scanning, as this will improve the scanning speed of on-demand computer scan or Real-time file system protection on your computer.

**Number of users** – The number of users that use a given application. This information is gathered by ESET Live Grid technology.

**Time of discovery** – Period of time since the application was discovered by ESET Live Grid technology.

**NOTE:** When an application is marked as **Unknown (orange)** security level, it is not necessarily malicious software. Usually it is just a newer application. If you are not sure about the file, you can [submit file for analysis](#) to the ESET Virus Lab. If the file turns out to be a malicious application, its detection will be added to one of the upcoming updates.


**Application name** – The given name of a program or process.

**Open in a new window** – The running processes information will be opened in a new window.

By clicking a given application at the bottom, the following information will appear at the bottom of the window:


- **File** – Location of an application on your computer.
- **File size** – File size in B (bytes).
- **File description** – File characteristics based on the description from the operating system.
- **Company name** – Name of the vendor or application process.
- **File version** – Information from the application publisher.
- **Product name** – Application name and/or business name.

**NOTE:** Reputation can also be checked on files that do not act as running programs/processes – mark files you want to check, right-click them and select **Advanced options > Check File Reputation using ESET Live Grid**.

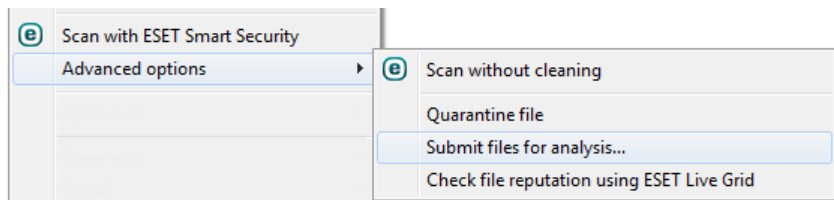

#### 4.6.8 Network connections

In the Network connections section, you can see a list of active and pending connections. This helps you control all applications establishing outgoing connections.

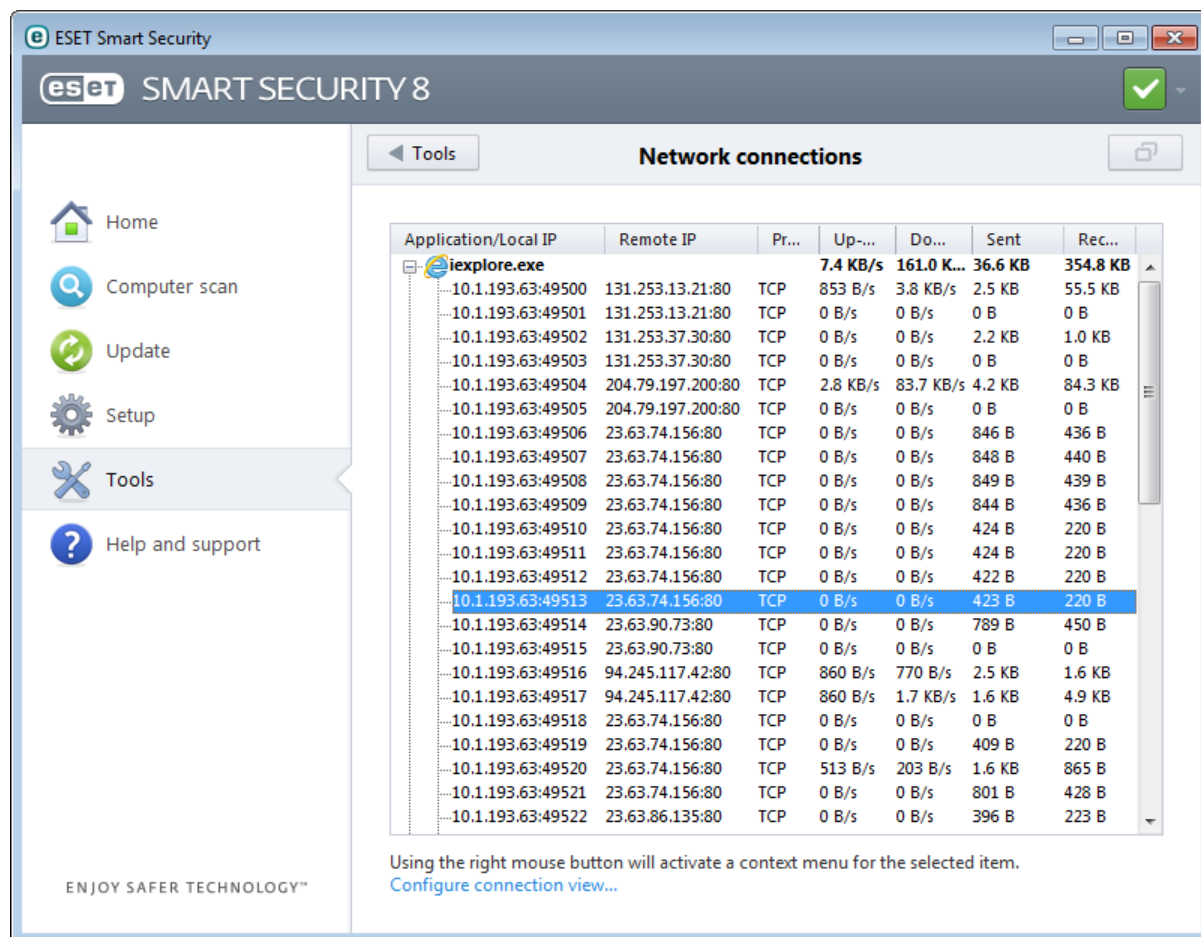

The first line displays the name of the application and its data transfer speed. To see the list of connections made by the application (and also more detailed information), click +.

**Application/Local IP** – Name of application, local IP addresses and communication ports.

**Remote IP** – IP address and port number of the particular remote computer.

**Protocol** – Transfer protocol used.

**Up-Speed/Down-Speed** – The current speed of outgoing and incoming data.

**Sent/Received** – Amount of data exchanged within the connection.

**Open in a new window** – Displays information in a separate window.

The **Configure connection view...** option in the [Network connections screen](#) enters the advanced setup structure for this section, enabling you to modify connection view options:

**Resolve host names** – If possible, all network addresses are displayed in DNS format, not in the numeral IP address format.

**Only show TCP protocol connections** – The list only displays connections which belong to the TCP protocol suite.

**Show connections with open ports on which the computer is listening** – Select this option to only display connections, where no communication is currently established, but the system has opened a port and is waiting for a connection.

**Also show connection within the computer** – Select this option to only show connections, where the remote side is a local system – so-called *localhost* connections.

Right-click on a connection to see additional options that include:

**Deny communication for the connection** – Terminates the established communication. This option is available only after clicking on an active connection.

**Show details** – Choose this option to display detailed information about the selected connection.

**Refresh speed** – Choose the frequency to refresh the active connections.

**Refresh now** – Reloads the Network connections window.

The following options are available only after clicking on an application or process, not an active connection:


**Temporarily deny communication for the process** – Rejects current connections for the given application. If a new connection is established, the firewall uses a predefined rule. A description of the settings can be found in the [Rules and zones](#) section.

**Temporarily allow communication for the process** – Permits current connections for the given application. If a new connection is established, the firewall uses a predefined rule. A description of the settings can be found in the [Rules and zones](#) section.

## 4.6.9 Quarantine

The main function of the quarantine is to safely store infected files. Files should be quarantined if they cannot be cleaned, if it is not safe or advisable to delete them or if they are being falsely detected by ESET Smart Security.

You can choose to quarantine any file. This is advisable if a file behaves suspiciously but is not detected by the antivirus scanner. Quarantined files can be submitted for analysis to the ESET Virus Lab.

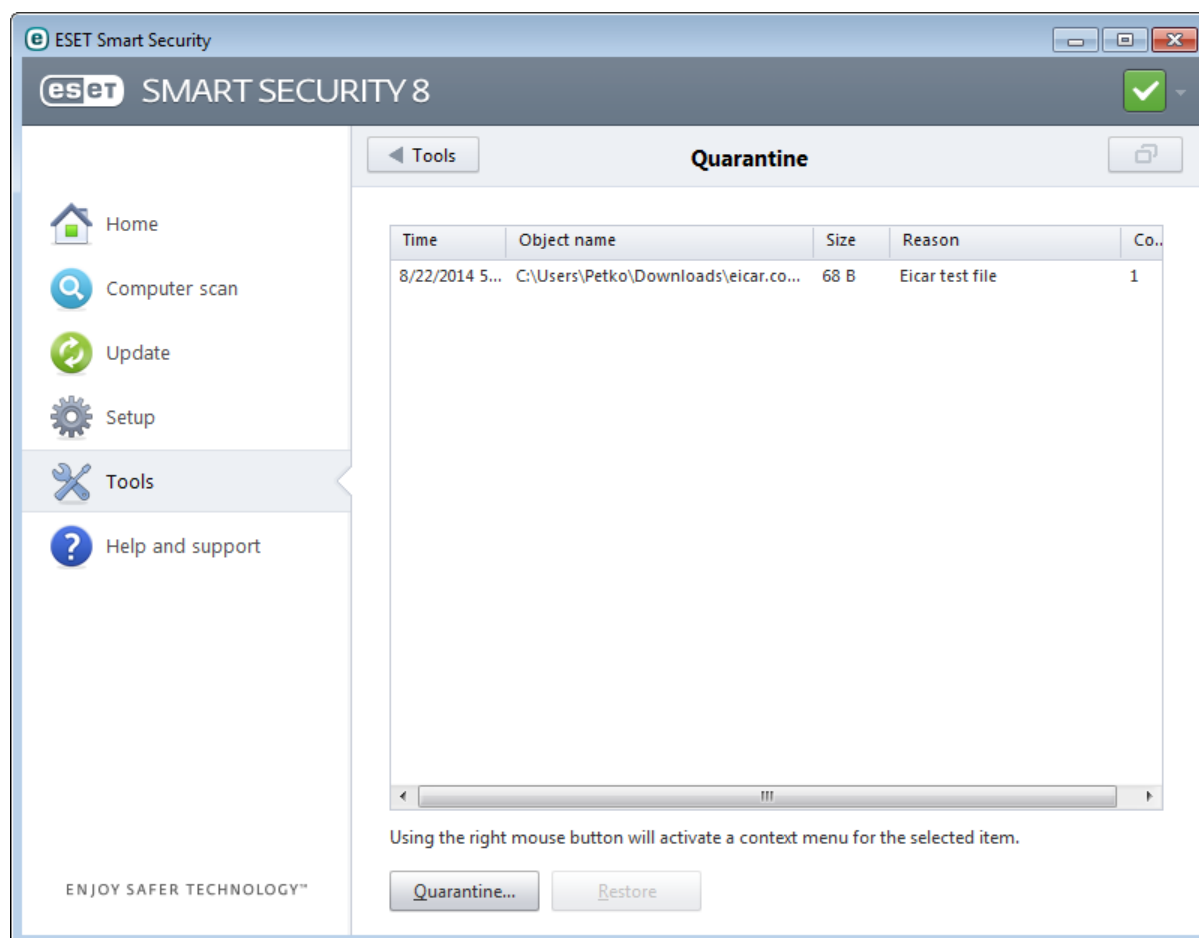

Files stored in the quarantine folder can be viewed in a table that displays the date and time of quarantine, the path to the original location of the infected file, its size in bytes, reason (for example, object added by user), and number of threats (for example, if it is an archive containing multiple infiltrations).

### Quarantining files

ESET Smart Security automatically quarantines deleted files (if you have not canceled this option in the alert window). If desired, you can quarantine any suspicious file manually by clicking **Quarantine...** If this is the case, the original file will not be removed from its original location. The context menu can also be used for this purpose; right-click in the **Quarantine** window and select **Quarantine....**

### Restoring from Quarantine

Quarantined files can also be restored to their original location. Use the **Restore** feature for this purpose, which is available from the context menu by right-clicking a given file in the Quarantine window. If a file is marked as potentially unwanted application, the **Restore and exclude from scanning** option is enabled. Read more about this type of application in the [glossary](#). The context menu also offers the **Restore to...** option which allows you to restore a file to a location other than the one from which it was deleted.

**NOTE:** If the program quarantined a harmless file by mistake, please [exclude the file from scanning](#) after restoring and send the file to ESET Customer Care.

### Submitting a file from the Quarantine

If you have quarantined a suspicious file that was not detected by the program, or if a file was determined to be

infected incorrectly (for example, by heuristic analysis of the code) and subsequently quarantined, please send the file to the ESET Virus Lab. To submit a file from quarantine, right-click the file and select **Submit for analysis** from the context menu.

#### 4.6.10 Proxy server setup

In large LAN networks, the connection of your computer to the Internet can be mediated by a proxy server. If this is the case, the following settings need to be defined. Otherwise the program will not be able to update itself automatically. In ESET Smart Security, proxy server setup is available in two different sections within the Advanced setup tree.

First, proxy server settings can be configured in **Advanced setup** under **Tools > Proxy server**. Specifying the proxy server at this level defines global proxy server settings for all of ESET Smart Security. Parameters here will be used by all modules requiring connection to the Internet.

To specify proxy server settings for this level, select the **Use proxy server** check box and then enter the address of the proxy server into the **Proxy server** field, along with the **Port** number of the proxy server.


If communication with the proxy server requires authentication, select the **Proxy server requires authentication** check box and enter a valid **Username** and **Password** into the respective fields. Click **Detect proxy server** to automatically detect and populate proxy server settings. The parameters specified in Internet Explorer will be copied.

**NOTE:** This feature does not retrieve authentication data (username and password); it must be supplied by you.

Proxy server settings can also be established within Advanced update setup (**Update** branch of the **Advanced setup** tree). This setting applies for the given update profile and is recommended for laptops that often receive virus signature updates from different locations. For more information about this setting, see the section [Advanced update setup](#).

#### 4.6.11 Alerts and notifications

ESET Smart Security supports sending emails if an event with the selected verbosity level occurs. Click the **Send event notifications by email** check box to enable this feature and activate email notifications.

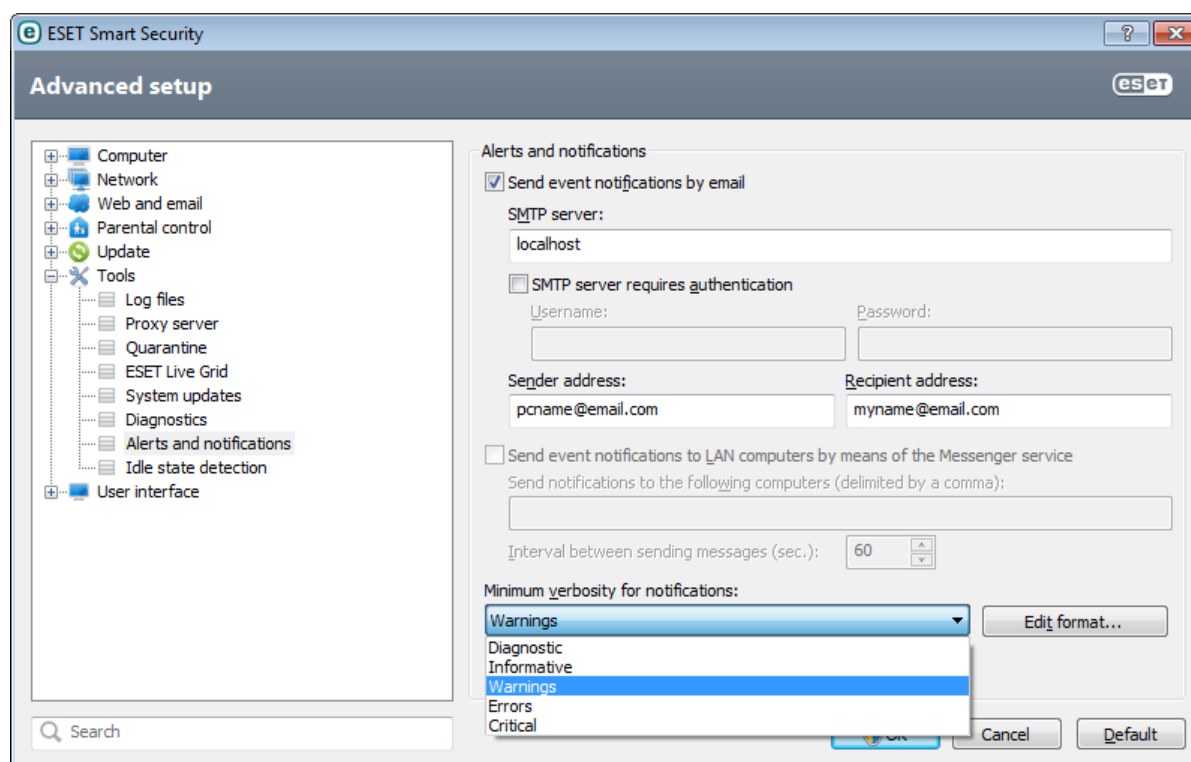

**SMTP server** – The SMTP server used for sending notifications.

**Note:** SMTP servers with SSL/TLS encryption are not supported by ESET Smart Security.

**SMTP server requires authentication** – If the SMTP server requires authentication, these fields should be filled in with a valid username and password granting access to the SMTP server.

**Sender address** – This field specifies the sender address which will be displayed in the header of notification emails.

**Recipient address** – This field specifies the recipient address which will be displayed in the header of notification emails.

**Send event notifications to LAN computers by means of Messenger service** – Select this check box to send messages to LAN computers via the Windows® messaging service.

**Send notifications to the following computers (delimited by a comma)** – Enter the names of computers that will receive notifications via the Windows® messaging service.

**Interval between sending messages (sec.)** – To change the length of the interval between notifications sent via LAN, enter the desired time interval in seconds.

**Minimum verbosity for notifications** – Specifies the minimum verbosity level of notifications to be sent.

**Edit format...** – Communications between the program and a remote user or system administrator are done via emails or LAN messages (using the Windows® messaging service). The default format of the alert messages and notifications will be optimal for most situations. In some circumstances, you may need to change the message format – click [Edit format...](#)

#### 4.6.11.1 Message format

Here you can set up the format of event messages that are displayed on remote computers.

Threat alert and notification messages have a predefined default format. We advise against changing this format. However, in some circumstances (for example, if you have an automated email processing system), you may need to change the message format.

Keywords (strings separated by % signs) are replaced in the message by the actual information as specified. The following keywords are available:

- **%TimeStamp%** – Date and time of the event
- **%Scanner%** – Module concerned
- **%ComputerName%** – Name of the computer where the alert occurred
- **%ProgramName%** – Program that generated the alert
- **%InfectedObject%** – Name of infected file, message, etc
- **%VirusName%** – Identification of the infection
- **%ErrorDescription%** – Description of a non-virus event

The keywords **%InfectedObject%** and **%VirusName%** are only used in threat warning messages, and **%ErrorDescription%** is only used in event messages.

**Use local alphabetic characters** – Converts an email message to the ANSI character encoding based upon Windows Regional settings (e.g. windows-1250). If you leave this deselected, a message will be converted and encoded in ACSII 7-bit (for example "á" will be changed to "a" and an unknown symbol to "?").

**Use local character encoding** – The email message source will be encoded to Quoted-printable (QP) format which uses ASCII characters and can correctly transmit special national characters by email in 8-bit format (άέίόύ).



#### 4.6.12 Submission of samples for analysis

The file submission dialog enables you to send a file or a site to ESET for analysis and can be found in **Tools > Submit sample for analysis**. If you find a suspiciously behaving file on your computer or suspicious site on the Internet, you can submit it to the ESET Virus Lab for analysis. If the file turns out to be a malicious application or website, its detection will be added to an upcoming update.

Alternatively, you can submit the file by email. If you prefer this option, pack the file(s) using WinRAR/ZIP, protect the archive with the password "infected" and send it to [samples@eset.com](mailto:samples@eset.com). Please remember to use a descriptive subject and enclose as much information about the file as possible (for example, the website you downloaded it from).

**NOTE:** Before submitting a file to ESET, make sure it meets one or more of the following criteria:

- the file is not detected at all
- the file is incorrectly detected as a threat

You will not receive a response unless further information is required for analysis.

Select the description from the **Reason for submitting the file** drop-down menu that best fits your message:

- **Suspicious file**
- **Suspicious site** (a website that is infected by any malware),
- **False positive file** (file that is detected as an infection but are not infected),
- **False positive site**
- **Other**

**File/Site** – The path to the file or website you intend to submit.

**Contact email** – This contact email is sent along with suspicious files to ESET and may be used to contact you if further information is required for analysis. Entering a contact email is optional. You will not get a response from ESET unless more information is required, since each day our servers receive tens of thousands of files, making it impossible to reply to all submissions.

#### 4.6.13 System updates

The Windows update feature is an important component of protecting users from malicious software. For this reason, it is vital that you install Microsoft Windows updates as soon as they become available. ESET Smart Security notifies you about missing updates according to the level you specify. The following levels are available:

- **No updates** – No system updates will be offered for download.
- **Optional updates** – Updates marked as low priority and higher will be offered for download.
- **Recommended updates** – Updates marked as common and higher will be offered for download.
- **Important updates** – Updates marked as important and higher will be offered for download.
- **Critical updates** – Only critical updates will be offered for download.

Click **OK** to save changes. The System updates window will be displayed after status verification with the update server. Accordingly, the system update information may not be immediately available after saving changes.

### 4.7 User interface

The **User interface** section allows you to configure the behavior of the program's Graphical user interface (GUI).

Using the [Graphics](#) tool, you can adjust the program's visual appearance and effects used.

By configuring [Alerts and notifications](#), you can change the behavior of detected threat alerts and system notifications. These can be customized to fit your needs.

If you choose not to display some notifications, they will be displayed in the [Hidden notification windows](#) area. Here you can check their status, show more details or remove them from this window.

To provide maximum security of your security software, you can prevent any unauthorized changes by protecting the settings by a password using the [Access setup](#) tool.

The [Context menu](#) is displayed after right-clicking an object. Use this tool to integrate ESET Smart Security control elements into the context menu.

#### 4.7.1 Graphics

User interface configuration options in ESET Smart Security allow you to adjust the working environment to fit your needs. These configuration options are accessible in the Advanced setup tree by expanding **User interface** and clicking **Graphics**.

In the **User interface elements** section, the **Graphical user interface** option should be disabled if the graphical elements slow the performance of your computer or cause other problems. The graphical interface may also need to be turned off for visually impaired users, as it may conflict with special applications that are used for reading text displayed on the screen.

If you want to deactivate the ESET Smart Security splash-screen, deselect **Show splash-screen at startup**.

Enable **Select active control element** to cause the system to highlight any element which is currently under the active area of the mouse cursor. The highlighted element will be activated after a mouse click.

To enable the use of animated icons that display the progress of various operations, select **Use animated icons for progress indication**.

If you want to have ESET Smart Security play a sound when important events occur during a scan, for example when a threat is discovered or when the scan has finished, select **Use sound signal**.

#### 4.7.2 Alerts and notifications

The **Alerts and notifications** section under **User interface** allows you to configure how threat alerts and system notifications (e.g. successful update messages) are handled by ESET Smart Security. You can also set display time and the level of transparency of system tray notifications ( applies only to the systems supporting system tray notifications).

Deselect the check box next to **Display alerts** to cancel all alert windows. This is only suitable in certain situations. For most users we recommend that this option be left enabled (default).

Notifications on the Desktop are informative only, and do not require or offer user interaction. They are displayed in the notification area at the bottom right corner of the screen. To activate Desktop notifications, select **Display notifications on desktop** . More detailed options such as notification display time and window transparency can be modified by clicking **Configure notifications**. To preview the behavior of notifications, click **Preview**. To suppress notifications when running a full-screen application, select **Do not display notifications when running applications in full-screen mode**.

To close pop-up windows automatically after a certain period of time, select **Close message boxes automatically after (sec.)**. If they are not closed manually, alert windows are automatically closed after the specified time period elapses.

Click **Advanced setup** to access additional **Alerts and notification** setup options.

##### 4.7.2.1 Advanced setup

From the **Minimum verbosity of events to display** drop-down menu, you can select the starting severity level of alerts and notification to be displayed.

- **Diagnostic** – Logs information needed to fine-tune the program and all records above.
- **Informative** – Records informative messages, including successful update messages, plus all records above.
- **Warnings** – Records critical errors and warning messages.
- **Errors** – Errors such as *"Error downloading file"* and critical errors will be recorded.
- **Critical** – Logs only critical errors (error starting Antivirus protection, Personal firewall, etc...).

The last feature in this section allows you to configure the destination of notifications in a multi-user environment. The **On multi-user systems, display notifications on the screen of this user** field specifies a user who will receive system and other notifications on systems allowing multiple users to connect at the same time. Normally, this

would be a system or network administrator. This option is especially useful for terminal servers, provided that all system notifications are sent to the administrator.

### 4.7.3 Hidden notification windows

If **Do not show this message again** is selected for any notification window (alert) that was previously displayed that notification, it will appear in the list of hidden notification windows. Actions that are now executed automatically are displayed in the **Confirm** column.

**Show** – Shows a preview of notification windows that are currently not displayed and for which an automatic action is configured.

**Remove** – Removes items from the **Hidden messageboxes** list. All notification windows removed from the list will be displayed again.


### 4.7.4 Access setup

ESET Smart Security settings are a crucial part of your security policy. Unauthorized modifications can potentially endanger the stability and protection of your system. To password protect your setup parameters, from the main menu click **Setup > Enter advanced setup... > User interface > Access setup**, select **Password protect settings** and click **Set password**. Note that your password is case-sensitive.

**Require full administrator rights for limited administrator accounts** – Select this to prompt the current user (if he or she does not have administrator rights) to enter an administrator username and password when modifying certain system parameters (similar to the User Account Control (UAC) in Windows Vista and Windows 7). Such modifications include disabling protection modules or turning off the firewall. On Windows XP systems where UAC is not running, users will have the **Require administrator rights (system without UAC support)** option available.

### 4.7.5 Program menu


Some of the most important setup options and features are available in the main program menu.

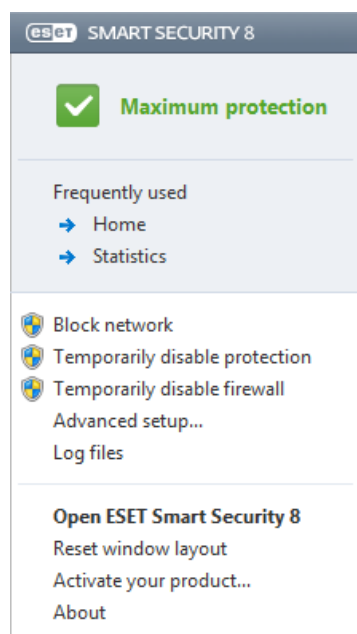

**Frequently used** – Displays the most frequently used parts of ESET Smart Security. You can quickly access these from the program menu.

**Temporarily disable protection** – Displays the confirmation dialog box that disables [Antivirus and antispyware protection](#), which guards against malicious system attacks by controlling file, web and email communication. Select **Do not ask again** to avoid this message in the future.

The **Time interval** drop-down menu represents the period of time that Antivirus and antispyware protection will be disabled for.

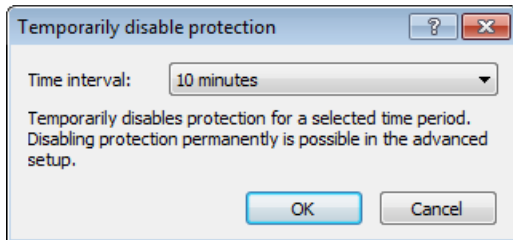

**Block network** – Personal firewall will block all outgoing / incoming network and internet traffic.

**Temporarily disable firewall** – Switches the firewall to an inactive state. See the chapter [System integration of Personal firewall](#) for more information.

**Advanced setup...** – Select this option to enter the **Advanced setup** tree. There are also other ways to open Advanced setup, such as pressing the F5 key or navigating to **Setup > Enter advanced setup...**

**Log files** – [Log files](#) contain information about important program events that have occurred and provide an overview of detected threats.

**Reset window layout** – Resets the ESET Smart Security's window to its default size and position on the screen.

**Activate your product...** – Select this option if you have not yet activated your ESET security product, or to reenter product activation credentials after renewing your license.

**About** – Provides system information, details about the installed version of ESET Smart Security and the installed program modules. Here you can also find the license expiration date and information about the operating system and system resources.

#### 4.7.6 Context menu


The context menu is displayed after right-clicking an object. The menu lists all of the actions that you can perform on an object.

It is possible to integrate ESET Smart Security control elements into the context menu. More detailed setup options for this functionality are available in the Advanced setup tree under **User Interface > Context menu**.

**Integrate into the context menu** – Integrate the ESET Smart Security control elements into the context menu.

The following options are available in the **Menu type** drop-down menu:

- **Full (scan first)** – Activates all context menu options; the main menu will display **Scan without cleaning with ESET Smart Security** as the first option and **Scan and clean** as the second level item.
- **Full (clean first)** – Activates all context menu options; the main menu will display **Scan with ESET Smart Security** as the first option and **Scan without cleaning** as the second level item.

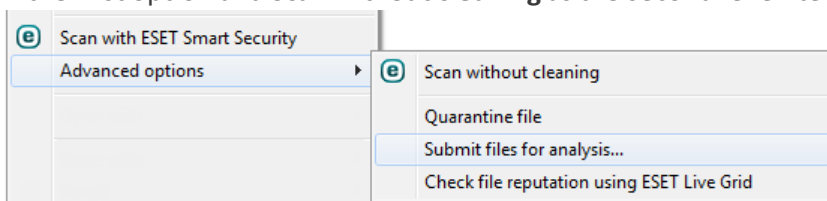

- **Only scan** – Only **Scan without cleaning with ESET Smart Security** will be displayed in the context menu.
- **Only clean** – Only **Scan with ESET Smart Security** will be displayed in the context menu.

## 5. Advanced user

### 5.1 Profile manager

Profile manager is used in two places within ESET Smart Security – in the **On-demand computer scan** section and in the **Update** section.

#### Computer scan

Your preferred scan parameters can be saved for future scanning. We recommend that you create a different profile (with various scan targets, scan methods and other parameters) for each regularly used scan.

To create a new profile, open the Advanced setup window (F5) and click **Computer > Antivirus and antispyware > On-demand computer scan > Profiles....** The **Configuration profiles** window includes the **Selected profile** drop-down menu that lists existing scan profiles and the option to create a new one. To help you create a scan profile to fit your needs, see the [ThreatSense engine parameters setup](#) section for a description of each parameter of the scan setup.

**Example:** Suppose that you want to create your own scan profile and the Smart scan configuration is partially suitable, but you don't want to scan runtime packers or potentially unsafe applications and you also want to apply **Strict cleaning**. In the **Configuration profiles** window, click **Add....** Enter the name of your new profile in the **Profile name** field and select **Smart scan** from the **Copy settings from profile** drop-down menu. Adjust the remaining parameters to meet your requirements and save your new profile.

#### Update

The profile editor in the Update setup section allows users to create new update profiles. Create and use your own custom profiles (other than the default **My profile**) only if your computer uses multiple means to connect to update servers.

For example, a laptop that normally connects to a local server (Mirror) in the local network but downloads updates directly from ESET update servers when disconnected from the local network (business trip) might use two profiles: the first one for connecting to the local server; the other one for connecting to ESET servers. Once these profiles are configured, navigate to **Tools > Scheduler** and edit the update task parameters. Designate one profile as primary and the other as secondary.

**Selected profile** – The currently used update profile. To change it, choose a profile from the drop-down menu.

**Add...** – Create new update profiles.

The bottom part of the window lists existing profiles.

### 5.2 Keyboard shortcuts

Key shortcuts that can be used when working with ESET Smart Security include:

Ctrl+G	disables GUI in the product
Ctrl+I	opens the ESET SysInspector page
Ctrl+L	opens the Log files page
Ctrl+S	opens the Scheduler page
Ctrl+Q	opens the Quarantine page
Ctrl+U	opens a Username and Password setup
Ctrl+R	resets window to its default size and position on the screen

For better navigation in your ESET product, the following keyboard shortcuts can be used:

F1	opens help pages
F5	opens Advanced setup
Up/Down	navigation in product through items
*	expands Advanced setup tree node
-	collapses Advanced setup tree nodes

TAB	moves the cursor in a window
Esc	closes the active dialog window

### 5.3 Diagnostics

Diagnostics provides application crash dumps of ESET processes (for example, *ekrn*). If an application crashes, a dump will be generated. This can help developers to debug and fix various ESET Smart Security problems. Two dump types are available:

- **Complete memory dump** – Records all the contents of system memory when the application stops unexpectedly. A complete memory dump may contain data from processes that were running when the memory dump was collected.
- **Minidump** – Records the smallest set of useful information that may help identify why the application crashed unexpectedly. This kind of dump file can be useful when space is limited. However, because of the limited information included, errors that were not directly caused by the thread that was running at the time of the problem may not be discovered by an analysis of this file.
- Select **Do not generate memory dump** (default) to disable this feature.

**Target directory** – Directory where the dump during the crash will be generated. Click ... to open this directory within a new *Windows explorer* window.

### 5.4 Import and export settings


You can import or export your customized ESET Smart Security .xml configuration file from the **Setup** menu.

Importing and exporting of configuration files is useful if you need to backup your current configuration of ESET Smart Security for use at a later time. The export settings option is also convenient for users who want to use their preferred configuration on multiple systems, they can easily import an .xml file to transfer these settings.

Importing a configuration is very easy. In the main program window click **Setup > Import and export settings...**, and then select **Import settings**. Enter the file name of the configuration file or click the ... button to browse for the configuration file you want to import.

The steps to export a configuration are very similar. In the main program window, click **Setup > Import and export settings...**. Select **Export settings** and enter the file name of the configuration file (i.e. *export.xml*). Use the browser to select a location on your computer to save the configuration file.

**Note:** You may encounter an error while exporting settings if you do not have enough rights to write the exported file to specified directory.

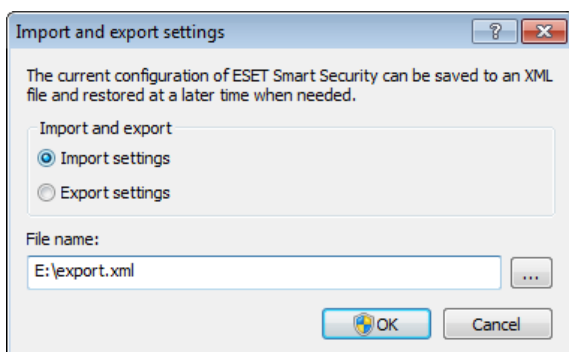

## 5.5 Idle state detection

Idle state detection settings can be configured in **Advanced setup** under **Tools > Idle state detection**. These settings specify a trigger for [Idle-state scanning](#), when:

- the screen saver is running,
- the computer is locked,
- a user logs off.

Use the check boxes for each respective state to enable or disable the different idle state detection triggers.

## 5.6 ESET SysInspector

### 5.6.1 Introduction to ESET SysInspector

ESET SysInspector is an application that thoroughly inspects your computer and displays gathered data in a comprehensive way. Information like installed drivers and applications, network connections or important registry entries can help you to investigate suspicious system behavior be it due to software or hardware incompatibility or malware infection.

You can access ESET SysInspector two ways: From the integrated version in ESET Security solutions or by downloading the standalone version (SysInspector.exe) for free from ESET's website. Both versions are identical in function and have the same program controls. The only difference is how outputs are managed. The standalone and integrated versions each allow you to export system snapshots to an *.xml* file and save them to disk. However, the integrated version also allows you to store your system snapshots directly in **Tools > ESET SysInspector** (except ESET Remote Administrator). For more information see section [ESET SysInspector as part of ESET Smart Security](#).

Please allow some time while ESET SysInspector scans your computer. It may take anywhere from 10 seconds up to a few minutes depending on your hardware configuration, operating system and the number of applications installed on your computer.


#### 5.6.1.1 Starting ESET SysInspector

To start ESET SysInspector, simply run the *SysInspector.exe* executable you downloaded from ESET's website. If you already have one of the ESET Security solutions installed, you can run ESET SysInspector directly from the Start Menu (click **Programs > ESET > ESET Smart Security**).

Please wait while the application inspects your system, which could take up to several minutes.

## 5.6.2 User Interface and application usage

For clarity the main program window is divided into four major sections – Program Controls located on the top of the main program window, Navigation window to the left, the Description window to the right and the Details window at the bottom of the main program window. The Log Status section lists the basic parameters of a log (filter used, filter type, is the log a result of a comparison etc.).

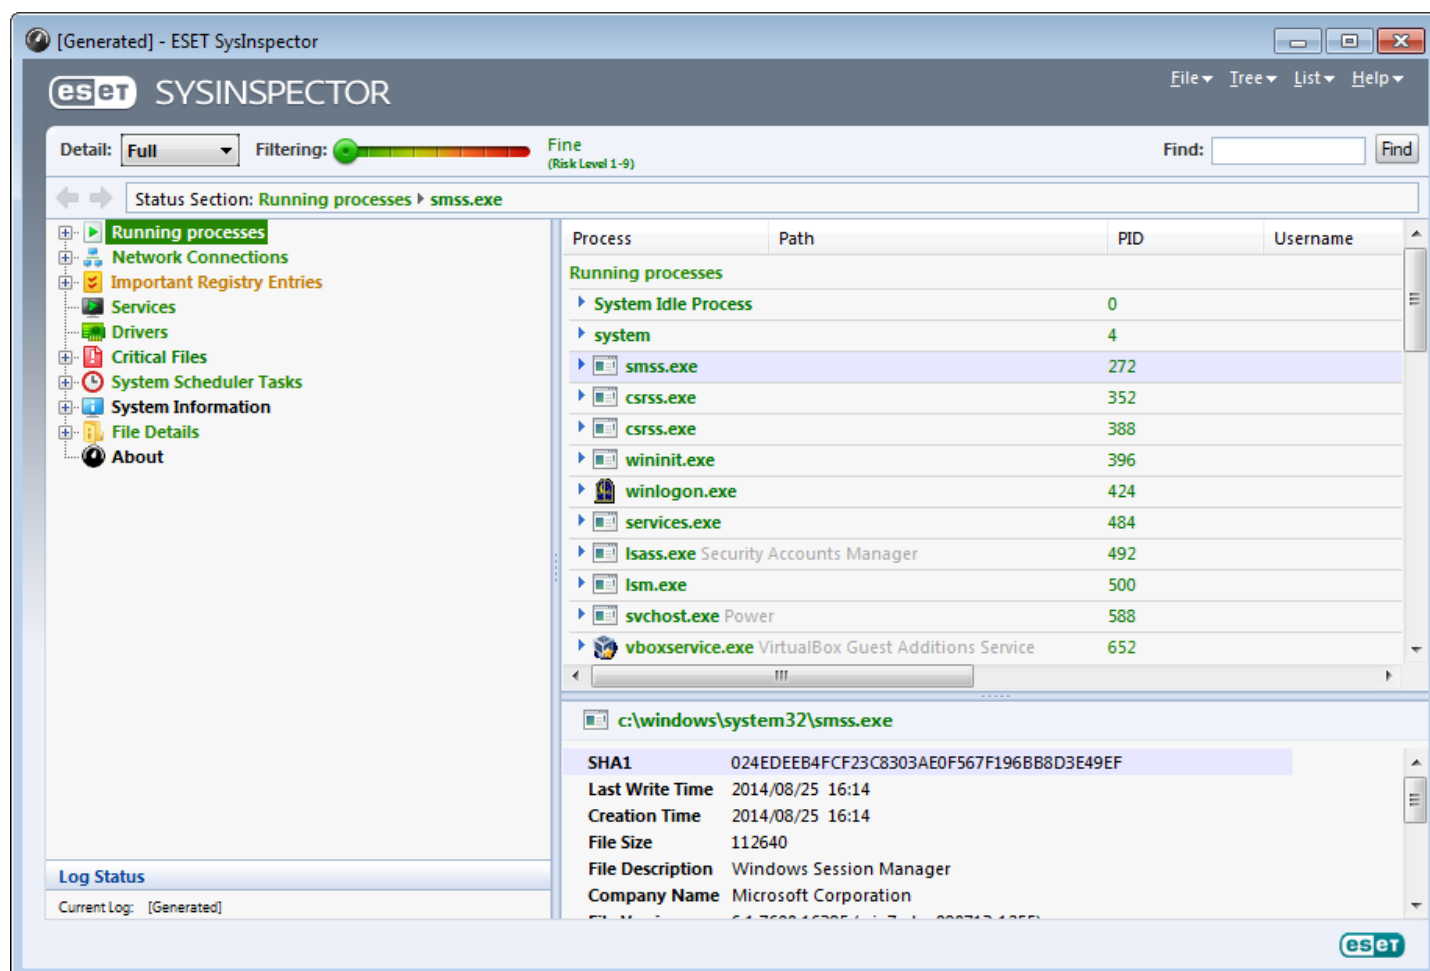

### 5.6.2.1 Program Controls

This section contains the description of all program controls available in ESET SysInspector.

#### File

By clicking **File** you can store your current system status for later investigation or open a previously stored log. For publishing purposes we recommend that you generate a log **Suitable for sending**. In this form, the log omits sensitive information (current user name, computer name, domain name, current user privileges, environment variables, etc.).

**NOTE:** You may open previously stored ESET SysInspector reports by dragging and dropping them into the main program window.

#### Tree

Enables you to expand or close all nodes and export selected sections to Service script.

#### List

Contains functions for easier navigation within the program and various other functions like finding information online.



## Help

Contains information about the application and its functions.

## Detail

This setting influences the information displayed in the main program window to make the information easier to work with. In "Basic" mode, you have access to information used to find solutions for common problems in your system. In the "Medium" mode, the program displays less used details. In "Full" mode, ESET SysInspector displays all the information needed to solve very specific problems.

## Filtering

Item filtering is best used to find suspicious files or registry entries in your system. By adjusting the slider, you can filter items by their Risk Level. If the slider is set all the way to the left (Risk Level 1), then all items are displayed. By moving the slider to the right, the program filters out all items less risky than current risk level and only display items which are more suspicious than the displayed level. With the slider all the way to the right, the program displays only known harmful items.

All items labeled as risk 6 to 9 can pose a security risk. If you are not using a security solution from ESET, we recommend that you scan your system with [ESET Online Scanner](#) if ESET SysInspector has found any such item. ESET Online Scanner is a free service.

**NOTE:** The Risk level of an item can be quickly determined by comparing the color of the item with the color on the **Risk Level** slider.

## Compare

When comparing two logs, you can choose to display all items, display only added items, display only removed items or to display only replaced items.

## Find

Search can be used to quickly find a specific item by its name or part of its name. The results of the search request are displayed in the Description window.

## Return



By clicking the back or forward arrows, you can return to previously displayed information in the Description window. You can use the backspace and space keys instead of clicking back and forward.

## Status section

Displays the current node in Navigation window.

**Important:** Items highlighted in red are unknown, which is why the program marks them as potentially dangerous. If an item is in red, it does not automatically mean that you can delete the file. Before deleting, please make sure that files are really dangerous or unnecessary.

### 5.6.2.2 Navigating in ESET SysInspector

ESET SysInspector divides various types of information into several basic sections called nodes. If available, you may find additional details by expanding each node into its subnodes. To open or collapse a node, double-click the name of the node or click  or  next to the name of the node. As you browse through the tree structure of nodes and subnodes in the Navigation window you may find various details for each node shown in the Description window. If you browse through items in the Description window, additional details for each item may be displayed in the Details window.

The following are the descriptions of the main nodes in the Navigation window and related information in the Description and Details windows.

## Running processes

This node contains information about applications and processes running at the time of generating the log. In the

Description window you may find additional details for each process such as dynamic libraries used by the process and their location in the system, the name of the application's vendor and the risk level of the file.

The Detail window contains additional information for items selected in the Description window such as the file size or its hash.

**NOTE:** An operating system is comprised of several important kernel components running constantly that provide basic and vital functions for other user applications. In certain cases, such processes are displayed in the tool ESET SysInspector with file path beginning with \??. Those symbols provide pre-launch optimization for those processes; they are safe for the system.

### **Network connections**

The Description window contains a list of processes and applications communicating over the network using the protocol selected in the Navigation window (TCP or UDP) along with the remote address where to which the application is connected to. You can also check the IP addresses of DNS servers.

The Detail window contains additional information for items selected in the Description window such as the file size or its hash.

### **Important Registry Entries**

Contains a list of selected registry entries which are often related to various problems with your system like those specifying startup programs, browser helper objects (BHO), etc.

In the Description window you may find which files are related to specific registry entries. You may see additional details in the Details window.

### **Services**

The Description window Contains a list of files registered as windows Services. You may check the way the service is set to start along with specific details of the file in the Details window.

### **Drivers**

A list of drivers installed in the system.

### **Critical files**

The Description window displays content of critical files related to the Microsoft windows operating system.

### **System Scheduler Tasks**

Contains a list of tasks triggered by Windows Task Scheduler at a specified time/interval.

### **System information**

Contains detailed information about hardware and software along with information about set environmental variables, user rights and system event logs.

### **File details**

A list of important system files and files in the Program Files folder. Additional information specific for the files can be found in the Description and Details windows.

### **About**

Information about version of ESET SysInspector and the list of program modules.

### 5.6.2.2.1 Keyboard shortcuts

Key shortcuts that can be used when working with the ESET SysInspector include:

#### File

Ctrl+O	opens existing log
Ctrl+S	saves created logs

#### Generate

Ctrl+G	generates a standard computer status snapshot
Ctrl+H	generates a computer status snapshot that may also log sensitive information

#### Item Filtering

1, O	fine, risk level 1-9 items are displayed
2	fine, risk level 2-9 items are displayed
3	fine, risk level 3-9 items are displayed
4, U	unknown, risk level 4-9 items are displayed
5	unknown, risk level 5-9 items are displayed
6	unknown, risk level 6-9 items are displayed
7, B	risky, risk level 7-9 items are displayed
8	risky, risk level 8-9 items are displayed
9	risky, risk level 9 items are displayed
-	decreases risk level
+	increases risk level
Ctrl+9	filtering mode, equal level or higher
Ctrl+0	filtering mode, equal level only

#### View

Ctrl+5	view by vendor, all vendors
Ctrl+6	view by vendor, only Microsoft
Ctrl+7	view by vendor, all other vendors
Ctrl+3	displays full detail
Ctrl+2	displays medium detail
Ctrl+1	basic display
BackSpace	moves one step back
Space	moves one step forward
Ctrl+W	expands tree
Ctrl+Q	collapses tree

#### Other controls

Ctrl+T	goes to the original location of item after selecting in search results
Ctrl+P	displays basic information about an item
Ctrl+A	displays full information about an item
Ctrl+C	copies the current item's tree
Ctrl+X	copies items
Ctrl+B	finds information about selected files on the Internet
Ctrl+L	opens the folder where the selected file is located
Ctrl+R	opens the corresponding entry in the registry editor
Ctrl+Z	copies a path to a file (if the item is related to a file)
Ctrl+F	switches to the search field
Ctrl+D	closes search results
Ctrl+E	run service script

#### Comparing

Ctrl+Alt+O	opens original / comparative log
------------	----------------------------------

Ctrl+Alt+R	cancels comparison
Ctrl+Alt+1	displays all items
Ctrl+Alt+2	displays only added items, log will show items present in current log
Ctrl+Alt+3	displays only removed items, log will show items present in previous log
Ctrl+Alt+4	displays only replaced items (files inclusive)
Ctrl+Alt+5	displays only differences between logs
Ctrl+Alt+C	displays comparison
Ctrl+Alt+N	displays current log
Ctrl+Alt+P	opens previous log

### Miscellaneous

F1	view help
Alt+F4	close program
Alt+Shift+F4	close program without asking
Ctrl+I	log statistics

### 5.6.2.3 Compare

The Compare feature allows the user to compare two existing logs. The outcome of this feature is a set of items not common to both logs. It is suitable if you want to keep track of changes in the system, a helpful tool for detecting malicious code.







After it is launched, the application creates a new log which is displayed in a new window. Click **File > Save log** to save a log to a file. Log files can be opened and viewed at a later time. To open an existing log, click **File > Open log**. In the main program window, ESET SysInspector always displays one log at a time.

The benefit of comparing two logs is that you can view a currently active log and a log saved in a file. To compare logs, click **File > Compare log** and choose **Select file**. The selected log will be compared to the active one in the main program windows. The comparative log will display only the differences between those two logs.








**NOTE:** If you compare two log files, click **File > Save log** to save it as a ZIP file; both files will be saved. If you open this file later, the contained logs are automatically compared.

Next to the displayed items, ESET SysInspector shows symbols identifying differences between the compared logs.

Description of all symbols that can be displayed next to items:

- + new value, not present in the previous log
-  tree structure section contains new values
- - removed value, present in the previous log only
-  tree structure section contains removed values
-  value / file has been changed
-  tree structure section contains modified values / files
-  the risk level has decreased / it was higher in the previous log
-  the risk level has increased / it was lower in the previous log

The explanation section displayed in the left bottom corner describes all symbols and also displays the names of logs which are being compared.

Log Status	
Current Log: [Generated]	
Previous Log: SysInspector-LOG-110725-1042.xml [Loaded-ZIP]	
Compare: [Comparison Result]	
Compare Icons Legend	
+ Added Item	 Added Item(s) in Branch
- Removed Item	 Removed Item(s) in Branch
 File Replaced	 Added or Removed Item(s) in Branch
 Status Was Lowered	 File(s) Replaced in Branch
 Status Was Raised	

Any comparative log can be saved to a file and opened at a later time.

## Example

Generate and save a log, recording original information about the system, to a file named *previous.xml*. After changes to the system have been made, open ESET SysInspector and allow it to generate a new log. Save it to a file named *current.xml*.

In order to track changes between those two logs, click **File > Compare logs**. The program will create a comparative log showing differences between the logs.

The same result can be achieved if you use the following command line option:

*SysInspector.exe current.xml previous.xml*

### 5.6.3 Command line parameters

ESET SysInspector supports generating reports from the command line using these parameters:

<b>/gen</b>	generate log directly from the command line without running GUI
<b>/privacy</b>	generate log with sensitive information omitted
<b>/zip</b>	save outcome log in compressed zip archive
<b>/silent</b>	suppress progress window when generating log from the command line
<b>/blank</b>	launch ESET SysInspector without generating/loading log

## Examples

Usage:

*SysInspector.exe [load.xml] [/gen=save.xml] [/privacy] [/zip] [compareto.xml]*

To load specific log directly into the browser, use: *SysInspector.exe .\clientlog.xml*

To generate log from the command line, use: *SysInspector.exe /gen=. \mynewlog.xml*

To generate log excluding sensitive information directly in a compressed file, use: *SysInspector.exe /gen=. \mynewlog.zip /privacy /zip*

To compare two log files and browse differences, use: *SysInspector.exe new.xml old.xml*

**NOTE:** If the name of the file/folder contains a gap, then should be taken into inverted commas.

### 5.6.4 Service Script

Service script is a tool that provides help to customers that use ESET SysInspector by easily removing unwanted objects from the system.

Service script enables the user to export the entire ESET SysInspector log, or its selected parts. After exporting, you can mark unwanted objects for deletion. You can then run the modified log to delete marked objects.

Service Script is suited for advanced users with previous experience in diagnosing system issues. Unqualified modifications may lead to operating system damage.

## Example

If you suspect that your computer is infected by a virus which is not detected by your antivirus program, follow the step-by-step instructions below:

1. Run ESET SysInspector to generate a new system snapshot.
2. Select the first item in the section on the left (in the tree structure), press Shift and select the last item to mark all items.
3. Right click the selected objects and select **Export Selected Sections To Service Script**.
4. The selected objects will be exported to a new log.
5. This is the most crucial step of the entire procedure: open the new log and change the – attribute to + for all objects you want to remove. Please make sure you do not mark any important operating system files/objects.
6. Open ESET SysInspector, click **File > Run Service Script** and enter the path to your script.
7. Click **OK** to run the script.

### 5.6.4.1 Generating Service script

To generate a script, right-click any item from the menu tree (in the left pane) in the ESET SysInspector main window. From the context menu, select either **Export All Sections To Service Script** or **Export Selected Sections To Service Script**.

**NOTE:** It is not possible to export the service script when two logs are being compared.

### 5.6.4.2 Structure of the Service script

In the first line of the script's header, you can find information about the Engine version (ev), GUI version (gv) and the Log version (lv). You can use this data to track possible changes in the .xml file that generates the script and prevent any inconsistencies during execution. This part of the script should not be altered.

The remainder of the file is divided into sections in which items can be edited (denote those that will be processed by the script). You mark items for processing by replacing the "-" character in front of an item with a "+" character. Sections in the script are separated from each other by an empty line. Each section has a number and title.

#### 01) Running processes

This section contains a list of all processes running in the system. Each process is identified by its UNC path and, subsequently, its CRC16 hash code in asterisks (\*).

Example:

```
01) Running processes:
- \SystemRoot\System32\smss.exe *4725*
- C:\Windows\system32\svchost.exe *FD08*
+ C:\Windows\system32\module32.exe *CF8A*
[...]
```

In this example a process, module32.exe, was selected (marked by a "+" character); the process will end upon execution of the script.

#### 02) Loaded modules

This section lists currently used system modules.

Example:

```
02) Loaded modules:
- c:\windows\system32\svchost.exe
- c:\windows\system32\kernel32.dll
+ c:\windows\system32\khbkbhb.dll
- c:\windows\system32\advapi32.dll
[...]
```

In this example the module khbkbhb.dll was marked by a "+". When the script runs, it will recognize the processes using that specific module and end them.

#### 03) TCP connections

This section contains information about existing TCP connections.

Example:

```
03) TCP connections:
- Active connection: 127.0.0.1:30606 -> 127.0.0.1:55320, owner: ekern.exe
- Active connection: 127.0.0.1:50007 -> 127.0.0.1:50006,
- Active connection: 127.0.0.1:55320 -> 127.0.0.1:30606, owner: OUTLOOK.EXE
- Listening on *, port 135 (epmap), owner: svchost.exe
+ Listening on *, port 2401, owner: fservice.exe Listening on *, port 445 (microsoft-ds), owner:
System
[...]
```

When the script runs, it will locate the owner of the socket in the marked TCP connections and stop the socket, freeing system resources.

#### 04) UDP endpoints

This section contains information about existing UDP endpoints.

Example:

```
04) UDP endpoints:
- 0.0.0.0, port 123 (ntp)
+ 0.0.0.0, port 3702
- 0.0.0.0, port 4500 (ipsec-msft)
- 0.0.0.0, port 500 (isakmp)
[...]
```

When the script runs, it will isolate the owner of the socket at the marked UDP endpoints and stop the socket.

#### 05) DNS server entries

This section contains information about the current DNS server configuration.

Example:

```
05) DNS server entries:
+ 204.74.105.85
- 172.16.152.2
[...]
```

Marked DNS server entries will be removed when you run the script.

#### 06) Important registry entries

This section contains information about important registry entries.

Example:

```
06) Important registry entries:
* Category: Standard Autostart (3 items)
  HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Run
- HotKeysCmds = C:\Windows\system32\hkcmd.exe
- IgfxTray = C:\Windows\system32\igfxtray.exe
  HKCU\SOFTWARE\Microsoft\Windows\CurrentVersion\Run
- Google Update = "C:\Users\antoniak\AppData\Local\Google\Update\GoogleUpdate.exe" /c
* Category: Internet Explorer (7 items)
  HKLM\Software\Microsoft\Internet Explorer\Main
+ Default_Page_URL = http://thatcrack.com/
[...]
```

The marked entries will be deleted, reduced to 0-byte values or reset to their default values upon script execution. The action to be applied to a particular entry depends on the entry category and key value in the specific registry.

#### 07) Services

This section lists services registered within the system.

Example:

```
07) Services:
- Name: Andrea ADI Filters Service, exe path: c:\windows\system32\aeadisrv.exe, state: Running,
  startup: Automatic
- Name: Application Experience Service, exe path: c:\windows\system32\aelupsvc.dll, state: Running,
  startup: Automatic
- Name: Application Layer Gateway Service, exe path: c:\windows\system32\alg.exe, state: Stopped,
  startup: Manual
[...]
```

The services marked and their dependent services will be stopped and uninstalled when the script is executed.

#### 08) Drivers

This section lists installed drivers.

### Example:

```
08) Drivers:
- Name: Microsoft ACPI Driver, exe path: c:\windows\system32\drivers\acpi.sys, state: Running,
startup: Boot
- Name: ADI UAA Function Driver for High Definition Audio Service, exe path: c:\windows\system32
\drivers\adihdaud.sys, state: Running, startup: Manual
[...]
```

When you execute the script, the drivers selected will be stopped. Note that some drivers won't allow themselves to be stopped.

### 09) Critical files

This section contains information about files that are critical to proper function of the operating system.

### Example:

```
09) Critical files:
* File: win.ini
- [fonts]
- [extensions]
- [files]
- MAPI=1
[...]
```

```
* File: system.ini
- [386Enh]
- woafont=dosapp.fon
- EGA80WOA.FON=EGA80WOA.FON
[...]
```

```
* File: hosts
- 127.0.0.1 localhost
- ::1 localhost
[...]
```

The selected items will either be deleted or reset to their original values.

### 5.6.4.3 Executing Service scripts

Mark all desired items, then save and close the script. Run the edited script directly from the ESET SysInspector main window by selecting the **Run Service Script** option from the File menu. When you open a script, the program will prompt you with the following message: **Are you sure you want to run the service script “%Scriptname%”?** After you confirm your selection, another warning may appear, informing you that the service script you are trying to run has not been signed. Click **Run** to start the script.

A dialog window will confirm that the script was successfully executed.

If the script could only be partially processed, a dialog window with the following message will appear: **The service script was run partially. Do you want to view the error report?** Select **Yes** to view a complex error report listing the operations that were not executed.

If the script was not recognized, a dialog window with the following message will appear: **The selected service script is not signed. Running unsigned and unknown scripts may seriously harm your computer data. Are you sure you want to run the script and carry out the actions?** This may be caused by inconsistencies within the script (damaged heading, corrupted section title, empty line missing between sections etc.). You can either reopen the script file and correct the errors within the script or create a new service script.



## 5.6.5 FAQ

### Does ESET SysInspector require Administrator privileges to run ?

While ESET SysInspector does not require Administrator privileges to run, some of the information it collects can only be accessed from an Administrator account. Running it as a Standard User or a Restricted User will result in it collecting less information about your operating environment.

### Does ESET SysInspector create a log file ?

ESET SysInspector can create a log file of your computer's configuration. To save one, click **File > Save Log** in the main program window. Logs are saved in XML format. By default, files are saved to the *%USERPROFILE%\My Documents\* directory, with a file naming convention of "SysInspector-%COMPUTERNAME%-YYMMDD-HHMM.XML". You may change the location and name of the log file to something else before saving if you prefer.

### How do I view the ESET SysInspector log file ?

To view a log file created by ESET SysInspector, run the program and click **File > Open Log** in the main program window. You can also drag and drop log files onto the ESET SysInspector application. If you need to frequently view ESET SysInspector log files, we recommend creating a shortcut to the SYSINSPECTOR.EXE file on your Desktop; you can then drag and drop log files onto it for viewing. For security reasons Windows Vista/7 may not allow drag and drop between windows that have different security permissions.

### Is a specification available for the log file format? What about an SDK ?

At the current time, neither a specification for the log file or an SDK are available since the program is still in development. After the program has been released, we may provide these based on customer feedback and demand.

### How does ESET SysInspector evaluate the risk posed by a particular object ?

In most cases, ESET SysInspector assigns risk levels to objects (files, processes, registry keys and so forth) using a series of heuristic rules that examine the characteristics of each object and then weight the potential for malicious activity. Based on these heuristics, objects are assigned a risk level from **1 - Fine (green)** to **9 - Risky (red)**. In the left navigation pane, sections are colored based on the highest risk level of an object inside them.

### Does a risk level of "6 - Unknown (red)" mean an object is dangerous ?

ESET SysInspector's assessments do not guarantee that an object is malicious – that determination should be made by a security expert. What ESET SysInspector is designed for is to provide a quick assessment for security experts so that they know what objects on a system they may want to further examine for unusual behavior.

### Why does ESET SysInspector connect to the Internet when run ?

Like many applications, ESET SysInspector is signed with a digital signature "certificate" to help ensure the software was published by ESET and has not been altered. In order to verify the certificate, the operating system contacts a certificate authority to verify the identity of the software publisher. This is normal behavior for all digitally-signed programs under Microsoft Windows.

### What is Anti-Stealth technology ?

Anti-Stealth technology provides effective rootkit detection.

If the system is attacked by malicious code that behaves as a rootkit, the user may be exposed to data loss or theft. Without a special anti-rootkit tool, it is almost impossible to detect rootkits.

### Why are there sometimes files marked as "Signed by MS", having a different "Company Name" entry at the same time ?

When trying to identify the digital signature of an executable, ESET SysInspector first checks for a digital signature embedded in the file. If a digital signature is found, the file will be validated using that information. If a digital signature is not found, the ESI starts looking for the corresponding CAT file (Security Catalog - *%systemroot%\system32\catroot\*) that contains information about the executable file processed. If the relevant CAT file is found,

the digital signature of that CAT file will be applied in the validation process of the executable.

This is why there are sometimes files marked as "Signed by MS", but having a different "CompanyName" entry.

Example:

Windows 2000 includes the HyperTerminal application located in *C:\Program Files\Windows NT*. The main application executable file is not digitally signed, but ESET SysInspector marks it as a file signed by Microsoft. The reason for this is a reference in *C:\WINNT\system32\CatRoot\{F750E6C3-38EE-11D1-85E5-00C04FC295EE}\sp4.cat* pointing to *C:\Program Files\Windows NT\hypertrm.exe* (the main executable of the HyperTerminal application) and *sp4.cat* is digitally signed by Microsoft.

### 5.6.6 ESET SysInspector as part of ESET Smart Security

To open the ESET SysInspector section in ESET Smart Security, click **Tools > ESET SysInspector**. The management system in the ESET SysInspector window is similar to that of computer scan logs, or scheduled tasks. All operations with system snapshots – create, view, compare, remove and export – are accessible within one or two clicks.

The ESET SysInspector window contains basic information about the created snapshots such as create time, a short comment, name of the user that created the snapshot and snapshot status.

To compare, create, or delete snapshots, use the corresponding buttons located below the list of snapshots in the ESET SysInspector window. Those options are also available from the context menu. To view the selected system snapshot, select **Show** from the context menu. To export the selected snapshot to a file, right-click it and select **Export...**

Below is a detailed description of the available options:

- **Compare** – Allows you to compare two existing logs. It is suitable if you want to track changes between the current log and an older log. For this option to take effect, you must select two snapshots to be compared.
- **Create...** – Creates a new record. Before that, you must enter a short comment about the record. To find out the snapshot creation progress (of the currently generated snapshot), see the **Status** column. All completed snapshots are marked by the **Created** status.
- **Delete/Delete all** – Removes entries from the list.
- **Export...** – Saves the selected entry in an XML file (also in a zipped version).

## 5.7 ESET SysRescue

ESET SysRescue is a utility which enables you to create a bootable disk containing one of the ESET Security solutions - it can be ESET NOD32 Antivirus, ESET Smart Security or even some of the server-oriented products. The main advantage of ESET SysRescue is the fact that the ESET Security solution runs independent of the host operating system, while it has a direct access to the disk and the entire file system. This makes it possible to remove infiltrations which normally could not be deleted, e.g., when the operating system is running, etc.

### 5.7.1 Minimum requirements

ESET SysRescue works in the Microsoft Windows Preinstallation Environment (Windows PE) version 2.x, which is based on Windows Vista.

Windows PE is part of the free Windows Automated Installation Kit (Windows AIK) or Windows Assessment and Deployment Kit (WADK) and therefore Windows AIK or WADK must be installed before creating ESET SysRescue (<http://go.eset.eu/AIK>, <http://www.microsoft.com/en-us/download/details.aspx?id=30652>). Choosing between these kits depends on operating system version. Due to the support of the 32-bit version of Windows PE, it is necessary to use a 32-bit installation package of ESET Security solution when creating ESET SysRescue on 64-bit systems. ESET SysRescue supports Windows AIK 1.1 and higher as well as WADK 1.0 and higher.

When installing Windows ADK choose only packages Deployment Tools and Windows Preinstallation Environment (Windows PE) to install. Since these packages over 3.0 GB in size, a high-speed internet connection is recommended to download.

ESET SysRescue is available in ESET Security solutions version 4.0 and higher.

### Windows ADK supports:

- Windows 8
- Windows 7
- Windows Vista
- Windows Vista Service Pack 1
- Windows Vista Service Pack 2

**Note:** ESET SysRescue may not be available for Windows 8 in older versions of ESET security products. In this case we recommend that you upgrade your product or create an ESET SysRescue disk on another version of Microsoft Windows.

### Windows AIK supports:

- Windows 7
- Windows Vista
- Windows XP Service Pack 2 with KB926044
- Windows XP Service Pack 3

## 5.7.2 How to create rescue CD

To launch the ESET SysRescue wizard, click **Start > Programs > ESET > ESET Smart Security > ESET SysRescue**.

First, the wizard checks for the presence of Windows AIK or ADK and a suitable device for the boot media creation. If Windows AIK or ADK is not installed on the computer (or it is either corrupt or installed incorrectly), the wizard will offer you the option to install it, or to enter the path to your Windows AIK or ADK folder (<http://go.eset.eu/AIK>, <http://www.microsoft.com/en-us/download/details.aspx?id=30652>).

**NOTE:** Since Windows AIK is over 1 GB in size, a high-speed internet connection is required to download.

When installing Windows ADK choose only packages Deployment Tools and Windows Preinstallation Environment (Windows PE) to install. Since these packages over 3.0 GB in size, a high-speed internet connection is required to download.

In the [next step](#), select the target media where ESET SysRescue will be located.

## 5.7.3 Target selection

In addition to CD/DVD/USB, you can choose to save ESET SysRescue in an ISO file. Later on, you can burn the ISO image to a CD/DVD, or use it some other way (e.g. in a virtual environment such as VMware or VirtualBox).

If you select USB as the target medium, booting may not work on certain computers. Some BIOS versions may report problems with the BIOS - boot manager communication (e.g. on Windows Vista) and booting exits with the following error message:

```
file : \boot\bcd
status : 0xc000000e
info : an error occurred while attempting to read the boot configuration data
```

If you encounter this message, we recommend selecting CD instead of USB medium.

## 5.7.4 Settings

Before initiating ESET SysRescue creation, the install wizard displays compilation parameters. These can be modified by clicking the **Change...** button. The available options include:

- [Folders](#)
- [ESET Antivirus](#)
- [Advanced](#)
- [Internet protocol](#)
- [Bootable USB device](#) (when the target USB device is selected)
- [Burning](#) (when the target CD/DVD drive is selected)

The **Create** option is inactive if no MSI installation package is specified, or if no ESET Security solution is installed on the computer. To select an installation package, click **Change** and click the **ESET Antivirus** tab. Also, if you do not fill in username and password (**Change > ESET Antivirus**), the **Create** option is greyed out.

#### 5.7.4.1 Folders

**Temporary folder** is a working directory for files required during ESET SysRescue compilation.

**ISO folder** is a folder, where the resulting ISO file is saved after the compilation is completed.

The list on this tab shows all local and mapped network drives together with the available free space. If some of the folders here are located on a drive with insufficient free space, we recommend that you select another drive with more free space available. Otherwise compilation may end prematurely due to insufficient free disk space.

**External applications** – Allows you to specify additional programs that will be run or installed after booting from a ESET SysRescue medium.

**Include external applications** – Allows you to add external programs to the ESET SysRescue compilation.

**Selected folder** – Folder in which programs to be added to the ESET SysRescue disk are located.

#### 5.7.4.2 ESET Antivirus

For creating the ESET SysRescue CD, you can select between two sources of ESET files to be used by the compiler:

**ESS/EAV folder** – Files already contained in the folder to which the ESET Security solution is installed on the computer.

**MSI file** – Files contained in the MSI installer are used.

Next, you can choose to update the location of (.nup) files. Normally, the default option **ESS/EAV folder/MSI file** should be selected. In some cases, a custom **Update folder** can be chosen, e.g., to use an older or newer virus signature database version.

You can use one of the following two sources of username and password:

**Installed ESS/EAV** – Username and password will be copied from the currently installed ESET Security solution.

**From user** – Username and password entered in the corresponding fields will be used.

**NOTE:** ESET Security solution on the ESET SysRescue CD is updated either from the Internet or from the ESET Security solution installed on the computer on which the ESET SysRescue CD is run.

#### 5.7.4.3 Advanced settings

The **Advanced** tab lets you optimize the ESET SysRescue CD according to the amount of memory on your computer. Select **576 MB and more** to write the content of the CD to the operating memory (RAM). If you select **less than 576 MB**, the recovery CD will be permanently accessed when WinPE will be running.

In the **External drivers** section, you can insert drivers for your specific hardware (usually network adapter). Although WinPE is based on Windows Vista SP1, which supports a wide range of hardware, occasionally hardware is not recognized. This will require you to add a driver manually. There are two ways of introducing a driver into an ESET SysRescue compilation: manually (click **Add**) and automatically (click **Aut. Search**). In the case of manual introduction, you need to select the path to the corresponding .inf file (applicable \*.sys file must also be present in this folder). In the case of automatic introduction, the driver is found automatically in the operating system of the given computer. We recommend using automatic introduction only if ESET SysRescue is used on a computer that has the same network adapter as the computer on which the ESET SysRescue CD was created. During creation, the ESET SysRescue driver is introduced into the compilation so you do not need to look for it later.

#### 5.7.4.4 Internet protocol

This section allows you to configure basic network information and set up predefined connections after running ESET SysRescue.

Select **Automatic private IP address** to obtain the IP address automatically from DHCP (Dynamic Host Configuration Protocol) server.

Alternatively, this network connection can use a manually specified IP address (also known as a static IP address). Select **Custom** to configure the appropriate IP settings. If you select this option, you must specify an **IP address** and, for LAN and high-speed Internet connections, a **Subnet mask**. In **Preferred DNS server** and **Alternate DNS server**, type the primary and secondary DNS server addresses.

#### 5.7.4.5 Bootable USB device

If you have selected a USB device as your target medium, you can select one of the available USB devices on the **Bootable USB device** tab (in case there are more USB devices).

Select the appropriate target **Device** to which ESET SysRescue will be installed.

**Warning:** The selected USB device will be formatted during the creation of ESET SysRescue. All data on the device will be deleted.

If you select **Quick format**, formatting removes all the files from the partition, but does not scan the disk for bad sectors. Use this option if your USB device has been formatted previously and you are sure that it is not damaged.

#### 5.7.4.6 Burn

If you have selected CD/DVD as your target medium, you can specify additional burning parameters in the **Burn** tab.

**Delete ISO file** – Select to delete the temporary ISO file after the ESET SysRescue CD is created.

**Deletion enabled** – Enables you to select fast erasing and complete erasing.

**Burning device** – Select the drive to be used for burning.

**Warning:** This is the default option. If a rewritable CD/DVD is used, all the data on the CD/DVD will be erased.

The Medium section contains information about the medium in your CD/DVD device.

**Burning speed** – Select the desired speed from the drop-down menu. The capabilities of your burning device and the type of CD/DVD used should be considered when selecting the burning speed.

### 5.7.5 Working with ESET SysRescue

For the rescue CD/DVD/USB to work effectively, you must start your computer from the ESET SysRescue boot media. Boot priority can be modified in the BIOS. Alternatively, you can use the boot menu during computer startup – usually using one of the F9 - F12 keys depending on the version of your motherboard/BIOS.

After booting up from the boot media, ESET Security solution will start. Since ESET SysRescue is used only in specific situations, some protection modules and program features present in the standard version of ESET Security solution are not needed; their list is narrowed down to **Computer scan**, **Update**, and some sections in **Setup** and **Tools**. The ability to update the virus signature database is the most important feature of ESET SysRescue, we recommend that you update the program prior starting a Computer scan.

### 5.7.5.1 Using ESET SysRescue

Suppose that computers in the network have been infected by a virus which modifies executable (.exe) files. ESET Security solution is capable of cleaning all infected files except for *explorer.exe*, which cannot be cleaned, even in Safe mode. This is because *explorer.exe*, as one of the essential Windows processes, is launched in Safe mode as well. ESET Security solution would not be able to perform any action with the file and it would remain infected.

In this type of scenario, you could use ESET SysRescue to solve the problem. ESET SysRescue does not require any component of the host operating system, and is therefore capable of processing (cleaning, deleting) any file on the disk.

## 5.8 Command Line

ESET Smart Security's antivirus module can be launched via the command line – manually (with the “ecls” command) or with a batch (“bat”) file. ESET Command-line scanner usage:

```
ecls [OPTIONS...] FILES..
```

The following parameters and switches can be used while running the on-demand scanner from the command line:

### Options

/base-dir=FOLDER	load modules from FOLDER
/quar-dir=FOLDER	quarantine FOLDER
/exclude=MASK	exclude files matching MASK from scanning
/subdir	scan subfolders (default)
/no-subdir	do not scan subfolders
/max-subdir-level=LEVEL	maximum sub-level of folders within folders to scan
/symlink	follow symbolic links (default)
/no-symlink	skip symbolic links
/ads	scan ADS (default)
/no-ads	do not scan ADS
/log-file=FILE	log output to FILE
/log-rewrite	overwrite output file (default – append)
/log-console	log output to console (default)
/no-log-console	do not log output to console
/log-all	also log clean files
/no-log-all	do not log clean files (default)
/aind	show activity indicator
/auto	scan and automatically clean all local disks

### Scanner options

/files	scan files (default)
/no-files	do not scan files
/memory	scan memory
/boots	scan boot sectors
/no-boots	do not scan boot sectors (default)
/arch	scan archives (default)
/no-arch	do not scan archives
/max-obj-size=SIZE	only scan files smaller than SIZE megabytes (default 0 = unlimited)
/max-arch-level=LEVEL	maximum sub-level of archives within archives (nested archives) to scan
/scan-timeout=LIMIT	scan archives for LIMIT seconds at maximum
/max-arch-size=SIZE	only scan the files in an archive if they are smaller than SIZE (default 0 = unlimited)
/max-sfx-size=SIZE	only scan the files in a self-extracting archive if they are smaller than SIZE megabytes (default 0 = unlimited)
/mail	scan email files (default)
/no-mail	do not scan email files
/mailbox	scan mailboxes (default)
/no-mailbox	do not scan mailboxes

/sfx	scan self-extracting archives (default)
/no-sfx	do not scan self-extracting archives
/rtp	scan runtime packers (default)
/no-rtp	do not scan runtime packers
/unsafe	scan for potentially unsafe applications
/no-unsafe	do not scan for potentially unsafe applications (default)
/unwanted	scan for potentially unwanted applications
/no-unwanted	do not scan for potentially unwanted applications (default)
/suspicious	scan for suspicious applications (default)
/no-suspicious	do not scan for suspicious applications
/pattern	use signatures (default)
/no-pattern	do not use signatures
/heur	enable heuristics (default)
/no-heur	disable heuristics
/adv-heur	enable Advanced heuristics (default)
/no-adv-heur	disable Advanced heuristics
/ext=EXTENSIONS	scan only EXTENSIONS delimited by colon
/ext-exclude=EXTENSIONS	exclude EXTENSIONS delimited by colon from scanning
/clean-mode=MODE	use cleaning MODE for infected objects

The following options are available:

- **none** – No automatic cleaning will occur.
- **standard** (default) – ecls.exe will attempt to automatically clean or delete infected files.
- **strict** – ecls.exe will attempt to automatically clean or delete infected files without user intervention (you will not be prompted before files are deleted).
- **rigorous** – ecls.exe will delete files without attempting to clean regardless of what the file is.
- **delete** – ecls.exe will delete files without attempting to clean, but will refrain from deleting sensitive files such as Windows system files.

/quarantine	copy infected files (if cleaned) to Quarantine (supplements the action carried out while cleaning)
/no-quarantine	do not copy infected files to Quarantine

### General options

/help	show help and quit
/version	show version information and quit
/preserve-time	preserve last access timestamp

### Exit codes

0	no threat found
1	threat found and cleaned
10	some files could not be scanned (may be threats)
50	threat found
100	error

**NOTE:** Exit codes greater than 100 mean that the file was not scanned and thus can be infected.

## 6. Glossary

### 6.1 Types of infiltration

An Infiltration is a piece of malicious software trying to enter and/or damage a user's computer.

#### 6.1.1 Viruses

A computer virus is a piece of malicious code that is pre-pended or appended to existing files on your computer. Viruses are named after biological viruses because they use similar techniques to spread from one computer to another. As for the term "virus", it is often used incorrectly to mean any type of a threat. This usage is gradually being overcome and replaced with a more accurate term "malware" (malicious software).

Computer viruses mainly attack executable files and documents. In short, this is how a computer virus works: after execution of an infected file, the malicious code is called and executed prior to the execution of the original application. A virus can infect any files that the current user has write permissions for.

Computer viruses can range in purpose and severity. Some of them are extremely dangerous because of their ability to purposely delete files from a hard drive. On the other hand, some viruses do not cause any damage – they only serve to annoy the user and demonstrate the technical skills of their authors.

If your computer is infected with a virus and cleaning is not possible, submit it to the ESET Lab for perusal. In certain cases infected files can be modified to such an extent that cleaning is not possible and the files must be replaced with a clean copy.

#### 6.1.2 Worms

A computer worm is a program containing malicious code that attacks host computers and spreads via network. The basic difference between a virus and a worm is that worms have the ability to propagate by themselves; they are not dependant on host files (or boot sectors). Worms spread to email addresses in your contact list or exploit security vulnerabilities in network applications.

Worms are therefore much more viable than computer viruses. Due to the wide availability of the Internet, they can spread across the globe within hours or even minutes after their release. This ability to replicate independently and rapidly makes them more dangerous than other types of malware.

A worm activated in a system can cause a number of inconveniences: It can delete files, degrade system performance, or even deactivate programs. The nature of a computer worm qualifies it as a "means of transport" for other types of infiltrations.

If your computer is infected with a worm, we recommend you delete the infected files because they likely contain malicious code.

#### 6.1.3 Trojans

Historically, computer Trojans (Trojan horses) have been defined as a class of threats which attempt to present themselves as useful programs and thus trick users into running them.

Since Trojans are a very broad category, it is often divided into several subcategories:

- **Downloader** – Malicious programs with the ability to download other threats from the Internet.
- **Dropper** – Malicious programs with the ability to drop other types of malware onto compromised computers.
- **Backdoor** – Malicious programs which communicate with remote attackers, allowing them to gain access to the computer and take control over it.
- **Keylogger** – (keystroke logger) – A program which records each keystroke that a user types and sends the information to remote attackers.
- **Dialer** – Malicious programs designed to connect via premium-rate numbers instead of the user's Internet service provider. It is almost impossible for a user to notice that a new connection was created. Dialers can only cause damage to users with dial-up modems, which are no longer regularly used.



If a file on your computer is detected as a Trojan, it is advisable to delete it, since it most likely contains nothing but malicious code.

#### **6.1.4 Rootkits**

Rootkits are malicious programs that grant Internet attackers unlimited access to a system, while concealing their presence. Rootkits, after accessing a system (usually exploiting a system vulnerability), use functions in the operating system to avoid detection by antivirus software: they conceal processes, files and Windows registry data. For this reason, it is almost impossible to detect them using ordinary testing techniques.

There are two levels of detection to prevent rootkits:

1. When they try to access a system: They are still not present, and are therefore inactive. Most antivirus systems are able to eliminate rootkits at this level (assuming that they actually detect such files as being infected).
2. When they are hidden from the usual testing: ESET Smart Security users have the advantage of Anti-Stealth technology, which is also able to detect and eliminate active rootkits.

#### **6.1.5 Adware**

Adware is a short for advertising-supported software. Programs displaying advertising material fall under this category. Adware applications often automatically open a new pop-up window containing advertisements in an Internet browser, or change the browser's home page. Adware is frequently bundled with freeware programs, allowing their creators to cover development costs of their (usually useful) applications.

Adware itself is not dangerous – users will only be bothered with advertisements. Its danger lies in the fact that adware may also perform tracking functions (as spyware does).

If you decide to use a freeware product, please pay particular attention to the installation program. The installer will most likely notify you of the installation of an extra adware program. Often you will be allowed to cancel it and install the program without adware.

Some programs will not install without adware, or their functionality will be limited. This means that adware may often access the system in a “legal” way, because users have agreed to it. In this case, it is better to be safe than sorry. If there is a file detected as adware on your computer, it is advisable to delete it, since there is a high probability that it contains malicious code.

#### **6.1.6 Spyware**

This category covers all applications which send private information without user consent/awareness. Spyware uses tracking functions to send various statistical data such as a list of visited websites, email addresses from the user's contact list, or a list of recorded keystrokes.

The authors of spyware claim that these techniques aim to find out more about users' needs and interests and allow better-targeted advertisement. The problem is that there is no clear distinction between useful and malicious applications and no one can be sure that the retrieved information will not be misused. The data obtained by spyware applications may contain security codes, PINs, bank account numbers, etc. Spyware is often bundled with free versions of a program by its author in order to generate revenue or to offer an incentive for purchasing the software. Often, users are informed of the presence of spyware during a program's installation to give them an incentive to upgrade to a paid version without it.

Examples of well-known freeware products which come bundled with spyware are client applications of P2P (peer-to-peer) networks. Spyfalcon or Spy Sheriff (and many more) belong to a specific spyware subcategory – they appear to be antispyware programs, but in fact they are spyware programs themselves.

If a file is detected as spyware on your computer, it is advisable to delete it, since there is a high probability that it contains malicious code.

### 6.1.7 Packers

Packer is a runtime self-extracting executable that rolls up several kinds of malware into a single package.

The most common packers are UPX, PE\_Compact, PKLite and ASPack. The same malware may be detected differently when compressed using a different packer. Packers also have the ability to make their "signatures" mutate over time, making malware more difficult to detect and remove.

### 6.1.8 Potentially unsafe applications

There are many legitimate programs whose function is to simplify the administration of networked computers. However, in the wrong hands, they may be misused for malicious purposes. ESET Smart Security provides the option to detect such threats.

**Potentially unsafe applications** is the classification used for commercial, legitimate software. This classification includes programs such as remote access tools, password-cracking applications, and keyloggers (a program that records each keystroke a user types).

If you find that there is a potentially unsafe application present and running on your computer (and you did not install it), please consult your network administrator or remove the application.

### 6.1.9 Potentially unwanted applications

**Potentially unwanted applications** (PUAs) are not necessarily intended to be malicious, but may affect the performance of your computer in a negative way. Such applications usually require consent before installation. If they are present on your computer, your system behaves differently (compared to the state before their installation). The most significant changes are:

- New windows you haven't seen previously (pop-ups, ads),
- Activating and running of hidden processes,
- Increased usage of system resources,
- Changes in search results,
- Application communicates with remote servers.

### 6.1.10 Botnet

A bot, or a web robot is an automated malware program that scans blocks of network addresses and infects vulnerable computers. This allow hackers to take control of many computers at the same time and turn them into bots (also known as a zombie). Hackers typically use bots to infect large numbers of computers, which form a network or a botnet. Once the botnet is in your computer, it can be used in distributed denial of service (DDoS) attacks, proxy and also can be used to perform automated tasks over the Internet, without you knowing it (for example sending spam, viruses or stealing personal and private information such as bank credentials or credit card numbers).

## 6.2 Types of remote attacks

There are many special techniques which allow attackers to compromise remote systems. These are divided into several categories.

### 6.2.1 DoS attacks

DoS, or *Denial of Service*, is an attempt to make a computer or network unavailable for its intended users. The communication between afflicted users is obstructed and can no longer continue in a functional way. Computers exposed to DoS attacks usually need to be restarted in order to work properly.

In most cases, the targets are web servers and the aim is to make them unavailable to users for a certain period of time.

### 6.2.2 DNS Poisoning

Using DNS (Domain Name Server) poisoning, hackers can trick the DNS server of any computer into believing that the fake data they supplied is legitimate and authentic. The fake information is cached for a certain period of time, allowing attackers to rewrite DNS replies of IP addresses. As a result, users trying to access Internet websites will download computer viruses or worms instead of their original content.

### 6.2.3 Worm attacks

A computer worm is a program containing malicious code that attacks host computers and spreads via a network. Network worms exploit security vulnerabilities in various applications. Due to the availability of the Internet, they can spread all over the world within a few hours of their release.

Most worm attacks (Sasser, SqlSlammer) can be avoided by using default security settings in the firewall, or by blocking unprotected and unused ports. Also, it is essential that your operating system is updated with the most recent security patches.

### 6.2.4 Port scanning

Port scanning is used to determine which computer ports are open on a network host. A port scanner is software designed to find such ports.

A computer port is a virtual point which handles incoming and outgoing data – this is crucial from a security point of view. In a large network, the information gathered by port scanners may help to identify potential vulnerabilities. Such use is legitimate.

Still, port scanning is often used by hackers attempting to compromise security. Their first step is to send packets to each port. Depending on the response type, it is possible to determine which ports are in use. The scanning itself causes no damage, but be aware that this activity can reveal potential vulnerabilities and allow attackers to take control of remote computers.

Network administrators are advised to block all unused ports and protect those that are in use from unauthorized access.

### 6.2.5 TCP desynchronization

TCP desynchronization is a technique used in TCP Hijacking attacks. It is triggered by a process in which the sequential number in incoming packets differs from the expected sequential number. Packets with an unexpected sequential number are dismissed (or saved in the buffer storage, if they are present in the current communication window).

In desynchronization, both communication endpoints dismiss received packets, at which point remote attackers are able to infiltrate and supply packets with a correct sequential number. The attackers can even manipulate or modify communication.

TCP Hijacking attacks aim to interrupt server-client, or peer-to-peer communications. Many attacks can be avoided by using authentication for each TCP segment. It is also advised to use the recommended configurations for your network devices.

## 6.2.6 SMB Relay

SMB Relay and SMB Relay 2 are special programs that are capable of carrying out attacks against remote computers. The programs take advantage of the Server Message Block file sharing protocol, which is layered onto NetBIOS. A user sharing any folder or directory within the LAN most likely uses this file sharing protocol.

Within local network communication, password hashes are exchanged.

SMB Relay receives a connection on UDP port 139 and 445, relays the packets exchanged by the client and server, and modifies them. After connecting and authenticating, the client is disconnected. SMB Relay creates a new virtual IP address. The new address can be accessed using the command “net use \\192.168.1.1”. The address can then be used by any of the Windows networking functions. SMB Relay relays SMB protocol communication except for negotiation and authentication. Remote attackers can use the IP address, as long as the client computer is connected.

SMB Relay 2 works on the same principle as SMB Relay, except it uses NetBIOS names rather than IP addresses. Both can carry out “man-in-the-middle” attacks. These attacks allow remote attackers to read, insert and modify messages exchanged between two communication endpoints without being noticed. Computers exposed to such attacks often stop responding or restart unexpectedly.

To avoid attacks, we recommend that you use authentication passwords or keys.

## 6.2.7 ICMP attacks

The ICMP (Internet Control Message Protocol) is a popular and widely-used Internet protocol. It is used primarily by networked computers to send various error messages.

Remote attackers attempt to exploit the weaknesses of the ICMP protocol. The ICMP protocol is designed for one-way communication requiring no authentication. This enables remote attackers to trigger so-called DoS (Denial of Service) attacks, or attacks which give unauthorized individuals access to incoming and outgoing packets.

Typical examples of an ICMP attack are ping flood, ICMP\_ECHO flood and smurf attacks. Computers exposed to the ICMP attack are significantly slower (this applies to all applications using the Internet) and have problems connecting to the Internet.

## 6.3 ESET Technology

### 6.3.1 Exploit Blocker

Exploit Blocker is designed to fortify commonly exploited application types such as web browsers, PDF readers, email clients and MS Office components. It works by monitoring the behavior of processes for suspicious activity that might indicate an exploit.

When Exploit Blocker identifies a suspicious process, it can stop the process immediately and record data about the threat, which is then sent to the ESET Live Grid cloud system. This data is processed by the ESET Threat Lab and used to better protect all users from unknown threats and zero-day attacks (newly released malware for which there is no pre-configured remedy).

### 6.3.2 Advanced Memory Scanner

Advanced Memory Scanner works in combination with Exploit Blocker to strengthen protection against malware that has been designed to evade detection by antimalware products through the use of obfuscation and/or encryption. In cases where ordinary emulation or heuristics might not detect a threat, the Advanced memory Scanner is able to identify suspicious behavior and scan threats when they reveal themselves in system memory. This solution is effective against even heavily obfuscated malware.

Unlike Exploit Blocker, Advanced Memory Scanner is a post-execution method, which means that there is a risk that some malicious activity could have been performed prior to its detecting a threat; however in the case that other detection techniques have failed, it offers an additional layer of security.

### 6.3.3 Vulnerability Shield

Vulnerability shield is an extension of the Personal firewall that improves the detection of known vulnerabilities on the network level. By implementing detections for common vulnerabilities in widely used protocols such as SMB, RPC and RDP, it constitutes another important layer of protection against spreading malware, network-conducted attacks and exploitations of vulnerabilities for which a patch has yet not been released or deployed.

### 6.3.4 ESET Live Grid

Built on ThreatSense.Net® advanced early warning system, ESET Live Grid utilizes data that ESET users have submitted worldwide and sends it to the ESET Virus Lab. By providing suspicious samples and metadata from the wild, ESET Live Grid enables us to react immediately to needs of our customers and keep ESET responsive to the latest threats. ESET malware researchers use the information to build an accurate snapshot of the nature and scope of global threats, which helps us focus on the right targets. ESET Live Grid data plays an important role in setting priorities in our automated processing.

Additionally, it implements a reputation system that helps to improve the overall efficiency of our anti-malware solutions. When an executable file or archive is being inspected on a user's system, its hash tag is first compared against a database of white- and blacklisted items. If it is found on the whitelist, the inspected file is considered clean and also flagged to be excluded from future scans. If it is on the blacklist, appropriate actions are taken based on the nature of the threat. If no match is found, the file is scanned thoroughly. Based on the results of this scan, files are categorized as threats or non-threats. This approach has a significant positive impact on scanning performance.

This reputation system allows for effective detection of malware samples even before their signatures are delivered to user's computer via updated virus database (which happens several times a day).

### 6.3.5 Botnet protection

Botnet protection discover malware through analyzing its network communication protocols. Botnet malware is changing frequently in contrast to network protocols, which haven't changed in the last years. This new technology helps ESET defeat malware which tries to avoid detection and try to connect your computer to botnet network.

### 6.3.6 Java Exploit Blocker

Java Exploit Blocker is an extension to existing Exploit Blocker protection. It monitors Java and looking for exploit-like behavior. Blocked samples can be reported to malware analysts, so they can create signatures to block them on different layers (URL blocking, file download, etc.).

## 6.4 Email

Email, or electronic mail, is a modern form of communication with many advantages. It is flexible, fast and direct, and played a crucial role in the proliferation of the Internet in the early 1990's.

Unfortunately, with a high level of anonymity, email and the Internet leave room for illegal activities such as spamming. Spam includes unsolicited advertisements, hoaxes and proliferation of malicious software – malware. The inconvenience and danger to you is increased by the fact that the cost of sending spam is minimal, and authors of spam have many tools to acquire new email addresses. In addition, the volume and variety of spam makes it very difficult to regulate. The longer you use your email address, the more likely it will end up in a spam engine database. Some hints for prevention:

- If possible, don't publish your email address on the Internet
- Only give your email address to trusted individuals
- If possible, don't use common aliases – with more complicated aliases, the probability of tracking is lower
- Don't reply to spam that has already arrived in your inbox
- Be careful when filling out Internet forms – be especially cautious of options such as “Yes, I want to receive information”.
- Use “specialized” email addresses – e.g., one for business, one for communication with your friends, etc.
- From time to time, change your email address
- Use an Antispam solution

### 6.4.1 Advertisements

Internet advertising is one of the most rapidly growing forms of advertising. Its main marketing advantages are minimal costs and a high level of directness; what's more, messages are delivered almost immediately. Many companies use email marketing tools to effectively communicate with current and prospective customers.

This type of advertising is legitimate, since you may be interested in receiving commercial information about some products. But many companies send unsolicited bulk commercial messages. In such cases, email advertising crosses the line and becomes spam.

The amount of unsolicited email has become a problem and it shows no signs of slowing. Authors of unsolicited email often attempt to disguise spam as legitimate messages.

### 6.4.2 Hoaxes

A hoax is misinformation which is spread across the Internet. Hoaxes are usually sent via email or communication tools like ICQ and Skype. The message itself is often a joke or Urban Legend.

Computer Virus hoaxes try to generate fear, uncertainty and doubt (FUD) in the recipients, bringing them to believe that there is an “undetectable virus” deleting files and retrieving passwords, or performing some other harmful activity on their system.

Some hoaxes work by asking recipients to forward messages to their contacts, perpetuating the hoax. There are mobile phone hoaxes, pleas for help, people offering to send you money from abroad, etc. It is often impossible to determine the intent of the creator.

If you see a message prompting you to forward it to everyone you know, it may very well be a hoax. There are many websites on the Internet that can verify if an email is legitimate. Before forwarding, perform an Internet search on any message you suspect is a hoax.

### 6.4.3 Phishing

The term phishing defines a criminal activity which uses techniques of social engineering (manipulating users in order to obtain confidential information). Its aim is to gain access to sensitive data such as bank account numbers, PIN codes, etc.

Access is usually achieved by sending email masquerading as a trustworthy person or business (e.g., financial institution, insurance company). The email can look very genuine, and will contain graphics and content which may have originally come from the source it is impersonating. You will be asked to enter, under various pretenses (data verification, financial operations), some of your personal data – bank account numbers or usernames and passwords. All such data, if submitted, can easily be stolen and misused.

Banks, insurance companies, and other legitimate companies will never request usernames and passwords in an unsolicited email.

### 6.4.4 Recognizing spam scams

Generally, there are a few indicators which can help you identify spam (unsolicited emails) in your mailbox. If a message fulfills at least some of the following criteria, it is most likely a spam message.

- Sender address does not belong to someone on your contact list.
- You are offered a large sum of money, but you have to provide a small sum first.
- You are asked to enter, under various pretenses (data verification, Financial operations), some of your personal data – bank account numbers, usernames and passwords, etc.
- It is written in a foreign language.
- You are asked to buy a product you are not interested in. If you decide to purchase anyway, please verify that the message sender is a reliable vendor (consult the original product manufacturer).
- Some of the words are misspelled in an attempt to trick your spam filter. For example “vaigra” instead of “viagra”, etc.

#### 6.4.4.1 Rules

In the context of Antispam solutions and email clients, rules are tools for manipulating email functions. They consist of two logical parts:

1. Condition (e.g., an incoming message from a certain address)
2. Action (e.g., deletion of the message, moving it to a specified folder)

The number and combination of rules varies with the Antispam solution. These rules serve as measures against spam (unsolicited email). Typical examples:

- 1. Condition: An incoming email message contains some of the words typically seen in spam messages  
2. Action: Delete the message
- 1. Condition: An incoming email message contains an attachment with an .exe extension  
2. Action: Delete the attachment and deliver the message to the mailbox
- 1. Condition: An incoming email message arrives from your employer  
2. Action: Move the message to the “Work” folder

We recommend that you use a combination of rules in Antispam programs in order to facilitate administration and to more effectively filter spam.

#### 6.4.4.2 Whitelist

In general, a whitelist is a list of items or persons who are accepted, or have been granted permission. The term “email whitelist” defines a list of contacts from whom the user wishes to receive messages. Such whitelists are based on keywords searched for in email addresses, domain names, or IP addresses.

If a whitelist works in “exclusivity mode”, then messages from any other address, domain, or IP address will not be received. If a whitelist is not exclusive, such messages will not be deleted, but filtered in some other way.

A whitelist is based on the opposite principle to that of a [blacklist](#). Whitelists are relatively easy to maintain, more so than blacklists. We recommend that you use both the Whitelist and Blacklist to filter spam more effectively.

#### 6.4.4.3 Blacklist

Generally, a blacklist is a list of unaccepted or forbidden items or persons. In the virtual world, it is a technique enabling acceptance of messages from all users not present on such a list.

There are two types of blacklist: Those created by users within their Antispam application, and professional, regularly updated blacklists which are created by specialized institutions and can be found on the Internet.

It is essential to use blacklists to successfully block spam, but they are difficult to maintain, since new items to be blocked appear every day. We recommended you use both a whitelist and a blacklist to most effectively filter spam.

#### 6.4.4.4 Exception list

Exception list usually contains email addresses that may be spoofed and used for sending spam. Email messages received from addresses listed in the Exception list will always be scanned for spam. By default, the Exception list contains all email addresses from existing email client accounts.

#### 6.4.4.5 Server-side control

Server-side control is a technique for identifying mass spam based on the number of received messages and the reactions of users. Each message leaves a unique digital “footprint” based on the content of the message. The unique ID number tells nothing about the content of the email. Two identical messages will have identical footprints, while different messages will have different footprints.

If a message is marked as spam, its footprint is sent to the server. If the server receives more identical footprints (corresponding to a certain spam message), the footprint is stored in the spam footprints database. When scanning incoming messages, the program sends the footprints of the messages to the server. The server returns information on which footprints correspond to messages already marked by users as spam.