IBM Spectrum Protect for Windows Version 8.1.2

Installation Guide



IBM Spectrum Protect for Windows Version 8.1.2

Installation Guide



ote: ore you use thi	s information and	the product it s	upports, read t	he information	in "Notices" or	n page 171.	

© Copyright IBM Corporation 1993, 2017.
US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

	About this publication v	Chapter 3. Taking the first steps after
	Who should read this guide v	you install IBM Spectrum Protect 51
	Installable components v	Creating the user ID and directories for the server
	Publications vi	instance
		Configuring the IBM Spectrum Protect server 53
	What's new in this release vii	Configuring IBM Spectrum Protect by using the
		configuration wizard 54
	Part 1. Installing and upgrading the	Configuring the server instance manually 55
	server	Configuring server options for server database
	Server	maintenance
	Chapter 1 Diagning to install the convey 2	Starting the server instance on Windows systems 63
	Chapter 1. Planning to install the server 3	Configuring the server to start as a Windows service
	What you should know first	Starting the server as a Windows service 65
	What you should know about security before you	Manually creating and configuring a Windows
1	install or upgrade the server	service 66
	Planning for the server hardware and the	Starting the server in the foreground
	operating system 4	Starting the server in maintenance mode 67
	Planning for the server database disks	Stopping the server
	Planning for the server recovery log disks 9	Registering licenses
	Planning for directory-container and	Specifying a device class in preparation for database
	cloud-container storage pools 10	backups
	Planning for storage pools in DISK or FILE	Running multiple server instances on a single
	device classes	system
	Planning for the correct type of storage	Monitoring the server
	technology	
	Applying best practices to the server installation 19	Chapter 4. Installing an IBM Spectrum
	Minimum system requirements for the IBM	Protect server fix pack
	Spectrum Protect server	Applying a fix pack to IBM Spectrum Protect 8.1.2
	IBM Installation Manager	in a clustered environment
	Capacity planning	
	Estimating space requirements for the database 24	Chapter 5. Upgrading to V8.1 79
	Recovery log space requirements 28	Upgrading to V8.1
	Monitoring space utilization for the database and	Planning the upgrade
	recovery logs 40	Preparing the system
	Deleting installation rollback files 41	Installing the server and verifying the upgrade 83 Upgrading the server in a clustered environment 86
	Server naming best practices	Upgrading a V6.3 or V7.1 server to V8.1.2 in a
	Installation directories	clustered environment
		Upgrading IBM Tivoli Storage Manager V6.1 to
	Chapter 2. Installing the server	IBM Spectrum Protect V8.1.2 in a clustered
	components 45	environment
	Obtaining the installation package 45	Removing GSKit Version 7 after upgrading to IBM
	Installing IBM Spectrum Protect by using the	Spectrum Protect Version 8.1.2
	installation wizard	
	Installing IBM Spectrum Protect by using console	Chapter 6. Reverting from Version 8.1.2
	mode	to a previous server 95
	Installing IBM Spectrum Protect in silent mode 48 Installing server language packages	Steps for reverting to the previous server version 95
	Installing server language packages	Additional recovery steps if you created new
	Configuring a language package 50	storage pools or enabled data deduplication 96
	Updating a language package 50	Reverting to the previous server version in a cluster
	-1 a milande haemde	configuration
		Steps for reverting to the previous server version 97

Chapter 7. Reference: DB2 commands for IBM Spectrum Protect server databases	Configuring for secure communication
Chapter 8. Uninstalling IBM Spectrum	server and a spoke server
Protect	Center truststore file
Uninstalling IBM Spectrum Protect by using a	Starting and stopping the web server
graphical wizard	Opening the Operations Center
Uninstalling IBM Spectrum Protect in console	Collecting diagnostic information with IBM
mode	Spectrum Protect client management services 139
Uninstalling IBM Spectrum Protect in silent mode 104	Installing the client management service by
Uninstalling and reinstalling IBM Spectrum Protect 105	using a graphical wizard
Uninstalling IBM Installation Manager 106	Installing the client management service in silent mode
Dort 2 Installing and ungrading	Verifying that the client management service is
Part 2. Installing and upgrading the Operations Center 107	installed correctly
	client management service
Chapter 9. Planning to install the Operations Center	Starting and stopping the client management service
System requirements for the Operations Center 109	Uninstalling the client management service 144
Operations Center computer requirements 110	Configuring the client management service for
Hub and spoke server requirements	custom client installations
Operating system requirements	
Web browser requirements	Chapter 13. Uninstalling the
Language requirements	Operations Center 159
Requirements and limitations for IBM Spectrum	Uninstalling the Operations Center by using a
Protect client management services	graphical wizard
Administrator IDs that the Operations Center	Uninstalling the Operations Center in console
requires	mode
IBM Installation Manager	Uninstalling the Operations Center in silent mode 160
Installation checklist	
Chantar 10 Installing the Operations	Chapter 14. Rolling back to a previous
Chapter 10. Installing the Operations Center	version of the Operations Center 161
Obtaining the Operations Center installation	Part 3. Appendixes 163
package	Part 3. Appendixes 103
Installing the Operations Center by using a	
graphical wizard	Appendix A. Installation log files 165
Installing the Operations Center in console mode 122	
Installing the Operations Center in silent mode 122	Appendix B. Services associated with the server
Chapter 11. Upgrading the Operations	
Center	Appendix C. Accessibility features for
Chapter 12 Getting started with the	the IBM Spectrum Protect product
Chapter 12. Getting started with the	family
Operations Center 127	
Configuring the Operations Center	Notices
Designating the hub server	
Adding a spoke server	Glossary
Sending email alerts to administrators 129	a. 3 3 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
Adding customized text to the login screen 132	Index 477
Enabling REST services	Index

About this publication

This publication contains installation and configuration instructions for the IBM Spectrum Protect[™] server, server languages, license, and device driver.

Instructions for installing the Operations Center are also included in this publication.

Who should read this guide

This publication is intended for system administrators who install, configure, or upgrade the IBM Spectrum Protect server or Operations Center.

Installable components

The IBM Spectrum Protect server and licenses are required components.

Table 1 describes all the installable components. These components are in several different installation packages.

Table 1. IBM Spectrum Protect installable components

IBM Spectrum Protect component	Description	Additional information
Server (required)	Includes the database, the Global Security Kit (GSKit), IBM® Java™ Runtime Environment (JRE), and tools to help you configure and manage the server.	See Chapter 2, "Installing the server components," on page 45.
Language package (optional)	Each language package (one for each language) contains language-specific information for the server.	See "Installing server language packages" on page 49.
Licenses (required)	Includes support for all licensed features. After you install this package, you must register the licenses you purchased.	Use the REGISTER LICENSE command.
Devices (optional)	Extends media management capability.	A list of devices that are supported by this driver is available from the IBM Support Portal.
Storage agent (optional)	Installs the component that allows client systems to write data directly to, or read data directly from, storage devices that are attached to a storage area network (SAN). Remember: IBM Spectrum Protect for Storage Area Networks is a separately licensed product.	For more information about storage agents, see Tivoli Storage Manager for Storage Area Networks (V7.1.1).

Table 1. IBM Spectrum Protect installable components (continued)

IBM Spectrum Protect component	Description	Additional information
Operations Center (optional)	Installs the Operations Center, which is a web-based interface for managing your storage environment.	See Part 2, "Installing and upgrading the Operations Center," on page 107.

Publications

The IBM Spectrum Protect product family includes IBM Spectrum Protect Snapshot, IBM Spectrum Protect for Space Management, IBM Spectrum Protect for Databases, and several other storage management products from IBM.

To view IBM product documentation, see IBM Knowledge Center.

What's new in this release

This release of IBM Spectrum Protect introduces new features and updates.

For a list of new features and updates, see What's new.

New and changed information in this product documentation is indicated by a vertical bar (1) to the left of the change.

Part 1. Installing and upgrading the server

Install and upgrade the IBM Spectrum Protect server.

Chapter 1. Planning to install the server

Install the server software on the computer that manages storage devices and install the client software on every workstation that transfers data to IBM Spectrum Protect server-managed storage.

What you should know first

Before installing IBM Spectrum Protect, be familiar with your operating systems, storage devices, communication protocols, and system configurations.

Server maintenance releases, client software, and publications are available from the IBM Support Portal.

Restriction: You cannot install and run the Version 8.1.2 server on a system that already has DB2[®] installed on it, whether DB2 was installed by itself or as part of some other application. The V8.1.2 server requires the installation and use of the DB2 version that is packaged with the V8.1.2 server. No other version of DB2 can exist on the system.

You can install the IBM Spectrum Protect server on a domain controller. The server can have heavy processor usage, however, and that might affect and stall other applications.

Experienced DB2 administrators can choose to perform advanced SQL queries and use DB2 tools to monitor the database. Do not, however, use DB2 tools to change DB2 configuration settings from those that are preset by IBM Spectrum Protect, or alter the DB2 environment for IBM Spectrum Protect in other ways, such as with other products. The V8.1.2 server has been built and tested extensively using the data definition language (DDL) and database configuration that the server deploys.

Attention: Do not alter the DB2 software that is installed with IBM Spectrum Protect installation packages and fix packs. Do not install or upgrade to a different version, release, or fix pack of DB2 software because doing so can damage the database.

What you should know about security before you install or upgrade the server

Before you install IBM Spectrum Protect V8.1.2 or later, review information about the enhanced security features and the requirements for updating your environment.

About this task

Security enhancements that were introduced in V8.12 and later enforce stricter security settings. To ensure that communication between servers and clients is not interrupted when you install or upgrade IBM Spectrum Protect software to V8.1.2, follow the procedure.

Procedure

1. Install or upgrade the IBM Spectrum Protect servers to 8.1.2 or later.

ı

2. Install or upgrade the backup-archive clients. For more information, see Installing and configuring clients.

For information about scheduling deployment of client updates from the server, see the following documents:

- For IBM Spectrum Protect 8.1.2 or later servers, see technote 2004596.
- For IBM Tivoli® Storage Manager V7.1 servers and IBM Spectrum Protect V8.1.0 and V8.1.1 servers, see technote 1673299.
- 3. Configure the options for backup-archive clients. For more information, see Upgrading the IBM Spectrum Protect Server and the IBM Spectrum Protect Client.

Planning for optimal performance

Before you install the IBM Spectrum Protect server, evaluate the characteristics and configuration of the system to ensure that the server is set up for optimal performance.

Procedure

- 1. Review "What you should know first" on page 3.
- 2. Review each of the following sub-sections.

Planning for the server hardware and the operating system

Use the checklist to verify that the system where the server is installed meets requirements for hardware and software configuration.

Question	Tasks, characteristics, options, or settings	More information
Does the operating system and hardware meet or exceed requirements? Number and speed of processors System memory Supported operating system level	If you are using the minimum required amount of memory, you can support a minimal workload. You can experiment by adding more system memory to determine whether the performance is improved. Then, decide whether you want to keep the system memory dedicated to the server. Test the memory variations by using the entire daily cycle of the server workload. If you run multiple servers on the system, add the requirements for each server to get the requirements for the system.	Review operating system requirements at technote 1243309. Additionally, review the guidance in Tuning tasks for operating systems and other applications. For more information about requirements when these features are in use, see the following topics: • Checklist for data deduplication • Checklist for node replication For more information about sizing requirements for the server and storage, see the IBM Spectrum Protect Blueprint.

Tasks, characteristics, options, or settings	More information
The amount of tuning that can be done for different disk systems varies. Ensure that the appropriate queue depths and other disk system options are set.	For more information, see the following topics: • "Planning for server database disks" • "Planning for server recovery log disks" • "Planning for storage pools in DISK or FILE device classes"
Heavier workloads and advanced features such as data deduplication and node replication require more than the minimum system memory that is specified in the system requirements document.	For more information about requirements when these features are in use, see the following topics: • Checklist for data deduplication • Checklist for node replication • Memory requirements
For databases that are not enabled for data deduplication, use the following guidelines to specify memory requirements:	
500 GB, you need 16 GB of memory. • For databases with a size of 500 GB - 1 TB, you need 24 GB of	
 For databases with a size of 1 TB - 1.5 TB, you need 32 GB of memory. For databases greater than 1.5 TB, you need 	
40 GB of memory. Ensure that you allocate extra space for the active log and the archive log for replication processing.	
Understand what operations require use of HBAs at the same time. For example, a server must store 1 GB/sec of backup data while also doing storage pool migration that requires 0.5 GB/sec capacity to complete. The HBAs must be able to handle all of	See Tuning HBA capacity.
	options, or settings The amount of tuning that can be done for different disk systems varies. Ensure that the appropriate queue depths and other disk system options are set. Heavier workloads and advanced features such as data deduplication and node replication require more than the minimum system memory that is specified in the system requirements document. For databases that are not enabled for data deduplication, use the following guidelines to specify memory requirements: • For databases less than 500 GB, you need 16 GB of memory. • For databases with a size of 500 GB - 1 TB, you need 24 GB of memory. • For databases with a size of 1 TB - 1.5 TB, you need 32 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory. • For databases greater than 1.5 TB, you need 40 GB of memory.

Question	Tasks, characteristics, options, or settings	More information
Is network bandwidth greater than the planned maximum throughput for backups?	Network bandwidth must allow the system to complete operations such as backups in the time that is allowed or that meets service level commitments. For node replication, network bandwidth must be greater than the planned maximum throughput.	For more information, see the following topics: • Tuning network performance • Checklist for node replication
Are you using a preferred file system for IBM Spectrum Protect server files?	Use a file system that ensures optimal performance and data availability. The server uses direct I/O with file systems that support the feature. Using direct I/O can improve throughput and reduce processor use. The following list identifies the preferred file system: • Use New Technology File System (NTFS) without compression.	For more information, see Configuring the operating system for disk performance.
Are you planning to configure enough paging space?	Paging space, or swap space, extends the memory that is available for processing. When the amount of free RAM in the system is low, programs or data that is not in use are moved from memory to paging space. This action releases memory for other activities, such as database operations. Paging space is automatically configured.	

Planning for the server database disks

Use the checklist to verify that the system where the server is installed meets requirements for hardware and software configuration.

Question	Tasks, characteristics, options, or settings	More information
Is the database on fast, low-latency disks?	Do not use the following drives for the IBM Spectrum Protect database: • Nearline SAS (NL-SAS)	For more information, see Checklist for data deduplication.
	Serial Advanced Technology Attachment (SATA)	
	Parallel Advanced Technology Attachment (PATA)	
	Do not use internal disks that are included by default in most server hardware.	
	Enterprise-grade solid-state disks (SSD), with Fibre Channel or SAS interface, offer the best performance.	
	If you plan to use the data deduplication functions of IBM Spectrum Protect, focus on disk performance in terms of I/O operations per second (IOPS).	
Is the database stored on disks or LUNs that are separate from disks or LUNs that are used for the active log, archive log, and storage pool volumes?	Separation of the server database from other server components helps reduce contention for the same resources by different operations that must run at the same time. Tip: The database and the archive log can share an array when you use solid-state drive (SSD) technology.	
If you are using RAID, do you know how to select the optimal RAID level for your system? Are you defining all LUNs with the same size and type of RAID?	When a system must do large numbers of writes, RAID 10 outperforms RAID 5. However, RAID 10 requires more disks than RAID 5 for the same amount of usable storage.	
	If your disk system is RAID, define all your LUNs with the same size and type of RAID. For example, do not mix 4+1 RAID 5 with 4+2 RAID 6.	
If an option to set the strip size or segment size is available, are you planning to optimize the size when you configure the disk system?	If you can set the strip size or segment size, use 64 KB or 128 KB sizes on disk systems for the database.	The block size that is used for the database varies depending on the table space. Most table spaces use 8 KB blocks, but some use 32 KB blocks.

Question	Tasks, characteristics, options, or settings	More information
Are you planning to create at least four directories, also called storage paths, on four separate LUNs for the database?	Heavier workloads and use of some features require more database storage paths than the minimum requirements.	For more information, see the following topics: • Checklist for data deduplication
Create one directory per distinct array on the subsystem. If you have fewer than three arrays, create a separate LUN volume within the	Server operations such as data deduplication drive a high number of input/output operations per second (IOPS) for the database. Such	• Checklist for node replication For help with forecasting growth when the server deduplicates data, see technote 1596944.
array.	operations perform better when the database has more directories. For server databases that are larger	For the most recent information about database size, database reorganization, and performance
	than 2 TB or are expected to grow to that size, use eight directories.	considerations for IBM Spectrum Protect servers, see technote 1683633.
	Consider planned growth of the system when you determine how many storage paths to create. The server uses the higher number of storage paths more effectively if the storage paths are present when the server is first created.	For information about setting the DB2_PARALLEL_IO variable, see Recommended settings for IBM DB2 registry variables.
	Use the <i>DB2_PARALLEL_IO</i> variable to force parallel I/O to occur on table spaces that have one container, or on table spaces that have containers on more than one physical disk. If you do not set the <i>DB2_PARALLEL_IO</i> variable, I/O parallelism is equal to the number of containers that are used by the table space. For example, if a table space spans four containers, the level of I/O parallelism that is used is 4.	
Are all directories for the database the same size?	Directories that are all the same size ensure a consistent degree of parallelism for database operations. If one or more directories for the database are smaller than the others, they reduce the potential for optimized parallel prefetching.	
	This guideline also applies if you must add storage paths after the initial configuration of the server.	
Are you planning to raise the queue depth of the database LUNs on AIX® systems?	The default queue depth is often too low.	See Configuring AIX systems for disk performance.

Planning for the server recovery log disks

Use the checklist to verify that the system where the server is installed meets requirements for hardware and software configuration.

Question	Tasks, characteristics, options, or settings	More information
Are the active log and archive log stored on disks or LUNs that are separate from what is used for the database and storage pool volumes?	Ensure that the disks where you place the active log are not used for other server or system purposes. Do not place the active log on disks that contain the server database, the archive log, or system files such as page or swap space.	Separation of the server database, active log, and archive log helps to reduce contention for the same resources by different operations that must run at the same time.
Are the logs on disks that have nonvolatile write cache?	Nonvolatile write cache allows data to be written to the logs as fast as possible. Faster write operations for the logs can improve performance for server operations.	
Are you setting the logs to a size that adequately supports the workload?	If you are not sure about the workload, use the largest size that you can.	For log sizing details, see the recovery log information in technote 1421060.
	Active log The maximum size is 512 GB, set with the ACTIVELOGSIZE server option.	For information about sizing when you use data deduplication, see Checklist for data deduplication.
	Ensure that there is at least 8 GB of free space on the active log file system after the fixed size active logs are created.	
	Archive log The size of the archive log is limited by the size of the file system on which it is located, and not by a server option. Make the archive log at least as large as the active log.	
Are you defining an archive failover log? Are you placing this log on a disk that is separate from the archive	The archive failover log is for emergency use by the server when the archive log becomes full. Slower	Use the ARCHFAILOVERLOGDIRECTORY server option to specify the location of the archive failover log.
log?	disks can be used for the archive failover log.	Monitor the usage of the directory for the archive failover log. If the archive failover log must be used by the server, the space for the archive log might not be large enough.

Question	Tasks, characteristics, options, or settings	More information
If you are mirroring the active log, are you using only one type of mirroring?	 You can mirror the log by using one of the following methods. Use only one type of mirroring for the log. Use the MIRRORLOGDIRECTORY option that is available for the IBM Spectrum Protect server to specify a mirror location. Use software mirroring, such as Logical Volume Manager (LVM) on AIX. Use mirroring in the disk system hardware. 	If you mirror the active log, ensure that the disks for both the active log and the mirror copy have equal speed and reliability. For more information, see Configuring and tuning the recovery log.

Planning for directory-container and cloud-container storage pools

Review how your directory-container and cloud-container storage pools are set up to ensure optimal performance.

Question	Tasks, characteristics, options, or settings	More information
Measured in terms of input/output operations per second (IOPS), are you using fast disk storage for the IBM Spectrum Protect database?	Use a high-performance disk for the database. Use solid-state drive technology for data deduplication processing. Ensure that the database has a minimum capability of 3000 IOPS. For each TB of data that is backed up daily (before data deduplication), add 1000 IOPS to this minimum. For example, an IBM Spectrum Protect server that is ingesting 3 TB of data per day would need 6000 IOPS for the database disks: 3000 IOPS minimum + 3000 (3 TB x 1000 IOPS) = 6000 IOPS	For recommendations about disk selection, see "Planning for server database disks". For more information about IOPS, see the IBM Spectrum Protect Blueprints.

Question	Tasks, characteristics, options, or settings	More information
Do you have enough memory for the size of your database?	Use a minimum of 40 GB of system memory for IBM Spectrum Protect servers, with a database size of 100 GB, that are deduplicating data. If the retained capacity of backup data grows, the memory requirement might need to be higher.	Memory requirements
	Monitor memory usage regularly to determine whether more memory is required.	
	Use more system memory to improve caching of database pages. The following memory size guidelines are based on the daily amount of new data that you back up:	
	128 GB of system memory for daily backups of data, where the database size is 1 - 2 TB	
	192 GB of system memory for daily backups of data, where the database size is 2 - 4 TB	
Have you properly sized the storage capacity for the database active log and archive log?	Configure the server to have a minimum active log size of 128 GB by setting the ACTIVELOGSIZE server option to a value of 131072.	For more information about sizing for your system, see the IBM Spectrum Protect Blueprints.
	The suggested starting size for the archive log is 1 TB. The size of the archive log is limited by the size of the file system on which it is located, and not by a server option. Ensure that there is at least 10% extra disk space for the file system than the size of the archive log.	
	Use a directory for the database archive logs with an initial free capacity of at least 1 TB. Specify the directory by using the ARCHLOGDIRECTORY server option.	
	Define space for the archive failover log by using the ARCHFAILOVERLOGDIRECTORY server option.	

Question	Tasks, characteristics, options, or settings	More information
Is compression enabled for the archive log and database backups?	Enable the ARCHLOGCOMPRESS server option to save storage space. This compression option is different from inline compression. Inline compression is enabled by default with IBM Spectrum Protect V7.1.5 and later. Restriction: Do not use this option if the amount of backed up data exceeds 6 TB per day.	For more information about compression for your system, see the IBM Spectrum Protect Blueprints.
Are the IBM Spectrum Protect database and logs on separate disk volumes (LUNs)? Is the disk that is used for the database configured according to best practices for a transactional database?	The database must not share disk volumes with IBM Spectrum Protect database logs or storage pools, or with any other application or file system.	For more information about server database and recovery log configuration, see Server database and recovery log configuration and tuning.
Are you using a minimum of eight (2.2 GHz or equivalent) processor cores for each IBM Spectrum Protect server that you plan to use with data deduplication?	If you are planning to use client-side data deduplication, verify that client systems have adequate resources available during a backup operation to complete data deduplication processing. Use a processor that is at least the minimum equivalent of one 2.2 GHz processor core per backup process with client-side data deduplication.	Effective planning and use of deduplication IBM Spectrum Protect Blueprints
Did you allocate enough storage space for the database?	For a rough estimate, plan for 100 GB of database storage for every 50 TB of data that is to be protected in deduplicated storage pools. <i>Protected data</i> is the amount of data before data deduplication, including all versions of objects stored.	
	As a best practice, define a new container storage pool exclusively for data deduplication. Data deduplication occurs at the storage-pool level, and all data within a storage pool, except encrypted data, is deduplicated.	

Question	Tasks, characteristics, options, or settings	More information	
Have you estimated storage pool capacity to configure enough space for the size of your environment?	You can estimate capacity requirements for a deduplicated storage pool by using the following technique:	For an example of using this technique, see Effective planning and use of deduplication.	
	1. Estimate the base size of the source data.		
	2. Estimate the daily backup size by using an estimated change and growth rate.		
	3. Determine retention requirements.		
	4. Estimate the total amount of source data by factoring in the base size, daily backup size, and retention requirements.		
	5. Apply the deduplication ratio factor.		
	6. Apply the compression ratio factor.		
	7. Round up the estimate to consider transient storage pool usage.		
Have you distributed disk I/O over many disk devices and controllers?	Use arrays that consist of as many disks as possible, which is sometimes referred to as wide striping. Ensure that you use one database directory per distinct array on the subsystem.	For guidelines about setting up storage pools, see "Planning for storage pools in DISK or FILE device classes".	
	Set the <i>DB2_PARALLEL_IO</i> registry variable to enable parallel I/O for each table space used if the containers in the table space span multiple physical disks.	For information about setting the DB2_PARALLEL_IO variable, see Recommended settings for IBM DB2 registry variables.	
	When I/O bandwidth is available and the files are large, for example 1 MB, the process of finding duplicates can occupy the resources of an entire processor. When files are smaller, other bottlenecks can occur.		
	Specify eight or more file systems for the deduplicated storage pool device class so that I/O is distributed across as many LUNs and physical devices as possible.		
Have you scheduled daily operations based on your backup strategy?	The best practice sequence of operations is in the following order:	Scheduling data deduplication and node replication processes	
	 Client backup Storage pool protection 	Daily operations for directory-container storage pools	
	3. Node replication		
	4. Database backup		

Question	Tasks, characteristics, options, or settings	More information
Do you have enough storage to manage the DB2 lock list?	If you deduplicate data that includes large files or large numbers of files concurrently, the process can result in insufficient storage space. When the lock list storage is insufficient, backup failures, data management process failures, or server outages can occur.	For information about tuning the DB2 LOCKLIST parameter, see Tuning server-side data deduplication.
	File sizes greater than 500 GB that are processed by data deduplication are most likely to deplete storage space. However, if many backup operations use client-side data deduplication, this problem can also occur with smaller-sized files.	
Is sufficient bandwidth available to transfer data to an IBM Spectrum Protect server?	To transfer data to an IBM Spectrum Protect server, use client-side or server-side data deduplication and compression to reduce the bandwidth that is required.	For more information, see the enablededup client option.
	Use a V7.1.5 server or higher to use inline compression and use a V7.1.6 or later client to enable enhanced compression processing.	
Have you determined how many storage pool directories to assign to each storage pool?	Assign directories to a storage pool by using the DEFINE STGPOOLDIRECTORY command.	
	Create multiple storage pool directories and ensure that each directory is backed up to a separate disk volume (LUN).	
Did you allocate enough disk space in the cloud-container storage pool?	To prevent backup failures, ensure that the local directory has enough space. Use the following list as a guide for optimal disk space:	
	For serial-attached SCSI (SAS) and spinning disk, calculate the amount of new data that is expected after daily data reduction (compression and data deduplication). Allocate up to 100 percent of that amount, in terabytes, for disk space.	
	• Provide 3 TB for flash-based storage systems with fast network connections to on-premises, high-performance cloud systems.	
	Provide 5 TB for solid-state drive (SSD) systems with fast network connections to high-performance cloud systems.	

Question	Tasks, characteristics, options, or settings	More information
Did you select the appropriate type of local storage?	Ensure that data transfers from local storage to cloud finish before the next backup cycle starts. Tip: Data is removed from local storage soon after it moves to the cloud.	
	Use the following guidelines: • Use flash or SSD for large systems that have high-performing cloud systems. Ensure that you have a dedicated 10 GB wide area network (WAN) link with a high-speed connection to the object storage. For example, use flash or SSD if you have a dedicated 10 GB WAN link plus a high-speed connection to either an IBM Cloud Object Storage location or to an Amazon Simple Storage Service (Amazon S3) data center.	
	Use larger capacity 15000 rpm SAS disks for these scenarios: Medium-sized systems Slower cloud connections, for example, 1 GB When you use IBM Cloud Object Storage as your service provider across several regions For SAS or spinning disk, calculate the amount of new data that is expected after daily data reduction (compression and data deduplication). Allocate up to 100 percent of that amount for disk space, in terabytes.	

Planning for storage pools in DISK or FILE device classes

Use the checklist to review how your disk storage pools are set up. This checklist includes tips for storage pools that use DISK or FILE device classes.

Question	Tasks, characteristics, options, or settings	More information
Can the storage pool LUNs sustain throughput rates for 256 KB sequential reads and writes to adequately handle the workload within the time constraints?	When you are planning for peak loads, consider all the data that you want the server to read or write to the disk storage pools simultaneously. For example, consider the peak flow of data from client backup operations and server data-movement operations such as migration that run at the same time. The IBM Spectrum Protect server reads and writes to storage pools predominantly in 256 KB blocks. If the disk system includes the capability, configure the disk system for optimal performance with sequential read/write operations rather than random read/write operations.	For more information, see Analyzing the basic performance of disk systems.
Is the disk configured to use read and write cache?	Use more cache for better performance.	
For storage pools that use FILE device classes, have you determined a good size to use for the storage pool volumes?	Review the information in Optimal number and size of volumes for storage pools that use disk. If you do not have the information to estimate a size for FILE device class volumes, start with volumes that are 50 GB.	Typically, problems arise more frequently when the volumes are too small. Few problems are reported when volumes are larger than needed. When you determine the volume size to use, as a precaution choose a size that might be larger than necessary.
For storage pools that use FILE device classes, are you using preallocated volumes?	Scratch volumes can cause file fragmentation. To ensure that a storage pool does not run out of volumes, set the MAXSCRATCH parameter to a value greater than zero.	Use the DEFINE VOLUME server command to preallocate volumes in the storage pool. Use the DEFINE STGPOOL or UPDATE STGPOOL server command to set the MAXSCRATCH parameter.
For storage pools that use FILE device classes, have you compared the maximum number of client sessions to the number of volumes that are defined?	Always maintain enough usable volumes in the storage pools to allow for the expected peak number of client sessions that run at one time. The volumes might be scratch volumes, empty volumes, or partly filled volumes.	For storage pools that use FILE device classes, only one session or process can write to a volume at the same time.

Question	Tasks, characteristics, options, or settings	More information
For storage pools that use FILE device classes, have you set the MOUNTLIMIT parameter of the device class to a value that is high enough to account for the number of volumes	For storage pools that use data deduplication, the MOUNTLIMIT parameter is typically in the range of 500 - 1000.	Use the REGISTER NODE or UPDATE NODE server command to set the MAXNUMMP parameter for client nodes.
that might be mounted in parallel?	Set the value for MOUNTLIMIT to the maximum number of mount points that are needed for all active sessions. Consider parameters that affect the maximum number of mount points that are needed: • The MAXSESSIONS server option,	
	which is the maximum number of IBM Spectrum Protect sessions that can run concurrently.	
	The MAXNUMMP parameter, which sets the maximum number of mount points that each client node can use.	
	For example, if the maximum number of client node backup sessions is typically 100 and each of the nodes has MAXNUMMP=2, multiply 100 nodes by the 2 mount points for each node to get the value of 200 for the MOUNTLIMIT parameter.	
For storage pools that use DISK device classes, have you determined how many storage pool volumes to put on each file system?	How you configure the storage for a storage pool that uses a DISK device class depends on whether you are using RAID for the disk system.	For an example layout that follows this guideline, see Sample layout of server storage pools.
	If you are not using RAID, then configure one file system per physical disk, and define one storage pool volume for each file system.	
	If you are using RAID 5 with $n + 1$ volumes, configure the storage in one of the following ways:	
	• Configure <i>n</i> file systems on the LUN and define one storage pool volume per file system.	
	• Configure one file system and <i>n</i> storage pool volumes for the LUN.	
Did you create your storage pools to distribute I/O across multiple file systems?	Ensure that each file system is on a different LUN on the disk system.	For details, see the following topics: • Tuning disk storage for the server
-	Typically, having 10 - 30 file systems is a good goal, but ensure that the file systems are no smaller than approximately 250 GB.	Tuning and configuring storage pools and volumes

Planning for the correct type of storage technology

Storage devices have different capacity and performance characteristics. These characteristics affect which devices are better for use with IBM Spectrum Protect.

Procedure

Review the following table to help you to choose the correct type of storage technology for the storage resources that the server requires.

Table 2. Storage technology types for IBM Spectrum Protect storage requirements

Storage technology type	Database	Active log	Archive log and archive failover log	Storage pools
Solid-state disk (SSD)	Place the database on SSD in the following circumstances: • You are using IBM Spectrum Protect data deduplication. • You are backing up more than 8 TB of new data daily.	If you place the IBM Spectrum Protect database on an SSD, as a best practice, place the active log on an SSD. If space is not available, use high-performance disk instead.	Save SSDs for use with the database and active log. The archive log and archive failover logs can be placed on slower storage technology types.	Save SSDs for use with the database and active log. Storage pools can be placed on slower storage technology types.
High- performance disk with the following characteristics: 15k rpm disk Fibre Channel or serial- attached SCSI (SAS) interface	Use high-performance disks in the following circumstances: • The server does not do data deduplication. • The server does not do node replication. Isolate the server database from its logs and storage pools, and from data for other applications.	Use high-performance disks in the following circumstances: • The server does not do data deduplication. • The server does not do node replication. For performance and availability, isolate the active log from the server database, archive logs, and storage pools.	You can use high-performance disks for the archive log and archive failover logs. For availability, isolate these logs from the database and active log.	Use high-performance disks for storage pools in the following circumstances: Data is frequently read. Data is frequently written. For performance and availability, isolate storage pool data from the server database and logs, and from data for other applications.
Medium- performance or high- performance disk with the following characteristics: • 10k rpm disk • Fibre Channel or SAS interface	If the disk system has a mix of disk technologies, use the faster disks for the database and active log. Isolate the server database from its logs and storage pools, and from data for other applications.	If the disk system has a mix of disk technologies, use the faster disks for the database and active log. For performance and availability, isolate the active log from the server database, archive logs, and storage pools.	You can use medium-performance or high-performance disk for the archive log and archive failover logs. For availability, isolate these logs from the database and active log.	Use medium-performance or high-performance disk for storage pools in the following circumstances: • Data is frequently read. • Data is frequently written. For performance and availability, isolate storage pool data from the server database and logs, and from data for other applications.

Table 2. Storage technology types for IBM Spectrum Protect storage requirements (continued)

Storage technology type	Database	Active log	Archive log and archive failover log	Storage pools
SATA, network- attached storage	Do not use this storage for the database. Do not place the database on XIV storage systems.	Do not use this storage for the active log.	Use of this slower storage technology is acceptable because these logs are written once and infrequently read.	Use this slower storage technology in the following circumstances: • Data is infrequently written, for example written once. • Data is infrequently read.
Tape and virtual tape				Use for long-term retention or if data is infrequently used.

Applying best practices to the server installation

Typically, hardware configuration and selection have the most significant effect on the performance of an IBM Spectrum Protect solution. Other factors that affect performance are the operating system selection and configuration, and the configuration of IBM Spectrum Protect.

Procedure

- · The following best practices are the most important for optimal performance and problem prevention.
- Review the table to determine the best practices that apply to your environment.

Best practice	More information
Use fast disks for the server database. Enterprise-grade solid-state disks (SSD), with Fibre Channel or SAS interface, offer the best performance.	Use fast, low-latency disks for the database. Using SSD is essential if you are using data deduplication and node replication. Avoid Serial Advanced Technology Attachment (SATA) and Parallel Advanced Technology Attachment (PATA) disks. For details and more tips, see the following topics: • "Planning for server database disks"
	"Planning for the correct type of storage technology"
Ensure that the server system has enough memory.	Review operating system requirements in technote 1243309. Heavier workloads require more than the minimum requirements. Advanced features such as data deduplication and node replication can require more than the minimum memory that is specified in the system requirements document.
	If you plan to run multiple instances, each instance requires the memory that is listed for one server. Multiply the memory for one server by the number of instances that are planned for the system.

Best practice	More information	
Separate the server database, the active log, the archive log, and disk storage pools from each other.	Keep all IBM Spectrum Protect storage resources on separate disks. Keep storage pool disks separate from the disks for the server database and logs. Storage pool operations can interfere with database operations when both are on the same disks. Ideally, the server database and logs are also separated from each other. For details and more tips, see the following topics: • "Planning for server database disks"	
	"Planning for server recovery log disks"	
Use at least four directories for the server database. For larger servers or servers that use advanced features, use eight directories.	"Planning for storage pools in DISK or FILE device classes" Place each directory on a LUN that is isolated from other LUNs and from other applications.	
	A server is considered to be large if its database is larger than 2 TB or is expected to grow to that size. Use eight directories for such servers.	
	See "Planning for server database disks".	
If you are using data deduplication, node replication, or both, follow the guidelines for database configuration and other items.	Configure the server database according to the guidelines, because the database is extremely important to how well the server runs when these features are being used. For details and more tips, see the following topics:	
	Checklist for data deduplication	
	Checklist for node replication	
For storage pools that use FILE type device classes, follow the guidelines for the size of storage pool volumes. Typically, 50 GB volumes are best.	Review the information in Optimal number and size of volumes for storage pools that use disk to help you to determine volume size. Configure storage pool devices and file systems based on throughput requirements, not only on capacity requirements. Isolate the storage devices that are used by IBM Spectrum Protect from other applications that have high I/O, and ensure that there is enough throughput to that storage. For more details, see Checklist for storage pools on DISK or FILE.	
Schedule IBM Spectrum Protect client	For more details, see the following topics:	
operations and server maintenance activities to avoid or minimize overlap of operations.	 Tuning the schedule for daily operations Checklist for server configuration	
Monitor operations constantly.	By monitoring, you can find problems early and more easily identify causes. Keep records of monitoring reports for up to a year to help you identify trends and plan for growth. See Monitoring and maintaining the environment for performance.	

Minimum system requirements for the IBM Spectrum Protect server

The server can require a large amount of memory, network bandwidth, and processor resources. In many cases, the server performs best when other applications are not installed on the same system.

Hardware and software requirements for the IBM Spectrum **Protect server installation**

These tables list the minimum hardware and software requirements for the installation of an IBM Spectrum Protect server. Use these requirements as a starting point for systems without data deduplication. The optimal IBM Spectrum Protect

environment is set up with data deduplication by using the IBM Spectrum Protect Blueprints. For the most current information about system requirements, see technote 1243309.

Hardware requirements

Table 3 describes the minimum hardware requirements for the server. If the server does not meet the minimum requirements, the installation fails. For more details about planning disk space, see "Capacity planning" on page 24.

Table 3. Hardware requirements

Type of hardware	Hardware requirements	
Hardware	An AMD64 or Intel EMT-64 processor	
Disk Space	The following minimum values for disk space:	
	At least 7.5 GB of free disk storage for a typical installation	
	60 MB in the temporary directory space	
	• 2 GB partition size in the C:\ drive	
	• 300 MB in the instance directory	
	• 2 GB for the shared resources area	
	In case a problem arises and any diagnosis is needed, it is optimal to have temporary or other space available on the system for a first failure data capture (FFDC) log or for other temporary uses such as for collecting trace logs.	
	Significant additional disk space is required for database and log files. The size of the database depends on the number of client files to be stored and the method by which the server manages them. The default active log space is 16 GB, the minimum that is needed for most workloads and configurations. When you create the active log, you need at least 64 GB to run replication. If replication and data deduplication are both being used, create an active log of 128 GB. Allocate at least three times the default active log space for the archive log (48 GB). Ensure that you have sufficient resources if you are using data deduplication or expect a heavy client workload.	
	For optimal performance and to facilitate I/O, specify at least two equally sized containers or Logical Unit Numbers (LUNs) for the database. In addition, each active log and archive log needs its own container or LUN.	
	Ensure that you see "Capacity planning" on page 24 for more details about disk space.	
Memory	The following minimum values for memory:	
	16 GB for standard server operations without data deduplication and node replication	
	24 GB for data deduplication or node replication	
	32 GB for node replication with data deduplication	
	For more specific memory requirements for larger databases and higher ingestion capability, see the IBM Spectrum Protect server memory tuning table.	
	For more specific memory requirements when you are using data deduplication, see the IBM Spectrum Protect Blueprint for your operating system.	

Software requirements

Table 4 describes the minimum software requirements that are needed for a server on a Windows system.

Table 4. Software requirements

Type of software	Minimum software requirements		
Operating	One of the following operating systems:		
system	Microsoft Windows Server 2012: Standard, Enterprise, or Datacenter Edition (64-bit)		
	Microsoft Windows Server 2012 R2 (64-bit)		
	Microsoft Windows Server 2016		
Communication protocol	At least one of the following communication protocols (installed by default with the current Windows operating systems):		
	Named Pipes		
	TCP/IP Version 4 or Version 6		
Device drivers	The IBM Spectrum Protect passthru device driver that is required for non-IBM drives and tape libraries. The Windows native device driver is recommended for tape drives and tape libraries. Otherwise, the IBM Spectrum Protect kernel device driver can be used.		
	For the IBM 3590, 3592, or the Ultrium tape library or drives, the IBM device drivers are required. Install the most current device drivers. You can locate IBM driver packages at Fix Central.		
	Configure the device drivers before you use the server with tape devices.		
Other software	Windows 2012, Windows 2012 R2, and Windows 2016 require that .NET Framework 3.5 is installed and enabled.		
	The following User Account Control policies must be disabled:		
	User Account Control: Admin Approval Mode for the Built-in Administrator account		
	User Account Control: Run all administrators in Admin Approval Mode		
	To authenticate IBM Spectrum Protect users with a Lightweight Directory Access Protocol (LDAP) server, you must use one of the following directory servers:		
	Microsoft Active Directory (Windows Server 2012, Windows Server 2012 R2)		
	IBM Security Directory Server V6.3		
	IBM Security Directory Server V6.4		

IBM Installation Manager

IBM Spectrum Protect uses IBM Installation Manager, which is an installation program that can use remote or local software repositories to install or update many IBM products.

If the required version of IBM Installation Manager is not already installed, it is automatically installed or upgraded when you install IBM Spectrum Protect. It must remain installed on the system so that IBM Spectrum Protect can be updated or uninstalled later as needed.

The following list contains explanations of some terms that are used in IBM Installation Manager:

Offering

An installable unit of a software product.

The IBM Spectrum Protect offering contains all of the media that IBM Installation Manager requires to install IBM Spectrum Protect.

Package

The group of software components that are required to install an offering.

The IBM Spectrum Protect package contains the following components:

- IBM Installation Manager installation program
- IBM Spectrum Protect offering

Package group

A set of packages that share a common parent directory.

The default package group for the IBM Spectrum Protect package is IBM Installation Manager.

Repository

A remote or local storage area for data and other application resources.

The IBM Spectrum Protect package is stored in a repository on IBM Fix Central.

Shared resources directory

A directory that contains software files or plug-ins that are shared by packages.

IBM Installation Manager stores installation-related files in the shared resources directory, including files that are used for rolling back to a previous version of IBM Spectrum Protect.

Worksheets for planning details for the server

You can use the worksheets to help you plan the amount and location of storage needed for the IBM Spectrum Protect server. You can also use them to keep track of names and user IDs.

Restriction: If you are using a File Allocation Table (FAT or FAT32) or a New Technology File System (NTFS) format, you cannot specify the root directory of that system as the location of a database directory or log directory. Instead, you must create one or more subdirectories within the root directory. Then, create the database directories and log directories within the subdirectories.

Item	Space required	Number of directories	Location of directories
The database			
Active log			
Archive log			
Optional: Log mirror for the active log			
Optional: Secondary archive log (failover location for archive log)			

Item	Names and user IDs	Location
The <i>instance user ID</i> for the server, which is the ID you use to start and run the IBM Spectrum Protect server		
The <i>home directory</i> for the server, which is the directory that contains the instance user ID		
The database instance name		
The <i>instance directory</i> for the server, which is a directory that contains files specifically for this server instance (the server options file and other server-specific files)		
The server name, use a unique name for each server		

Capacity planning

Capacity planning for IBM Spectrum Protect includes managing resources such as the database, the recovery log and the shared resource area. To maximize resources as part of capacity planning, you must estimate space requirements for the database and the recovery log. The shared resource area must have enough space available for each installation or upgrade.

Estimating space requirements for the database

To estimate space requirements for the database, you can use the maximum number of files that can be in server storage at one time or you can use storage pool capacity.

About this task

Consider using at least 25 GB for the initial database space. Provision file system space appropriately. A database size of 25 GB is adequate for a test environment or a library-manager-only environment. For a production server supporting client workloads, the database size is expected to be larger. If you use random-access disk (DISK) storage pools, more database and log storage space is needed than for sequential-access storage pools.

The maximum size of the IBM Spectrum Protect database is 6 TB.

For information about sizing the database in a production environment that is based on the number of files and on storage pool size, see the following topics.

Estimating database space requirements based on the number of files

If you can estimate the maximum number of files that might be in server storage at a time, you can use that number to estimate space requirements for the database.

About this task

To estimate space requirements that is based on the maximum number of files in server storage, use the following guidelines:

• 600 - 1000 bytes for each stored version of a file, including image backups.

Restriction: The guideline does not include space that is used during data deduplication.

- 100 200 bytes for each cached file, copy storage pool file, active-data pool file, and deduplicated file.
- Additional space is required for database optimization to support varying data-access patterns and to support server back-end processing of the data. The amount of extra space is equal to 50% of the estimate for the total number of bytes for file objects.

In the following example for a single client, the calculations are based on the maximum values in the preceding guidelines. The examples do not take into account that you might use file aggregation. In general, when you aggregate small files, it reduces the amount of required database space. File aggregation does not affect space-managed files.

Procedure

- 1. Calculate the number of file versions. Add each of the following values to obtain the number of file versions:
 - a. Calculate the number of backed-up files. For example, as many as 500,000 client files might be backed up at a time. In this example, storage policies are set to keep up to three copies of backed up files:

```
500,000 files * 3 copies = 1,500,000 files
```

- b. Calculate the number of archive files. For example, as many as 100,000 client files might be archived copies.
- **c**. Calculate the number of space-managed files. For example, as many as 200,000 client files might be migrated from client workstations.

Using 1000 bytes per file, the total amount of database space that is required for the files that belong to the client is 1.8 GB:

```
(1,500,000 + 100,000 + 200,000) * 1000 = 1.8 GB
```

- 2. Calculate the number of cached files, copy storage-pool files, active-data pool files, and deduplicated files:
 - a. Calculate the number of cached copies. For example, caching is enabled in a 5 GB disk storage pool. The high migration threshold of the pool is 90% and the low migration threshold of the pool is 70%. Thus, 20% of the disk pool, or 1 GB, is occupied by cached files.

If the average file size is about 10 KB, approximately 100,000 files are in cache at any one time:

```
100,000 files * 200 bytes = 19 MB
```

b. Calculate the number of copy storage-pool files. All primary storage pools are backed up to the copy storage pool:

```
(1,500,000 + 100,000 + 200,000) * 200  bytes = 343 MB
```

c. Calculate the number of active storage-pool files. All the active client-backup data in primary storage pools is copied to the active-data storage pool. Assume that 500,000 versions of the 1,500,000 backup files in the primary storage pool are active:

```
500,000 * 200 bytes = 95 MB
```

d. Calculate the number of deduplicated files. Assume that a deduplicated storage pool contains 50,000 files:

```
50,000 * 200  bytes = 10 MB
```

Based on the preceding calculations, about 0.5 GB of extra database space is required for the client's cached files, copy storage-pool files, active-data pool files, and deduplicated files.

3. Calculate the amount of extra space that is required for database optimization. To provide optimal data access and management by the server, extra database space is required. The amount of extra database space is equal to 50% of the total space requirements for file objects.

```
(1.8 + 0.5) * 50\% = 1.2 GB
```

4. Calculate the total amount of database space that is required for the client. The total is approximately 3.5 GB:

```
1.8 + 0.5 + 1.2 = 3.5 \text{ GB}
```

5. Calculate the total amount of database space that is required for all clients. If the client that was used in the preceding calculations is typical and you have 500 clients, for example, you can use the following calculation to estimate the total amount of database space that is required for all clients:

```
500 * 3.5 = 1.7 TB
```

Results

Tip: In the preceding examples, the results are estimates. The actual size of the database might differ from the estimate because of factors such as the number of directories and the length of the path and file names. Periodically monitor your database and adjust its size as necessary.

What to do next

During normal operations, the IBM Spectrum Protect server might require temporary database space. This space is needed for the following reasons:

- To hold the results of sorting or ordering that are not already being kept and optimized in the database directly. The results are temporarily held in the database for processing.
- To give administrative access to the database through one of the following methods:
 - A DB2 open database connectivity (ODBC) client
 - An Oracle Java database connectivity (JDBC) client
 - Structured Query Language (SQL) to the server from an administrative-client command line

Consider using an extra 50 GB of temporary space for every 500 GB of space for file objects and optimization. See the guidelines in the following table. In the example that is used in the preceding step, a total of 1.7 TB of database space is

required for file objects and optimization for 500 clients. Based on that calculation, 200 GB is required for temporary space. The total amount of required database space is 1.9 TB.

Database size	Minimum temporary-space requirement
< 500 GB	50 GB
≥ 500 GB and < 1 TB	100 GB
≥ 1 TB and < 1.5 TB	150 GB
≥ 1.5 and < 2 TB	200 GB
≥ 2 and < 3 TB	250 - 300 GB
≥ 3 and < 4 TB	350 - 400 GB

Estimating database space requirements based on storage pool capacity

To estimate database space requirements based on storage pool capacity, use a ratio of 1 - 5%. For example, if you require 200 TB of storage pool capacity, the size of your database is expected to be 2 - 10 TB. As a general rule, make your database as large as possible to prevent running out of space. If you run out of database space, server operations and client-store operations can fail.

The database manager and temporary space

The IBM Spectrum Protect server database manager manages and allocates system memory and disk space for the database. The amount of database space you require depends on the amount of system memory available and the server workload.

The database manager sorts data in a specific sequence, according to the SQL statement that you issue to request the data. Depending on the workload on the server, and if there is more data than the database manager can manage, the data (that is ordered in sequence) is allocated to temporary disk space. Data is allocated to temporary disk space when there is a large result set. The database manager dynamically manages the memory that is used when data is allocated to temporary disk space.

For example, expiration processing can produce a large result set. If there is not enough system memory on the database to store the result set, some of the data is allocated to temporary disk space. During expiration processing, if a node or file space are selected that are too large to process, the database manager cannot sort the data in memory. The database manager must use temporary space to sort data.

To run database operations, consider adding more database space for the following scenarios:

- The database has a small amount of space and the server operation that requires temporary space uses the remaining free space.
- The file spaces are large, or the file spaces have an assigned policy that creates many file versions.
- The IBM Spectrum Protect server must run with limited memory. The database
 uses the IBM Spectrum Protect server main memory to run database operations.
 However, if there is insufficient memory available, the IBM Spectrum Protect
 server allocates temporary space on disk to the database. For example, if 10G of
 memory is available and database operations require 12G of memory, the
 database uses temporary space.

 An out of database space error is displayed when you deploy an IBM Spectrum Protect server. Monitor the server activity log for messages that are related to database space.

Important: Do not change the DB2 software that is installed with the IBM Spectrum Protect installation packages and fix packs. Do not install or upgrade to a different version, release, or fix pack, of DB2 software to avoid damage to the database.

Recovery log space requirements

In IBM Spectrum Protect, the term *recovery log* comprises the active log, the archive log, the active log mirror, and the archive failover log. The amount of space that you require for the recovery log depends on various factors, including, for example, the amount of client activity with the server.

Active and archive log space

When you estimate space requirements for active and archive logs, include some extra space for contingencies such as occasional heavy workloads and failovers.

In IBM Spectrum Protect servers V7.1 and later, the active log can be a maximum size of 512 GB. The archive log size is limited to the size of the file system that it is installed on.

Use the following general guidelines when you estimate the size of the active log:

- The suggested starting size for the active log is 16 GB.
- Ensure that the active log is at least large enough for the amount of concurrent
 activity that the server typically handles. As a precaution, try to anticipate the
 largest amount of work that the server manages at one time. Provision the active
 log with extra space that can be used if needed. Consider using 20% of extra
 space.
- Monitor used and available active log space. Adjust the size of the active log as needed, depending upon factors such as client activity and the level of server operations.
- Ensure that the directory that holds the active log is as large as, or larger than, the size of the active log. A directory that is larger than the active log can accommodate failovers, if they occur.
- Ensure that the file system that contains the active log directory has at least 8 GB of free space for temporary log movement requirements.

The suggested starting size for the archive log is 48 GB.

The archive log directory must be large enough to contain the log files that are generated since the previous full backup. For example, if you perform a full backup of the database every day, the archive log directory must be large enough to hold the log files for all the client activity that occurs during 24 hours. To recover space, the server deletes obsolete archive log files after a full backup of the database. If the archive log directory becomes full and a directory for archive failover logs does not exist, log files remain in the active log directory. This condition can cause the active log directory to fill up and stop the server. When the server restarts, some of the existing active-log space is released.

After the server is installed, you can monitor archive log utilization and the space in the archive log directory. If the space in the archive log directory fills up, it can cause the following problems:

- The server is unable to perform full database backups. Investigate and resolve this problem.
- Other applications write to the archive log directory, exhausting the space that is required by the archive log. Do not share archive log space with other applications including other IBM Spectrum Protect servers. Ensure that each server has a separate storage location that is owned and managed by that specific server.

Example: Estimating active and archive log sizes for basic client-store operations:

Basic client-store operations include backup, archive, and space management. Log space must be sufficient to handle all store transactions that are in progress at one time.

To determine the sizes of the active and archive logs for basic client-store operations, use the following calculation:

number of clients $\, x \,$ files stored during each transaction $\, x \,$ log space needed for each file

This calculation is used in the example in the following table.

Table 5. Basic client-store operations

Item	Example values	Description
Maximum number of client nodes that back up, archive, or migrate files concurrently at any time	300	The number of client nodes that back up, archive, or migrate files every night.
Files stored during each transaction	4096	The default value of the server option TXNGROUPMAX is 4096.
Log space that is required for each file	3053 bytes	The value of 3053 bytes for each file in a transaction represents the log bytes that are needed when backing up files from a Windows client where the file names are 12 - 120 bytes. This value is based on the results of tests performed under
		laboratory conditions. The tests consisted of backup-archive clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than 3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.
Active log: Suggested size	19.5 GB ¹	Use the following calculation to determine the size of the active log. One GB equals 1,073,741,824 bytes.
		(300 clients x 4096 files stored during each transaction x 3053 bytes for each file) ÷ 1,073,741,824 bytes = 3.5 GB
		Increase that amount by the suggested starting size of 16 GB:
		3.5 + 16 = 19.5 GB

Table 5. Basic client-store operations (continued)

Item	Example values	Description
Archive log: Suggested size	58.5 GB ¹	Because of the requirement to be able to store archive logs across three server database-backup cycles, multiply the estimate for the active log by 3 to estimate the total archive log requirement. 3.5 x 3 = 10.5 GB Increase that amount by the suggested starting size of 48 GB: 10.5 + 48 = 58.5 GB

¹ The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.

Monitor your logs and adjust their size if necessary.

Example: Estimating active and archive log sizes for clients that use multiple sessions:

If the client option RESOURCEUTILIZATION is set to a value that is greater than the default, the concurrent workload for the server increases.

To determine the sizes of the active and archive logs when clients use multiple sessions, use the following calculation:

number of clients $\, x \,$ sessions for each client $\, x \,$ files stored during each transaction $\, x \,$ log space needed for each file

This calculation is used in the example in the following table.

Table 6. Multiple client sessions

Item	Exampl	e values	Description
Maximum number of client nodes that back up, archive, or migrate files concurrently at any time	300	1000	The number of client nodes that back up, archive, or migrate files every night.
Possible sessions for each client	3	3	The setting of the client option RESOURCEUTILIZATION is larger than the default. Each client session runs a maximum of three sessions in parallel.
Files stored during each transaction	4096	4096	The default value of the server option TXNGROUPMAX is 4096.

Table 6. Multiple client sessions (continued)

Item	Exampl	e values	Description
Log space that is required for each file	3053	3053	The value of 3053 bytes for each file in a transaction represents the log bytes needed when backing up files from a Windows client where the file names are 12 - 120 bytes. This value is based on the results of tests performed under laboratory conditions. Tests consisted of clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than 3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.
Active log: Suggested size	26.5 GB ¹	51 GB ¹	The following calculation was used for 300 clients. One GB equals 1,073,741,824 bytes. (300 clients x 3 sessions for each client x 4096 files stored during each transaction x 3053 bytes for each file) ÷ 1,073,741,824 = 10.5 GB Increase that amount by the suggested starting size of 16 GB: 10.5 + 16 = 26.5 GB The following calculation was used for 1000 clients. One GB equals 1,073,741,824 bytes. (1000 clients x 3 sessions for each client x 4096 files store during each transaction x 3053 bytes for each file) ÷ 1,073,741,824 = 35 GB Increase that amount by the suggested starting size of 16 GB: 35 + 16 = 51 GB
Archive log: Suggested size	79.5 GB ¹	153 GB ¹	Because of the requirement to be able to store archive logs across three server-database backup cycles, the estimate for the active log is multiplied by 3: 10.5 x 3 = 31.5 GB 35 x 3 = 105 GB Increase those amounts by the suggested starting size of 48 GB: 31.5 + 48 = 79.5 GB 105 + 48 = 153 GB

¹ The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.

Monitor your active log and adjust its size if necessary.

Example: Estimating active and archive log sizes for simultaneous write operations:

If client backup operations use storage pools that are configured for simultaneous write, the amount of log space that is required for each file increases.

The log space that is required for each file increases by about 200 bytes for each copy storage pool that is used for a simultaneous write operation. In the example in the following table, data is stored to two copy storage pools in addition to a primary storage pool. The estimated log size increases by 400 bytes for each file. If you use the suggested value of 3053 bytes of log space for each file, the total number of required bytes is 3453.

This calculation is used in the example in the following table.

Table 7. Simultaneous write operations

Item	Example values	Description
Maximum number of client nodes that back up, archive, or migrate files concurrently at any time	300	The number of client nodes that back up, archive, or migrate files every night.
Files stored during each transaction	4096	The default value of the server option TXNGROUPMAX is 4096.
Log space that is required for each file	3453 bytes	3053 bytes plus 200 bytes for each copy storage pool. The value of 3053 bytes for each file in a transaction represents the log bytes that are needed when backing up files from a Windows client where the file names are 12 - 120 bytes. This value is based on the results of tests performed under laboratory conditions. The tests consisted of backup-archive clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than 3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.
Active log: Suggested size	20 GB ¹	Use the following calculation to determine the size of the active log. One GB equals 1,073,741,824 bytes. (300 clients x 4096 files stored during each transaction x 3453 bytes for each file) ÷ 1,073,741,824 bytes = 4.0 GB Increase that amount by the suggested starting size of 16 GB: 4 + 16 = 20 GB
Archive log: Suggested size	60 GB ¹	Because of the requirement to be able to store archive logs across three server database-backup cycles, multiply the estimate for the active log by 3 to estimate the archive log requirement: 4 GB x 3 = 12 GB Increase that amount by the suggested starting size of 48 GB: 12 + 48 = 60 GB

Table 7. Simultaneous write operations (continued)

	Example	
Item	values	Description

¹ The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.

Monitor your logs and adjust their size if necessary.

Example: Estimating active and archive log sizes for basic client store operations and server operations:

Migration of data in server storage, identification processes for data deduplication, reclamation, and expiration might run concurrently with client store operations. Administrative tasks such as administrative commands or SQL queries from administrative clients can also run concurrently with client store operations. Server operations and administrative tasks that run concurrently can increase the active log space that is required.

For example, migration of files from the random-access (DISK) storage pool to a sequential-access disk (FILE) storage pool uses approximately 110 bytes of log space for each file that is migrated. For example, suppose that you have 300 backup-archive clients and each one of them backs up 100,000 files every night. The files are initially stored on DISK and then migrated to a FILE storage pool. To estimate the amount of active log space that is required for the data migration, use the following calculation. The number of clients in the calculation represents the maximum number of client nodes that back up, archive, or migrate files concurrently at any time.

300 clients \times 100,000 files for each client \times 110 bytes = 3.1 GB

Add this value to the estimate for the size of the active log that calculated for basic client store operations.

Example: Estimating active and archive log sizes under conditions of extreme variation:

Problems with running out of active log space can occur if you have many transactions that complete quickly and some transactions that take much longer to complete. A typical case occurs when many workstation or file-server backup sessions are active and a few very large database server-backup sessions are active. If this situation applies to your environment, you might need to increase the size of the active log so that the work completes successfully.

Example: Estimating archive log sizes with full database backups:

The IBM Spectrum Protect server deletes unnecessary files from the archive log only when a full database backup occurs. Consequently, when you estimate the space that is required for the archive log, you must also consider the frequency of full database backups.

For example, if a full database backup occurs once a week, the archive log space must be able to contain the information in the archive log for a full week.

The difference in archive log size for daily and full database backups is shown in the example in the following table.

Table 8. Full database backups

Item	Example values	Description
Maximum number of client nodes that back up, archive, or migrate files concurrently at any time	300	The number of client nodes that back up, archive, or migrate files every night.
Files stored during each transaction	4096	The default value of the server option TXNGROUPMAX is 4096.
Log space that is required for each file	3453 bytes	3053 bytes for each file plus 200 bytes for each copy storage pool. The value of 3053 bytes for each file in a transaction represents the log bytes needed when backing up files from a Windows client where the file names are 12 - 120 bytes. This value is based on the results of tests performed under laboratory conditions. Tests consisted of clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than
		3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.
Active log: Suggested size	20 GB ¹	Use the following calculation to determine the size of the active log. One GB equals 1,073,741,824 bytes. (300 clients x 4096 files per transaction x 3453 bytes per file) ÷ 1,073,741,824 bytes = 4.0 GB Increase that amount by the suggested starting size of 16 GB: 4 + 16 = 20 GB
Archive log: Suggested size with a full database backup every day	60 GB ¹	Because of the requirement to be able to store archive logs across three backup cycles, multiply the estimate for the active log by 3 to estimate the total archive log requirement: 4 GB x 3 = 12 GB Increase that amount by the suggested starting size of 48 GB: 12 + 48 = 60 GB

Table 8. Full database backups (continued)

Item	Example values	Description
Archive log: Suggested size with a full database every week	132 GB ¹	Because of the requirement to be able to store archive logs across three server database-backup cycles, multiply the estimate for the active log by 3 to estimate the total archive log requirement. Multiply the result by the number of days between full database backups: (4 GB x 3) x 7 = 84 GB Increase that amount by the suggested starting size of 48 GB: 84 + 48 = 132 GB

¹ The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested starting size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.

Monitor your logs and adjust their size if necessary.

Example: Estimating active and archive log sizes for data deduplication operations:

If you deduplicate data, you must consider its effects on space requirements for active and archive logs.

The following factors affect requirements for active and archive log space:

The amount of deduplicated data

The effect of data deduplication on the active log and archive log space depends on the percentage of data that is eligible for deduplication. If the percentage of data that can be deduplicated is relatively high, more log space is required.

The size and number of extents

Approximately 1,500 bytes of active log space are required for each extent that is identified by a duplicate-identification process. For example, if 250,000 extents are identified by a duplicate-identification process, the estimated size of the active log is 358 MB:

250,000 extents identified during each process x 1,500 bytes for each extent = 358 MB

Consider the following scenario. Three hundred backup-archive clients back up 100,000 files each night. This activity creates a workload of 30,000,000 files. The average number of extents for each file is two. Therefore, the total number of extents is 60,000,000, and the space requirement for the archive log is 84 GB:

60,000,000 extents x 1,500 bytes for each extent = 84 GB

A duplicate-identification process operates on aggregates of files. An aggregate consists of files that are stored in a given transaction, as specified by the TXNGROUPMAX server option. Suppose that the TXNGROUPMAX server option is set to the default of 4096. If the average number of extents for each file is two, the total number of extents in each aggregate is 8192, and the space required for the active log is 12 MB:

8192 extents in each aggregate x 1500 bytes for each extent = 12 MB

The timing and number of the duplicate-identification processes

The timing and number of duplicate-identification processes also affects the size of the active log. Using the 12 MB active-log size that was calculated in the preceding example, the concurrent load on the active log is 120 MB if 10 duplicate-identification processes are running in parallel:

12 MB for each process x 10 processes = 120 MB

File size

Large files that are processed for duplicate identification can also affect the size of the active log. For example, suppose that a backup-archive client backs up an 80 GB, file-system image. This object can have a high number of duplicate extents if, for example, the files included in the file system image were backed up incrementally. For example, assume that a file system image has 1.2 million duplicate extents. The 1.2 million extents in this large file represent a single transaction for a duplicate-identification process. The total space in the active log that is required for this single object is 1.7 GB:

1,200,000 extents x 1,500 bytes for each extent = 1.7 GB

If other, smaller duplicate-identification processes occur at the same time as the duplicate-identification process for a single large object, the active log might not have enough space. For example, suppose that a storage pool is enabled for deduplication. The storage pool has a mixture of data, including many relatively small files that range from 10 KB to several hundred KB. The storage pool also has few large objects that have a high percentage of duplicate extents.

To take into account not only space requirements but also the timing and duration of concurrent transactions, increase the estimated size of the active log by a factor of two. For example, suppose that your calculations for space requirements are 25 GB (23.3 GB + 1.7 GB for deduplication of a large object). If deduplication processes are running concurrently, the suggested size of the active log is 50 GB. The suggested size of the archive log is 150 GB.

The examples in the following tables show calculations for active and archive logs. The example in the first table uses an average size of 700 KB for extents. The example in the second table uses an average size of 256 KB. As the examples show, the average deduplicate-extent size of 256 KB indicates a larger estimated size for the active log. To minimize or prevent operational problems for the server, use 256 KB to estimate the size of the active log in your production environment.

Table 9. Average duplicate-extent size of 700 KB

Item	Examp	le values	Description
Size of largest single object to deduplicate	800 GB	4 TB	The granularity of processing for deduplication is at the file level. Therefore, the largest single file to deduplicate represents the largest transaction and a correspondingly large load on the active and archive logs.
Average size of extents	700 KB	700 KB	The deduplication algorithms use a variable block method. Not all deduplicated extents for a given file are the same size, so this calculation assumes an average size for extents.

Table 9. Average duplicate-extent size of 700 KB (continued)

Item	Examp	ole values	Description
Extents for a given file	1,198,372 bits	6,135,667 bits	Using the average extent size (700 KB), these calculations represent the total number of extents for a given object.
			The following calculation was used for an 800 GB object: (800 GB ÷ 700 KB) = 1,198,372 bits
			The following calculation was used for a 4 TB object: (4 TB ÷ 700 KB) = 6,135,667 bits
Active log: Suggested size that is required for the deduplication of a single large object during a single duplicate-identification process	1.7 GB	8.6 GB	The estimated active log space that are needed for this transaction.
Active log: Suggested total size	66 GB ¹	79.8 GB ¹	After considering other aspects of the workload on the server in addition to deduplication, multiply the existing estimate by a factor of two. In these examples, the active log space required to deduplicate a single large object is considered along with previous estimates for the required active log size.
			The following calculation was used for multiple transactions and an 800 GB object:
			(23.3 GB + 1.7 GB) x 2 = 50 GB
			Increase that amount by the suggested starting size of 16 GB:
			50 + 16 = 66 GB
			The following calculation was used for multiple transactions and a 4 TB object:
			(23.3 GB + 8.6 GB) x 2 = 63.8 GB
			Increase that amount by the suggested starting size of 16 GB:
			63.8 + 16 = 79.8 GB
Archive log:	198 GB ¹	239.4 GB ¹	Multiply the estimated size of the active log by a factor of 3.
Suggested size			The following calculation was used for multiple transactions and an 800 GB object:
			50 GB x 3 = 150 GB
			Increase that amount by the suggested starting size of 48 GB:
			150 + 48 = 198 GB
			The following calculation was used for multiple transactions and a 4 TB object:
			63.8 GB x 3 = 191.4 GB
			Increase that amount by the suggested starting size of 48 GB:
			191.4 + 48 = 239.4 GB

Table 9. Average duplicate-extent size of 700 KB (continued)

Item	Example values	Description			
¹ The example values in this table are used only to illustrate how the sizes for active logs and archive logs are					
calculated. In a production environment that uses deduplication, 32 GB is the suggested minimum size for an active					
log. The suggested minimum size for an archive log in a production environment that uses deduplication is 96 GB.					
If you substitute values from your environment and the results are larger than 32 GB and 96 GB, use your results					
size the active log and archive log.					

Monitor your logs and adjust their size if necessary.

Table 10. Average duplicate-extent size of 256 KB

Item	Exampl	e values	Description
Size of largest single object to deduplicate	800 GB	4 TB	The granularity of processing for deduplication is at the file level. Therefore, the largest single file to deduplicate represents the largest transaction and a correspondingly large load on the active and archive logs.
Average size of extents	256 KB	256 KB	The deduplication algorithms use a variable block method. Not all deduplicated extents for a given file are the same size, so this calculation assumes an average extent size.
Extents for a given file	3,276,800 bits	16,777,216 bits	Using the average extent size, these calculations represent the total number of extents for a given object. The following calculation was used for multiple transactions and an 800 GB object: (800 GB ÷ 256 KB) = 3,276,800 bits The following calculation was used for multiple transactions and a 4 TB object: (4 TB ÷ 256 KB) = 16,777,216 bits
Active log: Suggested size that is required for the deduplication of a single large object during a single duplicate-identification process	4.5 GB	23.4 GB	The estimated size of the active log space that is required for this transaction.

Table 10. Average duplicate-extent size of 256 KB (continued)

Item	Exampl	e values	Description
Active log: Suggested total size	71.6 GB ¹	109.4 GB ¹	After considering other aspects of the workload on the server in addition to deduplication, multiply the existing estimate by a factor of 2. In these examples, the active log space required to deduplicate a single large object is considered along with previous estimates for the required active log size.
			The following calculation was used for multiple transactions and an 800 GB object:
			(23.3 GB + 4.5 GB) x 2 = 55.6 GB
			Increase that amount by the suggested starting size of 16 GB:
			55.6 + 16 = 71.6 GB
			The following calculation was used for multiple transactions and a 4 TB object:
			(23.3 GB + 23.4 GB) x 2 = 93.4 GB
			Increase that amount by the suggested starting size of 16 GB:
			93.4 + 16 = 109.4 GB
Archive log: Suggested size	214.8 GB ¹	328.2 GB ¹	The estimated size of the active log multiplied by a factor of 3.
			The following calculation was used for an 800 GB object:
			55.6 GB x 3 = 166.8 GB
			Increase that amount by the suggested starting size of 48 GB:
			166.8 + 48 = 214.8 GB
			The following calculation was used for a 4 TB object: 93.4 GB x 3 = 280.2 GB
			Increase that amount by the suggested starting size of 48 GB:
			280.2 + 48 = 328.2 GB

¹ The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that uses deduplication, 32 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that uses deduplication is 96 GB. If you substitute values from your environment and the results are larger than 32 GB and 96 GB, use your results to size the active log and archive log.

Monitor your logs and adjust their size if necessary.

Active-log mirror space

The active log can be mirrored so that the mirrored copy can be used if the active log files cannot be read. There can be only one active log mirror.

Creating a log mirror is a suggested option. If you increase the size of the active log, the log mirror size is increased automatically. Mirroring the log can affect performance because of the doubled I/O activity that is required to maintain the mirror. The additional space that the log mirror requires is another factor to consider when deciding whether to create a log mirror.

If the mirror log directory becomes full, the server issues error messages to the activity log and to the db2diag.log. Server activity continues.

Archive-failover log space

The archive failover log is used by the server if the archive log directory runs out of space.

Specifying an archive failover log directory can prevent problems that occur if the archive log runs out of space. If both the archive log directory and the drive or file system where the archive failover log directory is located become full, the data remains in the active log directory. This condition can cause the active log to fill up, which causes the server to halt.

Monitoring space utilization for the database and recovery logs

To determine the amount of used and available active log space, you issue the **QUERY LOG** command. To monitor space utilization in the database and recovery logs, you can also check the activity log for messages.

Active log

If the amount of available active log space is too low, the following messages are displayed in the activity log:

ANR4531I: IC_AUTOBACKUP_LOG_USED_SINCE_LAST_BACKUP_TRIGGER

This message is displayed when the active log space exceeds the maximum specified size. The IBM Spectrum Protect server starts a full database backup.

To change the maximum log size, halt the server. Open the dsmserv.opt file, and specify a new value for the ACTIVELOGSIZE option. When you are finished, restart the server.

ANR0297I: IC_BACKUP_NEEDED_LOG_USED_SINCE_LAST_BACKUP

This message is displayed when the active log space exceeds the maximum specified size. You must back up the database manually.

To change the maximum log size, halt the server. Open the dsmserv.opt file, and specify a new value for the ACTIVELOGSIZE option. When you are finished, restart the server.

ANR4529I: IC_AUTOBACKUP_LOG_UTILIZATION_TRIGGER

The ratio of used active-log space to available active-log space exceeds the log utilization threshold. If at least one full database backup has occurred, the IBM Spectrum Protect server starts an incremental database backup. Otherwise, the server starts a full database backup.

ANR0295I: IC_BACKUP_NEEDED_LOG_UTILIZATION

The ratio of used active-log space to available active-log space exceeds the log utilization threshold. You must back up the database manually.

Archive log

If the amount of available archive log space is too low, the following message is displayed in the activity log:

ANR0299I: IC_BACKUP_NEEDED_ARCHLOG_USED

The ratio of used archive-log space to available archive-log space exceeds the log utilization threshold. The IBM Spectrum Protect server starts a full automatic database backup.

Database

If the amount of space available for database activities is too low, the following messages are displayed in the activity log:

ANR2992W: IC_LOG_FILE_SYSTEM_UTILIZATION_WARNING_2

The used database space exceeds the threshold for database space utilization. To increase the space for the database, use the **EXTEND DBSPACE** command, the **EXTEND DBSPACE** command, or the DSMSERV FORMAT utility with the **DBDIR** parameter.

ANR1546W: FILESYSTEM DBPATH LESS 1GB

The available space in the directory where the server database files are located is less than 1 GB.

When an IBM Spectrum Protect server is created with the DSMSERV FORMAT utility or with the configuration wizard, a server database and recovery log are also created. In addition, files are created to hold database information used by the database manager. The path specified in this message indicates the location of the database information used by the database manager. If space is unavailable in the path, the server can no longer function.

You must add space to the file system or make space available on the file system or disk.

Deleting installation rollback files

You can delete certain installation files that were saved during the installation process to free space in the shared resource directory. For example, files that might have been required for a rollback operation are types of files that you can delete.

About this task

To delete the files that are no longer needed, use either the installation graphical wizard or the command line in console mode.

Deleting installation rollback files by using a graphical wizard

You can delete certain installation files that were saved during installation process by using the IBM Installation Manager user interface.

Procedure

- 1. Open IBM Installation Manager.
- 2. Click **File** > **Preferences**.
- 3. Select Files for Rollback.
- 4. Click Delete Saved Files and click OK.

Deleting installation rollback files by using the command line

You can delete certain installation files that were saved during the installation process by using the command line.

Procedure

1. In the directory where IBM Installation Manager is installed, go to the following subdirectory:

eclipse\tools

For example:

C:\Program Files\IBM\Installation Manager\eclipse\tools

2. From the tools directory, issue the following command to start an IBM Installation Manager command line:

imcl.exe -c

- 3. Enter P to select Preferences.
- 4. Enter 3 to select Files for Rollback.
- 5. Enter D to Delete the Files for Rollback.
- 6. Enter A to Apply Changes and Return to Preferences Menu.
- 7. Enter C to leave the Preference Menu.
- 8. Enter X to Exit Installation Manager.

Server naming best practices

Use these descriptions as a reference when you install or upgrade an IBM Spectrum Protect server.

Instance user ID

The instance user ID is used as the basis for other names related to the server instance. The instance user ID is also called the instance owner.

For example: tsminst1

The instance user ID is the user ID that must have ownership or read/write access authority to all directories that you create for the database and the recovery log. The standard way to run the server is under the instance user ID. That user ID must also have read/write access to the directories that are used for any **FILE** device classes.

Database instance name

The database instance name is the name of the server instance as it appears in the registry.

For example: Server1

Instance directory

The instance directory is a directory that contains files specifically for a server instance (the server options file and other server-specific files). It can have any name that you want. For easier identification, use a name that ties the directory to the instance name.

You can use a name that includes the name of the server instance as it appears (or will appear) in the registry. Default server instance names have the form Serverx.

For example: C:\tsm\server1

The instance directory stores the following files for the server instance:

- The server options file, dsmserv.opt
- The server key database file, cert.kdb, and the .arm files (used by clients and other servers to import the Secure Sockets Layer certificates of the server)
- Device configuration file, if the DEVCONFIG server option does not specify a fully qualified name
- Volume history file, if the VOLUMEHISTORY server option does not specify a fully qualified name
- Volumes for DEVTYPE=FILE storage pools, if the directory for the device class is not fully specified, or not fully qualified
- User exits
- Trace output (if not fully qualified)

Database name

The database name is always TSMDB1, for every server instance. This name cannot be changed.

Server name

The server name is an internal name for IBM Spectrum Protect, and is used for operations that involve communication among multiple IBM Spectrum Protect servers. Examples include server-to-server communication and library sharing.

The server name is also used when you add the server to the Operations Center so that it can be managed using that interface. Use a unique name for each server. For easy identification in the Operations Center (or from a **QUERY SERVER** command), use a name that reflects the location or purpose of the server. Do not change the name of an IBM Spectrum Protect server after it is configured as a hub or spoke server.

If you use the wizard, the default name that is suggested is the host name of the system that you are using. You can use a different name that is meaningful in your environment. If you have more than one server on the system and you use the wizard, you can use the default name for only one of the servers. You must enter a unique name for each server.

For example, TUCSON SERVER1

TUCSON_SERVER2

Directories for database space and recovery log

The directories can be named according to local practices. For easier identification, consider using names that tie the directories to the server instance.

For example, for the archive log: f:\server1\archlog

Installation directories

Installation directories for the IBM Spectrum Protect server include the server, DB2, device, language, and other directories. Each one contains several additional directories.

The (/opt/tivoli/tsm/server/bin) is the default directory that contains server code and licensing.

The DB2 product that is installed as part of the installation of the IBM Spectrum Protect server has the directory structure as documented in DB2 information sources. Protect these directories and files as you do the server directories. The default directory is /opt/tivoli/tsm/db2.

You can use US English, German, French, Italian, Spanish, Brazilian Portuguese, Korean, Japanese, traditional Chinese, simplified Chinese, Chinese GBK, Chinese Big5, and Russian.

Chapter 2. Installing the server components

To install the Version 8.1.2 server components, you can use the installation wizard, the command line in console mode, or silent mode.

About this task

Using the IBM Spectrum Protect installation software, you can install the following components:

server

Tip: The database (DB2), the Global Security Kit (GSKit) and IBM Java Runtime Environment (JRE) are automatically installed when you select the server component.

- server languages
- license
- devices
- IBM Spectrum Protect for SAN
- Operations Center

Allow approximately 15 - 30 minutes to install a V8.1.2 server, using this guide.

Obtaining the installation package

You can obtain the IBM Spectrum Protect installation package from an IBM download site such as Passport Advantage® or IBM Fix Central.

Procedure

- 1. Download the appropriate package file from one of the following websites.
 - Download the server package from Passport Advantage or Fix Central.
 - For the latest information, updates, and maintenance fixes, go to the IBM Support Portal.
- 2. If you downloaded the package from an IBM download site, complete the following steps:
 - a. Verify that you have enough space to store the installation files when they are extracted from the product package. See the download document for the space requirements:
 - IBM Spectrum Protect technote 4042944
 - IBM Spectrum Protect Extended Edition technote 4042945
 - IBM Spectrum Protect for Data Retention technote 4042946
 - b. Change to the directory where you placed the executable file.

Important: In the next step, the files are extracted to the current directory. The path must contain no more than 128 characters. Be sure to extract the installation files to an empty directory. Do not extract to a directory that contains previously extracted files, or any other files.

c. Either double-click the executable file, or enter the following command on the command line to extract the installation files. The files are extracted to the current directory.

package_name.exe
where package_name is like this example: 8.1.x.000-IBM-SPSRVWindowsX64.exe

- 3. Select one of the following methods of installing IBM Spectrum Protect:
 - "Installing IBM Spectrum Protect by using the installation wizard"
 - "Installing IBM Spectrum Protect by using console mode" on page 47
 - "Installing IBM Spectrum Protect in silent mode" on page 48
- 4. After you install IBM Spectrum Protect, and before you customize it for your use, go to the IBM Support Portal. Click **Support and downloads** and apply any applicable fixes.

Installing IBM Spectrum Protect by using the installation wizard

You can install the server by using the IBM Installation Manager graphical wizard.

Before you begin

Take the following actions before you start the installation:

- Verify that the operating system is set to the language that you require. By default, the language of the operating system is the language of the installation wizard
- Ensure that the user ID that you plan to use during the installation is a user with local Administrator authority.

Procedure

Install IBM Spectrum Protect by using this method:

Option	Description
Installing the software from a downloaded package:	Change to the directory where you downloaded the package.
	2. Start the installation wizard by issuing the following command:
	install.bat
	Or, in the directory where the installation files were extracted, double-click the install.bat file.

What to do next

- If errors occur during the installation process, the errors are recorded in log files that are stored in the IBM Installation Manager logs directory.
 - You can view installation log files by clicking **File** > **View Log** from the Installation Manager tool. To collect these log files, click **Help** > **Export Data for Problem Analysis** from the Installation Manager tool.
- After you install the server and components, and before you customize it for your use, go to the IBM Support Portal. Click **Downloads (fixes and PTFs)** and apply any applicable fixes.
- After you install a new server, review Taking the first steps after you install IBM Spectrum Protect to learn about configuring your server.
- If a native device driver is available on Windows for the tape drives or medium changers that you plan to use, use the native device driver. If a native device

driver is not available on Windows for the tape drives or medium changers that you plan to use, install the IBM Spectrum Protect device driver by issuing the dpinst.exe /a command. The dpinst.exe file is in the device driver directory. The default directory is C:\Program Files\Tivoli\TSM\device\drivers.

Installing IBM Spectrum Protect by using console mode

You can install IBM Spectrum Protect by using the command line in console mode.

Before you begin

Take the following actions before you start the installation:

- Verify that the operating system is set to the language that you require. By default, the language of the operating system is the language of the installation wizard.
- Ensure that the user ID that you plan to use during the installation is a user with local Administrator authority.

Procedure

Install IBM Spectrum Protect by using this method:

Option	Description
Installing the software from a downloaded package:	Change to the directory where you downloaded the package.
	Start the installation wizard in console mode by issuing the following command:
	install.bat -c
	Optional: Generate a response file as part of a console mode installation. Complete the console mode installation options, and in the Summary panel, specify G to generate the responses.

What to do next

- If errors occur during the installation process, the errors are recorded in log files that are stored in the IBM Installation Manager logs directory, for example:
 - C:\ProgramData\IBM\Installation Manager\logs
- After you install the server and components, and before you customize it for your use, go to the IBM Support Portal. Click **Downloads (fixes and PTFs)** and apply any applicable fixes.
- After you install a new server, review Taking the first steps after you install IBM Spectrum Protect to learn about configuring your server.
- If a native device driver is available on Windows for the tape drives or medium changers that you plan to use, use the native device driver. If a native device driver is not available on Windows for the tape drives or medium changers that you plan to use, install the IBM Spectrum Protect device driver by issuing the dpinst.exe /a command. The dpinst.exe file is in the device driver directory. The default directory is C:\Program Files\Tivoli\TSM\device\drivers.

Installing IBM Spectrum Protect in silent mode

You can install or upgrade the server in silent mode. In silent mode, the installation does not send messages to a console but instead stores messages and errors in log files.

Before you begin

To provide data input when you use the silent installation method, you can use a response file. The following sample response files are provided in the input directory where the installation package is extracted:

install_response_sample.xml

Use this file to install the IBM Spectrum Protect components.

update_response_sample.xml

Use this file to upgrade the IBM Spectrum Protect components.

These files contain default values that can help you avoid any unnecessary warnings. To use these files, follow the instructions that are provided in the files.

If you want to customize a response file, you can modify the options that are in the file. For information about response files, see Response files.

Procedure

- 1. Create a response file. You can modify the sample response file or create your own file.
- 2. If you install the server and Operations Center in silent mode, create a password for the Operations Center truststore in the response file.

If you are using the install_response_sample.xml file, add the password in the following line of the file, where *mypassword* represents the password:

```
<variable name='ssl.password' value='mypassword' />
```

For more information about this password, see Installation checklist

Tip: To upgrade the Operations Center, the truststore password is not required if you are using the update_response_sample.xml file.

- 3. Start the silent installation by issuing the following command from the directory where the installation package is extracted. The value *response_file* represents the response file path and file name:
 - install.bat -s -input response file -acceptLicense

What to do next

- If errors occur during the installation process, the errors are recorded in log files that are stored in the IBM Installation Manager logs directory, for example:
 - C:\ProgramData\IBM\Installation Manager\logs
- After you install the server and components, and before you customize it for your use, go to the IBM Support Portal. Click **Downloads (fixes and PTFs)** and apply any applicable fixes.
- After you install a new server, review Taking the first steps after you install IBM Spectrum Protect to learn about configuring your server.
- If a native device driver is available on Windows for the tape drives or medium changers that you plan to use, use the native device driver. If a native device driver is not available on Windows for the tape drives or medium changers that

you plan to use, install the IBM Spectrum Protect device driver by issuing the dpinst.exe /a command. The dpinst.exe file is in the device driver directory. The default directory is C:\Program Files\Tivoli\TSM\device\drivers.

Installing server language packages

Translations for the server allow the server to display messages and help in languages other than US English. The translations also allow for the use of locale conventions for date, time, and number formatting.

Before you begin

For instructions on installing storage agent language packages, see Language pack configuration for storage agents.

Server language locales

Use either the default language package option or select another language package to display server messages and help.

This language package is automatically installed for the following default language option for server messages and help: LANGUAGE AMENG.

For languages or locales other than the default, install the language package that your installation requires.

You can use the languages that are shown:

Table 11. Server languages for Windows

Language	LANGUAGE option value
Chinese, Simplified	chs
Chinese, Traditional	cht
English	ameng
French	fra
German	deu
Italian	ita
Japanese (Shift-JIS)	jpn
Korean	kor
Portuguese, Brazilian	ptb
Russian	rus
Spanish	esp

Restriction: For Operations Center users, some characters might not be displayed properly if the web browser does not use the same language as the server. If this problem occurs, set the browser to use the same language as the server.

Configuring a language package

After you configure a language package, messages and help are shown on the server in languages other than US English. Installation packages are provided with IBM Spectrum Protect.

About this task

Set the LANGUAGE option in the server options file to the name of the locale that you want to use. For example: to use the ita locale, set the LANGUAGE option to ita. See "Server language locales" on page 49.

If the locale is successfully initialized, it formats the date, time, and number for the server. If the locale is not successfully initialized, the server uses the US English message files and the date, time, and number format.

Updating a language package

You can modify or update a language package by using the IBM Installation Manager.

About this task

You can install another language package within the same IBM Spectrum Protect instance.

- Use the Modify function of IBM Installation Manager to install another language package.
- Use the Update function of IBM Installation Manager to update to newer versions of the language packages.

Tip: In IBM Installation Manager, the term *update* means to discover and install updates and fixes to installed software packages. In this context, *update* and *upgrade* are synonymous.

Chapter 3. Taking the first steps after you install IBM Spectrum Protect

After you install Version 8.1.2, prepare for the configuration. Using the configuration wizard is the preferred method of configuring the IBM Spectrum Protect instance.

About this task

- 1. Create the directories and user ID for the server instance. See "Creating the user ID and directories for the server instance."
- 2. Configure a server instance. Select one of the following options:
 - Use the configuration wizard, the preferred method. See "Configuring IBM Spectrum Protect by using the configuration wizard" on page 54.
 - Manually configure the new instance. See "Configuring the server instance manually" on page 55. Complete the following steps during a manual configuration.
 - a. Set up your directories and create the IBM Spectrum Protect instance. See "Creating the server instance" on page 56.
 - b. Create a new server options file by copying the sample file to set up communications between the server and clients. See "Configuring server and client communications" on page 57.
 - c. Issue the **DSMSERV FORMAT** command to format the database. See "Formatting the database and log" on page 60.
 - d. Configure your system for database backup. See "Preparing the database manager for database backup" on page 61.
- 3. Configure options to control when database reorganization runs. See "Configuring server options for server database maintenance" on page 62.
- 4. Start the server instance if it is not already started.
 - See "Starting the server instance on Windows systems" on page 63.
- 5. Register your license. See "Registering licenses" on page 68.
- 6. Prepare your system for database backups. See "Specifying a device class in preparation for database backups" on page 68.
- 7. Monitor the server. See "Monitoring the server" on page 70.

Creating the user ID and directories for the server instance

Create the user ID for the IBM Spectrum Protect server instance and create the directories that the server instance needs for database and recovery logs.

Before you begin

Review the information about planning space for the server before you complete this task. See "Worksheets for planning details for the server" on page 23.

Procedure

1. Create the user ID that will own the server instance. You use this user ID when you create the server instance in a later step.

Create a user ID that will be the owner of the IBM Spectrum Protect

server instance. A user ID can own more than one IBM Spectrum Protect server instance. Identify the user account that will own the server instance.

When the server is started as a Windows service, this account is the one that the service will log on to. The user account must have administrative authority on the system. One user account can own more than one server instance.

If you have multiple servers on one system and want to run each server with a different user account, create a new user account in this step.

Create the user ID.

Restriction: The user ID must comply with the following rule:

In the user ID, only lowercase letters (a-z), numerals (0-9), and the underscore character (_) can be used. The user ID must be 30 characters or less, and cannot start with *ibm*, *sql*, *sys*, or a numeral. The user ID and group name cannot be *user*, *admin*, *guest*, *public*, *local*, or any SQL reserved word.

a. Use the following operating system command to create the user ID: net user user ID * /add

You are prompted to create and verify a password for the new user ID.

b. Issue the following operating system commands to add the new user ID to the Administrators groups:

net localgroup Administrators user_ID /add
net localgroup DB2ADMNS user ID /add

2. Create directories that the server requires.

Create empty directories for each item in the table and ensure that the new user ID you just created has read/write permission to the directories. The database, archive log, and active log must reside on different physical volumes.

Item	Example commands for creating the directories	Your directories
The <i>instance directory</i> for the server, which is a directory that will contain files specifically for this server instance (the server options file and other server-specific files)	mkdir d:\tsm\server1	
The database directories	mkdir d:\tsm\db001 mkdir e:\tsm\db002 mkdir f:\tsm\db003 mkdir g:\tsm\db004	
Active log directory	mkdir h:\tsm\log	
Archive log directory	mkdir i:\tsm\archlog	
Optional: Directory for the log mirror for the active log	mkdir j:\tsm\logmirror	

Create empty directories for each item in the table and ensure that the new user ID you just created has read/write permission to the directories. The database, archive log, and active log must reside on different physical volumes.

Item	Example commands for creating the directories	Your directories
Optional: Secondary archive log directory (failover location for archive log)	mkdir k:\tsm\archlogfailover	

When a server is initially created by using the **DSMSERV FORMAT** utility or the configuration wizard, a server database and recovery log are created. In addition, files are created to hold database information that is used by the database manager.

3. Log off the new user ID.

Configuring the IBM Spectrum Protect server

After you have installed the server and prepared for the configuration, configure the server instance.

About this task

Tip: The IBM Spectrum Protect Management Console, which is a Microsoft Management Console (MMC) snap-in, is no longer delivered with IBM Spectrum Protect. The preferred method for configuring the server is to use the configuration wizard. You can use the wizard to complete several server configuration tasks. However, you cannot use the wizard to extend the Active Directory schema so that clients can automatically discover servers.

Configure an IBM Spectrum Protect server instance by selecting one of the following options:

- Use the IBM Spectrum Protect configuration wizard on your local system. See "Configuring IBM Spectrum Protect by using the configuration wizard" on page 54.
- Manually configure the new IBM Spectrum Protect instance. See "Configuring the server instance manually" on page 55. Complete the following steps during a manual configuration.
 - 1. Set up the directories and create the IBM Spectrum Protect instance. See "Creating the server instance" on page 56.
 - 2. Create a new server options file by copying the sample file in order to set up communications between the IBM Spectrum Protect server and clients. See "Configuring server and client communications" on page 57.
 - 3. Issue the DSMSERV FORMAT command to format the database. See "Formatting the database and log" on page 60.
 - 4. Configure your system for database backup. See "Preparing the database manager for database backup" on page 61.

Configuring IBM Spectrum Protect by using the configuration wizard

The wizard offers a guided approach to configuring a server. By using the graphical user interface (GUI), you can avoid some configuration steps that are complex when done manually. Start the wizard on the system where you installed the IBM Spectrum Protect server program.

Before you begin

Before you begin to use the configuration wizard, you must complete all preceding steps to prepare for the configuration. These steps include installing IBM Spectrum Protect, creating the database and log directories, and creating the directories and user ID for the server instance.

About this task

Tip: The IBM Spectrum Protect Console, which is an MMC snap-in, is no longer delivered with IBM Spectrum Protect. The preferred method for configuring the server instance is to use the configuration wizard. You can use the wizard to complete several configuration tasks.

Procedure

- 1. Ensure that the following requirements are met:
 - Ensure that the following requirements are met:
 - a. Click Start > Administrative Tools > Services.
 - b. In the Services window, select the **Remote Registry** service if it is not started, and click **Start**.
 - Ensure ports 137, 139 and 445 are not blocked by a firewall:
 - a. Click Start > Control Panel > Windows Firewall.
 - b. Select Advanced Settings.
 - c. Select **Inbound Rules** in the left pane.
 - d. Select New Rule in the right pane.
 - e. Create a port rule for TCP ports 137, 139 and 445 to allow connections for domain and private networks.
 - Configure User Account Control:

Access all three of the user account control configuration settings by first accessing **Local Security Policy Security** options, by using the following steps:

- a. Enable the built-in Administrator account:
 - Select the Accounts: Administrator account status.
 - Select Enable and click OK.
- b. Disable User Account Control for all Windows administrators:
 - Select the User Account Control: Run all administrators in Admin Approval Mode.
 - Select **Disable** and click **OK**.
- c. Disable User Account Controll for the built-in Administrator account:
 - Select the User Account Control: Admin Approval Mode for the Built-in Administrator Account.
 - Select **Disable** and click **OK**.
- Restart the server before you proceed with the Configuration wizard.

2. Start the local version of the wizard:

Either click Start > All Programs > IBM Spectrum Protect > Configuration Wizard. Or, double-click the dsmicfgx.exe program in installation directory\server. The default directory is C:\Program Files\Tivoli\TSM.

Follow the instructions to complete the configuration. The wizard can be stopped and restarted, but the server is not operational until the entire configuration process is complete.

Configuring Remote Execution Protocol on Windows

Configure remote access settings by using these procedures.

Before you begin

You must configure the User Account Control feature before you run the wizard.

Tip: Ensure that the Remote Registry in Windows Services is started, and ports 445, 137, and 139 are unblocked in the firewall.

Procedure

If the system is running on Windows, complete the following steps to disable User **Account Control:**

- 1. The built-in Administrator account must be enabled. To enable the built-in administrator account, click Control Panel > Administrative Tools > Local Security Policy. Then, under Security Settings, double-click Local Policies. Double-click Security Options. Double-click the Accounts: Administrator account status section. Select Enable and click OK.
- 2. User Account Control must be disabled for all windows administrators. To disable User Account Control for administrators, click Control Panel > Administrative Tools > Local Security Policy. Then, under Security Settings, double-click Local Policies. Double-click Security Options. Double-click the User Account Control: Run all administrators in Admin Approval Mode section. Select Disable and click OK.
- 3. User Account Control must be disabled for the built-in Administrator account. To disable User Account Control for administrators, click Control Panel > Administrative Tools > Local Security Policy. Then, under Security Settings, double-click Local Policies. Double-click Security Options. Double-click the User Account Control: Admin Appoval Mode for the Built-in Administrator Account section. Select **Disable** and click **OK**.

Configuring the server instance manually

After installing IBM Spectrum Protect Version 8.1.2, you can configure IBM Spectrum Protect manually instead of using the configuration wizard.

Creating the server instance

Create an IBM Spectrum Protect instance by issuing the **db2icrt** command.

About this task

You can have one or more server instances on one workstation.

Important: Before you run the **db2icrt** command, ensure that the user and the instance directory of the user exists. If there is no instance directory, you must create it.

The instance directory stores the following files for the server instance:

- The server options file, dsmserv.opt
- The server key database file, cert.kdb, and the .arm files (used by clients and other servers to import the Secure Sockets Layer certificates of the server)
- Device configuration file, if the DEVCONFIG server option does not specify a fully qualified name
- Volume history file, if the VOLUMEHISTORY server option does not specify a fully qualified name
- Volumes for DEVTYPE=FILE storage pools, if the directory for the device class is not fully specified, or not fully qualified
- · User exits
- Trace output (if not fully qualified)
- 1. Log in as an administrator and create an IBM Spectrum Protect instance, by using the **db2icrt** command. Enter the following command on one line. The user account that you specify becomes the user ID that owns the Version 8.1.2 server (the instance user ID).

```
db2icrt -u user_account instance_name
```

For example, if the user account is *tsminst1* and the server instance is *Server1*, enter the following command:

```
db2icrt -u tsminst1 server1
```

You are prompted for the password for user ID *tsminst1*. Later, when you create and format the database, you use the instance name that you specified with this command, with the -k option.

- 2. Change the default path for the database to be the drive where the instance directory for the server is located. Complete the following steps:
 - a. Click Start > Programs > IBM DB2 > DB2TSM1 > Command Line Tools > Command Line Processor.
 - b. Enter quit to exit the command line processor.
 - A window with a command prompt should now be open, with the environment properly set up to successfully issue the commands in the next steps.
 - c. From the command prompt in that window, issue the following command to set the environment variable for the server instance that you are working with:

```
set db2instance=instance_name
```

The *instance_name* is the same as the instance name that you specified when you issued the **db2icrt** command. For example, to set the environment variable for the *Server1* server instance, issue the following command:

set db2instance=server1

d. Issue the command to set the default drive: db2 update dbm cfg using dftdbpath instance location

For example, the instance directory is d:\tsm\server1 and the instance location is drive d:. Enter the command:

db2 update dbm cfg using dftdbpath d:

3. Create a new server options file. See "Configuring server and client communications."

Configuring server and client communications

After installing the server, you can set up client and server communications by specifying options in the server and client options files.

About this task

Set these server options before you start the server. When you start the server, the new options go into effect. If you modify any server options after starting the server, you must stop and restart the server to activate the updated options.

Review the server options file (dsmserv.opt.smp) that is located in the server instance directory to view and specify server communications options. By default, the server uses the TCP/IP and Named Pipes communication methods.

Tip: If you start the server console and see warning messages that a protocol could not be used by the server, either the protocol is not installed or the settings do not match the Windows protocol settings.

For a client to use a protocol that is enabled on the server, the client options file must contain corresponding values for communication options. In the server options file, you can view the values for each protocol.

You can specify one or more of the following communication methods:

- TCP/IP Version 4 or Version 6
- Named Pipes
- Shared memory
- Secure Sockets Layer (SSL)

Tip: You can authenticate passwords with the LDAP directory server, or authenticate passwords with the server. Passwords that are authenticated with the LDAP directory server can provide enhanced system security.

Setting TCP/IP options:

Select from a range of TCP/IP options for the IBM Spectrum Protect server or retain the default.

About this task

The following is an example of a list of TCP/IP options that you can use to set up your system.

- /			1
	commmethod	tcpip	
	tcpport	1500	
	tcpwindowsize	0	
	tcpnodelay	yes	
/		· ·	/

Tip: You can use TCP/IP Version 4, Version 6, or both.

TCPPORT

The server port address for TCP/IP and SSL communication. The default value is 1500.

TCPWINDOWSIZE

Specifies the size of the TCP/IP buffer that is used when sending or receiving data. The window size that is used in a session is the smaller of the server and client window sizes. Larger window sizes use additional memory but can improve performance.

To use the default window size for the operating system, specify 0.

TCPNODELAY

Specifies whether or not the server sends small messages or lets TCP/IP buffer the messages. Sending small messages can improve throughput but increases the number of packets sent over the network. Specify YES to send small messages or NO to let TCP/IP buffer them. The default is YES.

TCPADMINPORT

Specifies the port number on which the server TCP/IP communication driver is to wait for TCP/IP or SSL-enabled communication requests other than client sessions. The default is the value of TCPPORT.

SSLTCPPORT

(SSL-only) Specifies the Secure Sockets Layer (SSL) port number on which the server TCP/IP communication driver waits for requests for SSL-enabled sessions for the command-line backup-archive client and the command-line administrative client.

SSLTCPADMINPORT

(SSL-only) Specifies the port address on which the server TCP/IP communication driver waits for requests for SSL-enabled sessions for the command-line administrative client.

Setting Named Pipes options:

The Named Pipes communication method is ideal when running the server and client on the same Windows machine. Named Pipes require no special configuration.

About this task

Here is an example of a Named Pipes setting:

1			١
	commmethod	namedpipe	
	namedpipename	\\.\pipe\adsmpipe	l
,			

COMMMETHOD can be used multiple times in the IBM Spectrum Protect server options file, with a different value each time. For example, the following example is possible:

commmethod tcpip commmethod namedpipe

Setting Secure Sockets Layer options:

You can add more protection for your data and passwords by using Secure Sockets Layer (SSL).

Before you begin

SSL is the standard technology for creating encrypted sessions between servers and clients. SSL provides a secure channel for servers and clients to communicate over open communication paths. With SSL, the identity of the server is verified through the use of digital certificates.

To ensure better system performance, use SSL only for sessions when it is needed. Consider adding additional processor resources on the IBM Spectrum Protect server to manage the increased requirements.

Formatting the database and log

Use the **DSMSERV FORMAT** utility to initialize a server instance. No other server activity is allowed while you initialize the database and recovery log.

After you set up server communications, you are ready to initialize the database. Ensure that you log in by using the instance user ID. Do not place the directories on file systems that might run out of space. If certain directories (for example, the archive log) become unavailable or full, the server stops. See Capacity planning for more details.

For optimal performance and to facilitate I/O, specify at least two equally sized containers or Logical Unit Numbers (LUNs) for the database. In addition, each active log and archive log needs its own container or LUN.

Important: The installation program creates a set of registry keys. One of these keys points to the directory where a default server, named SERVER1, is created. To install an additional server, create a directory and use the **DSMSERV FORMAT** utility, with the **-k** parameter, from that directory. That directory becomes the location of the server. The registry tracks the installed servers.

Setting the exit list handler

Set the **DB2NOEXITLIST** registry variable to ON for each server instance. Log on to the system as the server instance owner and issue this command:

db2set -i server instance name DB2NOEXITLIST=ON

For example:

db2set -i server1 DB2N0EXITLIST=ON

Initializing a server instance

Use the **DSMSERV FORMAT** utility to initialize a server instance. For example, if the server instance directory is /tsminst1, issue the following commands:

 $cd \tsminst1$

dsmserv -k server2 format dbdir=d:\tsm\db001 activelogsize=32768 activelogdirectory=e:\tsm\activelog archlogdirectory=f:\tsm\archlog archfailoverlogdirectory=g:\tsm\archfaillog mirrorlogdirectory=h:\tsm\mirrorlog

Tip: If you specify multiple directories, ensure that the underlying file systems are of equal size to ensure a consistent degree of parallelism for database operations. If one or more directories for the database are smaller than the others, they reduce the potential for optimized parallel prefetching and distribution of the database.

Related information:

DSMSERV FORMAT (Format the database and log)

Preparing the database manager for database backup

To back up the data in the database to IBM Spectrum Protect, you must enable the database manager and configure the IBM Spectrum Protect application programming interface (API).

About this task

If you use the configuration wizard to create an IBM Spectrum Protect server instance, you do not have to complete these steps. If you are configuring an instance manually, complete the following steps before you issue either the **BACKUP DB** or the **RESTORE DB** commands.

Attention: If the database is unusable, the entire IBM Spectrum Protect server is unavailable. If a database is lost and cannot be recovered, it might be difficult or impossible to recover data that is managed by that server. Therefore, it is critically important to back up the database.

Restriction: Database backup and restore over shared memory are not available on Windows systems.

In the following commands, the examples use server1 for the database instance and d:\tsmserver1 for the IBM Spectrum Protect server directory. Replace these values with your actual values in the commands.

1. Create a file that is called tsmdbmgr.env in the d:\tsmserverl directory with the following contents:

```
DSMI CONFIG=server instance directory\tsmdbmgr.opt
DSMI LOG=server instance directory
```

- 2. Set the DSMI_ api environment-variable configuration for the database instance:
 - a. Open a DB2 command window. One method is to go to the C:\Program Files\Tivoli\TSM\db2\bin directory, or if you installed IBM Spectrum Protect in a different location, go to the db2\bin subdirectory in your main installation directory. Then, issue this command:

db2cmd

b. Issue this command:

```
db2set -i server1 DB2 VENDOR INI=d:\tsmserver1\tsmdbmgr.env
```

3. Create a file that is called tsmdbmgr.opt in the d:\tsmserver1 directory with the following contents:

*************** nodename \$\$ TSMDBMGR \$\$ commmethod tcpip tcpserveraddr localhost

tcpport 1500

passwordaccess generate

errorlogname d:\tsmserver1\tsmdbmgr.log

- nodename specifies the node name the client API uses to connect to the server during a database backup. This value must be \$\$ TSMDBMGR \$\$ for database backup to work.
- commethod specifies the client API used to contact the server for database backup.
- tcpserveraddr specifies the server address that the client API uses to contact the server for database backup. To ensure that the database can be backed up, this value must be localhost.

- *tcpport* specifies the port number that the client API uses to contact the server for database backup. Ensure that you enter the same tcpport value that is specified in the dsmserv.opt server options file.
- *passwordaccess* is required for the backup node to connect to the server on windows systems.
- *errorlogname* specifies the error log where the client API logs errors that are encountered during a database backup. This log is typically in the server instance directory. However, this log can be placed in any location where the instance user ID has write-permission.

Configuring server options for server database maintenance

To help avoid problems with database growth and server performance, the server automatically monitors its database tables and reorganizes them when needed. Before starting the server for production use, set server options to control when reorganization runs. If you plan to use data deduplication, ensure that the option to run index reorganization is enabled.

About this task

Table and index reorganization requires significant processor resources, active log space, and archive log space. Because database backup takes precedence over reorganization, select the time and duration for reorganization to ensure that the processes do not overlap and reorganization can complete.

You can optimize index and table reorganization for the server database. In this way, you can help to avoid unexpected database growth and performance issues. For instructions, see technote 1683633.

If you update these server options while the server is running, you must stop and restart the server before the updated values take effect.

Procedure

- 1. Modify the server options.
 - Edit the server options file, dsmserv.opt, in the server instance directory by using a text editor. Follow these guidelines when you edit the server options file:
 - To enable an option, remove the asterisk at the beginning of the line.
 - Enter an option on any line.
 - Enter only one option per line. The entire option with its value must be on one line.
 - If you have multiple entries for an option in the file, the server uses the last entry.

To view available server options, see the sample file, dsmserv.opt.smp, in the c:\Program Files\Tivoli\TSM directory.

- 2. If you plan to use data deduplication, enable the **ALLOWREORGINDEX** server option. Add the following option and value to the server options file: allowreorgindex yes
- 3. Set the **REORGBEGINTIME** and **REORGDURATION** server options to control when reorganization starts and how long it runs. Select a time and duration so that reorganization runs when you expect that the server is least busy. These server options control both table and index reorganization processes.

- a. Set the time for reorganization to start by using the **REORGBEGINTIME** server option. Specify the time by using the 24-hour system. For example, to set the start time for reorganization as 8:30 p.m., specify the following option and value in the server options file:
 - reorgbegintime 20:30
- b. Set the interval during which the server can start reorganization. For example, to specify that the server can start reorganization for four hours after the time set by the REORGBEGINTIME server option, specify the following option and value in the server options file:
 - reorgduration 4
- 4. If the server was running while you updated the server options file, stop and restart the server.

Related information:

- ALLOWREORGINDEX
- ALLOWREORGTABLE
- REORGBEGINTIME
- REORGDURATION

Starting the server instance on Windows systems

In a production environment, the preferred method for starting the server is as a Windows service. In an environment where you are reconfiguring, testing, or completing maintenance tasks, start the server in the foreground or use maintenance mode.

Before you begin

Select one of the following methods for starting the server:

As a Windows service

This method is useful in a production environment. When you configure the server to run as a service, you can specify that the server starts automatically whenever the system is started.

In the foreground

This method is useful when you are configuring or testing the server. When you start the server in the foreground, IBM Spectrum Protect provides a special administrator user ID that is named SERVER_CONSOLE. All server messages are displayed in the foreground. The messages can be useful if you must debug startup problems.

In maintenance mode

This method is useful when you are completing maintenance or reconfiguration tasks. When you start the server in maintenance mode, you disable operations that might disrupt your maintenance or reconfiguration tasks.

Procedure

Follow the instructions for your selected option:

Option	Description
Starting the server as a Windows service	To start the server as a Windows service, take one of the following actions: • If you configured the server by using the
	configuration wizard, complete the following steps:
	Configure the server to start as a Windows service by following the instructions in "Configuring the server to start as a Windows service."
	2. Start the server by following the instructions in "Starting the server as a Windows service" on page 65.
	• If you did not use the configuration wizard, create and configure the Windows service by following the instructions in "Manually creating and configuring a Windows service" on page 66.
Starting the server in the foreground	To start the server in the foreground, follow the instructions in "Starting the server in the foreground" on page 67.
Starting the server in maintenance mode	To start the server in maintenance mode, follow the instructions in "Starting the server in maintenance mode" on page 67.

Configuring the server to start as a Windows service

Before you can start the server as a Windows service, you must ensure that options and access rights are set correctly.

Before you begin

A Windows service must be created. If you configured the server by using the configuration wizard, a Windows service was created automatically. In that case, use this procedure to configure the server to start as a Windows service.

If you did not use a wizard, you must create and configure the Windows service manually by following the steps in "Manually creating and configuring a Windows service" on page 66.

Procedure

- 1. From the Windows Start menu, click Run, type services.msc, and click OK.
- In the Services window, select the server instance that you want to start as a service, and click **Properties**. For example, select **TSM INST1**, and click **Properties**.
- 3. To ensure that the server service starts automatically, click the **General** tab. From the **Startup type** list, select **Automatic**.
- 4. To set the user for starting the server service, click the **Log On** tab, and take one of the following actions:

- If you plan to run the server service under the Local System account, select Local System account and click OK.
- If you plan to run the server service under the instance user ID, take the following actions:
 - a. Select This account, and browse for the user ID that owns the server DB2 instance and has permissions for starting the server.
 - b. In the Select User window, in the **Enter the object name to select** field, enter the user ID.
 - c. Click Check Names.
 - d. Click OK twice.
- 5. If you configured the server service to run under the Local System account, grant database access to the Local System account:
 - a. Log on with the user ID that was used to create the server database. This user ID is the user ID that was used to run the DSMSERV FORMAT utility to initialize the server database. Alternatively, if you configured the server with the dsmicfgx configuration wizard, this user ID is the user ID that was used to create the instance.
 - b. Open a DB2 command window. If the server is installed on Windows Server 2012, open the Start window, and click DB2 Command Window -Administrator.
 - c. In the DB2 command window, enter the following commands:

```
set DB2INSTANCE=server1
db2 connect to TSMDB1
db2 grant dbadm with dataaccess with accessctrl on database to user system
db2 grant secadm on database to user system
```

Tip: When the server service is configured to run under the Local System account, the database can be accessed by any administrator on the system. In addition, any administrator who can log on to the system can run the server.

What to do next

To start the service, follow the instructions in "Starting the server as a Windows service."

Starting the server as a Windows service

If you are running IBM Spectrum Protect on a Windows operating system, you can start the server as a service.

Before you begin

A Windows service must be created. The service was created automatically if you configured the server by using the configuration wizard. If the service was created automatically, you must configure the server to start as a service by following the steps in "Configuring the server to start as a Windows service" on page 64. Then, use this procedure to start the server as a service.

If you did not use the configuration wizard to create the service, you must create and configure the service manually. Follow the steps in "Manually creating and configuring a Windows service" on page 66.

Procedure

To start the server as a Windows service, complete the following steps:

- 1. Log on to the server with a user ID that is in the Administrators group.
- 2. From the Windows **Start** menu, click **Run**, type services.msc, and click **OK**.
- 3. In the Services window, select the server instance that you want to start, and click **Start**.

What to do next

Because the server service can issue requests that require action, it is important to monitor server activity with the Operations Center or the administrative client.

To view start and stop completion messages that are logged in the Windows application log, use the Event Viewer tool in the Administrative Tools folder.

Manually creating and configuring a Windows service

If you configured the server by using the configuration wizard, a Windows service was created automatically. If a service was not created automatically, you must create it.

Before you begin

To complete this procedure, you must log on with a user ID that is in the Administrators group.

Procedure

To create a Windows service and configure the startup options for the service, complete the following step:

Open a command window and enter the **sc.exe create** command:

```
sc.exe create server_name binPath= "path_to_server -k instance_name"
start= start_type obj= account_name password= password
```

where:

server_name

Specifies the name of the server service.

path_to_server

Specifies the path to the dsmsvc.exe executable file, including the file name. This path is the default path:

C:\Program Files\Tivoli\TSM\server

instance_name

Specifies the name of the DB2 instance, which is also the name of the server instance, for example, Server1.

start_type

Specifies the method for starting the service. To automatically start the service, enter auto. If you specify the auto option, the service starts automatically at system startup and restarts automatically whenever the system is restarted. To manually start the service, enter demand.

account_name

Specifies the user ID for the account under which the service runs. For

example, the account name might be Administrator. This parameter is optional. If it is not specified, the Local System account is used.

password

Specifies the password for the *account_name* user account.

Tip: When you enter the command, ensure that you enter a space after each equal sign (=).

Results

The server starts as a Windows service.

Starting the server in the foreground

To directly interact with an IBM Spectrum Protect server, start the server in the foreground. For example, if you want to enter commands, start the server in the foreground.

Procedure

- 1. Change to the directory where the server is installed. For example, change to the c:\program files\tivoli\tsm\server directory.
- 2. Enter the following command:

```
dsmserv -k instance_name
```

where *instance_name* specifies the server instance.

Starting the server in maintenance mode

You can start the server in maintenance mode to avoid disruptions during maintenance and reconfiguration tasks.

About this task

Start the server in maintenance mode by running the DSMSERV utility with the MAINTENANCE parameter.

The following operations are disabled in maintenance mode:

- Administrative command schedules
- Client schedules
- · Reclamation of storage space on the server
- Inventory expiration
- Migration of storage pools

In addition, clients are prevented from starting sessions with the server.

Tips:

- You do not have to edit the server options file, dsmserv.opt, to start the server in maintenance mode.
- While the server is running in maintenance mode, you can manually start the storage-space reclamation, inventory expiration, and storage-pool migration processes.

Procedure

To start the server in maintenance mode, issue the following command: dsmserv maintenance

Tip: To view a video about starting the server in maintenance mode, see Starting a server in maintenance mode.

What to do next

To resume server operations in production mode, complete the following steps:

- Shut down the server by issuing the HALT command: halt
- 2. Start the server by using the method that you use in production mode.

Operations that were disabled during maintenance mode are reenabled.

Stopping the server

You can stop the server when needed to return control to the operating system. To avoid losing administrative and client node connections, stop the server only after current sessions are completed or canceled.

About this task

To stop the server, issue the following command from the IBM Spectrum Protect command line:

halt

Registering licenses

Immediately register any IBM Spectrum Protect licensed functions that you purchase so you do not lose any data after you start server operations, such as backing up your data.

About this task

Use the **REGISTER LICENSE** command for this task.

Example: Register a license

Register the base IBM Spectrum Protect license.

register license file=tsmbasic.lic

Specifying a device class in preparation for database backups

To prepare the system for automatic and manual database backups, you must specify the device class to be used.

Before you begin

Ensure that you have defined a tape or file device class.

About this task

Complete the following steps to set up your system for database backups.

Procedure

- 1. If you did not use the configuration wizard (dsmicfgx) to configure the server, ensure that you have completed the steps to manually configure the system for database backups.
- 2. Select the device class to be used for backups of the database. Issue the following command from an IBM Spectrum Protect administrative command line.

set dbrecovery device_class_name

The device class that you specify is used by the database manager for database backups. If you do not specify a device class with the **SET DBRECOVERY** command, the backup fails.

Example

For example, to specify that the **DBBACK** device class is to be used, issue this command:

set dbrecovery dbback

Running multiple server instances on a single system

You can create more than one server instance on your system. Each server instance has its own instance directory, and database and log directories.

Multiply the memory and other system requirements for one server by the number of instances planned for the system.

The set of files for one instance of the server is stored separately from the files used by another server instance on the same system. Use the steps in "Creating the server instance" on page 56 for each new instance, optionally creating the new instance user.

To manage the system memory that is used by each server, use the DBMEMPERCENT server option to limit the percentage of system memory. If all servers are equally important, use the same value for each server. If one server is a production server and other servers are test servers, set the value for the production server to a higher value than the test servers.

You can upgrade directly from either V6.3 to V7.1. See the upgrade section (Chapter 5, "Upgrading to V8.1," on page 79) for more details. When you upgrade and have multiple servers on your system, you must run the installation wizard only once. The installation wizard collects the database and variables information for all of your original server instances.

If you upgrade from IBM Spectrum Protect V6.3 to V8.1.2 and have multiple servers on your system, all instances that exist in DB2 V9.7 are dropped and recreated in DB2 V11.1. The wizard issues the db2 upgrade db dbname command for each database. The database environment variables for each instance on your system are also reconfigured during the upgrade process.

A typical IBM Spectrum Protect installation involves one server instance on the IBM Spectrum Protect server computer. You might want to install a second instance if you are configuring in a clustered environment. You might also want to run more than one server on a large computer if you have multiple tape libraries or a disk-only configuration. After you install and configure the first IBM Spectrum Protect server, use the Server Initialization wizard to create additional IBM Spectrum Protect server instances on the same computer.

By using the Server Initialization wizard, you can install up to four IBM Spectrum Protect server instances on a single system or cluster.

Related tasks:

Running multiple server instances on a single system (V7.1.1)

Monitoring the server

When you start to use the server in production, monitor the space that is used by the server to ensure that the amount of space is adequate. Adjust the space if needed.

Procedure

1. Monitor the active log to ensure that the size is correct for the workload that is handled by the server instance.

When the server workload reaches its typical expected level, the space that is used by the active log is 80% - 90% of the space that is available to the active log directory. At that point, you might need to increase the amount of space. Whether you must increase the space depends on the types of transactions in the server workload. Transaction characteristics affect how the active log space is used.

The following transaction characteristics can affect the space usage in the active log:

- The number and size of files in backup operations
 - Clients such as file servers that back up large numbers of small files can cause large numbers of transactions that are completed quickly. The transactions might use a large amount of space in the active log, but for a short time.
 - Clients such as a mail server or a database server that back up large amounts of data in few transactions can cause small numbers of transactions that take a long time to complete. The transactions might use a small amount of space in the active log, but for a long time.
- Network connection types
 - Backup operations that occur over fast network connections cause transactions that complete more quickly. The transactions use space in the active log for a shorter time.
 - Backup operations that occur over relatively slower connections cause transactions that take a longer time to complete. The transactions use space in the active log for a longer time.

If the server is handling transactions with a wide variety of characteristics, the space that is used for the active log might increase and decrease significantly over time. For such a server, you might need to ensure that the active log typically has a smaller percentage of its space used. The extra space allows the active log to grow for transactions that take a long time to complete.

2. Monitor the archive log to ensure that space is always available.

Remember: If the archive log becomes full, and the failover archive log becomes full, the active log can become full, and the server stops. The goal is to make enough space available to the archive log so that it never uses all its available space.

You are likely to notice the following pattern:

- a. Initially, the archive log grows rapidly as typical client-backup operations
- b. Database backups occur regularly, either as scheduled or done manually.
- c. After at least two full database backups occur, log pruning occurs automatically. The space that is used by the archive log decreases when the pruning occurs.
- d. Normal client operations continue, and the archive log grows again.
- e. Database backups occur regularly, and log pruning occurs as often as full database backups occur.

With this pattern, the archive log grows initially, decreases, and then might grow again. Over time, as normal operations continue, the amount of space that is used by the archive log should reach a relatively constant level.

If the archive log continues to grow, consider taking one or both of these actions:

- Add space to the archive log. You might need to move the archive log to a different file system.
- Increase the frequency of full database backups, so that log pruning occurs more frequently.
- 3. If you defined a directory for the failover archive log, determine whether any logs get stored in that directory during normal operations. If the failover log space is being used, consider increasing the size of the archive log. The goal is that the failover archive log is used only under unusual conditions, not in normal operation.

Chapter 4. Installing an IBM Spectrum Protect server fix pack

IBM Spectrum Protect maintenance updates, which are also referred to as fix packs, bring your server up to the current maintenance level.

Before you begin

To install a fix pack or interim fix to the server, install the server at the level on which you want to run it. You do not have to start the server installation at the base release level. For example, if you currently have V8.1.1 installed, you can go directly to the latest fix pack for V8.1. You do not have to start with the V8.1.0 installation if a maintenance update is available.

You must have the IBM Spectrum Protect license package installed. The license package is provided with the purchase of a base release. When you download a fix pack or interim fix from Fix Central, install the server license that is available on the Passport Advantage website. To display messages and help in a language other than US English, install the language package of your choice.

If you upgrade the server to V8.1.2 or later, and then revert the server to a level that is earlier than V8.1.2, you must restore the database to a point in time before the upgrade. During the upgrade process, complete the required steps to ensure that the database can be restored: back up the database, the volume history file, the device configuration file, and the server options file. For more information, see Chapter 6, "Reverting from Version 8.1.2 to a previous server," on page 95.

If you are using the client management service, ensure that you upgrade it to the same version as the IBM Spectrum Protect server.

Ensure that you retain the installation media from the base release of the installed server. If you installed IBM Spectrum Protect from a downloaded package, ensure that the downloaded files are available. If the upgrade fails, and the server license module is uninstalled, the installation media from the server base release are required to reinstall the license.

Visit the IBM Support Portal for the following information:

- A list of the latest maintenance and download fixes. Click **Downloads** and apply any applicable fixes.
- Details about obtaining a base license package. Search for Downloads > Passport Advantage.
- Supported platforms and system requirements. Search for **IBM Spectrum Protect** supported operating systems.

Ensure that you upgrade the server before you upgrade backup-archive clients. If you do not upgrade the server first, communication between the server and clients might be interrupted.

Attention: Do not alter the DB2 software that is installed with IBM Spectrum Protect installation packages and fix packs. Do not install or upgrade to a different version, release, or fix pack of DB2 software because doing so can damage the database.

Procedure

To install a fix pack or interim fix, complete the following steps:

1. Back up the database. The preferred method is to use a snapshot backup. A snapshot backup is a full database backup that does not interrupt any scheduled database backups. For example, issue the following IBM Spectrum Protect administrative command:

backup db type=dbsnapshot devclass=tapeclass

2. Back up the device configuration information. Issue the following IBM Spectrum Protect administrative command:

backup devconfig filenames=file name

where *file_name* specifies the name of the file in which to store device configuration information.

3. Save the volume history file to another directory or rename the file. Issue the following IBM Spectrum Protect administrative command:

backup volhistory filenames=file_name

where *file_name* specifies the name of the file in which to store the volume history information.

- 4. Save a copy of the server options file, typically named dsmserv.opt. The file is in the server instance directory.
- 5. Halt the server before installing a fix pack or interim fix. Use the **HALT** command.
- 6. Ensure that extra space is available in the installation directory. The installation of this fix pack might require additional temporary disk space in the installation directory of the server. The amount of additional disk space can be as much as that required for installing a new database as part of an IBM Spectrum Protect installation. The IBM Spectrum Protect installation wizard displays the amount of space that is required for installing the fix pack and the available amount. If the required amount of space is greater than the available amount, the installation stops. If the installation stops, add the required disk space to the file system and restart the installation.
- 7. Obtain the package file for the fix pack or interim fix that you want to install from the IBM Support Portal, Passport Advantage, or Fix Central.
- 8. Change to the directory where you placed the executable file. Then, either double-click the following executable file or enter the following command on the command line to extract the installation files.

Tip: The files are extracted to the current directory. Ensure that the executable file is in the directory where you want the extracted files to be located. 8.x.x.rIBM-SPSRV-platform.exe

where: *platform* denotes the operating system that IBM Spectrum Protect is to be installed on.

9. Select one of the following ways of installing IBM Spectrum Protect.

Important: After a fix pack is installed, it is not necessary to go through the configuration again. You can stop after completing the installation, fix any errors, then restart your servers.

Install the IBM Spectrum Protect software by using one of the following methods:

Installation wizard

Follow the instructions for your operating system:

"Installing IBM Spectrum Protect by using the installation wizard" on page 46

Tip: After you start the wizard, in the IBM Installation Manager window, click the **Update** icon; do not click the **Install** or **Modify** icon.

Command line in console mode

Follow the instructions for your operating system:

"Installing IBM Spectrum Protect by using console mode" on page 47

Silent mode

Follow the instructions for your operating system:

"Installing IBM Spectrum Protect in silent mode" on page 48

Tip: If you have multiple server instances on your system, run the installation wizard only once. The installation wizard upgrades all server instances.

Results

Correct any errors that are detected during the installation process.

If you installed the server by using the installation wizard, you can view installation logs by using the IBM Installation Manager tool. Click File > View **Log**. To collect log files, from the IBM Installation Manager tool, click **Help** > Export Data for Problem Analysis.

If you installed the server by using console mode or silent mode, you can view error logs in the IBM Installation Manager log directory, for example:

C:\ProgramData\IBM\Installation Manager\logs

Applying a fix pack to IBM Spectrum Protect 8.1.2 in a clustered environment

To take advantage of new product features, you can upgrade a server that is installed on a Windows operating system in a clustered environment from V6.3 or V7.1 to IBM Spectrum Protect V8.1.2.

Before you begin

Ensure that you retain the installation media from the V6.3 or V7.1 server base release that you are upgrading. If you installed the server from a downloaded package, ensure that the downloaded files are available. If the upgrade fails, and the server license module is uninstalled, you must reinstall the license from the installation media of the server base release.

Procedure

1. If you plan to install the IBM Spectrum Protect V8.1.2 server on the Windows Server 2012 operating system, install the failover cluster automation server and the failover cluster command interface first. To install these components, issue the following commands from Windows 2.0 PowerShell:

Install-WindowsFeature -Name RSAT-Clustering-AutomationServer Install-WindowsFeature -Name RSAT-Clustering-CmdInterface

2. Back up the database by using the **BACKUP DB** command. The preferred method is to use a snapshot backup, which provides a full database backup without interrupting scheduled backups. For example, you can run the following command to create a snapshot backup:

backup db type=dbsnapshot devclass=tapeclass

3. Back up the device configuration information to another directory. Run the following command:

backup devconfig filenames=file name

Where *file_name* specifies the name of the file in which to store device configuration information.

4. Back up the volume history file to another directory. Run the following command:

backup volhistory filenames=file_name

Where *file_name* specifies the name of the file in which to store the volume history information.

- 5. Save a copy of the server options file, typically named dsmserv.opt, which is in the server instance directory.
- 6. Ensure that the resource group is on the primary node, and that all nodes in the cluster are running. Take the following actions on the primary node:
 - a. In the Failover Cluster Manager window, take the server resource offline and delete it:
 - 1) Select **Services and applications**, and then select the cluster group. The server resource is displayed in the **Other Resources** section.
 - 2) Select the server resource, and click Take this resource offline.
 - 3) To delete the server resource, select it, and click Delete.
 - b. In the Failover Cluster Manager window, delete the network name and IP address:
 - 1) In the **Server name** section, expand the network name to view the IP address. Note the network name and IP address.
 - 2) Select the network name and the IP address, and click **Remove**.
 - c. In the Failover Cluster Manager window, take the DB2 server resource offline:
 - Select Services and applications, and then select the cluster group. The IBM Spectrum Protect server resource is displayed in the Other Resources section.
 - 2) Select a DB2 server resource, for example, SERVER1, and click **Take** this resource offline.
- 7. On the primary node, run the following command to remove DB2 clustering from each IBM Spectrum Protect instance in the cluster:

db2mscs -u:instancename

For example, run the following command to remove DB2 clustering from the SERVER1 instance:

db2mscs -u:server1

Tip: You might see an error message about a missing cluster resource. Ignore this message.

- 8. On the primary node, in the Failover Cluster Manager window, review the resource group **Summary** section. Verify that only the shared disks and any tape resources remain in the resource group.
- 9. Stop the cluster service on each node in the cluster and delete the server cluster DLL files. Then, restart the cluster service.
- 10. Install the IBM Spectrum Protect V8.1.2 server on each node in the cluster. For instructions, see Chapter 2, "Installing the server components," on page 45. If you use the installation wizard to install the server, in the IBM Installation Manager window, click the **Update** icon. Do not click the **Install** or **Modify** icon.
- 11. On the primary node, start the server in the foreground to allow the database schema reconciliation and configuration to be completed. When the server starts, halt it by running the HALT command. If your environment has multiple server instances, complete this step for each instance.
- 12. On the primary node, start the configuration wizard by clicking **Start** > **All Programs > IBM Spectrum Protect server > Configuration Wizard.** Complete the following steps in the configuration wizard:
 - a. When you are prompted to enter the user ID, enter the name of the domain account that is associated with the cluster.
 - b. When you are prompted to enter the instance name, enter the name of the instance that you are reclustering.
 - c. Click Yes when you are prompted to indicate whether you want to recluster.
 - d. Continue stepping through the wizard until you see a message that the configuration was successful.
- 13. Register the licenses for the IBM Spectrum Protect server components that are installed on your system by running the **REGISTER LICENSE** command: register license file=installation directory\server\component name.lic

Where installation_directory specifies the directory in which you installed the component and *component_name* specifies the abbreviation for the component.

For example, if you installed the server in the default directory, c:\Program Files\Tivoli\TSM, run the following command to register the license: register license file=c:\Program Files\Tivoli\TSM\server\tsmbasic.lic

For example, if you installed IBM Spectrum Protect Extended Edition in the c:\Program Files\Tivoli\TSM directory, run the following command: register license file=c:\Program Files\Tivoli\TSM\server\tsmee.lic

For example, if you installed IBM Spectrum Protect for Data Retention in the c:\Program Files\Tivoli\TSM directory, run the following command: register license file=c:\Program Files\Tivoli\TSM\server\dataret.lic

Restriction:

You cannot use the IBM Spectrum Protect server to register licenses for the following products:

- IBM Spectrum Protect for Mail
- IBM Spectrum Protect for Databases
- IBM Spectrum Protect for ERP
- IBM Spectrum Protect for Space Management

The **REGISTER LICENSE** command does not apply to these licenses. The licensing for these products is done by IBM Spectrum Protect clients.

What to do next

If a device driver is available on Windows for the tape drives or medium changers that you plan to use, use the device driver. If a device driver is not available, install the IBM Spectrum Protect device driver by running the <code>dpinst.exe /a</code> command. The <code>dpinst.exe</code> file is in the device driver directory, and the default location is <code>C:\Program Files\Tivoli\TSM\device\drivers</code>.

Chapter 5. Upgrading to V8.1

1

To take advantage of new product features and updates, upgrade the IBM Spectrum Protect server to Version 8.1.2.

Before you begin

Upgrade the IBM Spectrum Protect server before you update clients. For more information, see:

What you should know about security before you install or upgrade the server

About this task

To upgrade the server on the same operating system, see the upgrade instructions. For instructions about migrating the server to a different operating system, see IBM Spectrum Protect Upgrade and Migration Process - Frequently Asked Questions.

Table 12. Upgrade instructions

To upgrade from this version	To this version	See this information
V8.1	V8.1 fix pack or interim fix	Chapter 4, "Installing an IBM Spectrum Protect server fix pack," on page 73
V7.1	V8.1	"Installing the server and verifying the upgrade" on page 83
V7.1	V8.1 fix pack or interim fix	Chapter 4, "Installing an IBM Spectrum Protect server fix pack," on page 73
V5.5, V6.2, or V6.3	V8.1	IBM Spectrum Protect Upgrade and Migration Process - Frequently Asked Questions

An upgrade from V7 to V8.1 takes approximately 20 - 50 minutes. Your environment might produce different results from the results that were obtained in the labs.

For information about upgrades in a clustered environment, see "Upgrading the server in a clustered environment" on page 86.

To revert to an earlier version of the server after an upgrade or migration, you must have a full database backup and the installation software for the original server. You must also have the following key configuration files:

- Volume history file
- Device configuration file
- Server options file

Related information:

IBM Spectrum Protect Upgrade and Migration Process - Frequently Asked Questions

Upgrading to V8.1

You can upgrade the server directly from V7.1 to V8.1. You do not have to uninstall V7.1.

Before you begin

Ensure that you retain the installation media from the server base release that you are upgrading. If you installed the server components from a DVD, ensure that the DVD is available. If you installed the server components from a downloaded package, ensure that the downloaded files are available. If the upgrade fails, and the server license module is uninstalled, the installation media from the server base release are required to reinstall the license.

Tip: DVDs are no longer available with V8.1 and later.

Procedure

To upgrade the server to V8.1, complete the following tasks:

- 1. "Planning the upgrade"
- 2. "Preparing the system" on page 81
- 3. "Installing the server and verifying the upgrade" on page 83

Planning the upgrade

Before you upgrade the server from V7.1 to V8.1, you must review the relevant planning information, such as system requirements and release notes. Then, select an appropriate day and time to upgrade the system so that you can minimize the impact on production operations.

About this task

In lab tests, the process of upgrading the server from V7.1 to V8.1 took 14 - 45 minutes. The results that you achieve might differ, depending on your hardware and software environment, and the size of the server database.

Procedure

- 1. Review the hardware and software requirements:
 - "Minimum system requirements for the IBM Spectrum Protect server" on page 20
 - For the latest updates related to system requirements, see the IBM Spectrum Protect support website at technote 1243309.
- 2. For special instructions or specific information for your operating system, review the release notes (http://www.ibm.com/support/knowledgecenter/SSEQVQ_8.1.2/srv.common/r_relnotes_srv.html) and readme files for server components.
- 3. Select an appropriate day and time to upgrade your system to minimize the impact on production operations. The amount of time that is required to update the system depends on the database size and many other factors. When

- you start the upgrade process, clients cannot connect to the server until the new software is installed and any required licenses are registered again.
- 4. If you are upgrading the server from V6 or V7 to V8.1, verify that you have the system ID and password for the DB2 instance of the IBM Spectrum Protect server. These credentials are required to upgrade the system.

Preparing the system

To prepare the system for the upgrade from V7.1 to V8.1, you must gather information about each DB2 instance. Then, back up the server database, save key configuration files, cancel sessions, and stop the server.

Procedure

- 1. Log on to the computer where the server is installed.

 Ensure that you are logged on with the administrative user ID that was used to install the V7.1 server.
- 2. Obtain a list of DB2 instances. Issue the following system command: db2ilist

The output might be similar to the following example: SERVER1

Ensure that each instance corresponds to a server that is running on the system.

- 3. Gather information about each DB2 instance. Note the default database path, actual database path, database name, database alias, and any DB2 variables that are configured for the instance. Keep the record for future reference. This information is required to restore the V7.1 database.
 - a. Open the DB2 command window by issuing the following system command:

db2cmd

b. To change the instance, issue the following system command: set DB2INSTANCE=instance

where instance specifies the DB2 instance.

c. Obtain the default database path for the DB2 instance by issuing the following system command:

```
db2 get dbm cfg | findstr DFTDBPATH
```

The output might be similar to the following example:

Default database path (DFTDBPATH) = D:

d. Obtain information about the DB2 instance databases by issuing the following system command:

db2 list database directory

The output might be similar to the following example: System Database Directory

```
Number of entries in the directory = 2

Database 1 entry:

Database alias = TSMAL001
Database name = TSMDB1
```

Node name = TSMNODE1 Database release level = d.00= TSM SERVER DATABASE VIA TCPIP Comment - ISM SEM = Remote Directory entry type Catalog database partition number = -1 Alternate server hostname Alternate server port number Database 2 entry: Database alias = TSMDB1 Database name = TSMDB1 Local database directory
Database release level = D: Database release level = d.00Comment Directory entry type = Indirect Catalog database partition number = 0 Alternate server hostname

e. Obtain the DB2 instance variables by issuing the following system command:

db2set -all

The output might be similar to the following example:

- [e] DB2CODEPAGE=1208
- [e] DB2PATH=D:\TSM\db2
- [i] DB2 PMODEL SETTINGS=MAX BACKGROUND SYSAPPS:500
- [i] DB2_SKIPINSERTED=ON
- [i] DB2_KEEPTABLELOCK=OFF

Alternate server port number

- [i] DB2_EVALUNCOMMITTED=ON
- [i] DB2_VENDOR_INI=D:\Server1\tsmdbmgr.env
- [i] DB2_SKIPDELETED=ON
- [i] DB2INSTPROF=C:\ProgramData\IBM\DB2\DB2TSM1
- [i] DB2COMM=TCPIP
- [i] DB2CODEPAGE=819
- [i] DB2_PARALLEL_IO=*
- [g] DB2_EXTSECURITY=YES
- [g] DB2_COMMON_APP_DATA_PATH=C:\ProgramData
- [g] DB2PATH=D:\TSM\db2
- [g] DB2INSTDEF=SERVER1
- 4. Connect to the server by using an administrative user ID.
- 5. Back up the database by using the BACKUP DB command. The preferred method is to create a snapshot backup, which is a full database backup that does not interrupt scheduled database backups. For example, you can create a snapshot backup by issuing the following command:

backup db type=dbsnapshot devclass=tapeclass

6. Back up the device configuration information to another directory by issuing the following administrative command:

backup devconfig filenames=file name

where *file_name* specifies the name of the file in which to store device configuration information.

Tip: If you decide to restore the V7.1 database, this file is required.

7. Back up the volume history file to another directory. Issue the following administrative command:

backup volhistory filenames=file_name

where *file_name* specifies the name of the file in which to store the volume history information.

Tip: If you decide to restore the V7.1 database, this file is required.

- 8. Save a copy of the server options file, which is typically named dsmserv.opt. The file is in the server instance directory.
- 9. Prevent activity on the server by disabling new sessions. Issue the following administrative commands:

```
disable sessions client disable sessions server
```

10. Verify whether any sessions exist, and notify the users that the server will be stopped. To check for existing sessions, issue the following administrative command:

```
query session
```

11. Cancel sessions by issuing the following administrative command: cancel session all

This command cancels all sessions except for your current session.

- 12. Stop the server by issuing the following administrative command: halt
- 13. Verify that the server is shut down and no processes are running.
 Open the Windows Task Manager application and review the list of active processes.
- 14. In the server instance directory of your installation, locate the NODELOCK file and move it to another directory, where you are saving configuration files. The NODELOCK file contains the previous licensing information for your installation. This licensing information is replaced when the upgrade is complete.

Installing the server and verifying the upgrade

To complete the process of upgrading the server to V8.1, you must install the V8.1 server. Then, verify that the upgrade was successful by starting the server instance.

Before you begin

You must be logged on to the system with the administrative user ID that was used to install the previous server.

You can obtain the installation package from an IBM download site.

About this task

By using the IBM Spectrum Protect installation software, you can install the following components:

Server

Tip: The database (DB2), the Global Security Kit (GSKit), and IBM Java Runtime Environment (JRE) are automatically installed when you select the server component.

- Server languages
- License
- Devices

- IBM Spectrum Protect for SAN
- Operations Center

Procedure

- 1. Download the appropriate package file from one of the following websites:
 - Download the server package from Passport Advantage or Fix Central.
 - For the most recent information, updates, and maintenance fixes, go to the IBM Support Portal.
- 2. Complete the following steps:
 - a. Verify that you have enough space to store the installation files when they are extracted from the product package. For space requirements, see the download document for your product.
 - IBM Spectrum Protect technote 4042944
 - IBM Spectrum Protect Extended Edition technote 4042945
 - IBM Spectrum Protect for Data Retention technote 4042946
 - b. Change to the directory where you placed the executable file.

Tip: In the next step, the files are extracted to the current directory. The path must contain no more than 128 characters. Be sure to extract the installation files to an empty directory. Do not extract to a directory that contains previously extracted files, or any other files.

c. To extract the installation files, double-click the executable file: package_name.exe

Where *package_name* is similar to the following example: 8.1.x.000-SPSRV-WindowsX64.exe

The package is large. Therefore, the extraction takes some time.

Install the IBM Spectrum Protect software by using one of the following methods. Install the IBM Spectrum Protect license during the installation process.

Tip: If you have multiple server instances on your system, install the IBM Spectrum Protect software only one time to upgrade all server instances.

Installation wizard

To install the server by using the graphical wizard of IBM Installation Manager, follow the instructions in "Installing IBM Spectrum Protect by using the installation wizard" on page 46.

Ensure that your system meets the prerequisites for using the installation wizard. Then, complete the installation procedure. In the IBM Installation Manager window, click the **Update** or **Modify** icon.

Installing the server by using the console mode

To install the server by using the console mode, follow the instructions in "Installing IBM Spectrum Protect by using console mode" on page 47.

Review the information about installing the server in console mode and then complete the installation procedure.

Silent mode

To install the server by using silent mode, follow the instructions in "Installing IBM Spectrum Protect in silent mode" on page 48.

Review the information about installing the server in silent mode and then complete the installation procedure.

After you install the software, you do not have to reconfigure the system.

4. Correct any errors that are detected during the installation process.

If you installed the server by using the installation wizard, you can view installation logs by using the IBM Installation Manager tool. Click **File** > **View Log**. To collect log files, from the IBM Installation Manager tool, click **Help** > **Export Data for Problem Analysis**.

If you installed the server by using console mode or silent mode, you can view error logs in the IBM Installation Manager log directory, for example:

C:\ProgramData\IBM\Installation Manager\logs

- 5. Go to the IBM Support Portal to obtain fixes. Click **Fixes**, **updates**, **and drivers** and apply any applicable fixes.
- 6. Verify that the upgrade was successful:
 - a. Start the server instance. To start the server from the default directory,C:\Program Files\Tivoli\TSM, run the following IBM Spectrum Protect administrative command:

```
dsmserv -k server_instance
```

server_instance is the name of your server instance. Server1 is the default name for the first instance of the IBM Spectrum Protect server.

If you plan to run the server as a service under the Local System account, the Local System account must be explicitly granted access to the server database. For instructions, see "Starting the server as a Windows service" on page 65.

- b. Monitor the messages that the server issues as it starts. Watch for error and warning messages, and resolve any issues.
- c. Verify that you can connect to the server by using the administrative client. To start an administrative client session, run the following IBM Spectrum Protect administrative command:

dsmadmc

d. To obtain information about the upgraded system, run QUERY commands. For example, to obtain consolidated information about the system, run the following IBM Spectrum Protect administrative command: query system

To obtain information about the database, run the following IBM Spectrum Protect administrative command:

query db format=detailed

7. Register the licenses for the server components that are installed on your system by running the **REGISTER LICENSE** command:

register license file=installation_directory\server\component_name.lic

Where *installation_directory* specifies the directory in which you installed the component, and *component_name* specifies the abbreviation for the component.

For example, if you installed the server in the default directory, c:\Program Files\Tivoli\TSM, run the following command to register the license: register license file=c:\Program Files\Tivoli\TSM\server\tsmbasic.lic

For example, if you installed IBM Spectrum Protect Extended Edition in the c:\Program Files\Tivoli\TSM directory, run the following command: register license file=c:\Program Files\Tivoli\TSM\server\tsmee.lic

For example, if you installed IBM Spectrum Protect for Data Retention in the c:\Program Files\Tivoli\TSM directory, run the following command:
register license file=c:\Program Files\Tivoli\TSM\server\dataret.lic

Restriction:

You cannot use the IBM Spectrum Protect server to register licenses for the following products:

- IBM Spectrum Protect for Mail
- IBM Spectrum Protect for Databases
- IBM Spectrum Protect for ERP
- IBM Spectrum Protect for Space Management

The **REGISTER LICENSE** command does not apply to these licenses. The licensing for these products is done by IBM Spectrum Protect clients.

- 8. Optional: To install an extra language package, use the modify function of the IBM Installation Manager.
- 9. Optional: To upgrade to a newer version of a language package, use the update function of the IBM Installation Manager.

What to do next

You can authenticate passwords with the LDAP directory server, or authenticate passwords with the IBM Spectrum Protect server. Passwords that are authenticated with the LDAP directory server can provide enhanced system security.

If a device driver is available on Windows for the tape drives or medium changers that you plan to use, use the device driver. If a device driver is not available on Windows for the tape drives or medium changers that you plan to use, install the IBM Spectrum Protect device driver by running the dpinst.exe /a command. The dpinst.exe file is in the device driver directory. The default directory is C:\Program Files\Tivoli\TSM\device\drivers.

Upgrading the server in a clustered environment

To upgrade a server to V8.1.2 in a clustered environment, you must complete preparation and installation tasks. The procedures vary, depending on the operating system and release.

Procedure

Follow the procedure for your operating system, source release, and target release:

Table 13. Procedures for upgrading the server in a clustered environment on a Windows operating system

Source release	Target release	Procedure
V8.1.2	V8.1.2 fix pack	"Applying a fix pack to IBM Spectrum Protect 8.1.2 in a clustered environment" on page 75
V6.3 or V7.1	V8.1.2	Upgrading V6.3 or V7.1 to V8.1 in a clustered environment on Windows

Table 13. Procedures for upgrading the server in a clustered environment on a Windows operating system (continued)

Source release	Target release	Procedure
V6.1	V8.1.2	Upgrading V6.1 to V8.1 in a clustered environment on Windows
V5	V7.1 or later	Upgrading the server to V7.1 or later in a Windows clustered environment

Upgrading a V6.3 or V7.1 server to V8.1.2 in a clustered environment

To take advantage of new product features, you can upgrade a server that is installed on a Windows operating system in a clustered environment from V6.3 or V7.1 to IBM Spectrum Protect V8.1.2.

Before you begin

Ensure that you retain the installation media from the V6.3 or V7.1 server base release that you are upgrading. If you installed the server from a downloaded package, ensure that the downloaded files are available. If the upgrade fails, and the server license module is uninstalled, you must reinstall the license from the installation media of the server base release.

Procedure

1. If you plan to install the IBM Spectrum Protect V8.1.2 server on the Windows Server 2012 operating system, install the failover cluster automation server and the failover cluster command interface first. To install these components, issue the following commands from Windows 2.0 PowerShell:

Install-WindowsFeature -Name RSAT-Clustering-AutomationServer Install-WindowsFeature -Name RSAT-Clustering-CmdInterface

2. Back up the database by using the **BACKUP DB** command. The preferred method is to use a snapshot backup, which provides a full database backup without interrupting scheduled backups. For example, you can run the following command to create a snapshot backup:

backup db type=dbsnapshot devclass=tapeclass

3. Back up the device configuration information to another directory. Run the following command:

backup devconfig filenames=file name

Where *file_name* specifies the name of the file in which to store device configuration information.

4. Back up the volume history file to another directory. Run the following command:

backup volhistory filenames=file_name

Where *file_name* specifies the name of the file in which to store the volume history information.

- 5. Save a copy of the server options file, typically named dsmserv.opt, which is in the server instance directory.
- 6. Ensure that the resource group is on the primary node, and that all nodes in the cluster are running. Take the following actions on the primary node:

- a. In the Failover Cluster Manager window, take the server resource offline and delete it:
 - 1) Select **Services and applications**, and then select the cluster group. The server resource is displayed in the **Other Resources** section.
 - 2) Select the server resource, and click **Take this resource offline**.
 - 3) To delete the server resource, select it, and click Delete.
- b. In the Failover Cluster Manager window, delete the network name and IP address:
 - 1) In the **Server name** section, expand the network name to view the IP address. Note the network name and IP address.
 - 2) Select the network name and the IP address, and click **Remove**.
- c. In the Failover Cluster Manager window, take the DB2 server resource offline:
 - Select Services and applications, and then select the cluster group. The IBM Spectrum Protect server resource is displayed in the Other Resources section.
 - 2) Select a DB2 server resource, for example, SERVER1, and click **Take** this resource offline.
- 7. On the primary node, run the following command to remove DB2 clustering from each IBM Spectrum Protect instance in the cluster:

db2mscs -u:instancename

For example, run the following command to remove DB2 clustering from the SERVER1 instance:

db2mscs -u:server1

Tip: You might see an error message about a missing cluster resource. Ignore this message.

- 8. On the primary node, in the Failover Cluster Manager window, review the resource group **Summary** section. Verify that only the shared disks and any tape resources remain in the resource group.
- 9. Stop the cluster service on each node in the cluster and delete the server cluster DLL files. Then, restart the cluster service.
- 10. Install the IBM Spectrum Protect V8.1.2 server on each node in the cluster. For instructions, see Chapter 2, "Installing the server components," on page 45. If you use the installation wizard to install the server, in the IBM Installation Manager window, click the **Update** icon. Do not click the **Install** or **Modify** icon.
- 11. On the primary node, start the server in the foreground to allow the database schema reconciliation and configuration to be completed. When the server starts, halt it by running the **HALT** command. If your environment has multiple server instances, complete this step for each instance.
- 12. On the primary node, start the configuration wizard by clicking **Start** > **All Programs** > **IBM Spectrum Protect server** > **Configuration Wizard**. Complete the following steps in the configuration wizard:
 - a. When you are prompted to enter the user ID, enter the name of the domain account that is associated with the cluster.
 - b. When you are prompted to enter the instance name, enter the name of the instance that you are reclustering.
 - c. Click **Yes** when you are prompted to indicate whether you want to recluster.

- d. Continue stepping through the wizard until you see a message that the configuration was successful.
- 13. Register the licenses for the IBM Spectrum Protect server components that are installed on your system by running the **REGISTER LICENSE** command: register license file=installation directory\server\component name.lic

Where installation_directory specifies the directory in which you installed the component and *component_name* specifies the abbreviation for the component.

For example, if you installed the server in the default directory, c:\Program Files\Tivoli\TSM, run the following command to register the license: register license file=c:\Program Files\Tivoli\TSM\server\tsmbasic.lic

For example, if you installed IBM Spectrum Protect Extended Edition in the c:\Program Files\Tivoli\TSM directory, run the following command: register license file=c:\Program Files\Tivoli\TSM\server\tsmee.lic

For example, if you installed IBM Spectrum Protect for Data Retention in the c:\Program Files\Tivoli\TSM directory, run the following command: register license file=c:\Program Files\Tivoli\TSM\server\dataret.lic

Restriction:

You cannot use the IBM Spectrum Protect server to register licenses for the following products:

- IBM Spectrum Protect for Mail
- IBM Spectrum Protect for Databases
- IBM Spectrum Protect for ERP
- IBM Spectrum Protect for Space Management

The **REGISTER LICENSE** command does not apply to these licenses. The licensing for these products is done by IBM Spectrum Protect clients.

What to do next

If a device driver is available on Windows for the tape drives or medium changers that you plan to use, use the device driver. If a device driver is not available, install the IBM Spectrum Protect device driver by running the dpinst.exe /a command. The dpinst.exe file is in the device driver directory, and the default location is C:\Program Files\Tivoli\TSM\device\drivers.

Upgrading IBM Tivoli Storage Manager V6.1 to IBM Spectrum Protect V8.1.2 in a clustered environment

To take advantage of new features, you can upgrade a server that is installed on a Windows operating system in a clustered environment from V6.1 to V8.1.2.

Before you begin

Ensure that you retain the installation media from the V6.1 and V6.3 server base releases. If you obtained the server software from a downloaded package, ensure that the downloaded files are available. If the upgrade fails, and the server license module is uninstalled, the installation media from the server base release are required to reinstall the license.

Procedure

1. If you plan to install the IBM Spectrum Protect V8.1.2 server on the Windows Server 2012 operating system, install the failover cluster automation server and the failover cluster command interface first. To install these components, issue the following commands from Windows 2.0 PowerShell:

```
Install-WindowsFeature -Name RSAT-Clustering-AutomationServer Install-WindowsFeature -Name RSAT-Clustering-CmdInterface
```

2. Back up the database by using the **BACKUP DB** command. The preferred method is to use a snapshot backup, which provides a full database backup without interrupting scheduled backups. For example, you can run the following command to create a snapshot backup:

```
backup db type=dbsnapshot devclass=tapeclass
```

3. Back up the device configuration information to another directory. Run the following command:

```
backup devconfig filenames=file name
```

Where *file_name* specifies the name of the file in which to store device configuration information.

4. Back up the volume history file to another directory. Run the following command:

```
backup volhistory filenames=file name
```

Where *file_name* specifies the name of the file in which to store the volume history information.

- 5. Save a copy of the server options file, typically named dsmserv.opt, which is in the server instance directory.
- 6. Ensure that the resource group is on the primary node, and that all nodes in the cluster are running. Take the following actions on the primary node:
 - a. In the Failover Cluster Manager window, take the server resource offline and delete it:
 - 1) Select **Services and applications**, and then select the cluster group. The server resource is displayed in the **Other Resources** section.
 - 2) Select the server resource, and click **Take this resource offline**.
 - 3) To delete the server resource, select it, and click **Delete**.
 - b. In the Failover Cluster Manager window, delete the network name and IP address:
 - 1) In the **Server name** section, expand the network name to view the IP address. Note the network name and IP address.
 - 2) Select the network name and the IP address, and click **Remove**.
 - c. In the Failover Cluster Manager window, take the DB2 server resource offline:
 - Select Services and applications, and then select the cluster group. The IBM Spectrum Protect server resource is displayed in the Other Resources section.
 - Select a DB2 server resource, for example, SERVER1, and click Take this resource offline.
- 7. On the primary node, to remove DB2 clustering from the instance, for each IBM Spectrum Protect instance in the cluster, issue the following command:

```
db2mscs -u:instancename
```

For example:

db2mscs -u:server1

- **Tip:** You might see an error message about a missing cluster resource. Ignore this message.
- 8. On the primary node, in the Failover Cluster Manager window, in the resource group **Summary** section, verify that only the shared disks and any tape resources remain in the resource group.
- 9. On the primary node, install the V6.3 server by using the **install.exe** command. For detailed instructions about installing the V6.3 server, see Installing the server components.
- 10. On the primary node, install the IBM Spectrum Protect V8.1.2 server. For instructions, see Chapter 2, "Installing the server components," on page 45. If you use the installation wizard to install the server, in the IBM Installation Manager window, click the Install icon. Do not click the Update or Modify icon.
- 11. On each secondary node, uninstall V6.1:
 - a. Change to the following directory:C:\Program Files\Tivoli\TSM\ uninst
 - b. Issue the following command:Uninstall Tivoli Storage Manager.exe
- 12. On the primary node, start the configuration wizard by clicking **Start > All Programs > IBM Spectrum Protect server > Configuration Wizard**. Step through the configuration wizard:
 - a. When you are prompted to enter the instance name, enter the name of the instance that you are reclustering.
 - b. When you are prompted to enter the user ID, enter the name of the domain account that is associated with the cluster.
 - When you are prompted to indicate whether you want to recluster, click Yes.
 - d. Continue stepping through the wizard until you see a message that the configuration was successful.
- 13. Register the licenses for the IBM Spectrum Protect server components that are installed on your system by running the REGISTER LICENSE command: register license file=installation_directory\server\component_name.lic

Where *installation_directory* specifies the directory in which you installed the component and *component_name* specifies the abbreviation for the component.

For example, if you installed the server in the default directory, c:\Program Files\Tivoli\TSM, run the following command to register the license: register license file=c:\Program Files\Tivoli\TSM\server\tsmbasic.lic

For example, if you installed IBM Spectrum Protect Extended Edition in the c:\Program Files\Tivoli\TSM directory, run the following command: register license file=c:\Program Files\Tivoli\TSM\server\tsmee.lic

For example, if you installed IBM Spectrum Protect for Data Retention in the c:\Program Files\Tivoli\TSM directory, run the following command:
register license file=c:\Program Files\Tivoli\TSM\server\dataret.lic

Restriction:

You cannot use the IBM Spectrum Protect server to register licenses for the following products:

- IBM Spectrum Protect for Mail
- IBM Spectrum Protect for Databases
- IBM Spectrum Protect for ERP
- IBM Spectrum Protect for Space Management

The **REGISTER LICENSE** command does not apply to these licenses. The licensing for these products is done by IBM Spectrum Protect clients.

What to do next

If a device driver is available on Windows for the tape drives or medium changers that you plan to use, use the device driver. If a device driver is not available, install the IBM Spectrum Protect device driver by running the **dpinst.exe** /a command. The dpinst.exe file is in the device driver directory, and the default location is C:\Program Files\Tivoli\TSM\device\drivers.

Removing GSKit Version 7 after upgrading to IBM Spectrum Protect Version 8.1.2

The IBM Spectrum Protect installation wizard upgrades GSKit Version 8 and later. GSKit Version 7 is not removed or upgraded when you upgrade to IBM Spectrum Protect Version 8.1.2, even if GSKit was installed with an earlier version of IBM Spectrum Protect.

About this task

If you no longer need GSKit V7 and want to free up space on your system, you can remove it after the upgrade to IBM Spectrum Protect V8.1.2.

Important: Removing GSKit V7 might affect other programs on your system that rely on it.

Procedure

To remove GSKit V7, complete the following steps:

- 1. Back up your registry.
 - a. Click **Start**, and then click **Run**.
 - b. Type Regedit. Click **OK**.
 - **c**. To save a copy of your registry, select **File** > **Export**.
 - d. If you must later restore the registry, select **File** > **Import**.

For more information, see the Windows documentation.

- 2. Locate the directory where the GSKit is installed. The default directory is C:\Program Files\IBM\gsk7\.
- 3. Remove the GSKit installation directory, gsk7, and all subfiles and directories. Right-click the folder and click **Delete**.
- 4. Remove the GSKit 7 registry key and all subkeys and values.

Important: Removing the wrong key can cause system problems such as not being able to restart the workstation.

a. Click Start, and then click Run.

- b. Type Regedit. Click **OK**.
- c. The GSKit registry key is in this directory: $\label{eq:hkey_local_machine} \textbf{SOFTWARE} \backslash$ IBM. Right-click the registry key, HKEY_LOCAL_MACHINE\SOFTWARE\IBM\GSK7, and click **Delete**.

Chapter 6. Reverting from Version 8.1.2 to a previous server

If you must revert to the previous version of the server after an upgrade, you must have a full database backup from your original version. You must also have the server installation media for your original version and key configuration files. Carefully follow the preparation steps before you upgrade the server. By doing so, it might be possible to revert to the previous version of the IBM Spectrum Protect server with minimal loss of data.

Before you begin

You must have the following items from the earlier version of the server:

- Server database backup
- Volume history file
- Device configuration file
- Server options file

About this task

Use the same instructions whether you are reverting within releases or to an earlier release, for example, from 8.1.2 to 8.1.1 or from 8.1.2 to 7.1.2. The older version must match the version that you used before the upgrade to V8.1.

Attention: Specify the **REUSEDELAY** parameter to help prevent backup-archive client data loss when you revert the server to a previous version.

Steps for reverting to the previous server version

About this task

Complete the following steps on the system that has the V8.1 server.

Procedure

- Halt the server to shut down all server operations by using the HALT command.
- 2. Remove the database from the database manager, then delete the database and recovery log directories.
 - a. Manually remove the database. One way to remove it is by issuing this command:
 - dsmserv -k instance name removedb tsmdb1
 - b. If you must reuse the space that is occupied by the database and recovery log directories, you can now delete these directories.
- 3. Use the uninstallation program to uninstall the V8.1 server. Uninstallation removes the server and the database manager, with their directories. For details, see Chapter 8, "Uninstalling IBM Spectrum Protect," on page 103.
- 4. Stop the cluster service. Reinstall the version of the server program that you were using before the upgrade to V8.1.2. This version must match the version that your server was running when you created the database backup that you restore in a later step. For example, the server was at V7.1.7 before the

Reverting to a previous server version

- upgrade, and you intend to use the database backup that was in use on this server. You must install the V7.1.7 fix pack to be able to restore the database backup.
- 5. Configure the new server database by using the configuration wizard. To start the wizard, issue the following command:
 - /dsmicfgx
- 6. Ensure that no servers are running in the background.
- 7. Restore the database to a point in time before the upgrade.
- 8. Copy the following files to the instance directory.
 - Device configuration file
 - Volume history file
 - The server options file (typically dsmserv.opt)
- 9. If you enabled data deduplication for any FILE-type storage pools that existed before the upgrade, or if you moved data that existed before the upgrade into new storage pools while using the V8.1.2 server, you must complete additional recovery steps. For more details, see "Additional recovery steps if you created new storage pools or enabled data deduplication."
- 10. If the REUSEDELAY parameter setting on storage pools is less than the age of the database that you restored, restore volumes on any sequential-access storage pools that were reclaimed after that database backup. Use the RESTORE VOLUME command.
 - If you do not have a backup of a storage pool, audit the reclaimed volumes by using the **AUDIT VOLUME** command, with the **FIX=YES** parameter to resolve inconsistencies. For example:
 - audit volume volume name fix=yes
- 11. If client backup or archive operations were completed using the V8.1 server, audit the storage pool volumes on which the data was stored.

Additional recovery steps if you created new storage pools or enabled data deduplication

If you created new storage pools, turned on data deduplication for any FILE-type storage pools, or did both while your server was running as a V8.1.2 server, you must complete more steps to return to the previous server version.

Before you begin

To complete this task, you must have a complete backup of the storage pool that was created before the upgrade to V8.1.2.

About this task

Use this information if you did either or both of the following actions while your server was running as a V8.1.2 server:

- You enabled the data deduplication function for any storage pools that existed before the upgrade to V8.1.2 program. Data deduplication applies only to storage pools that use a FILE device type.
- You created new primary storage pools after the upgrade *and* moved data that was stored in other storage pools into the new storage pools.

Complete these steps after the server is again restored to V7.

Procedure

- For each storage pool for which you enabled the data deduplication function, restore the entire storage pool by using the RESTORE STGPOOL command.
- For storage pools that you created after the upgrade, determine what action to take. Data that was moved from existing V8 storage pools into the new storage pools might be lost because the new storage pools no longer exist in your restored V8 server. Possible recovery depends on the type of storage pool:
 - If data was moved from V8 DISK-type storage pools into a new storage pool, space that was occupied by the data that was moved was probably reused.
 Therefore, you must restore the original V8 storage pools by using the storage pool backups that were created before the upgrade to V8.1.2.
 If no data was moved from V8 DISK-type storage pools into a new storage
 - If *no* data was moved from V8 DISK-type storage pools into a new storage pool, then audit the storage pool volumes in these DISK-type storage pools.
 - If data was moved from V8 sequential-access storage pools into a new storage pool, that data might still exist and be usable in storage pool volumes on the restored V8 server. The data might be usable if the REUSEDELAY parameter for the storage pool was set to a value that prevented reclamation while the server was running as a V8.1.2 server. If any volumes were reclaimed while the server was running as a V8.1.2 server, restore those volumes from storage pool backups that were created before the upgrade to V8.1.2.

Reverting to the previous server version in a cluster configuration

If you must revert to the previous version of the server after an upgrade, you must have a full database backup from your original version. You must also have the server installation media for your original version and key configuration files. Carefully follow the preparation steps before you upgrade the server. By doing so, it might be possible to revert to the previous version of the IBM Spectrum Protect server with minimal loss of data.

Before you begin

You must have the following items from the earlier version of the server:

- · Server database backup
- Volume history file
- Device configuration file
- Server options file

Steps for reverting to the previous server version

Carefully follow the preparation steps before you upgrade the server. By doing so, it might be possible to revert to the previous version of the server with minimal loss of data.

About this task

Complete the following steps on the system that has the Version 8.1.2 server.

Procedure

- 1. Delete the IBM Spectrum Protect server resource and the network resource in Microsoft Failover Cluster Manager.
 - a. Open Failover Cluster Manager. Under **Other Resources**, right-click the IBM Spectrum Protect instance resource. Select **Take this resource offline**.

Reverting to a previous server version

- b. Delete the IBM Spectrum Protect instance.
- c. Under Server Name, expand the network name and record the cluster TCP/IP address.
- d. Delete the network name.
- 2. Remove the DB2 cluster from the instance by issuing the following command: DB2mscs -u:instance_name

For example, if the server instance is Server1, enter the command: db2mscs -u:Server1

Tip: You might see an error message about a missing cluster resource. Disregard this message.

- 3. Remove the database. One way to remove it is by issuing this command: dsmserv -k *instance_name* removedb tsmdb1
- 4. On each system in the cluster, delete the V 8.1.2 tsmsvrrsc DLL files by completing the following steps:
 - a. Stop the cluster service. One way to stop it is by using the Services Application. Right-click **Cluster Service** and select **Stop**.
 - b. Delete the tsmsvrrscexX64.dll and tsmsvrrscx64.dll files from the C:\Windows\Cluster directory.
 - **c.** Start the cluster service. One way to start it is by using the Services Application. Right-click **Cluster Service** and select **Start**.
- 5. Use the uninstallation program to uninstall the V8.1 server. Uninstallation removes the server and the database manager, with their directories. For details, see Chapter 8, "Uninstalling IBM Spectrum Protect," on page 103.
- 6. Clean up the database and recovery log directories if you are reusing them.
- 7. Stop the cluster service. Reinstall the version of the server program that you were using before the upgrade to V8.1.2. This version must match the version that your server was running when you created the database backup that you restore in a later step. For example, the server was at V7.1.7 before the upgrade, and you intend to use the database backup that was in use on this server. You must install the V7.1.7 fix pack to be able to restore the database backup.
- **8**. Copy the following files to the instance directory.
 - Device configuration file
 - Volume history file
 - The server options file (typically dsmserv.opt)
- 9. Use the configuration wizard (dsmicfgx) to recreate the server instance.
- 10. Restore the database to a point in time before the upgrade.

Chapter 7. Reference: DB2 commands for IBM Spectrum Protect server databases

Use this list as reference when you are directed to issue DB2 commands by IBM support.

Purpose

After using the wizards to install and configure IBM Spectrum Protect, you seldom need to issue DB2 commands. A limited set of DB2 commands that you might use or be asked to issue are listed in Table 14. This list is supplemental material only and is not a comprehensive list. There is no implication that an IBM Spectrum Protect administrator will use it on a daily or ongoing basis. Samples of some commands are provided. Details of output are not listed.

For a full explanation of the commands described here and of their syntax, see the DB2 product information.

Table 14. DB2 commands

Command	Description	Example	
db2cmd	Opens the command line processor DB2 window, and initializes the DB2 command-line environment.	Open the DB2 command window: db2cmd	
db2icrt	Creates DB2 instances in the home directory of the instance owner. Tip: The IBM Spectrum Protect configuration wizard creates the instance used by the server and database. After a server is installed and configured through the configuration wizard, the db2icrt command is generally not used. This utility is located in the DB2PATH\bin directory where DB2PATH is the location where the DB2 copy is installed.	Manually create an IBM Spectrum Protect instance. Enter the command on one line: /opt/tivoli/tsm/db2/instance/db2icrt -a server -u instance_name instance_name	
db2set	Displays DB2 variables.	List DB2 variables: db2set	
CATALOG DATABASE	Stores database location information in the system database directory. The database can be located either on the local workstation or on a remote database partition server. The server configuration wizard takes care of any catalog needed for using the server database. Run this command manually, after a server is configured and running, only if something in the environment changes or is damaged.	Catalog the database: db2 catalog database tsmdb1	
CONNECT TO DATABASE	Connects to a specified database for command-line interface (CLI) use.	Connect to the IBM Spectrum Protect database from a DB2 CLI: db2 connect to tsmdb1	

Reference: DB2 commands for IBM Spectrum Protect server databases

Table 14. DB2 commands (continued)

Command	Description	Example	
GET DATABASE CONFIGURATION	Returns the values of individual entries in a specific database configuration file. Important: This command and parameters are set and managed directly by DB2. They are listed here for informational purposes and a means to view the existing settings. Changing these settings might be advised by IBM support or through service bulletins such as APARs or Technical Guidance documents (technotes). Do not change these settings manually. Change them only at the direction of IBM and only through the use of IBM Spectrum Protect server commands or procedures.	Show the configuration information for a database alias: db2 get db cfg for tsmdb1 Retrieve information in order to verify settings such as database configuration, log mode, and maintenance. db2 get db config for tsmdb1 show detail	
GET DATABASE MANAGER CONFIGURATION	Returns the values of individual entries in a specific database configuration file. Important: This command and parameters are set and managed directly by DB2. They are listed here for informational purposes and a means to view the existing settings. Changing these settings might be advised by IBM support or through service bulletins such as APARs or Technical Guidance documents (technotes). Do not change these settings manually. Change them only at the direction of IBM and only through the use of IBM Spectrum Protect server commands or procedures.	Retrieve configuration information for the database manager: db2 get dbm cfg	
GET HEALTH SNAPSHOT	Retrieves the health status information for the database manager and its databases. The information returned represents a snapshot of the health state at the time the command was issued. IBM Spectrum Protect monitors the state of the database using the health snapshot and other mechanisms that are provided by DB2. There might be cases where the health snapshot or other DB2 documentation indicates that an item or database resource might be in an alert state. Such a case indicates that action must be considered to remedy the situation. IBM Spectrum Protect monitors the condition and responds appropriately. Not all declared alerts by the DB2 database are acted on.	Receive a report on DB2 health monitor indicators: db2 get health snapshot for database on tsmdb1	
GRANT (Database Authorities)	Grants authorities that apply to the entire database rather than privileges that apply to specific objects within the database.	Grant access to the user ID itmuser: db2 GRANT CONNECT ON DATABASE TO USER itmuser db2 GRANT CREATETAB ON DATABASE TO USER itmuser	

Reference: DB2 commands for IBM Spectrum Protect server databases

Table 14. DB2 commands (continued)

Command	Description	Example
RUNSTATS	Updates statistics about the characteristics of a table and associated indexes or statistical views. These characteristics include number of records, number of pages, and average record length.	Update statistics on a single table. db2 runstats on table SCHEMA_NAME.TABLE_NAME with distribution and sampled detailed indexes all
	To see a table, issue this utility after updating or reorganizing the table.	
	A view must be enabled for optimization before its statistics can be used to optimize a query. A view that is enabled for optimization is known as a statistical view. Use the DB2 ALTER VIEW statement to enable a view for optimization. Issue the RUNSTATS utility when changes to underlying tables substantially affect the rows returned by the view. Tip: The server configures DB2 to run the RUNSTATS command as needed.	
set db2instance	Determines which instance applies to the current session.	Determine which instance is applicable: set db2instance=tsminst1
SET SCHEMA	Changes the value of the CURRENT SCHEMA special register, in preparation for issuing SQL commands directly through the DB2 CLI. Tip: A special register is a storage area that is defined for an application process by the database manager. It is used to store information that can be referenced in SQL statements.	Set the schema for IBM Spectrum Protect: db2 set schema tsmdb1
START DATABASE MANAGER	Starts the current database manager instance background processes. The server starts and stops the instance and database whenever the server starts and halts. Important: Allow the server to manage the starting and stopping of the instance and database unless otherwise directed by IBM support.	Start the database manager: db2start
STOP DATABASE MANAGER	Stops the current database manager instance. Unless explicitly stopped, the database manager continues to be active. This command does not stop the database manager instance if any applications are connected to databases. If there are no database connections, but there are instance attachments, the command forces the instance attachments to stop first. Then, it stops the database manager. This command also deactivates any outstanding database activations before stopping the database manager.	Stop the database manager: db2 stop dbm
	This command is not valid on a client. The server starts and stops the instance and database whenever the server starts and halts. Important: Allow the server to manage the starting and stopping of the instance and database unless otherwise directed by IBM support.	

Chapter 8. Uninstalling IBM Spectrum Protect

You can use the following procedures to uninstall IBM Spectrum Protect. Before you remove IBM Spectrum Protect, ensure that you do not lose your backup and archive data.

Before you begin

Complete the following steps before you uninstall IBM Spectrum Protect:

- Complete a full database backup.
- Save a copy of the volume history and device configuration files.
- Store the output volumes in a safe location.

Attention: Do not use the Add/Remove Programs tool in the Windows Control Panel to uninstall IBM Spectrum Protect. Use only the uninstallation procedure that is described in this section.

About this task

You can uninstall IBM Spectrum Protect by using any of the following methods: a graphical wizard, the command line in console mode, or silent mode.

"Uninstalling IBM Spectrum Protect by using a graphical wizard"

"Uninstalling IBM Spectrum Protect in console mode" on page 104

"Uninstalling IBM Spectrum Protect in silent mode" on page 104

What to do next

See Chapter 2, "Installing the server components," on page 45 for installation steps to reinstall the IBM Spectrum Protect components.

Uninstalling IBM Spectrum Protect by using a graphical wizard

You can uninstall IBM Spectrum Protect by using the IBM Installation Manager installation wizard.

Procedure

- Start the Installation Manager.
 Open the Installation Manager from the Start menu.
- 2. Click Uninstall.
- 3. Select **IBM Spectrum Protect server**, and click **Next**.
- 4. Click Uninstall.
- 5. Click Finish.

Uninstalling IBM Spectrum Protect in console mode

To uninstall IBM Spectrum Protect by using the command line, you must run the uninstallation program of IBM Installation Manager from the command line with the parameter for console mode.

Procedure

1. In the directory where IBM Installation Manager is installed, go to the following subdirectory:

eclipse\tools

For example:

C:\Program Files\IBM\Installation Manager\eclipse\tools

2. From the tools directory, issue the following command:

imcl.exe -c

- 3. To uninstall, enter 5.
- 4. Choose to uninstall from the IBM Spectrum Protect package group.
- 5. Enter N for Next.
- 6. Choose to uninstall the IBM Spectrum Protect server package.
- 7. Enter N for Next.
- 8. Enter U for Uninstall.
- 9. Enter F for Finish.

Uninstalling IBM Spectrum Protect in silent mode

To uninstall IBM Spectrum Protect in silent mode, you must run the uninstallation program of IBM Installation Manager from the command line with the parameters for silent mode.

Before you begin

You can use a response file to provide data input to silently uninstall the IBM Spectrum Protect server components. IBM Spectrum Protect includes a sample response file, uninstall_response_sample.xml, in the input directory where the installation package is extracted. This file contains default values to help you avoid any unnecessary warnings.

If you want to uninstall all IBM Spectrum Protect components, leave modify="false" set for each component in the response file. If you do not want to uninstall a component, set the value to modify="true".

If you want to customize the response file, you can modify the options that are in the file. For information about response files, see Response files.

Procedure

1. In the directory where IBM Installation Manager is installed, go to the following subdirectory:

eclipse\tools

For example:

C:\Program Files\IBM\Installation Manager\eclipse\tools

2. From the tools directory, issue the following command, where *response_file* represents the response file path, including the file name:

Uninstalling IBM Spectrum Protect

```
imcl.exe -input response file -silent
The following command is an example:
imcl.exe -input C:\tmp\input\uninstall_response.xml -silent
```

Uninstalling and reinstalling IBM Spectrum Protect

If you plan to manually reinstall IBM Spectrum Protect instead of using the wizard, there are a number of steps to take to preserve your server instance names and database directories. During an uninstallation, any server instances previously set up are removed, but the database catalogs for those instances still exist.

About this task

To manually uninstall and reinstall IBM Spectrum Protect, complete the following

- 1. Make a list of your current server instances before proceeding to the uninstallation. Run the following command: db2ilist
- 2. Run the following commands for every server instance:

```
db2 attach to server1
db2 get dbm cfg show detail
db2 detach
```

Keep a record of the database path for each instance.

- 3. Uninstall IBM Spectrum Protect. See Chapter 8, "Uninstalling IBM Spectrum Protect," on page 103.
 - After uninstalling IBM Spectrum Protect, check the Control Panel > Add or **Remove Programs** to verify that IBM Spectrum Protect DB2 is uninstalled.
- 4. When you uninstall any supported version of IBM Spectrum Protect, including a fix pack, an instance file is created. The instance file is created to help reinstall IBM Spectrum Protect. Check this file and use the information when you are prompted for the instance credentials when reinstalling. In silent installation mode, you provide these credentials using the INSTANCE_CRED variable.

You can find the instance file in the following location:

- C:\ProgramData\IBM\Tivoli\TSM\instanceList.obj in the IBM Spectrum Protect server installation directory
- 5. Reinstall IBM Spectrum Protect. See Chapter 2, "Installing the server components," on page 45.
 - If the instanceList.obj file does not exist, you need to recreate your server instances using the following steps:
 - a. Recreate your server instances. See "Creating the server instance" on page 56.
 - Tip: The installation wizard configures the server instances but you must verify that they exist. If they do not exist, you must manually configure them.
 - b. Catalog the database. Log in to each server instance as the instance user, one at a time, and issue the following commands:

Uninstalling IBM Spectrum Protect

```
set db2instance=server1
db2 catalog database tsmdb1
db2 attach to server1
db2 update dbm cfg using dftdbpath instance_drive
db2 detach
```

c. Verify that IBM Spectrum Protect recognizes the server instance by listing your directories. Your home directory appears if you did not change it. Your instance directory does appear if you used the configuration wizard. Issue this command:

db2 list database directory

If you see TSMDB1 listed, you can start the server.

Uninstalling IBM Installation Manager

You can uninstall IBM Installation Manager if you no longer have any products that were installed by IBM Installation Manager.

Before you begin

Before you uninstall IBM Installation Manager, you must ensure that all packages that were installed by IBM Installation Manager are uninstalled. Close IBM Installation Manager before you start the uninstall process.

To view installed packages, click **Start > All Programs > IBM Installation Manager > View Installed Packages**.

Procedure

To uninstall IBM Installation Manager, complete the following steps:

- 1. From the Start menu, click Control Panel > Programs and Features.
- 2. Select IBM Installation Manager and click Uninstall.

Part 2. Installing and upgrading the Operations Center

The IBM Spectrum Protect Operations Center is the web-based interface for managing your storage environment.

Before you begin

Before you install and configure the Operations Center, review the following information:

- "System requirements for the Operations Center" on page 109
 - "Operations Center computer requirements" on page 110
 - "Hub and spoke server requirements" on page 110
 - "Operating system requirements" on page 113
 - "Web browser requirements" on page 114
 - "Language requirements" on page 114
 - "Requirements and limitations for IBM Spectrum Protect client management services" on page 115
- "Administrator IDs that the Operations Center requires" on page 116
- "IBM Installation Manager" on page 117
- "Installation checklist" on page 118
- "Obtaining the Operations Center installation package" on page 121

About this task

Table 15 lists the methods for installing or uninstalling the Operations Center and indicates where to find the associated instructions.

For information about upgrading the Operations Center, see Chapter 11, "Upgrading the Operations Center," on page 125.

Table 15. Methods for installing or uninstalling the Operations Center

Method	Instructions
Graphical wizard	"Installing the Operations Center by using a graphical wizard" on page 121
	"Uninstalling the Operations Center by using a graphical wizard" on page 159
Console mode	"Installing the Operations Center in console mode" on page 122
	"Uninstalling the Operations Center in console mode" on page 159
Silent mode	 "Installing the Operations Center in silent mode" on page 122 "Uninstalling the Operations Center in silent mode" on page 160

Chapter 9. Planning to install the Operations Center

Before you install the Operations Center, you must understand the system requirements, the administrator IDs that the Operations Center requires, and the information that you must provide to the installation program.

About this task

From the Operations Center, you can manage the following primary aspects of the storage environment:

- IBM Spectrum Protect servers and clients
- · Services such as backup and restore, archive and retrieve, and migrate and recall
- Storage pools and storage devices

The Operations Center includes the following features:

User interface for multiple servers

You can use the Operations Center to manage one or more IBM Spectrum Protect servers.

In an environment with multiple servers, you can designate one server as a *hub server* and the others as *spoke servers*. The hub server can receive alerts and status information from the spoke servers and present the information in a consolidated view in the Operations Center.

Alert monitoring

An *alert* is a notification of a relevant problem on the server and is triggered by a server message. You can define which server messages trigger alerts, and only those messages are reported as alerts in the Operations Center or in an email.

This alert monitoring can help you identify and track relevant problems on the server.

Convenient command-line interface

The Operations Center includes a command-line interface for advanced features and configuration.

System requirements for the Operations Center

Before you install the Operations Center, ensure that your system meets the minimum requirements.

Use the Operations Center System Requirements Calculator to estimate the system requirements for running the Operations Center and the hub and spoke servers that are monitored by the Operations Center.

Requirements that are verified during the installation

Table 16 on page 110 lists the prerequisite requirements that are verified during the installation and indicates where to find more information about these requirements.

Table 16. Requirements that are verified during the installation

Requirement	Details
Minimum memory requirement	"Operations Center computer requirements"
Operating system requirement	"Operating system requirements" on page 113
Host name for the computer where the Operations Center will be installed	"Installation checklist" on page 118
Requirements for the Operations Center installation directory	"Installation checklist" on page 118

Operations Center computer requirements

You can install the Operations Center on a computer that is also running IBM Spectrum Protect server or on a different computer. If you install the Operations Center on the same computer as a server, that computer must meet the system requirements for both the Operations Center and the server.

Resource requirements

The following resources are required to run the Operations Center:

- One processor core
- 4 GB of memory
- 1 GB of disk space

The hub and spoke servers that are monitored by the Operations Center require additional resources, as described in "Hub and spoke server requirements."

Hub and spoke server requirements

When you open the Operations Center for the first time, you must associate the Operations Center with one IBM Spectrum Protect server that is designated as the *hub server*. In a multiple-server environment, you can connect the other servers, called *spoke servers*, to the hub server.

The spoke servers send alerts and status information to the hub server. The Operations Center shows you a consolidated view of alerts and status information for the hub server and any spoke servers.

If only one server is monitored by the Operations Center, that server is still called a hub server, even though no spoke servers are connected to it.

Table 17 indicates the version of IBM Spectrum Protect server that must be installed on the hub server and on each spoke server that is managed by the Operations Center.

Table 17. IBM Spectrum Protect server version requirements for hub and spoke servers

Operations Center	Version on the hub server	Version on each spoke server	
V8.1.2	V8.1.2	V6.3.4 or later	
		Restriction: Some Operations Center functions are not available for servers that use a version earlier than V8.1.2.	

Number of spoke servers that a hub server can support

The number of spoke servers that a hub server can support depends on the configuration and on the version of IBM Spectrum Protect on each spoke server. However, a general guideline is that a hub server can support 10 - 20 V6.3.4 spoke servers but can support more V7.1 or later spoke servers.

Tips for designing the hub and spoke server configuration

In designing the hub and spoke configuration, especially consider the resource requirements for status monitoring. Also, consider how you want to group hub and spoke servers and whether you want to use multiple hub servers.

Use the Operations Center System Requirements Calculator to estimate the system requirements for running the Operations Center and the hub and spoke servers that are monitored by the Operations Center.

Primary factors that affect performance

The following factors have the most significant impact on the performance of the Operations Center:

- The processor and memory on the computer where the Operations Center is installed
- The system resources of the hub and spoke servers, including the disk system that is in use for the hub server database
- The number of client nodes and virtual machine file spaces that are managed by the hub and spoke servers
- The frequency at which data is refreshed in the Operations Center

How to group hub and spoke servers

Consider grouping hub and spoke servers by geographic location. For example, managing the servers within the same data center can help prevent issues that are caused by firewalls or by inadequate network bandwidth between different locations. If necessary, you can further divide servers according to one or more of the following characteristics:

- The administrator who manages the servers
- The organizational entity that funds the servers
- Server operating system
- The language in which the servers run

Tip: If the hub and spoke servers are not running in the same language, you might see corrupted text in the Operations Center.

How to group hub and spoke servers in an enterprise configuration

In an enterprise configuration, a network of IBM Spectrum Protect servers are managed as a group. Changes that are made on the *configuration manager* can be distributed automatically to one or more *managed servers* in the network.

The Operations Center normally registers and maintains a dedicated administrator ID on the hub and spoke servers. This *monitoring administrator* must always have the same password on all the servers.

If you use an enterprise configuration, you can improve the process by which the administrator credentials are synchronized on spoke servers. To improve the performance and efficiency of maintaining the monitoring administrator ID, complete the following steps:

- 1. Designate the configuration manager server as the Operations Center hub server. During the hub server configuration, a monitoring administrator ID named IBM-OC-hub_server_name is registered.
- 2. On the hub server, add the monitoring administrator ID to a new or existing enterprise configuration profile. Issue the NOTIFY SUBSCRIBERS command to distribute the profile to the managed servers.
- 3. Add one or more of the managed servers as Operations Center spoke servers.

The Operations Center detects this configuration and allows the configuration manager to distribute and update the monitoring administrator ID on the spoke servers.

When to use multiple hub servers

If you have more than 10 - 20 V6.3.4 spoke servers, or if resource limitations require the environment to be partitioned, you can configure multiple hub servers, and connect a subset of the spoke servers to each hub server.

Restrictions:

- A single server cannot be both a hub server and a spoke server.
- Each spoke server can be assigned to only one hub server.
- Each hub server requires a separate instance of the Operations Center, each of which has a separate web address.

Tips for choosing a hub server

For the hub server, you must choose a server that has adequate resources and is located for minimal roundtrip network latency.

Attention: Do not use the same server as the hub server for multiple Operations Centers.

Use the following guidelines in deciding which server to designate as the hub

Choose a lightly loaded server

Consider a server that has a light load for operations such as client backup and archive. A lightly loaded server is also a good choice as the host system for the Operations Center.

Ensure that the server has the resources to handle both its typical server workload and the estimated workload for acting as the hub server.

Locate the server for minimal roundtrip network latency

Locate the hub server so that the network connection between the hub server and the spoke servers has a roundtrip latency that is no greater than 5 ms. This latency can typically be achieved when the servers are on the same local area network (LAN).

Networks that are poorly tuned, are heavily used by other applications, or have roundtrip latency much higher than 5 ms can degrade communications between the hub and spoke servers. For example, roundtrip latencies of 50 ms or higher can result in communication timeouts that cause spoke servers to disconnect or reconnect to the

Operations Center. Such high latencies might be experienced in long-distance, wide area network (WAN) communications.

If spoke servers are a long distance from the hub server and experience frequent disconnects in the Operations Center, you can increase the value of the **ADMINCOMMTIMEOUT** option on each server to reduce the problem.

Verify that the hub server meets the resource requirements for status monitoring Status monitoring requires extra resources on each server on which it is enabled. The resources that are required depend primarily on the number of clients that are managed by the hub and spoke servers. Fewer resources are used on a hub server with a V7.1 or later spoke server than on a hub server with a V6.3.4 spoke server.

Verify that the hub server meets the resource requirements for processor usage, database space, archive log space, and I/O operations per second (IOPS) capacity.

A hub server with high IOPS capacity can handle a larger amount of incoming status data from spoke servers. Use of the following storage devices for the hub server database can help meet this capacity:

- An enterprise-level solid-state drive (SSD)
- An external SAN disk storage device with multiple volumes or multiple spindles under each volume

In an environment with fewer than 1000 clients, consider establishing a baseline capacity of 1000 IOPS for the hub server database if the hub server manages any spoke servers.

Determine whether your environment requires multiple hub servers

If more than 10,000 - 20,000 client nodes and virtual machine file spaces are managed by one set of hub and spoke servers, the resource requirements might exceed what the hub server has available, especially if the spoke servers are V6.3.4 servers. Consider designating a second server as a hub server and moving spoke servers to the new hub server to balance the load.

Operating system requirements

The Operations Center is available for AIX, Linux, and Windows systems.

You can run the Operations Center on the following systems:

• Windows systems:

١

- Microsoft Windows Server 2012: Standard, Enterprise, or Datacenter Edition (64-bit)
- Microsoft Windows Server 2012 R2 (64-bit)
- Microsoft Windows Server 2016

For the most up-to-date requirements information, see Software and Hardware Requirements.

Web browser requirements

The Operations Center can run in Apple, Google, Microsoft, and Mozilla web browsers.

For optimal viewing of the Operations Center in the web browser, ensure that the screen resolution for the system is set to a minimum of 1024 X 768 pixels.

For optimal performance, use a web browser that has good JavaScript performance, and enable browser caching.

The Operations Center can run in the following web browsers:

· Apple Safari on the iPad

Restriction: If Apple Safari is running on iOS 8.x or iOS 9.x, you cannot use a self-signed certificate for secure communication with the Operations Center without extra configuration of the certificate. Use a certificate authority (CA) certificate, or configure the self-signed certificate as needed. For instructions, see Technote http://www.ibm.com/support/docview.wss?uid=swg21963153.

- Google Chrome 40 or later
- Microsoft Internet Explorer 11 or later
- Mozilla Firefox ESR 31 or later

To run the Operations Center in compliance with the National Institute of Standards and Technology (NIST) Special Publications (SP) 800-131A recommendation, communication between the Operations Center and the web browser must be secured by using the Transport Layer Security (TLS) 1.2 protocol. During installation, you specify whether SP 800-131A compliance is required and the level of compliance. If strict SP 800-131A compliance is specified during installation, the web browser must support TLS 1.2, and TLS 1.2 must be enabled.

The web browser displays an SSL error if strict SP 800-131A compliance is specified during installation, and the web browser does not meet the preceding requirements.

Language requirements

By default, the Operations Center uses the language that the web browser uses. However, the installation process uses the language that the operating system uses. Verify that the web browser and the operating system are set to the language that you require.

Table 18.	Operations	Center	language	values that	at vou	can use	on Window	s systems

Language	Language option value
Chinese, Simplified	chs
Chinese, Traditional	cht
English	ameng
French	fra
German	deu
Italian	ita
Japanese (Shift-JIS)	jpn
Korean	kor
Portuguese, Brazilian	ptb

Table 18. Operations Center language values that you can use on Windows systems (continued)

Language	Language option value
Russian	rus
Spanish	esp

Requirements and limitations for IBM Spectrum Protect client management services

IBM Spectrum Protect client management services is a component that you install on backup-archive clients to collect diagnostic information such as client log files. Before you install the client management service on your system, you must understand the requirements and limitations.

In the documentation for the client management service, client system is the system where the backup-archive client is installed.

Diagnostic information can be collected only from Linux and Windows clients, but administrators can view the diagnostic information in the Operations Center on AIX, Linux, or Windows operating systems.

Requirements for the client management service

Verify the following requirements before you install the client management service:

- To remotely access the client, the Operations Center administrator must have system authority or one of the following client authority levels:
 - Policy authority
 - Client owner authority
 - Client node access authority
- Ensure that the client system meets the following requirements:
 - The client management service can be installed only on client systems that run on Linux or Windows operating systems:
 - Linux x86 64-bit operating systems that are supported for the backup-archive client.
 - Windows 32-bit and 64-bit operating systems that are supported for the backup-archive client.
 - Transport Layer Security (TLS) 1.2 must be installed for transmission of data between the client management service and Operations Center. Basic authentication is provided and data and authentication information are encrypted through the SSL channel. TLS 1.2 is automatically installed along with the necessary SSL certificates when you install the client management service.
- · On Linux client systems, you must have root user authority to install the client management service.
- For client systems that can have multiple client nodes, such as Linux client systems, ensure that each node name is unique on the client system.

Tip: After you install the client management service, you do not have to install it again because the service can discover multiple client options files.

Limitations of the client management service

The client management service provides basic services for collecting diagnostic information from backup-archive clients. The following limitations exist for the client management service:

- You can install the client management service only on systems with backup-archive clients, including backup-archive clients that are installed on data mover nodes for IBM Spectrum Protect for Virtual Environments: Data Protection for VMware.
- You cannot install the client management service on other IBM Spectrum Protect client components or products that do not have backup-archive clients.
- If the backup-archive clients are protected by a firewall, ensure that the Operations Center can connect to the backup-archive clients through the firewall by using the configured port for the client management service. The default port is 9028, but it can be changed.
- The client management service scans all client log files to locate entries for the previous 72-hour period.
- The Diagnosis page in the Operations Center provides basic troubleshooting information for backup-archive clients. However, for some backup issues, you might have to access the client system and obtain further diagnostic information.
- If the combined size of the client error log files and schedule log files on a client system is more than 500 MB, delays can occur in sending log records to the Operations Center. You can control the size of the log files by enabling log file pruning or wrapping by specifying the **errorlogretention** or **errorlogmax** client option.
- If you use the same client node name to connect to multiple IBM Spectrum
 Protect servers that are installed on the same server, you can view log files for
 only one of the client nodes.

For updates about the client management service, including requirements, limitations, and documentation updates, see technote 1963610.

Related tasks:

"Collecting diagnostic information with IBM Spectrum Protect client management services" on page 139

Administrator IDs that the Operations Center requires

An administrator must have a valid ID and password on the hub server to log in to the Operations Center. An administrator ID is also assigned to the Operations Center so that the Operations Center can monitor servers.

The Operations Center requires the following IBM Spectrum Protect administrator IDs:

Administrator IDs that are registered on the hub server

Any administrator ID that is registered on the hub server can be used to log in to the Operations Center. The authority level of the ID determines which tasks can be completed. You can create new administrator IDs by using the **REGISTER ADMIN** command.

Restriction: To use an administrator ID in a multiple-server configuration, the ID must be registered on the hub and spoke servers with the same password and authority level.

To manage authentication for these servers, consider using one of the following methods:

- A Lightweight Directory Access Protocol (LDAP) server
- The enterprise configuration functions to automatically distribute changes to the administrator definitions.

Monitoring administrator ID

When you initially configure the hub server, an administrator ID named IBM-OC-server_name is registered with system authority on the hub server and is associated with the initial password that you specify. This ID, which is sometimes called the *monitoring administrator*, is intended for use only by the Operations Center.

Do not delete, lock, or modify this ID. The same administrator ID with the same password is registered on the spoke servers that you add. The password is automatically changed on the hub and spoke servers every 90 days. You do not need to use or manage this password.

Restriction: The Operations Center maintains the monitoring administrator ID and password on spoke servers unless you use an enterprise configuration to manage these credentials. For more information about using an enterprise configuration to manage the credentials, see "Tips for designing the hub and spoke server configuration" on page 111.

IBM Installation Manager

The Operations Center uses IBM Installation Manager, which is an installation program that can use remote or local software repositories to install or update many IBM products.

If the required version of IBM Installation Manager is not already installed, it is automatically installed or upgraded when you install the Operations Center. It must remain installed on the system so that the Operations Center can be updated or uninstalled later as needed.

The following list contains explanations of some terms that are used in IBM Installation Manager:

Offering

An installable unit of a software product.

The Operations Center offering contains all of the media that IBM Installation Manager requires to install the Operations Center.

Package

The group of software components that are required to install an offering.

The Operations Center package contains the following components:

- IBM Installation Manager installation program
- Operations Center offering

Package group

A set of packages that share a common parent directory.

Repository

A remote or local storage area for data and other application resources.

The Operations Center package is stored in a repository on IBM Fix Central.

Shared resources directory

A directory that contains software files or plug-ins that are shared by packages.

IBM Installation Manager stores installation-related files in the shared resources directory, including files that are used for rolling back to a previous version of the Operations Center.

Installation checklist

Before you install the Operations Center, you must verify certain information, such as the installation credentials, and you must determine the input to provide to IBM Installation Manager for the installation.

The following checklist highlights the information that you must verify or determine before you install the Operations Center, and Table 19 describes the details of this information:

Verify the host name for the computer where the Operations Center is to be installed.
 Verify the installation credentials.
 Determine the Operations Center installation directory, if you do not want to accept the default path.
 Determine the IBM Installation Manager installation directory, if you do not want to accept the default path.
 Determine the port number to be used by the Operations Center web server, if you do not want to accept the default port number.
 Determine the password for secure communications.
 Determine whether secure communications must comply with the National Institute of Standards and Technology (NIST) Special Publications (SP) 800-131A recommendation.

Table 19. Information to verify or determine before you install the Operations Center

Information	Details
Host name for the computer where the Operations Center is to be installed.	The host name must meet the following criteria: • It must not contain double-byte character set (DBCS) characters or the underscore character ().
	 Although the host name can contain the hyphen character (-), it cannot have a hyphen as the last character in the name.
Installation credentials	To install the Operations Center, you must use the following user account:
	Administrator

Table 19. Information to verify or determine before you install the Operations Center (continued)

Information	Details
Operations Center installation directory	The Operations Center is installed in the ui subdirectory of the installation directory.
uncciory	The following path is the default path for the Operations Center installation directory:
	• c:\Program Files\Tivoli\TSM
	For example, if you use this default path, the Operations Center is installed in the following directory:
	c:\Program Files\Tivoli\TSM\ui
	The installation directory path must meet the following criteria:
	The path must contain no more than 128 characters.
	The path must include only ASCII characters.
	The path cannot include non-displayable control characters.
	The path cannot include any of the following characters:
	% < > ' " \$ & ; *
IBM Installation Manager installation directory	The following path is the default path for the IBM Installation Manager installation directory:
instantion directory	• C:\Program Files\IBM\Installation Manager
Port number that is used by	The value for the secure (https) port number must meet the following criteria:
the Operations Center web	• The number must be an integer in the range 1024 - 65535.
server.	The number cannot be in use or allocated to other programs.
	If you do not specify a port number, the default value is 11090.
	Tip: If you later do not remember the port number that you specified, refer to the following file, where <code>installation_dir</code> represents the directory where the Operations Center is installed:
	• installation_dir\ui\Liberty\usr\servers\guiServer\bootstrap.properties
	The bootstrap.properties file contains the IBM Spectrum Protect server connection information.

Table 19. Information to verify or determine before you install the Operations Center (continued)

Information	Details
Password for secure communications	The Operations Center uses Hypertext Transfer Protocol Secure (HTTPS) to communicate with web browsers.
	The Operations Center requires secure communication between the server and the Operations Center. To secure communication, you must add the Transport Layer Security (TLS) certificate of the hub server to the truststore file of the Operations Center.
	The truststore file of the Operations Center contains the certificate that the Operations Center uses for HTTPS communication with web browsers. During installation of the Operations Center, you create a password for the truststore file. When you set up secure communication between the Operations Center and the hub server, you must use the same password to add the certificate of the hub server to the truststore file.
	The password for the truststore file must meet the following criteria:
	• The password must contain a minimum of 6 characters and a maximum of 64 characters.
	The password must contain at least the following characters:
	− One uppercase letter (A − Z)
	− One lowercase letter (a − z)
	- One digit (0 - 9)
	- Two of the non-alphanumeric characters that are listed in the following series:
	~!@#\$%^&*+=`
	() { } []:; < > , . ? /

Related tasks:

"Configuring for secure communication" on page 133

[&]quot;Resetting the password for the Operations Center truststore file" on page 136

Chapter 10. Installing the Operations Center

You can install the Operations Center by using any of the following methods: a graphical wizard, the command line in console mode, or silent mode.

Before you begin

You cannot configure the Operations Center until you install, configure, and start the IBM Spectrum Protect server. Therefore, before you install the Operations Center, install the appropriate server package, according to the server version requirements in "Hub and spoke server requirements" on page 110.

You can install the Operations Center on a computer with the IBM Spectrum Protect server or on a separate computer.

Obtaining the Operations Center installation package

You can obtain the installation package from an IBM download site such as IBM Passport Advantage or IBM Fix Central.

About this task

After you obtain the package from an IBM download site, you must extract the installation files.

Procedure

Complete the following steps to extract the Operations Center installation files. In the following steps, replace *version_number* with the version of Operations Center that you are installing.

On Windows systems:

- 1. Download the following package file to the directory of your choice: version_number.000-IBM-SPOC-WindowsX64.exe
- 2. In Windows Explorer, double-click the file name to extract the installation files. The self-extracting package file is extracted to the directory.

Installing the Operations Center by using a graphical wizard

You can install or update the Operations Center by using the graphical wizard of IBM Installation Manager.

Procedure

- 1. From the directory where the Operations Center installation package file is extracted, issue the following command:
 - install.bat
- 2. Follow the wizard instructions to install the IBM Installation Manager and Operations Center packages.

What to do next

See "Configuring the Operations Center" on page 127.

Installing the Operations Center in console mode

You can install or update the Operations Center by using the command line in console mode.

Procedure

1. From the directory where the installation package file is extracted, run the following program:

```
install.bat -c
```

2. Follow the console instructions to install the Installation Manager and Operations Center packages.

What to do next

See "Configuring the Operations Center" on page 127.

Installing the Operations Center in silent mode

You can install or upgrade the Operations Center in silent mode. In silent mode, the installation does not send messages to a console but instead stores messages and errors in log files.

Before you begin

To provide data input when you use the silent installation method, you can use a response file. The following sample response files are provided in the input directory where the installation package is extracted:

install response sample.xml

Use this file to install the Operations Center.

update_response_sample.xml

Use this file to upgrade the Operations Center.

These files contain default values that can help you avoid any unnecessary warnings. To use these files, follow the instructions that are provided in the files.

If you want to customize a response file, you can modify the options that are in the file. For information about response files, see Response files.

Procedure

1. Create a response file. You can modify the sample response file or create your own file.

Tip: To generate a response file as part of a console-mode installation, complete the selection of the console-mode installation options. Then, in the Summary panel, enter G to generate the response file according to the previously selected options.

2. Create a password for the Operations Center truststore in the response file. If you are using the install_response_sample.xml file, add the password in the following line of the file, where mypassword represents the password:

```
<variable name='ssl.password' value='mypassword' />
```

For more information about this password, see "Installation checklist" on page 118.

Installing the Operations Center

- Tip: To upgrade the Operations Center, the truststore password is not required if you are using the update_response_sample.xml file.
- 3. Start the silent installation by issuing the following command from the directory where the installation package is extracted. The value response_file represents the response file path and file name:

install.bat -s -input response_file -acceptLicense

What to do next

See "Configuring the Operations Center" on page 127.

Chapter 11. Upgrading the Operations Center

You can upgrade the Operations Center by using any of the following methods: a graphical wizard, the command line in console mode, or silent mode.

Before you begin

Before you upgrade the Operations Center, review the system requirements and the installation checklist. The new version of the Operations Center might have more or different requirements and considerations than the version you are currently using.

About this task

The instructions for upgrading the Operations Center are the same as the instructions for installing the Operations Center, with the following exceptions:

 You use the Update function of IBM Installation Manager rather than the Install function.

Tip: In IBM Installation Manager, the term *update* means to discover and install updates and fixes to installed software packages. In this context, *update* and *upgrade* are synonymous.

• If you are upgrading the Operations Center in silent mode, you can skip the step of creating a password for the truststore file.

Upgrading the Operations Center

Chapter 12. Getting started with the Operations Center

Before you can use the Operations Center to manage your storage environment, you must configure it.

About this task

After you install the Operations Center, complete the following basic configuration steps:

- 1. Designate the hub server.
- 2. Add any spoke servers.
- 3. Optionally, configure email alerts on the hub and spoke servers.

Figure 1 illustrates an Operations Center configuration.

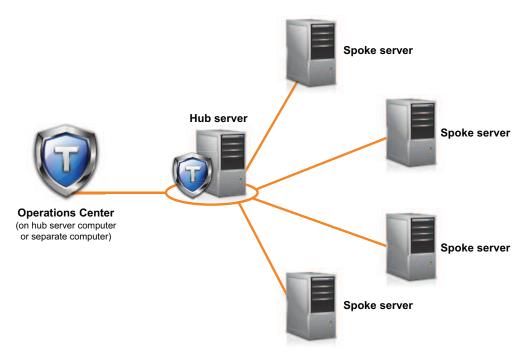


Figure 1. Example of an Operations Center configuration with the hub and spoke servers

Configuring the Operations Center

When you open the Operations Center for the first time, you must configure it to manage your storage environment. You must associate the Operations Center with the IBM Spectrum Protect server that is designated as the hub server. You can then connect additional IBM Spectrum Protect servers as spoke servers.

1

When you connect to the Operations Center for the first time, you must designate which IBM Spectrum Protect server is the hub server.

Before you begin

The Operations Center requires secure communication between the hub server and the Operations Center. To secure communication, you must add the Transport Layer Security (TLS) certificate of the hub server to the truststore file of the Operations Center. For more information, see "Securing communication between the Operations Center and the hub server" on page 133.

Procedure

In a web browser, enter the following address, where *hostname* represents the name of the computer where the Operations Center is installed, and *secure_port* represents the port number that the Operations Center uses for HTTPS communication on that computer:

https://hostname:secure port/oc

Tips:

- The URL is case-sensitive. For example, ensure that you type "oc" in lowercase as indicated.
- For more information about the port number, see the Installation checklist.
- If you are connecting to the Operations Center for the first time, you must provide the following information:
 - Connection information for the server that you want to designate as a hub server
 - Login credentials for an administrator ID that is defined for that server
- If the event-record retention period of the server is less than 14 days, the period is automatically reset to 14 days if you configure the server as a hub server.

What to do next

If you have multiple IBM Spectrum Protect servers in your environment, add the other servers as spoke servers to the hub server.

Attention: Do not change the name of a server after it is configured as a hub or spoke server.

Related concepts:

"Hub and spoke server requirements" on page 110

"Administrator IDs that the Operations Center requires" on page 116

Adding a spoke server

١

| | After you configure the hub server for the Operations Center, you can add one or more spoke servers to the hub server.

Before you begin

Communication between the spoke server and the hub server must be secured by using the Transport Layer Security (TLS) protocol. To secure communication, add the certificate of the spoke server to the truststore file of the hub server.

Procedure

- 1. In the Operations Center menu bar, click **Servers**. The Servers page opens. In the table on the Servers page, a server might have a status of "Unmonitored." This status means that although an administrator defined this server to the hub server by using the **DEFINE SERVER** command, the server is not yet configured as a spoke server.
- 2. Complete one of the following steps:
 - Click the server to highlight it, and in the table menu bar, click **Monitor Spoke**.
 - If the server that you want to add is not shown in the table, and secure SSL/TLS communication is not required, click + Spoke in the table menu bar.
- 3. Provide the necessary information, and complete the steps in the spoke configuration wizard.

Tip: If the event-record retention period of the server is less than 14 days, the period is automatically reset to 14 days if you configure the server as a spoke server.

Sending email alerts to administrators

An alert is a notification of a relevant problem on the IBM Spectrum Protect server and is triggered by a server message. Alerts can be shown in the Operations Center and can be sent from the server to administrators by email.

Before you begin

Before you configure email notification for administrators about alerts, ensure that the following requirements are met:

• An SMTP server is required to send and receive alerts by email, and the server that sends the alerts by email must have access to the SMTP server.

Tip: If the Operations Center is installed on a separate computer, that computer does not need access to the SMTP server.

• An administrator must have system privilege to configure email notification.

About this task

An email notification is sent only for the first occurrence of an alert. Also, if an alert is generated before you configure email notification, no email notification is sent for that alert.

You can configure email notification in the following ways:

· Send notification for individual alerts

· Send alert summaries

An alert summary contains information about current alerts. The summary includes the total number of alerts, the total number of active and inactive alerts, the oldest alert, the newest alert, and the most frequently occurring alert.

You can specify a maximum of three administrators to receive alert summaries by email. Alert summaries are sent approximately every hour.

Procedure

To configure email notification for administrators about alerts, complete the following steps on each hub and spoke server from which you want to receive email alerts:

- 1. To verify that alert monitoring is turned on, issue the following command: QUERY MONITORSETTINGS
- 2. If the command output indicates that alert monitoring is turned off, issue the following command. Otherwise, proceed to the next step.
 - SET ALERTMONITOR ON
- 3. To enable the sending of email notification, issue the following command: SET ALERTEMAIL ON
- 4. To define the SMTP server that is used to send email notification, issue the following command:
 - SET ALERTEMAILSMTPHOST host name
- 5. To specify the port number for the SMTP server, issue the following command: SET ALERTEMAILSMTPPORT $port_number$
 - The default port number is 25.
- 6. To specify the email address of the sender of the alerts, issue the following command:
 - SET ALERTEMAILFROMADDR email address
- 7. For each administrator ID that must receive email notification, issue one of the following commands to activate email notification and to specify the email address:

```
REGISTER ADMIN admin\_name ALERT=YES EMAILADDRESS=email\_address UPDATE ADMIN admin\_name ALERT=YES EMAILADDRESS=email\_address
```

- 8. Choose either, or both, of the following options, and specify the administrator IDs to receive email notification:
 - · Send notification for individual alerts

To specify or update the administrator IDs to receive email notification for an individual alert, issue one of the following commands:

```
DEFINE ALERTTRIGGER message\_number ADmin=admin\_name1, admin\_name2 UPDATE ALERTTRIGGER message\_number ADDadmin=admin\_name3 DELadmin=admin\_name3
```

Tip: From the Configure Alerts page of the Operations Center, you can select the administrators who will receive email notification.

· Send alert summaries

To specify or update the administrator IDs to receive alert summaries by email, issue the following command:

SET ALERTSUMMARYTOADMINS admin_name1,admin_name2,admin_name3

If you want to receive alert summaries but do not want to receive notification about individual alerts, complete the following steps:

- a. Suspend notification about individual alerts, as described in "Suspending email alerts temporarily."
- b. Ensure that the respective administrator ID is listed in the following command:

SET ALERTSUMMARYTOADMINS admin name1, admin name2, admin name3

Sending email alerts to multiple administrators

The following example illustrates the commands that cause any alerts for message ANR1075E to be sent in an email to the administrators myadmin, djadmin, and csadmin:

```
SET ALERTMONITOR ON
SET ALERTEMAIL ON
SET ALERTEMAILSMTPHOST mymailserver.domain.com
SET ALERTEMAILSMTPHOST 450
SET ALERTEMAILFROMADDR srvadmin@mydomain.com
UPDATE ADMIN myadmin ALERT=YES EMAILADDRESS=myaddr@anycompany.com
UPDATE ADMIN djadmin ALERT=YES EMAILADDRESS=djaddr@anycompany.com
UPDATE ADMIN csadmin ALERT=YES EMAILADDRESS=csaddr@anycompany.com
DEFINE ALERTTRIGGER anr0175e ADMIN=myadmin,djadmin,csadmin
```

Suspending email alerts temporarily

In certain situations, you might want to suspend email alerts temporarily. For example, you might want to receive alert summaries but suspend notification about individual alerts, or you might want to suspend email alerts when an administrator is on vacation.

Before you begin

Configure email notification for administrators, as described in "Sending email alerts to administrators" on page 129.

Procedure

Suspend email notification for individual alerts or for alert summaries.

Suspend notification about individual alerts
 Use either of the following methods:

UPDATE ADMIN command

To turn off email notification for the administrator, issue the following command:

UPDATE ADMIN admin_name ALERT=NO

To turn on email notification again later, issue the following command: UPDATE ADMIN admin name ALERT=YES

UPDATE ALERTTRIGGER command

To prevent a specific alert from being sent to an administrator, issue the following command:

UPDATE ALERTTRIGGER message number DELADMIN=admin name

To start sending that alert to the administrator again, issue the following command:

UPDATE ALERTTRIGGER message number ADDADMIN-admin name

Suspend notification about alert summaries

To prevent alert summaries from being sent to an administrator, remove the administrator ID from the list in the following command:

SET ALERTSUMMARYTOADMINS admin name1, admin name2, admin name3

If an administrator ID is listed in the preceding command, the administrator receives alert summaries by email, even if notification about individual alerts is suspended for the respective administrator ID.

Adding customized text to the login screen

You can add customized text, such as your organization's Terms of Use of the software, to the login screen of the Operations Center so that users of the Operations Center see the text before they enter their user name and password.

Procedure

To add customized text to the login screen, complete the following steps:

- 1. On the computer where the Operations Center is installed, go to the following directory, where installation_dir represents the directory in which the Operations Center is installed:
 - installation dir\ui\Liberty\usr\servers\guiServer
- 2. In the directory, create a file that is named loginText.html that contains the text that you want to add to the login screen. Any special, non-ASCII text must be UTF-8 encoded.

Tip: You can format the text by adding HTML tags.

3. Review the added text on the login screen of the Operations Center. To open the Operations Center, enter the following address in a web browser, where hostname represents the name of the computer where the Operations Center is installed, and *secure_port* represents the port number that the Operations Center uses for HTTPS communication on that computer:

https://hostname:secure_port/oc

Enabling REST services

Applications that use Representational State Transfer (REST) services can query and manage the storage environment by connecting to the Operations Center.

About this task

Enable this feature to allow REST services to interact with hub and spoke servers by sending calls to the following address:

https://oc host name:port/oc/api

where oc host name is the network name or IP address of the Operations Center host system and port is the Operations Center port number. The default port number is 11090.

For information about the REST services that are available for the Operations Center, see Technote http://www.ibm.com/support/ docview.wss?uid=swg21973011, or issue the following REST call:

https://oc host name:port/oc/api/help

Procedure

- 1. On the Operations Center menu bar, hover over the settings icon settings and click Settings.
- 2. On the General page, select the **Enable administrative REST API** check box.
- 3. Click Save.

Configuring for secure communication

The Operations Center uses Hypertext Transfer Protocol Secure (HTTPS) to communicate with web browsers. The Transport Layer Security (TLS) protocol secures communications between the Operations Center and the hub server, and between the hub server and associated spoke servers.

About this task

1

TLS 1.2 is required for secure communication between the IBM Spectrum Protect server and the Operations Center, and between the hub server and spoke servers.

Securing communication between the Operations Center and the hub server

To secure communications between the Operations Center and the hub server, you must add the Transport Layer Security (TLS) certificate of the hub server to the truststore file of the Operations Center.

Before you begin

The truststore file of the Operations Center is a container for certificates that the Operations Center can access. The truststore file contains the certificate that the Operations Center uses for HTTPS communication with web browsers.

During the installation of the Operations Center, you create a password for the truststore file. To secure communication between the Operations Center and the hub server, you must use the same password to add the certificate of the hub server to the truststore file. If you do not remember this password, you can reset it. See "Resetting the password for the Operations Center truststore file" on page 136.

Procedure

1. Specify the cert256.arm certificate as the default certificate in the key database file of the hub server.

To specify cert256.arm as the default certificate, complete the following steps:

- a. Issue the following command from the hub server instance directory: gsk8capicmd_64 -cert -setdefault -db cert.kdb -stashed -label "TSM Server SelfSigned SHA Key"
- b. Restart the hub server so that it can receive the changes to the key database file.
- To verify that the cert256.arm certificate is set as the default certificate in the key database file of the hub server, issue the following command: gsk8capicmd_64 -cert -list -db cert.kdb -stashed
- 3. Stop the Operations Center web server.
- 4. Go to the command line of the operating system on which the Operations Center is installed.

5. Add the certificate to the truststore file of the Operations Center by using the iKeycmd command or the iKeyman command. The iKeyman command opens the IBM Key Management graphical user interface, and iKeycmd is a command line interface.

To add the SSL certificate by using the command line interface, issue the **iKeycmd** command to add the cert256.arm certificate as the default certificate in the key database file of the hub server:

```
ikeycmd -cert -add
-db /installation_dir/Liberty/usr/servers/guiServer/gui-truststore.jks
-file /fvt/comfrey/srv/cert256.arm
-label 'label description'
-pw 'password' -type jks -format ascii -trust enable
```

where:

installation dir

The directory in which the Operations Center is installed.

label description

The description that you assign to the label.

password

The password that you created when you installed the Operations Center. To reset the password, uninstall the Operations Center, delete the .jks file, and reinstall the Operations Center.

To add the certificate by using the IBM Key Management window, complete the following steps:

- a. Go to the following directory, where *installation_dir* represents the directory in which the Operations Center is installed:
 - installation dir\ui\jre\bin
- b. Open the IBM Key Management window by issuing the following command:

ikeyman

- c. Click **Key Database File > Open**.
- d. In the Open window, click **Browse**, and go to the following directory, where <code>installation_dir</code> represents the directory in which the Operations Center is installed:
 - installation dir\ui\Liberty\usr\servers\guiServer
- e. In the guiServer directory, select the gui-truststore.jks file.
- f. Click **Open**, and click **OK**.
- g. Enter the password for the truststore file, and click **OK**.
- h. In the **Key database content** area of the IBM Key Management window, click the arrow, and select **Signer Certificates** from the list.
- i. Click Add.
- j. In the Open window, click **Browse**, and go to the hub server instance directory, as shown in the following example:
 - c:\Program Files\Tivoli\TSM\server1

The directory contains the cert256.arm certificate.

If you cannot access the hub server instance directory from the Open window, complete the following steps:

1) Use FTP or another file-transfer method to copy the cert256.arm files from the hub server to the following directory on the computer where the Operations Center is installed:

- installation dir\ui\Liberty\usr\servers\guiServer
- 2) In the Open window, go to the guiServer directory.
- k. Select the cert256.arm certificate as the certificate.

Tip: The certificate that you choose must be set as the default certificate in the key database file of the hub server. For more information, see step 1 on page 133 and 2 on page 133.

- I. Click **Open**, and click **OK**.
- m. Enter a label for the certificate. For example, enter the name of the hub server.
- n. Click **OK**. The SSL certificate of the hub server is added to the truststore file, and the label is displayed in the **Key database content** area of the IBM Key Management window.
- o. Close the IBM Key Management window.
- 6. Start the Operations Center web server.
- 7. When you connect to the Operations Center for the first time, you are prompted to identify the IP address or network name of the hub server, and the port number for communicating with the hub server. If the ADMINONCLIENTPORT server option is enabled for the IBM Spectrum Protect server, enter the port number that is specified by the TCPADMINPORT server option. If the ADMINONCLIENTPORT server option is not enabled, enter the port number that is specified by the TCPPORT server option. If the Operations Center was previously configured, you can review the
 - contents of the serverConnection.properties file to verify the connection information. The serverConnection.properties file is in the following directory on the computer where the Operations Center is installed:
 - installation dir\ui\Liberty\usr\servers\guiServer

What to do next

To set up SSL communication between the hub server and a spoke server, see "Securing communication between the hub server and a spoke server."

Securing communication between the hub server and a spoke server

To secure communications between the hub server and a spoke server by using the Transport Layer Security (TLS) protocol, you must define the certificate of the spoke server to the hub server. You must also configure the Operations Center to monitor the spoke server.

Procedure

- 1. On the spoke server, change to the directory of the spoke server instance.
- 2. Specify the required cert256.arm certificate as the default certificate in the key database file of the spoke server. Issue the following command:
 - gsk8capicmd_64 -cert -setdefault -db cert.kdb -stashed -label "TSM Server SelfSigned SHA Key"
- 3. Verify the certificates in the key database file of the spoke server. Issue the following command:
 - gsk8capicmd 64 -cert -list -db cert.kdb -stashed
- 4. Securely transfer the cert256.arm file of the spoke server to the hub server.
- 5. On the hub server, change to the directory of the hub server instance.

6. Define the spoke server certificate to the hub server. Issue the following command from the hub server instance directory, where *spoke_servername* is the name of the spoke server, and *spoke_cert256.arm* is the file name of the spoke server certificate:

```
gsk8capicmd_64 -cert -add -db cert.kdb -stashed -format ascii -label spoke_servername -file spoke_cert256.arm
```

The spoke server does not require the hub server certificate for hub-to-spoke communication. However, other server configurations that require cross-defined servers do require the spoke server to have the hub server certificate.

- 7. Restart the hub server and the spoke server.
- 8. For the hub server, issue the **DEFINE SERVER** command, according to the following example:

```
DEFINE SERVER spoke_servername HLA=spoke_address
LLA=spoke SSLTCPADMINPort SERVERPA=spoke serverpassword
```

Tip: By default, server communication is encrypted except when the server is sending or receiving object data. Object data is sent and received by using TCP/IP. By choosing not to encrypt the object data, server performance is similar to communication over a TCP/IP session and the session is secure. To encrypt all communication with the specified server, even when the server is sending and receiving object data, specify the SSL=YES parameter on the **DEFINE SERVER** command.

- 9. On the Operations Center menu bar, click **Servers**.
 - In the table on the Servers page, the spoke server that you defined in step 8 typically has a status of "Unmonitored." Depending on the setting for the status refresh interval, you might not see the spoke server immediately.
- 10. Click the spoke server to highlight the item, and in the table menu bar, click **Monitor Spoke**.

Resetting the password for the Operations Center truststore file

To set up secure communication between the Operations Center and the hub server, you must know the password for the truststore file of the Operations Center. You create this password during the installation of the Operations Center. If you do not know the password, you can reset it.

About this task

To reset the password, you must create a new password, delete the truststore file of the Operations Center, and restart the Operations Center web server.

Procedure

- 1. Stop the Operations Center web server.
- 2. Go to the following directory, where *installation_dir* represents the directory in which the Operations Center is installed:

```
installation dir\ui\Liberty\usr\servers\guiServer
```

- 3. Open the bootstrap.properties file, which contains the password for the truststore file. If the password is unencrypted, you can use it to open the truststore file without having to reset it.
 - The following examples indicate the difference between an encrypted and an unencrypted password:

Encrypted password example

Encrypted passwords begin with the text string {xor}.

The following example shows the encrypted password as the value of the **tsm.truststore.pswd** parameter:

tsm.truststore.pswd={xor}MiYPPiwsKDAtOw==

Unencrypted password example

The following example shows the unencrypted password as the value of the **tsm.truststore.pswd** parameter:

tsm.truststore.pswd=J8b%^B

4. Reset the password by replacing the password in the bootstrap.properties file with a new password. You can replace the password with an encrypted or unencrypted password. Remember the unencrypted password for future use.

To create an encrypted password, complete the following steps:

a. Create an unencrypted password.

The password for the truststore file must meet the following criteria:

- The password must contain a minimum of 6 characters and a maximum of 64 characters.
- The password must contain at least the following characters:
 - One uppercase letter (A Z)
 - One lowercase letter (a z)
 - One digit (0 9)
 - Two of the non-alphanumeric characters that are listed in the following series:

```
~!@#$%^&*_-+=`|
(){}[]:;<>,.?/
```

b. From the command line of the operating system, go to the following directory:

```
installation_dir\ui\Liberty\bin
```

c. To encrypt the password, issue the following command, where *myPassword* represents the unencrypted password:

```
securityUtility.bat encode myPassword
```

The following message might be shown:

```
! "java"' is not recognized as an internal or external command, operable program or batch file.
```

If this message is shown, complete the following steps:

- 1) Issue the following command, where *installation_dir* represents the directory where the Operations Center is installed:
 - $\verb|set JAVA_HOME="installation_dir \land installation_dir \land installation_$
- Reissue the following command to encrypt the password: securityUtility.bat encode myPassword
- 5. Close the bootstrap.properties file.
- 6. Go to the following directory:

```
installation dir\ui\Liberty\usr\servers\guiServer
```

- 7. Delete the gui-truststore.jks file, which is the truststore file of the Operations Center.
- 8. Start the Operations Center web server.

Results

A new truststore file is automatically created for the Operations Center, and the TLS certificate of the Operations Center is automatically included in the truststore file.

Starting and stopping the web server

The web server of the Operations Center runs as a service and starts automatically. You might need to stop and start the web server, for example, to make configuration changes.

Procedure

Stop and start the web server.

• From the Services window, stop or start the Operations Center service.

Opening the Operations Center

The Overview page is the default initial view in the Operations Center. However, in your web browser, you can bookmark the page that you want to open when you log in to the Operations Center.

Procedure

 In a web browser, enter the following address, where hostname represents the name of the computer where the Operations Center is installed, and secure_port represents the port number that the Operations Center uses for HTTPS communication on that computer:

https://hostname:secure_port/oc

Tips:

- The URL is case-sensitive. For example, ensure that you type "oc" in lowercase as indicated.
- The default port number for HTTPS communication is 11090, but a different port number can be specified during Operations Center installation.
- 2. Log in, using an administrator ID that is registered on the hub server. In the Overview page, you can view summary information for clients, services, servers, storage pools, and storage devices. You can view more details by clicking items or by using the Operations Center menu bar.

Monitoring from a mobile device: To remotely monitor the storage environment, you can view the Overview page of the Operations Center in the web browser of a mobile device. The Operations Center supports the Apple Safari web browser on the iPad. Other mobile devices can also be used.

Collecting diagnostic information with IBM Spectrum Protect client management services

The client management service collects diagnostic information about backup-archive clients and makes the information available to the Operations Center for basic monitoring capability.

About this task

After you install the client management service, you can view the Diagnosis page in the Operations Center to obtain troubleshooting information for backup-archive clients.

Diagnostic information can be collected only from Linux and Windows clients, but administrators can view the diagnostic information in the Operations Center on AIX, Linux, or Windows operating systems.

You can also install the client management service on data mover nodes for IBM Spectrum Protect for Virtual Environments: Data Protection for VMware to collect diagnostic information about the data movers.

Tip: In the documentation for the client management service, *client system* is the system where the backup-archive client is installed.

Installing the client management service by using a graphical wizard

To collect diagnostic information about backup-archive clients such as client log files, you must install the client management service on the client systems that you manage.

Before you begin

Review "Requirements and limitations for IBM Spectrum Protect client management services" on page 115.

About this task

You must install the client management service on the same computer as the backup-archive client.

Procedure

Ī

 Download the installation package for the client management service from an IBM download site such as IBM Passport Advantage or IBM Fix Central. Look for a file name that is similar to <version>-IBM-SPCMS-<operating system>.bin. The following table shows the names of the installation packages.

Client operating system	Installation package name	
Linux x86 64-bit	8.1.x.000-IBM-SPCMS-Linuxx64.bin	
Windows 32-bit	8.1.x.000-IBM-SPCMS-Windows32.exe	
Windows 64-bit	8.1.x.000-IBM-SPCMS-Windows64.exe	

2. Create a directory on the client system that you want to manage, and copy the installation package there.

- 3. Extract the contents of the installation package file.
 - On Linux client systems, complete the following steps:
 - a. Change the file to an executable file by issuing the following command: chmod +x 8.1.x.000-IBM-SPCMS-Linuxx64.bin
 - b. Issue the following command:./8.1.x.000-IBM-SPCMS-Linuxx64.bin
 - On Windows client systems, double-click the installation package name in Windows Explorer.

Tip: If you previously installed and uninstalled the package, select **All** when prompted to replace the existing installation files.

- 4. Run the installation batch file from the directory where you extracted the installation files and associated files. This is the directory that you created in step 2 on page 139.
 - On Linux client systems, issue the following command: ./install.sh
 - On Windows client systems, double-click install.bat.
- 5. To install the client management service, follow the instructions in the IBM Installation Manager wizard.

If IBM Installation Manager is not already installed on the client system, you must select both IBM Installation Manager and IBM Spectrum Protect Client Management Services.

Tip: You can accept the default locations for the shared resources directory and the installation directory for IBM Installation Manager.

What to do next

Follow the instructions in "Verifying that the client management service is installed correctly" on page 141.

Installing the client management service in silent mode

You can install the client management service in silent mode. When you use silent mode, you provide the installation values in a response file and then run an installation command.

Before you begin

Review "Requirements and limitations for IBM Spectrum Protect client management services" on page 115.

Extract the installation package by following the instructions in "Installing the client management service by using a graphical wizard" on page 139.

About this task

You must install the client management service on the same computer as the backup-archive client.

The input directory, which is in the directory where the installation package is extracted, contains the following sample response file:

install response sample.xml

You can use the sample file with the default values, or you can customize it.

Tip: If you want to customize the sample file, create a copy of the sample file, rename it, and edit the copy.

Procedure

1. Create a response file based on the sample file, or use the sample file, install_response_sample.xml.

In either case, ensure that the response file specifies the port number for the client management service. The default port is 9028. For example:

```
<variable name='port' value='9028'/>
```

2. Run the command to install the client management service and accept the license. From the directory where the installation package file is extracted, issue the following command, where *response_file* represents the response file path, including the file name:

On a Linux client system:

```
./install.sh -s -input response_file -acceptLicense
For example:
./install.sh -s -input /cms_install/input/install_response.xml -acceptLicense
On a Windows client system:
install.bat -s -input response_file -acceptLicense
For example:
install.bat -s -input c:\cms install\input\install response.xml -acceptLicense
```

What to do next

Follow the instructions in "Verifying that the client management service is installed correctly."

Verifying that the client management service is installed correctly

Before you use the client management service to collect diagnostic information about a backup-archive client, you can verify that the client management service is correctly installed and configured.

Procedure

On the client system, at the command line, run the following commands to view the configuration of the client management service:

• On Linux client systems, issue the following command:

```
client\_install\_dir/cms/bin/CmsConfig.sh~list
```

where *client_install_dir* is the directory where the backup-archive client is installed. For example, with the default client installation, issue the following command:

```
/opt/tivoli/tsm/cms/bin/CmsConfig.sh list
```

The output is similar to the following text: Listing CMS configuration

```
server1.example.com:1500 NO_SSL HOSTNAME Capabilities: [LOG_QUERY]
```

```
Opt Path: /opt/tivoli/tsm/client/ba/bin/dsm.sys

Log File: /opt/tivoli/tsm/client/ba/bin/dsmerror.log
    en_US MM/dd/yyyy HH:mm:ss Windows-1252

Log File: /opt/tivoli/tsm/client/ba/bin/dsmsched.log
    en US MM/dd/yyyy HH:mm:ss Windows-1252
```

• On Windows client systems, issue the following command:

```
client install dir\cms\bin\CmsConfig.bat list
```

where *client_install_dir* is the directory where the backup-archive client is installed. For example, with the default client installation, issue the following command:

```
C:\"Program Files"\Tivoli\TSM\cms\bin\CmsConfig.bat list
```

The output is similar to the following text:

Listing CMS configuration

```
server1.example.com:1500 NO_SSL HOSTNAME
Capabilities: [LOG_QUERY]
   Opt Path: C:\Program Files\Tivoli\TSM\baclient\dsm.opt

Log File: C:\Program Files\Tivoli\TSM\baclient\dsmerror.log
   en_US MM/dd/yyyy HH:mm:ss Windows-1252

Log File: C:\Program Files\Tivoli\TSM\baclient\dsmsched.log
   en_US MM/dd/yyyy HH:mm:ss Windows-1252
```

If the client management service is correctly installed and configured, the output displays the location of the error log file.

The output text is extracted from the following configuration file:

- On Linux client systems: client_install_dir/cms/Liberty/usr/servers/cmsServer/client-configuration.xml
- On Windows client systems: *client_install_dir*\cms\Liberty\usr\servers\cmsServer\client-configuration.xml

If the output does not contain any entries, you must configure the client-configuration.xml file. For instructions about how to configure this file, see "Configuring the client management service for custom client installations" on page 144. You can use the **CmsConfig verify** command to verify that a node definition is correctly created in the client-configuration.xml file.

Configuring the Operations Center to use the client management service

If you did not use the default configuration for the client management service, you must configure the Operations Center to access the client management service.

Before you begin

Ensure that the client management service is installed and started on the client system.

Verify whether the default configuration is used. The default configuration is not used if either of the following conditions is met:

• The client management service does not use the default port number, 9028.

- The backup-archive client is not accessed by the same IP address as the client system where the backup-archive client is installed. For example, a different IP address might be used in the following situations:
 - The computer system has two network cards. The backup-archive client is configured to communicate on one network, while the client management service communicates on the other network.
 - The client system is configured with the Dynamic Host Configuration Protocol (DHCP). As a result, the client system is dynamically assigned an IP address, which is saved on the IBM Spectrum Protect server during the previous backup-archive client operation. When the client system is restarted, the client system might be assigned a different IP address. To ensure that the Operations Center can always find the client system, you specify a fully qualified domain name.

Procedure

To configure the Operations Center to use the client management service, complete the following steps:

- 1. On the Clients page of the Operations Center, select the client.
- 2. Click Details.
- 3. Click the **Properties** tab.
- 4. In the Remote diagnostics URL field in the General section, specify the URL for the client management service on the client system.

The address must start with https. The following table shows examples of the remote diagnostics URL.

Type of URL	Example	
With DNS host name and default port, 9028	https://server.example.com	
With DNS host name and non-default port	https://server.example.com:1599	
With IP address and non-default port	https://192.0.2.0:1599	

5. Click Save.

What to do next

You can access client diagnostic information such as client log files from the **Diagnosis** tab in the Operations Center.

Starting and stopping the client management service

The client management service is automatically started after it is installed on the client system. You might need to stop and start the service in certain situations.

Procedure

- To stop, start, or restart the client management service on Linux client systems, issue the following commands:
 - To stop the service:
 - service cms.rc stop
 - To start the service: service cms.rc start
 - To restart the service:
 - service cms.rc restart

• On Windows client systems, open the Services window, and stop, start, or restart the IBM Spectrum Protect Client Management Services service.

Uninstalling the client management service

If you no longer have to collect client diagnostic information, you can uninstall the client management service from the client system.

About this task

You must use IBM Installation Manager to uninstall the client management service. If you no longer plan to use IBM Installation Manager, you can also uninstall it.

Procedure

- 1. Uninstall the client management service from the client system:
 - a. Open IBM Installation Manager:
 - On the Linux client system, in the directory where IBM Installation Manager is installed, go to the eclipse subdirectory (for example, /opt/IBM/InstallationManager/eclipse), and issue the following command:
 - ./IBMIM
 - On the Windows client system, open IBM Installation Manager from the Start menu.
 - b. Click Uninstall.
 - c. Select IBM Spectrum Protect Client Management Services, and click Next.
 - d. Click Uninstall, and then click Finish.
 - e. Close the IBM Installation Manager window.
- 2. If you no longer require IBM Installation Manager, uninstall it from the client system:
 - a. Open the IBM Installation Manager uninstall wizard:
 - On the Linux client system, change to the IBM Installation Manager uninstallation directory (for example, /var/ibm/InstallationManager/uninstall), and issue the following command:
 - ./uninstall
 - On the Windows client system, click **Start** > **Control Panel**. Then, click **Uninstall a program** > **IBM Installation Manager** > **Uninstall**.
 - b. In the IBM Installation Manager window, select **IBM Installation Manager** if it is not already selected, and click **Next**.
 - c. Click **Uninstall**, and click **Finish**.

Configuring the client management service for custom client installations

The client management service uses information in the client configuration file (client-configuration.xml) to discover diagnostic information. If the client management service is unable to discover the location of log files, you must run the **CmsConfig** utility to add the location of the log files to the client-configuration.xml file.

CmsConfig utility

If you are not using the default client configuration, you can run the CmsConfig utility on the client system to discover and add the location of the client log files to the client-configuration.xml file. After you complete the configuration, the client management service can access the client log files and make them available for basic diagnostic functions in the Operations Center.

You can also use the **CmsConfig** utility to show the configuration of the client management service and to remove a node name from the clientconfiguration.xml file.

The client-configuration.xml file is in the following directory:

- On Linux client systems: client install dir/cms/Liberty/usr/servers/cmsServer
- On Windows client systems: $client_install_dir \verb|\cms\Liberty\usr\servers\cmsServer|$

where *client_install_dir* is the directory where the backup-archive client is installed.

The **CmsConfig** utility is available in the following locations.

Client operating system	Utility location and name	
Linux	<pre>client_install_dir/cms/bin/CmsConfig.sh</pre>	
Windows	<pre>client_install_dir\cms\bin\CmsConfig.bat</pre>	

To use the **CmsConfig** utility, issue any command that is included in the utility. Ensure that you enter each command on a single line.

CmsConfig discover command:

You can use the CmsConfig discover command to automatically discover options files and log files, and add them to the client configuration file, client-configuration.xml. In this way, you can help to ensure that the client management service can access the client log files and make them available for diagnosis in the Operations Center.

Typically, the client management service installer runs the CmsConfig discover command automatically. However, you must run this command manually if you changed the backup-archive client, such as added a client, or changed the server configuration or location of log files.

For the client management service to create a log definition in the client-configuration.xml file, the IBM Spectrum Protect server address, server port, and client node name must be obtained. If the node name is not defined in the client options file (typically, dsm.sys on Linux client systems and dsm.opt on Windows client systems), the host name of the client system is used.

To update the client configuration file, the client management service must access one or more log files, such as dsmerror.log and dsmsched.log. For best results, run the CmsConfig discover command in the same directory and by using the same environment variables as you would for the backup-archive client command, dsmc. In this way, you can improve the chances of finding the correct log files.

If the client options file is in a custom location or it does not have a typical options file name, you can also specify the path for the client options file to narrow the scope of the discovery.

Syntax



Parameters

configPath

The path of the client options file (typically dsm.opt). Specify the configuration path when the client options file is not in a default location or it does not have the default name. The client management service loads the client options file and discovers the client nodes and logs from there. This parameter is optional.

On a Linux client system, the client management service always loads the client user-options file (dsm.opt) first, and then looks for the client system-options file (typically dsm.sys). The value of the *configPath* parameter, however, is always the client user-options file.

Examples for a Linux client system

 Discover the client log files and automatically add the log definitions to the client-configuration.xml file.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

./CmsConfig.sh discover

Output:

Discovering client configuration and logs.

```
server.example.com:1500 SUSAN
   /opt/tivoli/tsm/client/ba/bin/dsmerror.log
```

Finished discovering client configuration and logs.

 Discover the configuration files and log files that are specified in the /opt/tivoli/tsm/client/ba/bin/daily.opt file and automatically add the log definitions to the client-configuration.xml file.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

./CmsConfig.sh discover /opt/tivoli/tsm/client/ba/bin/daily.opt

Output:

```
Discovering client configuration and logs

server.example.com:1500 NO_SSL SUSAN

Capabilities: [LOG_QUERY]
    Opt Path: /opt/tivoli/tsm/client/ba/bin/dsm.sys

Log File: /opt/tivoli/tsm/client/ba/bin/dsmerror.log
    en_US MM/dd/yyyy HH:mm:ss Windows-1252

Log File: /opt/tivoli/tsm/client/ba/bin/dsmsched.log
    en_US MM/dd/yyyy HH:mm:ss Windows-1252
```

Finished discovering client configuration and logs.

Examples for a Windows client system

• Discover the client log files and automatically add the log definitions to the client-configuration.xml file.

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Command:

cmsconfig discover

Output:

Discovering client configuration and logs.

```
server.example.com:1500 SUSAN
    C:\Program Files\Tivoli\TSM\baclient\dsmerror.log
```

Finished discovering client configuration and logs.

• Discover the configuration files and log files that are specified in the c:\program files\tivoli\tsm\baclient\daily.opt file and automatically add the log definitions to the client-configuration.xml file.

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Command:

```
cmsconfig discover "c:\program files\tivoli\tsm\baclient\
daily.opt"
```

Output:

Discovering client configuration and logs

```
server.example.com:1500 NO_SSL SUSAN
Capabilities: [LOG_QUERY]
    Opt Path: C:\Program Files\Tivoli\TSM\baclient\dsm.opt

Log File: C:\Program Files\Tivoli\TSM\baclient\dsmerror.log
    en_US MM/dd/yyyy HH:mm:ss Windows-1252

Log File: C:\Program Files\Tivoli\TSM\baclient\dsmsched.log
    en US MM/dd/yyyy HH:mm:ss Windows-1252
```

Finished discovering client configuration and logs.

CmsConfig addnode command:

Use the **CmsConfig addnode** command to manually add a client node definition to the client-configuration.xml configuration file. The node definition contains information that is required by the client management service to communicate with the IBM Spectrum Protect server.

Use this command only if the client options file or client log files are stored in a non-default location on the client system.

Syntax

```
▶►—CmsConfig addnode—nodeName—serverIP—serverPort—serverProtocol—optPath——▶◀
```

Parameters

nodeName

The client node name that is associated with the log files. For most client

systems, only one node name is registered to the IBM Spectrum Protect server. However, on systems with multiple users, such as Linux client systems, there can be more than one client node name. This parameter is required.

serverIP

The TCP/IP address of the IBM Spectrum Protect server that the client management service authenticates to. This parameter is required.

You can specify a 1 - 64 character TCP/IP address for the server. The server address can be a TCP/IP domain name or a numeric IP address. The numeric IP address can be either a TCP/IP v4 or TCP/IP v6 address. You can use IPv6 addresses only if the **commethod V6Tcpip** option is specified for the client system.

Examples:

- server.example.com
- 192.0.2.0
- 2001:0DB8:0:0:0:0:0:0

serverPort

The TCP/IP port number that is used to communicate with the IBM Spectrum Protect server. You can specify a value in the range 1 - 32767. This parameter is required.

Example: 1500

serverProtocol

The protocol that is used for communication between the client management service and the IBM Spectrum Protect server. This parameter is required.

You can specify one of the following values.

Value	Meaning	
NO_SSL	The SSL security protocol is not used.	
SSL	The SSL security protocol is used.	
FIPS	The TLS 1.2 protocol is used in Federal Information Processing Standard (FIPS) mode. Tip: Alternatively, you can enter TLS_1.2 to specify that the TLS 1.2 protocol is used in FIPS mode.	

optPath

The fully qualified path of the client options file. This parameter is required.

Example (Linux client): /opt/backup_tools/tivoli/tsm/baclient/dsm.sys

Example (Windows client): C:\backup tools\Tivoli\TSM\baclient\dsm.opt

Example for a Linux client system

Add the node definition for client node SUSAN to the client-configuration.xml file. The IBM Spectrum Protect server that the node communicates with is server.example.com on server port 1500. The SSL security protocol is not used. The path for the client system options file is /opt/tivoli/tsm/client/ba/bin/custom_opt.sys.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

./CmsConfig.sh addnode SUSAN server.example.com 1500 NO_SSL /opt/tivoli/tsm/client/ba/bin/custom_opt.sys

Output:

Adding node.

Finished adding client configuration.

Example for a Windows client system

Add the node definition for client node SUSAN to the client-configuration.xml file. The IBM Spectrum Protect server that the node communicates with is server.example.com on server port 1500. The SSL security protocol is not used. The path for the client options file is c:\program files\tivoli\tsm\baclient\custom.opt.

Issue the following command. from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Command:

cmsconfig addnode SUSAN server.example.com 1500 NO_SSL "c:\program
files\tivoli\tsm\baclient\custom.opt"

Output:

Adding node.

Finished adding client configuration.

CmsConfig setopt command:

Use the **CmsConfig setopt** command to set the path of the client options file (typically dsm.opt) to an existing node definition without first reading the contents of the client options file.

This command can be helpful if the client options file does not have a typical name or is in a non-default location.

Requirement: If the node definition does not exist, you must first issue the **CmsConfig addnode** command to create the node definition.

Unlike the CmsConfig discover command, the CmsConfig setopt command does not create associated log definitions in the client-configuration.xml file. You must use the CmsComfog addlog command to create the log definitions.

Syntax

►►—CmsConfig setopt—nodeName—optPath—

Parameters

nodeName

The client node name that is associated with the log files. For most client systems, only one node name is registered to the IBM Spectrum Protect server. However, on systems with multiple users, such as Linux client systems, there can be more than one client node name. This parameter is required.

optPath

The fully qualified path of the client options file. This parameter is required.

Example (Linux client): /opt/backup_tools/tivoli/tsm/baclient/dsm.opt

Example (Windows client): C:\backup tools\Tivoli\TSM\baclient\dsm.opt

Example for a Linux client system

Set the client options file path for the node SUSAN. The path for the client options file is /opt/tivoli/tsm/client/ba/bin/dsm.opt.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

./CmsConfig.sh setopt SUSAN /opt/tivoli/tsm/client/ba/bin/dsm.opt

Output:

Adding node configuration file.

Finished adding client configuration file.

Example for a Windows client system

Set the client options file path for the node SUSAN. The path for the client options file is c:\program files\tivoli\tsm\baclient\dsm.opt.

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Command:

cmsconfig setopt SUSAN "c:\program files\tivoli\tsm\baclient\
dsm.opt"

Output:

Adding node configuration file.

Finished adding client configuration file.

CmsConfig setsys command:

On a Linux client system, use the **CmsConfig setsys** command to set the path of the client system-options file (typically dsm.sys) to an existing node definition without first reading the contents of the client system-options file.

This command can be helpful if the client system-options file does not have a typical name or is in a non-default location.

Requirement: If the node definition does not exist, you must first issue the **CmsConfig addnode** command to create the node definition.

Unlike the **CmsConfig discover** command, the **CmsConfig setsys** command does not create associated log definitions in the client-configuration.xml file. You must use the **CmsComfog addlog** command to create the log definitions.

Syntax

▶►—CmsConfig setsys—nodeName—sysPath—

Parameters

nodeName

The client node name that is associated with the log files. For most client systems, only one node name is registered to the IBM Spectrum Protect server. However, on systems with multiple users, such as Linux client systems, there can be more than one client node name. This parameter is required.

sysPath

The fully qualified path of the client system-options file. This parameter is required.

Example: /opt/backup tools/tivoli/tsm/baclient/dsm.sys

Example

Set the client system-options file path for the node SUSAN. The path for the client system-options file is /opt/tivoli/tsm/client/ba/bin/dsm.sys.

Issue the following command, from the /opt/tivoli/tsm/cms/bin directory.

Command:

./CmsConfig.sh setopt SUSAN /opt/tivoli/tsm/client/ba/bin/dsm.sys

Output:

Adding node configuration file.


Finished adding client configuration file.

CmsConfig addlog command:

Use the **CmsConfig addlog** command to manually add the location of client log files to an existing node definition in the client-configuration.xml configuration file. Use this command only if the client log files are stored in a non-default location on the client system.

Requirement: If the node definition does not exist, you must first issue the **CmsConfig addnode** command to create the node definition.

Syntax



Parameters

nodeName

The client node name that is associated with the log files. For most client systems, only one node name is registered to the IBM Spectrum Protect server. However, on systems with multiple users, such as Linux client systems, there can be more than one client node name. This parameter is required.

logPath

The fully qualified path of the log files. This parameter is required.

Example (Linux client): /opt/backup_tools/tivoli/tsm/baclient/dsmerror.log

Example (Windows client): C:\backup tools\Tivoli\TSM\baclient\ dsmerror.log

language

The language locale of the log file. This parameter is optional. However, if you specify this parameter, you must also specify the dateFormat, timeFormat, and **encoding** parameters. You must specify the locale for the following languages.

Language	Locale
Brazilian Portuguese	pt_BR
Chinese, Simplified	zh_CN
Chinese, Traditional	zh_TW
Czech	cs_CZ
English	en_US
French	fr_FR
German	de_DE
Hungarian	hu_HU
Italian	it_IT
Japanese	ja_JP
Korean	ko_KR
Polish	p1_PL
Russian	ru_RU
Spanish	es_ES

dateFormat

The date format of the time stamp entries in the client log file. This parameter is optional. However, if you specify this parameter, you must also specify the language, timeFormat, and encoding parameters.

The following table shows the date formats for the languages.

Tip: Instead of using one of the date formats that are listed in the table, you can specify a date format by using the backup-archive client dateformat option.

Language	Date format
Chinese, Simplified	уууу-MM-dd
Chinese, Traditional	yyyy/MM/dd
Czech	dd.MM.yyyy
English	MM/dd/yyyy
French	dd/MM/yyyy
German	dd.MM.yyyy
Hungarian	yyyy.MM.dd
Italian	dd/MM/yyyy
Japanese	уууу-ММ-dd
Korean	yyyy/MM/dd
Polish	yyyy-MM-dd
Portuguese, Brazilian	dd/MM/yyyy

Language	Date format
Russian	dd.MM.yyyy
Spanish	dd.MM.yyyy

timeFormat

The time format of the time stamp entries in the client log file. This parameter is optional. However, if you specify this parameter, you must also specify the <code>language</code>, <code>dateFormat</code>, and <code>encoding</code> parameters.

The following table shows examples of default time formats that you can specify and client operating systems.

Tip: Instead of using one of the time formats that are listed in the table, you can specify a time format by using the backup-archive client **timeformat** option.

Language	Time format for Linux client systems	Time format for Windows client systems
Chinese, Simplified	HH:mm:ss	HH:mm:ss
Chinese, Traditional	HH:mm:ss	ahh:mm:ss
Czech	HH:mm:ss	HH:mm:ss
English	HH:mm:ss	HH:mm:ss
French	HH:mm:ss	HH:mm:ss
German	HH:mm:ss	HH:mm:ss
Hungarian	HH.mm.ss	HH:mm:ss
Italian	HH:mm:ss	HH:mm:ss
Japanese	HH:mm:ss	HH:mm:ss
Korean	HH:mm:ss	HH:mm:ss
Polish	HH:mm:ss	HH:mm:ss
Portuguese, Brazilian	HH:mm:ss	HH:mm:ss
Russian	HH:mm:ss	HH:mm:ss
Spanish	HH:mm:ss	HH:mm:ss

encoding

The character encoding of the entries in the client log files. This parameter is optional. However, if you specify this parameter, you must also specify the language, dateFormat, and timeFormat parameters.

For Linux client systems, the typical character encoding is UTF-8. For Windows client systems, the default encoding values are shown in the following table. If your client system is customized differently, use the **encoding** parameter to specify a value other than the default.

Language	Encoding
Chinese, Simplified	CP936
Chinese, Traditional	CP950
Czech	Windows-1250
English	Windows-1252
French	Windows-1252

Language	Encoding
German	Windows-1252
Hungarian	Windows-1250
Italian	Windows-1252
Japanese	CP932
Korean	CP949
Polish	Windows-1250
Portuguese, Brazilian	Windows-1252
Russian	Windows-1251
Spanish	Windows-1252

Example for a Linux client system

Add the client log file location to the existing definition for client node SUSAN in the client-configuration.xml file. The path for the client log file is /usr/work/logs/dsmerror.log. Add the language specification, time format, and date format for the French locale.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

./CmsConfig.sh addlog SUSAN /usr/work/logs/dsmerror.log fr_FR yyyy/MM/dd HH:MM:ss UTF-8

Output:

Adding log.

Finished adding log.

Example for a Windows client system

Add the client log file location to the existing definition for client node SUSAN in the client-configuration.xml. The path for the client log file is c:\work\logs\dsmerror.log. Add the language specification, time format, and date format for the French locale.

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Command:

cmsconfig addlog SUSAN c:\work\logs\dsmerror.log fr_FR yyyy/MM/dd HH:MM:ss UTF-8

Output:

Adding log.

Finished adding log.

CmsConfig remove command:

Use the **CmsConfig remove** command to remove a client node definition from the client configuration file, client-configuration.xml. All log file entries that are associated with the client node name are also removed.

Syntax

▶►—CmsConfig remove—nodeName-

Parameters

nodeName

The client node name that is associated with the log files. For most client systems, only one node name is registered to the IBM Spectrum Protect server. However, on systems with multiple users, such as Linux client systems, there can be more than one client node name. This parameter is required.

Example for a Linux client system

Remove the node definition for SUSAN from the client-configuration.xml file.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

./CmsConfig.sh remove SUSAN

Output:

Removing node.

Finished removing node.

Example for a Windows client system

Remove the node definition for SUSAN from the client-configuration.xml file.

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Command:

cmsconfig remove SUSAN

Output:


Removing node.

Finished removing node.

CmsConfig verify command:

Use the **CmsConfig verify** command to verify that a node definition is correctly created in the client-configuration.xml file. If there are errors with the node definition or the node is not correctly defined, you must correct the node definition by using the appropriate **CmsConfig** commands.

Syntax



Parameters

nodeName

The client node name that is associated with the log files. For most client systems, only one node name is registered to the IBM Spectrum Protect server. However, on systems with multiple users, such as Linux client systems, there can be more than one client node name. This parameter is required.

cmsPort

The TCP/IP port number that is used to communicate with the client management service. Specify the port number if you did not use the default port number when you installed the client management service. The default port number is 9028. This parameter is optional.

Example for a Linux client system

Verify that the node definition for the node SUSAN is created correctly in the client-configuration.xml file.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

```
./CmsConfig.sh verify SUSAN
```

During the verification process, you are prompted to enter the client node name or administrative user ID and password.

Output:

Verifying node.

Verifying the CMS service configuration for node SUSAN. The CMS configuration looks correct.

Verifying the CMS service works correctly on port 9028.

Enter your user id: admin Enter your password:

Connecting to CMS service and verifying resources. The CMS service is working correctly. Finished verifying node.

Example for a Windows client system

Verify that the node definition for the node SUSAN is created correctly in the client-configuration.xml file.

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Commands:

cmsconfig verify SUSAN

During the verification process, you are prompted to enter the client node name or administrative user ID and password.

Output:

```
Verifying the CMS service configuration for node SUSAN.
The CMS configuration looks correct.
```

Verifying the CMS service works correctly on port 9028.

```
Enter your user id: admin
Enter your password:
```

Verifying node.

Connecting to CMS service and verifying resources. The CMS service is working correctly. Finished verifying node.

CmsConfig list command:

Use the CmsConfig list command to show the client management service configuration.

Syntax

```
►► CmsConfig list—
```

Example for a Linux client system

Show the configuration of the client management service. Then, view the output to ensure that you entered the command correctly.

Issue the following command from the /opt/tivoli/tsm/cms/bin directory.

Command:

```
./CmsConfig.sh list
```

Output:

```
Listing CMS configuration
server.example.com:1500 NO_SSL SUSAN
Capabilities: [LOG_QUERY]
    Opt Path: /opt/tivoli/tsm/client/ba/bin/dsm.sys
    Log File: /opt/tivoli/tsm/client/ba/bin/dsmerror.log
        en_US MM/dd/yyyy HH:mm:ss Windows-1252
    Log File: /opt/tivoli/tsm/client/ba/bin/dsmsched.log
        en_US MM/dd/yyyy HH:mm:ss Windows-1252
```

Example for a Windows client system

Show the configuration of the client management service. Then, view the output to ensure that you entered the command correctly.

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory.

Command:

```
cmsconfig list
```

Output:

```
Listing CMS configuration
server.example.com:1500 NO_SSL SUSAN
Capabilities: [LOG_QUERY]
    Opt Path: C:\Program Files\Tivoli\TSM\baclient\dsm.opt
    Log File: C:\Program Files\Tivoli\TSM\baclient\dsmerror.log
        en_US MM/dd/yyyy HH:mm:ss Windows-1252

Log File: C:\Program Files\Tivoli\TSM\baclient\dsmsched.log
    en US MM/dd/yyyy HH:mm:ss Windows-1252
```

CmsConfig help command:

Use the CmsConfig help command to show the syntax of CmsConfig utility commands.

Syntax



Example for a Linux client system

Issue the following command from the /opt/tivoli/tsm/cms/bin directory: ./CmsConfig help

Example for a Windows client system

Issue the following command from the C:\Program Files\Tivoli\TSM\cms\bin directory:

CmsConfig help

Advanced client management service capabilities:

By default, the IBM Spectrum Protect client management service collects information only from client log files. To initiate other client actions, you can access the Representational State Transfer (REST) API that is included with the client management service.

API developers can create REST applications to initiate the following client actions:

- Query and update client options files (for example, the dsm.sys file on Linux clients and the dsm.opt file on Linux and Windows clients).
- Query the status of the IBM Spectrum Protect client acceptor and the scheduler.
- Back up and restore files for a client node.
- Extend the capabilities of the client management service with scripts.

For detailed information about the client management service REST API, see the Client Management Services REST API Guide.

Chapter 13. Uninstalling the Operations Center

You can uninstall the Operations Center by using any of the following methods: a graphical wizard, the command line in console mode, or silent mode.

Uninstalling the Operations Center by using a graphical wizard

You can uninstall the Operations Center by using the graphical wizard of IBM Installation Manager.

Procedure

- Open IBM Installation Manager.
 You can open IBM Installation Manager from the Start menu.
- 2. Click Uninstall.
- 3. Select the option for the Operations Center, and click **Next**.
- 4. Click Uninstall.
- 5. Click Finish.

Uninstalling the Operations Center in console mode

To uninstall the Operations Center by using the command line, you must run the uninstallation program of IBM Installation Manager from the command line with the parameter for console mode.

Procedure

1. In the directory where IBM Installation Manager is installed, go to the following subdirectory:

eclipse\tools

For example:

C:\Program Files\IBM\Installation Manager\eclipse\tools

2. From the tools directory, issue the following command:

imcl.exe -c

- 3. To uninstall, enter 5.
- 4. Choose to uninstall from the IBM Spectrum Protect package group.
- 5. Enter N for Next.
- 6. Choose to uninstall the Operations Center package.
- 7. Enter N for Next.
- 8. Enter U for Uninstall.
- 9. Enter F for Finish.

Uninstalling the Operations Center in silent mode

To uninstall the Operations Center in silent mode, you must run the uninstallation program of IBM Installation Manager from the command line with the parameters for silent mode.

Before you begin

You can use a response file to provide data input to silently uninstall the Operations Center server. IBM Spectrum Protect includes a sample response file, uninstall_response_sample.xml, in the input directory where the installation package is extracted. This file contains default values to help you avoid any unnecessary warnings.

To uninstall the Operations Center, leave modify="false" set for the Operations Center entry in the response file.

If you want to customize the response file, you can modify the options that are in the file. For information about response files, see Response files.

Procedure

1. In the directory where IBM Installation Manager is installed, go to the following subdirectory:

```
eclipse\tools
```

For example:

C:\Program Files\IBM\Installation Manager\eclipse\tools

2. From the tools directory, issue the following command, where *response_file* represents the response file path, including the file name:

```
imcl.exe -input response file -silent
```

The following command is an example:

imcl.exe -input C:\tmp\input\uninstall response.xml -silent

Chapter 14. Rolling back to a previous version of the Operations Center

By default, IBM Installation Manager saves earlier versions of a package to roll back to if you experience a problem with later versions of updates, fixes, or packages.

Before you begin

The rollback function is available only after the Operations Center is updated.

About this task

When IBM Installation Manager rolls back a package to a previous version, the current version of the package files is uninstalled, and an earlier version is reinstalled.

To roll back to a previous version, IBM Installation Manager must access files for that version. By default, these files are saved during each successive installation. Because the number of saved files increases with each installed version, you might want to delete these files from your system on a regular schedule. However, if you delete the files, you cannot roll back to a previous version.

To delete saved files or to update your preference for saving these files in future installations, complete the following steps:

- 1. In IBM Installation Manager, click **File** > **Preferences**.
- 2. On the Preferences page, click **Files for Rollback**, and specify your preference.

Procedure

To roll back to a previous version of the Operations Center, use the **Roll Back** function of IBM Installation Manager.

Part 3. Appendixes

Appendix A. Installation log files

If you experience errors during installation, these errors are recorded in log files that are stored in the IBM Installation Manager logs directory.

You can view installation log files by clicking **File** > **View Log** from the Installation Manager tool. To collect these log files, click **Help** > **Export Data for Problem Analysis** from the Installation Manager tool.

Appendix B. Services associated with the server

When you start the IBM Spectrum Protect server as a service, other services start automatically. These services are associated with the database manager, DB2.

The following services are associated with the server.

Service name	Purpose	Comments
TSM Server_instance	The service for the server instance that is named <i>Server_instance</i> . For example: TSM Server1	Set the start and stop options for this service to start and stop the server instance automatically. Each server instance runs as a separate service.
DB2 - DB2TSM1 - SERVER_INSTANCE	The DB2 service for the server instance that is named Server_instance. For example: DB2 - DB2TSM1 - SERVER1	This service is automatically started when the service for the server instance is started. The DB2 service is not stopped automatically when you stop the service for the server. The system has one of these services for each server-instance service that is started on the system.
DB2 Governor (DB2TSM1)	A DB2 service that is created at installation time, and is required for all server instances.	Do not change the options for this service.
DB2 License Server (DB2TSM1)	A DB2 service that is created at installation time, and is required for all server instances.	Do not change the options for this service.
DB2 Management Server (DB2TSM1)	A DB2 service that is created at installation time, and is required for all server instances.	Do not change the options for this service.
DB2 Remote Command Server (DB2TSM1)	A DB2 service that is created at installation time, and is required for all server instances.	Do not change the options for this service.

Appendix C. Accessibility features for the IBM Spectrum Protect product family

Accessibility features assist users who have a disability, such as restricted mobility or limited vision, to use information technology content successfully.

Overview

The IBM Spectrum Protect family of products includes the following major accessibility features:

- Keyboard-only operation
- · Operations that use a screen reader

The IBM Spectrum Protect family of products uses the latest W3C Standard, WAI-ARIA 1.0 (www.w3.org/TR/wai-aria/), to ensure compliance with US Section 508 (www.access-board.gov/guidelines-and-standards/communications-and-it/about-the-section-508-standards/section-508-standards) and Web Content Accessibility Guidelines (WCAG) 2.0 (www.w3.org/TR/WCAG20/). To take advantage of accessibility features, use the latest release of your screen reader and the latest web browser that is supported by the product.

The product documentation in IBM Knowledge Center is enabled for accessibility. The accessibility features of IBM Knowledge Center are described in the Accessibility section of the IBM Knowledge Center help (www.ibm.com/support/knowledgecenter/about/releasenotes.html?view=kc#accessibility).

Keyboard navigation

This product uses standard navigation keys.

Interface information

User interfaces do not have content that flashes 2 - 55 times per second.

Web user interfaces rely on cascading style sheets to render content properly and to provide a usable experience. The application provides an equivalent way for low-vision users to use system display settings, including high-contrast mode. You can control font size by using the device or web browser settings.

Web user interfaces include WAI-ARIA navigational landmarks that you can use to quickly navigate to functional areas in the application.

Vendor software

The IBM Spectrum Protect product family includes certain vendor software that is not covered under the IBM license agreement. IBM makes no representation about the accessibility features of these products. Contact the vendor for accessibility information about its products.

Related accessibility information

In addition to standard IBM help desk and support websites, IBM has a TTY telephone service for use by deaf or hard of hearing customers to access sales and support services:

TTY service 800-IBM-3383 (800-426-3383) (within North America)

For more information about the commitment that IBM has to accessibility, see IBM Accessibility (www.ibm.com/able).

Notices

This information was developed for products and services offered in the US. This material might be available from IBM in other languages. However, you may be required to own a copy of the product or product version in that language in order to access it.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
US

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing Legal and Intellectual Property Law IBM Japan Ltd. 19-21, Nihonbashi-Hakozakicho, Chuo-ku Tokyo 103-8510, Japan

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those

websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Director of Licensing IBM Corporation North Castle Drive, MD-NC119 Armonk, NY 10504-1785 US

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

The performance data discussed herein is presented as derived under specific operating conditions. Actual results may vary.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work must include a copyright notice as follows: © (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. _enter the year or years_.

Trademarks

IBM, the IBM logo, and ibm.com[®] are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at "Copyright and trademark information" at www.ibm.com/legal/copytrade.shtml.

Adobe is a registered trademark of Adobe Systems Incorporated in the United States, and/or other countries.

Linear Tape-Open, LTO, and Ultrium are trademarks of HP, IBM Corp. and Quantum in the U.S. and other countries.

Intel and Itanium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, and Windows NT are trademarks of Microsoft Corporation in the United States, other countries, or both.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

SoftLayer[®] is a registered trademark of SoftLayer, Inc., an IBM Company.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the IBM website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

Rights Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

Privacy policy considerations

IBM Software products, including software as a service solutions, ("Software Offerings") may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering's use of cookies is set forth below.

This Software Offering does not use cookies or other technologies to collect personally identifiable information.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at http://www.ibm.com/privacy and IBM's Online Privacy Statement at http://www.ibm.com/privacy/details in the section entitled "Cookies, Web Beacons and Other Technologies," and the "IBM Software Products and Software-as-a-Service Privacy Statement" at http://www.ibm.com/software/info/product-privacy.

Glossary

A glossary is available with terms and definitions for the IBM Spectrum Protect family of products.

See the IBM Spectrum Protect glossary.

To view glossaries for other IBM products, see IBM Terminology.

Index

Α	client management service (continued)
accessibility features 169	Operations Center
activating	view client log files 139
server	remove node name 155, 156
Windows 63	requirements and limitations 115 REST API 158
activating server options 57	set client options file path 149
active log	set client system-options file path 150
space requirements 28	show configuration 157
storage technology selection 18	starting and stopping 143
administrative commands	uninstalling 144
HALT 68	verifying installation 141
REGISTER LICENSE 68	client nodes
administrator ID 116	reverting to previous server version
administrator password 116	data affected 95
alerts	client-configuration.xml file 141, 144, 145
sending by email 129	cluster configuration 97
API 61	cluster environment
API configuration 61	DB2 97
archive failover log space	clustered environment
description 40	applying a fix pack to a V8 server 75
archive log	upgrading server on Windows
space requirements 28	V6.1 to V8.1.2 89
storage technology selection 18	V6.3 or V7.1 to V8.1.2 87
archive log directory 51	upgrading the server to V8.1.2 86
	CmsConfig utility
D	addlog 151
В	addnode 147
BACKUP DB command 61	client management service 145
backups	discover 145
database 68	help 158
	list 157
	remove 155, 156
C	setopt 149
capacity planning	setsys 150
database space requirements	commands
estimates based on number of files 25	administrative, SET DBRECOVERY 68
estimates based storage pool capacity 27	DSMSERV FORMAT 60
starting size 24	commands, administrative
recovery log space requirements	HALT 68
active and archive logs 28	REGISTER LICENSE 68
active log mirror 40	communication methods
client management service	Named Pipes 58
add log file location 151	setting 57
add node definition 147	TCP/IP 57
advanced capabilities 158	components installable v
CmsConfig addlog 151	configuration
CmsConfig addnode 147	9
CmsConfig discover 145	Operations Center 110 configuring 51, 53, 55
CmsConfig help 158	communication protocols 57
CmsConfig list 157	hub server 128
CmsConfig remove 155, 156	Operations Center 127
CmsConfig setopt 149	spoke server 129
CmsConfig setsys 150	configuring the Operations Center
CmsConfig utility 145	for client management service 142
collecting diagnostic information 139	configuring, manually 53, 55
configuring for custom client installation 144	
configuring the Operations Center 142	configuring, server instance 53 configuring, wizard 53, 54
installing 139	Console language support 49
in silent mode 140	console mode 47

create server instance 51, 55	G		
custom configuration	group 51		
client management service 144	GSKit		
	removing Version 7 92		
n	Version 7 92		
D	Version 8 92		
data deduplication			
effects when reverting to previous server version 95			
database	Н		
backups 68			
installing 60	HALT command 68		
name 42	halting the server 68		
storage technology selection 18	hardware requirements		
database directories 51	IBM Spectrum Protect 20		
database manager 27, 61	home directory 56		
database manager (DB2TSM1) 167	HTTPS 133, 135		
DB2 commands 99	password for truststore file 118, 136 hub server 110		
DB2 directories 44			
db2icrt command 56	configuring 128		
default installation directories 44			
device driver, IBM Spectrum Protect v	I		
directories	I		
DB2 44	IBM Installation Manager 23, 117, 118		
default installation 44	uninstalling 106		
devices 44	IBM Knowledge Center vi		
languages 44	IBM Spectrum Protect		
naming for server 42	installation 46, 47		
directories, instance 51	installation packages 45		
disability 169	server changes		
DISK device class	Version 8.1 vii		
checklist for disk systems 16	uninstalling 103		
storage technology selection 18	in silent mode 104		
disk performance	using a graphical installation wizard 103		
checklist for active log 9	using command line in console mode 104		
checklist for server reservery log 0	upgrading		
checklist for server recovery log 9	8.1 79		
checklist for storage pools on disk 16	V7.1 to V8.1 80		
disk space 20	IBM Spectrum Protect device driver, installable package v		
disk systems checklist for active log 9	IBM Spectrum Protect fix packs 73		
checklist for server database 7	IBM Spectrum Protect on AIX		
checklist for server recovery log 9	upgrading		
classification 18	V8.1 80		
selecting 18	IBM Spectrum Protect support site 45		
storage pools on disk 16	IBM Spectrum Protect, setting up 63		
DSMSERV FORMAT command 60	installable components v installation directories		
dsmserv.v6lock 68	Operations Center		
	Installation Manager 118		
	installation log 46, 47		
E	Installation Manager 23, 117, 118		
	logs directory 165		
email alerts 129	installation packages 45		
suspending temporarily 131	Operations Center 121		
enabling client/server communications 57	installation wizard 46		
	installing		
E	client management service 139		
F	database 60		
FILE device class	device support 45		
checklist for disk systems 16	fix packs 73		
storage technology selection 18	graphical user interface		
first steps 51	using 46		
fix packs 73	minimum requirements for 20		
fixes 45	Operations Center 121		
	recovery log 60		
	server 3, 45		
	using command line in console mode		
	using 47		

installing (continued)	0		
what to know about security 3	offering 23, 117		
what to know before 3	operating system requirements		
installing the IBM Spectrum Protect server 48	Operations Center 113		
installing the server silently 48	Operations Center v		
installingOperations Center 107	administrator IDs 116		
instance directories 51	Chrome 114		
instance user ID 42	computer requirements 110		
interim fix 73	configuring 127		
iPad	credentials for installing 118		
monitoring the storage environment 138	Firefox 114		
	hub server 110		
17	IE 114		
K	installation directory 118 installation packages 121		
keyboard 169	installing 107, 121		
KILL command 68	in silent mode 122		
Knowledge Center vi	using a graphical wizard 121		
	using command line in console mode 122		
_	Internet Explorer 114		
L	language requirements 114		
LANGUAGE option 49, 50	login screen text 132		
language package 50	opening 128, 138		
language packages 49	operating system requirements 113		
language support 50	overview 109		
languages	password for secure communications 118, 136		
set 50	port number 118, 138		
license, IBM Spectrum Protect 68	prerequisite checks 109 rolling back to a previous version 161		
licenses	Safari 114		
installable package v	spoke server 110, 129		
limitations	SSL 133, 135		
client management service 115	system requirements 109		
Local System account 64 log files	uninstalling 159		
installation 165	in silent mode 160		
login screen text	using a graphical wizard 159		
Operations Center 132	using command line in console mode 159		
•	upgrading 107, 125		
	URL 138		
M	web browser requirements 114		
maintenance mode 67	web server 138		
maintenance updates 73	options communications 57		
memory requirements 20	starting the server 63		
mobile device	options, client		
monitoring the storage environment 138	SSLTCPADMINPORT 58		
monitoring	SSLTCPPORT 58		
logs 70	TCPADMINPORT 58		
monitoring administrator 116	TCPPORT 58		
multiple servers	TCPWINDOWSIZE 58		
upgrading	overview		
multiple servers 69	Operations Center 107, 109		
N	n		
	Р		
Named Pipes 58	package 23, 117		
names, best practices	package group 23, 117		
database name 42	Passport Advantage 45		
directories for server 42	password		
instance user ID 42	Operations Center truststore file 118, 136		
server instance 42 server name 42	password for secure communications 118		
new features vii	performance		
	configuration best practices 19 Operations Center 110		
	Operations Certici 110		

1 : ::	1 (1				
planning, capacity	server database				
database space requirements	checklist for disks 7				
estimates based on number of files 25	directories 7 reorganization options 62 storage paths 7				
estimates based storage pool capacity 27					
starting size 24					
recovery log space requirements	server hardware checklist for server system 4				
, , ,					
active log mirror 40					
recovery log space requirementsv 28	checklist for storage pools on disk 16				
port number	storage technology choices 18 server instance 53, 56				
Operations Center 118, 138					
prerequisite checks	server instance, creating 56				
Operations Center 109	server instances				
publications vi	naming 42				
Publications	. •				
	naming best practices 42				
n	server license 68				
R	server recovery log				
rocovory log	checklist for disks 9				
recovery log	server,				
archive failover log space 40	activating 63				
installing 60	setting up 63				
reference, DB2 commands 99	9 I				
REGISTER LICENSE command 68	starting 63				
Remote Execution Protocol 55	server, IBM Spectrum Protect				
repository 23, 117	halting 68				
	options 57				
requirements	services				
client management service 115	starting the server as a Windows service				
requirements for installation 20	configuration 64				
resource requirements	9				
Operations Center 110	procedure 65				
reverting	services on Windows systems				
Windows cluster 97	database manager (DB2TSM1) 167				
	DB2 167				
reverting to previous server version 95	server 167				
REXEC 55	SET DBRECOVERY 68				
rollback 41, 42	shared resources directory 23, 117				
Operations Center 161	the state of the s				
	silent installation				
	IBM Spectrum Protect 48				
S	software requirements				
3	IBM Spectrum Protect 20				
secure communications 133, 135	spoke server 110				
Secure Sockets Layer 133, 135	adding 129				
Secure Sockets Layer (SSL)	SSL 133, 135				
communication using 59	password for truststore file 118, 136				
Transport Layer Security (TLS) 59	SSL (Secure Sockets Layer)				
server	communication using 59				
after upgrade	Transport Layer Security 59				
reverting to previous server version 95	SSLTCPADMINPORT option 58				
before upgrade	SSLTCPPORT option 58				
importance of preparation steps 95	stand-alone mode 67				
naming best practices 42					
	starting				
performance optimization 4	client management service 143				
starting	server 63				
maintenance mode 67	startup				
stand-alone mode 67	server				
starting as a service	maintenance mode 67				
configuration 64	stand-alone mode 67				
procedure 65	status monitoring 110				
1					
stopping 68	stopping				
upgrading	client management service 143				
to 8.1 79	server 68				
V7.1 to V8.1 80	storage pools 16				
server active log	reverting to previous server version 95				
checklist for disks 9	storage technology selection 18				
server AIX	storage technology selection 18				
<u>.</u> .					
upgrading	summary of amendments				
V8.1 80	Version 8.1 vii				
server archive log	system requirements				
checklist for disks 9	Operations Center 109 110 113 114				

T
TCP/IP
setting options 57
Version 4 57
Version 6 57
TCPNODELAY option 58 TCPPORT option 58
TCPWINDOWSIZE option 58
technical changes vii
temporary disk space 27
temporary space 27
time
server upgrade 80
TLS 133, 135 translation features 49
translations 49
Transport Layer Security (TLS) 59
Transport Layer Security protocol 133, 135
truststore file 133, 135
Operations Center 118
resetting password 136
Operations Center 110
Operations Center 110
U
Uninstall
IBM Installation Manager 106
uninstalling 105
client management service 144
uninstalling and reinstalling 105
updating 50, 125
upgrade
server
estimated time 80 to 8.1 79
V7.1 to V8.1 80
upgrade AIX
server
V8.1 80
upgrading Operations Center 107
URL
Operations Center 138 US English 50
User Account Control 55
user ID 51
V
verifying installation
client management service 141
W
VV
web server
starting 138
stopping 138 Windows
cluster reverting 97
system requirements 20
Windows clustered environment
applying a fix pack to a V8 server 75
Windows Server 55

```
Windows services
    creating
    manually 66
IBM Spectrum Protect server 167
starting the server
configuration 64
procedure 65
wizard 51
worksheet
    server space planning 23
```

IBM.

Product Number: 5725-W99

5725-W98 5725-X15

Printed in USA