

IBM Tivoli Storage Manager
for Windows
Version 7.1.1

Administrator's Guide



IBM Tivoli Storage Manager
for Windows
Version 7.1.1

Administrator's Guide



Note:

Before using this information and the product it supports, read the information in “Notices” on page 1133.

Second edition (September 2014)

This edition applies to version 7, release 1, modification 1 of IBM Tivoli Storage Manager (product numbers 5608-E01, 5608-E02, 5608-E03), and to all subsequent releases and modifications until otherwise indicated in new editions.

© Copyright IBM Corporation 1993, 2014.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

About this publication	xiii
Who should read this guide	xiii
Publications	xiii
Conventions used in this guide	xiii

New for IBM Tivoli Storage Manager Version 7.1 xv

New in this release.	xv
Operations Center updates	xv
Tivoli Monitoring for Tivoli Storage Manager updates	xvi
Updates for the Tivoli Storage Manager server component	xvii
Best practices for Version 7.1	xix
Maximum daily capability for data deduplication	xix
Server startup and setting ulimits.	xix
Duplicate identification processes and memory requirements	xx

Part 1. Tivoli Storage Manager basics 1

Chapter 1. Tivoli Storage Manager overview 3

Data protection services	5
Data protection operations.	7
Progressive incremental backups	12
Storage-pool and server-inventory backups.	12
How client data is stored.	13
Tivoli Storage Manager data management process	14
Data movement to server storage	15
Management of server storage	16
Consolidation of backed-up client data	17
Interfaces to Tivoli Storage Manager	18

Chapter 2. Tivoli Storage Manager server concepts. 21

Storage configuration and management	21
Tivoli Storage Manager storage objects	22
Disk devices	24
Storage pools and storage-pool volumes.	24
Removable media operations	30
Policy-based data management.	36
Policy components	36
Client operations controlled by policy	38
Management classes	40
How files and directories are associated with a management class	43
Management of client operations	46
Tasks for client nodes	46
Security management	48
Schedules for client operations	49

Server management	50
Server-operation management	50
The server database and recovery log.	51
Sources of information about the server	53
Tivoli Storage Manager server networks.	53
Data export and import	54
Server and client data protection	54
Disaster recovery	55

Part 2. Configuring and managing storage devices 57

Chapter 3. Planning for server storage 59

Road map for key device-related task information	60
Supported library types	61
Tivoli Storage Manager device classes	63
Disk devices	64
Removable media	64
Files on disk as sequential volumes (FILE)	64
Files on sequential volumes (CENTERA)	65
Sequential volumes on another Tivoli Storage Manager server (SERVER)	66
Device configurations	66
Devices on local area networks	66
Devices on storage area networks	67
LAN-free data movement.	68
Network-attached storage	69
Mixed device types in libraries	72
Library sharing	74

Chapter 4. Magnetic disk devices . . . 75

Requirements for disk systems	75
Comparison of random access and sequential access disk devices	77
Configuring random access volumes on disk devices	81
Configuring FILE sequential volumes on disk devices	82
Varying disk volumes online or offline	82
Cache copies for files stored on disk	83
Freeing space on disk	83
Scratch FILE volumes	84
Volume history file and volume reuse	84

Chapter 5. Attaching devices for the server 85

Attaching a manual drive.	85
Attaching an automated library device	86
Device alias names	87
Displaying information about devices with tsmdlst	88
Selecting a device driver	90
Drivers for IBM devices	90
Drivers for non IBM devices.	91
Installing device drivers for IBM 3494 libraries	92

Installing the Tivoli Storage Manager device driver	92
Uninstalling the Tivoli Storage Manager device driver	93
Using Windows device drivers with the GENERICTAPE format	93
Creating a file to list devices and their attributes	94
Controlling devices with the Tivoli Storage Manager device driver.	94
Installing the Centera SDK for Centera shared libraries	95

Chapter 6. Configuring storage devices 97

Planning for device configuration	98
Manually configuring devices	98
Configuring devices using Tivoli Storage Manager commands	103
Defining Tivoli Storage Manager storage objects with commands	104
Determining backup strategies	107
Determining the media and device type for client backups	107
Configuring IBM 3494 libraries	108
Categories in an IBM 3494 library	108
Configuring an IBM 3494 library for use by one server	109
Sharing an IBM 3494 library among servers	114
Migrating a shared IBM 3494 library to a library manager	116
Sharing an IBM 3494 library by static partitioning of drives.	117
ACSLs-managed libraries	121
Configuring an ACSLS-managed library	121
Configuring an ACSLS library with a single drive device type	122
Configuring an ACSLS library with multiple drive device type	123
Setting up an ACSLS library manager server	125
Setting up an ACSLS library client server	126
Checking in and labeling ACSLS library volumes	127
Managing virtual tape libraries	128
Considerations for using virtual tape libraries	128
Adding a virtual tape library to your environment.	129
Defining or deleting all drives and paths for a single library	130
Configuring Tivoli Storage Manager servers to share SAN-connected devices	131
Setting up server communications	131
Setting up the library manager server	131
Setting up the library client servers	133
Configuring Tivoli Storage Manager for LAN-free data movement.	134
Validating your LAN-free configuration	135
Troubleshooting device configuration	135
Displaying device information.	136
Troubleshooting problems with devices.	136
Impact of device changes on the SAN	137
Increased block size for writing to tape.	138

Chapter 7. Managing removable media operations. 141

Defining volumes	141
Managing volumes	142
Partially-written volumes	142
Volume inventory for automated libraries	142
Changing the status of database-backup and database-export volumes	143
Preparing media for automated libraries	143
Labeling media.	143
Checking media into automated library devices	144
Write-once, read-many tape media	147
Managing media in automated libraries	149
Changing the status of automated library volumes	149
Removing volumes from automated libraries	150
Returning partially written volumes to automated libraries	150
Returning reclaimed volumes to a library	151
Auditing volume inventories in libraries	151
Adding scratch volumes to automated library devices	152
Setting up volume overflow locations for automated libraries	152
Modifying volume access modes	153
Shared libraries.	154
Category numbers for IBM 3494 libraries	155
Media reuse in automated libraries	155
Media management in manual libraries	156
Tivoli Storage Manager server requests.	157
Starting the administrative client as a server console monitor	157
Displaying information about volumes that are currently mounted.	157
Displaying information about mount requests that are pending	158
Replying to mount requests	158
Canceling mount requests	158
Responding to requests for volume checkin	159
Dismounting idle volumes	159
Dismounting volumes from stand-alone removable-file devices	160
Obtaining tape alert messages.	160
Tape rotation	160
Labeling volumes using commands	162
Tivoli Storage Manager media-manager support	162
Using external media managers to control media	163
Requirements for managing media in external libraries	163
Troubleshooting database errors	164
Managing libraries	164
Obtaining information about libraries	164
Updating automated libraries	165
Deleting libraries	166
Managing drives	166
Requesting information about drives	166
Updating drives	167
Using drive encryption	168
Validating data during read/write operations to tape	169
Replacing tape drives.	173

Cleaning drives	177
Deleting drives	182
Managing paths	182
Obtaining information about paths	182
Updating paths	183
Deleting paths	183
Managing data movers	183
Obtaining information about data movers	184
Updating data movers	184
Deleting data movers	184
Managing disks	184
Obtaining information about disks	185
Updating disks	185
Deleting disks	185

Chapter 8. Tips for defining devices 187

Definitions for storage devices	187
Example: Mapping devices to device classes	188
Example: Mapping storage pools to device classes and devices	188
Defining devices and paths	189
Defining libraries	189
Defining drives	190
Defining data movers	192
Defining paths	193
Defining device classes	194
Sequential-access device types	195
Defining tape device classes	196
Defining device classes for removable media devices	203
Defining sequential-access disk (FILE) device classes	204
Defining LTO device classes	208
Defining SERVER device classes	211
Defining device classes for StorageTek VolSafe devices	212
Defining device classes for CENTERA devices	214
Obtaining information about device classes	215
How Tivoli Storage Manager fills volumes	216

Chapter 9. Using NDMP for operations with NAS file servers 219

NDMP requirements	219
Interfaces for NDMP operations	222
Data formats for NDMP backup operations	222
NDMP operations management	223
Managing NAS file server nodes	223
Managing data movers used in NDMP operations	224
Dedicating a Tivoli Storage Manager drive to NDMP operations	224
Storage pool management for NDMP operations	225
Managing tables of contents	225
Preventing long-running, inactive NDMP connections from closing	226
Configuring Tivoli Storage Manager for NDMP operations	227
Configuring Tivoli Storage Manager policy for NDMP operations	228
Tape libraries and drives for NDMP operations	231

Attaching tape library robotics for NAS-attached libraries	234
Registering NAS nodes with the Tivoli Storage Manager server	239
Defining a data mover for a NAS file server	240
Defining paths for NDMP operations	240
Labeling and checking tapes into the library	244
Scheduling NDMP operations	245
Defining virtual file spaces	245
Tape-to-tape copy to back up data	245
Tape-to-tape copy to move data	246
Backing up and restoring NAS file servers using NDMP	246
NAS file servers: backups to a single Tivoli Storage Manager server	247
Backing up NDMP file server to Tivoli Storage Manager server backups	248
File-level backup and restore for NDMP operations	249
Interfaces for file-level restore	250
International characters for NetApp file servers	251
File level restore from a directory-level backup image	252
Directory-level backup and restore	252
Directory-level backup and restore for NDMP operations	252
Backing up and restoring with snapshots	253
Backup and restore using NetApp SnapMirror to Tape feature	253
NDMP backup operations using Celerra file server integrated checkpoints	254
Replicating NAS nodes with NDMP backup data	255

Chapter 10. Managing storage pools and volumes. 257

Defining storage pools	257
Properties of storage pool definitions	258
Example: Defining storage pools	261
Example: Updating storage pools	263
Example: Setting up server storage	264
Task tips for storage pools	265
Managing storage pool volumes	267
Random-access storage pool volumes	267
Sequential-access storage pool volumes	267
Preparing volumes for random-access storage pools	269
Preparing volumes for sequential-access storage pools	270
Updating storage pool volumes	272
Access modes for storage pool volumes	273
Setting up a storage pool hierarchy	275
Example: Defining a storage pool hierarchy	275
Example: Updating a storage pool hierarchy	276
How the server groups files for storage	276
Where the server stores files	277
Example: How the server determines where to store files in a hierarchy	278
Backing up the data in a storage hierarchy	279
Staging client data from disk to tape	284
Migrating files in a storage pool hierarchy	285
Caching in disk storage pools	298
How the server removes cached files	299

Effect of caching on storage pool statistics . . .	299
Deduplicating data	299
Data deduplication overview	300
Data deduplication limitations.	303
Planning guidelines for data deduplication . . .	305
Detecting possible security attacks during client-side data deduplication	317
Evaluating data deduplication in a test environment.	318
Managing deduplication-enabled storage pools	320
Controlling data deduplication	324
Displaying statistics about server-side data deduplication	333
Displaying statistics about client-side data deduplication	334
Querying file spaces for information about deduplicated data	337
Scenarios for data deduplication	338
Data deduplication and data compatibility . .	343
Data deduplication and disaster recovery management	345
Writing data simultaneously to primary, copy, and active-data pools	346
Guidelines for using the simultaneous-write function	347
Limitations that apply to simultaneous-write operations	348
Controlling the simultaneous-write function . .	349
Simultaneous-write operations: Examples . . .	353
Planning simultaneous-write operations . . .	367
Simultaneous-write function as part of a backup strategy: Example	371
Keeping client files together using collocation . .	372
The effects of collocation on operations. . . .	374
How the server selects volumes with collocation enabled	376
How the server selects volumes with collocation disabled	378
Collocation on or off settings	378
Collocation of copy storage pools and active-data pools	379
Planning for and enabling collocation	380
Reclaiming space in sequential-access storage pools	382
Reclaiming volumes with the most reclaimable space	383
Starting reclamation manually or in a schedule	383
Optimizing drive usage using multiple concurrent reclamation processes	384
Reclaiming volumes in a storage pool with one drive	385
Reducing the time to reclaim tape volumes with high capacity	386
Reclamation of write-once, read-many (WORM) media	386
Controlling reclamation of virtual volumes . .	386
Reclaiming copy storage pools and active-data pools	387
How collocation affects reclamation	391
Estimating space needs for storage pools	392
Estimating space requirements in random-access storage pools	392

Estimating space needs in sequential-access storage pools	394
Monitoring storage-pool and volume usage . . .	394
Monitoring space available in a storage pool	394
Monitoring the use of storage pool volumes . .	397
Monitoring migration processes	405
Monitoring the use of cache space on disk storage	408
Obtaining information about the use of storage space	409
Moving data from one volume to another volume	413
Data movement within the same storage pool	414
Data movement to a different storage pool . .	415
Data movement from offsite volumes in copy storage pools or active-data pools	415
Moving data	416
Moving data belonging to a client node	419
Moving data in all file spaces belonging to one or more nodes	419
Moving data in selected file spaces belonging to a single node	420
Obtaining information about data-movement processes	421
Troubleshooting incomplete data-movement operations	421
Renaming storage pools	422
Defining copy storage pools and active-data pools	422
Example: Defining a copy storage pool	424
Properties of primary, copy, and active-data pools	424
Copying active versions of client backup data to active-data pools	426
Selection for active file versions	426
Deleting storage pools	427
Deleting storage pool volumes	428
Deleting empty storage pool volumes	428
Deleting storage pool volumes that contain data	429

Part 3. Managing client operations 431

Chapter 11. Adding client nodes . . . 433

Overview of clients and servers as nodes	433
Installing client node software.	434
Registering nodes with the server	434
Accepting default closed registration or enabling open registration	435
Registering nodes with client options sets . . .	437
Registering a network-attached storage file server as a node	437
Registering a source server as a node on a target server	438
Registering an API to the server	438
Connecting nodes with the server	439
Required client options	439
UNIX and Linux client options	440
Updating the password for scheduling operations	440
Creating or updating a client options file	440
Using a text editor to create or configure a client options file	441

Using the client configuration wizard to create or update a client options file	441
Comparing network-attached nodes to local nodes	441
Adding clients through the administrative command line client	442
Enabling open registration	442
Example: registering three client nodes using the administrative command line.	442

Chapter 12. Managing client nodes 445

Managing nodes	445
Managing client nodes across a firewall	446
Updating client node information	448
Automatic deployment feature for the backup-archive client.	448
Renaming client nodes	449
Locking and unlocking client nodes	449
Deleting client nodes	450
Consolidating multiple clients under a single client node name	450
Displaying information about client nodes.	453
Overview of remote access to web backup-archive clients	455
Managing client access authority levels.	456
Managing file spaces	459
Defining client nodes and file spaces	460
Supporting Unicode-enabled clients	462
Displaying information about file spaces	471
Moving data for a client node	472
Deleting file spaces	472
Managing client option files	473
Creating client option sets on the server	473
Managing client option sets	475
Managing IBM Tivoli Storage Manager sessions	476
Displaying information about IBM Tivoli Storage Manager sessions	476
Canceling an IBM Tivoli Storage Manager session	477
When a client session is automatically canceled	478
Disabling or enabling access to the server	479
Managing client restartable restore sessions	480

Chapter 13. Implementing policies for client data. 483

Basic policy planning.	483
Reviewing the standard policy	484
Getting users started	485
Changing policy	486
File expiration and expiration processing	486
How Tivoli Storage Manager selects files for policy operations	487
Incremental backup	487
Selective backup	489
Logical volume backup	490
Archive	490
Automatic migration from a client node	491
Creating your own policies.	492
Defining and updating a policy domain	493
Managing backup copy groups	494
Defining and updating an archive copy group	500

Policy set validation and activation	502
Example: Sample policy objects	503
Example: Create a new policy	506
Policy configuration scenarios	507
Configuring policy for direct-to-tape backups	508
Configuring policy for Tivoli Storage Manager application clients	509
Policy for logical volume backups	509
Configuring policy for NDMP operations	510
Configuring policy for LAN-free data movement	511
Policy for Tivoli Storage Manager servers as clients	513
Setting policy to enable point-in-time restore for clients	513
Running expiration processing to delete expired files	514
Running expiration processing automatically	514
Using commands to control expiration processing	515
Additional expiration processing with disaster recovery manager	515
Protection and expiration of archive data	516
Data retention protection	516
Deletion hold	517
Protecting data using the NetApp SnapLock licensed feature.	518
Reclamation and the SnapLock feature	519
Set up SnapLock volumes as Tivoli Storage Manager WORM FILE volumes	523
Distributing policy using enterprise configuration	524

Chapter 14. Managing data for client nodes. 525

Validating node data	525
Performance considerations for data validation	526
Validating node data during a client session	526
Encrypting data on tape.	526
Choosing an encryption method	527
Changing your encryption method and hardware configuration	528
Securing sensitive client data	529
Setting up shredding	530
Ensuring that shredding is enforced.	531
Creating and using client backup sets	533
Generating client backup sets on the server	534
Restoring backup sets from a backup-archive client	538
Moving backup sets to other servers.	538
Managing client backup sets	539
Enabling clients to use subfile backup	542
Setting up clients to use subfile backup.	543
Managing subfile backups	543
Archiving data	544
Archive operations overview	545
Managing storage usage for archives	545

Chapter 15. Scheduling operations for client nodes 549

Prerequisites to scheduling operations	549
Scheduling a client operation	550

Defining client schedules	551
Associating client nodes with schedules	552
Starting the scheduler on the clients	552
Displaying schedule information	553
Checking the status of scheduled operations	553
Creating schedules for running command files	554
Updating the client options file to automatically generate a new password	555
Configuring the scheduler to run under the site-server account.	555
Overview of the Tivoli Storage Manager scheduler running as a Windows service.	556

Chapter 16. Managing schedules for client nodes 559

Managing IBM Tivoli Storage Manager schedules	559
Adding new schedules	559
Copying existing schedules.	560
Modifying schedules	560
Deleting schedules	560
Displaying information about schedules	561
Managing node associations with schedules	561
Adding new nodes to existing schedules	562
Moving nodes from one schedule to another	562
Displaying nodes associated with schedules	562
Removing nodes from schedules	563
Managing event records.	563
Displaying information about scheduled events	563
Managing event records in the server database	565
Managing the throughput of scheduled operations	566
Modifying the default scheduling mode	566
Specifying the schedule period for incremental backup operations.	569
Balancing the scheduled workload for the server	569
Controlling how often client nodes contact the server	571
Specifying one-time actions for client nodes	573
Determining how long the one-time schedule remains active	573

Part 4. Maintaining the server . . . 575

Chapter 17. Managing the storage environment from the Operations Center 577

Operations Center overview	577
Alert monitoring overview	578
Configuration tasks for alert monitoring	579
Opening the Operations Center	580
Changing the Operations Center configuration	581
Changing the hub server	581
Removing a spoke server	581
Restoring the configuration to the preconfigured state	582
Starting and stopping the web server	583
Restarting the initial configuration wizard.	584
Setting the language of daily email reports	585

Chapter 18. Managing server operations. 587

Licensing Tivoli Storage Manager.	587
License registration	588
License compliance	589
Role of processor value units in assessing licensing requirements	590
Estimating processor value units	593
Collecting processor value unit information in a VMware host environment	595
Starting the Tivoli Storage Manager server	596
Starting the server on Windows	596
Running multiple server instances on a single system	600
Halting the server.	601
Moving the Tivoli Storage Manager server to another system.	602
Date and time on the server	603
Managing server processes	603
Requesting information about server processes	604
Canceling server processes	604
Preempting operations	605
Changing names in Tivoli Storage Manager	607
Setting the server name	607
Changing the host name for a Tivoli Storage Manager server.	607
Add or update server options	608
Add or update a server option without restarting the server	609
Deleting information about volume history	609
Getting help on commands and error messages	610

Chapter 19. Automating server operations. 611

Basic administrative command schedules	612
Defining the schedule	612
Verifying the schedule	613
Schedule parameters	613
Scheduling commands to run by using classic or enhanced command schedules.	615
Copying schedules	616
Deleting schedules	617
Scheduled event records.	617
Querying events	617
Removing event records from the database	618
Tivoli Storage Manager server scripts	618
Defining a server script	619
Managing server scripts	623
Running a server script	627
Administrative client macros	627
Writing commands in a macro.	628
Writing comments in a macro	629
Including continuation characters in a macro	629
Including substitution variables in a macro	630
Running a macro	630
Command processing in a macro.	631

Chapter 20. Managing the database and recovery log 633

Database and recovery log overview	633
--	-----

Database: Overview	634
Connecting the server to the database with TCP/IP	635
Monitoring the database and recovery log	636
Recovery log management	638
Capacity planning	641
Estimating database space requirements	641
Estimating recovery log space requirements	645
Disk space requirements for the server database and recovery log	658
Monitoring space utilization for the database and recovery logs	659
Increasing the size of the database	660
Manually redistributing data and reclaiming space after you add directories to the database	663
Reducing the size of the database	664
Reducing the size of the database for V7.1 servers	665
Reducing the size of the database for all other servers	665
Table and index reorganization schedules	666
Restrictions to table and index reorganization	667
Scheduling table or index reorganization	668
Reorganizing tables offline	669
Locating space to reorganize indexes and tables offline	671
Managing logs for the database	671
Increasing the size of the active log	671
Reducing the size of the active log	672
Compressing archive logs	672
Adding optional logs after server initialization	673
Specifying alternative locations for database log files	673
Moving the database and recovery log on a server	676
Moving both the database and recovery log	676
Moving only the database	677
Moving only the active log, archive log, or archive failover log	677
Transaction processing	678
Files moved as a group between client and server	679

Chapter 21. Managing a network of Tivoli Storage Manager servers 681

Concepts for managing server networks	681
Enterprise configuration	682
Command routing	683
Central monitoring for the Tivoli Storage Manager server	683
Data storage on another server	684
Examples: management of multiple Tivoli Storage Manager servers	684
Enterprise-administration planning	686
Setting up communications among servers	686
Setting up communications for enterprise configuration and enterprise event logging	686
Setting up communications for command routing	690
Updating and deleting servers	694
Setting up enterprise configurations	695
Enterprise configuration scenario	696

Creating the default profile on a configuration manager	700
Creating and changing configuration profiles	701
Getting information about profiles	708
Subscribing to a profile	711
Refreshing configuration information	715
Managing problems with configuration refresh	716
Returning managed objects to local control	716
Setting up administrators for the servers	717
Managing problems with synchronization of profiles	717
Switching a managed server to a different configuration manager	718
Deleting subscribers from a configuration manager	718
Renaming a managed server	719
Completing tasks on multiple servers	719
Managing multiple servers from a web-based interface	719
Routing commands	720
Setting up server groups	722
Querying server availability	726
Storing data on another server as virtual volumes	726
Setting up source and target servers for virtual volumes	728
Performance limitations for virtual volume operations	729
Performing operations at the source server	730
Reconciling virtual volumes and archive files	733

Chapter 22. Exporting and importing data 735

Reviewing data that can be exported and imported	735
Exporting restrictions	736
Deciding what information to export	736
Deciding when to export	737
Exporting data directly to another server	738
Options to consider before you export data	739
Preparing to export to another server for immediate import	742
Monitoring the server-to-server export process	744
Exporting administrator information to another server	745
Exporting client node information to another server	745
Exporting policy information to another server	746
Exporting server data to another server	746
Exporting and importing data by using sequential media volumes	747
Previewing data export or import	747
Planning for sequential media used to export data	748
Exporting tasks	749
Importing data from sequential media volumes	752
Monitoring export and import processes	763
Exporting and importing data from virtual volumes	767

Part 5. Monitoring operations . . . 769

Chapter 23. Daily monitoring from the Operations Center	771
--	------------

Chapter 24. Reporting and monitoring with Tivoli Monitoring for Tivoli Storage Manager 773

Types of information to monitor with Tivoli	
Enterprise Portal workspaces	774
Monitoring operations daily with Tivoli Monitoring for Tivoli Storage Manager	778
Monitoring Tivoli Storage Manager real-time data	780
Viewing historical data and running reports	781
Cognos Business Intelligence	781
Cognos status and trend reports	782
Create custom Cognos reports.	790
Scheduling Cognos reports to be emailed	790
Sharing Cognos Reports	791
Modifying the IBM Tivoli Monitoring environment file to customize agent data collection	793
IBM Tivoli Monitoring reporting queries	794
Backing up and restoring Tivoli Monitoring for Tivoli Storage Manager	796
Backing up Tivoli Monitoring for Tivoli Storage Manager	797
Restoring Tivoli Monitoring for Tivoli Storage Manager	810

Chapter 25. Command-based monitoring methods 819

Using IBM Tivoli Storage Manager queries to display information	819
Requesting information about IBM Tivoli Storage Manager definitions	819
Requesting information about client sessions	820
Requesting information about server processes	821
Requesting information about server settings	822
Querying server options.	822
Using SQL to query the IBM Tivoli Storage Manager database	823
Using SELECT commands	823
Using SELECT commands in Tivoli Storage Manager scripts	826
Querying the SQL activity summary table	827
Creating output for use by another application	828
Using the Tivoli Storage Manager activity log	828
Requesting information from the activity log	829
Setting a retention period for the activity log	830
Setting a size limit for the activity log	830
Monitoring Tivoli Storage Manager accounting records	831
Logging IBM Tivoli Storage Manager events to receivers	832
Enabling and disabling events.	833
Beginning and ending event logging	834
Logging events to the IBM Tivoli Storage Manager server console and activity log	834
Logging events to a file exit and a user exit	835
Logging events to the Tivoli Enterprise Console	836
Logging events to an SNMP manager	840
Logging events to the Windows event log	845

Enterprise event logging: logging events to another server	845
Querying event logging	847
User exit and file exit receivers	847

Part 6. Protecting the server . . . 853

Chapter 26. Managing Tivoli Storage Manager security 855

Securing communications	855
Secure Sockets Layer and Transport Layer Security communication	856
Administrative authority and privilege classes	857
Setting up Secure Sockets Layer and Transport Layer Security	859
Securing the server console.	869
Managing access to the server and clients	870
Managing Tivoli Storage Manager administrator IDs	870
Managing passwords and logon procedures	876
Configuring a directory server for password authentication	879
Setting the policy for an LDAP-authenticated password.	881
Configuring the Tivoli Storage Manager server to authenticate passwords with an LDAP directory server	882
Registering nodes and administrator IDs to authenticate passwords with an LDAP directory server	883
Updating nodes and administrator IDs to authenticate passwords with a directory server	884
Determining which nodes and administrator IDs are configured to authenticate with an LDAP server	885
Modifying the default password expiration period for passwords that are managed by the Tivoli Storage Manager server.	885
Scenarios for authenticating passwords.	888
Enabling unified logon with backup-archive clients	890

Chapter 27. Protecting and recovering the server infrastructure and client data 893

Protecting the database and infrastructure setup files	894
Backing up the server database	894
Protecting infrastructure setup files	902
Client data protection	907
Protecting the data that is in primary storage pools	907
Auditing storage pool volumes	912
Fixing damaged files	921
Scenario: Protecting the database and storage pools	923
Recovering the database and client data	925
Restoring the database	926
Restoring storage pools and storage pool volumes	932

Restoring and recovering an LDAP server	939
Audit the LDAP server	940
Restoring to a point-in-time in a shared library environment.	941
Restoring to a point-in-time for a library manager server.	941
Restoring to a point-in-time of a library client server	941
Example: Recovering to a point-in-time.	942

Chapter 28. Replication of client node data 945

Automatic failover for data recovery overview	946
Source and target node-replication servers.	947
Replication server configurations	947
Policy management for node replication	949
Node replication processing	950
Planning for node replication	961
Determining server database requirements for node replication	962
Estimating the total amount of data to be replicated.	963
Estimating network bandwidth required for replication	964
Calculating the time that is required for replication	964
Selecting a method for the initial replication	965
Scheduling incremental replication after the initial replication	967
Node replication restrictions	968
Task tips for node replication	971
Change replication rules.	971
Add and remove client nodes for replication	971
Manage replication servers	972
Validate a configuration and preview results	973
Manage replication processing.	973
Monitor replication processing and verify results	974
Setting up the default replication configuration	975
Step 1: Setting up server-to-server communications	976
Step 2: Specifying a target replication server	979
Step 3: Configuring client nodes for replication	980
Customizing a node replication configuration	982
Changing replication rules	982
Scenario: Converting to node replication from import and export operations	988
Adding and removing client nodes for replication	989
Managing source and target replication servers	992
Verifying a node replication setup before processing	995
Managing data replication	996
Replicating data by command	996
Controlling throughput for node replication	1001
Disabling and enabling node replication	1004
Managing replicated client-node data using the target replication server policies.	1008
Purging replicated data in a file space.	1011
Replicating client node data after a database restore	1011

Monitoring node replication processing and verifying results	1013
Displaying information about node replication settings	1013
Displaying information about running and completed node replication processes	1014
Displaying the activity log of a replication process	1014
Displaying summary records of replication processes	1015
Measuring the effectiveness of a replication configuration	1015
Measuring the effects of data deduplication on node replication processing	1015
Retaining replication records	1016
Recovering and storing client data after a disaster	1017
Converting client nodes for store operations on a target replication server	1017
Removing a node replication configuration	1018

Chapter 29. Configuring clustered environments 1019

Clustered environment overview	1019
Cluster nodes	1020
Configuring a Windows clustered environment	1020
Microsoft Failover Cluster environment overview	1021
Tape failover for nodes in a cluster.	1022
Planning for a clustered environment	1024
Setting up Tivoli Storage Manager in a Microsoft Failover Cluster.	1027
Maintaining the clustered environment	1029

Chapter 30. Disaster recovery manager 1033

Preparing for disaster recovery	1034
Disaster recovery manager checklist	1036
Managing the Disaster Recovery Manager tasks	1041
The disaster recovery plan file	1043
Breaking out a disaster recovery plan file.	1043
Structure of the disaster recovery plan file	1046
Example disaster recovery plan file.	1049
Querying defaults for the disaster recovery plan file	1067
Specifying defaults for the disaster recovery plan file.	1067
Specifying defaults for offsite recovery media management	1070
Specifying recovery instructions for your site	1072
Specifying information about your server and client node machines	1074
Specifying recovery media for client machines	1078
Creating and storing the disaster recovery plan	1079
Storing the disaster recovery plan locally.	1080
Storing the disaster recovery plan on a target server	1081
Disaster recovery plan environment	1081
Managing disaster recovery plan files stored on target servers	1083

Displaying information about recovery plan files	1083
Displaying the contents of a recovery plan file	1084
Restoring a recovery plan file	1084
Expiring recovery plan files automatically	1085
Deleting recovery plan files manually	1085
Moving backup media for disaster recovery operations	1086
Moving copy storage pool and active-data pool volumes offsite	1088
Moving copy storage pool and active-data pool volumes onsite	1090
Recovering from a disaster	1091
Recovering the server scenario	1092
Recovering the client scenario	1095
Recovering with different hardware at the recovery site	1098
Automated SCSI library at the original and recovery sites	1098
Automated SCSI library at the original site and a manual SCSI library at the recovery site	1099
Managing copy storage pool volumes and active-data pool volumes at the recovery site	1100
 Chapter 31. Integrating disaster recovery manager and node replication into your disaster recovery strategy	 1103
Plan for a disaster recovery strategy	1104
Tier 0: No disaster recovery capability	1105
Tier 1: Offsite vaulting from a single production site	1105
Tier 2: Offsite vaulting with a recovery site	1106
Tier 3: Electronic vaulting of critical data	1106
Tier 4: Active data management at peer sites	1107
Tier 5: Synchronous replication	1108
Tier 6: Synchronous replication with coupling or clustering applications	1109

Part 7. Appendixes. 1111

Appendix A. External media management interface description . . 1113

CreateProcess call.	1113
Processing during server initialization	1114
Processing for mount requests	1114
Processing for release requests	1115
Processing for batch requests	1115
Error handling.	1116
Begin batch request	1116
End batch request	1116
Volume query request	1117
Initialization requests	1118
Volume eject request.	1118
Volume release request	1119
Volume mount request	1120
Volume dismount request	1123

Appendix B. User exit and file exit receivers 1125

Sample user-exit declarations.	1125
Sample user exit program	1127
Readable text file exit (FILETEXTEXIT) format	1128

Appendix C. Accessibility features for the Tivoli Storage Manager product family 1131

Notices	1133
Trademarks.	1135
Privacy policy considerations.	1135

Glossary 1137

Index 1139

About this publication

IBM® Tivoli® Storage Manager is a client/server program that provides storage management solutions to customers in a multi-vendor computer environment. Tivoli Storage Manager provides an automated, centrally scheduled, policy-managed backup, archive, and space-management facility for file servers and workstations.

This publication provides concept information about Tivoli Storage Manager, in addition to chapters that help you configure, administer, use, and monitor the Tivoli Storage Manager server environment.

Who should read this guide

This guide is intended for anyone who is registered as an administrator for Tivoli Storage Manager. A single administrator can manage Tivoli Storage Manager, or several people can share administrative responsibilities.

You should be familiar with the operating system on which the server resides and the communication protocols required for the client/server environment. You also need to understand the storage management practices of your organization, such as how you are currently backing up workstation files and how you are using storage devices.

Publications

The Tivoli Storage Manager product family includes IBM Tivoli Storage FlashCopy® Manager, IBM Tivoli Storage Manager for Space Management, IBM Tivoli Storage Manager for Databases, and several other storage management products from IBM Tivoli.

To view IBM product documentation, see <http://www.ibm.com/support/knowledgecenter/>.

Conventions used in this guide

- Command to be entered on the Windows command line:
`> dsmadm`
- Command to be entered on the command line of an administrative client:
`query devclass`

In the usage and descriptions for administrative commands, the term characters corresponds to the number of bytes available to store an item. For languages in which it takes a single byte to represent a displayable character, the character to byte ratio is 1 to 1. However, for DBCS and other multi-byte languages, the reference to characters refers only to the number of bytes available for the item and may represent fewer actual characters.

New for IBM Tivoli Storage Manager Version 7.1

Many features in the Tivoli Storage Manager Version 7.1 server are new for previous Tivoli Storage Manager users.

New in this release

New features and other changes, including fixes for problems, are available in the Tivoli Storage Manager Version 7.1.1 server.

Operations Center updates

New features are available in Tivoli Storage Manager Operations Center Version 7.1.1.

The following enhancements were made to the Operations Center for Version 7.1.1:

Navigation, customization, and reporting

You can now complete the following tasks:

- Use improved linking to navigate between pages of the Operations Center more easily
- Use advanced filters to construct custom views of table data
- Bookmark and use shared links to commonly accessed web pages
- Customize the Operations Center login page to include text that you provide
- Configure daily email reports on client coverage and server status
- If you have a Tivoli Storage Manager Suite for Unified Recovery license, compare the amount of data you are managing with what your entitlement allows

Alerts You can now complete the following tasks from the Alerts page:

- Add an alert by specifying the message that triggers the alert
- Select which administrators receive email notifications for an alert
- Change the category for an alert
- Delete an alert definition for a message, so the message no longer triggers an alert

Clients

You can now complete the following tasks from the Clients page:

- View client schedules
- Add client schedules
- Modify client schedules

Client details now include diagnosis information. Use the Diagnosis page to view client errors and recommendations for how to resolve them. You can also view client log messages to help you diagnose problems without accessing the client system.

Services

You can now view the following policy domain details on the Services page:

- Properties of the policy domain, such as the default management class and the retention grace period
- The files and related objects that were examined and expired over the previous two weeks
- The active policy set for the policy domain

Servers

You can now view maintenance schedules from the Servers page.

Storage Pools

You can now complete the following tasks from the Storage Pools page:

- Manually migrate storage pool data
- Manually reclaim storage pool space
- View the following storage pool details:
 - Properties of the storage pool, such as the device class and utilization
 - The storage pool capacity that was used over the previous two weeks
 - Volumes that are assigned to the storage pool
- Edit certain storage pool properties

For more information about these enhancements, see the Operations Center help.

To open the help, hover over the help icon  in the Operations Center menu bar.

Tivoli Monitoring for Tivoli Storage Manager updates

Tivoli Monitoring for Tivoli Storage Manager Version 7.1 includes updated components and a new dashboard to view Cognos® reports.

IBM Tivoli Monitoring for Tivoli Storage Manager includes the following changes in version 7.1:

- You can use the Dashboard Application Services Hub web interface to access Tivoli Common Reporting.
- New Cognos reports are available:
 - Storage pool deduplication savings
 - Disk utilization trends
- The existing BIRT reports that were available in previous releases are available as Cognos reports.
- You can now restrict communications to use the Transport Layer Security (TLS) 1.2 protocol. For your system to be in compliance with the NIST SP800-131A security standard, you must specify `KSK_SSL_DISABLE_LEGACY_TLS=1` in the agent instance environment file.

Related reference:

“Cognos status and trend reports” on page 782

Updates for the Tivoli Storage Manager server component

New features are available in the Tivoli Storage Manager Version 7.1.1 server component.

Recover damaged files from a replication server

With Tivoli Storage Manager Version 7.1.1, you can use node replication processing to recover damaged files. When this feature is enabled, the system detects any damaged files on a source replication server and replaces them with undamaged files from a target replication server.

You can enable this feature for specific client nodes. When you use the **REGISTER NODE** command to define a node, or the **UPDATE NODE** command to update a node, you can specify whether data from damaged files is recovered automatically during the replication process.

In addition to configuring nodes for file recovery, you can override the file recovery setting that is specified for a node. By specifying a parameter on the **REPLICATE NODE** command for a single replication instance, you can start a process that replicates the node and recovers damaged files. Alternatively, you can start a replication process for the sole purpose of recovering damaged files.

To use this feature, you must install Tivoli Storage Manager V7.1.1 on the source and target replication servers, and ensure that file recovery is enabled.

Related tasks:

“Recovering damaged files from a replication server” on page 922

Manage replicated data with policies that are defined on the target replication server

With Tivoli Storage Manager Version 7.1.1, you can use the policies that are defined on the target replication server to manage replicated client-node data independently from the source replication server. In previous releases, client node data on the target replication server was managed by policies on the source replication server.

When this feature is enabled, you can use the policies on the target replication server to complete the following tasks:

- Maintain more or fewer versions of replicated backup files between the source and target replication servers.
- Retain replicated archive files for more or less time on the target replication server than they are being maintained on the source replication server.

If you keep fewer versions of files or retain files for less time on the target replication server, you can reduce the amount of storage that is required for this server.

To use this feature, you must install Tivoli Storage Manager V7.1.1 on the source and target replication servers. Then, you must verify the differences between the policies for client nodes on the source and target replication servers. Finally, you can enable the policies on the target replication server.

Related tasks:

“Enabling the target replication server policies” on page 1010

Restrict SSL protocols to TLS 1.2 or later

With Tivoli Storage Manager Version 7.1.1, you can prevent the use of Secure Sockets Layer (SSL) protocols earlier than TLS 1.2 with the new server option, **SSLDISABLELEGACYTLS**.

The **SSLDISABLELEGACYTLS** option specifies whether to use protocols earlier than Transport Layer Security (TLS) 1.2 for Secure Sockets Layer (SSL) sessions between the server and the backup-archive client or storage agent.

Use offline reorganization of tables and indexes

With Tivoli Storage Manager Version 7.1.1, you can reorganize indexes and tables offline to maintain server stability and improve database performance. To enable this feature, set the **DISABLEREORGTABLE**, **DISABLEREORGINDEX**, and **DISABLEREORGCLEANUPINDEX** server options.

You can specify these server options in the `dsmserv.opt` file to resolve the following issues:

- Delays when you reorganize tables, which prevents reorganization on other tables.
- Server that halts because the active log becomes full during index reorganization.
- Server applications cancel when you use reorganization to resolve deadlocks.

Compress archive logs

With Tivoli Storage Manager Version 7.1.1, you can enable or disable compression of the archive log files that are written to the archive log directory. By compressing the archive log files, you reduce the amount of space that is required to store them.

To enable or disable compression of the archive log files, set the **ARCHLOGCOMPRESS** server option in the `dsmserv.opt` file.

Related tasks:

“Compressing archive logs” on page 672

Compress database backups

With Tivoli Storage Manager Version 7.1.1, you can choose which Tivoli Storage Manager database backups are compressed.

To enable this feature, specify the **COMPRESS** parameter on the **BACKUP DB** or **SET DBRECOVERY** commands.

The size of the Tivoli Storage Manager database has increased with the use of data deduplication. As a result, the space requirements for the database backups also increased. By compressing volumes that are created during database backups, you reduce the amount of space that is required for your database backups.

Verify tape volumes

You can now audit any volume in a tape library by using the **AUDIT LIBVOLUME** command, which is available in Tivoli Storage Manager Version 7.1.1 for some library types and tape drives. When this command is issued, an entire physical tape volume is audited instead of just a storage pool volume.

With the **AUDIT LIBVOLUME** command, you can determine if a volume is intact. The verification process is completed by the tape drive. If errors are detected, you can use the **AUDIT VOLUME** command to fix storage pool volumes on the tape.

For information about supported library types and drives, and details on using the **AUDIT LIBVOLUME** command, see the server reference information.

Validate pages during database backup processing

Tivoli Storage Manager Version 7.1.1 uses IBM DB2[®] database technology to validate database pages during database backup processing.

Best practices for Version 7.1

Learn about best practices that you can implement for the Tivoli Storage Manager Version 7.1 server and client.

Maximum daily capability for data deduplication

You can deduplicate data for a single Tivoli Storage Manager server up to a recommended daily maximum amount of 30 TB, or the amount that is outlined for your blueprint configuration.

The maximum daily amount includes the following processes that are typical of a daily server cycle:

- Ingesting client data on the server
- Deduplicating the client data that is ingested on the server
- Creating a second copy of the data
- Reclaiming data
- Expiring data
- Removing references to extents

You can deduplicate the maximum daily amount of data by using client-side data deduplication with optimized hardware, such as Solid-State Drives for the database, and overlapping of some server processes during a 24-hour workload.

Server startup and setting ulimits

If you do not verify user limits, the server might become unstable or fail to respond. Set the ulimit value as 65536 for the maximum number of open files. Ensure that the system-wide limit is at least the value of the ulimit.

Duplicate identification processes and memory requirements

To get the best performance for your data deduplication processes, you can specify an increased number of duplicate identification processes.

When you create a storage pool for data deduplication, you can now specify 0 - 50 parallel processes for server-side duplicate identification.

You can use additional memory to optimize the frequent access of deduplicate extent information that is stored in the Tivoli Storage Manager database.

Part 1. Tivoli Storage Manager basics

Chapter 1. Tivoli Storage Manager overview

IBM Tivoli Storage Manager provides centralized, automated data protection that can help reduce the risks that are associated with data loss and help manage compliance with data retention and availability requirements.

Tivoli Storage Manager components are shown in Figure 1 and explained in detail, following the image.

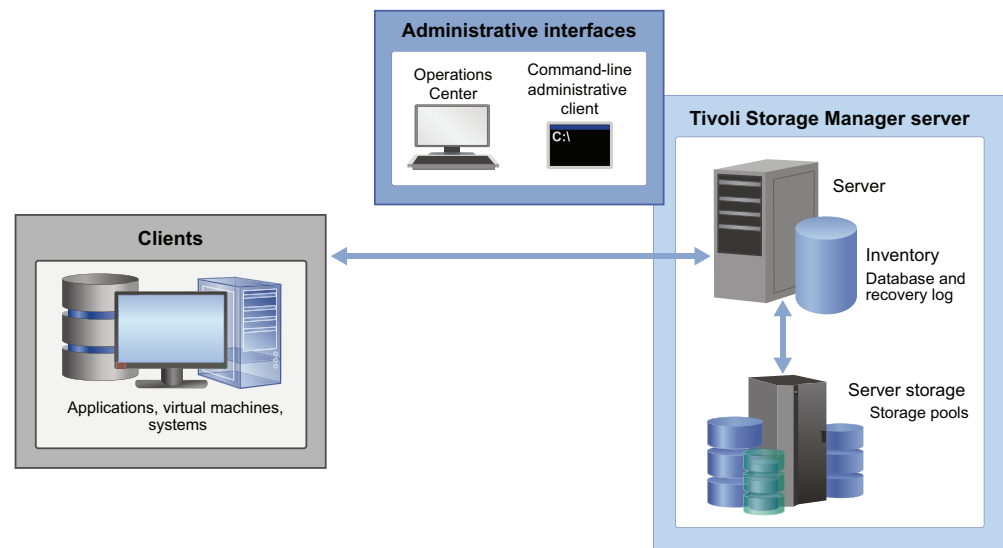


Figure 1. Components of the Tivoli Storage Manager environment

Server

The Tivoli Storage Manager server stores client data to storage media. The server includes an inventory in which Tivoli Storage Manager stores information about the client data that it is protecting.

Administrative interfaces for the server include a web-based interface that is called the Operations Center and a command-line administrative client. The Tivoli Storage Manager server inventory includes the following components, which can be monitored from the Operations Center:

Database

Tivoli Storage Manager saves information about each file, logical volume, or database that it backs up, archives, or migrates. This inventory data is stored in the server database. The server database also includes information about the policy and schedules for data protection services. Client data is stored in a storage pool.

Recovery log

The recovery log consists of the active and archive logs, and other optional logs. These logs are records of database transactions, which can be used for database recovery. If a failure occurs, such as a power outage or

application error, the changes that were made but not committed are rolled back. Then, all committed transactions, which might not yet be written to disk, are redone.

Active log

The active log is a record of the most recent database transactions that are not yet committed.

Archive log

The archive log is a record of the most recent database transactions that are committed but not yet included in a database backup.

Storage

The Tivoli Storage Manager server can write data to hard disk drives, disk arrays and subsystems, stand-alone tape drives, tape libraries, and other forms of random-access and sequential-access storage. The media that the server uses are grouped into storage pools.

Storage devices can be connected directly to the server, or connected through a local area network (LAN) or a storage area network (SAN).

Storage pools

Storage pools are a central Tivoli Storage Manager concept. Understanding them is key to effectively managing your Tivoli Storage Manager server environment. Storage pools connect the Tivoli Storage Manager policy hierarchy to the storage devices where client data is stored. A storage pool represents a set of volumes of the same media type, for example, disk or tape volumes.

Tivoli Storage Manager stores all managed data objects in storage pools. You can organize storage pools into one or more hierarchical structures, and each storage hierarchy can span multiple Tivoli Storage Manager server instances.

To obtain the best value from your storage investment, you must store data appropriately in the storage pool hierarchy. A disk pool is often first in the hierarchy and can be followed by a tape pool. Tivoli Storage Manager supports many device and media types for sequential access storage.

Clients

Tivoli Storage Manager clients or *client nodes* protect data by sending it to a Tivoli Storage Manager server. Client software must be installed on the client system, and the client must be registered with the server.

A client node is usually equivalent to a computer, such as a backup-archive client that is installed on a workstation for file system backups. A file space is a group of client files that are stored as a logical unit in server storage.

Multiple nodes can be installed on a single computer, as in the case of a Microsoft SQL server that contains both an application client for SQL database backups and a backup-archive client for file system backups.

You can define the following clients for use with Tivoli Storage Manager:

Applications

The following clients are application clients. Data that is being protected for these clients is structured data that requires interaction with backup interfaces specific to the application:

- Tivoli Storage Manager for Enterprise Resource Planning
- Tivoli Storage FlashCopy Manager
- Tivoli Storage Manager for Databases
- Tivoli Storage Manager for Mail
- Tivoli Storage Manager for Virtual Environments

This excludes VMware vSphere clients, which are classified as system clients.

A virtual machine that is backed up using application client software that is installed on the virtual machine is also classified as an application client.

Virtual machines

A virtual machine is an individual guest that is hosted within a hypervisor. Each virtual machine is represented as a Tivoli Storage Manager file space. Backups for multiple virtual machines are consolidated together under a common node. Each virtual machine is stored under a separate file space for this common node.

A client is considered a virtual machine when it is protected by either Data Protection for VMware or Data Protection for Microsoft Hyper-V.

Systems

All other clients, for example, backup-archive and API clients, are classified as system clients. These clients back up unstructured data that is contained within files and directories.

System clients also include the following items:

- A Tivoli Storage Manager source server in a server-to-server virtual volume configuration
- A virtual machine that is backed up using backup-archive client software that is installed on the virtual machine

Related concepts:

Chapter 2, “Tivoli Storage Manager server concepts,” on page 21

Data protection services

Tivoli Storage Manager provides the following data protection services: backup and restore, archive and retrieve, and migrate and recall. These data protection services are implemented through policy domains that are defined on the Tivoli Storage Manager server.

Backup and restore

A backup creates an extra copy of a data object that can be used for recovery if the original copy is lost or destroyed. A data object can be a file, a directory, or a user-defined data object, such as a database table.

Tivoli Storage Manager uses a progressive incremental backup method. After a first full backup, only changed data is moved. This method provides the following benefits:

- Reduces data redundancy

- Uses less network bandwidth
- Requires less storage pool space

To further reduce storage capacity requirements, Tivoli Storage Manager includes server-side data deduplication. To reduce network bandwidth, client-side data deduplication is also available.

Tivoli Storage Manager also works with storage hardware to use other data reduction techniques such as subfile backup, client compression, and device compression.

When you restore an object, you copy it back from the server to the client. You can restore a file, a directory, or all data on a computer.

Archive and retrieve

The archive and retrieve service is for data that must be stored for a long time, such as for regulatory compliance. You might choose to store this data on a tape device, which often provides cheaper storage.

Archiving a file copies it and stores it for a specified time to preserve the data for later use or for records. You can request that files and directories be copied for long-term storage on media that is controlled by Tivoli Storage Manager. You can also specify that the original files be erased from the client after the files are archived.

Retrieving a file copies it from a storage pool to a client node. The retrieve operation does not affect the archive copy in the storage pool.

Migrate and recall

The migration and recall service is for space management on client systems. You might choose to store this data in a VTL so that files can be quickly recalled when they are needed.

Space management is the process of maintaining sufficient free storage space on a local file system by migrating files to server storage. The files can then be recalled to the client node on demand, either automatically or selectively. The goal of space management is to maximize available media capacity for new data and to minimize access time to data.

Related concepts:

Chapter 13, “Implementing policies for client data,” on page 483

Related tasks:

“Policy-based data management” on page 36

Data protection operations

Tivoli Storage Manager provides different backup, archive, and restore operations, that allow you to select the right protection for the situation.

Table 1 provides details about backup and archive protection options and how they can help you meet goals for data management.

Table 1. Examples of meeting your goals with Tivoli Storage Manager

For this goal...	Complete this task...
Back up files that are on a user's workstation.	Use the backup-archive client to perform incremental or selective backups.
Back up data for an application that runs continuously, such as a database application (for example, DB2 or Oracle) or a mail application, such as Lotus® Domino®.	Use the appropriate application client. For example, use Tivoli Storage Manager for Mail to protect the LotusDomino application.
Protect virtual machines that are running VMware or Microsoft Hyper-V.	Use Tivoli Storage Manager for Virtual Environments: Data Protection for VMware or Tivoli Storage Manager for Virtual Environments: Data Protection for Microsoft Hyper-V.
Use disk hardware that is capable of data snapshots.	Use the appropriate component in the IBM Tivoli Storage FlashCopy Manager product, such as System Storage® Archive Manager for IBM Enterprise Storage Server® for DB2.
Back up a file server.	Use the backup-archive client to perform incremental backups or selective backups. If the file server is a network-attached storage file server that is supported, you can have the server use NDMP to perform image backups. This support is available in the Tivoli Storage Manager Extended Edition product.
Make restore media portable, or make restores easier to perform remotely.	Use the backup-archive client to perform incremental backups, and then generate backup sets by using the Tivoli Storage Manager server. A backup set is a collection of backed-up data from one client, which is stored and managed as a single object on specific media in server storage
Back up the entire contents of a single logical volume, instead of backing up individual files.	Use the backup-archive client to perform logical volume backups (also called image backups).
Set up records retention to meet legal or other long-term storage needs.	Use the backup-archive client to occasionally archive data. To ensure that the archiving occurs at the required intervals, use central scheduling.
Create an archive for a backup-archive client, from data that is already stored for backup.	Use the backup-archive client to perform incremental backups, and then generate a backup set by using the Tivoli Storage Manager server. Tip: This process is also called <i>instant archive</i> .

Table 1. Examples of meeting your goals with Tivoli Storage Manager (continued)

For this goal...	Complete this task...
Restore data to a point in time.	<p>Use the backup-archive client to regularly perform incremental backups, either manually or automatically through schedules. Then do one of the following:</p> <ul style="list-style-type: none"> • Set up policy to ensure that data is preserved in server storage long enough to provide the required service level. • Create backup sets for the backup-archive client regularly. Set the retention time to provide the required service level.
Save a set of files and directories before you make significant changes to them.	<p>Use the backup-archive client to archive the set of files and directories.</p> <p>If this kind of protection is needed regularly, consider creating backup sets from backup data that is already stored for the client. Using backup sets instead of frequent archive operations can reduce the amount of metadata that must be stored in the server database.</p>
Manage a set of related files, which are not in the same file system, with the same backup, restore, and server policies.	<p>Use the backup group command on the backup-archive client to create a logical grouping of a set of files, which can be from one or more physical file systems. The group backup process creates a virtual file space in server storage to manage the files because the files might not be from one file system on the client. Actions such as policy binding, migration, expiration, and export are applied to the group as a whole.</p> <p>See the <i>Backup-Archive Clients Installation and User's Guide</i> for details.</p>
Make backups that are not apparent to users.	Use the backup-archive client with centrally scheduled backups that run during off-shift hours. Monitor the schedule results.
Reduce the load on the LAN by moving backup data over the SAN.	Use LAN-free data movement or, for supported network-attached storage (NAS) file servers, use NDMP operations.

Schedule the backups of client data to help enforce the data management policy that you establish. If you schedule the backups, rather than rely on the clients to perform the backups, the policy that you establish is followed more consistently.

The standard backup method that Tivoli Storage Manager uses is called *progressive incremental* backup. It is a unique and efficient method for backup.

Table 2 on page 9 summarizes the client operations that are available. In all cases, the server tracks the location of the backup data in its database. Policy that you set determines how the backup data is managed.

Table 2. Summary of client operations

	Description	Usage	Restore options	For more information
Progressive incremental backup	<p>The standard method of backup that is used by Tivoli Storage Manager. After the first, full backup of a client system, incremental backups are done. Incremental backup by date is also available.</p> <p>No additional full backups of a client are required after the first backup.</p>	Helps ensure complete, effective, policy-based backup of data. Eliminates the need to retransmit backup data that does not change during successive backup operations.	<p>The user can restore just the version of the file that is needed.</p> <p>Tivoli Storage Manager does not need to restore a base file followed by incremental backups. This method reduces time and requires fewer tape mounts. Also, less data is transmitted over the network.</p>	See “Incremental backup” on page 487.
Selective backup	Backup of files that are selected by the user, regardless of whether the files have changed since the last backup.	Allows users to protect a subset of their data independent of the normal incremental backup process.	<p>The user can restore just the version of the file that is needed.</p> <p>Tivoli Storage Manager does not need to restore a base file followed by incremental backups. This method reduces time and requires fewer tape mounts. Also, less data is transmitted over the network.</p>	See “Selective backup” on page 489.
Adaptive subfile backup	<p>A backup method that backs up only the parts of a file that have changed since the last backup. The server stores the base file (the complete initial backup of the file) and subsequent subfiles (the changed parts) that depend on the base file.</p> <p>The process works with either the standard progressive incremental backup or with selective backup.</p> <p>Applicable to clients on Windows systems.</p>	Maintains backups of data while minimizing connect time and data transmission for the backup of mobile and remote users.	The base file plus a maximum of one subfile is restored to the client.	See “Enabling clients to use subfile backup” on page 542.

Table 2. Summary of client operations (continued)

	Description	Usage	Restore options	For more information
Journal-based backup	Aids all types of backups (progressive incremental backup, selective backup, adaptive subfile backup) by basing the backups on a list of changed files. The list is maintained on the client by the journal engine service of IBM Tivoli Storage Manager.	Reduces the amount of time that is required for backup. The files eligible for backup are known before the backup operation begins. Applicable to clients on AIX®, Linux, and Windows systems, except Windows 2003 64-bit IA64.	Journal-based backup has no effect on how files are restored. Restore operations are dependent on the type of backup that is performed.	See the <i>Backup-Archive Clients Installation and User's Guide</i> .
Image backup	Full volume backup. Nondisruptive, online backup is possible for Windows clients by using the Tivoli Storage Manager snapshot function.	Allows backup of an entire file system or raw volume as a single object. Can be selected by backup-archive clients on Linux, UNIX, and Windows systems.	The entire image is restored.	See "Policy for logical volume backups" on page 509.
Image backup with differential backups	Full volume backup, which can be followed by subsequent differential backups.	Used only for the image backups of NAS file servers, performed by the server using NDMP operations.	The full image backup plus a maximum of one differential backup are restored.	See Chapter 9, "Using NDMP for operations with NAS file servers," on page 219.
Backup using hardware snapshot capabilities	A method of backup that uses the capabilities of IBM Enterprise Storage Server FlashCopy and EMC TimeFinder to make copies of volumes that are used by database servers. The Tivoli Storage FlashCopy Manager product then uses the volume copies to back up the database volumes.	Implements high-efficiency backup and recovery of business-critical applications while virtually eliminating backup-related downtime or user disruption on the database server.	Details depend on the hardware.	See the documentation for Tivoli Storage FlashCopy Manager at http://www.ibm.com/support/knowledgecenter/SS36V9 .
Group backup	A method that backs up files that you specify as a named group. The files can be from one or more file spaces. The backup can be a full or a differential backup. Applicable to clients on Linux, UNIX, and Windows systems.	Creates a consistent point-in-time backup of a group of related files. The files can be in different file spaces on the client. All objects in the group are assigned to the same management class. The server manages the group as a single logical entity, and stores the files in a virtual file space in server storage. A group can be included in a backup set.	The user can select to restore the entire group or selected members of the group. The user can restore just the version of the file that is needed.	See the <i>Backup-Archive Clients Installation and User's Guide</i> .

Table 2. Summary of client operations (continued)

	Description	Usage	Restore options	For more information
Archive	The process creates a copy of files and stores them for a specific time.	Use for maintaining copies of vital records for legal or historical purposes. Note: If you need to frequently create archives for the same data, consider using instant archive (backup sets) instead. Frequent archive operations can create a large amount of metadata in the server database resulting in increased database growth and decreased performance for server operations such as expiration. Frequently, you can achieve the same objectives with incremental backup or backup sets. Although the archive function is a powerful way to store inactive data with fixed retention, it should not be used on a frequent and large-scale basis as the primary backup method.	The selected version of the file is retrieved on request.	See “Archive” on page 490.
Instant archive	The process creates a backup set of the most recent versions of the files for the client by using files already in server storage from earlier backup operations.	Use when portability of the recovery media or rapid recovery of a backup-archive client is important. Also use for efficient archiving.	The files are restored directly from the backup set. The backup set resides on media that can be mounted on the client system, such as a CD, a tape drive, or a file system. The Tivoli Storage Manager server does not have to be contacted for the restore process, so the process does not use the network or the server.	See “Creating and using client backup sets” on page 533.

Related tasks:

Chapter 15, “Scheduling operations for client nodes,” on page 549

Progressive incremental backups

The terms *differential* and *incremental* are often used to describe backups. The standard method of backup used by Tivoli Storage Manager is progressive incremental.

The terms differential and incremental have the following meanings:

- A differential backup backs up files that have changed since the last full backup.
 - If a file changes after the full backup, the changed file is backed up again by every subsequent differential backup.
 - All files are backed up at the next full backup.
- An incremental backup backs up only files that have changed since the last backup, whether that backup was a full backup or another incremental backup.
 - If a file changes after the full backup, the changed file is backed up only by the next incremental backup, not by all subsequent incremental backups.
 - If a file has not changed since the last backup, the file is not backed up.

Tivoli Storage Manager takes incremental backup one step further. After the initial full backup of a client, no additional full backups are necessary because the server keeps track of when files need to be backed up. Only files that change are backed up, and then entire files are backed up, so that the server does not need to reference base versions of the files. This means savings in resources, including the network and storage.

If you choose, you can force full backup by using the selective backup function of a client in addition to the incremental backup function. You can also choose to use adaptive subfile backup, in which the server stores the base file (the complete initial backup of the file) and subsequent subfiles (the changed parts) that depend on the base file.

Related reference:

“Data protection operations” on page 7

Storage-pool and server-inventory backups

Tivoli Storage Manager protects client data through storage pool and server inventory back ups.

Client backup, archive, and space-managed data in primary storage pools can be backed up to copy storage pools. You can also copy active versions of client backup data from primary storage pools to active-data pools. The server can automatically access copy storage pools and active-data pools to retrieve data.

The server inventory, which includes the database and recovery log, is automatically backed up to protect critical data. The server inventory is key to the server's ability to track client data in server storage and recover from a disaster.

These backups can become part of a disaster recovery plan, created automatically by the disaster recovery manager.

If you enable node replication, client data can be replicated from one server, a source replication server to another server, a target replication server. Node replication allows clients to recover data from the target server if the source server is unavailable.

Related concepts:

Chapter 28, “Replication of client node data,” on page 945

“Client data protection” on page 907

“Protecting the database and infrastructure setup files” on page 894

Related tasks:

Chapter 30, “Disaster recovery manager,” on page 1033

How client data is stored

Tivoli Storage Manager policies are rules that determine how client data is stored and managed. The rules include where the data is initially stored, how many backup versions are kept, how long archive copies are kept, and more.

Policy-based data management helps you focus more on the business requirements for protecting data and less on managing storage devices and media. To implement business requirements, which are sometimes called the service level agreement (SLA), you define storage policies.

For example, policy can define the following key data requirements for a business organization:

- The data to back up and archive
- The location for storing the data
- The number of versions of data to retain
- The time period to retain the data in storage

Policy can also be used to migrate data objects automatically from one storage pool to another. For example, you can initially back up data to storage media such as disk so that the data is quickly restorable. During off-peak hours, you can migrate the data to less-expensive media such as tape.

Depending on your business needs, you can have one policy or many. Within a business organization, for example, different departments with different types of data can have their own customized storage management plans.

Administrators define policies on the Tivoli Storage Manager server. Client nodes are assigned to a policy domain. Policies can be updated, and the updates can be retroactively applied to data that is already managed.

Related concepts:

Chapter 13, “Implementing policies for client data,” on page 483

Related tasks:

Chapter 10, “Managing storage pools and volumes,” on page 257

Chapter 20, “Managing the database and recovery log,” on page 633

Tivoli Storage Manager data management process

Tivoli Storage Manager uses policy to store and manage data objects on various types of storage devices and media.

Figure 2 shows how a policy is part of the Tivoli Storage Manager data management process.

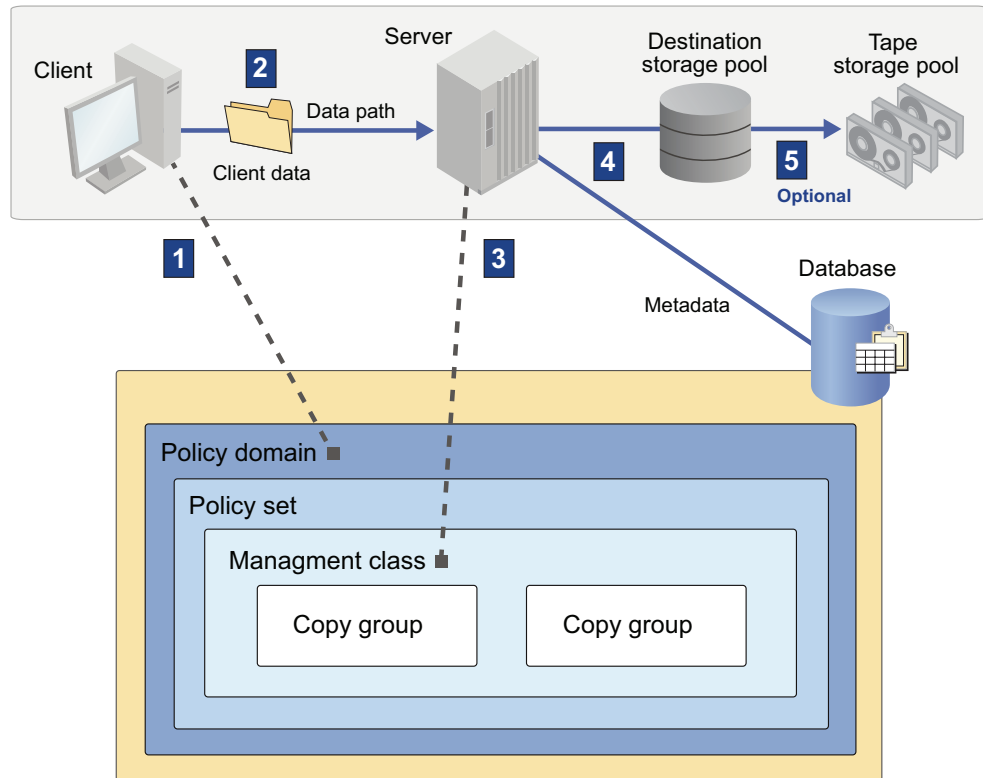


Figure 2. How Tivoli Storage Manager controls backup, archive, and migration processes

The steps in the process are as follows:

1. A client is associated with a policy domain.
When a client node is registered, it is associated with a policy domain, which contains one active policy set. When a client backs up, archives, or migrates a file, the file is bound to a management class in the active policy set of the policy domain. The management class and the backup and archive copy groups that it contains specify where files are stored and how they are managed.
2. Client data is sent to the server.
Based on information in the management class, the client sends the file and file information to the server. The information that is sent depends on the client operation that was performed.
3. The server determines where and how to store the client data.
The server checks the management class that is bound to the file to determine the destination storage pool where the file should be stored. The storage pool can be a group of disk volumes, or tape volumes. For backed-up and archived files, the destination is specified in the backup and archive copy groups within management classes. For space-managed files, the destination is specified directly in the management class.
4. The client data is stored.

The server stores the file in the storage pool that is identified as the storage destination and saves information in its database about each file that it backs up, archives, or migrates. The management class that the file is bound to specifies how long the data is stored and whether it is migrated or expired.

5. Optional: The client data is migrated.

If you set up server storage in a hierarchy, you can optionally have Tivoli Storage Manager migrate files to different storage pools. For example, you might want to set up server storage so that Tivoli Storage Manager migrates files from a disk storage pool to tape volumes in a tape storage pool.

Related tasks:

“Policy-based data management” on page 36

Data movement to server storage

Tivoli Storage Manager provides several methods for sending client data to server storage.

Figure 3 shows the movement of data when a Tivoli Storage Manager client sends data to the server over a local area network (LAN). The server then transfers the data to a device that is attached to the server.

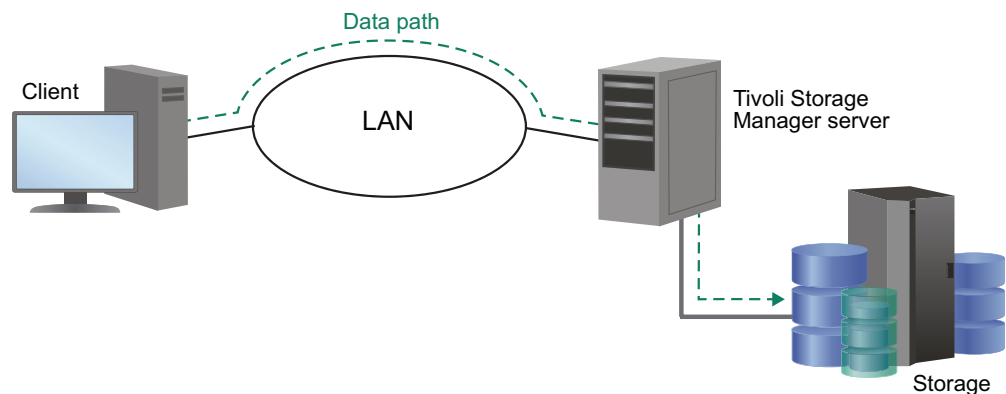


Figure 3. Data flow for client backup operations over a LAN

Figure 4 on page 16 shows the movement of data when a Tivoli Storage Manager client sends data over a storage area network (SAN) to server storage through a storage agent. Client metadata flows to the server over the LAN. This configuration, which is known as LAN-free data movement, minimizes use of the LAN and the use of the computing resources of both the client and the server. For network-attached storage, NDMP operations are used to avoid data movement over the LAN.

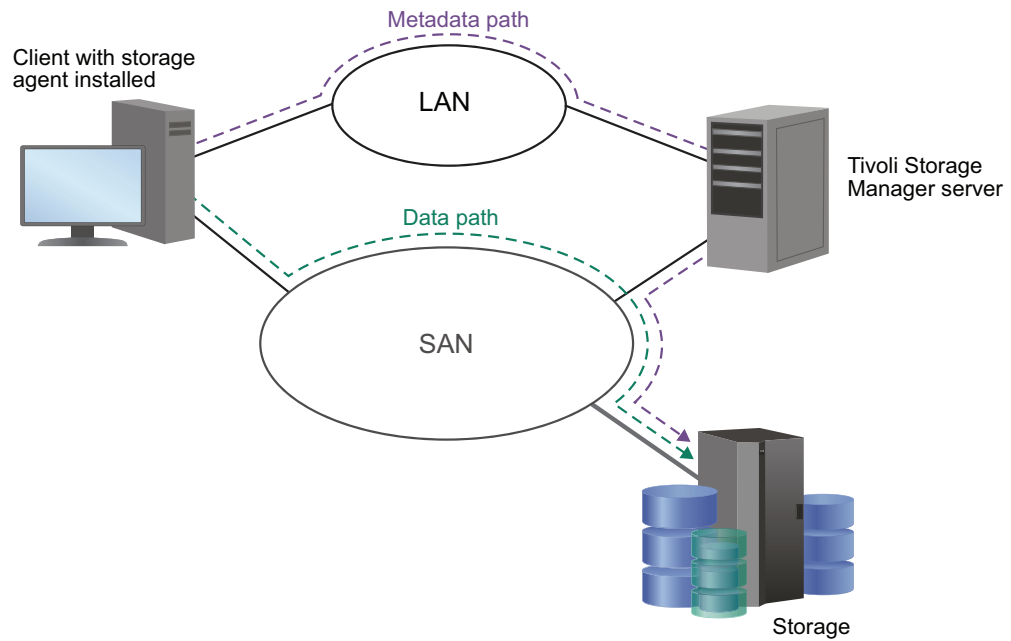


Figure 4. Data flow for client backup operations over a SAN

Related concepts:

“Device configurations” on page 66

Management of server storage

Through the server, you manage the devices and media that are used to store client data. The server integrates the management of storage with the policies that you define for managing client data.

Device support for server storage

With Tivoli Storage Manager, you can use direct-attached devices and network-attached devices for server storage. Tivoli Storage Manager represents physical storage devices and media with administrator-defined storage objects.

Data migration through the storage hierarchy

You can organize server storage pools into one or more hierarchical structures. This storage hierarchy allows flexibility in a number of ways. For example, you can set policy to have clients send their backup data to disks for faster backup operations, then later have the server automatically migrate the data to tape.

Removal of expired data

The policy that you define controls when client data automatically expires from the Tivoli Storage Manager server. The expiration process is how the server implements the policy.

For example, you have a backup policy that specifies that three versions of a file be kept. File A is created on the client, and backed up. Over time, the user changes file A, and three versions of the file are backed up to the server. Then, the user changes file A again. When the next incremental backup occurs, a fourth version of file A is stored, and the oldest of the four versions is eligible for expiration.

To remove data that is eligible for expiration, a server expiration process marks data as expired and deletes metadata for the expired data from the database. The space that is occupied by the expired data is then available for new data.

You can control the frequency of the expiration process by using a server option, starting the expiration process by command or by scheduling expiration processing.

Media reuse by reclamation

As server policies automatically expire data, the media where the data is stored accumulates unused space. The Tivoli Storage Manager server implements a process, called *reclamation*, which allows you to reuse media without traditional tape rotation.

Reclamation is a server process that automatically defragments media by consolidating unexpired data onto other media when the free space on media reaches a defined level. The reclaimed media can then be used again by the server. Reclaiming media allows the automated circulation of media through the storage management process. Use of reclamation can help minimize the number of media that you need to have available.

Related concepts:

“Storage pool hierarchies” on page 27

“Tivoli Storage Manager reclamation” on page 34

Consolidation of backed-up client data

By grouping the backed-up data for a client, you can minimize the number of media mounts required for client recovery.

The server offers you methods for doing this:

Collocation

The server can keep each client's files on a minimal number of volumes within a storage pool. Because client files are consolidated, restoring collocated files requires fewer media mounts. However, backing up files from different clients requires more mounts.

You can have the server collocate client data when the data is initially stored in server storage. If you have a storage hierarchy, you can also have the data collocated when the server migrates the data from the initial storage pool to the next storage pool in the storage hierarchy.

Another choice that you have is the level of collocation. You can collocate by client, by file space per client, or by a group of clients. Your selection depends on the size of the file spaces that are being stored and the restore requirements.

Active-data pools

Active-data pools are storage pools that contain only the active versions of client backup data. Archive data and data migrated by Hierarchical Space Management (HSM) clients are not allowed in active-data pools.

Active-data pools can be associated with three types of devices: sequential-access disk (FILE), removable media (tape), or sequential-access volumes on another Tivoli Storage Manager server. There are three types of active-data pool, each of which has distinct advantages. For example, an active-data pool that is associated with sequential-access disk is well-suited for fast restores of client data because tapes do not have to be mounted and because the server does not have to position past inactive files.

Backup set creation

You can generate a backup set for each backup-archive client. A backup set contains all active backed-up files that currently exist for that client in server storage. The process is also called instant archive.

The backup set is portable and is retained for the time that you specify. Creation of the backup set consumes more media because it is a copy in addition to the backups that are already stored.

Moving data for a client node

You can consolidate data for a client node by moving the data within server storage. You can move it to a different storage pool, or to other volumes in the same storage pool. Consolidating data can help to improve efficiency during client restore or retrieve operations.

Related concepts:

“Creating and using client backup sets” on page 533

Related tasks:

“Keeping client files together using collocation” on page 372

“Backing up primary storage pools” on page 908

“Moving data belonging to a client node” on page 419

Interfaces to Tivoli Storage Manager

You can work with many different applications by using Tivoli Storage Manager interfaces.

The following interfaces are provided:

Graphical user interfaces

For the clients, there are graphical user interfaces for the backup-archive client and the space manager client (if installed, on supported operating systems).

For information about using the interfaces, see the *Installation Guide*.

Web interfaces for server administration and for the backup-archive client

The Operations Center provides web and mobile access to status information about the Tivoli Storage Manager environment. You can use this interface to monitor multiple servers and complete some administrative tasks. The interface also provides web access to the command-line. For more information, see Chapter 17, “Managing the storage environment from the Operations Center,” on page 577.

The web backup-archive client (web client) allows an authorized user to remotely access a client to run backup, archive, restore, and retrieve processes. The web browser must have the appropriate support for Oracle Java™.

See the *Backup-Archive Clients Installation and User's Guide* for requirements.

The command-line interface

For information about using the command-line interface of the administrative client, see the *Administrator's Reference*. For information about using the command-line interface of the backup-archive client or other clients, see the documentation for that client.

The application programming interface

For more information, see the *IBM Tivoli Storage Manager Using the Application Program Interface*.

Access to information in the server database using standard SQL SELECT statements.

Tivoli Storage Manager Versions 6.1 and later use the DB2 open database connectivity (ODBC) driver to query the database and display the results. For more information, see “Using SQL to query the IBM Tivoli Storage Manager database” on page 823.

Chapter 2. Tivoli Storage Manager server concepts

The server comes with many defaults so that you can begin using its services immediately. The amount and importance of the data that you need to protect, your business process requirements, and other factors make it likely that you need to adjust and customize the server's behavior.

Central concepts about how the Tivoli Storage Manager works are described in the following sections. This information helps you understand configuration changes and monitoring that are required to meet your changing storage needs and client requirements.

Storage configuration and management

Tivoli Storage Manager server storage is used to manage data for clients. Selecting storage for capacity and then configuring and managing for efficiency are important tasks for an administrator.

Server storage can be a combination of manual and automated devices. Both direct and network-attached storage provide options for storing data. Tivoli Storage Manager devices can be physical, such as disk drives and tape drives, or logical, such as files on disk or storage on another server.

The following types of devices are supported:

- Disk devices that are direct attached, SAN-attached, or network attached
- Physical tape devices that are either manually operated or automated
- Virtual tape devices
- Removable file devices

Devices can be locally attached, or accessible through a storage area network (SAN). When you configure and manage storage, consider the following tasks:

- Selecting the devices and media that form the server storage, and whether library drives want to be shared among Tivoli Storage Manager servers.
- Designing the storage hierarchy for efficient backups and optimal storage usage.
- Using product features that allow the server to provide services to clients while minimizing traffic on the communications network, such as LAN-free and NDMP data movement.
- Using the Tivoli Storage Manager product to help you to manage the drives and media, or by using an external media manager to do the management outside of the Tivoli Storage Manager product.

Related tasks:

Chapter 3, "Planning for server storage," on page 59

Tivoli Storage Manager storage objects

Tivoli Storage Manager represents physical storage devices and media with storage objects that you define in the server database.

Storage objects classify available storage resources and manage migration from one storage pool to another. Table 3 describes the storage objects in the Tivoli Storage Manager server storage environment.

Table 3. Storage objects and what they represent

Storage object	What this object represents
1. Volume	<p>A discrete unit of storage on disk, tape, or other storage media.</p> <p>Each volume is associated with a single storage pool.</p>
2. Storage pool	<p>A collection of available storage volumes of the same media type.</p> <p>For example, a storage pool with a device class of LTO contains multiple LTO tape volumes. Clients that must back up data directly to LTO tape are associated with this storage pool. Other client data might first be stored in a disk storage pool and later be migrated to the LTO tape storage pool.</p> <p>Each storage pool is associated with a single device class.</p>
3. Device class	<p>The type of storage device that can use the volumes that are defined to a storage pool.</p> <p>For example, a device class of 8 mm tape associates a storage pool with any library device that uses 8 mm tape.</p> <p>Each device class of removable media type is associated with a single library.</p>
4. Library	<p>A storage device.</p> <p>For example, a library can represent a stand-alone drive, a set of stand-alone drives, a multiple-drive automated device, or a set of drives that is controlled by an external media manager.</p>
5. Drive	<p>A physical drive within a storage device.</p> <p>Each drive is associated with a single library.</p>
6. Path	<p>A data and control path from a source to a destination.</p> <p>To use a library or drive with Tivoli Storage Manager, a path must be defined between the device and either the Tivoli Storage Manager server or another designated data mover.</p>
7. Data mover	<p>A SAN-attached device that is used to transfer client data.</p> <p>A data mover is used only in a data transfer where the Tivoli Storage Manager server is not present, such as in a Network Data Management Protocol (NDMP) environment. Data movers transfer data between storage devices without using significant server, client, or network resources.</p> <p>For example, a NAS file server with attached storage must be defined as a data mover so that it can transfer client data to and from the storage device as required by the Tivoli Storage Manager server.</p>
8. Server	<p>A Tivoli Storage Manager server that is managed by another Tivoli Storage Manager server.</p>

Figure 5 shows the administrator-defined storage objects that are explained in Table 3 on page 22.

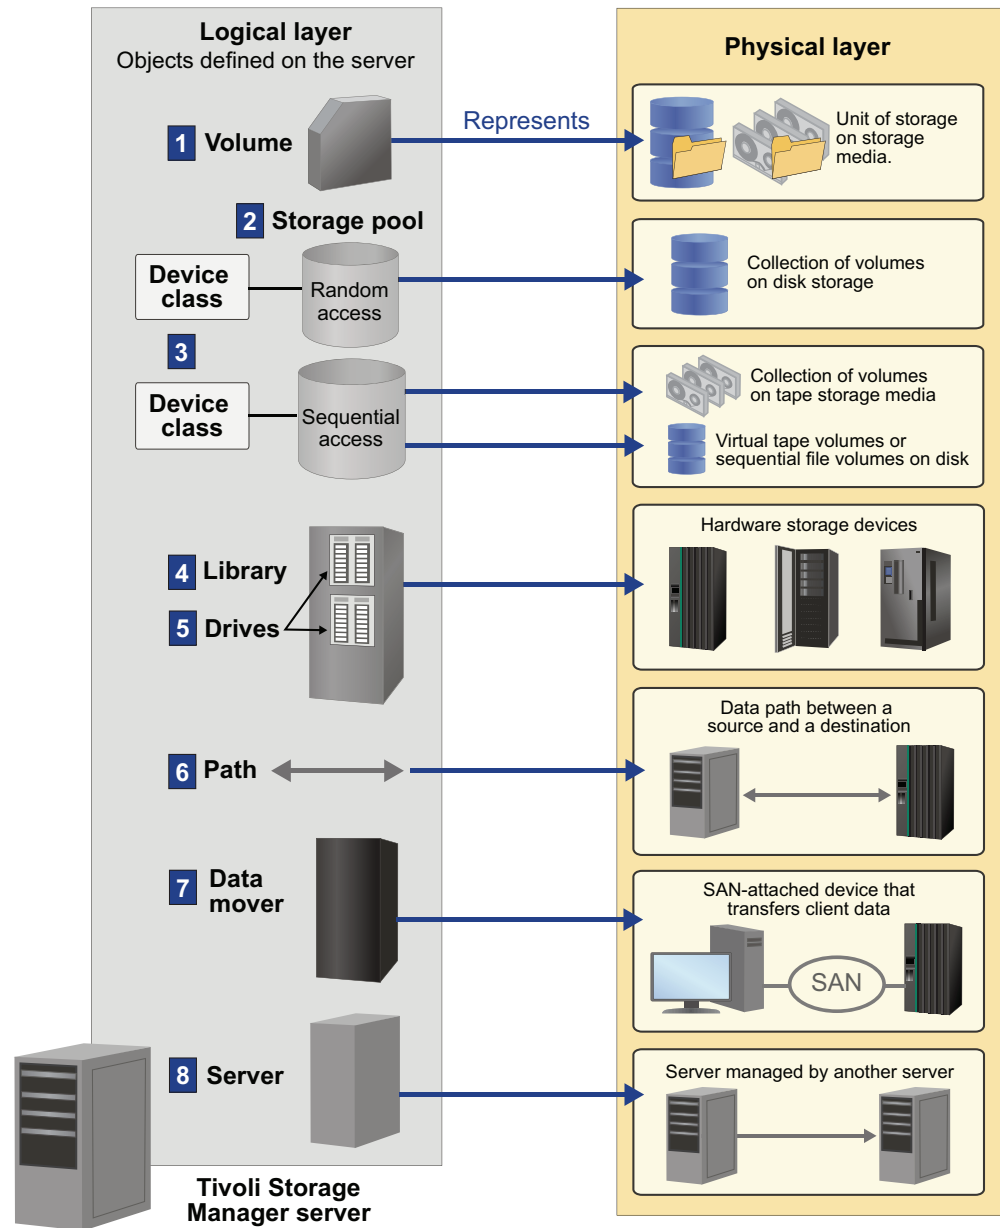


Figure 5. Storage objects

Related concepts:

"Supported library types" on page 61

Disk devices

Disk devices can be used with Tivoli Storage Manager for storing the database and recovery log or client data that is backed up, archived, or migrated from client nodes.

The server can store data on disk by using random-access volumes (device type of DISK) or sequential-access volumes (device type of FILE).

The Tivoli Storage Manager product allows you to use disk storage in ways that other products do not. You can have multiple client nodes back up to the same disk storage pool at the same time, and still keep the data for the different client nodes separate. Other products also allow you to back up different systems at the same time, but only by interleaving the data for the systems, leading to slower restore processes.

If you have enough disk storage space, data can remain on disk permanently or temporarily, depending on the amount of storage space that you have. Restore process performance from disk can be very fast compared to tape.

You can have the server later move the data from disk to tape; this is called migration through the storage hierarchy. Advantages of moving data to tape include:

- Ability to collocate data for clients as the data is moved to tape
- Streaming operation of tape drives, leading to better tape drive performance
- More efficient use of tape drives by spreading out the times when the drives are in use

Related concepts:

“Storage pool hierarchies” on page 27

Related reference:

Chapter 4, “Magnetic disk devices,” on page 75

Storage pools and storage-pool volumes

Logical storage pools and storage volumes are the principal components in the Tivoli Storage Manager model of data storage. By manipulating the properties of these objects, you can optimize the usage of storage devices.

Related tasks:

Chapter 10, “Managing storage pools and volumes,” on page 257

Storage pools

The server provides three types of storage pools that serve different purposes: primary storage pools, copy storage pools, and active-data pools.

You can arrange primary storage pools in a *storage hierarchy*. The group of storage pools that you set up for the Tivoli Storage Manager server to use is called *server storage*.

Related tasks:

Chapter 10, “Managing storage pools and volumes,” on page 257

Primary storage pools:

When a user tries to restore, retrieve, recall, or export file data, the requested file is obtained from a primary storage pool, if possible. Primary storage pool volumes are always located onsite.

The server has three default random-access primary storage pools:

ARCHIVEPOOL

In default STANDARD policy, the destination for files that are archived from client nodes.

BACKUPPOOL

In default STANDARD policy, the destination for files that are backed up from client nodes.

SPACEMGPOOL

For space-managed files that are migrated from Tivoli Storage Manager for Space Management client nodes (HSM clients).

To prevent a single point of failure, create separate storage pools for backed-up and space-managed files. This also includes not sharing a storage pool in either storage pool hierarchy. Consider setting up a separate, random-access disk storage pool to give clients fast access to their space-managed files.

Restriction: Backing up a migrated, space-managed file might result in an error if the destination for the backup is the same storage pool as the storage pool where the space-managed file currently exists.

A primary storage pool can use random-access storage (DISK device class) or sequential-access storage (for example, tape or FILE device classes).

Related tasks:

“Backing up primary storage pools” on page 908

Copy storage pools:

Copy storage pools contain active and inactive versions of data that is backed up from primary storage pools. Copy storage pools provide a means of recovering from disasters or media failures.

For example, when a client attempts to retrieve a file and the server detects an error in the file copy in the primary storage pool, the server marks the file as damaged. At the next attempt to access the file, the server can obtain the file from a copy storage pool.

You can move copy storage pool volumes offsite and still have the server track the volumes. Moving copy storage pool volumes offsite provides a means of recovering from an onsite disaster.

A copy storage pool can use only sequential-access storage (for example, a tape device class or FILE device class).

Remember:

- You can back up data from a primary storage pool that is defined with the NATIVE, NONBLOCK, or any of the NDMP formats (NETAPPDUMP, CELERRADUMP, or NDMPDUMP). The target copy storage pool must have the same data format as the primary storage pool.

- You cannot back up data from a primary storage pool that is defined with a CENTERA device class.

Related tasks:

“Setting up copy storage pools and active-data pools” on page 280

Active-data pools:

An active-data pool contains only active versions of client backup data. Active-data pools are useful for fast client restores, reducing the number of onsite or offsite storage volumes, or reducing bandwidth when you copy or restore files that are vaulted electronically in a remote location.

Data that is migrated by hierarchical storage management (HSM) clients and archive data are not permitted in active-data pools. As updated versions of backup data continue to be stored in active-data pools, older versions are deactivated and removed during reclamation processing.

Restoring a primary storage pool from an active-data pool might cause some or all inactive files to be deleted from the database if the server determines that an inactive file must be replaced but cannot find it in the active-data pool. As a best practice and to protect your inactive data, create a minimum of two storage pools: one active-data pool, which contains only active data, and one copy storage pool, which contains both active and inactive data. You can use the active-data pool volumes to restore critical client node data, and afterward you can restore the primary storage pools from the copy storage pool volumes. Active-data pools must not be considered for recovery of a primary pool or volume unless the loss of inactive data is acceptable.

Active-data pools can use any type of sequential-access storage (for example, a tape device class or FILE device class). However, the precise benefits of an active-data pool depend on the specific device type that is associated with the pool. For example, active-data pools that are associated with a FILE device class are ideal for fast client restores because FILE volumes do not have to be physically mounted and because the server does not have to position past inactive files that do not have to be restored. In addition, client sessions that are restoring from FILE volumes in an active-data pool can access the volumes concurrently, which also improves restore performance.

Active-data pools that use removable media, such as tape, offer similar benefits. Although tapes must be mounted, the server does not have to position past inactive files. However, the primary benefit of using removable media in active-data pools is the reduction of the number of volumes that are used for onsite and offsite storage. If you vault data electronically to a remote location, an active-data pool that is associated with a SERVER device class can save bandwidth by copying and restoring only active data.

Remember:

- The server does not attempt to retrieve client files from an active-data pool during a point-in-time restore. Point-in-time restores require both active and inactive file versions. Active-data pools contain only active file versions. For optimal efficiency during point-in-time restores and to avoid switching between active-data pools and primary or copy storage pools, the server retrieves both active and inactive versions from the same storage pool and volumes.

- You cannot copy active data to an active-data pool from a primary storage pool that is defined with the NETAPPDUMP, the CELERRADUMP, or the NDMPDUMP data format.
- You cannot copy active data from a primary storage pool that is defined with a CENTERA device class.

Related tasks:

“Setting up copy storage pools and active-data pools” on page 280

Storage pool hierarchies

You can arrange storage pools in a storage hierarchy, which consists of at least one primary storage pool to which a client node backs up, archives, or migrates data. Typically, data is stored initially in a disk storage pool for fast client restores, and then moved to a tape-based storage pool, which is slower to access but that has greater capacity. The location of all data objects is automatically tracked within the server database.

You can set up your devices so that the server automatically moves data from one device to another, or one media type to another. The selection can be based on characteristics such as file size or storage capacity. A typical implementation might have a disk storage pool with a subordinate tape storage pool. When a client backs up a file, the server might initially store the file on disk according to the policy for that file. Later, the server might move the file to tape when the disk becomes full. This action by the server is called *migration*. You can also place a size limit on files that are stored on disk, so that large files are stored initially on tape instead of on disk.

For example, your fastest devices are disks, but you do not have enough space on these devices to store all data that needs to be backed up over the long term. You have tape drives, which are slower to access, but have much greater capacity. You define a hierarchy so that files are initially stored on the fast disk volumes in one storage pool. This provides clients with quick response to back up requests and some recall requests. As the disk storage pool becomes full, the server migrates, or moves, data to volumes in the tape storage pool.

Another option to consider for your storage pool hierarchy is IBM 3592 tape cartridges and drives, which can be configured for an optimal combination of access time and storage capacity.

Migration of files from disk to sequential storage pool volumes is useful because the server migrates all the files for a group of nodes or a single node together. This gives you partial collocation for clients. Migration of files is especially helpful if you decide not to enable collocation for sequential storage pools.

Related tasks:

“Setting up a storage pool hierarchy” on page 275

“Keeping client files together using collocation” on page 372

Tivoli Storage Manager volumes

A *volume* is the basic unit of storage for Tivoli Storage Manager storage pools. Tivoli Storage Manager volumes are classified according to status: private, scratch, and scratch write-once, read-many (WORM).

Private volumes

A private volume is a labeled volume that is in use or owned by an application, and might contain valid data. You must define each private volume. Alternatively, for storage pools that are associated with sequential-access disk (FILE) device classes, you can use space triggers to create private, preassigned volumes when predetermined space-utilization thresholds are exceeded. Private FILE volumes are allocated as a whole. The result is less risk of severe fragmentation than with space dynamically acquired for scratch FILE volumes.

A request to mount a private volume must include the name of that volume. Defined private volumes do not return to scratch when they become empty.

Scratch volumes

A scratch volume is a labeled volume that is empty or contains no valid data and that can be used to satisfy any request to mount a scratch volume. When data is written to a scratch volume, its status is changed to private, and it is defined as part of the storage pool for which the mount request was made. When valid data is moved from the volume and the volume is reclaimed, the volume returns to scratch status and can be reused by any storage pool that is associated with the library.

A WORM scratch volume is similar to a conventional scratch volume. However, WORM volumes cannot be reclaimed by Tivoli Storage Manager reclamation processing. WORM volumes can be returned to scratch status only if they have empty space in which data can be written. Empty space is space that does not contain valid, expired, or deleted data. Deleted and expired data on WORM volumes cannot be overwritten. If a WORM volume does not have any empty space in which data can be written (for example, if the volume is entirely full of deleted or expired data), the volume remains private.

Scratch WORM status applies to 349X libraries only when the volumes are IBM 3592 WORM volumes.

Volume inventory for a library includes only those volumes that have been checked into that library. This inventory is not necessarily identical to the list of volumes in the storage pools associated with the library. For example:

- A volume can be checked into the library but not be in a storage pool (a scratch volume, a database backup volume, or a backup set volume).
- A volume can be defined to a storage pool associated with the library (a private volume), but not checked into the library.

Related concepts:

“Managing storage pool volumes” on page 267

Techniques for managing your storage pools and volumes

Backed-up, archived, and space-managed files are stored in groups of volumes that are called storage pools.

About this task

You can use the following techniques to manage your storage pool data:

Collocation

The server can keep data that belongs to a single client node, group of client nodes, or client file space assigned to as few volumes as possible. When you restore collocated files, fewer media mounts are needed, however, when you back up files from different clients, more mounts are needed.

Reclamation

Reclamation makes the fragmented space on volumes usable again by moving any remaining active files from one volume to another volume. This process makes the original volume available for reuse.

Storage pool backup

Client backup, archive, and space-managed data in primary storage pools can be backed up to copy storage pools for disaster recovery purposes. You can configure the storage pool to simultaneously write to copy storage pools when client data is written to the primary storage pools.

Copy active data

Active versions of client backup data can be copied to active-data pools. Active-data pools provide a number of benefits:

- If the device type associated with an active-data pool is sequential-access disk (FILE), you can eliminate the need for disk staging pools. Restoring client data is faster because FILE volumes are not physically mounted, and the server does not have to position past inactive files that do not have to be restored.
- An active-data pool that uses removable media, such as tape, reduces the number of volumes for onsite and offsite storage. Like volumes in copy storage pools, volumes in active-data pools can be moved offsite for protection in case of disaster.
- If you vault data electronically to a remote location, a SERVER-type active-data pool saves bandwidth by copying and restoring only active data.

As backup client data is written to primary storage pools, the active versions can be simultaneously written to active-data pools.

Cache When the server migrates files from disk storage pools, duplicate copies of the files can remain in cache (disk storage) for faster retrieval. Cached files are deleted only when space is needed. However, client backup operations that use the disk storage pool can have poorer performance.

You can establish a hierarchy of storage pools. The hierarchy can be based on the speed or the cost of the devices that are associated with the pools. Tivoli Storage Manager can migrate client files through this hierarchy to ensure the most efficient use of storage devices.

Storage volumes are managed by defining, updating, and deleting volumes, and by monitoring the use of server storage. You can also move files within and across storage pools to optimize the use of server storage.

Related tasks:

Chapter 10, “Managing storage pools and volumes,” on page 257

Removable media operations

Routine removable media operations include preparing and controlling media for reuse, ensuring that sufficient media are available, and mounting volumes in response to server requests, for manually operated drives. Removable media operations also include managing libraries and drives.

Removable media devices can be used with Tivoli Storage Manager for storage of client data that is backed up, archived, or migrated from client nodes; storage of database backups; and the exporting, that is, moving, of data to another server.

The following topics provide an overview of how to use removable media devices with Tivoli Storage Manager.

Related tasks:

Chapter 7, “Managing removable media operations,” on page 141

Removable media mounts and dismounts

When data is to be stored in or retrieved from a storage pool, the server selects the storage-pool volume and determines the name of the library that contains the drives to be used for the operation. When it finishes accessing the volume and the mount retention period has elapsed, the server dismounts the volume.

When data is to be stored in or retrieved from a storage pool, the server does the following:

1. The server selects a volume from the storage pool. The selection is based on the type of operation:

Retrieval

The name of the volume that contains the data to be retrieved is stored in the database.

Store If a defined volume in the storage pool can be used, the server selects that volume.

If no defined volumes in the storage pool can be used, and if the storage pool allows it, the server selects a scratch volume.

2. The server checks the device class that is associated with the storage pool to determine the name of the library that contains the drives to be used for the operation.
 - The server searches the library for an available drive or until all drives are checked. A drive status can be:
 - Offline.
 - Busy and not available for the mount.
 - In an error state and not available for the mount.
 - Online and available for the mount.
3. The server mounts the volume:
 - For a manual library, the server displays a mount message for a private or a scratch volume to be mounted in the selected drive.
 - For an automated library, the server directs the library to move the volume from a storage slot into the selected drive. No manual intervention is required.

If a scratch mount is requested, the server checks the library's volume inventory for a scratch volume. If one is found, its status is changed to private, it is mounted in the drive, and it is automatically defined as part of the original storage pool. However, if the library's volume inventory does not contain any scratch volumes, the mount request fails.

4. The server dismounts the volume when it is finished accessing the volume and the mount retention period has elapsed.
 - For a manual library, the server ejects the volume from the drive so that an operator can place it in its storage location.
 - For an automated library, the server directs the library to move the volume from the drive back to its original storage slot in the library.

Related tasks:

Chapter 7, “Managing removable media operations,” on page 141

How Tivoli Storage Manager uses and reuses removable media

Using Tivoli Storage Manager, you can control how removable media are used and reused. After Tivoli Storage Manager selects an available medium, that medium is used and eventually reclaimed according to its associated policy.

Tivoli Storage Manager manages the data on the media, but you manage the media itself. You can also use a removable media manager. Managing media involves creating a policy to expire data after a certain time or under certain conditions, moving valid data onto new media, and reusing the empty media.

In addition to information about storage pool volumes, volume history contains information about tapes that are used for database backups and exports, for disaster recovery purposes. The process for reusing these tapes is slightly different from the process for reusing tapes that contain client data backups.

Figure 6 on page 32 shows a typical lifecycle for removable media.

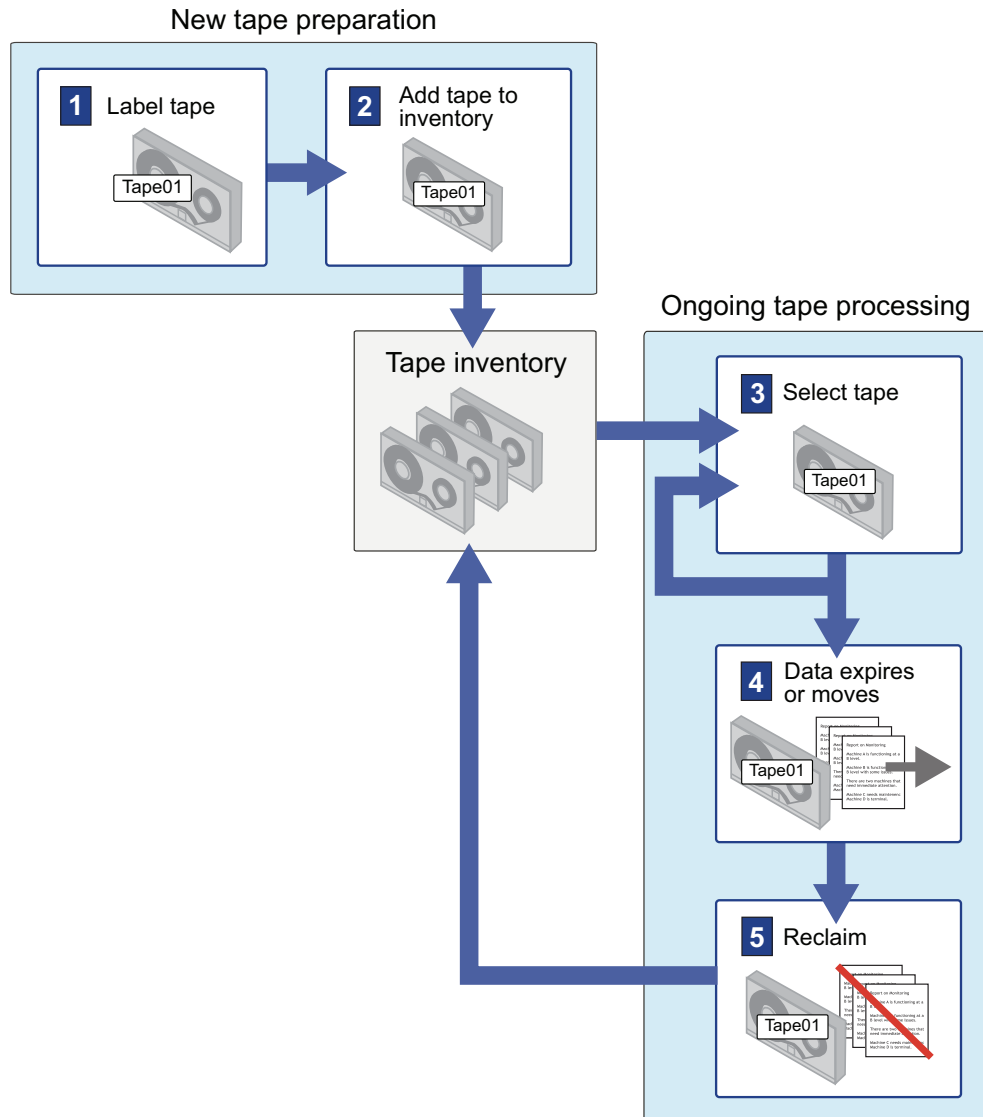


Figure 6. Simplified view of the tape lifecycle

Each step in the following explanation corresponds to a number in Figure 6.

1. You label 1 and check in the media 2. Checking media into a manual library means storing them (for example, on shelves). Checking media into an automated library involves adding them to the library volume inventory.
2. If you plan to define volumes to a storage pool associated with a device, check in the volume with its status specified as private. Use of scratch volumes is more convenient in most cases.
3. A client sends data to the server for backup, archive, or space management. The server stores the client data on the volume. Which volume the server selects 3 depends on:
 - The policy domain to which the client is assigned.
 - The management class for the data. It can be either the default management class for the policy set, or the class that is specified by the client in the client's include-exclude list or file.
 - The storage pool that is specified as the destination in either the management class (for space-managed data) or copy group (for backup or archive data).

The storage pool is associated with a device class, which determines which device and which type of media is used.

- Whether the maximum number of scratch volumes that a server can request from the storage pool was reached, when the scratch volumes are selected.
- Whether collocation is enabled for that storage pool. When collocation is enabled, the server tries to place data on separate volumes. The data can come from different client nodes, groups of client nodes, file spaces, or groups of file spaces.

Figure 7 shows more detail about the policies and storage pool specifications that govern the volume selection described in this step.

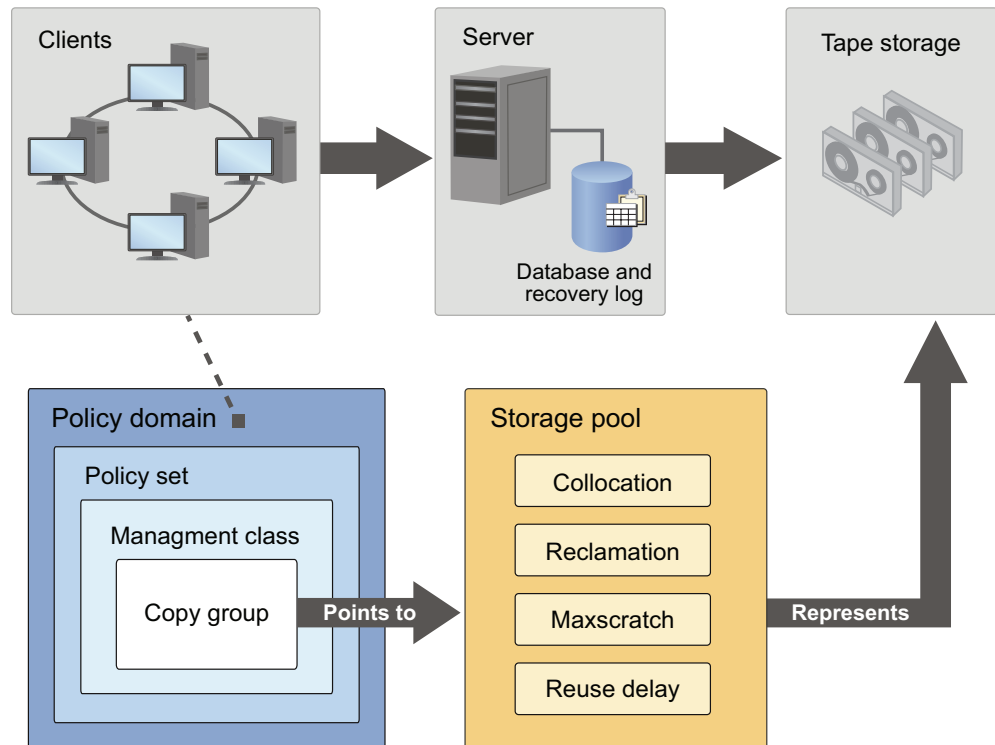


Figure 7. How Tivoli Storage Manager affects media use

4. The data on a volume changes over time as a result of:
 - Expiration of files 4 (affected by management class and copy group attributes, and the frequency of expiration processing).
 - Movement and deletion of file spaces by an administrator.
 - Automatic reclamation of media 5.

The amount of data on the volume and the reclamation threshold that is set for the storage pool affects when the volume is reclaimed. When the volume is reclaimed, any valid, unexpired data is moved to other volumes or possibly to another storage pool (for storage pools with single-drive libraries).

- Collocation, by which the server tries to keep data on a minimal number of removable media in a storage pool. The data can belong to a single client node, a group of client nodes, a file space, or a group of file spaces.

If the volume becomes empty because all valid data either expires or is moved to another volume, the volume is available for reuse. It is not available for

reuse if a time delay was specified for the storage pool. The empty volume becomes a scratch volume if it was initially a scratch volume. The volume starts again at step 3 on page 32.

5. You determine when the media is at its end-of-life.

For volumes that you defined (private volumes), check the statistics on the volumes by querying the database. The statistics include these two entries:

- The number of write passes on a volume (compared with the number of write passes that are recommended by the manufacturer)
- The number of errors on the volume

You must move any valid data off a volume that reached end-of-life. Then, if the volume is in an automated library, check out the volume from the library. If the volume is not a scratch volume, delete the volume from the database.

Related tasks:

“Reclaiming space in sequential-access storage pools” on page 382

Related reference:

“Basic policy planning” on page 483

Tivoli Storage Manager reclamation

You can set a reclamation threshold for a sequential-access storage pool when you define or update the pool. When the percentage of reclaimable space on a volume exceeds the reclamation threshold set for the storage pool, the volume is eligible for reclamation.

The server checks whether reclamation is needed at least one time per hour and begins space reclamation for eligible volumes. During space reclamation, the server consolidates files that remain on eligible volumes to other volumes. For example, Figure 8 shows how the server consolidates the files from two tapes onto a new tape.

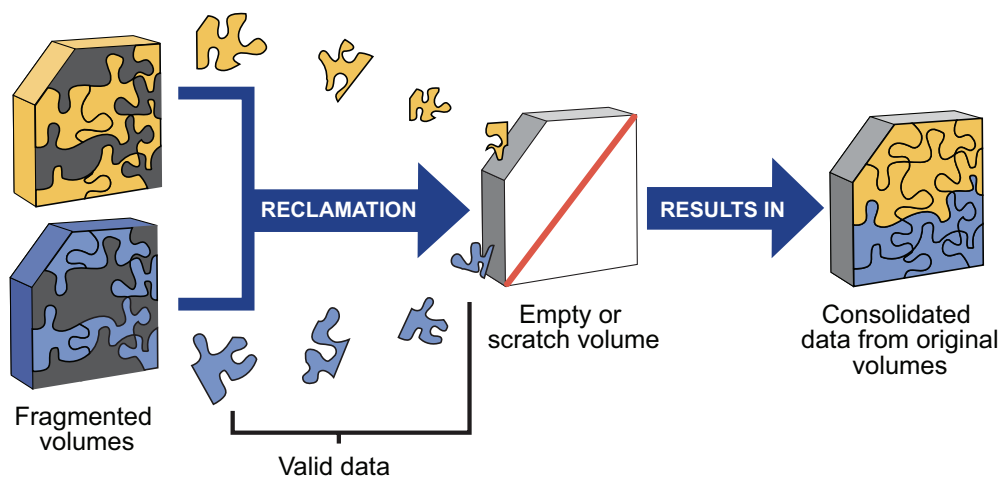


Figure 8. Reclaiming space on media

During reclamation, the server copies the files to volumes in the same storage pool unless you specify a reclamation storage pool. Use a reclamation storage pool to allow automatic reclamation for a storage pool with only one drive.

After the server moves all readable files to other volumes, one of the following occurs for the reclaimed volume:

- If you explicitly defined the volume to the storage pool, the volume becomes available for reuse by that storage pool.
- If the server acquired the volume as a scratch volume, the server deletes the volume from the Tivoli Storage Manager database.

Remember: To prevent contention for the same tapes, the server does not allow a reclamation process to start if the **DELETE FILESPACE** command is issued and file spaces are being deleted from the server. The server checks every hour for whether the deletion process is active or complete so that reclamation can start. After file spaces are deleted, reclamation begins within one hour.

The server also reclaims space within an aggregate. An aggregate is a physical file that contains multiple logical files that are backed up or archived from a client in a single transaction. Space within the aggregate becomes reclaimable space as logical files in the aggregate expire, as files are deleted by the client, or as files become deactivated in active-data pools. The server removes unused space as the server copies the aggregate to another volume during reclamation processing. However, reclamation does not aggregate files that were originally stored in non-aggregated form. Reclamation also does not combine aggregates to make new aggregates. You can also reclaim space in an aggregate by issuing the **MOVE DATA** command.

Volumes that have a device type of SERVER are reclaimed in the same way as other sequential-access volumes. However, because the volumes are actually data that is stored in the storage of another Tivoli Storage Manager server, the reclamation process can use network resources.

Volumes in a copy storage pool and active-data pools are reclaimed in the same manner as a primary storage pool except for the following cases:

- Off-site volumes are handled differently.
- The server copies active files from the candidate volume only to other volumes in the same storage pool.

Related tasks:

“Reclaiming space in sequential-access storage pools” on page 382

Reclamation thresholds:

Reclamation thresholds indicate how much reclaimable space a volume must have before the server reclaims the volume. Space is reclaimable because it is occupied by files that are expired or deleted from the Tivoli Storage Manager database, or because the space is not used.

The server checks whether reclamation is needed at least once per hour. The lower the reclamation threshold, the more frequently the server tries to reclaim space. Frequent reclamation optimizes the use of a sequential-access storage pool’s space, but can interfere with other processes, such as backups from clients.

If the reclamation threshold is high, reclamation occurs less frequently. A high reclamation threshold is useful if mounting a volume is a manual operation and the operations staff is at a minimum. Setting the reclamation threshold to 100% prevents automatic reclamation from occurring. You might want to do this to control when reclamation occurs, to prevent interfering with other server processes. When it is convenient for you and your users, you can use the **RECLAIM STGPOOL** command to start reclamation, or you can lower the reclamation threshold to cause reclamation to begin.

If you set the reclamation threshold to 50% or greater, the server can combine the usable files from two or more volumes onto a single new volume.

Reclamation of volumes in an active-data pool usually returns volumes to scratch status more frequently than reclamation of volumes in non-active-data pools. This is because the percentage of reclaimable space for sequential volumes in active-data pools reflects not only the space of deleted files, but also the space of inactive files. Frequent reclamation requires more resources such as tape drives and libraries to mount and dismount volumes.

If reclamation is occurring too frequently in your active-data pools, you can increase the reclamation thresholds until the rate of reclamation is acceptable. Accelerated reclamation of volumes has more of an effect on active-data pools that use removable media and, in particular, on removable media that is taken off-site.

Policy-based data management

As the administrator, you define the rules for client backup, archive, and migration operations, based on user or business requirements.

About this task

The rules are called *policies*. Policies identify:

- The criteria for backup, archive, and migration of client data
- Where the client data is initially stored
- How the data is managed by the server (how many backup versions are kept, for how long)

In Tivoli Storage Manager, you define policies by defining policy components. When you install Tivoli Storage Manager, a default policy that is named STANDARD is already defined for you. The STANDARD policy provides basic backup protection for user workstations. To provide different levels of service for different clients, you can add to the default policy or create new policy. For example, because of business needs, file servers are likely to require a policy that is different from policy for users' workstations. Protecting data for applications such as LotusDomino also might require a unique policy.

Related concepts:

Chapter 13, "Implementing policies for client data," on page 483

Policy components

Policies are composed of policy components that specify how files are backed up, archived, migrated from client node storage, and managed in server storage.

You define and manage policies by using the following policy components:

1. Policy domain
2. Policy set
3. Management class
4. Copy group

Figure 9 on page 37 shows the components of a policy and the relationships among them.

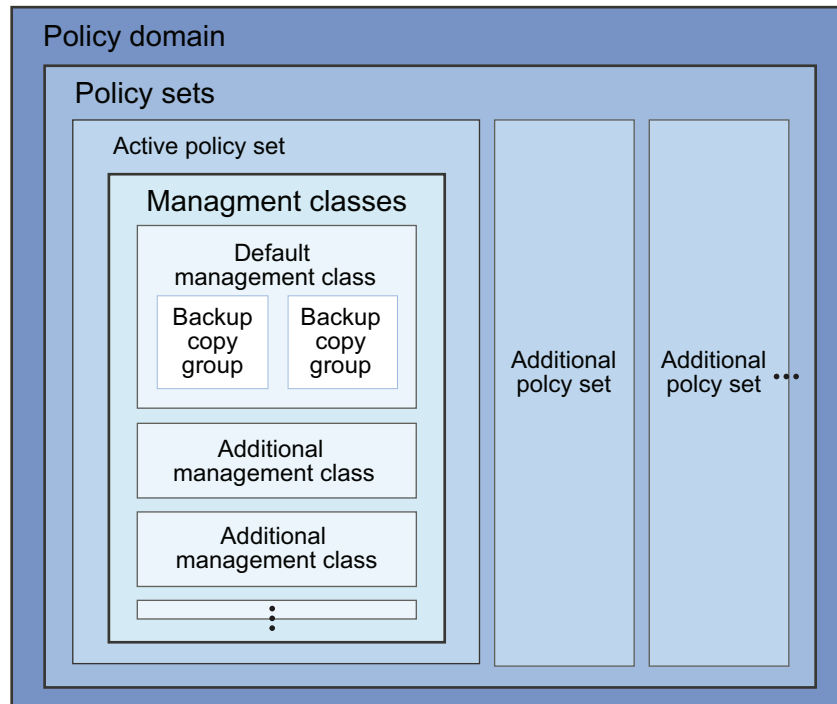


Figure 9. IBM Tivoli Storage Manager Policy

Policy domain

The primary organizational method of grouping client nodes that share common rules (or policy) for data management. The following examples show how you might group client nodes:

- Create a policy domain for certain data objects that will be migrated automatically from one storage pool to another, such as from a disk pool to a tape pool during off-peak hours.
- To customize storage management and separate the administrative control for each logical group of computers, create one policy domain for UNIX file servers and another for Windows workstations.

Although a client node can be defined to more than one Tivoli Storage Manager server, it can be defined to only one policy domain on each Tivoli Storage Manager server.

Policy set

In a policy domain, a method of grouping a set of client nodes so that the policy for those nodes can be activated or deactivated as needed. A policy domain can contain multiple policy sets, but only one policy set can be active in the domain.

You might create one policy set for weekday backup and another policy set for weekend backup. During the week, the policy set for weekday backup is activated.

Management class

In a policy set, a method for differentiating and separately managing the categories of data that is generated by client nodes. Some examples of data categories might be general data, system data, or directory structure information.

For example, in the active policy set in a policy domain for UNIX file servers, an administrator might create one management class for general data and one for directory structure information.

Copy group

In a management class, a set of attributes that controls how backup versions or archive copies are generated, where they are initially located, and when they expire.

For example, in a default management class for general data, you might configure a backup copy group to maintain three copies of existing data and store those copies for 100 days. By default, backup data for the file servers in the respective policy domain is managed according to this policy.

Related concepts:

“Management classes” on page 40

Related reference:

“Example: Sample policy objects” on page 503

Client operations controlled by policy

IBM Tivoli Storage Manager policies govern the backup and restore, archive and retrieve, and client migration and recall client operations.

Related concepts:

Chapter 13, “Implementing policies for client data,” on page 483

Backup and restore

Backup-archive clients can back up and restore files and directories.

Backup-archive clients on UNIX, Linux, and Windows systems can also back up and restore logical volumes.

Backups allow users to preserve different versions of files as they change.

Backup

To guard against the loss of information, the backup-archive client can copy files, subdirectories, and directories to media controlled by the server. Backups can be controlled by administrator-defined policies and schedules, or users can request backups of their own data.

The backup-archive client provides two types of backup:

Incremental backup

The backup of files according to policy defined in the backup copy group of the management class for the files. An incremental backup typically backs up all files that are new or changed since the last incremental backup.

Selective backup

Backs up only files that you specify. The files must also meet some of the policy requirements that are defined in the backup copy group.

See the *Backup-Archive Clients Installation and User's Guide* for details on backup-archive clients that can also back up logical volumes. The logical volume must meet some of the policy requirements that are defined in the backup copy group.

Restore

When you restore a backup version of a file, the server sends a copy of the file to the client node. The backup version remains in server storage. Restoring a logical volume backup works the same way.

If more than one backup version exists, you can restore the active backup version or any inactive backup versions.

If policy is properly set up, you can restore backed-up files to a specific time.

Archive and retrieve

To preserve files for later use or for records retention, you can use a backup-archive client to archive files, subdirectories, and directories on media that is controlled by the Tivoli Storage Manager server. When you archive files, you can choose to have the backup-archive client erase the original files from your workstation after the client archives the files.

When you retrieve a file, the server sends a copy of the file to the client node. The archived file remains in server storage.

Client migration and recall

With a Tivoli Storage Manager HSM product, you can migrate files from workstation storage to server storage and recall those files as needed.

The HSM client frees space for new data and makes more efficient use of your storage resources.

For details about using Tivoli Storage Manager for Space Management, see *Space Management for UNIX and Linux User's Guide* and *Tivoli Storage Manager HSM for Windows User's Guide*.

Migration

When a file is migrated to the server, it is replaced on the client node with a small stub file of the same name as the original file. The stub file contains data that is needed to locate the migrated file on server storage.

Tivoli Storage Manager for Space Management provides selective and automatic migration. Selective migration allows you to migrate files by name. The two types of automatic migration are:

Threshold

If space usage exceeds a high threshold set at the client node, migration begins and continues until usage drops to the low threshold also set at the client node.

Demand

If an out-of-space condition occurs for a client node, migration begins and continues until usage drops to the low threshold.

To prepare for efficient automatic migration, Tivoli Storage Manager for Space Management copies a percentage of user files from the client node to the Tivoli Storage Manager server. The premigration process occurs whenever Tivoli Storage Manager for Space Management completes an automatic migration. The next time free space is needed at the client node, the files that were pre-migrated to the

server can quickly be changed to stub files on the client. The default premigration percentage is the difference between the high and low thresholds.

Files are selected for automatic migration and premigration that is based on the number of days since the file was last accessed and also on other factors set at the client node.

Recall

Tivoli Storage Manager for Space Management provides selective and transparent recall. Selective recall allows you to recall files by name. Transparent recall occurs automatically when you access a migrated file.

When you recall active file versions, the server searches in an active-data storage pool that is associated with a FILE device class, if such a pool exists.

Reconciliation

Migration and premigration can create inconsistencies between stub files on the client node and space-managed files in server storage.

For example, if you delete a migrated file from the client node, the copy remains at the server. At regular intervals set at the client node, Tivoli Storage Manager compares client node and server storage and reconciles the two by deleting from the server any outdated files or files that do not exist at the client node.

Management classes

Management classes are the key connection between client files and policy. Each client node is assigned to a single policy domain, and the client node has access only to the management classes contained in the active policy set.

The management classes specify whether client files are migrated to storage pools (hierarchical storage management). The copy groups in these management classes specify the number of backup versions retained in server storage and the length of time to retain backup versions and archive copies.

For example, if a group of users needs only one backup version of their files, you can create a policy domain that contains only one management class whose backup copy group allows only one backup version. Then you can assign the client nodes for these users to the policy domain.

Related tasks:

“Registering nodes with the server” on page 434

Contents of a management class

A management class contains policy for backup, archive, and space management operations by clients. You can specify if and how a Tivoli Storage Manager for Space Management client can migrate files to server storage with parameters in the management class.

For clients using the server for backup and archive, you can choose what a management class contains from the following options:

A backup copy group and an archive copy group

Typical end users need to back up and archive documents, spreadsheets, and graphics.

A backup copy group only

Some users only want to back up files (such as working documents, database, log, or history files that change daily). Some application clients need only a backup copy group because they never archive files.

An archive copy group only

A management class that contains only an archive copy group is useful for users who create:

- Point-in-time files. For example, an engineer can archive the design of an electronic component and the software that created the design. Later, the engineer can use the design as a base for a new electronic component.
- Files that are rarely used but need to be retained for a long time. A client can erase the original file without affecting how long the archive copy is retained in server storage. Examples include legal records, patient records, and tax forms.

Attention: A management class that contains neither a backup nor an archive copy group prevents a file from ever being backed up or archived. This type of management class is not recommended for most users. Use such a management class carefully to prevent users from mistakenly selecting it. If users bind their files to a management class without copy groups, IBM Tivoli Storage Manager issues warning messages.

Default management classes

Each policy set must include a default management class.

The default management class is used for the following purposes:

- To manage files that are not bound to a specific management class, as defined by the INCLUDE option in the include-exclude list.
- To manage existing backup versions when an administrator deletes a management class or a backup copy group from the server.
- To manage existing archive copies when an administrator deletes a management class or an archive copy group from the server. The server does not rebind archive copies, but does use the archive copy group (if one exists) in the default management class.
- To manage files when a client node is assigned to a new policy domain and the active policy set does not have management classes with the same names as that to which the node's files are bound.

A typical default management class should perform the following things:

- Meet the needs of most users
- Contain both a backup copy group and an archive copy group
- Set serialization static or shared static to ensure the integrity of backed up and archived files
- Retain backup versions and archive copies for a sufficient amount of time
- Retain directories for at least as long as any files are associated with the directory

Other management classes can contain copy groups tailored either for the needs of special sets of users or for the needs of most users under special circumstances.

Related reference:

“How files and directories are associated with a management class” on page 43

The include-exclude list

You can define an include-exclude list to specify which files are eligible for the different processes that the client can run. Include and exclude options in the list determine which files are eligible for backup and archive services and which files can be migrated from the client (space-managed).

The options also include how the server controls symbolic links and processing such as image, compression, and encryption.

If you do not create an include-exclude list, the following default conditions apply:

- All files that belong to the user are eligible for backup and archive services.
- The default management class governs backup, archive, and space-management policies.

Figure 10 shows an example of an include-exclude list. The statements in this example list perform the following actions:

- Excludes certain files or directories from backup, archive, and client migration operations

Line 1 in Figure 10 means that the SSTEINER node ID excludes all core files from being eligible for backup and client migration.

- Includes some previously excluded files

Line 2 in Figure 10 means that the files in the following directory are excluded:

– *:\home\ssteiner

The include statement that follows on line 3, however, means that the options.scr file in that directory is eligible for backup and client migration.

- Binds a file to a specific management class

Line 4 in Figure 10 means that all files and subdirectories that belong to the following directory are managed by the policy defined in the MCENGBK2 management class:

– *:\home\ssteiner\driver5

```
exclude *:\...\core
exclude *:\home\ssteiner\*
include *:\home\ssteiner\options.scr
include *:\home\ssteiner\driver5\...\* mcengbk2
```

Figure 10. Example of an include-exclude list

Tivoli Storage Manager processes the include-exclude list from the bottom up, and stops when it finds an include or exclude statement that matches the file it is processing. Therefore, the order in which the include and exclude options are listed affects which files are included and excluded. For example, suppose that you switch the order of two lines in the example, as follows:

```
include *:\home\ssteiner\options.scr
exclude *:\home\ssteiner\*
```

The exclude statement comes last, and excludes all files in the following directory:

- *:\home\ssteiner

When Tivoli Storage Manager is processing the include-exclude list for the `options.scr` file, it finds the exclude statement first. This time, the `options.scr` file is excluded.

Some options are evaluated after the more basic include and exclude options. For example, options that exclude or include files for compression are evaluated after the program determines which files are eligible for the process being run.

You can create include-exclude lists as part of client options sets that you define for clients.

For detailed information on the include and exclude options, see the user's guide for the appropriate client.

Related tasks:

"Creating client option sets on the server" on page 473

How files and directories are associated with a management class

Binding is the process of associating a file with a management class. The policies that are defined in the management class then apply to the bound files. The server binds a file to a management class when a client backs up, archives, or migrates the file.

A client chooses a management class as follows:

- For backing up a file, a client can specify a management class in the client's include-exclude list (include-exclude options file for UNIX and Linux clients), or can accept the default management class.
- For backing up directories, the client can specify a management class by using the DIRMC option in the client options file.

Important: It is recommended that you define a default management class. If no management class is specified for a directory, the server chooses the management class with the longest retention period in the backup copy group (retention period for the only backup version). When two or more management classes have the same, "longest" retention period, the Tivoli Storage Manager client selects the management class whose name is last in alphabetical order.

- For backing up a file system or logical volume, a client can specify a management class in the client's include-exclude list (include-exclude options file for UNIX and Linux clients), or can accept the default management class.
- For archiving a file, the client can do one of the following tasks:
 - Specify a management class in the client's include-exclude list (with either an `include` option or an `include.archive` option)
 - Specify a management class with the ARCHMC option on the archive command
 - Accept the default management class
- For archiving directories, the client can specify a management class with the archiving options, or the ARCHMC option.

Important: It is recommended that you define a default management class. If the client does not specify any archiving options, the server assigns the default management class to the archived directory. If the default management class has no archive copy group, the server assigns the management class that currently has the archive copy group with the shortest retention time. When two or more

management classes have the same, "shortest" retention period, the Tivoli Storage Manager client selects the management class whose name is last in alphabetical order.

- For migrating a file, a client can specify a management class in the client's include-exclude options file, or can accept the default management class.

The default management class is the management class that is identified as the default in the active policy set.

A management class that is specified with a simple include option can apply to one or more processes on the client. More specific include options (such as include.archive) allow you to specify different management classes. Some examples of how this works:

- If a client backs up, archives, and migrates a file to the same server, and uses only a single include option, the management class specified for the file applies to all three operations (backup, archive, and migrate).
- If a client backs up and archives a file to one server, and migrates the file to a different server, the client can specify one management class for the file for backup and archive operations, and a different management class for migrating.
- Clients can specify a management class for archiving that is different from the management class for backup.

See the user's guide for the appropriate client for more details.

Effects of changing a management class

A file remains bound to a management class even if the attributes of the management class or its copy groups change.

About this task

The following scenario illustrates this process:

1. A file that is named REPORT.TXT is bound to the default management class that contains a backup copy group specifying that up to three backup versions can be retained in server storage.
2. During the next week, three backup versions of REPORT.TXT are stored in server storage. The active and two inactive backup versions are bound to the default management class.
3. The administrator assigns a new default management class that contains a backup copy group specifying only up to two backup versions.
4. The administrator then activates the policy set, and the new default management class takes effect.
5. REPORT.TXT is backed up again, bringing the number of versions to four. The server determines that according to the new backup copy group only two versions are to be retained. Therefore, the server marks the two oldest versions for deletion (expired).
6. Expiration processing occurs. REPORT.TXT is still bound to the default management class, which now includes new retention criteria. Therefore, the two versions that are marked for deletion are purged, and one active and one inactive backup version remain in storage.

Related reference:

"Running expiration processing to delete expired files" on page 514

Rebinding files to management classes

Rebinding is the process of associating a file or a logical volume image with a new management class.

Backup versions

The server rebinds backup versions of files and logical volume images in some cases.

The following list highlights the cases when a server rebinds backup versions of files:

- The user changes the management class that is specified in the include-exclude list and does a backup.
- An administrator activates a policy set in the same policy domain as the client node, and the policy set does not contain a management class with the same name as the management class to which a file is bound.
- An administrator assigns a client node to a different policy domain, and the active policy set in that policy domain does not have a management class with the same name.

Backup versions of a directory can be rebound when the user specifies a different management class by using the DIRMC option in the client option file, and when the directory gets backed up.

The most recently backed up files are *active backup versions*. Older copies of your backed up files are *inactive backup versions*. You can configure management classes to save a predetermined number of copies of a file. If a management class is saving five backup copies, one active copy is saved and four inactive copies are saved. If a file from one management class is bound to a different management class that retains a lesser number of files, inactive files are deleted.

If a file is bound to a management class that no longer exists, the server uses the default management class to manage the backup versions. When the user does another backup, the server rebinds the file and any backup versions to the default management class. If the default management class does not have a backup copy group, the server uses the backup retention grace period that is specified for the policy domain.

Archive copies

Archive copies remain bound to the management class name specified when the user archived them.

If the management class to which an archive copy is bound no longer exists or no longer contains an archive copy group, the server uses the default management class. If you later change or replace the default management class, the server uses the updated default management class to manage the archive copy.

If the default management class does not contain an archive copy group, the server uses the archive retention grace period that is specified for the policy domain.

Rebinding files during replication

During replication, both backup and archive files are bound to the default management class on the target replication server if the management class to which they belong does not exist. After this management class is created on the target replication server, the files can be rebound by using the **REPLICATE NODE** command with the **FORCERECONCILE=YES** parameter.

Management of client operations

Because the key task of the server is to provide services to clients, many of the server administrator's tasks deal with client operations.

Tasks include the following:

- Registering clients and customizing client operations
- Ensuring that client operations meet security requirements
- Providing required levels of service by customizing policies
- Automating protection by using schedules

After you create schedules, you manage and coordinate those schedules. Your tasks include the following:

- Verify that the schedules ran successfully.
- Determine how long Tivoli Storage Manager retains information about schedule results, called *event records*, in the database.
- Balance the workload on the server so that all scheduled operations complete.

Related concepts:

Chapter 13, "Implementing policies for client data," on page 483

Related tasks:

Part 3, "Managing client operations," on page 431

Chapter 16, "Managing schedules for client nodes," on page 559

Tasks for client nodes

A basic administrative task is adding client nodes and giving the systems that the nodes represent access to the services and resources of the Tivoli Storage Manager server.

The Tivoli Storage Manager server supports various client nodes. You can register the following types of clients and servers as client nodes:

- Tivoli Storage Manager backup-archive client
- Application clients that provide data protection through one of the following products: Tivoli Storage Manager for Application Servers, Tivoli Storage Manager for Databases, Tivoli Storage Manager for Enterprise Resource Planning, or Tivoli Storage Manager for Mail.
- Tivoli Storage Manager for Space Management client (called space manager client or HSM client)
- A NAS file server for which the Tivoli Storage Manager server uses NDMP for backup and restore operations
- Tivoli Storage Manager source server (registered as a node on a target server)

When you register clients, you must determine:

- Whether the client should compress files before sending them to the server for backup
- Whether the client node ID has the authority to delete its files from server storage
- Whether an administrator ID that matches the client ID is created, for remote client operations

Other important tasks for client nodes include the following:

Controlling client options from the server

Client options on client systems allow users to customize backup, archive, and space management operations, as well as schedules for these operations. On most client systems, the options are in a file called `dsm.opt`. In some cases, you might need or want to provide the clients with options to use. To help users get started, or to control what users back up, you can define sets of client options for clients to use. Client options sets are defined in the server database and are used by the clients that you designate.

Among the options that can be in a client option set are the include and exclude options. These options control which files are considered for the client operations.

Allowing subfile backups

Restriction: Subfile backups are only applicable to Windows clients. For mobile and remote users, you want to minimize the data that is sent over the network and the time that they are connected to the network. You can set the server to allow a client node to back up changed portions of files that were previously backed up, rather than entire files. The portion of the file that is backed up is called a *subfile*.

Creating backup sets for client nodes

You can perform an instant archive for a client by creating a backup set. A backup set copies a client node's active, backed-up files from server storage onto sequential media. If the sequential media can be read by a device available to the client system, you can restore the backup set directly to the client system without using the network. The server tracks backup sets that you create and retains the backup sets for the time you specify.

For more information on managing client nodes, see the *Backup-Archive Clients Installation and User's Guide*.

Related tasks:

"Data export and import" on page 54

Related reference:

Chapter 12, "Managing client nodes," on page 445

Chapter 14, "Managing data for client nodes," on page 525

Security management

Tivoli Storage Manager includes security features for user registration and passwords. Also included are features that can help ensure security when clients connect to the server across a firewall.

Registration for clients can be closed or open. With closed registration, a user with administrator authority must register all clients. With open registration, clients can register themselves at first contact with the server.

You can ensure that only authorized administrators and client nodes are communicating with the server by requiring passwords. Passwords can authenticate with an LDAP directory server or the Tivoli Storage Manager server. Most password-related commands work for both kinds of servers. The **PASSEXP** and **RESET PASSEXP** commands do not work for passwords that authenticate with an LDAP directory server. You can use the LDAP directory server to give more options to your passwords, independent of the Tivoli Storage Manager server.

Restriction: The Tivoli Storage Manager backup-archive client must be at version 6.4.0 or later to use passwords that authenticate with an LDAP directory server.

Whether you store your passwords on an LDAP directory server, or on the Tivoli Storage Manager server, you can set the following requirements for passwords:

- Minimum number of characters in a password.
- Expiration time.
- A limit on the number of consecutive, invalid password attempts. When the client exceeds the limit, Tivoli Storage Manager stops the client node from accessing the server. The limit can be set on the Tivoli Storage Manager server, and on the LDAP directory server.

Important: The invalid password limit is for passwords that authenticate with the Tivoli Storage Manager server and any LDAP directory servers. Invalid password attempts can be configured on an LDAP directory server, outside of the Tivoli Storage Manager server. But the consequence of setting the number of invalid attempts on the LDAP directory server might pose some problems. For example, when the **REGISTER NODE** command is issued, the default behavior is to name the node administrator the same name as the node. The LDAP server does not recognize the difference between the node "NODE_Q" and the administrator "NODE_Q". The node and the administrator can authenticate to the LDAP server if they have the same password. If the node and administrator have different passwords, the authentication fails for either the node or administrator. If the node or the administrator fail to logon consistently, their IDs are locked. You can avoid this situation by issuing the **REGISTER NODE** command with **USERID=userid** or **USERID=NONE**.

Tivoli Storage Manager provides several ways to manage security. You can control the authority of administrators. An organization can name a single administrator or distribute the workload among a number of administrators and grant them different levels of authority. For better security when clients connect across a firewall, you can control whether clients can initiate contact with the server for scheduled operations. Server options can be set to keep client and administrative traffic on separate server ports.

Related concepts:

"Managing Tivoli Storage Manager administrator IDs" on page 870

"Managing passwords and logon procedures" on page 876

Related reference:

Chapter 26, “Managing Tivoli Storage Manager security,” on page 855

Schedules for client operations

Scheduling client operations can mean better protection for data because operations can occur consistently without user intervention.

Scheduling also can mean better use of resources such as the network. Client backups that are scheduled at times of lower usage can minimize the impact on user operations on a network.

You can automate operations for clients by using schedules. Tivoli Storage Manager provides a central scheduling facility. You can also use operating system utilities or other scheduling tools to schedule Tivoli Storage Manager operations.

With Tivoli Storage Manager schedules, you can perform the operations for a client immediately or schedule the operations to occur at regular intervals.

The key objects that interact are:

Include-exclude options on each client

The include-exclude options determines which files are backed up, archived, or space-managed, and determines management classes, encryption, and type of backup for files.

The client can specify a management class for a file or group of files, or can use the default management class for the policy domain. The client specifies a management class by using an INCLUDE option in the client's include-exclude list or file. You can have central control of client options such as INCLUDE and EXCLUDE by defining client option sets on the server. When you register a client, you can specify a client option set for that client to use.

Association defined between client and schedule

Associations determine which schedules are run for a client.

Clients are assigned to a policy domain when they are registered. To automate client operations, you define schedules for a domain. Then you define associations between schedules and clients in the same domain.

Schedule

The schedule determines when a client operation automatically occurs.

Schedules that can automate client operations are associated with a policy domain.

The scheduled client operations are called *events*. The Tivoli Storage Manager server stores information about events in its database. For example, you can query the server to determine which scheduled events completed successfully and that failed.

Management class

The management class determines where client files are initially stored and how they are managed.

The management class contains information that determines how Tivoli Storage Manager handles files that clients backup, archive, or migrate. For example, the management class contains the backup copy group and the archive copy group. Each copy group points to a *destination*, a storage pool where files are first stored when they are backed up or archived.

For a schedule to work on a particular client, the client system must be turned on. The client either must be running the client scheduler or must allow the client acceptor daemon to start the scheduler when needed.

Related tasks:

“Scheduling a client operation” on page 550

Related reference:

“Managing client option files” on page 473

Server management

If you manage more than one server, you can ensure that the multiple servers are consistently managed by using the enterprise management functions of Tivoli Storage Manager.

You can set up one server as the configuration manager and have other servers obtain configuration information from it.

To keep the server running well, you can perform these tasks:

- Managing server operations, such as controlling client access to the server
- Automating repetitive administrative tasks
- Monitoring and adjusting space for the database and the recovery log
- Monitoring the status of the server, server storage, and clients

Server-operation management

When managing your server operations, you can choose from a variety of associated tasks.

Some of the more common tasks that you can perform to manage your server operations are:

- Starting and stopping the server.
- Allowing and suspending client sessions with the server.
- Querying, canceling, and preempting server processes such as backing up the server database.
- Customizing server options.

Other tasks that are needed less frequently include:

- Maintaining compliance with the license agreement.
- Moving the server.

Specifying server options

Server options are available to customize the server and its operations. You can use server options to configure and update the following:

- Server communications
- Storage configuration
- Database and recovery log operations
- Client transaction performance

Server script automation

Repetitive, manual tasks that are associated with managing the server can be automated through Tivoli Storage Manager schedules and scripts. Using schedules and scripts can minimize the daily tasks for administrators.

You can define schedules for the automatic processing of most administrative commands. For example, a schedule can run the command to back up the server's database every day.

Tivoli Storage Manager server scripts allow you to combine administrative commands with return code checking and processing. The server comes with scripts that you can use to do routine tasks, or you can define your own. The scripts typically combine several administrative commands with return code checking, or run a complex **SQL SELECT** command.

Related tasks:

Chapter 18, "Managing server operations," on page 587

Related reference:

"Licensing Tivoli Storage Manager" on page 587

The server database and recovery log

The Tivoli Storage Manager database contains information about client data and operations of the server. The recovery log helps to ensure that a failure, such as a system power outage or application error, does not leave the database in an inconsistent state. Both are key to the operation of the server.

The Tivoli Storage Manager database does not store client data; it points to the locations of client files in storage pools and stores information about client data, also called *metadata*.

The database includes information about:

- Client nodes and administrators
- Policies and schedules
- Server settings
- Locations of client files on server storage
- Server operations (for example, activity logs and event records)
- Intermediate results for queries

Information about client data includes the file name, file size, file owner, management class, copy group, and location of the file in server storage.

The server records changes made to the database (database transactions) in its recovery log. The recovery log is used to maintain the database in a transactionally consistent state, and to maintain consistency across server startup operations. The recovery log consists of these logs:

- Active log
- Log mirror (optional)
- Archive log
- Archive failover log (optional)

Figure 11 on page 52 shows the components of the database and recovery log.

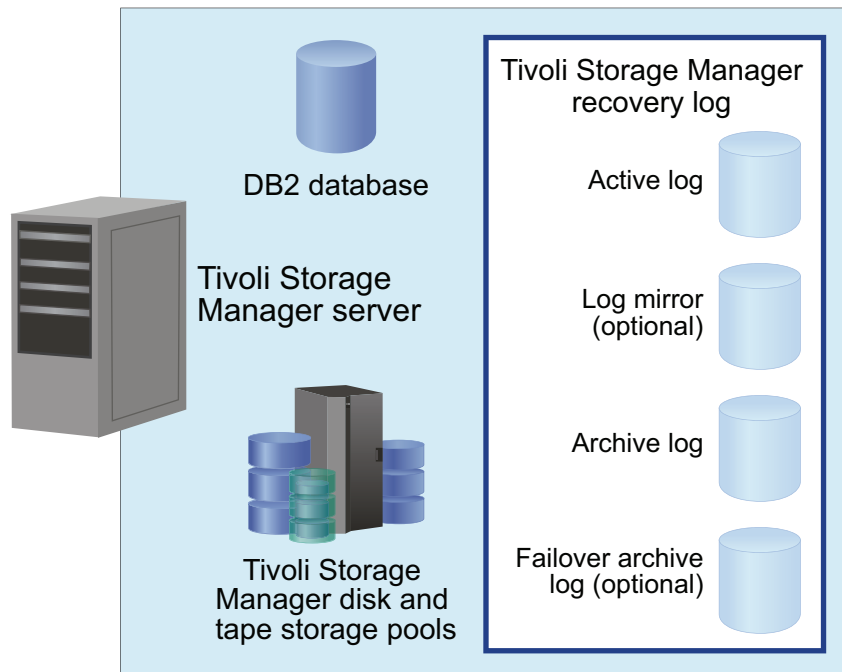


Figure 11. Tivoli Storage Manager database and recovery log

Related tasks:

Chapter 20, “Managing the database and recovery log,” on page 633

The role of the recovery log

When the logs that make up the recovery log are set up carefully, they work together to ensure that data is not lost.

Each component of the recovery log has a specific purpose to protect server and client data:

Active log

The active log records transactions that are in progress on the server. This information is needed to restart the server and database after a disaster. Transactions are stored in the log files of the active log, and a transaction can span multiple log files. If a failure occurs, the changes that were made but not committed are rolled back, and all committed transactions, which might not have been physically written to disk, are reapplied and committed again.

Active log mirror (optional)

The active log mirror is a copy of the active log that can be used if the active log files cannot be read. All changes that are made to the active log are also written to the log mirror. There can be only one active log mirror. Creating a log mirror is optional but recommended.

Archive log

The archive log contains copies of closed log files that were in the active log. The archive log is not needed for normal processing, but it is typically needed for recovery of the database.

The archive log is included in database backups and is used for rollforward recovery of the database. Archive log files that are included in

a database backup are automatically pruned after a full database backup cycle is complete. The archive log must have enough space to store the log files for database backups.

Archive failover log (optional)

The archive failover log, also called a secondary archive log, is the directory that the server uses to store archive log files when the archive log directory is full. Its use is optional but highly recommended.

Related concepts:

“Recovery log management” on page 638

Sources of information about the server

Tivoli Storage Manager provides you with many sources of information about server and client status and activity, the state of the server database and storage, and resource usage. By monitoring selected information, you can provide reliable services to users while you are making the best use of available resources.

The Operations Center provides visibility to the key aspects of your Tivoli Storage Manager environment, including clients, servers, policy, storage pools, and storage devices.

You can use Tivoli Storage Manager queries and SQL queries to get information about the server. You can also set up automatic logging of information about Tivoli Storage Manager clients and server events. Daily checks of some indicators are suggested.

Related tasks:

Chapter 17, “Managing the storage environment from the Operations Center,” on page 577

Part 5, “Monitoring operations,” on page 769

Tivoli Storage Manager server networks

You might have a number of Tivoli Storage Manager servers in your network, at the same or different locations.

About this task

Some examples of different configurations are:

- Your users are scattered across many locations, so you have located Tivoli Storage Manager servers close to the users to manage network bandwidth limitations.
- You have set up multiple servers to provide services to different organizations at one location.
- You have multiple servers on your network to make disaster recovery easier.

Servers connected to a network can be centrally managed. Tivoli Storage Manager provides functions to help you configure, manage, and monitor the servers. An administrator working at one Tivoli Storage Manager server can work with servers at other locations around the world.

When you have a network of Tivoli Storage Manager servers, you can simplify configuration and management of the servers by using enterprise administration functions. You can do the following:

- Designate one server as a configuration manager that distributes configuration information such as policy to other servers. See “Setting up enterprise configurations” on page 695.
- Route commands to multiple servers while logged on to one server. See “Routing commands” on page 720.
- Log events such as error messages to one server. This allows you to monitor many servers and clients from a single server. See “Enterprise event logging: logging events to another server” on page 845.
- Store data for one Tivoli Storage Manager server in the storage of another Tivoli Storage Manager server. The storage is called server-to-server virtual volumes. See “Storing data on another server as virtual volumes” on page 726 for details.
- Share an automated library among Tivoli Storage Manager servers. See “Devices on storage area networks” on page 67.
- Store a recovery plan file for one server on another server, when using disaster recovery manager. You can also back up the server database and storage pools to another server. See Chapter 30, “Disaster recovery manager,” on page 1033 for details.
- Back up the server database and storage pools to another server. See “Storing data on another server as virtual volumes” on page 726 for details.
- To simplify password management, have client nodes and administrators authenticate their passwords on multiple servers using an LDAP directory server. See “Managing passwords and logon procedures” on page 876.

Data export and import

As conditions change, you can move data from one server to another by using export and import processes.

About this task

You might need to balance workload among servers by moving client nodes from one server to another. The following methods are available:

- You can export part or all of a server's data to sequential media, such as tape or a file on hard disk. You can then take the media to another server and import the data to that server
- You can export part or all of a server's data and import the data directly to another server, if server-to-server communications are set up.

Related concepts:

Chapter 22, “Exporting and importing data,” on page 735

Server and client data protection

The database, recovery log, and storage pools are critical to the operation of Tivoli Storage Manager and must be properly protected.

About this task

If the database is unusable, the entire Tivoli Storage Manager server is unavailable. If a database is lost and cannot be recovered, it might be difficult or impossible to recover data that is managed by that server. Therefore, It is critically important to back up the database. However, even without the database, fragments of data or complete files might easily be read from storage pool volumes that are not encrypted. Even if data is not completely recovered, security can be compromised.

For this reason, always encrypt sensitive data by using the Tivoli Storage Manager client or the storage device, unless the storage media is physically secured.

Tivoli Storage Manager provides a number of ways to protect your data, including backing up your storage pools and database. For example, you can define schedules so that the following operations occur:

- After the initial full backup of your storage pools, incremental storage pool backups are done nightly.
- Full database backups are done weekly.
- Incremental database backups are done nightly.

In addition, disaster recovery manager (DRM), an optional feature of Tivoli Storage Manager, can assist you in many of the tasks that are associated with protecting and recovering your data.

Related tasks:

Part 6, “Protecting the server,” on page 853

Chapter 27, “Protecting and recovering the server infrastructure and client data,” on page 893

Disaster recovery

Tivoli Storage Manager provides a number of ways to protect and recover your server from media failure or from the loss of the Tivoli Storage Manager database or storage pools.

About this task

Recovery is based on the following preventive measures:

- Mirroring, by which the server maintains a copy of the active log
- Periodic backup of the database
- Periodic backup of the storage pools
- Audit of storage pools for damaged files, and recovery of damaged files when necessary
- Backup of the device configuration and volume history files
- Validation of the data in storage pools, using cyclic redundancy checking
- Keeping the cert.kdb file in a safe place to ensure that SSL (Secure Sockets Layer) is secure for authenticating passwords

In addition to taking these actions, you can prepare a disaster recovery plan to guide you through the recovery process by using the disaster recovery manager, which is available with Tivoli Storage Manager Extended Edition. The disaster recovery manager (DRM) assists you in the automatic preparation of a disaster recovery plan. You can use the disaster recovery plan as a guide for disaster recovery and for audit purposes to certify the recoverability of the Tivoli Storage Manager server.

The disaster recovery methods of DRM are based on taking the following measures:

- Sending server backup volumes offsite or to another Tivoli Storage Manager server
- Creating the disaster recovery plan file for the Tivoli Storage Manager server
- Storing client system information

- Defining and tracking client recovery media

Related tasks:

Chapter 30, "Disaster recovery manager," on page 1033

Part 2. Configuring and managing storage devices

To make storage devices available to a server, you must attach the devices, configure device drivers, and create Tivoli Storage Manager objects that represent those devices. To use the devices to store client data, you also create objects representing storage pools and storage-pool volumes.

Chapter 3. Planning for server storage

To determine the device classes and storage pools that you need for your server storage, you must evaluate the devices in your storage environment.

Procedure

1. Determine which drives and libraries are supported by the server. For the most up-to-date list of supported devices and operating-system levels, see the Supported Devices website:

http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html

2. Determine which storage devices can be selected for use by the server. For example, determine how many tape drives you have that you can allow the server to use. For more information about selecting a device configuration, see “Device configurations” on page 66.

The servers can share devices in libraries that are attached through a SAN. If the devices are not on a SAN, the server expects to have exclusive use of the drives that are defined to it. If another application (including another Tivoli Storage Manager server) tries to use a drive while the server to which the drive is defined is running, some server functions might fail. For more information about specific drives and libraries, see http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager.

3. Determine the device driver that supports the devices. For more information about device driver support, see:

“Selecting a device driver” on page 90

4. Determine how to attach the devices to the server. For more information about attaching devices, see:

“Attaching an automated library device” on page 86

5. Determine whether to back up client data directly to tape or to a storage hierarchy.
6. Determine which client data is backed up to which device, if you have multiple device types.
7. Determine the device type and device class for each of the available devices. Group similar devices together and identify their device classes. For example, create separate categories for 4 mm and 8 mm devices.

Tip: For sequential access devices, you can categorize the type of removable media based on their capacity.

For example, standard length cartridge tapes and longer length cartridge tapes require different device classes.

8. Determine how the mounting of volumes is accomplished for the devices:
 - Devices that require operators to load volumes must be part of a defined MANUAL library.
 - Devices that are automatically loaded must be part of a defined SCSI, 349X, or VTL library. Each automated library device is a separate library.
 - Devices that are controlled by Oracle StorageTek Automated Cartridge System Library Software (ACSL) must be part of a defined ACSL library.
 - Devices that are managed by an external media management system must be part of a defined EXTERNAL library.

9. If you are considering storing data for one Tivoli Storage Manager server by using the storage of another Tivoli Storage Manager server, consider network bandwidth and network traffic. If your network resources constrain your environment, you might have problems with using the SERVER device type efficiently.

Also, consider the storage resources available on the target server. Ensure that the target server has enough storage space and drives to handle the load from the source server.

10. Determine the storage pools to set up, based on the devices you have and on user requirements. Gather users' requirements for data availability. Determine which data needs quick access and, which does not.
11. Be prepared to label removable media. You might want to create a new labeling convention for media so that you can distinguish them from media that are used for other purposes.

Road map for key device-related task information

Key tasks include configuring and managing disk devices, physically attaching storage devices to your system, and so on. In this document, information about tasks is organized into linked topics.

Use the following table to identify key tasks and the topics that describe how to perform those tasks.

Task	Topic
Configure and manage magnetic disk devices, which Tivoli Storage Manager uses to store client data, the database, database backups, recovery log, and export data.	Chapter 4, "Magnetic disk devices," on page 75
Physically attach storage devices to your system. Install and configure the required device drivers.	Chapter 5, "Attaching devices for the server," on page 85
Configure devices to use with Tivoli Storage Manager, using detailed scenarios of representative device configurations.	Chapter 6, "Configuring storage devices," on page 97
Plan, configure, and manage an environment for NDMP operations	Chapter 9, "Using NDMP for operations with NAS file servers," on page 219
Perform routine operations such as labeling volumes, checking volumes into automated libraries, and maintaining storage volumes and devices.	Chapter 7, "Managing removable media operations," on page 141
Define and manage device classes.	"Defining device classes" on page 194

Supported library types

A physical library is a collection of one or more drives that share similar media-mounting requirements. That is, the drive can be mounted by an operator or by an automated mounting mechanism.

A library object definition specifies the library type and other characteristics that are associated with that library type. For example, when you define an IBM TotalStorage 3494 Tape Library, category numbers are used by for private, scratch, and write-once, read-many (WORM) scratch volumes.

Tivoli Storage Manager supports various library types.

Table 4. Library types supported by Tivoli Storage Manager

Library type	Description	More information
SCSI	<p>A SCSI library is controlled through a SCSI interface, attached either directly to the server's host by using SCSI cabling or by a storage area network. A robot or other mechanism automatically handles volume mounts and dismounts.</p> <p>The drives in a SCSI library can be of different types. A SCSI library can contain drives of mixed technologies, including LTO Ultrium and DLT drives. For example:</p> <ul style="list-style-type: none">• The Oracle StorageTek L700 library• The IBM 3590 tape device, with its Automatic Cartridge Facility (ACF) <p>Remember: Although it has a SCSI interface, the IBM 3494 Tape Library Dataserver is defined as a 349X library type.</p>	<p>For information about configuring a SCSI library, see:</p> <p>Chapter 6, "Configuring storage devices," on page 97</p>
VTL	<p>A <i>virtual tape library</i> (VTL) is a hardware component that can emulate a tape library while it is using a disk as the underlying storage hardware.</p> <p>Using a VTL, you can create variable numbers of drives and volumes because they are only logical entities within the VTL. The ability to create more drives and volumes increases the capability for parallelism, giving you more simultaneous mounts and tape I/O.</p> <p>VTLs use SCSI and Fibre Channel interfaces to interact with applications. Because VTLs emulate tape drives, libraries, and volumes, an application such as Tivoli Storage Manager cannot distinguish a VTL from real tape hardware unless the library is identified as a VTL.</p>	<p>For information about configuring a VTL library, see "Managing virtual tape libraries" on page 128.</p>

Table 4. Library types supported by Tivoli Storage Manager (continued)

Library type	Description	More information
ACSL	<p>An automated cartridge system library software (ACSL) library is a type of external library that is controlled by Oracle StorageTek ACSL media-management software. The server can act as a client application to the ACSL software to use the drives.</p> <p>The StorageTek software performs the following functions:</p> <ul style="list-style-type: none"> • Mounts volumes, both private and scratch • Dismounts volumes • Returns library volumes to scratch status <p>The ACSL software selects an appropriate drive for media-access operations. You do not define the drives, check in media, or label the volumes in an external library.</p> <p>Restriction: To use ACSL functions, the StorageTek Library Attach software must be installed. For more information, see “ACSL-managed libraries” on page 121.</p>	<p>For more information, see your StorageTek documentation. If you are using an ACSL library and have enabled a firewall, refer to the <i>StorageTek Automated Cartridge System Library Software Administrator's Guide, Version 8.1</i> (April 2012 edition).</p>
349X	<p>A 349X library is a collection of drives in an IBM 3494. Volume mounts and dismounts are handled automatically by the library. A 349X library has one or more library management control points (LMCP) that the server uses to mount and dismount volumes in a drive. Each LMCP provides an independent interface to the robot mechanism in the library.</p> <p>349X library objects contain only one device type (IBM 3590 or 3592) of drives. Thus, if you have 3590 and 3592 drives in your 349X library, you must define two library objects: one for your 3590 drives and one for your 3592 drives. Each of these library objects must have the same device parameter when their paths are defined.</p>	<p>For information about configuring a 349X library, see:</p> <p>Chapter 6, “Configuring storage devices,” on page 97</p>
Shared	<p>Shared libraries are logical libraries that are represented physically by SCSI, 349X, ACSL, or VTL libraries. The physical library is controlled by the Tivoli Storage Manager server that is configured as a library manager. Tivoli Storage Manager servers that use the SHARED library type are library clients to the library manager server. Shared libraries reference a library manager.</p>	

Table 4. Library types supported by Tivoli Storage Manager (continued)

Library type	Description	More information
Manual	<p>In manual libraries, operators mount the volumes in response to mount-request messages that are issued by the server.</p> <p>The server sends these messages to the server console and to administrative clients that were started by using the special MOUNTMODE or CONSOLEMODE parameter.</p> <p>You cannot combine drives of different types or formats, such as Digital Linear Tape (DLT) and 8MM, in a single manual library. Instead, you must create a separate manual library for each device type.</p> <p>You can use manual libraries as logical entities for sharing sequential-access disk (FILE) volumes with other servers.</p>	<p>For information about configuring a manual library, see:</p> <p>Chapter 6, "Configuring storage devices," on page 97</p>
External	<p>An external library is a collection of drives that are managed by an external media-management system that is not part of Tivoli Storage Manager, for example:</p> <ul style="list-style-type: none"> • ACSLS or LibraryStation-controlled Oracle StorageTek library that is used with an external library manager (ELM), like Gresham's EDT-DistribuTAPE • IBM Tape Storage Library Manager (TSLM) <p>The Tivoli Storage Manager server provides an interface that allows the external media management system to operate with the server, mount and dismount volumes, and return library volumes to scratch.</p> <p>An external library allows flexibility in grouping drives into libraries and storage pools. The library can have one drive, a collection of drives, or even a part of an automated library. The external media manager selects the appropriate drive for media-access operations.</p> <p>You do not define drives, check in media, or label the volumes in an external library.</p>	<p>For a definition of the interface that Tivoli Storage Manager provides to the external media management system, see Appendix A, "External media management interface description," on page 1113.</p>

Tivoli Storage Manager device classes

A device class represents a set of storage devices with similar availability, performance, and storage characteristics.

Each device that is defined to Tivoli Storage Manager is associated with one device class. The device class specifies the device type and media management information, such as recording format, estimated capacity, and labeling prefixes.

A device type identifies a device as a member of a group of devices that share similar media characteristics. For example, the 8MM device type applies to 8 mm tape drives.

Device types include various removable media types along with FILE, CENTERA, and SERVER.

A device class for a tape drive must also specify a library.

Disk devices

Using Tivoli Storage Manager, you can define random-access disk (DISK device type) volumes using a single command. You can also use space triggers to automatically create preassigned private volumes when predetermined space-utilization thresholds are exceeded.

For important disk-related information, see “Requirements for disk systems” on page 75.

Removable media

Tivoli Storage Manager provides a set of specified removable-media device types, such as 8MM for 8 mm tape devices, or REMOVABLEFILE for Jaz or DVD-RAM drives.

The GENERICTAPE device type is provided to support certain devices that are not supported by the Tivoli Storage Manager server.

For more information about supported removable media device types, see “Defining device classes” on page 194 and the *Administrator's Reference*.

Files on disk as sequential volumes (FILE)

The FILE device type lets you create sequential volumes by creating files on disk storage. To the server, these files have the characteristics of a tape volume. FILE volumes can also be useful when transferring data for purposes such as electronic vaulting or for taking advantage of relatively inexpensive disk storage devices.

FILE volumes are a convenient way to use sequential-access disk storage for the following reasons:

- You do not need to explicitly define scratch volumes. The server can automatically acquire and define scratch FILE volumes as needed.
- You can create and format FILE volumes using a single command. The advantage of private FILE volumes is that they can reduce disk fragmentation and maintenance overhead.
- Using a single device class definition that specifies two or more directories, you can create large, FILE-type storage pools. Volumes are created in the directories you specify in the device class definition. For optimal performance, volumes should be associated with file systems.
- When predetermined space-utilization thresholds have been exceeded, space trigger functionality can automatically allocate space for private volumes in FILE-type storage pools.
- The Tivoli Storage Manager server allows concurrent read-access and write-access to a volume in a storage pool associated with the FILE device type. Concurrent access improves restore performance by allowing two or more clients to access the same volume at the same time. Multiple client sessions (archive,

retrieve, backup, and restore) or server processes (for example, storage pool backup) can read the volume concurrently. In addition, one client session or one server process can write to the volume while it is being read.

The following server processes are allowed shared read access to FILE volumes:

- BACKUP DB
- BACKUP STGPOOL
- COPY ACTIVATEDATA
- EXPORT/IMPORT NODE
- EXPORT/IMPORT SERVER
- GENERATE BACKUPSET
- RESTORE STGPOOL
- RESTORE VOLUME

The following server processes are not allowed shared read access to FILE volumes:

- AUDIT VOLUME
- DELETE VOLUME
- MIGRATION
- MOVE DATA
- MOVE NODEDATA
- RECLAMATION

Unless sharing with storage agents is specified, the FILE device type does not require you to define library or drive objects. The only required object is a device class.

For important disk-related information, see “Requirements for disk systems” on page 75.

Files on sequential volumes (CENTERA)

The CENTERA device type defines the EMC Centera storage device. It can be used like any standard storage device from which files can be backed up and archived as needed.

The Centera storage device can also be configured with the Tivoli Storage Manager server to form a specialized storage system that protects you from inadvertent deletion of mission-critical data such as emails, trade settlements, legal documents, and so on.

The CENTERA device class creates logical sequential volumes for use with Centera storage pools. These volumes share many of the same characteristics as FILE type volumes. With the CENTERA device type, you are not required to define library or drive objects. CENTERA volumes are created as needed and end in the suffix "CNT."

Multiple client retrieve sessions, restore sessions, or server processes can read a volume concurrently in a storage pool that is associated with the CENTERA device type. In addition, one client session or one server process can write to the volume while it is being read. Concurrent access improves restore and retrieve performance because two or more clients can have access to the same volume at the same time.

The following server processes can share read access to Centera volumes:

- EXPORT NODE
- EXPORT SERVER
- GENERATE BACKUPSET

The following server processes cannot share read access to Centera volumes:

- AUDIT VOLUME
- DELETE VOLUME

For more information about the Centera device class, see “Defining device classes for CENTERA devices” on page 214. For details about Centera-related commands, refer to the *Administrator’s Reference*.

Sequential volumes on another Tivoli Storage Manager server (SERVER)

The SERVER device type lets you create volumes for one Tivoli Storage Manager server that exist as archived files in the storage hierarchy of another server. These virtual volumes have the characteristics of sequential-access volumes such as tape. No library or drive definition is required.

You can use virtual volumes for the following:

- Device-sharing between servers. One server is attached to a large tape library device. Other servers can use that library device indirectly through a SERVER device class.
- Data-sharing between servers. By using a SERVER device class to export and import data, physical media remains at the original location instead having to be transported.
- Immediate offsite storage. Storage pools and databases can be backed up without physically moving media to other locations.
- Offsite storage of the disaster recovery manager (DRM) recovery plan file.
- Electronic vaulting.

See “Storing data on another server as virtual volumes” on page 726.

Device configurations

You can configure devices on a local area network, on a storage area network, for LAN-free data movement, and as network-attached storage. Tivoli Storage Manager provides methods for configuring storage devices.

For information about supported devices and Fibre Channel hardware and configurations, see http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager

Devices on local area networks

In the conventional local area network (LAN) configuration, one or more tape libraries are associated with a single Tivoli Storage Manager server.

In a LAN configuration, client data, electronic mail, terminal connection, application program, and device control information must all be handled by the same network. Device control information and client backup and restore data flow across the LAN.

For information about the categories of libraries that are supported by Tivoli Storage Manager, see “Supported library types” on page 61.

Devices on storage area networks

A SAN is a dedicated storage network that can improve system performance. On a SAN, you can consolidate storage and relieve the distance, scalability, and bandwidth limitations of LANs and wide area networks (WANs).

By using Tivoli Storage Manager in a SAN, you can take advantage of the following functions:

- Sharing storage devices among multiple Tivoli Storage Manager servers.
Devices that use the GENERICTAPE device type are not included.
- Moving Tivoli Storage Manager client data directly to storage devices (LAN-free data movement) by configuring a storage agent on the client system.

In a SAN, you can share tape drives and libraries that are supported by the Tivoli Storage Manager server, including most SCSI devices.

Figure 12 shows a SAN configuration in which two Tivoli Storage Manager servers share a library.

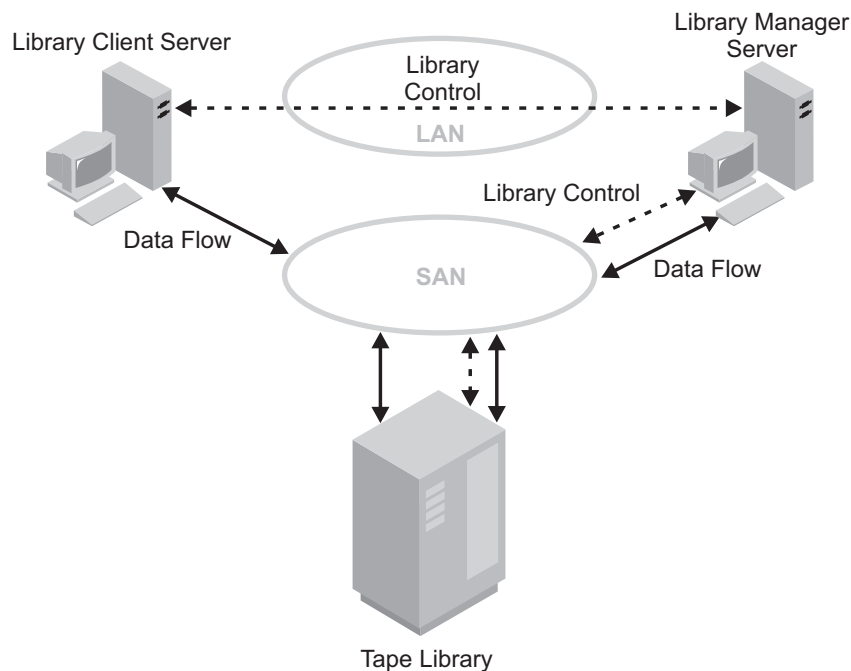


Figure 12. Library sharing in a storage area network (SAN) configuration. The servers communicate over the LAN. The library manager controls the library over the SAN. The library client stores data to the library devices over the SAN.

When Tivoli Storage Manager servers share a library, the server that is defined as the library manager controls device operations. These operations include mount, dismount, volume ownership, and managing library inventory. Tivoli Storage Manager servers that are defined as library clients use server-to-server

communications to contact the library manager and request device service. Data moves over the SAN between each server and the storage device.

Tivoli Storage Manager servers use the following features when sharing an automated library:

Partitioning of the Volume Inventory

The inventory of media volumes in the shared library is partitioned among servers. Either one server owns a particular volume, or the volume is in the global scratch pool. No server owns the scratch pool at any time.

Serialized Drive Access

Only one server accesses each tape drive at a time. Drive access is serialized and controlled so that servers do not dismount other servers' volumes or write to drives where other servers mount their volumes.

Serialized Mount Access

The library autochanger completes a single mount or dismount operation at a time. The library manager completes all mount operations to provide this serialization.

Related tasks:

“Configuring Tivoli Storage Manager servers to share SAN-connected devices” on page 131

LAN-free data movement

Tivoli Storage Manager allows a client, through a storage agent, to directly back up and restore data to a tape library on a SAN.

Figure 13 shows a SAN configuration in which a client directly accesses a tape or FILE library to read or write data.

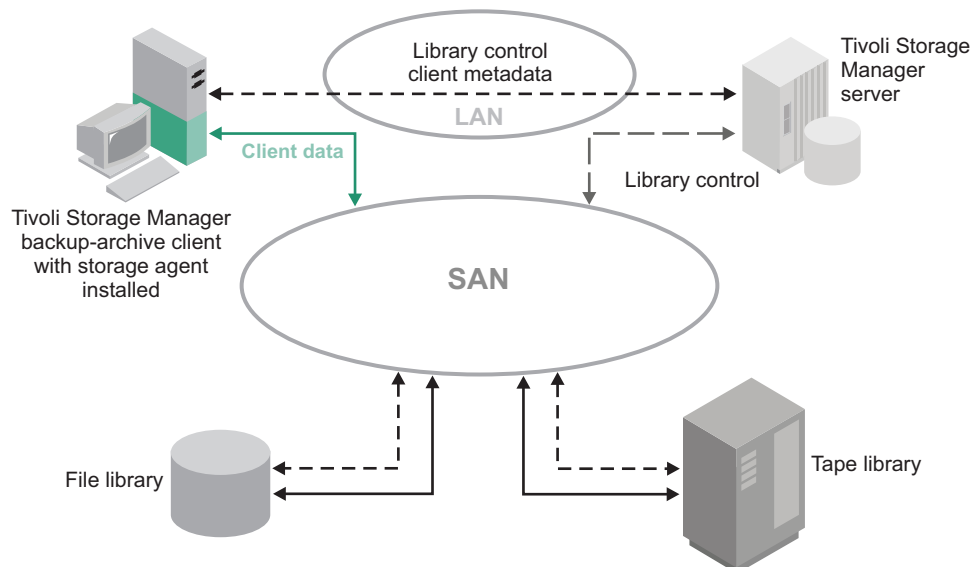


Figure 13. LAN-Free data movement. Client and server communicate over the LAN. The server controls the device on the SAN. Client data moves over the SAN to the device.

LAN-free data movement requires the installation of a storage agent on the client system. The server maintains the database and recovery log, and acts as the library manager to control device operations. The storage agent on the client handles the

data transfer to the device on the SAN. This implementation frees up bandwidth on the LAN that would otherwise be used for client data movement.

The following outlines a typical backup scenario for a client that uses LAN-free data movement:

1. The client begins a backup operation. The client and the server exchange policy information over the LAN to determine the destination of the backed up data.
For a client that uses LAN-free data movement, the destination is a storage pool that uses a device on the SAN.
2. Because the destination is on the SAN, the client contacts the storage agent, which handles the data transfer. The storage agent sends a request for a volume mount to the server.
3. The server contacts the storage device and, in the case of a tape library, mounts the appropriate media.
4. The server notifies the client of the location of the mounted media.
5. The client, through the storage agent, writes the backup data directly to the device over the SAN.
6. The storage agent sends file attribute information to the server, and the server stores the information in its database.

If a failure occurs on the SAN path, failover occurs. The client uses its LAN connection to the Tivoli Storage Manager server and moves the client data over the LAN.

Remember:

- Centera storage devices cannot be targets for LAN-free operations.
- For the latest information about clients that support the feature, see the Tivoli Storage Manager support page at http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager.

Network-attached storage

Network-attached storage (NAS) file servers are dedicated storage servers whose operating systems are optimized for file-serving functions. NAS file servers typically do not run software that is acquired from another vendor. Instead, they interact with programs like Tivoli Storage Manager through industry-standard network protocols, such as network data management protocol (NDMP).

Tivoli Storage Manager provides two basic types of configurations that use NDMP for backing up and managing NAS file servers. In one type of configuration, Tivoli Storage Manager uses NDMP to back up a NAS file server to a library device directly attached to the NAS file server. (See Figure 14 on page 70.) The NAS file server, which can be distant from the Tivoli Storage Manager server, transfers backup data directly to a drive in a SCSI-attached tape library. Data is stored in special, NDMP-formatted storage pools, which can be backed up to storage media that can be moved offsite for protection in case of an onsite disaster.

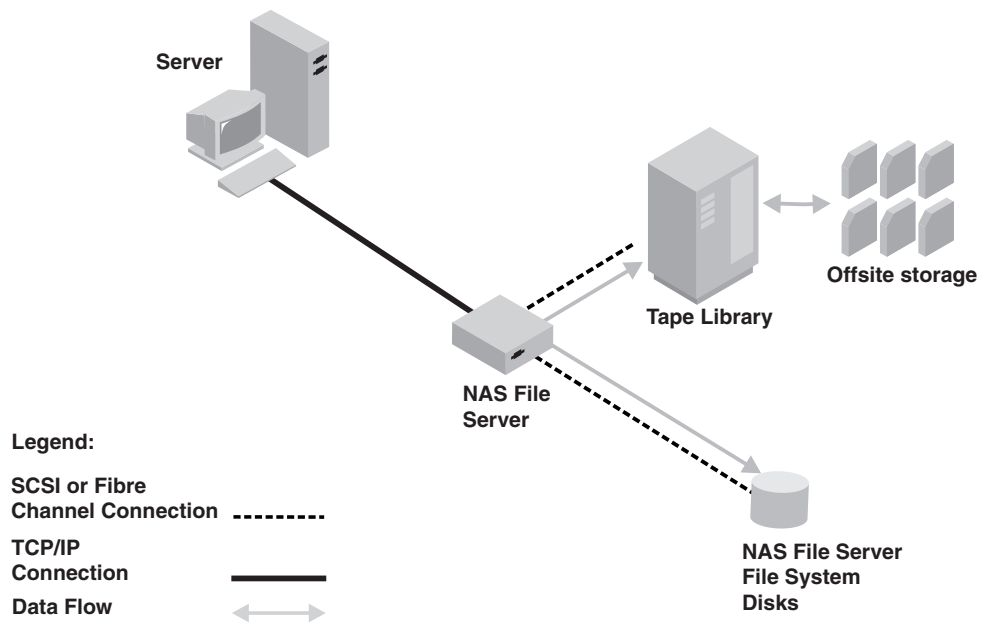


Figure 14. Library device directly attached to a NAS file server

In the other type of NDMP-based configuration, Tivoli Storage Manager uses NDMP to back up a NAS file server to a Tivoli Storage Manager storage-pool hierarchy. (See Figure 15 on page 71.) With this type of configuration, you can store NAS data directly to disk (either random access or sequential access) and then migrate the data to tape. Data can also be backed up to storage media that can then be moved offsite. The advantage of this type of configuration is that it gives you all the backend-data management features associated with a conventional Tivoli Storage Manager storage-pool hierarchy, including migration and reclamation.

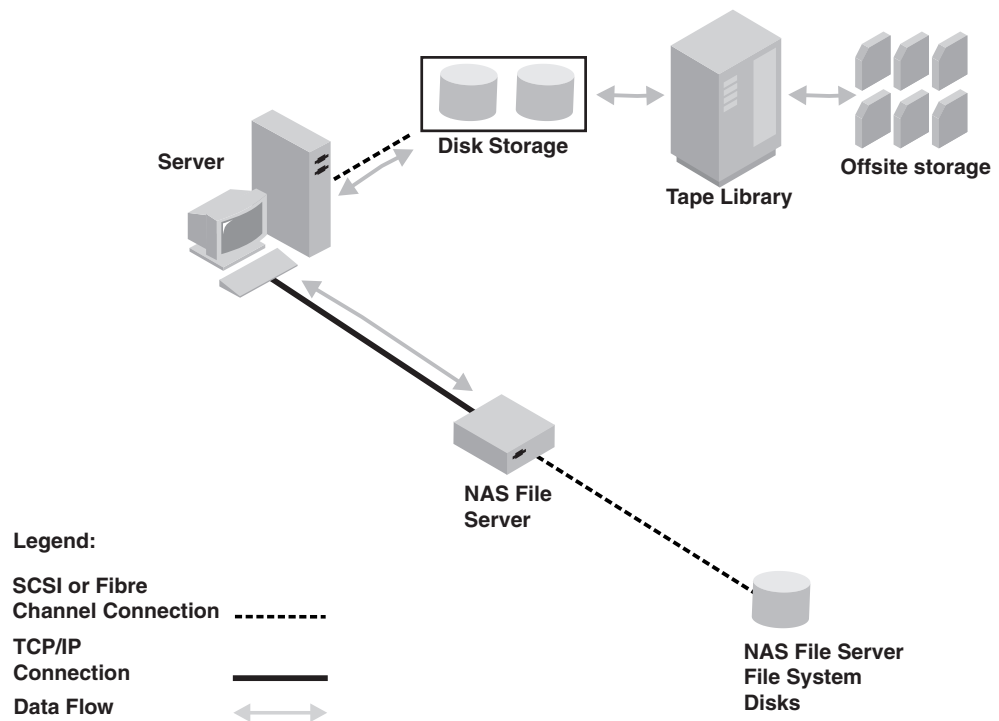


Figure 15. NAS file server to Tivoli Storage Manager storage-pool hierarchy

In both types of configurations, Tivoli Storage Manager tracks file system image backups and has the capability to perform NDMP file-level restores. For more information about NDMP file-level restores, see “NDMP file-level restoration” on page 72.

Note:

- A CENTERA storage device cannot be a target for NDMP operations.
- Support for filer-to-server data transfer is only available for NAS devices that support NDMP version 4.
- For a comparison of NAS backup methods, including the use of a backup-archive client to back up a NAS file server, see “Determining the location of NAS backup” on page 229.

NDMP backup operations

In backup images produced by network data management protocol (NDMP) operations for a NAS file server, Tivoli Storage Manager creates NAS file-system-level or directory-level image backups.

The image backups are different from traditional Tivoli Storage Manager backups because the NAS file server transfers the data to the drives in the library or directly to the Tivoli Storage Manager server. NAS file system image backups can be either full or differential image backups. The first backup of a file system on a NAS file server is always a full image backup. By default, subsequent backups are differential image backups containing only data that has changed in the file system since the last full image backup. If a full image backup does not already exist, a full image backup is performed.

If you restore a differential image, Tivoli Storage Manager automatically restores the full backup image first, followed by the differential image.

NDMP file-level restoration

Tivoli Storage Manager provides a way to restore data from backup images produced by NDMP operations. To assist users in restoring selected files, you can create a table of contents (TOC) of file-level information for each backup image.

Using the Web backup-archive client, users can then browse the TOC and select the files that they want to restore. If you do not create a TOC, users must be able to specify the name of the backup image that contains the file to be restored and the fully qualified name of the file.

You can create a TOC using one of the following commands:

- BACKUP NODE server command. For details, see the *Administrator's Reference*.
- BACKUP NAS client command, with include.fs.nas specified in the client options file or specified in the client options set. For details, see the *Backup-Archive Clients Installation and User's Guide*.

Directory-level backup and restore

If you have a large NAS file system, initiating a backup on a directory level reduces backup and restore times, and provides more flexibility in configuring your NAS backups.

By defining virtual file spaces, a file system backup can be partitioned among several NDMP backup operations and multiple tape drives. You can also use different backup schedules to back up subtrees of a file system.

The virtual file space name cannot be identical to any file system on the NAS node. If a file system is created on the NAS device with the same name as a virtual file system, a name conflict occurs on the Tivoli Storage Manager server when the new file space is backed up. See the *Administrator's Reference* for more information about virtual file space mapping commands.

Remember: Virtual file space mappings are only supported for NAS nodes.

Mixed device types in libraries

Tivoli Storage Manager supports mixing different device types within a single automated library, if the library itself can distinguish among the different media for the different device types.

Libraries with this capability are those models that are supplied from the manufacturer already containing mixed drives, or capable of supporting the addition of mixed drives. Check with the manufacturer, and also check the Tivoli Storage Manager website for specific libraries that were tested on Tivoli Storage Manager with mixed device types.

For example, you can have Quantum SuperDLT drives, LTO Ultrium drives, and StorageTek T10000 drives in a single library that is defined to the Tivoli Storage Manager server. For examples of how to set this up, see:

“Defining Tivoli Storage Manager storage objects with commands” on page 104

“Configuring a 3494 library with multiple drive device types” on page 111

Different media generations in a library

While the Tivoli Storage Manager server now allows mixed device types in an automated library, the mixing of different generations of the same type of drive is still not supported. New drives cannot write the older media formats, and old drives cannot read new formats.

If the new drive technology cannot write to media formatted by older generation drives, the older media must be marked read-only to avoid problems for server operations. Also, the older drives must be removed from the library. The following are some examples of combinations that the Tivoli Storage Manager server does not support in a single library:

- SDLT 220 drives with SDLT 320 drives
- DLT 7000 drives with DLT 8000 drives
- StorageTek 9940A drives with 9940B drives
- UDO1 drives with UDO2 drives

There are exceptions to the rule against mixing generations of LTO Ultrium drives and media. The Tivoli Storage Manager server does support mixtures of the following types:

- LTO Ultrium Generation 1 (LTO1) and LTO Ultrium Generation 2 (LTO2)
- LTO Ultrium Generation 2 (LTO2) with LTO Ultrium Generation 3 (LTO3)
- LTO Ultrium Generation 3 (LTO3) with LTO Ultrium Generation 4 (LTO4)
- LTO Ultrium Generation 4 (LTO4) with LTO Ultrium Generation 5 (LTO5)
- LTO Ultrium Generation 5 (LTO5) with LTO Ultrium Generation 6 (LTO6)

The server supports these mixtures because the different drives can read and write to the different media. If you plan to upgrade all drives to Generation 2 (or Generation 3, Generation 4, or Generation 5), first delete all existing Ultrium drive definitions and the paths associated with them. Then, you can define the new Generation 2 (or Generation 3, Generation 4, or Generation 5) drives and paths.

Note:

1. LTO Ultrium Generation 3 drives can read only Generation 1 media. If you are mixing Ultrium Generation 1 with Ultrium Generation 3 drives and media in a single library, you must mark the Generation 1 media as read-only. All Generation 1 scratch volumes must be checked out.
2. LTO Ultrium Generation 4 drives can read only Generation 2 media. If you are mixing Ultrium Generation 2 with Ultrium Generation 4 drives and media in a single library, you must mark the Generation 2 media as read-only. All Generation 2 scratch volumes must be checked out.
3. LTO Ultrium Generation 5 drives can read only Generation 3 media. If you are mixing Ultrium Generation 3 with Ultrium Generation 5 drives and media in a single library, you must mark the Generation 3 media as read-only. All Generation 3 scratch volumes must be checked out.
4. LTO Ultrium Generation 6 drives can read only Generation 4 media. If you are mixing Ultrium Generation 4 with Ultrium Generation 6 drives and media in a single library, you must mark the Generation 4 media as read-only. All Generation 4 scratch volumes must be checked out.

To learn more about additional considerations when you mix LTO Ultrium generations, see “Defining LTO device classes” on page 208.

When you use Tivoli Storage Manager, you cannot mix drives that are 3592 drive generations. Use one of three special configurations. For details, see “Defining 3592 device classes” on page 200.

If you plan to encrypt volumes in a library, do not mix media generations in the library.

Mixed media and storage pools

You cannot mix media formats in a storage pool. Each unique media format must be mapped to a separate storage pool through its own device class.

This includes LTO formats. Multiple storage pools and their device classes of different types can point to the same library that can support them as explained in “Different media generations in a library” on page 73.

You can migrate to a new generation of a media type within the same storage pool by following these steps:

1. ALL older drives are replaced with the newer generation drives within the library (they cannot be mixed).
2. The existing volumes with the older formats are marked R/O if the new drive cannot append those tapes in the old format. If the new drive can write to the existing media in their old format, this is not necessary, but Step 1 is still required. If it is necessary to keep different drive generations that are read but not write compatible within the same library, separate storage pools for each must be used.

Library sharing

Library sharing or tape resource sharing allows multiple Tivoli Storage Manager servers to use the same tape library and drives on a storage area network (SAN) and to improve backup and recovery performance and tape hardware asset utilization.

When Tivoli Storage Manager servers share a library, one server is set up as the library manager and controls library operations such as mount and dismount. The library manager also controls volume ownership and the library inventory. Other servers are set up as library clients and use server-to-server communications to contact the library manager and request resources.

Library clients must be at the same or a lower version than the library manager server. A library manager cannot support library clients that are at a higher version. For example, a version 6.2 library manager can support a version 6.1 library client but cannot support a version 6.3 library client.

Chapter 4. Magnetic disk devices

Using magnetic disk devices, Tivoli Storage Manager can store essential data for server and client environments.

Tivoli Storage Manager stores data on magnetic disks in random access volumes, as data is normally stored on disk, and in files on the disk that are treated as sequential access volumes.

You can store the following types of data on magnetic disk devices:

- The database and recovery log
- Backups of the database
- Export and import data
- Client data that is backed up, archived, or migrated from client nodes. The client data is stored in storage pools.

See the following sections:

Tasks:
"Configuring random access volumes on disk devices" on page 81
"Configuring FILE sequential volumes on disk devices" on page 82
"Varying disk volumes online or offline" on page 82
"Cache copies for files stored on disk" on page 83
"Freeing space on disk" on page 83
"Scratch FILE volumes" on page 84
"Volume history file and volume reuse" on page 84

Note: Some of the tasks described in this chapter require an understanding of storage objects. For an introduction to these storage objects, see "Tivoli Storage Manager storage objects" on page 22.

Requirements for disk systems

Tivoli Storage Manager requires certain behaviors of disk storage systems for the database, the active and archive logs, and storage pool volumes of the DISK device class and of FILE device types.

Review the following Tivoli Storage Manager requirements for disk devices and compare them with information from your disk system vendor. A list of supported disk storage devices is not available. Contact the vendor for your disk system if you have questions or concerns about whether Tivoli Storage Manager requirements are supported. The vendor should be able to provide the configuration settings to meet these requirements.

I/O operation results must be reported synchronously and accurately. For the database and the active and archive logs, unreported or asynchronously reported write errors that result in data not being permanently committed to the storage

system can cause failures that range from internal processing errors to the inability to restart the server. Depending upon the error, the result could be the loss of some or all stored data.

Data in Tivoli Storage Manager storage pools, database volumes, and log volumes must be interdependent. Tivoli Storage Manager requires that the data written to these entities can be retrieved exactly as it was written. Also data in these entities must be consistent with one another. There cannot be timing windows in which data that is being retrieved varies depending on the way that an I/O system manages the writing of data. Generally, this means that replicated Tivoli Storage Manager environments must use features such as maintenance of write-order between the source and replication targets. It also requires that the database, log, and disk storage pool volumes be part of a consistency group in which any I/O to the members of the target consistency group are written in the same order as the source and maintain the same volatility characteristics. Requirements for I/O to disk storage systems at the remote site must also be met.

Database write operations must be nonvolatile for active and archive logs and DISK device class storage pool volumes. Data must be permanently committed to storage that is known to Tivoli Storage Manager. Tivoli Storage Manager has many of the attributes of a database system, and data relationships that are maintained require that data written as a group be permanently resident as a group or not resident as a group. Intermediate states produce data integrity issues. Data must be permanently resident after each operating-system write API invocation.

For FILE device type storage pool volumes, data must be permanently resident following an operating system flush API invocation. This API is used at key processing points in the Tivoli Storage Manager application. The API is used when data is to be permanently committed to storage and synchronized with database and log records that have already been permanently committed to disk storage.

For systems that use caches of various types, the data must be permanently committed by the write APIs for the database, the active and archive logs, and DISK device class storage pool volumes and by the flush API (for FILE device class storage pool volumes). Tivoli Storage Manager uses write-through flags internally when using storage for the database, the active and archive logs, and DISK device class storage pool volumes. Data for the I/O operation can be lost if nonvolatile cache is used to safeguard I/O writes to a device and the nonvolatile cache is battery protected. If there is a power loss and power is not restored before the battery is exhausted, then data can be lost. This would be the same as having uncommitted storage resulting in data integrity issues.

To write properly to the Tivoli Storage Manager database, to active and archive logs, and to DISK device class storage pool volumes, the operating system API write invocation must synchronously and accurately report the operation results. Similarly, the operating system API flush invocation for FILE device type storage pool volumes must also synchronously and accurately report the operation results. A successful result from the API for either write or flush must guarantee that the data is permanently committed to the storage system.

These requirements extend to replicated environments such that the remote site must maintain consistency with the source site in terms of the order of writes; I/O must be committed to storage at the remote site in the same order that it was written at the source site. The ordering applies to the set of files that Tivoli Storage Manager is writing, whether the files belong to the database, recovery log, or

storage pool volumes. Tivoli Storage Manager can recover from incomplete I/O scenarios if the ordering of writes is consistent between the source and target site.

To avoid having the Tivoli Storage Manager server at the local and remote site losing synchronization, the server at the remote site should not be started except in a fail-over situation. If there is a possibility that data at the source and target locations can lose synchronization, there must be a mechanism to recognize this situation. If synchronization is lost, the Tivoli Storage Manager server at the remote location must be restored by conventional means by using Tivoli Storage Manager database and storage pool restores.

Tivoli Storage Manager supports the use of remote file systems or drives for reading and writing storage pool data, database backups, and other data operations. Remote file systems in particular might report successful writes, even after being configured for synchronous operations. This mode of operation causes data integrity issues if the file system can fail after reporting a successful write. Check with the vendor of your file system to ensure that flushes are performed to nonvolatile storage in a synchronous manner.

Comparison of random access and sequential access disk devices

Before you configure your disk device, you must consider the differences between the two methods of storing data on disks and the advantages and disadvantages of each. The particular advantages that are provided by either device type depend on the operating system on which your Tivoli Storage Manager server is running.

Table 5 provides some general information about the characteristics of DISK devices (random access) and FILE devices (sequential access) and the benefits of each.

Table 5. Comparing random access and sequential access disk devices

Function	Random Access (DISK)	Sequential Access (FILE)	More Information
Storage space allocation and tracking	Disk blocks	Volumes	Space allocation and tracking by blocks uses more database storage space, and requires more processing power than space allocation and tracking by volume.
Concurrent volume access	A volume can be accessed concurrently by different operations	A volume can be accessed concurrently by different operations	Concurrent volume access means that two or more different operations can access the same volume at the same time.

Table 5. Comparing random access and sequential access disk devices (continued)

Function	Random Access (DISK)	Sequential Access (FILE)	More Information
Client restore operations	One session per restore	Multiple concurrent sessions access different volumes simultaneously on both the server and the storage agent. Active versions of client backup data are collocated in active-data pools.	Multi-session restore enables backup-archive clients to perform multiple restore sessions for no-query restore operations, increasing the speed of restores. Active-data pools that are defined by using sequential-access disk (FILE) enable fast client restore because the server does not physically mount tapes and does not position past inactive files. For more information, see “Backing up primary storage pools” on page 908, and the information about client restore operations in the <i>Optimizing Performance</i> guide.
Available for use in LAN-free backup	Not available	Available for LAN-free backup when using IBM General Parallel File System.	Using LAN-free backup, data moves over a dedicated storage area network (SAN) to the sequential-access storage device, freeing up bandwidth on the LAN. For more information, see “LAN-free data movement” on page 68.
Volume configuration	Operators need to define volumes and specify their sizes, or define space triggers to automatically allocate space when a threshold is reached.	The Tivoli Storage Manager server acquires and defines scratch volumes as needed if storage administrators set the MAXSCRATCH parameter to a value greater than zero. Operators can also define space triggers to automatically allocate space when a threshold is reached.	For more information about volumes on random-access media, see “Configuring random access volumes on disk devices” on page 81. For more information about volumes on FILE devices, see “Configuring FILE sequential volumes on disk devices” on page 82.
Tivoli Storage Manager server caching (after files are migrated to the next storage pool in the storage pool hierarchy)	Server caching is available, but overhead is incurred in freeing the cached space. For example, as part of a backup operation, the server must erase cached files to make room for storing new files.	Server caching is not necessary because access times are comparable to random access (DISK) access times.	Caching can improve how quickly the Tivoli Storage Manager server retrieves files during client restore or retrieve operations. For more information, see “Caching in disk storage pools” on page 298.

Table 5. Comparing random access and sequential access disk devices (continued)

Function	Random Access (DISK)	Sequential Access (FILE)	More Information
Recovery of disk space	<p>When caching is enabled, the space that is occupied by cached files is reclaimed on demand by the server.</p> <p>When caching is disabled, the server recovers disk space immediately after all physical files are migrated or deleted from within an aggregate.</p>	The server recovers disk space in a process that is called <i>reclamation</i> , which involves copying physical files to another volume, making the reclaimed volume available for reuse. This minimizes the amount of overhead because there is no mount time required.	For more information about reclamation, see “Reclaiming space in sequential-access storage pools” on page 382.
Aggregate reconstruction	Not available; the result is wasted space	Aggregate reconstruction occurs as part of the reclamation process. It is also available by using the RECONSTRUCT parameter on the MOVE DATA and MOVE NODEDATA commands.	<p>An <i>aggregate</i> is two or more files that are grouped together for storage purposes. Most data from backup-archive clients is stored in aggregates. Aggregates accumulate empty space as files are deleted, expire, or as they are deactivated in active-data pools.</p> <p>For more information, see “Tivoli Storage Manager reclamation” on page 34.</p>
Available for use as copy storage pools or active-data pools	Not available	Available	<p>Copy storage pools and active-data pools provide extra levels of protection for client data.</p> <p>For more information, see “Backing up primary storage pools” on page 908.</p>
File location	Volume location is limited by the trigger prefix or by manual specification	FILE volumes use directories. A list of directories can be specified. If directories correspond with file systems, performance is optimized.	

Table 5. Comparing random access and sequential access disk devices (continued)

Function	Random Access (DISK)	Sequential Access (FILE)	More Information
Restoring the database to an earlier level	See More Information	Use the REUSEDELAY parameter to retain volumes in a pending state. Volumes are not rewritten until the specified number of days have elapsed. During database restoration, if the data is physically present, it can be accessed after DSMSEV RESTORE DB.	Use the AUDIT VOLUME command to identify inconsistencies between information about a volume in the database and the actual content of the volume. You can specify whether the Tivoli Storage Manager server resolves the database inconsistencies it finds. For more information about auditing volumes, see “Auditing storage pool volumes” on page 912. For more information about reuse delay, see “Delaying reuse of volumes for recovery purposes” on page 911. For command syntax, refer to the <i>Administrator’s Reference</i> .
Migration	Performed by node. Migration from random-access pools can use multiple processes.	Performed by volume. Files are not migrated from a volume until all files on the volume have met the threshold for migration delay as specified for the storage pool. Migration from sequential-access pools can use multiple processes.	For more information, see “Migrating disk storage pools” on page 287.
Storage pool backup	Performed by node and file space. Every storage pool backup operation must check every file in the primary pool to determine whether the file must be backed up.	Performed by volume. For a primary pool, there is no need to scan every object in the primary pool every time the pool is backed up to a copy storage pool.	For more information, see “Storage pools” on page 24.
Copying active data	Performed by node and file space. Every storage pool copy operation must check every file in the primary pool to determine whether the file must be copied.	Performed by volume. For a primary pool, there is no need to scan every object in the primary pool every time the active data in the pool is copied to an active-data pool.	For more information, see “Storage pools” on page 24.

Table 5. Comparing random access and sequential access disk devices (continued)

Function	Random Access (DISK)	Sequential Access (FILE)	More Information
Transferring data from non-collocated to collocated storage	Major benefits by moving data from non-collocated storage to DISK storage, and then allowing data to migrate to collocated storage. For more information, see “Restoring files to a storage pool with collocation enabled” on page 934.	Some benefit by moving data from non-collocated storage to FILE storage, and then moving data to collocated storage.	For more information, see “Keeping client files together using collocation” on page 372.
Shredding data	If shredding is enabled, sensitive data is destroyed after it is deleted from a storage pool. Write caching on a random access device must be disabled if shredding is enforced.	Shredding is not supported on sequential access disk devices.	For more information, see “Securing sensitive client data” on page 529.
Data deduplication	Not available	Duplicate data in primary, copy, and active-data pools can be identified and removed, reducing the overall amount of time that is required to retrieve data from disk.	For more information, see “Deduplicating data” on page 299.

Configuring random access volumes on disk devices

Tivoli Storage Manager provides a predefined DISK device class that is used with all disk devices.

Procedure

To set up a random access volume on disk to store client backup, archive, or space-managed data, complete the following steps:

1. Define a storage pool that is associated with the DISK device class. For example, enter the following command to define a storage pool named ENGBACK1:

```
define stgpool engback1 disk maxsize=5G highmig=85 lowmig=40
```
2. Prepare a volume for use in a random access storage pool by defining the volume. If you do not specify a full path name, the command uses the current path.
 Define a 21 MB volume for the ENGBACK1 storage pool that is in the path c:\program files\tivoli\tsm\server and named stgvol.002. Enter the following command:

```
define volume engback1  
c:\program files\tivoli\tsm\server\stgvol.002' formatsize=21
```
3. Do one of the following:

- Specify the new storage pool as the destination for client files that are backed up, archived, or migrated, by modifying existing policy or creating new policy. See Chapter 13, “Implementing policies for client data,” on page 483 for details.
- Place the new storage pool in the storage pool migration hierarchy by updating an already defined storage pool. See “Example: Updating storage pools” on page 263.

Note: Define storage pool volumes on disk drives that reside on the server system, not on remotely mounted file systems. Network attached drives can compromise the integrity of the data that you are writing.

Related concepts:

“Disk devices” on page 64

Related tasks:

“Defining storage pool volumes” on page 271

Configuring FILE sequential volumes on disk devices

Magnetic disk storage uses files as volumes that store data sequentially, as on tape volumes. The space for FILE volumes is managed by the operating system rather than by Tivoli Storage Manager.

Related tasks:

“Defining sequential-access disk (FILE) device classes” on page 204

“Step 1: Defining device classes for database backups” on page 895

“Planning for sequential media used to export data” on page 748

“Defining storage pool volumes” on page 271

“Preparing volumes for sequential-access storage pools” on page 270

Varying disk volumes online or offline

To perform maintenance on a disk volume or to upgrade disk hardware, you can vary a disk volume offline. If Tivoli Storage Manager encounters a problem with a disk volume, the server automatically varies the volume offline.

About this task

Task	Required Privilege Class
Vary a disk volume online or offline	System or operator

For example, to vary the disk volume named STGVOL.POOL001 offline, enter:

```
vary offline stgvol.pool001
```

You can make the disk volume available to the server again by varying the volume online. For example:

```
vary online stgvol.pool001
```

Cache copies for files stored on disk

When you define a storage pool that uses disk random access volumes, you can choose to enable or disable cache. When you use cache, a copy of the file remains on disk storage even after the file is migrated to the next pool in the storage hierarchy, for example, to tape. The file remains in cache until the space it occupies is needed to store new files.

Using cache can improve how fast a frequently accessed file is retrieved. Faster retrieval can be important for clients that are storing space-managed files. If the file needs to be accessed, the copy in cache can be used rather than the copy on tape. However, using cache can degrade the performance of client backup operations and increase the space needed for the database.

Related tasks:

“Caching in disk storage pools” on page 298

Freeing space on disk

As client files expire, the space they occupy is not freed for other uses until you run expiration processing on the server.

Expiration processing deletes information from the database about any client files that are no longer valid according to the policies you have set. For example, suppose that four backup versions of a file exist in server storage, and only three versions are allowed in the backup policy (the management class) for the file. Expiration processing deletes information about the oldest of the four versions of the file. The space that the file occupied in the storage pool becomes available for reuse.

You can run expiration processing by using one or both of the following methods:

- Use the **EXPIRE INVENTORY** command.
- Set the **EXPINTERVAL** server option and specify the interval so that expiration processing runs periodically.

Shredding occurs only after a data deletion commits, but it is not necessarily completed immediately after the deletion. The space occupied by the data to be shredded remains occupied while the shredding takes place, and is not available as free space for new data until the shredding is complete. When sensitive data is written to server storage and the write operation fails, the data that was already written is shredded.

Related concepts:

“Securing sensitive client data” on page 529

Related reference:

“Running expiration processing to delete expired files” on page 514

Scratch FILE volumes

When the server needs a new volume, the server automatically creates a file that is a scratch volume, up to the number you specify.

You can specify a maximum number of scratch volumes for a storage pool that has a FILE device type.

When scratch volumes used in storage pools become empty, the files are deleted. Scratch volumes can be located in multiple directories on multiple file systems.

Volume history file and volume reuse

When you back up the database or export server information, Tivoli Storage Manager records information about the volumes that are used for these operations in the *volume history*. Tivoli Storage Manager does not allow you to reuse these volumes until you delete the volume information from the volume history.

To reuse volumes that were previously used for database backup or export, use the **DELETE VOLHISTORY** command.

Note: With Tivoli Storage Manager Extended Edition, the disaster recovery manager (DRM) function automatically deletes volume information during processing of the **MOVE DRMEDIA** command.

Related tasks:

“Protecting the volume history file” on page 903

Chapter 30, “Disaster recovery manager,” on page 1033

Chapter 5. Attaching devices for the server

For Tivoli Storage Manager to use a device, you must attach the device to your server system and install the appropriate device driver.

About this task

Attached devices must be on their own host bus adapter (HBA) and must not share with other devices types (disk, CDROM, and so on). IBM tape drives have some special requirements for HBAs and associated drivers.

Tasks:
"Attaching a manual drive"
"Attaching an automated library device" on page 86
"Device alias names" on page 87
"Selecting a device driver" on page 90
"Installing the Centera SDK for Centera shared libraries" on page 95

Attaching a manual drive

Attaching manual drives to your system allows you to utilize storage.

Procedure

Complete the following steps to attach a manual drive:

- For Fibre Channel (FC), Fibre Channel over Ethernet (FCoE), Serial Attached SCSI (SAS), or iSCSI adapters, complete the following steps:
 1. Install an adapter card and the associated drivers.
 2. Attach the device to the server system hardware by following the manufacture's instructions.
 3. Install the device drivers for attached tape devices.
- For SCSI adapters, complete the following steps:
 1. Install the SCSI adapter card in your system, if not already installed.
 2. Determine the SCSI IDs available on the SCSI adapter card to which you are attaching the device. Find one unused SCSI ID for each drive.
 3. Follow the manufacturer's instructions to set the SCSI ID for the drive to the unused SCSI IDs that you found. Usually this means setting switches on the back of the device or through the device operator's panel

Note: Each device that is connected in a chain to a single SCSI bus must be set to a unique SCSI ID. If each device does not have a unique SCSI ID, you might have serious system problems.

4. Follow the manufacturer's instructions to attach the device to your server system hardware.

Attention:

- a. Power off your system before attaching a device to prevent damage to the hardware.

- b. Attach a terminator to the last device in the chain of devices that are connected on one SCSI adapter card.
5. Install the appropriate device drivers. See “Selecting a device driver” on page 90.
6. Determine the name for the device and record the name. This information can help you when you must perform operations such as adding volumes. Keep the records for future reference.

Attaching an automated library device

You can attach an automated library device to your system to store your data on tapes.

Procedure

Perform the following steps to attach an automated library device:

1. Install the SCSI adapter card in your system, if not already installed.
2. Determine the SCSI IDs available on the SCSI adapter card to which you are attaching the device. Find one unused SCSI ID for each drive, and one unused SCSI ID for the library or autochanger controller.

Note: In some automated libraries, the drives and the autochanger share a single SCSI ID, but have different LUNs. For these libraries, only a single SCSI ID is required. Check the documentation for your device.

3. Follow the manufacturer's instructions to set the SCSI ID for the drives and library controller to the unused SCSI IDs that you found. Usually this means setting switches on the back of the device.

Note: Each device that is connected in a chain to a single SCSI bus must be set to a unique SCSI ID. If each device does not have a unique SCSI ID, you might have serious system problems.

4. Follow the manufacturer's instructions to attach the device to your server system hardware.

Attention:

- a. Power off your system before attaching a device to prevent damage to the hardware.
 - b. Attach a terminator to the last device in the chain of devices that are connected on one SCSI adapter card. Detailed instructions should be in the documentation that came with your hardware.
5. Install the appropriate device drivers. See “Selecting a device driver” on page 90.
6. Determine the name for each drive and for the library, and record the names. This information can help you when you need to perform operations such as adding volumes to an autochanger. Keep the records for future reference.
7. For the Tivoli Storage Manager server to access a SCSI library, set the device for the appropriate mode. This is usually called *random* mode; however, terminology can vary from one device to another. Refer to the documentation for your device to determine how to set it to the appropriate mode.

Note:

- a. Some libraries have front panel menus and displays that can be used for explicit operator requests. However, if you set the device to respond to such requests, it typically will not respond to Tivoli Storage Manager requests.
- b. Some libraries can be placed in *sequential* mode, in which volumes are automatically mounted in drives by using a sequential approach. This mode conflicts with how Tivoli Storage Manager accesses the device.

Device alias names

The server uses alias names to identify tape devices to the Tivoli Storage Manager device driver.

Device names for the Tivoli Storage Manager device driver differ from device names for the Windows device driver. For example, an automated library device might be known as 1b0.0.0.1 to the Tivoli Storage Manager device driver and as changerx (where x is a number 0–9), to the Windows device driver.

If you configure devices by using Tivoli Storage Manager commands, you must provide the device names as parameters to the **DEFINE PATH** command. If you modify device driver control, you must provide alias name information in the Device Exclude List. The names can be either:

- Drive letters, for devices that are attached as local, removable file systems
- Alias names, for devices that are controlled by either the Tivoli Storage Manager device driver or the Windows device drivers

Alias names replace the real device names in Tivoli Storage Manager commands and screens. The Tivoli Storage Manager device driver communicates with devices by using the alias names.

Alias names are displayed in the form mt $x.y.z.n$ or lb $x.y.z.n$, where:

mt Indicates that the device is a tape device. For example:

mt3 (Tape drive at SCSI ID 3, LUN 0, bus 0, port 0).

mt5.0.0.1 (Tape drive at SCSI ID 5, LUN 0, bus 0, port 1).

lb Indicates that the device is the controller for an automated library device. For example:

lb4.1 (Library at SCSI ID 4, LUN 1, bus 0, port 0).

x Indicates the SCSI ID for the targeted device.

y Indicates the logical unit number (LUN) for the targeted device.

z Indicates the bus number that is supported by the adapter device driver.

n Indicates the port number for the SCSI adapter device driver.

Note: Alias names can be abbreviated when the trailing numbers are zeros.

Displaying information about devices with **tsmdlst**

Use the **tsmdlst** utility to view device names and other information about medium-changer, and tape devices on the system.

Options

After devices are configured, you can run the **tsmdlst** utility to display device information. The utility is in the devices server directory, which is `\Program Files\Tivoli\TSM\server` by default.

/computer=computer_name

Specifies the name of the computer for which devices are listed. The default is the local system.

/detail

Displays details on devices in the list. By default, a summary is shown.

/all

Displays information about all types of devices. By default, only tape drives and tape libraries are included in the results.

/nogenertapecheck

Skips the step for opening detected drives to see if they are supported for the Tivoli Storage Manager GENERICTAPE device type.

/nohbacheck

Skips the step for HBA API detection, which might speed up processing. This option can be useful when debugging is needed.

/trace

Used for diagnostic purposes. Stores trace output in the `tsmdlst_trace.txt` file.

/? Displays usage information about **tsmdlst** and its parameters.

/x inquiry

Provides an alternate way to obtain serial number and worldwide name information. This option is used only for devices that are supported by the IBM tape device driver. The following parameters are specific to the `/x inquiry` option:

/processAll

Indicates that the process loops until all devices are processed.

/maxRetries=#

Indicates the maximum number of attempts to open each drive. This option requires the `/processAll` option.

/genpathfile

Use this option to generate a list of devices and serial numbers. The `tsmdlst_pathfile.txt` file is written with information for `/genmacropathsync` and `/genmacropathoffline`.

/includelib

If specified with `/genpathfile`, the list of devices includes libraries in addition to drives.

/genmacropathsync

Generates a macro to synchronize Tivoli Storage Manager paths for the storage agent based on serial number. A drive must have a serial number defined to Tivoli Storage Manager for this option to work.

/genmacropathoffline

Generates a macro to update Tivoli Storage Manager paths for the storage agent to online or offline status based on drive accessibility. A drive is accessible if an operating system open call results in: ERROR_SUCCESS, ERROR_BUSY or ERROR_ACCESS_DENIED. This option only works for devices that are using the IBM device driver. A symbolic name, for example `\\.\tape0`, is required to open a device.

The following options are specific to `/genmacropathsync` and `/genmacropathoffline`

/server=servername

Specifies the name of the server that the storage agent is using.

/stagent=stagentname

Specifies the name of the storage agent.

/tcps=address

Specifies the Tivoli Storage Manager server address.

/tcpport=port

Specifies the Tivoli Storage Manager server port. The default is 1500.

/id=id

Specifies the Tivoli Storage Manager administrative ID.

/pass=password

Specifies the Tivoli Storage Manager administrative password.

/devicetype=drivetype

Specifies the device type of the drive, for example, LTO. This option is case-sensitive and optional.

/libraryname=libname

Filters on the library name of the drive, for example LTO3584. This option is case-sensitive and optional.

/execmacropathsync

Issues the path synchronize macro to the Tivoli Storage Manager server.

/execmacropathoffline

Issues the path offline macro to the Tivoli Storage Manager server.

/addpaths

Adds define and update path statements. This option is used with `/genmacropathsync`.

/verbose

Lists both drive and path information returned from the Tivoli Storage Manager server and contents of the pathfile.

/encodednames

If a path is set to `online=no`, the device name encodes time stamp, error, and device as the updated device name.

Example: Display information about devices

Display information about tape devices and tape libraries for a local system, ATLAS, by issuing the **tsmdlst** utility:

```
tsmdlst
```

Note: The device name displayed is the alias name that can be used in the **DEFINE PATH** command and the **UPDATE PATH** command. The alias name is not the actual device name.

```

Computer Name:      ATLAS
TSM Device Driver:  TSMScsi - Running

2 HBAs were detected.

Manufacturer Model  Driver      Version  Firmware Description
-----
QLogic Corp QLA2462 ql2300.sys 9.1.9.25 5.04.02 QLogic QLA2462 Fibre Channel Adapter
QLogic Corp QLA2462 ql2300.sys 9.1.9.25 5.04.02 QLogic QLA2462 Fibre Channel Adapter

TSM Name  ID  LUN  Bus  Port  SSN      WWN      TSM Type Driver Device Identifier
-----
mt0.0.0.3 0  0  0  3  HU1206LY0B ..638D LTO      NATIVE HP      Ultrium 5-SCSI Y50S
mt1.0.0.3 1  0  0  3  HU1206LY9N ..6390 LTO      NATIVE HP      Ultrium 5-SCSI Y5AS
mt2.4.0.3 2  4  0  3  8395261003 ..C358 LTO      IBM      IBM      ULT3580-TD3 5AT0
lb3.0.0.3 3  0  0  3  1333508999 ..7A14 LIBRARY TSM      ATL      P3000      0100
mt3.1.0.3 3  1  0  3  1333508000 ..7A14 DLT      TSM      QUANTUM DLT7000      0100

```

Selecting a device driver

To use a tape device, you must install the appropriate device driver.

About this task

Windows device drivers are recommended for all devices. IBM device drivers are available for most IBM labeled devices. If a Windows device driver is not available for your device, and the device is supported by the Tivoli Storage Manager device driver, you can use the Tivoli Storage Manager device driver for your device.

Starting with Tivoli Storage Manager Version 6.2, support for native drivers through SCSI Passthru is available. You can choose to use a Windows Hardware Qualification Lab certified native device driver instead of the Tivoli Storage Manager device driver to control devices. Devices that are already controlled by the Tivoli Storage Manager device driver can be switched to a native driver without updating drive or device class definitions.

Drivers for IBM devices

Tivoli Storage Manager supports IBM device drivers for some IBM devices.

Install the IBM device driver for the following IBM devices:

- IBM 3494 library
- IBM Ultrium 3580, TS2230, TS2340 tape drives
- IBM 3581, 3582, 3583, 3584 tape libraries
- IBM 3590, 3590E, and 3590H tape drives
- IBM 3592 and TS1120 tape drives
- IBM TS3100, TS3200, TS3310, TS3400, and TS3500 tape libraries

IBM device drivers are available at the Fix Central support website:

1. Go to the Fix Central website: <http://www.ibm.com/support/fixcentral/>.
2. Select **System Storage** for the Product Group menu.
3. Select **Tape systems** for the System Storage menu.
4. Select **Tape drivers and software** for the Tape systems menu.
5. Select **Tape device drivers** for the Tape drivers and software menu.

6. Select your operating system for the Platform menu.

It is recommended that you install the most current driver available.

For IBM device driver documentation, see the following links:

- *IBM Tape Device Drivers Installation and User's Guide*: <http://www.ibm.com/support/docview.wss?uid=ssg1S7002972>
- *IBM Tape Device Drivers Programming Reference*: <http://www.ibm.com/support/docview.wss?uid=ssg1S7003032>

Tivoli Storage Manager supports all devices that are supported by IBM device drivers. However, Tivoli Storage Manager does not support all the operating-system levels that are supported by IBM device drivers. For the most up-to-date list of devices and operating-system levels that are supported by IBM device drivers, see the Tivoli Storage Manager Supported Devices website at http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html.

Tivoli Storage Manager Support for Multipath I/O with IBM Tape Devices

Multipath I/O is the use of different paths to get to the same physical device (for example, through multiple host bus adapters, switches, and so on). Multipathing helps ensure that there is no single point of failure.

The IBM tape device driver provides multipathing support so that if a path fails, the Tivoli Storage Manager server can use a different path to access data on a storage device. The failure and transition to a different path are undetected by the server. The IBM tape device driver also uses multipath I/O to provide dynamic load balancing for enhanced I/O performance.

A computer has a unique SCSI address and Tivoli Storage Manager device name for each path to a changer or tape device, even though some paths may be redundant. For each set of redundant paths, you must define only one path to Tivoli Storage Manager using one of the corresponding Tivoli Storage Manager device names.

You can determine which Tivoli Storage Manager device names are redundant by using a tool such as `tsmdlst` to review the device serial numbers. If multiple Tivoli Storage Manager changer or tape device names have the same serial number, then they are redundant and you must define only one to Tivoli Storage Manager.

For an overview of path failover and load balancing, as well as information about how to enable, disable, or query the status of path failover for each device, see the *IBM Tape Device Drivers Installation and User's Guide*.

Drivers for non IBM devices

Use the Windows device driver for tape drives and libraries if one is supplied with Windows. If the Windows device driver is not available and the device is supported, you can use the Tivoli Storage Manager device driver to control the device.

The Tivoli Storage Manager device driver is installed with the server. The Tivoli Storage Manager device driver uses persistent reservation for some tape drives. See technote 1470319 at <http://www.ibm.com/support/docview.wss?uid=swg21470319> for details.

For devices that are not currently supported by the Tivoli Storage Manager device driver, the Windows driver might be suitable.

- Removable media devices (attached as local file systems) require the Windows device driver.
- Unsupported tape drives require the Windows device driver and must be used with the GENERICTAPE device class. For more information, see the DEFINE DEVCLASS - GENERICTAPE command in the *Administrator's Reference*.

For details on device driver installation directories, see Installation directories in the *Installation Guide*.

Installing device drivers for IBM 3494 libraries

You can install device drivers to use IBM 3494 tape libraries. The IBM tape library driver consists of the ibmatl (a service) and other components.

About this task

To install the device driver for an IBM 3494 Tape Library Dataserver, refer to the *IBM TotalStorage Tape Device Drivers Installation and User's Guide*.

To define a path for the library, you can determine the symbolic name of the library by verifying the value entered in the `C:\winnt\ibmatl.conf` file. For example, if the symbolic name for the library in the `C:\winnt\ibmatl.conf` file is 3494a, then this is the name of your device. Drives in the library are set up separately.

Installing the Tivoli Storage Manager device driver

The Tivoli Storage Manager device driver is installed into the driver store through the Device Driver Installation Wizard. The wizard is displayed during the Tivoli Storage Manager device driver package installation.

About this task

Before you install a new version of the Tivoli Storage Manager device driver, uninstall the previous version. Then, complete this procedure during installation of the device driver package.

Procedure

1. When the Device Driver Installation Wizard welcome panel displays, select **Next** and proceed through the panels to install the device drivers.

Note: During installation, the system might display a Windows Security dialog box that asks if you would like to install the device software. Place a check mark on **Always trust software from "IBM Corporation"** and select **Install**

2. After your device drivers are installed, the final panel in the wizard is displayed. Select **Finish** to complete the installation.

Results

After a successful installation, use the Device Manager to configure devices with the Tivoli Storage Manager device driver.

Uninstalling the Tivoli Storage Manager device driver

Uninstall the Tivoli Storage Manager device driver any time you are planning on upgrading to a more current version.

Procedure

Complete this procedure to uninstall the Tivoli Storage Manager device driver.

1. From your Windows Control Panel, navigate to **Programs and Features**.
2. Remove or uninstall the **IBM Tivoli Storage Manager Device Driver** entry.
3. Do not manually remove the Windows Driver Package entries for `tmscsi`. These packages are automatically removed after the IBM Tivoli Storage Manager Device Driver program is removed in Step 2. These entries, however, might still appear in the Add or Remove Programs or Programs and Features windows until the window is refreshed.

Using Windows device drivers with the GENERICTAPE format

When a tape drive is controlled by the Windows device driver, in addition to the Tivoli Storage Manager tape formats, you might be able to use the drive with the GENERICTAPE format.

Because some tape drives do not have all of the functions that the Tivoli Storage Manager server requires, not all tape drives can be used with the GENERICTAPE device class. To determine whether you can use the Windows device driver with a specific tape drive, see “Creating a file to list devices and their attributes” on page 94. You can find the setup procedure for these devices at “Configuring devices not supported by the Tivoli Storage Manager server” on page 100.

When you use Windows device drivers with the GENERICTAPE device class, be aware of the following:

- Tivoli Storage Manager does not recognize the device type.

If you add devices and intend to use the GENERICTAPE device class, you must understand that the server does not know device types and recording formats. For example, if you use a Windows device driver for a 4MM drive that uses the DDS2 recording format, Tivoli Storage Manager knows only that the device is a tape drive. The default recording format is used.

The server cannot prevent errors when it does not know the device type. For example, if one GENERICTAPE device class points to a manual library device that contains a 4MM drive and an 8MM drive, the server might make an impossible request: mount a 4MM cartridge into an 8MM drive.

- Device problems might be more difficult to solve.

The server cannot report I/O errors with as much detail. The server can obtain only minimal information for display in the server console log.

It is recommended that you use the GENERICTAPE device class only with unsupported tape devices.

Creating a file to list devices and their attributes

A device can be used with the GENERICTAPE device class if it is supported by the Windows device driver and has specific capabilities.

About this task

The device should be able to complete the following tasks:

- Write in variable mode
- Write filemarks
- Can forward/reverse space blocks
- Can forward/reverse space filemarks

Procedure

A file listing devices and their attributes can be created by completing the following procedure.

1. Click **Start > Programs > Command Prompt** on the Windows **Start** button. The **Command Prompt** dialog appears.
2. Change directory to the directory in which the Tivoli Storage Manager Server was installed. For default installations, the path resembles the following:
`c:\program files\tivoli\tsm\server`
3. To create the file, type in the following command:
`tsmdlst > devlist.txt`
4. To view the file, type in the following command:
`notepad devlist.txt`

Controlling devices with the Tivoli Storage Manager device driver

On Windows systems, devices are automatically controlled by the default Windows device driver, even if you install the Tivoli Storage Manager driver (tsmscsi).

About this task

Tape drives can be automatically controlled by the Tivoli Storage Manager device driver if the Windows device drivers are not available. If the devices are not automatically configured and controlled by the Tivoli Storage Manager device driver, you must manually update the controlling driver for each device that you want controlled by the tsmscsi device driver.

Procedure

Perform this procedure from the **Device Manager Console**:

1. Right click on the device and select **Properties**. Select the **Driver** tab and **Driver File Details**. This allows you to see the driver that is controlling your device.
2. You will need to configure the device to be used by tsmscsi.sys by right-clicking on the device and selecting **Update Driver** or by selecting **Action** and then **Update Driver**. The *Hardware Update Wizard* appears.
3. Select **Browse my computer for driver software**.
4. Select **Let me pick from a list of device drivers on my computer**.
5. Select the IBM Tivoli Storage Manager device driver to control the device.
6. Click **Next**.

7. Verify that the device is configured correctly for tsmcsi:
 - a. Right-click the device and select **Properties**.
 - b. Select the driver tab and **driver details**.

Installing the Centera SDK for Centera shared libraries

Beginning with Tivoli Storage Manager Version 5.5, Centera shared libraries are not installed with the server. To use Centera with Tivoli Storage Manager, the Centera SDK must be installed.

Procedure

Perform the following steps when setting up the Tivoli Storage Manager server to access Centera.

1. Install the Tivoli Storage Manager server.
2. If you are upgrading from a previous level of Tivoli Storage Manager, delete the following Centera SDK library files from the directory where the server was installed:
 - FPLibrary.dll
 - FPParser.dll
 - fpos.dll
 - PAImodule.dll
3. Contact your EMC representative to obtain the installation packages and instructions to install the Centera SDK Version 3.2 or later.
4. Install the Centera SDK. During the installation, take note of the directory where the Centera SDK is installed.
 - a. Unzip and untar the package in a working directory.
 - b. Copy the files in the *lib32* directory to the directory with the server executable (dsmserve.exe).
5. Start the Tivoli Storage Manager server and set up the policy, device class, and storage pools for Centera.

Chapter 6. Configuring storage devices

Configure storage devices by defining the objects that represent the devices to the Tivoli Storage Manager server.

About this task

For the most up-to-date list of supported devices and operating-system levels, see the Supported Devices website at http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html.

Concepts:
"Planning for device configuration" on page 98
"Mixed device types in libraries" on page 72
"Impact of device changes on the SAN" on page 137
"Defining devices and paths" on page 189

Use the following table to locate instructions for specific tasks:

Tasks:
"Configuring devices not supported by the Tivoli Storage Manager server" on page 100
"Configuring removable media devices" on page 101
"Configuring devices using Tivoli Storage Manager commands" on page 103
"Configuring Tivoli Storage Manager servers to share SAN-connected devices" on page 131
"Configuring Tivoli Storage Manager for LAN-free data movement" on page 134
"Validating your LAN-free configuration" on page 135
Chapter 9, "Using NDMP for operations with NAS file servers," on page 219
"Configuring IBM 3494 libraries" on page 108
"ACSL-managed libraries" on page 121
"Troubleshooting device configuration" on page 135

You can perform configuration tasks by using the command-line interface. For information about Tivoli Storage Manager commands, see the *Administrator's Reference* or issue the **HELP** command from the command line of a Tivoli Storage Manager administrative client.

The tasks require an understanding of Tivoli Storage Manager storage objects. For an introduction to these storage objects, see "Tivoli Storage Manager storage objects" on page 22.

Planning for device configuration

Before Tivoli Storage Manager can use a removable media device, you must plan, attach, and configure the device.

Procedure

The following steps give an overview of the device configuration process:

1. Plan for the device.
2. Attach the device to the server. See the manufacturer documentation of the device for information about attaching the device.
3. Start the appropriate device driver. Both the Tivoli Storage Manager device driver and the native Windows device driver can be used. It might be necessary to specify which device driver acquires which devices.
4. Configure the device.

Important: In most cases, the server expects to have exclusive use of devices that are defined to the server. Attempting to use a Tivoli Storage Manager device with another application might cause the server operations to fail. This restriction does not apply to 3494 library devices, or when you use a storage area network (SAN) to share library devices.

5. Determine the media type and device type for client data.

You can link clients to devices by directing client data to a type of media. For example, accounting department data might be directed to LTO Ultrium tapes, and as a result the server would select LTO Ultrium devices.

You can direct data to a specific media type through Tivoli Storage Manager policy. When you register client nodes, you specify the associated policy.

For configuring devices by using Tivoli Storage Manager commands, you must also define or update the Tivoli Storage Manager policy objects that links clients to the pool of storage volumes and to the device.

6. Register clients to the policy domain defined or updated in Step 5. This step links clients and their data with storage volumes and devices.
7. Prepare media for the device.

Label tapes before they can be used. For automated library devices, you must add the media to the volume inventory by checking media into the library device.

Results

Manually configuring devices

If the tape drives are not automatically configured with the Tivoli Storage Manager driver, you must manually configure them.

Before you begin

When the Tivoli Storage Manager device driver is installed, some tape drives, and medium changers might automatically be configured if the Windows device drivers for the devices are not available.

Complete the following steps to determine whether a device was automatically configured with the Tivoli Storage Manager device driver:

1. Start the **Device Manager**.

2. Right-click the device and select **Properties**.
3. Select the **Driver** tab and **Driver File Details**. You can see the device driver that is controlling your device.

Alternatively, you can run `tsmdlst.exe` in the devices bin directory, which is `\Program Files\Tivoli\TSM\console` by default, to determine whether the devices were configured with the Tivoli Storage Manager device driver. If the devices were not configured with the Tivoli Storage Manager device driver, the **TSM Type** shows **GENERICTAPE**.

Procedure

Complete the following steps to manually configure devices for the Tivoli Storage Manager device driver:

1. Locate the device in the Device Manager console (`devmgmt.msc`) and select it. Tape drives are listed under **Tape drives**, and medium changers are under **Medium Changers**.
2. Configure the device for use by `tsmscsi.sys`.
 - a. Click **ActionUpdate Driver** and select **Update Driver**. You can also right-click on the device and select **Update Driver Software**.
 - b. Select **Browse my computer for driver software**.
3. Select **Let me pick from a list of device drivers on my computer**.
4. Click **Next**.
5. Select one of the following options, depending on the device that you are configuring:
 - For a tape drive, select **IBM Tivoli Storage Manager for Tape Drives**.
 - For a medium changer, select **IBM Tivoli Storage Manager for Medium Changers**.
6. Click **Next**.
7. Click **Close**.
8. Verify that the device was configured correctly for `tsmscsi`.
 - a. Right-click on the device and select **Properties**.
 - b. Select the **Driver** tab and **Driver Details**.
 - c. The **Driver Details** panel shows the device driver that is controlling the device. The name of the device driver is `tsmscsi.sys` for 32-bit Windows Server 2008, and `tsmscsi64.sys` for 64-bit Windows Server 2008.

What to do next

For Windows Server 2008 Server Core, devices cannot be configured through Device Manager. If the devices are not automatically configured, you must use the Tivoli Storage Manager **CHANGE DEVDRIVER** command to configure the devices. For more information, see technote 1320150 at <http://www.ibm.com/support/docview.wss?uid=swg21320150>.

Configuring devices not supported by the Tivoli Storage Manager server

You can configure devices that run with either their own device driver or with a Windows device driver when the devices meet Tivoli Storage Manager requirements.

About this task

Devices that are not supported by the Tivoli Storage Manager server can be added by using the Tivoli Storage Manager command line.

Procedure

1. Attach the device to the system.
Follow the manufacturer's instructions to attach the device to the system.
2. Set up the appropriate Windows device driver for the device.
3. Configure the device. The following guidelines must be followed:
 - Define the drive path with GENERICTAPE=Yes.
 - The device class must have a device type of GENERICTAPE.
 - Define a different device class and a different manual library device for every unique device type that is controlled by the Windows device driver. For example, to use a 4 mm drive and an 8 mm drive, define two manual libraries, and two device classes (both with device type GENERICTAPE).
4. Determine your backup strategy.
Determine which device the server backs up client data to, and whether client data is backed up to disk, and then migrated to tape, or if it is backed up directly to tape.
5. Update the Tivoli Storage Manager policy.
Define the Tivoli Storage Manager policy that links client data with media for the device.
6. Label volumes.

Results

For more information, see the following topics:

- “Configuring devices using Tivoli Storage Manager commands” on page 103
- “Creating a file to list devices and their attributes” on page 94
- “Defining Tivoli Storage Manager storage objects with commands” on page 104
- “Defining and updating a policy domain” on page 493
- Chapter 3, “Planning for server storage,” on page 59
- “Selecting a device driver” on page 90

Configuring removable media devices

You can add removable media devices by using Tivoli Storage Manager commands.

About this task

The following guidelines must be followed:

If a removable media device can be formatted with a file system, Tivoli Storage Manager might be able to use the device. The server recognizes the device as a device with type REMOVABLEFILE. To use device type REMOVABLEFILE for a device, the device must adhere to the following principles:

- It must not be supported by a device type that is available for a Tivoli Storage Manager device class.
- It must be a device with removable media, for example, Iomega Zip or Jaz drives, CD drive, or DVD drive.
- It must be viewed by the operating system as a removable media drive, and not as a fixed, hard disk drive. The server cannot use the device if the storage adapter card makes the removable media drive show up as a fixed disk drive to the operating system.

Tip: If a data cartridge that is associated with a REMOVABLEFILE device class has two sides, the server treats each side as a separate Tivoli Storage Manager volume. Tivoli Storage Manager REMOVABLEFILE device class supports only single-sided media.

You can use the CD or DVD media as input media on a target Tivoli Storage Manager server by using the REMOVABLEFILE device class for input. Using the REMOVABLEFILE device class allows the server to distinguish media volumes by a volume label to prompt for the next media, and to dismount media.

With CD support for Windows, you can also use CD media as an output device class. Using CD media as output requires other software that uses a file system on top of the CD media. This media allows other software to write to a CD by using a drive letter and file names. The media can be either CD-R (read) or CD-RW (read/write).

With DVD support for Windows, you can also use DVD media as an output device class. Using DVD media as output requires other software that uses a file system on top of the DVD media. DVDFORM software is a tool that comes with some DVD-RAM device drivers. The DVDFORM software, for example, allows you to label the media, which must be DVD-RAM, by using uppercase letters and numbers. When the media is formatted, you can use the LABEL system command to change the label.

Procedure

To set up a device, complete the following steps:

1. Attach the device to the system.
Follow the manufacturer documentation to attach the device to the system.
2. Set up the appropriate device driver for the device.
3. Configure the device.

The following parameters must be specified:

- The device class must have device type of REMOVABLEFILE.

- The library type can be either MANUAL or SCSI.
 - The device name that is used in defining the drives is the drive letter by which the system knows the drive.
4. Determine your backup strategy.
Determine which device the server backs up client data to, and whether client data is backed up to disk, and then migrated to tape, or if it is backed up directly to tape.
 5. Label removable file media.
Utilities are not supplied by the server to format or label CDs or DVDs. You must label CDs or DVDs with the device utilities from the manufacturer or Windows utilities because Tivoli Storage Manager does not provide utilities to format or label these media. The operating system utilities include the Disk Administrator program (a graphical user interface) and the label command.

Results

For more information, see the following topics:

- “Configuring devices using Tivoli Storage Manager commands” on page 103
- “Defining Tivoli Storage Manager storage objects with commands” on page 104
- “Defining and updating a policy domain” on page 493
- “Labeling media” on page 143
- Chapter 3, “Planning for server storage,” on page 59
- “Selecting a device driver” on page 90

Example of removable file support (CD):

The steps are included as an example of Tivoli Storage Manager REMOVABLEFILE support. This example takes an export object and moves it from one server to another.

About this task

- **Server A:**
 - Define a device class named *expfile* with a device type of FILE.
define devclass expfile devtype=file directory=c:\data\move maxcap=650M
 - Export the node. This command creates a file named *CDR03* in the *c:\data\move* directory. *CDR03* contains the export data for node USER1.
export node user1 filedata=all devclass=expfile vol=CDR03

You can use software for writing CDs to create a CD with volume label CDR03 that contains the file named CDR03.
- **Server B:**
 - Insert the CD in a drive on the Windows system, for example, E:
 - Issue the following Tivoli Storage Manager commands to import the node data on the CD volume CDR03:
define library manual
define devclass cdrom devtype=removablefile library=manual
define drive manual cddrive
define path server01 cddrive srctype=server desttype=drive
library=manual directory=e:\ device=e:
import node user1 filedata=all devclass=cdrom vol=CDR03

Example of removable file support (DVD-RAM):

The steps (similar to CD support) are used to move data from one server to another.

About this task

The following example shows how DVD-RAM drives work inside a SCSI library:

- **Server A:**
 - Configure the device.
 - For the library, follow the normal tape library configuration method.
 - To configure the DVD-RAM drives, use the following procedure:
 1. From your desktop, right click **My Computer**.
 2. Select **Device Manager**.
 3. Select the correct SCSI CD-ROM Device and right click for **Properties**.
 4. Select **Drivers**.
 5. Select **Update Driver** and choose the dvdram.sys file for the driver.
- Issue the following Tivoli Storage Manager commands to manage the library functions on the DVD-RAM volume DVD01 (use the library element map in the Tivoli Storage Manager device support pages for your library to determine the correct element of each drive):

```
define library dvdlib libtype=scsi
define drive dvdlib drv1 element 6001
define path sever1 dvdlib srctype=server desttype=library device=1b6.0.0.3
define path server1 drv1 srctype=server desttype=drive
  library=dvdlib directory=i:\ device=i:
checkin libv dvdlib search=yes status=scratch
checkout libv dvdlib DVD01 rem=no
define devclass a_class devtype=removablefile library=dvdlib
```

Configuring devices using Tivoli Storage Manager commands

You can add devices by issuing Tivoli Storage Manager commands.

About this task

The scenario that is documented adds a manual tape device, automated library devices, and a removable file system device such as an Iomega Jaz drive.

Automated library devices can have more than one type of device. The scenario shows the case of a library with one type of device (a DLT 8000 drive) and a library with two types of devices (a DLT 8000 drive and an LTO Ultrium drive).

Procedure

Perform the following steps to add a device:

1. Attach the device to the system. Follow the manufacturer's instructions to attach the device to the system.
2. Set up the appropriate device driver for the device.
3. Configure the device.
4. Determine which device the server backs up client data to, and whether client data is backed up to disk and then migrated to tape, or if it is backed up directly to tape.

5. Label the media.
6. Add new volumes to the library.

Results

Some of the tasks that are described require an understanding of Tivoli Storage Manager storage objects. For more information about Tivoli Storage Manager commands, see the *Administrator's Reference*.

For more information, see:

“Checking media into automated library devices” on page 144

“Defining and updating a policy domain” on page 493

Chapter 3, “Planning for server storage,” on page 59

“Selecting a device driver” on page 90

“Tivoli Storage Manager storage objects” on page 22

Defining Tivoli Storage Manager storage objects with commands

You can use commands to define storage objects. These objects are used to represent each library device and its drives, as well as their respective paths and the policy used to manage the media associated with each library device.

About this task

For additional information, see:

“Defining libraries”

“Defining drives in the library” on page 105

Defining libraries

All devices must be defined as libraries. Manual devices require a manual type library, and most automated devices require the SCSI type library. Automated libraries also require a path defined to them using the DEFINE PATH command.

About this task

You define libraries with the DEFINE LIBRARY command. See the following examples of the different ways to define a library:

Manual device

```
define library manual8mm libtype=manual
```

Automated library device with one device type

```
define library autodltlib libtype=scsi
```

Note: If you have a SCSI library with a barcode reader and you would like to automatically label tapes before they are checked in, you can specify the following:

```
define library autodltlib libtype=scsi autolabel=yes
define path server01 autodltlib srctype=server desttype=library
device=lb3.0.0.0
```

Automated library device with two device types

```
define library automixlib libtype=scsi
```

```
define path server01 automixlib srctype=server desttype=library
device=lb3.0.0.0
```

Removable file system device (Iomega Jaz drive)

```
define library manualjaz libtype=manual
```

For more information about defining Tivoli Storage Manager libraries, see “Defining devices and paths” on page 189.

Defining drives in the library

All drives that you wish to use must be defined to the library. You can define drives by issuing the DEFINE DRIVE command. You must also issue the DEFINE PATH command to define the path for each of the drives.

About this task

See the following examples for defining drives in the library:

Manual device

```
define drive manual8mm drive01
define drive manual8mm drive02

define path server01 drive01 srctype=server desttype=drive
library=manual8mm device=mt1.0.0.0
define path server01 drive02 srctype=server desttype=drive
library=manual8mm device=mt2.0.0.0
```

Automated library device with one device type

```
define drive autodltlib dlt_mt4
define drive autodltlib dlt_mt5

define path server01 dlt_mt4 srctype=server desttype=drive
library=autodltlib device=mt4.0.0.0
define path server01 dlt_mt5 srctype=server desttype=drive
library=autodltlib device=mt5.0.0.0
```

For drives in SCSI libraries with more than one drive, the server requires the element address for each drive. The element address indicates the physical location of a drive within an automated library. The server attempts to obtain the element address directly from the drive. If the drive is not capable of supplying the information, you must supply the element address in the drive definition.

Automated library device with two device types

```
define drive automixlib dlt_mt4
define drive automixlib lto_mt5

define path server01 dlt_mt4 srctype=server desttype=drive
library=automixlib device=mt4.0.0.0
define path server01 lto_mt5 srctype=server desttype=drive
library=automixlib device=mt5.0.0.0
```

For drives in SCSI libraries with more than one drive, the server requires the element address for each drive. The element address indicates the physical location of a drive within an automated library. The server attempts to obtain the element address directly from the drive. If the drive is not capable of supplying the information, you must supply the element address in the drive definition.

Removable file system device (Iomega Jaz drive)

```
define drive manualjaz drive01
```

```
define path server01 drive01 srctype=server desttype=drive
library>manualJAZ directory=e:\ device=e:
```

For additional information, see:

“Defining devices and paths” on page 189

“Defining drives” on page 190

Define the device classes that group together similar devices

Each Tivoli Storage Manager device must be a member of a Tivoli Storage Manager device class. Device classes are collections of similar devices, for example all 8 mm devices that use the same media format. You can define device classes by issuing the DEFINE DEVCLASS command.

About this task

See the following examples of defining device classes that group together similar devices:

Manual device

```
define devclass tape8mm_class devtype=8mm format=8500 library>manual8mm
```

Automated library device with one device type

```
define devclass autodlt_class devtype=dlt format=drive library=autodlplib
```

Automated library device with two device types

```
define devclass autodlt_class devtype=dlt format=dlt40 library=automixlib
define devclass autolto_class devtype=lto format=ultriumc library=automixlib
```

Important: Do not use the DRIVE format, which is the default. Because the drives are different types, Tivoli Storage Manager uses the format specification to select a drive. The results of using the DRIVE format in a mixed media library are unpredictable.

Removable file system device (Iomega Jaz drive)

```
define devclass jazdisk_class devtype=removablefile library>manualjaz
```

For detailed information about defining Tivoli Storage Manager device classes, see “Defining device classes” on page 194.

Creating a storage pool for the device added

Each Tivoli Storage Manager device must be associated with a Tivoli Storage Manager storage pool to allow it to be used to store client data. Storage pools are collections of media and like device classes.

About this task

They are organized for a grouping of specific types of media, for example a storage pool named TAPE8MM_POOL for the device class TAPE8MM_CLASS, and AUTODLT_POOL for the device class AUTODLT_CLASS. See the following examples of how to create a storage pool for the added device:

Manual device

```
define stgpool tape8mm_pool tape8mm_class maxscratch=20
```

Automated library device with one device type

```
define stgpool autodlt_pool autodlt_class maxscratch=20
```

Automated library device with two device types

```
define stgpool autodlt_pool autodlt_class maxscratch=20
```

```
define stgpool autolto_pool autolto_class maxscratch=20
```

Removable file system device (Iomega Jaz drive)

```
define stgpool manualjaz_pool jazdisk_class
```

For detailed information about defining storage pools, see Chapter 10, “Managing storage pools and volumes,” on page 257.

Determining backup strategies

Administrators are responsible for creating a backup strategy and implementing it through Tivoli Storage Manager policy. Typically, a backup strategy determines the device and media to which client data is written. It also determines if data is backed up directly to tape or if data is backed up to disk and then later migrated to tape.

Procedure

For disk-to-tape backups:

1. Set up a storage pool hierarchy
2. Use STANDARD default Tivoli Storage Manager policy

Results

For backups directly to tape, you must create new policy by copying default policy and modifying it for the desired results.

See “Configuring policy for direct-to-tape backups” on page 508.

Determining the media and device type for client backups

Determine the type of media and the type of device to which the server backs up client data by changing Tivoli Storage Manager policy.

About this task

See the following examples for how to determine the media and device type for client backups:

Manual device

To assign client node `astro` to the direct-to-tape policy named `dir2tape`, with the password `cadet`, enter:

```
register node astro cadet dir2tape
```

Automated library devices

To assign client node `astro` to a direct-to-tape policy domain named `dsk2tape`, with the password `cadet`, enter:

```
register node astro cadet dsk2tape
```

Removable file system device (Iomega Jaz drive)

To assign client node `astro` to a removable media device policy domain named `rmdev`, with the password `cadet`, enter:

```
register node astro cadet rmdev
```

Configuring IBM 3494 libraries

An IBM 3494 library can be added only by using Tivoli Storage Manager commands. One or more Tivoli Storage Manager servers can use a single IBM 3494 library.

About this task

See the following sections:

- “Configuring an IBM 3494 library for use by one server” on page 109
- “Sharing an IBM 3494 library among servers” on page 114
- “Migrating a shared IBM 3494 library to a library manager” on page 116
- “Sharing an IBM 3494 library by static partitioning of drives” on page 117
- “Categories in an IBM 3494 library”

For detailed and current library support information, see the Supported Devices website at http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html

Categories in an IBM 3494 library

The library manager built into the IBM 3494 library tracks the category number of each volume in the library. A single category number identifies all volumes used for the same purpose or application. Category numbers are useful when multiple systems share the resources of a single library.

Attention: If other systems or other Tivoli Storage Manager servers connect to the same 3494 library, each must use a unique set of category numbers. Otherwise, two or more systems may try to use the same volume, and cause corruption or loss of data.

Typically, a software application that uses a 3494 library uses volumes in one or more categories that are reserved for that application. To avoid loss of data, each application sharing the library must have unique categories. When you define a 3494 library to the server, you can use the `PRIVATECATEGORY` and `SCRATCHCATEGORY` parameters to specify the category numbers for private and scratch Tivoli Storage Manager volumes in that library. If the volumes are IBM 3592 WORM (write once, read many) volumes, you can use the `WORMSCRATCHCATEGORY` parameter to specify category numbers for scratch WORM volumes in the library. See “Tivoli Storage Manager volumes” on page 28 for more information on private, scratch, and scratch WORM volumes.

When a volume is first inserted into the library, either manually or automatically at the convenience I/O station, the volume is assigned to the insert category (X'FF00'). A software application such as Tivoli Storage Manager can contact the library manager to change a volume's category number. For Tivoli Storage Manager, you use the `CHECKIN LIBVOLUME` command (see “Checking media into automated library devices” on page 144).

The Tivoli Storage Manager server only supports 3590 and 3592 tape drives in an IBM 3494 library. The server reserves two different categories for each 3494 library object. The categories are private and scratch.

When you define a 3494 library, you can specify the category numbers for volumes that the server owns in that library by using the `PRIVATECATEGORY`,

SCRATCHCATEGORY, and if the volumes are IBM 3592 WORM volumes, the WORMSCRATCHCATEGORY parameters. For example:

```
define library my3494 libtype=349x privatecategory=400 scratchcategory=401  
wormscratchcategory=402
```

For this example, the server uses the following categories in the new my3494 library:

- **400 (X'190')** Private volumes
- **401 (X'191')** Scratch volumes
- **402 (X'192')** WORM scratch volumes

Note: The default values for the categories may be acceptable in most cases. However, if you connect other systems or Tivoli Storage Manager servers to a single 3494 library, ensure that each uses unique category numbers. Otherwise, two or more systems may try to use the same volume, and cause a corruption or loss of data.

For a discussion regarding the interaction between library clients and the library manager in processing Tivoli Storage Manager operations, see “Shared libraries” on page 154.

Configuring an IBM 3494 library for use by one server

In the following example, an IBM 3494 library containing two drives is configured for use by one Tivoli Storage Manager server.

Procedure

You must first set up the IBM 3494 library on the server system. This involves the following tasks:

1. Set the symbolic name for the library in the configuration file for the library device driver (c:\winnt\ibmatl.conf). This procedure is described in *IBM Tape Device Drivers Installation and User's Guide*.
2. Physically attach the devices to the server hardware or the SAN.
3. Install and configure the appropriate device drivers for the devices on the server that will use the library and drives.
4. Determine the device names that are needed to define the devices to Tivoli Storage Manager.

Results

For details, see the following topic:

- “Selecting a device driver” on page 90.

There are two possible configurations:

- In the first configuration, both drives in the library are the same device type. See “Configuring a 3494 library with a single drive device type” on page 110.
- In the second configuration, the drives are different device types.

Drives with different device types (or different generations of drives) are supported in a single physical library if you define one library to Tivoli Storage Manager for each type of drive (or generation of drive). For example, if you have two device types, such as 3590E and 3590H (or two generations of drives of the same device type), define two libraries. Then, define drives and device classes for each library. In each device class definition, you can use the FORMAT

parameter with a value of DRIVE, if you choose. See “Configuring a 3494 library with multiple drive device types” on page 111.

Configuring a 3494 library with a single drive device type

In this example, the 3494 library contains two IBM 3590 tape drives.

Procedure

1. Define a 3494 library named 3494LIB:

```
define library 3494lib libtype=349x
```

2. Define a path from the server to the library:

```
define path server1 3494lib srctype=server desttype=library  
device=library1
```

See “Defining libraries” on page 189 and “Supported library types” on page 61.

For more information about paths, see “Defining paths” on page 193.

3. Define the drives in the library:

```
define drive 3494lib drive01  
define drive 3494lib drive02
```

Both drives belong to the 3494LIB library.

See “Defining drives” on page 190.

4. Define a path from the server to each drive:

```
define path server1 drive01 srctype=server desttype=drive  
library=3494lib device=mt1.0.0.0  
define path server1 drive02 srctype=server desttype=drive  
library=3494lib device=mt2.0.0.0
```

The DEVICE parameter gives the device alias name for the drive. For more about device names, see “Device alias names” on page 87.

For more information about paths, see “Defining paths” on page 193.

5. Classify drives according to type by defining Tivoli Storage Manager device classes. For example, for the two 3590 drives in the 3494LIB library, use the following command to define a device class named 3494_CLASS:

```
define devclass 3494_class library=3494lib devtype=3590 format=drive
```

This example uses FORMAT=DRIVE as the recording format because both drives associated with the device class use the same recording format; both are 3590 drives. If instead one drive is a 3590 and one is a 3590E, you need to use specific recording formats when defining the device classes. See “Configuring a 3494 library with multiple drive device types” on page 111.

See also “Defining tape device classes” on page 196.

6. Verify your definitions by issuing the following commands:

```
query library  
query drive  
query path  
query devclass
```

For details, see the following topics:

“Requesting information about drives” on page 166

“Obtaining information about device classes” on page 215

“Obtaining information about paths” on page 182

“Obtaining information about libraries” on page 164

7. Define a storage pool named 3494_POOL associated with the device class named 3494_CLASS.

```
define stgpool 3494_pool 3494_class maxscratch=20
```

Key choices:

- a. Scratch volumes are empty volumes that are labeled and available for use. If you allow scratch volumes for the storage pool by specifying a value for the maximum number of scratch volumes, the server can choose from the scratch volumes available in the library, without further action on your part. If you do not allow scratch volumes, you must perform the extra step of explicitly defining each volume to be used in the storage pool.
- b. The default setting for primary storage pools is collocation by group. The default for copy storage pools and active-data pools is disablement of collocation. Collocation is a process by which the server attempts to keep all files belonging to a group of client nodes, a single client node, or a client file space on a minimal number of volumes. If collocation is disabled for a storage pool and clients begin storing data, you cannot easily change the data in the pool so that it is collocated. To understand the advantages and disadvantages of collocation, see “Keeping client files together using collocation” on page 372 and “How collocation affects reclamation” on page 391.

For more information, see “Defining storage pools” on page 257.

Configuring a 3494 library with multiple drive device types

In this example, the 3494 library contains two IBM 3590E tape drives and two IBM 3590H tape drives.

Procedure

1. Define *two* libraries, one for each type of drive. For example, to define 3590ELIB and 3590HLIB enter the following commands:

```
define library 3590elib libtype=349x scratchcategory=301 privatecategory=300
define library 3590hlib libtype=349x scratchcategory=401 privatecategory=400
```

See “Defining libraries” on page 189.

Note: Specify scratch and private categories explicitly. If you accept the category defaults for both library definitions, different types of media will be assigned to the same categories.

2. Define a path from the server to each library:

```
define path server1 3590elib srctype=server desttype=library device=library1
define path server1 3590hlib srctype=server desttype=library device=library1
```

The DEVICE parameter specifies the symbolic name for the library, as defined in the configuration file for the library device driver (c:\winnt\ibmatl.conf).

For more information about paths, see “Defining paths” on page 193.

3. Define the drives, ensuring that they are associated with the appropriate libraries.

- Define the 3590E drives to 3590ELIB.

```
define drive 3590elib 3590e_drive1
define drive 3590elib 3590e_drive2
```

- Define the 3590H drives to 3590HLIB.

```
define drive 3590hlib 3590h_drive3
define drive 3590hlib 3590h_drive4
```

Note: Tivoli Storage Manager does not prevent you from associating a drive with the wrong library.

See “Defining drives” on page 190.

4. Define a path from the server to each drive. Ensure that you specify the correct library.

- For the 3590E drives:

```
define path server1 3590e_drive1 srctype=server desttype=drive
library=3590elib device=mt1.0.0.0
define path server1 3590e_drive2 srctype=server desttype=drive
library=3590elib device=mt2.0.0.0
```

- For the 3590H drives:

```
define path server1 3590h_drive3 srctype=server desttype=drive
library=3590hlib device=mt3.0.0.0
define path server1 3590h_drive4 srctype=server desttype=drive
library=3590hlib device=mt4.0.0.0
```

The DEVICE parameter gives the device alias name for the drive. For more about device names, see “Device alias names” on page 87.

For more information about paths, see “Defining paths” on page 193.

5. Classify the drives according to type by defining Tivoli Storage Manager device classes, which specify the recording formats of the drives. Because there are separate libraries, you can enter a specific recording format, for example 3590H, or you can enter DRIVE.

```
define devclass 3590e_class library=3590elib devtype=3590 format=3590e
```

```
define devclass 3590h_class library=3590hlib devtype=3590 format=3590h
```

See “Defining tape device classes” on page 196.

6. To check what you have defined, enter the following commands:

```
query library
query drive
query path
query devclass
```

See the following topics:

- “Obtaining information about device classes” on page 215
- “Obtaining information about paths” on page 182
- “Requesting information about drives” on page 166

7. Create the storage pools to use the devices in the device classes you just defined. For example, define a storage pool named 3590EPOOL associated with the device class 3490E_CLASS, and 3590HPOOL associated with the device class 3590H_CLASS:

```
define stgpool 3590epool 3590e_class maxscratch=20
define stgpool 3590hpool 3590h_class maxscratch=20
```

Key choices:

- a. Scratch volumes are labeled, empty volumes that are available for use. If you allow scratch volumes for the storage pool by specifying a value for the maximum number of scratch volumes, the server can choose from the scratch volumes available in the library, without further action on your part. If you do not allow scratch volumes, you must perform the extra step of explicitly defining each volume to be used in the storage pool.
- b. The default setting for primary storage pools is collocation by group. The default for copy storage pools and active-data pools is disablement of collocation. Collocation is a process by which the server attempts to keep all files belonging to a group of client nodes, a single client node, or a client file space on a minimal number of volumes. If collocation is disabled for a storage pool and clients begin storing data, you cannot easily change the data in the pool so that it is collocated. To understand the advantages and disadvantages of collocation, see “Keeping client files together using collocation” on page 372 and “How collocation affects reclamation” on page 391.

For more information, see “Defining storage pools” on page 257.

Checking in and labeling 3494 library volumes

Ensure that enough volumes in the library are available to the server. Keep enough labeled volumes on hand so that you do not run out during an operation such as client backup. Label and set aside extra scratch volumes for any potential recovery operations you might have later.

About this task

Each volume that is used by a server for any purpose must have a unique name. This requirement applies to all volumes, whether the volumes are used for storage pools, or used for operations such as database backup or export. The requirement also applies to volumes that reside in different libraries.

The procedures for volume check-in and labeling are the same whether the library contains drives of a single device type, or drives of multiple device types.

Note: If your library has drives of multiple device types, you defined two libraries to the Tivoli Storage Manager server in the procedure in “Configuring a 3494 library with multiple drive device types” on page 111. The two Tivoli Storage Manager libraries represent the one physical library. The check-in process finds all available volumes that are not already checked in. You must check in media separately to each defined library. Ensure that you check in volumes to the correct Tivoli Storage Manager library.

Procedure

1. Check in the library inventory. The following shows two examples.
 - Check in volumes that are already labeled:
`checkin libvolume 3494lib search=yes status=scratch checklabel=no`
 - Label and check in volumes:
`label libvolume 3494lib search=yes checkin=scratch`
2. Depending on whether you use scratch volumes or private volumes, do one of the following:
 - If you use only scratch volumes, ensure that enough scratch volumes are available. For example, you might need to label more volumes. As volumes are used, you might also need to increase the number of scratch volumes that are allowed in the storage pool that you defined for this library.
 - If you want to use private volumes in addition to or instead of scratch volumes in the library, define volumes to the storage pool you defined. The volumes that you define must have been already labeled and checked in. See “Defining storage pool volumes” on page 271.

Results

For more information about checking in volumes, see “Checking media into automated library devices” on page 144.

Sharing an IBM 3494 library among servers

Sharing an IBM 3494 library requires one of the following environments.

About this task

- The library must be on a SAN.
- By using the dual ports on 3590 drives in the library, the drives and the library are connected to two systems on which Tivoli Storage Manager servers run.

Procedure

The following tasks are required for Tivoli Storage Manager servers to share library devices over a SAN:

1. Ensure the server that is defined as the library manager is at the same or higher version as the server or servers that are defined as library clients.
2. Set up server-to-server communications.
3. Set up the device on the server systems.
4. Set up the library on the library manager server. In the following example, the library manager server is named MANAGER.
5. Set up the library on the library client server. In the following example, the library client server is named CLIENT.

Results

For more information about configuring 3494 libraries, see “Categories in an IBM 3494 library” on page 108.

Setting up a 3494 library on the server system and SAN

You must first set up the device on the server system, which involves certain tasks.

Procedure

1. Set the symbolic name for the library in the configuration file for the library device driver. This procedure is described in the *IBM Tape Device Drivers Installation and User's Guide*.
2. Physically attach the devices to the SAN or to the server hardware.
3. On each server system that will access the library and drives, install and configure the appropriate device drivers for the devices.
4. Determine the device names that are needed to define the devices to Tivoli Storage Manager.

Results

For details, see “Selecting a device driver” on page 90

Note: You can also configure a 3494 library so that it contains drives of multiple device types or different generations of drives of the same device type. The procedure for working with multiple drive device types is similar to the one described for a LAN in “Configuring a 3494 library with multiple drive device types” on page 111.

For details about mixing generations of drives, see “Defining 3592 device classes” on page 200 and “Defining LTO device classes” on page 208.

Setting up the 3494 library manager server

Use the following procedure as an example of how to set up a Tivoli Storage Manager server as a library manager named MANAGER.

Procedure

1. Define a 3494 library named 3494SAN:

```
define library 3494san libtype=349x shared=yes
```

2. Define a path from the server to the library:

```
define path manager 3494san srctype=server desttype=library  
device=library1
```

The DEVICE parameter specifies the symbolic name for the library, as defined in the configuration file for the library device driver (c:\winnt\ibmatl.conf).

For more information about paths, see “Defining paths” on page 193.

3. Define the drives in the library:

```
define drive 3494san drivea  
define drive 3494san driveb
```

4. Define a path from the server to each drive:

```
define path manager drivea srctype=server desttype=drive library=3494san  
device=mt4.0.0.0  
define path manager driveb srctype=server desttype=drive library=3494san  
device=mt5.0.0.0
```

For more information about paths, see “Defining paths” on page 193.

5. Define all the device classes that are associated with the shared library.

```
define devclass 3494_class library=3494san devtype=3590
```

6. Check in the library inventory. The following shows two examples. In both cases, the server uses the name on the barcode label as the volume name.

To check in volumes that are already labeled, use the following command:

```
checkin libvolume 3494san search=yes status=scratch checklabel=no
```

To label and check in the volumes, use the following command:

```
label libvolume 3494san checkin=scratch search=yes
```

7. Set any required storage pools for the shared library with a maximum of 50 scratch volumes.

```
define stgpool 3494_sanpool tape maxscratch=50
```

Setting up the 3494 library client servers

Use the following sample procedure for each Tivoli Storage Manager server that will be a library client server.

Procedure

1. Define the server that is the library manager:

```
define server manager serverpassword=secret hladdress=9.115.3.45 lladdress=1580  
crossdefine=yes
```

2. Define a shared library named 3494SAN, and identify the library manager:

Note: Ensure that the library name agrees with the library name on the library manager.

```
define library 3494san libtype=shared primarylibmanager=manager
```

3. *Perform this step from the library manager.* Define a path from the library client server to each drive that the library client server will be allowed to access. The device name should reflect the way the *library client* system sees the device.

There must be a path defined from the library manager to each drive in order for the library client to use the drive. The following is an example of how to define a path:

```
define path client drivea srctype=server desttype=drive
  library=3494san device=mt3.0.0.0
define path client driveb srctype=server desttype=drive
  library=3494san device=mt4.0.0.0
```

For more information about paths, see “Defining paths” on page 193.

4. *Return to the library client for the remaining steps.* Define all the device classes that are associated with the shared library.

```
define devclass 3494_class library=3494san devtype=3590
```

Set the parameters for the device class the same on the library client as on the library manager. Making the device class names the same on both servers is also a good practice, but is not required.

The device class parameters specified on the library manager server override those specified for the library client. This is true whether or not the device class names are the same on both servers. If the device class names are different, the library manager uses the parameters specified in a device class that matches the device type specified for the library client.

Note: If a library client requires a setting that is different from what is specified in the library manager's device class (for example, a different mount limit), do the following:

- a. Create an additional device class on the library manager server. Specify the parameter settings you want the library client to use.
 - b. Create a device class on the library client with the same name and device type as the new device class you created on the library server.
5. Define the storage pool, BACKTAPE, that will use the shared library.

```
define stgpool backtape 3494_class maxscratch=50
```
 6. Repeat this procedure to define additional servers as library clients. For a discussion regarding the interaction between library clients and the library manager in processing Tivoli Storage Manager operations, see “Shared libraries” on page 154

Migrating a shared IBM 3494 library to a library manager

If you have been sharing an IBM 3494 library among Tivoli Storage Manager servers by using the 3494SHARED option in the dsmserv.opt file, you can migrate to sharing the library by using a library manager and library clients.

About this task

To help ensure a smoother migration and to ensure that all tape volumes that are being used by the servers get associated with the correct servers, perform the following migration procedure.

Procedure

1. Do the following on *each* server that is sharing the 3494 library:
 - a. Update the storage pools using the UPDATE STGPOOL command. Set the value for the HIGHMIG and LOWMIG parameters to 100%.
 - b. Stop the server by issuing the HALT command.
 - c. Edit the dsmserv.opt file and make the following changes:
 - 1) Comment out the 3494SHARED YES option line

- 2) Activate the DISABLESCHEDS YES option line if it is not active
- 3) Activate the EXPINTERVAL X option line if it is not active and change its value to 0, as follows:
`EXPINTERVAL 0`
- d. Start the server.
- e. Enter the following Tivoli Storage Manager command:
`disable sessions`
2. Set up the library manager on the Tivoli Storage Manager server of your choice (see “Setting up server communications” on page 131 and “Setting up the library manager server” on page 131).
3. Do the following on the remaining servers (the library clients):
 - a. Save the volume history file.
 - b. Check out all the volumes in the library inventory. Use the CHECKOUT LIBVOLUME command with REMOVE=NO.
 - c. Follow the library client setup procedure (“Setting up the 3494 library client servers” on page 115).
4. Do the following on the library manager server:
 - a. Check in each library client's volumes. Use the CHECKIN LIBVOLUME command with the following parameter settings:
 - STATUS=PRIVATE
 - OWNER=<library client name>

Note: You can use the saved volume history files from the library clients as a guide.
 - b. Check in any remaining volumes as scratch volumes. Use the CHECKIN LIBVOLUME command with STATUS=SCRATCH.
5. Halt all the servers.
6. Edit the dsmserv.opt file and comment out the following lines in the file:
`DISABLESCHEDS YES`
`EXPINTERVAL 0`
7. Start the servers.

Sharing an IBM 3494 library by static partitioning of drives

If your IBM 3494 library is not on a SAN, you can use partitioning to share that library among Tivoli Storage Manager servers.

About this task

Tivoli Storage Manager uses the capability of the 3494 library manager, which allows you to partition a library between multiple Tivoli Storage Manager servers. Library partitioning differs from library sharing on a SAN in that with partitioning, there are no Tivoli Storage Manager library managers or library clients.

When you partition a library on a LAN, each server has its own access to the same library. For each server, you define a library with tape volume categories unique to that server. Each drive that resides in the library is defined to only one server. Each server can then access only those drives it has been assigned. As a result, library partitioning does not allow dynamic sharing of drives or tape volumes because they are pre-assigned to different servers using different names and category codes.

In the following example, an IBM 3494 library containing four drives is attached to a Tivoli Storage Manager server named ASTRO and to another Tivoli Storage Manager server named JUDY.

Note: Tivoli Storage Manager can also share the drives in a 3494 library with other servers by enabling the 3494SHARED server option. When this option is enabled, you can define all of the drives in a 3494 library to multiple servers, if there are SCSI connections from all drives to the systems on which the servers are running. This type of configuration is not recommended, however, because when this type of sharing takes place there is a risk of contention between servers for drive usage, and operations can fail.

Setting up the 3494 library on the server system

You must first set up the 3494 library on the server system.

Procedure

Setting up the 3494 library involves the following tasks:

1. Set the symbolic name for the library in the configuration file for the library device driver. This procedure is described in *IBM Tape Device Drivers Installation and User's Guide*.
2. Physically attach the devices to the server hardware.
3. On each server system that accesses the library and drives, install and configure the appropriate device drivers for the devices.
4. Determine the device names that are needed to define the devices to Tivoli Storage Manager.

Results

For details, see “Selecting a device driver” on page 90.

Defining 3494 library devices to the Tivoli Storage Manager server ASTRO

Complete the following steps to define the 3493 library.

Procedure

1. Define the 3494 library named 3494LIB:
`define library 3494lib libtype=349x privatecategory=400 scratchcategory=600`

The PRIVATECATEGORY and SCRATCHCATEGORY are set differently from the default settings. See “Categories in an IBM 3494 library” on page 108.

2. Define the path from the server, ASTRO, to the library:
`define path astro 3494lib srctype=server desttype=library
device=library1`

The DEVICE parameter specifies the symbolic name for the library, as defined in the configuration file for the library device driver (c:\winnt\ibmatl.conf).

See “Defining libraries” on page 189 and “Supported library types” on page 61.

For more information about paths, see “Defining paths” on page 193.

3. Define the drives that are partitioned to server ASTRO:
`define drive 3494lib drive1
define drive 3494lib drive2`
4. Define the path from the server, ASTRO, to each of the drives:

```
define path astro drive1 srctype=server desttype=drive library=3494lib
device=mt1.0.0.0
define path astro drive2 srctype=server desttype=drive library=3494lib
device=mt2.0.0.0
```

The **DEVICE** parameter gives the device alias name for the drive. For more about device names, see “Device alias names” on page 87.

5. Classify drives according to type by defining Tivoli Storage Manager device classes. For example, to classify the two drives in the 3494LIB library, use the following command to define a device class named 3494_CLASS:

```
define devclass 3494_class library=3494lib devtype=3590 format=drive
```

This example uses **FORMAT=DRIVE** as the recording format because both drives associated with the device class use the same recording format; both are 3590 drives. If instead one drive is a 3590 and one is a 3590E, you need to use specific recording formats when defining the device classes. See “Configuring a 3494 library with multiple drive device types” on page 111.

See “Defining tape device classes” on page 196.

6. Verify your definitions by issuing the following commands:

```
query library
query drive
query path
query devclass
```

See the following topics:

- “Obtaining information about device classes” on page 215
- “Obtaining information about paths” on page 182
- “Requesting information about drives” on page 166

7. Define a storage pool named 3494_POOL associated with the device class named 3494_CLASS:

```
define stgpool 3494_pool 3494_class maxscratch=20
```

Key choices:

- a. Scratch volumes are empty volumes that are labeled and available for use. If you allow scratch volumes for the storage pool by specifying a value for the maximum number of scratch volumes, the server can choose from the scratch volumes available in the library, without further action on your part. If you do not allow scratch volumes, you must perform the extra step of explicitly defining each volume to be used in the storage pool.
- b. The default setting for primary storage pools is collocation by group. The default for copy storage pools and active-data pools is disablement of collocation. Collocation is a process by which the server attempts to keep all files belonging to a group of client nodes, a single client node, or a client file space on a minimal number of volumes. If collocation is disabled for a storage pool and clients begin storing data, you cannot easily change the data in the pool so that it is collocated. To understand the advantages and disadvantages of collocation, see “Keeping client files together using collocation” on page 372 and “How collocation affects reclamation” on page 391.

For more information, see “Defining storage pools” on page 257.

Defining 3494 library devices to the Tivoli Storage Manager server JUDY

The DEVICE parameter specifies the device special file for the library management control points.

Procedure

1. Define the 3494 library named 3494LIB:

```
define library 3494lib libtype=3494 privatecategory=112 scratchcategory=300
```

The PRIVATECATEGORY and SCRATCHCATEGORY are defined differently than the first server's definition. See "Categories in an IBM 3494 library" on page 108.

2. Define the path from the server, JUDY, to the library:

```
define path judy 3494lib srctype=server desttype=library  
device=library1
```

The DEVICE parameter specifies the symbolic name for the library, as defined in the configuration file for the library device driver (c:\winnt\ibmatl.conf).

See "Defining libraries" on page 189 and "Supported library types" on page 61.

For more information about paths, see "Defining paths" on page 193

3. Define the drives that are partitioned to server JUDY:

```
define drive 3494lib drive3  
define drive 3494lib drive4
```

4. Define the path from the server, JUDY, to each of the drives:

```
define path judy drive3 srctype=server desttype=drive library=3494lib  
device=mt3.0.0.0  
define path judy drive4 srctype=server desttype=drive library=3494lib  
device=mt4.0.0.0
```

For more information about paths, see "Defining paths" on page 193.

5. Classify drives according to type by defining Tivoli Storage Manager device classes. For example, to classify the two drives in the 3494LIB library, use the following command to define a device class named 3494_CLASS:

```
define devclass 3494_class library=3494lib devtype=3590 format=drive
```

This example uses FORMAT=DRIVE as the recording format because both drives associated with the device class use the same recording format; both are 3590 drives. If instead one drive is a 3590 and one is a 3590E, you need to use specific recording formats when defining the device classes. See "Configuring a 3494 library with multiple drive device types" on page 111.

See "Defining tape device classes" on page 196.

6. Verify your definitions by issuing the following commands:

```
query library  
query drive  
query path  
query devclass
```

See the following topics:

- "Obtaining information about device classes" on page 215
- "Requesting information about drives" on page 166

7. Define a storage pool named 3494_POOL associated with the device class named 3494_CLASS.

```
define stgpool 3494_pool 3494_class maxscratch=20
```

Key choices:

- a. Scratch volumes are empty volumes that are labeled and available for use. If you allow scratch volumes for the storage pool by specifying a value for the maximum number of scratch volumes, the server can choose from the scratch volumes available in the library, without further action on your part. If you do not allow scratch volumes, you must perform the extra step of explicitly defining each volume to be used in the storage pool.
- b. The default setting for primary storage pools is collocation by group. The default for copy storage pools and active-data pools is disablement of collocation. Collocation is a process by which the server attempts to keep all files belonging to a group of client nodes, a single client node, or a client file space on a minimal number of volumes. If collocation is disabled for a storage pool and clients begin storing data, you cannot easily change the data in the pool so that it is collocated. To understand the advantages and disadvantages of collocation, see “Keeping client files together using collocation” on page 372 and “How collocation affects reclamation” on page 391.

For more information, see “Defining storage pools” on page 257.

ACSLS-managed libraries

Tivoli Storage Manager supports tape libraries controlled by StorageTek Automated Cartridge System Library Software (ACSLS). The ACSLS library server manages the physical aspects of tape cartridge storage and retrieval.

The ACSLS client application communicates with the ACSLS library server to access tape cartridges in an automated library. Tivoli Storage Manager is one of the applications that gains access to tape cartridges by interacting with ACSLS through its client, which is known as the control path. The Tivoli Storage Manager server reads and writes data on tape cartridges by interacting directly with tape drives through the data path. The control path and the data path are two different paths.

In order to utilize ACSLS functions, StorageTek Library Attach software must be installed.

The ACSLS client daemon must be initialized before starting the server using StorageTek Library Attach. For detailed installation, configuration, and system administration of ACSLS, refer to the appropriate StorageTek documentation.

Configuring an ACSLS-managed library

The library ACSLS is attached to the ACSLS server, and the drives are attached to the Tivoli Storage Manager server. The ACSLS server and the Tivoli Storage Manager server must be on different systems. Refer to the ACSLS installation documentation for details about how to set up the library.

About this task

There are two configurations that are described in this section:

- In the first configuration, both drives in the ACSLS library are the same device type. See “Configuring an ACSLS library with a single drive device type” on page 122.
- In the second configuration, the drives are different device types.

Drives with different device types (or different generations of drives) are supported in a single physical library if you define one library to Tivoli Storage Manager for each type of drive (or generation of drive). If you have two device

types, such as 9840 and T10000 (or two generations of drives of the same device type), define two libraries. Then, define drives and device classes for each library. In each device class definition, you can use the FORMAT parameter with a value of DRIVE, if you choose. See “Configuring an ACSLS library with multiple drive device type” on page 123.

Configuring an ACSLS library with a single drive device type

The parameter ACSID specifies the number that the Automatic Cartridge System System Administrator (ACSSA) assigned to the library. Issue the QUERY ACS command to your ACSLS system to determine the number for your library ID.

Procedure

1. Define an ACSLS library named ACSLIB:

```
define library acslib libtype=acsls acsid=1
```

2. Define the drives in the library:

```
define drive acslib drive01 acsdrvid=1,2,3,4
define drive acslib drive02 acsdrvid=1,2,3,5
```

The ACSDRVID parameter specifies the ID of the drive that is being accessed. The drive ID is a set of numbers that indicate the physical location of a drive within an ACSLS library. This drive ID must be specified as a, l, p, d, where a is the ACSID, l is the LSM (library storage module), p is the panel number, and d is the drive ID. The server needs the drive ID to connect the physical location of the drive to the drive's SCSI address. See the StorageTek documentation for details.

See “Defining drives” on page 190.

3. Define a path from the server to each drive:

```
define path server1 drive01 srctype=server desttype=drive
  library=acslib device=mt1.0.0.0
define path server1 drive02 srctype=server desttype=drive
  library=acslib device=mt2.0.0.0
```

The DEVICE parameter gives the device alias name for the drive. For more about device names, see “Device alias names” on page 87.

For more information about paths, see “Defining paths” on page 193.

4. Classify drives according to type by defining Tivoli Storage Manager device classes. For example, to classify the two drives in the ACSLIB library, issue the following command to define a device class that is named ACS_CLASS:

```
define devclass acs_class library=acslib devtype=ecartridge format=drive
```

This example uses FORMAT=DRIVE as the recording format because both drives associated with the device class use the same recording format; for example, both are T10000 drives. If instead one drive is a 9840 and one is a T10000, you must use specific recording formats when you define the device classes. See “Configuring an ACSLS library with multiple drive device type” on page 123.

See “Defining tape device classes” on page 196.

5. To check what you defined, issue the following commands:

```
query library
query drive
query path
query devclass
```

See the following topics:

- “Obtaining information about device classes” on page 215
- “Obtaining information about paths” on page 182

- “Requesting information about drives” on page 166
6. Create the storage pool to use the devices in the device class you just defined. For example, define a storage pool that is named ACS_POOL associated with the device class ACS_CLASS:

```
define stgpool acs_pool acs_class maxscratch=20
```

Key choices:

- a. Scratch volumes are labeled, empty volumes that are available for use. If you allow scratch volumes for the storage pool by specifying a value for the maximum number of scratch volumes, the server can choose from the scratch volumes available in the library, without further action on your part. If you do not allow scratch volumes, you must complete the extra step of explicitly defining each volume to be used in the storage pool.
- b. The default setting for primary storage pools is collocation by group. The default for copy storage pools and active-data pools is disablement of collocation. Collocation is a process by which the server attempts to keep all files belonging to a group of client nodes, a single client node, or a client file space on a minimal number of volumes. If collocation is disabled for a storage pool and clients begin storing data, you cannot easily change the data in the pool so that it is collocated. To understand the advantages and disadvantages of collocation, see “Keeping client files together using collocation” on page 372 and “How collocation affects reclamation” on page 391.

For more information, see “Defining storage pools” on page 257.

Results

Configuring an ACSLS library with multiple drive device type

The following example shows how to set up an ACSLS library with a mix of two 9840 drives and two T10000 drives.

Procedure

1. Define two ACSLS libraries that use the same ACSID. For example, to define 9840LIB and T10000LIB, enter the following commands:

```
define library 9840lib libtype=acsls acsid=1
define library T10000lib libtype=acsls acsid=1
```

The ACSID parameter specifies the number that the Automatic Cartridge System System Administrator (ACSSA) assigned to the libraries. Issue the QUERY ACS command to your ACSLS system to determine the number for your library ID.

2. Define the drives, ensuring that they are associated with the appropriate libraries.

Note: Tivoli Storage Manager does not prevent you from associating a drive with the wrong library.

- Define the 9840 drives to 9840LIB.

```
define drive 9840lib 9840_drive1 acsdrvid=1,2,3,1
define drive 9840lib 9840_drive2 acsdrvid=1,2,3,2
```

- Define the T10000 drives to T10000LIB.

```
define drive T10000lib T10000_drive3 acsdrvid=1,2,3,3
define drive T10000lib T10000_drive4 acsdrvid=1,2,3,4
```

The ACSDRVID parameter specifies the ID of the drive that is being accessed. The drive ID is a set of numbers that indicate the physical location of a drive

within an ACSLS library. This drive ID must be specified as a, l, p, d, where a is the ACSID, l is the LSM (library storage module), p is the panel number, and d is the drive ID. The server needs the drive ID to connect the physical location of the drive to the drive's SCSI address. See the StorageTek documentation for details.

See "Defining drives" on page 190.

3. Define a path from the server to each drive. Ensure that you specify the correct library.

- For the 9840 drives:

```
define path server1 9840_drive1 srctype=server desttype=drive
library=9840lib device=mt1.0.0.0
```

```
define path server1 9840_drive2 srctype=server desttype=drive
library=9840lib device=mt2.0.0.0
```

- For the T10000 drives:

```
define path server1 T10000_drive3 srctype=server desttype=drive
library=T10000lib device=mt3.0.0.0
```

```
define path server1 T10000_drive4 srctype=server desttype=drive
library=T10000lib device=mt4.0.0.0
```

The DEVICE parameter gives the device alias name for the drive. For more about device names, see "Device alias names" on page 87.

For more information about paths, see "Defining paths" on page 193.

4. Classify the drives according to type by defining Tivoli Storage Manager device classes, which specify the recording formats of the drives. Because there are separate libraries, you can enter a specific recording format, for example 9840, or you can enter DRIVE. For example, to classify the drives in the two libraries, use the following commands to define one device class for each type of drive:

```
define devclass 9840_class library=9840lib devtype=ecartridge format=9840D
```

```
define devclass T10000_class library=T10000lib devtype=ecartridge format=T10000D
```

See "Defining tape device classes" on page 196.

5. To check what you defined, enter the following commands:

```
query library
query drive
query path
query devclass
```

See the following topics:

- "Obtaining information about device classes" on page 215
- "Obtaining information about paths" on page 182
- "Requesting information about drives" on page 166

6. Create the storage pools to use the devices in the device classes that you just defined. For example, define storage pools that are named 9840_POOL associated with the device class 9840_CLASS and T10000_POOL associated with the device class T10000_CLASS:

```
define stgpool 9840_pool 9840_class maxscratch=20
```

```
define stgpool T10000_pool T10000_class maxscratch=20
```

Key choices:

- a. Scratch volumes are labeled, empty volumes that are available for use. If you allow scratch volumes for the storage pool by specifying a value for the maximum number of scratch volumes, the server can choose from the scratch volumes available in the library, without further action on your part.

If you do not allow scratch volumes, you must complete the extra step of explicitly defining each volume to be used in the storage pool.

- b. The default setting for primary storage pools is collocation by group. The default for copy storage pools and active-data pools is disablement of collocation. Collocation is a process by which the server attempts to keep all files belonging to a group of client nodes, a single client node, or a client file space on a minimal number of volumes. If collocation is disabled for a storage pool and clients begin storing data, you cannot easily change the data in the pool so that it is collocated. To understand the advantages and disadvantages of collocation, see “Keeping client files together using collocation” on page 372 and “How collocation affects reclamation” on page 391.

For more information, see “Defining storage pools” on page 257.

Setting up an ACSLS library manager server

Use the following procedure as an example of how to set up a Tivoli Storage Manager server as a library manager named GLENCOE:

About this task

When upgrading multiple servers that participate in library sharing, upgrade all the servers at once, or do the library manager servers and then the library client servers. Library manager servers are compatible with earlier library clients. However, library clients are not compatible with earlier library manager servers.

Note: An exception to this rule is when a fix or product enhancement requires concurrent code changes to the server, storage agent, and library client.

Procedure

1. Verify that the server that is the library manager is running. Start it if it is not.
 - a. Start the Windows Services Management Console (services.msc).
 - b. Select the service. For example, TSM Server1.
 - c. Right-click and select **Start**.
2. Obtain the library and drive information for the shared library device:
 - a. Run the tsmdlst.exe utility. The utility is in the \Program Files\Tivoli\TSM\server directory.
3. Define a library whose library type is ACSLS. For example:
`define library macgregor libtype=acsls shared=yes`
4. Define the path from the server to the library:
`define path glencoe macgregor srctype=server desttype=library
device=1b0.0.0.2`
5. Define the drives in the library.
`define drive macgregor drivea acsdrvid=1,0,1,0
define drive macgregor driveb acsdrvid=1,0,1,1`

This example uses the acsdrvid value, which specifies the ID of the drive that is being accessed in an ACSLS library. The drive ID is a set of numbers that indicates the physical location of a drive within an ACSLS library. This drive ID must be specified as a,l,p,d, where a is the ACSID, l is the LSM (library storage module), p is the panel number, and d is the drive ID. The server needs the drive ID to connect the physical location of the drive to the drive's SCSI address. See the StorageTek documentation for details.

6. Define the path from the server to each of the drives.

```
define path glencoe drivea srctype=server desttype=drive library=macgregor
device=mt0.1.0.2
define path glencoe driveb srctype=server desttype=drive library=macgregor
device=mt0.2.0.2
```

7. Define at least one device class.

```
define devclass tape devtype=dlt library=macgregor
```

8. Check in the library inventory. The following example checks all volumes into the library inventory as scratch volumes. The server uses the name on the bar code label as the volume name.

```
checkin libvolume macgregor search=yes status=scratch
checklabel=barcode
```

9. Set up a storage pool for the shared library with a maximum of 50 scratch volumes.

```
define stgpool backtape tape
description='storage pool for shared macgregor' maxscratch=50
```

Setting up an ACSLS library client server

Use the following procedure as an example of how to set up a Tivoli Storage Manager server named WALLACE as a library client.

About this task

You must define the library manager server before you set up the library client server.

Procedure

1. Verify that the server that is the library client is running, and start it if it is not:
 - a. Start the Windows Services Management Console (services.msc).
 - b. Select the service. For example, TSM Server1.
 - c. Right-click and select **Start**.

2. Obtain the library and drive information for the shared library device:

- a. Run the tsmdlst.exe utility. The utility is in the \Program Files\Tivoli\TSM\server directory.

3. Define the shared library, MACGREGOR, and identify the library manager. Ensure that the library name is the same as the library name on the library manager.

```
define library macgregor libtype=shared primarylibmanager=glencoe
```

4. *Issue the following commands from an admin client:* Define the paths from the library client server to each of the drives.

```
define path wallace drivea srctype=server desttype=drive library=macgregor
device=mt0.1.0.3
define path wallace driveb srctype=server desttype=drive library=macgregor
device=mt0.2.0.3
```

5. *Return to the library client for the remaining steps:* Define at least one device class.

```
define devclass tape devtype=dlt mountretention=1 mountwait=10
library=macgregor
```

Set the parameters for the device class the same on the library client as on the library manager. Making the device class names the same on both servers is also a good practice, but is not required.

The device class parameters that are specified on the library manager server override those specified for the library client. This is true whether or not the device class names are the same on both servers. If the device class names are

different, the library manager uses the parameters specified in a device class that matches the device type specified for the library client.

Note: If a library client requires a setting that is different from what is specified in the library manager's device class (for example, a different mount limit), do the following:

- a. Create an additional device class on the library manager server. Specify the parameter settings that you want the library client to use.
 - b. Create a device class on the library client with the same name and device type as the new device class you created on the library server.
6. Define the storage pool, LOCHNESS, that will use the shared library.

```
define stgpool lochness tape
description='storage pool for shared macgregor' maxscratch=50
```
 7. Update the copy group to set the destination to the storage pool, LOCHNESS
 8. Repeat this procedure to define additional servers as library clients.

Checking in and labeling ACSLS library volumes

Ensure that enough volumes are available to the server in the library. You must label volumes that do not already have a standard label. Keep enough labeled volumes on hand so that you do not run out during an operation such as client backup.

About this task

Each volume used by a server for any purpose must have a unique name. This requirement applies to all volumes, whether the volumes are used for storage pools, or used for operations such as database backup or export. The requirement also applies to volumes that reside in different libraries.

Attention: If your library has drives of multiple device types, you defined *two* libraries to the Tivoli Storage Manager server in the procedure in “Configuring an ACSLS library with multiple drive device type” on page 123. The two Tivoli Storage Manager libraries represent the *one* physical library. The check-in process finds all available volumes that are not already checked in. You must check in media *separately* to each defined library. Ensure that you check in volumes to the correct Tivoli Storage Manager library.

Procedure

1. Check in the library inventory. The following shows examples for libraries with a single drive device type and with multiple drive device types.
 - Check in volumes that are already labeled:

```
checkin libvolume acslib search=yes status=scratch checklabel=no
```
 - Label and check in volumes:

```
label libvolume acslib search=yes overwrite=no checkin=scratch
```
2. Depending on whether you use scratch volumes or private volumes, do one of the following:
 - If you use only scratch volumes, ensure that enough scratch volumes are available. For example, you may need to label more volumes. As volumes are used, you may also need to increase the number of scratch volumes allowed in the storage pool that you defined for this library.
 - If you want to use private volumes in addition to or instead of scratch volumes in the library, define volumes to the storage pool you defined. The

volumes you define must have been already labeled and checked in. See “Defining storage pool volumes” on page 271.

Results

For more information about checking in volumes, see:

- “Checking media into automated library devices” on page 144
- “Checking media into automated library devices” on page 144

Managing virtual tape libraries

A virtual tape library (VTL) does not use physical tape media. When using VTL storage, you can exceed the capabilities of a physical tape library. The ability to define many volumes and drives can provide greater flexibility for the storage environment.

Considerations for using virtual tape libraries

There are some considerations for defining a library as a virtual tape library (VTL), including enhancements for performance and setup of your hardware.

About this task

Defining a VTL to the Tivoli Storage Manager server can help improve performance because the server handles mount point processing for VTLs differently than real tape libraries. The physical limitations for real tape hardware are not applicable to a VTL, affording options for better scalability.

You can use a VTL for any virtual tape library when the following conditions are true:

- There is no mixed media involved in the VTL. Only one type and generation of drive and media is emulated in the library.
- Every server and storage agent with access to the VTL has paths that are defined for all drives in the library.

If either of these conditions are not met, any mount performance advantage from defining a VTL library to the Tivoli Storage Manager server can be reduced or negated.

VTLs are compatible with earlier versions of both library clients and storage agents. The library client or storage agent is not affected by the type of library that is used for storage. If mixed media and path conditions are true for a SCSI library, it can be defined or updated as LIBTYPE=VTL.

Storage capacity for virtual tape libraries

Because virtual tape libraries (VTLs) do not have the physical limitations that real tape hardware does, their capacity for storage is more flexible.

The concept of storage capacity in a virtual tape library is different from capacity in physical tape hardware. In a physical tape library, each volume has a defined capacity, and the library's capacity is defined in terms of the total number of volumes in the library. The capacity of a VTL, alternatively, is defined in terms of total available disk space. You can increase or decrease the number and size of volumes on disk.

This variability affects what it means to run out of space in a VTL. For example, a volume in a VTL can run out of space before reaching its assigned capacity if the total underlying disk runs out of space. In this situation, the server can receive an end-of-volume message without any warning, resulting in backup failures.

When out-of-space errors and backup failures occur, disk space is usually still available in the VTL. It is hidden in volumes that are not in use. For example, volumes that are logically deleted or returned to scratch status in the Tivoli Storage Manager server are only deleted in the server database. The VTL is not notified, and the VTL maintains the full size of the volume as allocated in its capacity considerations.

To help prevent out-of-space errors, ensure that any SCSI library that you update to LIBTYPE=VTL is updated with the RELABELSCRATCH parameter set to YES. The RELABELSCRATCH option enables the server to overwrite the label for any volume that is deleted and to return the volume to scratch status in the library. The RELABELSCRATCH parameter defaults to YES for any library defined as a VTL.

Drive configuration for virtual tape libraries

Drive configuration in a virtual tape library (VTL) is variable, depending on the needs of your environment.

Most VTL environments use as many drives as possible to maximize the number of concurrent tape operations. A single tape mount in a VTL environment is typically faster than a physical tape mount. However, using many drives increases the amount of time that the Tivoli Storage Manager server requires when a mount is requested. The selection process takes longer as the number of drives that are defined in a single library object in the server increases. Virtual tape mounts can take as long or longer than physical tape mounts depending on the number of drives in the VTL.

For best results when you create drives, check with your VTL vendor about device-specific recommendations. If more than 300-500 drives for each VTL are required, you can logically partition the VTL into multiple libraries and assign drives to each library. Operating system and SAN hardware configurations could impose limitations on the number of devices that can be utilized within the VTL library.

Adding a virtual tape library to your environment

Define a virtual tape library (VTL) to take advantage of mount performance and scalability advantages.

About this task

VTLs are identified by using the **DEFINE LIBRARY** command and specifying LIBTYPE=VTL. Because a VTL library functionally interacts with the server in the same way that a SCSI library does, it is possible to use the **UPDATE LIBRARY** command to change the library type of a SCSI library that is already defined. You do not have to redefine the library.

Example

The following examples show how to add a VTL library to your environment.

Add a new VTL library

If you have a new VTL library and want to use the VTL enhancements that are available in Tivoli Storage Manager Version 6.3, define the library as a VTL to the server:

```
define library chester libtype=vtl
```

This sets up the new VTL library and enables the RELABELSCRATCH option to relabel volumes that have been deleted and returned to scratch status.

Update an existing SCSI library to a VTL

If you have a SCSI library and you want to change it to a VTL, use the **UPDATE LIBRARY** command to change the library type:

```
update library calzone libtype=vtl
```

You can only issue this command when the library being updated is defined with LIBTYPE=SCSI.

Revert a real tape library from the VTL library type

If you define a SCSI tape library as a VTL and want to change it back to the SCSI library type, update the library by issuing the **UPDATE LIBRARY** command:

```
update library chester libtype=scsi
```

Defining or deleting all drives and paths for a single library

Use the **PERFORM LIBACTION** command to set up a single SCSI or virtual tape library (VTL) with one step.

About this task

If you are setting up or modifying your hardware environment and must create or change large numbers of drive definitions, the **PERFORM LIBACTION** command can make this task much simpler. You can define a new library and then define all drives and paths to the drives. Or, if you have an existing library that you want to delete, you can delete all existing drives and their paths in one step.

The **PREVIEW** parameter allows you to view the output of commands before they are processed to verify the action that you want to perform. If you are defining a library, a path to the library must already be defined if you want to specify the **PREVIEW** parameter. You cannot use the **PREVIEW** and **DEVICE** parameters together.

The **PERFORM LIBACTION** command can only be used for SCSI and VTL libraries. If you are defining drives and paths for a library, the **SANDISCOVERY** option must be supported and enabled. The tape library must be able to return the drive serial number address association.

Procedure

To set up a VTL library named ODIN, complete these steps:

1. Define the library.

```
define library odin libtype=vtl
```
2. Define two drives and their paths for your new library, ODIN.

```
perform libaction odin action=define device=1b0.0.0.2 prefix=dr
```



```

The server then issues the following commands:
define path tsmserver odin srct=server destt=library device=1b0.0.0.2
define drive odin dr0
define path tsmserver dr0 srct=server destt=drive library=odin
device=mt0.1.0.2 define drive odin dr1
define path tsmserver dr1 srct=server destt=drive library=odin
device=mt0.2.0.2

```

Configuring Tivoli Storage Manager servers to share SAN-connected devices

The steps to configure servers to share SAN-connected devices include setting up server communications, the library manager server, and the library client servers.

Before you begin

Ensure that your systems meet licensing requirements for library sharing. An IBM Tivoli Storage Manager for Storage Area Networks entitlement is required for each Tivoli Storage Manager server that is configured as a library client or a library manager in a SAN environment.

About this task

The following tasks are required to share tape library devices over a SAN:

Task	Required Privilege Class
“Setting up server communications”	System or unrestricted storage
“Setting up the library manager server”	System or unrestricted storage
“Setting up the library client servers” on page 133	System or unrestricted storage

Setting up server communications

Before Tivoli Storage Manager servers can share a storage device over a SAN, you must set up server communications. This requires configuring each server as you would for Enterprise Administration, which means you define the servers to each other using the cross-define function.

About this task

Set up each server with a unique name.

For details, see “Setting up communications among servers” on page 686.

Setting up the library manager server

You must set up the library manager server in order to configure the Tivoli Storage Manager servers to share SAN-connected devices.

About this task

Use the following procedure as an example of how to set up a Tivoli Storage Manager server as a library manager named ASTRO:

Procedure

1. Verify that the server that is the library manager is running. Start it if it is not.
 - a. Start the Windows Services Management Console (services.msc).
 - b. Select the service. For example, TSM Server1.
 - c. Right-click and select **Start**.

2. Obtain the library and drive information for the shared library device:
 - a. Run the tsmdlst.exe utility. The utility is in the \Program Files\Tivoli\TSM\server directory.

3. Define a library whose library type is SCSI. For example:

```
define library sangroup libtype=scsi shared=yes
```

This example uses the default for the library's serial number, which is to have the server obtain the serial number from the library itself at the time that the path is defined. Depending on the capabilities of the library, the server might not be able to automatically detect the serial number. In this case, the server does not record a serial number for the device, and is not able to confirm the identity of the device when you define the path or when the server uses the device.

4. Define the path from the server to the library.

```
define path astro sangroup srctype=server desttype=library  
device=1b0.0.0.2
```

If you did not include the serial number when you defined the library, the server now queries the library to obtain this information. If you did include the serial number when you defined the library, the server verifies what you defined and issues a message if there is a mismatch.

5. Define the drives in the library.

```
define drive sangroup drivea  
define drive sangroup driveb
```

This example uses the default for the drive's serial number, which is to have the server obtain the serial number from the drive itself at the time that the path is defined. Depending on the capabilities of the drive, the server might not be able to automatically detect the serial number. In this case, the server does not record a serial number for the device, and is not able to confirm the identity of the device when you define the path or when the server uses the device.

This example also uses the default for the drive's element address, which is to have the server obtain the element number from the drive itself at the time that the path is defined.

The element address is a number that indicates the physical location of a drive within an automated library. The server needs the element address to connect the physical location of the drive to the drive's SCSI address. You can have the server obtain the element number from the drive itself at the time that the path is defined, or you can specify the element number when you define the drive.

Depending on the capabilities of the library, the server might not be able to automatically detect the element address. In this case, you must supply the element address when you define the drive. If you need the element numbers, check the device worksheet that is filled out in step 6 on page 86. Element numbers for many libraries are available at http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager.

6. Define the path from the server to each of the drives.

```
define path astro drivea srctype=server desttype=drive library=sangroup
device=mt0.1.0.2
define path astro driveb srctype=server desttype=drive library=sangroup
device=mt0.2.0.2
```

If you did not include the serial number or element address when you defined the drive, the server now queries the drive or the library to obtain this information.

7. Define at least one device class.

```
define devclass tape devtype=dlt library=sangroup
```

8. Check in the library inventory. The following example checks all volumes into the library inventory as scratch volumes. The server uses the name on the bar code label as the volume name.

```
checkin libvolume sangroup search=yes status=scratch
checklabel=barcode
```

9. Set up a storage pool for the shared library with a maximum of 50 scratch volumes.

```
define stgpool backtape tape
description='storage pool for shared sangroup' maxscratch=50
```

Setting up the library client servers

You must set up the library client server in order to configure the Tivoli Storage Manager servers to share SAN-connected devices.

About this task

You must define the library manager server. Use the following procedure as an example of how to set up a Tivoli Storage Manager server named JUDY as a library client.

Procedure

1. Verify that the server that is the library client is running. Start the server if it is not running:
 - a. Start the Windows Services Management Console (services.msc).
 - b. Select the service. For example, TSM Server1.
 - c. Right-click and select **Start**.

2. Obtain the library and drive information for the shared library device:

- a. Run the tsmdlst.exe utility. The utility is in the \Program Files\Tivoli\TSM\server directory.

3. Define the shared library, SANGROUP, and identify the library manager. Ensure that the library name is the same as the library name on the library manager.

```
define library sangroup libtype=shared primarylibmanager=astro
```

4. *Issue the following commands from an admin client:* Define the paths from the library client server to each of the drives.

```
define path judy drivea srctype=server desttype=drive library=sangroup
device=mt0.1.0.3
define path judy driveb srctype=server desttype=drive library=sangroup
device=mt0.2.0.3
```

5. *Return to the library client for the remaining steps:* Define at least one device class.

```
define devclass tape devtype=dlt mountretention=1 mountwait=10
library=sangroup
```

Set the parameters for the device class the same on the library client as on the library manager. Making the device class names the same on both servers is also a good practice, but is not required.

The device class parameters that are specified on the library manager server override those specified for the library client. This is true whether or not the device class names are the same on both servers. If the device class names are different, the library manager uses the parameters specified in a device class that matches the device type specified for the library client.

If a library client requires a setting that is different from what is specified in the library manager's device class (for example, a different mount limit), do the following steps:

- a. Create an additional device class on the library manager server. Specify the parameter settings that you want the library client to use.
 - b. Create a device class on the library client with the same name and device type as the new device class you created on the library server.
6. Define the storage pool, BACKTAPE, that will use the shared library:

```
define stgpool backtape tape
description='storage pool for shared sangroup' maxscratch=50
```
 7. Repeat this procedure to define additional servers as library clients.

Configuring Tivoli Storage Manager for LAN-free data movement

You can configure the Tivoli Storage Manager client and server so that the client, through a storage agent, can move its data directly to storage on a Storage Area Networks (SAN). This function, called LAN-free data movement, is provided by Tivoli Storage Manager for the SAN.

About this task

As part of the configuration, a storage agent is installed on the client system. Tivoli Storage Manager supports both tape libraries and FILE libraries. This feature supports SCSI, 349X, and ACSLS tape libraries.

The configuration procedure you follow will depend on the type of environment you implement; however in all cases you must perform the following steps:

Procedure

1. Install and configure the client.
2. Install and configure the storage agent.
3. Configure the libraries for LAN-free data movement.
4. Define the libraries and associated paths.
5. Define associated devices and their paths.
6. Configure Tivoli Storage Manager policy for LAN-free data movement for the client. If you are using shared FILE storage, install and configure IBM TotalStorage SAN File System or IBM General Parallel File System.

Restriction: If a General Parallel File System volume is formatted by an AIX server, the Windows system uses TCP/IP to transfer data and not the storage area network.

Results

For more information on configuring Tivoli Storage Manager for LAN-free data movement see the *Storage Agent User's Guide*.

To help you tune the use of your LAN and SAN resources, you can control the path that data transfers take for clients with the capability of LAN-free data movement. For each client you can select whether data read and write operations use:

- The LAN path only
- The LAN-free path only
- Any path

See the REGISTER NODE and UPDATE NODE commands in the *Administrator's Reference*.

Validating your LAN-free configuration

After you configured your Tivoli Storage Manager client for LAN-free data movement, you can verify your configuration and server definitions by issuing the **VALIDATE LANFREE** command. Use this command to determine which destinations for a particular node, using a specific storage agent, are capable of LAN-free data movement.

About this task

The **VALIDATE LANFREE** command can also be used to determine whether there is a problem with an existing LAN-free configuration. You can evaluate the policy, storage pool, and path definitions for a particular node, using a specific storage agent, to ensure that an operation is working properly.

To determine whether there is a problem with the client node FRED, which uses the storage agent FRED_STA, issue the following command:

```
validate lanfree fred fred_sta
```

The output displays which management class destinations for a specific operation type are not LAN-free capable. It also reports the total number of LAN-free destinations.

See the **VALIDATE LANFREE** command in the *Administrator's Reference* for more information.

Troubleshooting device configuration

Procedures are available for displaying device information and the event log. Common sources of device problems are identified. The impact of device and cabling changes in a SAN environment is a SAN are described.

Displaying device information

You can display information about devices that are connected to the server by using the Device Information utility.

Procedure

Complete the following steps to display device information:

1. From a command prompt, change directory to the server subdirectory of the server installation directory. For example, C:\Program Files\Tivoli\TSM\server.
2. Run the tsmdlst.exe utility.

Results

The information that is provided by this utility is from the Windows registry. Some of the information is put into the registry by the Tivoli Storage Manager device driver. To receive accurate information, ensure that the device driver is running. If the device driver is not running, the information can be incorrect if device attachments have changed since the last time the device driver was running.

Troubleshooting problems with devices

You can troubleshoot errors that occur when you configure or use devices with Tivoli Storage Manager.

About this task

Use Table 6 to find a solution to the device-related problem.

Table 6. Resolving device problems

Symptom	Problem	Solution
Conflicts with other applications.	Tivoli Storage Manager requires a storage area network to share devices.	Set up a storage area network. Attention: Data loss can occur if multiple Tivoli Storage Manager servers use the same device. Define or use a device with only one Tivoli Storage Manager server.
Labeling fails.	A device for labeling volumes cannot be used at the same time that the server uses the device for other processes.	
	Incorrect or incomplete license registration.	Register the license for the device support that was purchased. For more information about licensing, see "Licensing Tivoli Storage Manager" on page 587.

Table 6. Resolving device problems (continued)

Symptom	Problem	Solution
Conflicts among device drivers.	Tivoli Storage Manager issues messages about I/O errors when you define or use a sequential access device.	Windows device drivers and drivers that are provided by other applications can interfere with the Tivoli Storage Manager device driver if the Tivoli Storage Manager driver is not started first. To check on the order that device drivers are started by the system, complete the following steps: 1. Click Control Panel . 2. Click Devices . Device drivers and their startup types are listed.
		Device-driver conflicts often result in I/O errors when you try to define or use a tape device. Windows device drivers and drivers that are provided by other applications can interfere with the Tivoli Storage Manager device driver if it is not started first. For a procedure to ensure that the Tivoli Storage Manager device driver starts before the Windows device driver, see "Controlling devices with the Tivoli Storage Manager device driver" on page 94.

Impact of device changes on the SAN

The SAN environment can shift dramatically because of device or cabling changes. Device IDs assigned by the SAN may be altered due to bus resets or other environmental changes. This dynamically changing nature of the SAN can cause the static definitions defined and known to the server (or storage agent) to fail or become unpredictable.

The server may know a device as *id=1* based on the original path specification to the server and original configuration of the LAN. However, some event in the SAN (new device added, cabling change) causes the device to be assigned *id=2*. When the server tries to access the device with *id=1*, it will either get a failure or the wrong target device. The server assists in recovering from changes to devices on the SAN by using serial numbers to confirm the identity of devices it contacts.

When you define a device (drive or library) you have the option of specifying the serial number for that device. If you do not specify the serial number when you define the device, the server obtains the serial number when you define the path for the device. In either case, the server then has the serial number in its database. From then on, the server uses the serial number to confirm the identity of a device for operations.

When the server uses drives and libraries on a SAN, the server attempts to verify that the device it is using is the correct device. The server contacts the device by using the device name in the path that you defined for it. The server then requests the serial number from the device, and compares that serial number with the serial number stored in the server database for that device.

If the serial numbers do not match, the server begins the process of discovery on the SAN to attempt to find the device with the matching serial number. If the server finds the device with the matching serial number, it corrects the definition of the path in the server's database by updating the device name in that path. The server issues a message with information about the change made to the device. Then the server proceeds to use the device.

You can monitor the activity log for messages if you want to know when device changes on the SAN have affected Tivoli Storage Manager. The following are the number ranges for messages related to serial numbers:

- ANR8952 through ANR8958
- ANR8961 through ANR8967

Restriction: Some devices do not have the capability of reporting their serial numbers to applications such as the Tivoli Storage Manager server. If the server cannot obtain the serial number from a device, it cannot assist you with changes to that device's location on the SAN.

Increased block size for writing to tape

Tivoli Storage Manager provides the **DSMMAXSG** utility that can improve the rate at which the server processes data for backup and restore operations, and for archive and retrieve operations.

Actual results depend upon your system environment. The utility does not affect the generation of backup sets.

The **DSMMAXSG** utility increases the maximum transfer length for some host bus adapters (HBAs). The Tivoli Storage Manager server uses the following types of tape drives:

- 3590
- 3592
- DLT
- ECARTRIDGE
- LTO

The maximum block size that you can use with this utility is 256 KB. When you run the **DSMMAXSG** utility, it modifies one registry key for every HBA driver on the system. The name of the key is `MaximumSGList`.

Typically, the utility is run automatically as part of the Tivoli Storage Manager server or storage agent installation. However, you must run the utility manually to take advantage of the larger block size if you:

- install a new HBA on your system after you install the server or storage agent
- install a new version of an existing HBA device driver that resets the value of the maximum transfer size

Restriction: If you back up or archive to tape by using the 256 KB block size, you cannot append to or read from the tape by using an HBA that is not compatible with the 256 KB block size. For example, if you use a 256 KB Windows system to back up client data to the Tivoli Storage Manager server, you cannot restore the data by using a Windows system that uses a different transfer length. If you want to append to or read from tape that is written to using a 256 KB transfer length, you must install an HBA that supports 256 KB transfers.

For more information about the **DSMMAXSG** utility, see the *Administrator's Reference*

Chapter 7. Managing removable media operations

Routine removable media operations include preparing media for use, controlling how and when media are reused, and ensuring that sufficient media are available. You also must respond to operator requests and manage libraries, drives, disks, paths, and data movers.

About this task

"Preparing media for automated libraries" on page 143
"Managing media in automated libraries" on page 149
"Media management in manual libraries" on page 156
"Tivoli Storage Manager server requests" on page 157
"Tape rotation" on page 160
"Managing paths" on page 182
"Managing libraries" on page 164
"Managing drives" on page 166
"Managing data movers" on page 183
"Managing disks" on page 184

The examples in topics show how to perform tasks using the Tivoli Storage Manager command-line interface. For information about the commands, see the *Administrator's Reference*, or issue the HELP command from the command line of a Tivoli Storage Manager administrative client.

Defining volumes

For each storage pool, decide whether to use scratch volumes or private volumes. Private volumes require more human intervention than scratch volumes.

About this task

When you use commands to add devices, you specify the maximum number of scratch volumes with the **MAXSCRATCH** parameter of the **DEFINE STGPPOOL** or **UPDATE STGPPOOL** command. If the **MAXSCRATCH** parameter is 0, all the volumes in the storage pool are private volumes that you must define.

For example, to create a storage pool named STORE1 that can use up to 500 scratch volumes, issue the following command:

```
define stgpool store1 maxscratch=500
```

Scratch volumes are recommended for the following reasons:

- You need not explicitly define each storage pool volume.
- Scratch volumes are convenient to manage and they fully use the automation of robotic devices.
- Different storage pools that share the same automated library can dynamically acquire volumes from the library's collection of scratch volumes. The volumes do not need to be preallocated to the different storage pools.

Use private volumes to regulate the volumes that are used by individual storage pools, and to manually control the volumes. Define each private volume with the **DEFINE VOLUME** command. For database backups, dumps, or loads, or for server import or export operations, you must list the private volumes.

Managing volumes

When Tivoli Storage Manager needs a new volume, it chooses a volume from the storage pool available for client backups. If you set up private volumes, it selects a specific volume. If you set up scratch volumes, it selects any scratch volume in the library.

About this task

IBM 3494 Tape Library Dataservers use category numbers to identify volumes that are used for the same purpose or application. For details, see “Category numbers for IBM 3494 libraries” on page 155. For special considerations regarding write-once, read-many (WORM) volumes, see “Write-once, read-many tape media” on page 147.

Remember: Each volume used by a server for any purpose must have a unique name. This requirement applies to all volumes, whether the volumes are used for storage pools, or used for operations such as database backup or export. The requirement also applies to volumes that reside in different libraries but that are used by the same server.

Partially-written volumes

Partially-written volumes are always private volumes, even if their status was scratch before Tivoli Storage Manager selects them to be mounted. Tivoli Storage Manager tracks the original status of scratch volumes, so it can return them to scratch status when they become empty.

Except for volumes in automated libraries, Tivoli Storage Manager is unaware of a scratch volume until after the volume is mounted. Then, the volume status changes to private, and the volume is automatically defined as part of the storage pool for which the mount request was made.

For information about changing the status of a volume in an automated library, see “Changing the status of automated library volumes” on page 149.

Volume inventory for automated libraries

Tivoli Storage Manager maintains a volume inventory for each automated library. The volume inventory allows the device to provide maximum automation.

The volume inventory is created when you check media volumes into the library. Tivoli Storage Manager tracks the status of volumes in the inventory as either scratch or private.

A list of volumes in the library volume inventory will not necessarily be identical to a list of volumes in the storage pool inventory for the device. For example, scratch volumes may be checked in to the library but not defined to a storage pool because they have not yet been selected for backup; private volumes may be defined to a storage pool, but not checked into the device's volume inventory.

Changing the status of database-backup and database-export volumes

When Tivoli Storage Manager backs up the database or exports server information, it records information about the volumes that are used for these operations in the volume history file.

About this task

To change the status of database-backup and database-export volumes, use the **DELETE VOLHISTORY** command or the **UPDATE LIBVOLUME** command.

For details about the volume history file, see Chapter 27, “Protecting and recovering the server infrastructure and client data,” on page 893.

Preparing media for automated libraries

You can prepare tape volumes by labeling them and checking them into the library volume inventory:

About this task

Task	Required Privilege Class
“Labeling media”	System
“Checking media into automated library devices” on page 144	System
“Element addresses for library storage slots” on page 146	Any Administrator or Operator

Labeling media

All media require labels. Labeling media with an automated library requires you to check media into the library. Checkin processing can be done at the same time that the volume is labeled.

About this task

To label volumes with the **LABEL LIBVOLUME** command, specify the **CHECKIN** parameter.

To automatically label tape volumes in SCSI-type libraries, use the **AUTOLABEL** parameter on the **DEFINE LIBRARY** and **UPDATE LIBRARY** commands. Using this parameter eliminates the need to pre-label a set of tapes. It is also more efficient than using the **LABEL LIBVOLUME** command, which requires you to mount volumes separately. If you use the **AUTOLABEL** parameter, you must check in tapes by specifying **CHECKLABEL=BARCODE** on the **CHECKIN LIBVOLUME** command.

A label cannot include embedded blanks or periods and must be valid when used as a file name on the media.

Note: You must label CD-ROM, Zip, or Jaz volumes with the device utilities from the manufacturer or the Windows utilities because Tivoli Storage Manager does not provide utilities to format or label these media types. The operating system utilities include the Disk Administrator program (a graphical user interface) and the label command.

Checking media into automated library devices

After volumes have been labeled, make the volumes available to Tivoli Storage Manager devices by checking the volumes into the library volume inventory using the **CHECKIN LIBVOLUME** command.

About this task

The **CHECKIN LIBVOLUME** command involves device access, and may take a long time to complete. For this reason, the command always executes as a background process. Wait for the **CHECKIN LIBVOLUME** process to complete before defining volumes or the defining process will fail. You can save time by checking in volumes as part of the labeling operation. For details, see “Labeling media” on page 143.

You can specify that Tivoli Storage Manager read media labels for the volumes you are checking in. When label-checking is enabled, Tivoli Storage Manager mounts each volume and reads the internal label before checking in the volume. Tivoli Storage Manager checks in only volumes that are properly labeled. Checking labels can prevent errors later, when Tivoli Storage Manager selects and mounts volumes, but it also increases check in processing time.

Checking a single volume into an automated library

You can check in single volumes using the **CHECKIN LIBVOLUME** command with the **SEARCH=NO** parameter.

About this task

Tivoli Storage Manager issues a mount request identifying a storage slot with an element address. The media can be loaded directly into a single storage slot or into one of the device's entry/exit ports, if it is equipped with them. For example, check a scratch volume named VOL001 into a library named TAPELIB by entering the following command:

```
checkin libvolume tapelib vol001 search=no status=scratch
```

Tivoli Storage Manager finds that the first empty slot is at element address 5, and issues the following message:

```
ANR8306I 001: Insert 8MM volume VOL001 R/W in slot with element  
address 5 of library TAPELIB within 60 minutes; issue 'REPLY' along  
with the request ID when ready.
```

If the library is equipped with entry/exit ports, the administrator can load the volume into a port without knowing the element addresses of the device's storage slots. After inserting the volume into an entry/exit port or storage slot, the administrator responds to the preceding message at a Tivoli Storage Manager command line by issuing the **REPLY** command with the request number (the number at the beginning of the mount request):

```
reply 1
```

Tip: A **REPLY** command is not required if you specify a wait time of zero using the optional **WAITTIME** parameter on the **CHECKIN LIBVOLUME** command. The default wait time is 60 minutes.

Checking in volumes using library bar code readers

You can save time checking volumes into libraries equipped with bar code readers by using the characters on the bar code labels as names for the volumes being checked in.

About this task

Tivoli Storage Manager reads the bar code labels and uses the information on the labels to write the internal media labels. For volumes missing bar code labels, Tivoli Storage Manager mounts the volumes in a drive and attempts to read the internal, recorded label.

For example, to use a bar code reader to search a library named TAPELIB and check in a scratch tape, enter:

```
checkin libvolume tapelib search=yes status=scratch  
checklabel=barcode
```

Checking in volumes from library entry/exit ports

To search all slots of bulk entry/exit ports for labeled volumes that Tivoli Storage Manager can check in automatically, issue the **CHECKIN LIBVOLUME** command, specifying **SEARCH=BULK**. The server searches through all slots even if it encounters an unavailable slot.

About this task

Issuing a **REPLY** command in response to a server request is not required if you specify a wait time of zero using the optional **WAITTIME** parameter. Without the requirement for a reply, the **CHECKIN LIBVOLUME** command is much easier to script and requires less intervention. The default value for the **WAITTIME** parameter is 60 minutes.

To have Tivoli Storage Manager load a cartridge in a drive and read the label, you must specify the **CHECKLABEL=YES** option. The **CHECKLABEL=NO** option is invalid with the **SEARCH=BULK** option. After reading the label, Tivoli Storage Manager moves the tape from the drive to a storage slot. When bar code reading is enabled with the **CHECKLABEL=BARCODE** parameter, Tivoli Storage Manager reads the label and moves the tape from the entry/exit port to a storage slot.

Checking in volumes from library storage slots

You can search storage slots for new volumes that have not yet been added to the volume inventory and check those volumes into the library using the **CHECKIN LIBVOLUME** command, specifying **SEARCH=YES**.

About this task

Issuing the **SEARCH=YES** parameter eliminates issuing an explicit **CHECKIN LIBVOLUME** command for each volume. For example, for a SCSI device you can simply open the library access door, place all of the new volumes in unused slots, close the door, and issue the **CHECKIN LIBVOLUME** command with **SEARCH=YES**.

See “Element addresses for library storage slots” on page 146.

Checkin of private volumes

Private volumes are volumes that are either predefined to a storage pool or volumes that are partially-written. You can check in private volumes, but you must assign a private status to them before checking them in.

Private volumes cannot be accidentally overwritten when a scratch mount is requested. The server does not allow the administrator to check in a volume with scratch status when that volume already belongs to a storage pool.

Partially-written volumes are always private volumes. Volumes begin with a status of either scratch or private, but once Tivoli Storage Manager stores data on them, their status becomes private. See “Returning partially written volumes to automated libraries” on page 150.

Checkin of volumes into full libraries

You can check volumes into devices that are fully populated and have no empty storage slots by enabling tape swapping. Swapping allows Tivoli Storage Manager to select and eject volumes to store in a different physical location.

Tivoli Storage Manager selects the volume to eject by checking first for any available scratch volumes, then for the least frequently mounted volumes. Without tape swapping, the checkin fails. See “Setting up volume overflow locations for automated libraries” on page 152.

Checkin of volumes into IBM 3494 libraries

Volumes that are inserted into an IBM 3494 library are assigned to the insert category (X'FF00').

When a volume is first inserted into an IBM 3494 library, either manually or automatically at the convenience I/O station, the volume is assigned to the insert category (X'FF00'). You can then change the category number when you issue the **CHECKIN LIBVOLUME** command.

Element addresses for library storage slots

If a library has entry/exit ports, you can add and remove media by loading the media into the ports. If there are no entry/exit ports, you must load tapes into storage slots.

If you load tapes into storage slots, you must reply to mount requests that identify storage slots with element addresses, unless you specify a wait time of zero when issuing the **CHECKIN LIBVOLUME** or **LABEL LIBVOLUME** commands. (If the wait time is zero, no reply is required.) An element address is a number that indicates the physical location of a storage slot or drive within an automated library.

You need device names and element addresses when:

- Defining or updating drives in an automated library.
- Checking volumes into an automated library that has no entry/exit ports.
- Using a specific drive in an automated library to label volumes.

Element addresses are available in the device manufacturer's documentation or at the following website: http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager.

Write-once, read-many tape media

Write-once, read-many (WORM) media helps prevent accidental or deliberate deletion of critical data. However, Tivoli Storage Manager imposes certain restrictions and guidelines to follow when you use WORM media.

You can use the following types of WORM media with Tivoli Storage Manager:

- StorageTek VolSafe
- Sony AIT50 and AIT100
- IBM 3592
- IBM LTO-3 and LTO-4; HP LTO-3 and LTO-4; and Quantum LTO-3
- Quantum SDLT 600, Quantum DLT V4, and Quantum DLT S4

External and manual libraries use separate logical libraries to segregate their media. You must ensure that the correct media is loaded.

Tips:

- A storage pool can consist of either WORM or RW media, but not both.
- To avoid wasting tape after a restore or import operation, avoid using WORM tapes for database backup or export operations.

Related tasks:

“Selecting a device driver” on page 90

WORM-capable drives

To use WORM media in a library, all the drives in the library must be WORM-capable. A mount will fail if a WORM cartridge is mounted in a read write (RW) drive.

However, a WORM-capable drive can be used as a RW drive if the WORM parameter in the device class is set to NO. Any type of library can have both WORM and RW media if *all* of the drives are WORM enabled. The only exception to this rule is NAS-attached libraries in which WORM tape media cannot be used.

Checkin of WORM media

The type of WORM media determines whether the media label needs to be read during checkin.

Library changers cannot identify the difference between standard read/write (RW) tape media and the following types of WORM tape media:

- VolSafe
- Sony AIT
- LTO
- SDLT
- DLT

To determine the type of WORM media that is being used, a volume must be loaded into a drive. Therefore, when you check in one of these types of WORM volumes, you must use the CHECKLABEL=YES option on the **CHECKIN LIBVOLUME** command.

If they provide support for WORM media, IBM 3592 library changers can detect whether a volume is WORM media without loading the volume into a drive. Specifying CHECKLABEL=YES is not required. Verify with your hardware vendors that your 3592 drives and libraries provide the required support.

Restrictions on WORM media

You cannot use prelabeled WORM media with the LTO or ECARTRIDGE device class.

You cannot use WORM media with Tivoli Storage Manager specified as the drive-encryption key manager for the following drives:

- IBM LTO-4
- HP LTO-4
- Oracle StorageTek T10000B
- Oracle StorageTek T10000C
- Oracle StorageTek T10000D

Mount failures with WORM media

If WORM tape media are loaded into a drive for a read-write (RW) device-class mount, it will cause a mount failure. Similarly, if RW tape media are loaded into a drive for a WORM device-class mount, the mount will fail.

Relabeling WORM media

You cannot relabel a WORM cartridge if it contains data. This applies to Sony AIT WORM, LTO WORM, SDLT WORM, DLT WORM, and IBM 3592 cartridges. The label on a VolSafe volume should be overwritten only once and only if the volume does not contain usable, deleted, or expired data.

Issue the **LABEL LIBVOLUME** command only once for VolSafe volumes. You can guard against overwriting the label by using the **OVERWRITE=NO** option on the **LABEL LIBVOLUME** command.

Removing private WORM volumes from a library

If you perform an action on a WORM volume (for example, if you delete file spaces) and the server does not mark the volume as full, the volume is returned to scratch status. If a WORM volume is not marked as full and you delete it from a storage pool, the volume remains private. To remove a private WORM volume from a library, you must issue the **CHECKOUT LIBVOLUME** command.

Creation of DLT WORM volumes

DLT WORM volumes can be converted from read/write (RW) volumes.

If you have SDLT-600, DLT-V4, or DLT-S4 drives and you want to enable them for WORM media, upgrade the drives by using V30 or later firmware available from Quantum. You can also use DLTice software to convert unformatted read/write (RW) volumes or blank volumes to WORM volumes.

In SCSI or automated-cartridge system-library software (ACSL) libraries, the Tivoli Storage Manager server creates scratch DLT WORM volumes automatically when the server cannot locate any scratch WORM volumes in a library's inventory. The server converts available unformatted or blank RW scratch volumes or empty RW private volumes to scratch WORM volumes. The server also rewrites labels on newly created WORM volumes by using the label information on the existing RW volumes.

In manual libraries, you can use the server to format empty volumes to WORM.

Support for short and normal 3592 WORM tapes

Tivoli Storage Manager supports both short and normal 3592 WORM tapes. For best results, define them in separate storage pools

Querying a device class for the WORM-parameter setting

You can determine the setting of the WORM parameter for a device class by using the **QUERY DEVCLASS** command. The output contains a field, labeled WORM, and a value (YES or NO).

Managing media in automated libraries

Typically, automated libraries require little intervention after you set up a media rotation. However, you might occasionally add, remove, or manually manage media in automated libraries.

About this task

Tivoli Storage Manager tracks the media in the library volume inventory. The library volume inventory is separate from the storage pool inventory for a library device. To add volumes to the volume inventory for a device, check volumes into the library device. For details on the CHECKIN procedure, see “Checking media into automated library devices” on page 144. To add volumes to a storage pool for a library, see “Adding scratch volumes to automated library devices” on page 152.

You can manage media in automated libraries by reviewing the following tasks:

Task	Required Privilege Class
“Changing the status of automated library volumes”	System or Unrestricted Storage
“Removing volumes from automated libraries” on page 150	System or Unrestricted Storage
“Returning partially written volumes to automated libraries” on page 150	System or Unrestricted Storage
“Auditing volume inventories in libraries” on page 151	System or Unrestricted Storage
“Adding scratch volumes to automated library devices” on page 152	System or Unrestricted Storage
“Category numbers for IBM 3494 libraries” on page 155	System or Unrestricted Storage
“Media reuse in automated libraries” on page 155	System or Unrestricted Storage

Changing the status of automated library volumes

You can change the status of a volume from private to scratch or from scratch to private.

About this task

To change the status of volumes, issue the **UPDATE LIBVOLUME** command. Private volumes must be administrator-defined volumes with either no data or invalid data. They cannot be partially written volumes that contain active data. Volume statistics are lost when volume statuses are modified.

Removing volumes from automated libraries

You can remove volumes from automated libraries by issuing the **CHECKOUT LIBVOLUME** command.

About this task

Tivoli Storage Manager mounts each volume and verifies its internal label before checking it out of the volume inventory. After a volume is checked out, Tivoli Storage Manager moves the media to the entry/exit port of the device if it has one, or Tivoli Storage Manager requests that the operator remove the volume from a drive within the device.

For automated libraries with multiple entry/exit ports, you can issue the **CHECKOUT LIBVOLUME** command with the **SEARCH=BULK** parameter. Tivoli Storage Manager ejects the volume to the next available entry/exit port.

Partially written volumes that are removed from the device will need to be checked in again if Tivoli Storage Manager attempts to access them. See “Partially-written volumes” on page 142.

Messages: When a volume is dismounted, TapeAlert information is reported in four possible messages. TapeAlert has only three severity levels, Critical, Warning, and Informational. Some Critical messages result in ANR8481S, while others use ANRxxxxE, depending on the text. Examples of each warning type are:

ANRxxxxS Device /dev/rmt1, volume VOL123 has issued the following

Critical TapeAlert: Your Data is at risk:

1. copy any data you require from this tape;
2. Do not use the tape again;
3. Restart the operation with a different tape.

ANRxxxxE Device /dev/lb0, volume NONE has issued the following

Critical TapeAlert: The library has a problem with the host interface:

1. Check the cables and cable connections;
2. Restart the operation.

ANRxxxxW Device /dev/lb0, volume NONE has issued the following

Warning TapeAlert: A hardware failure of the library is predicted.

Call the library supplier helpline.

ANRxxxxI Device /dev/mto, volume MYVOL1 has issued the following

Informational TapeAlert: You have tried to load a cartridge of a type which is not supported by this drive

These messages indicate a hardware error, and not a Tivoli Storage Manager application error.

Returning partially written volumes to automated libraries

Partially written volumes that are checked out of a library continue to be defined to a storage pool and have a status of private.

Procedure

To return partially written volumes:

1. Check in the volume by issuing the **CHECKIN LIBVOLUME** command with **STATUS=PRIVATE** parameter.
2. Change the volume access from unavailable to read/write or read-only by issuing the **UPDATE VOLUME** command with the **ACCESS** parameter.

Returning reclaimed volumes to a library

Tivoli Storage Manager can reuse volumes after valid data is reclaimed.

About this task

Scratch volumes are automatically returned to the library as scratch volumes. To reuse private volumes, check them into the library.

Auditing volume inventories in libraries

Auditing the volume inventory ensures that the information maintained by the Tivoli Storage Manager server is consistent with the physical media in the library. Audits are useful when the inventory was manually manipulated.

About this task

To audit the volume inventories of automated libraries, issue the **AUDIT LIBRARY** command. Tivoli Storage Manager deletes missing volumes and updates the locations of volumes that moved since the last audit. Tivoli Storage Manager cannot add new volumes during an audit.

Unless devices are equipped with bar code readers, the server mounts each volume during the audit process to verify the label. After the label is verified, the volume remains in a wait state until the mount retention interval times out. You can save time by issuing the **DISMOUNT VOLUME** command to force idle volumes to be dismounted.

Auditing volume inventories using bar code readers

You can save time when auditing volume inventories for devices equipped with bar code readers by using the bar code reader to verify the identity of volumes.

About this task

If a volume has a bar code label with six characters or less, Tivoli Storage Manager reads the volume name from the bar code label during the audit. The volume is not mounted to verify that the external bar code name matches the internal, recorded volume name.

If a volume has no bar code label or the bar code label does not meet Tivoli Storage Manager label requirements, Tivoli Storage Manager mounts the volume in a drive and attempts to read the internal label. See “Labeling media” on page 143. For example, to audit the TAPELIB library using its bar code reader, issue the following command:

```
audit library tapelib checklabel=barcode
```

Adding scratch volumes to automated library devices

As the demand for media grows, you can add scratch volumes to libraries.

Procedure

To increase the maximum number of scratch volumes:

1. Check volumes into the library. Label them if necessary. You might need to temporarily store volumes in an overflow location in order to make room for additional scratch volumes. See “Setting up volume overflow locations for automated libraries.”
2. Increase the maximum number of scratch volumes. You can issue the **UPDATE STGPPOOL** command to increase the number of scratch volumes that can be added to a storage pool.

Results

The initial maximum number of scratch volumes for a library is determined when the library storage pool is created. See “Defining volumes” on page 141.

Setting up volume overflow locations for automated libraries

As the demand for media grows, the number of volumes that are needed for a storage pool might exceed the physical capacity of an automated library. To make room for new volumes while keeping track of existing volumes, you can define a physical location as an overflow area.

About this task

Tivoli Storage Manager tracks the volumes moved to the overflow area thus allowing you to make storage slots available for new volumes.

Procedure

To set up and manage an overflow location:

1. Create a volume overflow location. Define or update the storage pool that is associated with the automated library by issuing the **DEFINE STGPPOOL** or **UPDATE STGPPOOL** command with the **OVERFLOW** parameter. For example, to create an overflow location named ROOM2948 for a storage pool named ARCHIVEPOOL, issue the following command:

```
update stgpool archivepool ovflocation=Room2948
```

2. Move media to the overflow location as required. Issue the **MOVE MEDIA** command to move media from the library to the overflow location. For example, to move all full volumes in the specified storage pool out of the library.

```
move media * stgpool=archivepool
```

All full volumes are checked out of the library, and Tivoli Storage Manager records the location of the volumes as Room2948.

Use the **DAYS** parameter to specify the number of days that must elapse before the volume is eligible for processing by the **MOVE MEDIA** command.

3. Check in new scratch volumes (if required). See “Checking media into automated library devices” on page 144. If a volume has an entry in volume history, you cannot check it in as a scratch volume.

4. Identify the empty scratch tapes in the overflow location. For example, enter this command:

```
query media * stg=* whereovflocation=Room2948 wherestatus=empty
move media * stg=* wherestate=mountablenotinlib wherestatus=empty
cmd="checkin libvol autolib &vol status=scratch"
cmdfilename="\storage\move\media\checkin.vols
```

5. Check in volumes from the overflow area when Tivoli Storage Manager requests them. Operators must check volumes in from the overflow area when Tivoli Storage Manager needs them. Tivoli Storage Manager issues mount requests that include the location of the volumes.

Operators can locate volumes in an overflow location by issuing the **QUERY MEDIA** command. This command can also be used to generate commands. For example, you can issue a **QUERY MEDIA** command to list the volumes in the overflow location, and at the same time generate the commands to check those volumes into the library. For example, enter this command:

```
query media format=cmd stgpool=archivepool whereovflocation=Room2948
cmd="checkin libvol autolib &vol status=private"
cmdfilename="\storage\move\media\checkin.vols"
```

Use the **DAYS** parameter to specify the number of days that must elapse before the volumes are eligible for processing by the **QUERY MEDIA** command.

The file that contains the generated commands can be run using the Tivoli Storage Manager **MACRO** command. For this example, the file might look like the following:

```
checkin libvol autolib TAPE13 status=private
checkin libvol autolib TAPE19 status=private
```

Modifying volume access modes

Occasionally, you might need to manipulate the access mode for volumes, for example, when you remove partially written volumes from or returning them to libraries.

About this task

To change the access mode of a volume, issue the **UPDATE VOLUME** command, specifying **ACCESS=UNAVAILABLE**.

If you want to make volumes unavailable in order to send the data they contain offsite for safekeeping, consider using copy storage pools or active-data pools instead. You can back up primary storage pools to a copy storage pool and then send the copy storage pool volumes offsite. You can also copy active versions of client backup data to active-data pools, and then send the volumes offsite. You can track copy storage pool volumes and active-data pool volumes by changing their access mode to offsite, and updating the volume history to identify their location. For more information, see "Backing up primary storage pools" on page 908.

Shared libraries

Shared libraries are logical libraries that are represented physically by SCSI, 349X, or ACSLS libraries. The Tivoli Storage Manager server is configured as a library manager and controls the physical library. Tivoli Storage Manager servers that use the SHARED library type are library clients to the library manager server.

The library client contacts the library manager, when the library manager starts and the storage device initializes, or after a library manager is defined to a library client. The library client confirms that the contacted server is the library manager for the named library device. The library client also compares drive definitions with the library manager for consistency. The library client contacts the library manager for each of the following operations:

Volume Mount

A library client sends a request to the library manager for access to a particular volume in the shared library device. For a scratch volume, the library client does not specify a volume name. If the library manager cannot access the requested volume, or if scratch volumes are not available, the library manager denies the mount request. If the mount is successful, the library manager returns the name of the drive where the volume is mounted.

Volume Release (free to scratch)

When a library client no longer needs to access a volume, it notifies the library manager that the volume can be returned to scratch. The library manager's database is updated with the volume's new location. The volume is deleted from the volume inventory of the library client.

Table 7 shows the interaction between library clients and the library manager in processing Tivoli Storage Manager operations.

Table 7. How SAN-enabled servers process Tivoli Storage Manager operations

Operation (Command)	Library Manager	Library Client
Query library volumes (QUERY LIBVOLUME)	Displays the volumes that are checked into the library. For private volumes, the owner server is also displayed.	Not applicable.
Check in and check out library volumes (CHECKIN LIBVOLUME , CHECKOUT LIBVOLUME)	Performs the commands to the library device.	Not applicable. When a checkin operation must be performed because of a client restore, a request is sent to the library manager server.
Audit library inventory (AUDIT LIBRARY)	Performs the inventory synchronization with the library device.	Performs the inventory synchronization with the library manager server.
Label a library volume (LABEL LIBVOLUME)	Performs the labeling and checkin of media.	Not applicable.
Dismount a volume (DISMOUNT VOLUME)	Sends the request to the library device.	Requests that the library manager server perform the operation.

Table 7. How SAN-enabled servers process Tivoli Storage Manager operations (continued)

Operation (Command)	Library Manager	Library Client
Query a volume (QUERY VOLUME)	Checks whether the volume is owned by the requesting library client server and checks whether the volume is in the library device.	Requests that the library manager server perform the operation.

Category numbers for IBM 3494 libraries

Category numbers for IBM 3494 Tape Library Dataservers identify volumes that are used for the same purpose or application. To avoid data loss, ensure that each application sharing the library uses unique category numbers.

A 3494 library has an intelligent control unit that tracks the category number of each volume in the volume inventory. The category numbers are useful when multiple systems share the resources of a single library. Typically, a software application that uses a 3494 uses only volumes in categories that are reserved for that application.

Media reuse in automated libraries

Reusing media in automated libraries is essentially the same as reusing media in manual libraries except that less intervention is required for automated devices than for manual devices.

You can set up expiration processing and reclamation processing and tune the media rotation to achieve the wanted results.

- Setting up expiration processing

Expiration processing is the same, regardless of the type of device and media on which backups are stored. See “Running expiration processing to delete expired files” on page 514.

- Setting up reclamation processing

For a storage pool associated with a library that has more than one drive, the reclaimed data is moved to other volumes in the same storage pool. See “Reclaiming space in sequential-access storage pools” on page 382.

- Returning reclaimed media to the storage pool

Most media can be returned to a storage pool after it is reclaimed but media that contains database backups and database export data require you to complete an extra step. For these volumes, you must issue the **DELETE VOLHISTORY** command or the **UPDATE LIBVOLUME** command to change the status of the volume.

When Tivoli Storage Manager backs up the database or exports server information, Tivoli Storage Manager records information about the volumes that are used for these operations in the volume history file. Volumes that are tracked in the volume history file require the administrator to delete the volume information from the volume history file. The volume history file is a key component of server recovery and is discussed in detail in Chapter 27, “Protecting and recovering the server infrastructure and client data,” on page 893.

Tip: If your server uses the disaster recovery manager function, the volume information is automatically deleted during **MOVE DRMEDIA** command processing. For more information about DRM, see Chapter 30, “Disaster recovery manager,” on page 1033.

- Ensuring media are available
See “Tape rotation” on page 160.

Media management in manual libraries

Media for manually operated devices are stored outside of the device, for example, in a filing cabinet. Operators must therefore mount and dismount media manually.

If you use a media manager for stand-alone devices can introduce unnecessary administrative overhead.

The following table lists the required privilege classes you need to complete the specified task.

Table 8. Privilege classes for library-specific tasks

Task	Required privilege class
Modifying the status of manual device volumes	System or unrestricted storage
Removing volumes from a manual library device	Not applicable
Returning volumes to a manual library device	Not applicable
Adding more volumes to a manual library device	Not applicable
Reusing media in manual libraries	Not applicable

The following list explains the tasks from Table 8.

Modifying the status of manual device volumes

You can modify the status of volumes, regardless of the type of device that uses them, by using the **UPDATE LIBVOLUME** command. When you issue the command, you can assign a private status to scratch volumes or assign a scratch status to private volumes. Private volumes cannot be partially written to with active data.

Removing volumes from a manual library device

You can remove volumes from manual devices at any time because the server maintains no volume inventory for manually operated devices. No checkout processing is required for manual devices.

Returning volumes to a manual library device

You can return volumes to manual devices at any time because the server maintains no volume inventory for manual libraries. No check in processing is required for manual libraries.

Adding volumes to a manual library device

See “Tape rotation” on page 160.

Reusing media in manual libraries

Reusing media in manual libraries is similar to reusing media in automated libraries except that more human intervention is required for manual devices. See “Media reuse in automated libraries” on page 155.

Tivoli Storage Manager server requests

Tivoli Storage Manager displays requests and status messages to all administrative clients that are started in console mode. These request messages often have a time limit. If the request is not fulfilled within the time limit, the operation times out and fails.

For manual libraries, Tivoli Storage Manager detects when there is a cartridge loaded in a drive, so no operator reply is necessary. For automated libraries, the **CHECKIN LIBVOLUME** and **LABEL LIBVOLUME** commands involve inserting cartridges into slots and, depending on the value of the **WAITTIME** parameter, issuing a reply message. (If the value of the parameter is zero, no reply is required.) The **CHECKOUT LIBVOLUME** command involves inserting cartridges into slots and, in all cases, issuing a reply message.

Task	Required Privilege Class
"Starting the administrative client as a server console monitor"	Any Administrator
"Displaying information about volumes that are currently mounted"	Any Administrator
"Displaying information about mount requests that are pending" on page 158	Operator
"Replying to mount requests" on page 158	Operator
"Canceling mount requests" on page 158	Operator
"Responding to requests for volume checkin" on page 159	System or Unrestricted Storage
"Dismounting idle volumes" on page 159	Operator
"Dismounting volumes from stand-alone removable-file devices" on page 160	Operator

Starting the administrative client as a server console monitor

You can display mount requests and status messages by starting the administrative client in console mode. However, if the server is started as a Windows service, which is optimal, a server console is required to see messages.

Procedure

To start a server console monitor from an operating system command prompt, enter this command:

```
dsmadm -consolemode
```

Displaying information about volumes that are currently mounted

To display the volumes that are currently mounted by Tivoli Storage Manager, issue the **QUERY MOUNT** command. The information lists mounted volumes, the drives on which they are mounted, and whether the volumes are currently in use.

Displaying information about mount requests that are pending

You can display information about pending mount requests either by checking the mount message queue on a server console monitor or by issuing the **QUERY REQUEST** command.

About this task

Tivoli Storage Manager displays a message similar to the following:

```
ANR8352I Requests outstanding:  
ANR8326I 001: Mount DLT volume VOL1 R/W in drive D1 (MT4) of library  
MYMANLIB within 60 minutes.
```

Tivoli Storage Manager displays a three-digit request ID number as part of the message. The request ID number can also be obtained by issuing a **QUERY REQUEST** command. If the request requires the operator to provide a device to be used for the mount, the second parameter for this command is a device name.

Replying to mount requests

Unless the specified wait time is zero, you must issue a **REPLY** command in response to mount requests from automated libraries. Manual libraries do not require a reply because Tivoli Storage Manager detects when there is a cartridge loaded in the drive.

About this task

If a wait time greater than zero was specified, the server waits the specified number of minutes before resuming processing.

The first parameter for the **REPLY** command is the three-digit request ID number that indicates which of the pending mount requests are complete. For example, an operator can issue the following command to respond to request 001 in the previous code sample:

```
reply 001
```

Canceling mount requests

If a mount request for a manual library cannot be satisfied, you can issue the **CANCEL REQUEST** command. Tivoli Storage Manager cancels the request and the operation that required the volume fails.

About this task

The **CANCEL REQUEST** command must include the request identification number. This number is included in the request message, or it can be obtained by issuing a **QUERY REQUEST** command, as described in "Displaying information about mount requests that are pending."

Canceling mount requests for volumes that were removed from library devices

You might occasionally remove media from a library with the intention of storing or destroying the media. If after the media is removed, Tivoli Storage Manager requests the volumes, then you can cancel the request with the **CANCEL REQUEST** command.

About this task

To ensure that the server does not try to mount the requested volume again, specify the **PERMANENT** parameter to mark the volume as unavailable.

For most of the requests that are associated with automated libraries, the Tivoli Storage Manager **CANCEL REQUEST** command is not accepted by the server. An operator must complete a hardware or system action to cancel the requested mount.

Responding to requests for volume checkin

The procedure for responding to request for volume checkin vary, depending on whether the requested volume is available or unavailable.

About this task

Operators might occasionally need to check more volumes into an automated library, for example, when Tivoli Storage Manager cannot locate a volume that it requires from the volume inventory. If the requested volume is available, place the volume in the device and check in the volume. See “Checking media into automated library devices” on page 144.

If the volume requested is unavailable (lost or destroyed):

Procedure

1. Update the access mode of the volume to UNAVAILABLE by using the **UPDATE VOLUME** command.
2. Cancel the server's request for checkin by using the **CANCEL REQUEST** command. (Do not cancel the client process that caused the request.) To obtain the ID of the request to cancel, issue the **QUERY REQUEST** command.

Results

If operators do not respond to checkin requests within the mount-wait period, Tivoli Storage Manager marks the volume as unavailable. The mount-wait period is set in the device class of the storage pool.

Dismounting idle volumes

After a volume becomes idle, the server keeps it mounted for a time that is specified by the mount retention parameter for the device class.

About this task

To dismount an idle volume, use the **DISMOUNT VOLUME** command.

Using mount retention can reduce the access time if volumes are used repeatedly. For information about setting mount retention times, see “Controlling the amount

of time that a volume remains mounted” on page 199.

Dismounting volumes from stand-alone removable-file devices

For manual libraries, operators must respond to messages that require media (for example, JAZ, DVD, and CD media) to be manually ejected from removable file devices.

About this task

Tivoli Storage Manager checks the drive every seven seconds to see if the medium has been ejected. A volume dismount is not considered complete until Tivoli Storage Manager detects that the medium has been ejected from the drive or that a different medium has been inserted into the drive.

Obtaining tape alert messages

Tape alert messages are generated by tape and library devices to report hardware errors. These messages help to determine problems that are not related to the Tivoli Storage Manager server.

About this task

A log page is created and can be retrieved at any time or at a specific time such as when a drive is dismounted.

There are three severity levels of tape alert messages:

- Informational (for example, trying to load a cartridge type that is not supported)
- Warning (for example, a hardware failure is predicted)
- Critical (for example, there is a problem with the tape and your data is at risk)

Tape alert messages are turned off by default. To set tape alert messages to ON, issue the **SET TAPEALERTMSG** command. To query tape alert messages, issue the **QUERY TAPEALERTMSG** command.

Tape rotation

Over time, media ages, and certain backup data might no longer be needed. You can reclaim useful data on media and then reclaim and reuse the media.

Tivoli Storage Manager policy determines how many backup versions are retained and how long they are retained. Policy also determines how many inactive versions of files the server keeps, and for how long. For more information about policies to help you manage client data, see “Basic policy planning” on page 483.

Deleting data - expiration processing

Expiration processing deletes data that is no longer valid either because it exceeds the retention specifications in policy or because users or administrators deleted the active versions of the data.

Reusing media - reclamation processing

Data on tapes might expire, move, or be deleted. Reclamation processing consolidates any unexpired data by moving it from multiple volumes onto fewer volumes. The media can then be returned to the storage pool and reused.

You can set a reclamation threshold that allows Tivoli Storage Manager to reclaim volumes whose valid data drops below a threshold. The threshold

is a percentage of unused space on the volume and is set for each storage pool. The amount of data on the volume and the reclamation threshold for the storage pool affects when the volume is reclaimed.

Determining when media have reached end of life

You can use Tivoli Storage Manager to display statistics about volumes, which include the number of write operations that are completed on the media and the number of write errors. Tivoli Storage Manager overwrites this statistical data for media that are initially defined as scratch volumes each time the media are reclaimed. For media initially defined as private volumes, Tivoli Storage Manager maintains this statistical data, even as the volume is reclaimed. You can compare the information with the number of write operations and write errors that are recommended by the manufacturer.

Reclaim any valid data from volumes that have reached the end of life. If the volumes are in automated libraries, check them out of the volume inventory. Delete private volumes from the database.

Ensuring media are available for the tape rotation

Over time, the demand for volumes might cause the storage pool to run out of space. You can set the maximum number of scratch volumes high enough to meet demand by doing one or both of the following:

- Increase the maximum number of scratch volumes by updating the storage pool definition. Label and check in new volumes to be used as scratch volumes if needed.
- Make volumes available for reuse by running expiration processing and reclamation to consolidate data onto fewer volumes.

Write-once-read-many (WORM) drives can waste media when Tivoli Storage Manager cancels transactions because volumes are not available to complete the backup. When Tivoli Storage Manager writes to WORM volumes, the space on the volumes cannot be reused, even if the transactions are canceled (for example, if a backup is canceled because of a shortage of media in the device).

To minimize wasted WORM media:

1. Ensure that the maximum number of scratch volumes for the device storage pool is at least equal to the number of storage slots in the library.
2. Check enough volumes into the volume inventory for the expected load.

If most backups are small files, controlling the transaction size can affect how WORM media is used. Smaller transactions mean that less space is wasted if a transaction such as a backup must be canceled. Use the TXNGROUPMAX server option and the TXNBYTELIMIT client option to control transaction size.

Related concepts:

“Media reuse in automated libraries” on page 155

“Media management in manual libraries” on page 156

Related tasks:

“Reclaiming space in sequential-access storage pools” on page 382

“Setting up volume overflow locations for automated libraries” on page 152

Related reference:

“File expiration and expiration processing” on page 486

Labeling volumes using commands

All media require labels. You can label volumes with the **LABEL LIBVOLUME** command.

About this task

The following example demonstrates the use of the **LABEL LIBVOLUME** command to label tapes for a manual library and for an automated library. Assume that the automated device is attached to SCSI address 4, and the manual device is attached to SCSI address 5. You want to insert media into the device's entry/exit ports. You also want the device's bar code reader to read bar code labels and overwrite existing labels with the information on the bar code label.

Automated library device:

```
label libvolume storagelibname overwrite=yes labelsource=barcode
```

Manual library device:

```
label libvolume storagelibname overwrite=yes labelsource=barcode  
label libvolume storagelibname volname
```

Tip: To automatically label tape volumes in SCSI-type libraries, you can use the **AUTOLABEL** parameter on the **DEFINE LIBRARY** and **UPDATE LIBRARY** commands. Using this parameter eliminates the need to pre-label a set of tapes. It is also more efficient than using the **LABEL LIBVOLUME** command, which requires you to mount volumes separately. If you use the **AUTOLABEL** parameter, you must check in tapes by specifying **CHECKLABEL=BARCODE** on the **CHECKIN LIBVOLUME** command.

Tivoli Storage Manager media-manager support

While Tivoli Storage Manager tracks and manages client data, the removable media manager labels, catalogs, and tracks physical volumes. The media manager also controls libraries, drives, slots, and doors.

Tivoli Storage Manager works with removable media managers to control storage. Media managers help Tivoli Storage Manager make better use of media resources. To use a media manager with Tivoli Storage Manager, you must define a Tivoli Storage Manager library that represents the media manager. Defining the library is similar to defining any other type of library to Tivoli Storage Manager, except the library does not represent a physical device. Different library types are required for External Media Management Interface control.

External Media Management Interface

The External Media Management Interface uses the **EXTERNAL** library type. The **EXTERNAL** library type does not map to a device or media type, but instead specifies the installed path of the external media manager. See “Using external media managers to control media” on page 163.

Related tasks:

“Using external media managers to control media” on page 163

Using external media managers to control media

The External Media Management API enables you to use external media manager software to control your media.

About this task

For details about the interface, see Appendix A, “External media management interface description,” on page 1113.

The following sample procedure, describes how to set up an 8 mm automated tape library to use the External Media Management Interface with a media manager.

Procedure

1. Set up the media manager to interface with Tivoli Storage Manager. For more information, see Appendix A, “External media management interface description,” on page 1113.
2. Define a library whose library type is **EXTERNAL**, and define a path to the media manager executable. For example:

```
define library medman libtype=external
For example:
define devclass class1 devtype=8mm library=medman mountretention=5 mountlimit=2
define path server1 medman srctype=server desttype=library
externalmanager=c:\server\mediamanager.exe
```

The **MOUNTLIMIT** parameter specifies the number of drives in the library. The **MOUNTRETENTION** parameter determines how long an idle volume remains in a drive. If the library is shared among applications, this setting is especially important. Some media managers do not dismount an allocated drive to satisfy pending requests. You might need to tune this parameter to satisfy competing mount requests while maintaining optimal system performance. Typically, problems arise more frequently when the **MOUNTRETENTION** parameter is set to a value that is too small, for example, zero.

3. Define a device class for the **EXTERNAL** library with a device type of **8MM**.
4. Define a storage pool for the device class. For example:

```
define stgpool pool1 class1 maxscratch=500
```
5. Associate client nodes with the new storage pool by defining a new policy domain or by updating an existing policy domain

Requirements for managing media in external libraries

There are certain unique requirements for managing media in external libraries

When you manage media in external libraries, consider the following guidelines:

- You do not need to check in and label media in external libraries. Those media are not tracked in the Tivoli Storage Manager volume inventory, and the media manager handles labeling. However, you must ensure that an adequate supply of blank media is available.
- If you are using disaster recovery manager, you can issue the **MOVE DRMEDIA** command to send an operator request to remove the media from the library. For more information, see Chapter 30, “Disaster recovery manager,” on page 1033.
- You must not migrate media from a Tivoli Storage Manager SCSI library to an external library. Instead, use external media management on a new Tivoli Storage Manager configuration or when you define externally managed devices to Tivoli Storage Manager.

- Deleting externally managed storage pools requires that you delete any volumes that are associated with the Tivoli Storage Manager library. When the library is deleted, the externally managed storage pool that is associated with that library is also deleted. For more information, see “Deleting storage pool volumes that contain data” on page 429.

Troubleshooting database errors

Error conditions can cause the Tivoli Storage Manager volume database and the media manager's volume database to become unsynchronized.

About this task

The most likely symptom of this problem is that the volumes in the media manager's database are not known to Tivoli Storage Manager, and thus not available for use. Verify the Tivoli Storage Manager volume list and any disaster recovery media. If volumes not identified to Tivoli Storage Manager are found, use the media manager interface to deallocate and delete the volumes.

Managing libraries

Using Tivoli Storage Manager commands, you can query and delete libraries. You can also update automated libraries.

Obtaining information about libraries

Standard and detailed reports provide information about libraries.

About this task

Task	Required Privilege Class
Request information about libraries	Any administrator

To obtain information about libraries, use the **QUERY LIBRARY** command. The default is a standard report. For example, to display information about all libraries in a standard report, issue the following command:

```
query library
```

The following shows an example of output from this command:

Library Name	Library Type	Private Category	Scratch Category	WORM Scratch Category	External Manager
-----	-----	-----	-----	-----	-----
MANLIB	MANUAL				
EXB	SCSI				
3494LIB	349X	300	301	302	

Updating automated libraries

You can update an existing automated library by issuing the **UPDATE LIBRARY** command. To update the device names of a library, issue the **UPDATE PATH** command. You cannot update a **MANUAL** library.

About this task

Task	Required Privilege Class
Update libraries	System or unrestricted storage

If your system or device is reconfigured, and the device name changes, you might need to update the device name. The following examples show how you can issue the **UPDATE LIBRARY** and **UPDATE PATH** commands for the following library types:

- SCSI
- 349X
- ACSLS
- External

Example

SCSI Library

Update the path from SERVER1 to a SCSI library named SCSILIB:

```
update path server1 scsilib srctype=server desttype=library device=1b4.0.0.0
```

Update the definition of a SCSI library that is named SCSILIB defined to a library client so that a new library manager is specified:

```
update library scsilib primarylibmanager=server2
```

349X Library

Update the path from SERVER1 to an IBM 3494 library that is named 3494LIB with new device names.

```
update path server1 3494lib srctype=server desttype=library  
device=1b2.0.0.0,1b3.0.0.0,1b4.0.0.0
```

Update the definition of an IBM 3494 library that is named 3494LIB defined to a library client so that a new library manager is specified:

```
update library 3494lib primarylibmanager=server2
```

ACSLs Library

Update an automated cartridge system library software (ACSLs) library that is named ACSLSLIB with a new ID number.

```
update library acslslib ascid=1
```

External Library

Update an external library that is named EXTLIB with a new media manager path name.

```
update path server1 extlib srctype=server desttype=library  
externalmanager=c:\server\mediamanager.exe
```

Update an EXTERNAL library named EXTLIB in a LAN-free configuration so that the server uses the value set for mount retention in the device class associated with the library:

```
update library extlib obeymountretention=yes
```

Deleting libraries

Before you delete a library with the **DELETE LIBRARY** command, you must delete all of the drives and drive paths that are defined as part of the library and delete the path to the library.

About this task

Task	Required Privilege Class
Delete libraries	System or unrestricted storage

For information about deleting drives, see “Deleting drives” on page 182.

For example, suppose that you want to delete a library that is named 8MMLIB1. After you delete all of the drives that are defined as part of this library and the path to the library, issue the following command to delete the library itself:

```
delete library 8mmlib1
```

Managing drives

You can query, update, and delete drives.

Requesting information about drives

You can request information about drives by using the **QUERY DRIVE** command.

About this task

Task	Required Privilege Class
Request information about drives	Any administrator

The **QUERY DRIVE** command accepts wildcard characters for both a library name and a drive name. See the *Administrator's Reference* for information about using wildcard characters.

For example, to query all drives that are associated with your server, issue the following command:

```
query drive
```

The following shows an example of the results of this command.

Library Name	Drive Name	Device Type	On Line
MANLIB	8MM.0	8MM	Yes
AUTOLIB	8MM.2	8MM	Yes

Updating drives

You can change the attributes of a drive by issuing the **UPDATE DRIVE** command.

About this task

Task	Required Privilege Class
Update drives	System or unrestricted storage

You can change the following attributes of a drive by issuing the **UPDATE DRIVE** command.

- The element address, if the drive is in a SCSI or virtual tape library (VTL).
- The ID of a drive in an automated cartridge system library software (ACSL) library
- The cleaning frequency
- Change whether the drive is online or offline

For example, to change the element address of a drive that is named DRIVE3 to 119, issue the following command:

```
update drive auto drive3 element=119
```

Note: You cannot change the element number if a drive is in use. If a drive has a volume that is mounted, but the volume is idle, it can be explicitly dismounted as described in “Dismounting idle volumes” on page 159.

If you are reconfiguring your system, you can change the device name of a drive by issuing the **UPDATE PATH** command. For example, to change the device name of a drive that is named DRIVE3, issue the following command:

```
update path server1 drive3 srctype=server desttype=drive library=scsilib  
device=mt3.0.0.0
```

You can change a drive to offline status while the drive is in use. Tivoli Storage Manager finishes with the current tape in the drive, and then does not use the drive anymore. By changing a drive to offline, you can drain work off a drive. However, if the tape that was in use was part of a series of tapes for a single transaction, the drive is not available to complete the series. If no other drives are available, the transaction might fail. If all drives in a library are made offline, any attempts by Tivoli Storage Manager to write to the storage pool associated with the library fails.

The **ONLINE** parameter specifies the value of the drive's online state, even if the drive is in use. **ONLINE=YES** indicates that the drive is available for use (online). **ONLINE=NO** indicates that the drive is not available for use (offline). This parameter is optional. Do not specify other optional parameters along with **ONLINE=YES** or **ONLINE=NO**. If you do, the drive is not updated, and the command fails when the drive is in use. This command can be issued when the drive is involved in an active process or session, but this action is not advised.

The **ONLINE** parameter allows drives to be taken offline and used for another activity, such as maintenance. If you make the drive offline while it is in use, the drive is marked offline. However, the mounted volume completes its current process. If this volume was part of a series of volumes for a transaction, the drive is no longer available to complete mounting the series. If no other drives are available, the active process might fail. The updated state is retained even when the server is halted and restarted. If a drive is marked offline when the server is

restarted, a warning is issued noting that the drive must be manually brought online. If all the drives in a library are updated to be offline, processes requiring a library mount point fail, rather than queue up for one.

Using drive encryption

You can use drive encryption to protect tapes that contain critical or sensitive data (for example, tapes that contain sensitive financial information). Drive encryption is beneficial for tapes that you move from the Tivoli Storage Manager server environment to an offsite location.

About this task

Tivoli Storage Manager supports encryption for the following drives:

- IBM 3592 generation 2 and later
- IBM LTO generation 4 and later
- HP LTO-4 generation 4 and later
- Oracle StorageTek T10000B
- Oracle StorageTek T10000C
- Oracle StorageTek T10000D

Drives must be able to recognize the correct format. With Tivoli Storage Manager, you can use the following encryption methods:

Table 9. Encryption methods supported

	Application method	Library method	System method
3592 generation 2 and later	Yes	Yes	Yes
IBM LTO-4	Yes	Yes, but only if your system hardware (for example, 3584) supports it	Yes
HP LTO-4	Yes	No	No
Oracle StorageTek T10000B	Yes	No	No
Oracle StorageTek T10000C	Yes	No	No
Oracle StorageTek T10000D	Yes	No	No

To enable drive encryption with IBM LTO-4, you must have the IBM RMSS Ultrium device driver installed. SCSI drives do not support IBM LTO-4 encryption. To enable encryption with HP LTO-4, you must have the Tivoli Storage Manager device driver installed.

To enable drive encryption, specify the **DRIVEENCRYPTION** parameter on the **DEFINE DEVCLASS** and **UPDATE DEVCLASS** commands for the 3592, LTO, and ECARTRIDGE device types.

A library can contain a mixture of drives, some of which support encryption and some, which do not. (For example, a library might contain two LTO-2 drives, two LTO-3 drives, and two LTO-4 drives.) You can also mix media in a library by using, for example, a mixture of encrypted and non-encrypted device classes that

have different tape and drive technologies. However, all LTO-4 drives must support encryption if Tivoli Storage Manager is to use drive encryption. In addition, all drives within a logical library must use the same method of encryption. Tivoli Storage Manager does not support an environment in which some drives use the Application method and some drives use the Library or System methods of encryption.

When you use encryption-capable drives with a supported encryption method, a new format is used to write encrypted data to tapes. When data is written to volumes that use the new format and if the volumes are then returned to scratch, they contain labels that are only readable by encryption-enabled drives. To use these scratch volumes in a drive that is not enabled for encryption, either because the hardware is not capable of encryption or because the encryption method is set to NONE, you must relabel the volumes.

For more information about setting up your hardware environment to use drive encryption, see your hardware documentation. For details about drive encryption, see:

- “Encrypting data with drives that are 3592 generation 2 and later” on page 202
- “Encrypting data using LTO generation 4 tape drives” on page 210
- “Enabling ECARTRIDGE drive encryption” on page 213 and “Disabling ECARTRIDGE drive encryption” on page 214

Validating data during read/write operations to tape

To validate data and identify data that is corrupted, you can use a feature called logical block protection. If you use logical block protection, Tivoli Storage Manager inserts a cyclic redundancy check (CRC) value at the end of each logical block of data to be written to tape.

About this task

With logical block protection, you can identify errors that occur while data is being written to tape and while data is transferred from the tape drive to Tivoli Storage Manager through the storage area network. Drives that support logical block protection validate data during read and write operations. The Tivoli Storage Manager server validates data during read operations.

If validation by the drive fails during write operations, it can indicate that data was corrupted while being transferred to tape. The Tivoli Storage Manager server fails the write operation. You must restart the operation to continue. If validation by the drive fails during read operations, it can indicate that the tape media is corrupted. If validation by the Tivoli Storage Manager server fails during read operations, it can indicate that data was corrupted while being transferred from the tape drive and the server tries the operation again. If validation fails consistently, the Tivoli Storage Manager server issues an error message that indicates hardware or connection problems.

If logical block protection is disabled on a tape drive, or the drive does not support logical block protection, the Tivoli Storage Manager server can read protected data. However, the data is not validated.

Logical block protection is superior to the CRC validation that you can specify when you define or update a storage pool definition. When you specify CRC validation for a storage pool, data is validated only during volume auditing operations. Errors are identified after data is written to tape.

Restriction: You cannot use logical block protection for sequential data such as backup sets and database backups.

Drives that support logical block protection

Logical block protection is available only for 3592, LTO, and ECARTRIDGE device types. Capable 3592 drives include IBM TS1130, TS1140, and later generations. Capable LTO drives include IBM LTO-5 and supported LTO-6 drives. Capable Oracle StorageTek drives include drives with the T10000C and T10000D format.

The following table shows the media and the formats that you can use with drives that support logical block protection.

Drive	Tape media	Drive formats
IBM TS1130	3592 Generation 2	3592-3 and 3592-3C
IBM TS1140	3592 Generation 2 3592 Generation 3	Generation 2: 3592-3 and 3592-3C Generation 3: 3592-4 and 3592-4C
IBM LTO-5	LTO-5	ULTRIUM5 and ULTRIUM5C
IBM LTO-6	LTO-6 LTO-5	ULTRIUM6 and ULTRIUM6C ULTRIUM5 and ULTRIUM5C
Oracle T10000C	Oracle StorageTek T10000 T2	T10000C and T10000C-C
Oracle T10000D	Oracle StorageTek T10000 T2	T10000D and T10000D-C

Tip: If you have a 3592, LTO, or Oracle StorageTek drive that is not capable of logical block protection, you can upgrade the drive with firmware that provides logical block protection.

Logical block protection is only available for drives that are in MANUAL, SCSI, 349x, and ACSLS libraries. Logical block protection is not available for drives that are in external libraries. For the most current information about support for logical block protection, see <http://www.ibm.com/support/docview.wss?uid=swg21568108>.

To use logical block protection for write operations, all the drives in a library must support logical block protection. If a drive is not capable of logical block protection, volumes that have read/write access are not mounted. However, the server can use the drive to mount volumes that have read-only access. The protected data is read and validated by the Tivoli Storage Manager server if logical block protection is enabled for read/write operations.

Enabling and disabling logical block protection

You can specify logical block protection for read and write operations, or only for write operations. You can also disable logical block protection if it is enabled. By default, logical block protection is disabled because of performance effects that result from CRC validation on the server and the tape drive.

About this task

Read/write operations to empty or filling volumes depend on whether the volumes have logical block protection. Protected and unprotected data blocks

cannot be mixed on the same volume. If you change the setting for logical block protection, the change applies only to empty volumes. Filling and full volumes maintain their status of logical block protection until they are empty and ready to be refilled. For example, suppose that you disable logical block protection. If the server selects a volume that is associated with a device class that has logical block protection, the server continues writing protected data to the volume.

To enable logical block protection, specify the **LBPROTECT** parameter on the **DEFINE DEVCLASS** or the **UPDATE DEVCLASS** command for the 3592, LTO, and ECARTRIDGE device types:

Procedure

- To enable logical block protection, specify a value of READWRITE or WRITEONLY for the **LBPROTECT** parameter.

For example, to specify logical block protection during read/write operations for a 3592 device class that is named 3592_lbprotect, issue the following command:

```
define devclass 3592_lbprotect library=3594 lbprotect=readwrite
```

Tips:

- If you update the value of the **LBPROTECT** parameter from NO to READWRITE or WRITEONLY and the server selects a filling volume without logical block protection for write operations, the server issues a message each time the volume is mounted. The message indicates that data is written to the volume without logical block protection. To prevent this message from displaying or to have Tivoli Storage Manager write data only with logical block protection, update the access of filling volumes without logical block protection to read-only.
 - To reduce the performance effects, do not specify the **CRCDATA** parameter on the **DEFINE STGPOOL** or **UPDATE STGPOOL** command.
 - When data is validated during read operations by both the drive and by the Tivoli Storage Manager server, it can slow server performance during restore and retrieval operations. If the time that is required for restore and retrieval operations is critical, you can change the setting of the **LBPROTECT** parameter from READWRITE to WRITEONLY to increase the restore or retrieval speed. After data is restored or retrieved, you can reset the **LBPROTECT** parameter to READWRITE.
- To disable logical block protection, specify a value of NO for the **LBPROTECT** parameter.

Restriction: If logical block protection is disabled, the server does not write to an empty tape with logical block protection. However, if a filling volume with logical block protection is selected, the server continues to write to the volume with logical block protection. To prevent the server from writing to tapes with logical block protection, change access of filling volumes with logical block protection to read-only. When data is read, the CRC on each block is not checked by either drive or the server.

If a disaster occurs and the disaster recovery site does not have drives that support logical block protection, you must set the **LBPROTECT** parameter to NO. If the tape drives are used for write operations, you must change the volume access for volumes with protected data to read-only to prevent the server from using the volumes.

If the server is to enable logical block protection, the server issues an error message that indicates that the drive does not support logical block protection.

What to do next

To determine whether a volume has logical block protection, issue the **QUERY VOLUME** command and verify the value in the field Logical Block Protection.

Read/write operations to volumes with logical block protection

Read/write operations to empty or filling volumes depend on whether the volumes have logical block protection. Protected and unprotected data blocks cannot be mixed on the same volume.

If you use the **UPDATE DEVCLASS** command to change the setting for logical block protection, the change applies only to empty volumes. Filling and full volumes maintain their status of logical block protection until they are empty and ready to be refilled.

For example, suppose that you change the value of the **LBPROTECT** parameter from READWRITE to NO. If the server selects a volume that is associated with the device class and that has logical block protection, the server continues writing protected data to the volume.

Remember:

- Before you select the volume, the Tivoli Storage Manager server does not verify whether the volume has logical block protection.
- If a drive does not support logical block protection, the mounts of volumes with logical block protection for write operations fail. To prevent the server from mounting the protected volumes for write operations, change the volume access to read-only. Also, disable logical block protection to prevent the server from enabling the feature on the tape drive.
- If a drive does not support logical block protection, and logical block protection is disabled, the server reads data from protected volumes. However, the data is not validated by the server and the tape drive.

To determine whether a volume has logical block protection, issue the **QUERY VOLUME** command and verify the value in the field Logical Block Protection.

Tip: Consider updating the access of filling volumes to read-only if you update the value of the **LBPROTECT** parameter in one of the following ways:

- READWRITE or WRITEONLY to NO
- NO to READWRITE or WRITEONLY

For example, suppose that you change the setting of the **LBPROTECT** parameter from NO to READWRITE. If the server selects a filling volume without logical block protection for write operations, the server issues a message each time the volume is mounted. The message indicates that data is written to the volume without logical block protection. To prevent this message from being displayed or to have Tivoli Storage Manager write data only with logical block protection, update the access of filling volumes without logical block protection to read-only.

Storage pool management

To mix protected and unprotected data in a library, you must create different device classes and different storage pools to separate the data. The device classes associated with the protected data can specify logical block protection for read/write operations or only for write operations.

Suppose, for example, that you have a 3584 library that has LTO-5 drives and that you want to use for protected and unprotected data. To define the required device classes and storage pools, you can issue the following commands.

```
define library 3584 libtype=scsi
define devclass lbprotect library=3584 devicetype=lto lbprotect=readwrite
define devclass normal library=3584 devicetype=lto lbprotect=no
define stgpool lbprotect_pool lbprotect maxscratch=10
define stgpool normal_pool normal maxscratch=10
```

Replacing tape drives

If you replace a drive in a tape library that is defined to Tivoli Storage Manager, you must delete the drive and path definitions for the old drive and define the new drive and path.

Replacing drive and path definitions is required even if you are exchanging one drive for another of the same type, with the same logical address, physical address, SCSI ID, and port number. Device alias names can change when you change your drive connections.

If the new drive is an upgrade that supports a new media format, you might be required to define a new logical library, device class, and storage pool. Procedures for setting up policy for a new drive in a multiple-drive library varies, depending on the types of drives and media in the library.

Preventing errors caused by media incompatibility

Understanding media compatibility issues can prevent errors. Sometimes a new drive has a limited ability to use media formats that are supported by a previous version of the drive. Often, a new drive can read but not write to the old media.

About this task

By default, existing volumes with a status of FILLING will remain in that state after a drive upgrade. In some cases, you might want to continue to use an older drive to fill these volumes. This preserves read/write capability for the existing volumes until they are reclaimed. If you choose to upgrade all of the drives in a library, pay attention to the media formats supported by the new hardware. Unless you are planning to use only the most current media with your new drive, you need to be aware of any compatibility issues. For migration instructions, see “Migrating to upgraded drives” on page 177.

To use a new drive with media it can read but not write to, issue the **UPDATE VOLUME** command to set the access for those volumes to read-only. This prevents errors that are caused by read/write incompatibility. For example, a new drive might eject media that is written in a density format it does not support as soon as the media is loaded into the drive. Or a new drive might fail the first write command to media partially written in a format it does not support.

When data on the read-only media expires and the volume is reclaimed, replace it with media that is fully compatible with the new drive. Errors can be generated if a new drive is unable to correctly calibrate a volume that is written when you use

an older format. To avoid this problem, ensure that the original drive is in good working order and at current microcode levels.

Removing drives

Drive removal requires a new drive and path definition.

Procedure

To remove a drive:

1. Stop the Tivoli Storage Manager server and shut down the operating system.
2. Remove the old drive and follow the manufacturer's instructions to install the new drive.
3. Restart the operating system and the Tivoli Storage Manager server.
4. Delete the path from the server to the drive. For example:

```
delete path server1 lib1 srctype=server desttype=drive
```
5. Delete the drive definition. For example, to delete a drive that is named DLT1 from a library device that is named LIB1, enter:

```
delete drive lib1 dlt1
```
6. Define the new drive and path. This procedure varies, depending on the configuration of drives in your library. See “Defining new drives.”

Defining new drives

How you define a new drive depends on several factors, including whether the new drive is a replacement or an upgrade, whether you plan to use different drive types within the same library, and whether you plan to use different media types within the same library.

Replacing drives with others of the same type:

To add a drive that supports the same media formats as the drive it replaces, you need to define a new drive and path.

About this task

For example, to define a new drive and name it DRIVE1 and a path to it from SERVER1, enter the following commands:

```
define drive lib1 drive1  
  
define path server1 drive1 srctype=server desttype=drive library=lib1  
device=mt3.0.0.1
```

You can use your existing library, device class, and storage pool definitions.

Upgrading all of the drives in a library that contained only one type of drive:

To upgrade all the drives in a library that contained only one type of drive, you need to define a new drive and path. You also need to update device class and storage pool definitions.

About this task

You must decide how to manage any new types of media supported by the new drives. See “Preventing errors caused by media incompatibility” on page 173 for more information.

The following scenario assumes you already have a library device defined as follows:

Library Name	Library Type	Private Category	Scratch Category	WORM Scratch Category	External Manager
LIB1	349X	200	201		

Define each new drive and path

For example, to define a new drive and name it DRIVE1, enter:

```
define drive lib1 drive1
```

```
define path server1 drive1 srctype=server desttype=drive library=lib1  
device=mt3.0.0.1
```

Update device class and storage pool definitions

- If you plan to use only one type of media in the library, you can use your existing device class and storage pool definitions.
- If you plan to use media with different capacities in the same library, you can define separate device classes and storage pools for each type of media. This will provide accurate capacity reporting for each type of media.

For example, if you plan to use both 3590E and 3590H tapes, you can define two device classes:

```
define devclass 3590E_class devtype=3590 format=drive library=lib1  
estcapacity=20g  
define devclass 3590H_class devtype=3590 format=drive library=lib1  
estcapacity=40g
```

Note: You must specify FORMAT=DRIVE for the new device classes. You can then define two storage pools to divide the tapes within the library:

```
define stgpool 3590E_pool 3590E_class maxscratch=number_of_3590E_tapes  
define stgpool 3590H_pool 3590H_class maxscratch=number_of_3590H_tapes
```

Finally, you can issue the DEFINE VOLUME command to associate media with the appropriate storage pool.

Upgrading some of the drives in a library that contained only one type of drive:

To upgrade some of the drives in a library that contained only one type of drive, you need to define a separate logical library for each type of drive.

About this task

If an automated cartridge system library software (ACSL), 349X, Manual, or External library contains only one type of drive and you upgrade only a subset of those drives, you must define an additional logical library. For SCSI libraries, upgrading one type of drive if the new drives cannot read and write in the format of the existing media is not supported. If the new drives can read only some of the media, they must upgrade all of the drives.

The following scenario assumes that you already have a library device that is defined as follows:

Library Name	Library	Private Category	Scratch Category	WORM Scratch Category	External Manager
LIB1	349X	200	201		

Define a new logical library and path for each new type of drive

For example, to add a logical library that is named LIB2 for the same physical device that is already defined as LIB1, enter:

```
define library lib2 libtype=349X privatecategory=300 scratchcategory=301
wormscratchcategory=302

define path server1 lib2 srctype=server desttype=library
device=lb3.0.0.0
```

Define each new drive and path to the new library

To define a new drive that is named DRIVE2 to the logical library named LIB2 and a new path to the drive, enter:

```
define drive lib2 drive2

define path server1 drive1 srctype=server desttype=drive library=lib2
device=mt3.0.0.1
```

Update device class and storage pool definitions

To define a new device class, enter:

```
define devclass new_dev_class devtype=3592 worm=yes format=drive
library=lib2 estcapacity=40G
```

For accurate reporting of capacity information, you must specify the **ESTCAPACITY** parameter.

To define a new storage pool, enter:

```
define stgpool new_stg_pool new_dev_class maxscratch=number_of_new_tapes
```

You can then issue the **CHECKIN LIBVOLUME** command to check the new media into the logical library LIB2.

Upgrading all of the drives in a library that contained more than one type of drive:

To upgrade all the drives in a library that contained more than one type of drive, you need to update the drive and path definitions for each logical library.

About this task

The following scenario assumes you already have two logical libraries defined. For example:

Library Name	Library	Private Category	Scratch Category	WORM Scratch Category	External Manager
LIB1	349X	200	201		
LIB2	349X	300	301	302	

Update drive and path definitions for each logical library

For each library, follow the guidelines in “Upgrading all of the drives in a

library that contained only one type of drive” on page 174. For accurate reporting of capacity information, you cannot use a global scratch pool with this configuration.

Upgrading some of the drives in a library that contained more than one type of drive:

To upgrade some of the drives in a library that contained more than one type of drive, you need to update the drive and path definitions for each logical library.

About this task

The following scenario assumes you already have two logical libraries defined, for example:

Library Name	Library	Private Category	Scratch Category	WORM Scratch Category	External Manager
LIB1	349X	200	201		
LIB2	349X	300	301	302	

You must update the drive and path definitions for each logical library. Follow the guidelines in “Upgrading some of the drives in a library that contained only one type of drive” on page 175. For accurate reporting of capacity information, you cannot use a global scratch pool with this configuration.

Migrating to upgraded drives

If you upgrade all of the drives in a library, you can preserve your existing policy definitions to migrate and expire existing data, while using the new drives to store new data.

About this task

Define a new DISK storage pool and set it up to migrate its data to a storage pool created for the new drives. Then update your existing management-class definitions to begin storing data in the new DISK storage pool.

Cleaning drives

You can use the server to manage tape-drive cleaning. The server can control how tape drives in SCSI libraries are cleaned and offers partial support for cleaning tape drives in manual libraries.

About this task

Task	Required privilege class
Clean drives	System or unrestricted storage

For automated libraries, you can automate cleaning by specifying the frequency of cleaning operations and checking a cleaner cartridge into the library volume inventory. Tivoli Storage Manager mounts the cleaner cartridge as specified. For manual libraries, Tivoli Storage Manager issues a mount request for the cleaner cartridge. There are special considerations if you plan to use server-controlled drive cleaning with a SCSI library that provides automatic drive cleaning support in its device hardware.

Tip: Use library-drive cleaning for automated tape libraries that use this function.

Device manufacturers that include library-cleaning functions recommend its use to prevent premature wear on the read/write heads of the drives.

Drives and libraries from manufacturers differ in how they manage cleaner cartridges, and how they report the presence of a cleaner cartridge in a drive. The device driver might not be able to open a drive that contains a cleaner cartridge. Sense codes and error codes that are issued by devices for drive cleaning vary. Library-drive cleaning is usually not known to applications, therefore, Tivoli Storage Manager might not always detect the cleaner cartridges in drives and might not be able to determine when cleaning begins.

Some devices require a small amount of idle time between mount requests to start drive cleaning. However, Tivoli Storage Manager tries to minimize the idle time for a drive. The result might be to prevent the library drive cleaning from functioning effectively. If this happens, use Tivoli Storage Manager to control drive cleaning. You can set the frequency to match the cleaning recommendations from the manufacturer.

Drive-cleaning methods

Cleaning of drives can be enabled from your drive or from Tivoli Storage Manager.

You can choose to use the library-drive cleaning method or the Tivoli Storage Manager drive cleaning method, but not both. Some SCSI libraries provide automatic drive cleaning.

Over time, the read heads on tapes can get dirty, which can cause read and write failures. You can select a drive-cleaning method to keep the tapes in a library clean. The library-drive cleaning method provides several advantages for automated tape libraries that use this function:

- Lowers the burden on the Tivoli Storage Manager administrator to physically manage cleaning the cartridges.
- Improves cleaning cartridge usage rates. Most tape libraries track the number of times that drives can be cleaned based on the hardware indicators. Tivoli Storage Manager uses a raw count.
- Reduces unnecessary cleaning frequency. Modern tape drives do not need to be cleaned at fixed intervals and can detect and request when cleaning is required.

If you have Tivoli Storage Manager control-drive cleaning, disable the library drive-cleaning function to prevent problems. If the library drive-cleaning function is enabled, some devices automatically move any cleaner cartridge that is found in the library to slots in the library that are dedicated for cleaner cartridges. You cannot check a cleaner cartridge into the Tivoli Storage Manager library inventory until you disable the library drive-cleaning function.

Cleaning drives in an automated library

When you configure a server-controlled drive cleaning in an automated library, you can specify how often you want the drives that are cleaned.

Procedure

Complete the following steps to configure server-controlled drive cleaning in an automated library:

1. Define or update the drives in a library, by using the **CLEANFREQUENCY** parameter in the **DEFINE DRIVE** and **UPDATE DRIVE** command.

The **CLEANFREQUENCY** parameter sets how often you want the drive to be cleaned. Consult the documentation that accompanies the drives for recommendations on cleaning frequency. For example, to have DRIVE1 cleaned after 100 GB are processed on the drive, issue the following command:

```
update drive autolib1 drive1 cleanfrequency=100
```

Consult the drive manufacturer documentation for cleaning recommendations. If the documentation gives recommendations for cleaning frequency in terms of hours of use, convert to a gigabytes value by completing the following steps:

- a. Use the bytes-per-second rating for the drive to determine a gigabytes-per-hour value.
- b. Multiply the gigabytes-per-hour value by the recommended hours of use between cleanings.
- c. Use the result as the cleaning frequency value.

Restrictions:

- a. For IBM 3590, and 3592 drives, specify a value for the **CLEANFREQUENCY** parameter rather than specify **ASNEEDED**. Using the cleaning frequency that is recommended by the product documentation will not overclean the drives.
 - b. The **CLEANFREQUENCY=ASNEEDED** parameter value does not work for all tape drives. To determine whether a drive supports this function, see the website: http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html. Click the drive to view detailed information. If **ASNEEDED** is not supported, you can use the gigabytes value for automatic cleaning.
2. Check a cleaner cartridge into the library volume inventory with the **CHECKIN LIBVOLUME** command.

```
checkin libvolume autolib1 cleanv status=cleaner cleanings=10 checklabel=no
```

After the cleaner cartridge is checked in, the server mounts the cleaner cartridge in a drive when the drive needs cleaning. The server uses that cleaner cartridge for the number of cleanings specified. See “Checking in cleaner volumes” on page 180 and “Operations with cleaner cartridges in a library” on page 181 for more information.

Checking in cleaner volumes:

To allow the server to control drive cleaning without operator intervention, you must check a cleaner cartridge into the automated library's volume inventory.

About this task

As a best practice, check in cleaner cartridges one-at-a-time and do not use the search function when checking in a cleaner cartridge.

Attention: When you check in a cleaner cartridge to a library, ensure that it is correctly identified to the server as a cleaner cartridge. Also, use caution when a cleaner cartridge is already checked in and you are checking in data cartridges. Ensure that cleaner cartridges are in their correct home slots, or errors and delays can result.

When you check in data cartridges with SEARCH=YES, ensure that a cleaner cartridge is not in a slot that is detected by the search process. Errors and delays of 15 minutes or more can result from a cleaner cartridge being improperly moved or placed. For best results, check in the data cartridges first when you use the search function. Then, check in the cleaner cartridge separately.

For example, if you need to check in both data cartridges and cleaner cartridges, put the data cartridges in the library and check them in first. You can use the search function of the **CHECKIN LIBVOLUME** command (or the **LABEL LIBVOLUME** command if you are labeling and checking in volumes). Then, check in the cleaner cartridge to the library by using one of the following methods.

- Check in without using search:

```
checkin libvolume autolib1 cleanv status=cleaner cleanings=10  
checklabel=no
```

The server then requests that the cartridge be placed in the entry/exit port, or into a specific slot.

- Check in using search, but limit the search by using the **VOLRANGE** or **VOLLIST** parameter:

```
checkin libvolume autolib1 status=cleaner cleanings=10  
search=yes checklabel=barcode vollist=cleanv
```

The process scans the library by using the bar code reader, looking for the CLEANV volume.

Manual drive cleaning in an automated library:

If your library has limited capacity, and you do not want to use a slot in your library for a cleaner cartridge, you can still use the server's drive cleaning function.

Set the cleaning frequency for the drives in the library. When a drive needs cleaning based on the frequency setting, the server issues the message, ANR8914I. For example:

ANR8914II Drive DRIVE1 in library AUTOLIB1 needs to be cleaned.

You can use that message as a cue to manually insert a cleaner cartridge into the drive. However, the server cannot track whether the drive was cleaned.

Operations with cleaner cartridges in a library:

Guidelines include monitoring cleaning messages and verifying that cleaner cartridges are in the correct storage slots.

When a drive needs to be cleaned, the server runs the cleaning operation after dismounting a data volume if a cleaner cartridge is checked in to the library. If the cleaning operation fails or is canceled, or if no cleaner cartridge is available, then the indication that the drive needs cleaning is lost. Monitor cleaning messages for these problems to ensure that drives are cleaned as needed. If necessary, issue the **CLEAN DRIVE** command to have the server try the cleaning again, or manually load a cleaner cartridge into the drive.

The server uses a cleaner cartridge for the number of cleanings that you specify when you check in the cleaner cartridge. If you check in two or more cleaner cartridges, the server uses only one of the cartridges until the designated number of cleanings for that cartridge is reached. Then, the server begins to use the next cleaner cartridge. If you check in two or more cleaner cartridges and issue two or more **CLEAN DRIVE** commands concurrently, the server uses multiple cartridges at the same time and decrements the remaining cleanings on each cartridge.

Visually verify that cleaner cartridges are in the correct storage slots before you issue any of the following commands:

- **AUDIT LIBRARY**
- **CHECKIN LIBVOLUME** with **SEARCH** specified
- **LABEL LIBVOLUME** with **SEARCH** specified

To find the correct slot for a cleaner cartridge, issue the **QUERY LIBVOLUME** command.

Drive cleaning in a manual library

The server can issue messages when a drive in a manual library needs to be cleaned.

Cleaning a drive in a manual library is the same as setting up drive cleaning without checking in a cleaner cartridge for an automated library. The server issues the ANR8914I message when a drive needs cleaning. For example:

```
ANR8914I Drive DRIVE1 in library MANLIB1 needs to be cleaned.
```

Monitor the activity log or the server console for these messages and load a cleaner cartridge into the drive as needed. The server cannot track whether the drive was cleaned.

Error checking for drive cleaning

Occasionally you might move some cartridges around within a library and put a data cartridge where Tivoli Storage Manager shows that there is a cleaner cartridge. Tivoli Storage Manager can recover from the error.

When a drive needs cleaning, the server loads what its database shows as a cleaner cartridge into the drive. The drive then moves to a **READY** state, and Tivoli Storage Manager detects that the cartridge is a data cartridge. The server then performs the following steps:

1. The server attempts to read the internal tape label of the data cartridge.

2. The server ejects the cartridge from the drive and moves it back to the home slot of the “cleaner” cartridge within the library. If the eject fails, the server marks the drive offline and issues a message that the cartridge is still in the drive.
3. The server checks out the “cleaner” cartridge to avoid selecting it for another drive cleaning request. The “cleaner” cartridge remains in the library but no longer appears in the Tivoli Storage Manager library inventory.
4. If the server was able to read the internal tape label, the server checks the volume name against the current library inventory, storage pool volumes, and the volume history file.
 - If there is not a match, you probably checked in a data cartridge as a cleaner cartridge by mistake. Now that the volume is checked out, you do not need to do anything else.
 - If there is a match, the server issues messages that manual intervention and a library audit are required. Library audits can take considerable time, so you must issue the command when sufficient time permits. See “Auditing volume inventories in libraries” on page 151.

Deleting drives

You can delete a drive if it is not currently in use. If a drive has a volume mounted, but the volume is currently idle, it can be dismounted.

About this task

Task	Required Privilege Class
Delete drives	System or unrestricted storage

To delete a drive definition, issue the **DELETE DRIVE** command.

Note: A drive cannot be deleted until the defined path to the drive is deleted. Also, a library cannot be deleted until all of the drives that are defined within it are deleted.

For details about dismounting, see “Dismounting idle volumes” on page 159.

Managing paths

You can use Tivoli Storage Manager commands to query, update, and delete paths.

Obtaining information about paths

You can use the **QUERY PATH** command to obtain information about paths.

About this task

You can request either a standard or a detailed report. For example, to display information about all paths, issue the following command:

```
query path
```

The following shows an example of the output from this command.

Source Name	Source Type	Destination Name	Destination Type	Online
NETAPP1	Data mover	DRIVE1	Drive	Yes
NETAPP1	Data mover	NASLIB	Library	Yes
datamover2	Data mover	drive4	Drive	Yes

Updating paths

You can use the **UPDATE PATH** command to update the attributes of an existing path definition.

About this task

The following examples show how you can use the **UPDATE PATH** commands for the following path types:

- Library Paths**
 Update the path from SERVER1 to a SCSI library named SCSILIB:

```
update path server1 scsilib srctype=server desttype=library device=1b4.0.0.0
```
- Drive Paths**
 Update the path from SERVER1 to a SCSI library named SCSILIB:

```
update path nas1 scsilib srctype=datamover desttype=drive
library=naslib device=mt3.0.0.0
```

Deleting paths

You can use the **DELETE PATH** command to delete an existing path definition.

About this task

Task	Required Privilege Class
Delete paths	System or unrestricted storage

A path cannot be deleted if the destination is in use.

To delete a path from a NAS data mover NAS1 to the library NASLIB:

```
delete path nas1 naslib srctype=datamover desttype=library
```

Attention: If you delete the path to a device or make the path offline, you disable access to that device.

Managing data movers

You can use Tivoli Storage Manager commands to query, update, and delete data movers.

Obtaining information about data movers

You can use the **QUERY DATAMOVER** command to obtain information about SCSI and NAS data movers.

About this task

You can request either a standard or a detailed report. For example, to display a standard report about all data movers, issue the following command:

```
query datamover *
```

The following shows an example of the output from this command.

Data Mover Name	Type	Online
-----	-----	-----
NASMOVER1	NAS	Yes
NASMOVER2	NAS	No
DATAMOVER1	SCSI	Yes

Updating data movers

You can use the **UPDATE DATAMOVER** command to update the attributes of a data mover definition.

About this task

For example, to update the data mover for the node that is named NAS1 to change the IP address, issue the following command:

```
update datamover nas1 haddress=9.67.97.109
```

Deleting data movers

You can use the **DELETE DATAMOVER** command to delete an existing data mover.

About this task

Before you can delete a data mover, you must delete all paths that are defined for the data mover.

To delete a data mover that is named NAS1, issue the following command:

```
delete datamover nas1
```

Managing disks

You can query, update, and delete client-owned disks that reside in a storage area network.

Obtaining information about disks

You can use the **QUERY DISK** command to obtain information about client-owned disks that reside in a SAN environment.

About this task

You can request either a standard or a detailed report. For example, to display a standard report about all defined disks, issue the following command:

```
query disk *
```

The following shows an example of the output from this command.

Node Name	Disk Name	Online
-----	-----	-----
NODE1	Harddisk1	Yes
NODE2	Harddisk2	Yes

Updating disks

You can use the **UPDATE DISK** command to update the attributes of an existing disk definition.

About this task

The following example shows how you can use the **UPDATE DISK** command to change the world wide name, serial number, and status of a disk.

Update a disk that is named Harddisk1 owned by NODE1. The world wide name to 20020060450d00e2 and the serial number to 100047. Change the **ONLINE** status to YES.

```
update disk node1 Harddisk1 wwn=20020060450d00e2 serial=100047 online=yes
```

Deleting disks

You can use the **DELETE DISK** command to delete an existing disk definition.

About this task

All paths that are related to a disk must be deleted before the disk itself can be deleted.

Delete a disk that is named Harddisk1 that is owned by the node NODE1.

```
delete disk node1 Harddisk1
```

Chapter 8. Tips for defining devices

Learn more details about defining the Tivoli Storage Manager storage objects.

Definitions for storage devices

Before the Tivoli Storage Manager server can use a device, the device must be configured to the operating system and to the server.

About this task

You can use the **PERFORM LIBACTION** command to simplify the process when you add devices to SCSI and VTL library types.

Table 10 summarizes the definitions that are required for different device types.

Table 10. Required definitions for storage devices

Device	Device Types	Required Definitions			
		Library	Drive	Path	Device Class
Magnetic disk	DISK	—	—	—	Yes ^{See note}
	FILE ^{See note}	—	—	—	Yes
	CENTERA	—	—	—	Yes
Tape	3590	Yes	Yes	Yes	Yes
	3592				
	4MM				
	8MM				
	DLT				
	LTO				
	NAS				
	VOLSAFE				
Removable media (file system)	GENERICTAPE	Yes	Yes	Yes	Yes
	ECARTRIDGE ^{See note}				
	REMOVABLEFILE				
Virtual volumes	SERVER	—	—	—	Yes

Notes:

- The DISK device class exists at installation and cannot be changed.
- FILE libraries, drives, and paths are required for sharing with storage agents.
- The ECARTRIDGE device type is for StorageTek cartridge tape drives such as 9840 and T10000 drives.

Example: Mapping devices to device classes

You have internal disk drives, an automated tape library with 8 mm drives, and a manual DLT tape drive. You create a device class for each type of storage.

About this task

To map storage devices to device classes, use the information shown in Table 11.

Table 11. Mapping storage devices to device classes

Device Class	Description
DISK	Storage volumes that reside on the internal disk drive Tivoli Storage Manager provides one DISK device class that is already defined. You do not need and cannot define another device class for disk storage.
8MM_CLASS	Storage volumes that are 8 mm tapes, used with the drives in the automated library
DLT_CLASS	Storage volumes that are DLT tapes, used on the DLT drive

You must define any device classes that you need for your removable media devices such as tape drives. See “Defining device classes” on page 194 for information on defining device classes to support your physical storage environment.

Example: Mapping storage pools to device classes and devices

After you categorize your storage devices, you can identify availability, space, and performance requirements for client data that is stored in server storage. These requirements help you determine where to store data for different groups of clients and different types of data. You can then create storage pools that are storage destinations for backed-up, archived, or space-managed files to match requirements.

About this task

For example, you determine that users in the business department have three requirements:

- Immediate access to certain backed-up files, such as accounts receivable and payroll accounts.
These files should be stored on disk. However, you need to ensure that data is moved from the disk to prevent it from becoming full. You can set up a storage hierarchy so that files can migrate automatically from disk to the automated tape library.
- Periodic access to some archived files, such as monthly sales and inventory reports.
These files can be stored on 8-mm tapes, using the automated library.
- Occasional access to backed-up or archived files that are rarely modified, such as yearly revenue reports.
These files can be stored using the DLT drive.

To match user requirements to storage devices, you define storage pools, device classes, and, for device types that require them, libraries and drives. For example,

to set up the storage hierarchy so that data migrates from the BACKUPPOOL to 8 mm tapes, you specify BACKTAPE1 as the next storage pool for BACKUPPOOL. See Table 12.

Table 12. Mapping storage pools to device classes, libraries, and drives

Storage Pool	Device Class	Library (Hardware)	Drives	Volume Type	Storage Destination
BACKUPPOOL	DISK	—	—	Storage volumes on the internal disk drive	For a backup copy group for files requiring immediate access
BACKTAPE1	8MM_CLASS	AUTO_8MM (Exabyte EXB-210)	DRIVE01, DRIVE02	8-mm tapes	For overflow from the BACKUPPOOL and for archived data that is periodically accessed
BACKTAPE2	DLT_CLASS	MANUAL_LIB (Manually mounted)	DRIVE03	DLT tapes	For backup copy groups for files that are occasionally accessed

Note: Tivoli Storage Manager has the following default disk storage pools:

- BACKUPPOOL
- ARCHIVEPOOL
- SPACEMGPOOL
- DISKPOOL

For more information, see

“Configuring random access volumes on disk devices” on page 81

Defining devices and paths

The following topics describe how to define libraries, drives, and paths to Tivoli Storage Manager.

About this task

See “Managing libraries” on page 164 and “Managing drives” on page 166 for information about displaying library and drive information, and updating and deleting libraries and drives.

Defining libraries

Before you can use a drive, you must first define the library to which the drive belongs.

About this task

Task	Required Privilege Class
Define or update libraries	System or unrestricted storage

For both manually mounted drives and drives in automated libraries, the library must be defined before the drives can be used. For example, you have several stand-alone tape drives. You can define a library that is named MANUALMOUNT for these drives by using the following command:

```
define library manualmount libtype=manual
```

For all libraries other than manual libraries, you define the library and then define a path from the server to the library. For example, if you have an IBM 3583 device, you can define a library that is named ROBOTMOUNT by using the following command:

```
define library robotmount libtype=scsi
```

Next, you use the **DEFINE PATH** command. In the path, you must specify the **DEVICE** parameter. The **DEVICE** parameter is required and specifies the device alias name by which the library's robotic mechanism is known.

```
define path server1 robotmount srctype=server desttype=library  
device=1b3.0.0.0
```

For more information about paths, see “Defining paths” on page 193.

Defining SCSI libraries on a SAN

For a library type of SCSI on a SAN, the server can track the library's serial number. With the serial number, the server can confirm the identity of the device when you define the path or when the server uses the device.

About this task

If you choose, you can specify the serial number when you define the library to the server. For convenience, the default is to allow the server to obtain the serial number from the library itself at the time that the path is defined.

If you specify the serial number, the server confirms that the serial number is correct when you define the path to the library. When you define the path, you can set AUTODETECT=YES to allow the server to correct the serial number if the number that it detects does not match what you entered when you defined the library.

Depending on the capabilities of the library, the server might not be able to automatically detect the serial number. Not all devices are able to return a serial number when asked for it by an application such as the server. In this case, the server does not record a serial number for the device, and is not able to confirm the identity of the device when you define the path or when the server uses the device. See “Impact of device changes on the SAN” on page 137.

Defining drives

To inform the server about a drive that can be used to access storage volumes, issue the **DEFINE DRIVE** command, followed by the **DEFINE PATH** command.

Before you begin

A drive object represents a drive mechanism within a library that uses removable media. For devices with multiple drives, including automated libraries, you must define each drive separately and associate it with a library. Drive definitions can include such information as the element address for drives in SCSI or virtual tape libraries (VTLs), how often a tape drive is cleaned, and whether the drive is online.

Tivoli Storage Manager drives include tape drives that can stand alone or that can be part of an automated library. Supported removable media drives also include removable file devices such as rewritable CDs.

About this task

When you issue the **DEFINE DRIVE** command, you must provide some or all of the following information:

Library name

The name of the library in which the drive resides.

Drive name

The name that is assigned to the drive.

Serial number

The serial number of the drive. The serial number parameter applies only to drives in SCSI libraries. With the serial number, the server can confirm the identity of the device when you define the path or when the server uses the device.

You can specify the serial number if you choose. The default is to allow the server to obtain the serial number from the drive itself at the time that the path is defined. If you specify the serial number, the server confirms that the serial number is correct when you define the path to the drive. When you define the path, you can set `AUTODETECT=YES` to allow the server to correct the serial number if the number that it detects does not match what you entered when you defined the drive.

Depending on the capabilities of the drive, the server might not be able to automatically detect the serial number. In this case, the server does not record a serial number for the device, and is not able to confirm the identity of the device when you define the path or when the server uses the device.

Element address

The element address of the drive. The **ELEMENT** parameter applies only to drives in SCSI libraries. The element address is a number that indicates the physical location of a drive within an automated library. The server needs the element address to connect the physical location of the drive to the drive's SCSI address. You can allow the server to obtain the element number from the drive itself at the time that the path is defined, or you can specify the element number when you define the drive.

Depending on the capabilities of the library, the server might not be able to automatically detect the element address. In this case, you must supply the element address when you define the drive, if the library has more than one drive. Element numbers for many libraries are available at http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html.

For example, to define a drive that belongs to the manual library named `MANLIB`, enter this command:

```
define drive manlib mandrive
```

Next, you define the path from the server to the drive, by using the device name that is used to access the drive:

```
define path server1 mandrive srctype=server desttype=drive library=manlib  
device=mt3.0.0.0
```

For more information about paths, see:

“Defining paths” on page 193

“Impact of device changes on the SAN” on page 137

Defining data movers

Data movers are SAN-attached devices that, through a request from Tivoli Storage Manager, transfer client data for backup, archiving, or restore purposes. Data movers are defined as unique objects to Tivoli Storage Manager.

When you issue the **DEFINE DATAMOVER** command, you must provide some or all of the following information:

Data mover name

The name of the defined data mover.

Type The type of data mover (SCSI or NAS).

World wide name

The Fibre Channel world wide name for the data mover device.

Serial number

Specifies the serial number of the data mover.

High level address

The high level address is either the numerical IP address or the domain name of a NAS file server.

Low level address

The low level address specifies the TCP port number that is used to access a NAS file server.

User ID

The user ID specifies the ID for a user when initiating a Network Data Management Protocol (NDMP) session with a NAS file server.

Password

The password specifies the password that is associated with a user ID when initiating an NDMP session with a NAS file server. Check with your NAS file server vendor for user ID and password conventions.

Copy threads

The number of concurrent copy operations that the SCSI data mover can support.

Online

The online parameter specifies whether the data mover is online.

Data format

The data format parameter specifies the data format used according to the type of data mover device used.

For example, to define a NAS data mover that is named NAS1, enter the following:

```
define datamover nas1 type=nas hladdress=netapp2.tucson.ibm.com lladdress=10000  
userid=root password=admin dataformat=netappdump
```

Defining paths

Before a device can be used, a path must be defined between the device and the server or the device and the data mover responsible for outboard data movement.

About this task

This command must be used to define the following path relationships:

- Between a server and a drive or a library.
- Between a storage agent and a drive.
- Between a data mover and a drive, a disk, or a library.

When you issue the **DEFINE PATH** command, you must provide some or all of the following information:

Source name

The name of the server, storage agent, or data mover that is the source for the path.

Destination name

The assigned name of the device that is the destination for the path.

Source type

The type of source for the path. (A storage agent is considered a type of server for this purpose.)

Destination type

The type of device that is the destination for the path.

Library name

The name of the library that a drive is defined to if the drive is the destination of the path.

GENERICTAPE device class

If you plan to use a device that is not supported by the Tivoli Storage Manager server and you want to use the GENERICTAPE device class, specify **GENERICTAPE=Yes** when you define the path.

Device

The alias name of the device (or for an IBM 3494 library, the symbolic name). This parameter is used when defining a path between a server or a storage agent and a library, drive, or disk. This parameter must not be used when defining a data mover as the source type, except when the data mover is a NAS data mover. NAS data movers always require a device parameter. For shared FILE drives, this value is always "FILE."

Directory

The directory location or locations of the files that are used in the FILE device class. The default is the current working directory of the server at the time the command is issued. Windows registry information is used to determine the default directory.

Automatic detection of serial number and element address

For devices on a SAN, you can specify whether the server must correct the serial number or element address of a drive or library, if it was incorrectly specified on the definition of the drive or library. The server uses the device name to locate the device and compares the serial number (and the element address for a drive) that it detects with that specified in the definition of the device. The default is to not allow the correction.

LUN Logical Unit Number. An identifier that is used on a SCSI bus to

distinguish between devices with the same target ID. On a Fibre Channel bus, it is used to distinguish between devices with the same world wide name. If the LUN of the device, as identified by the source of the path, differs from the LUN in the base definition of the device, you must use the LUN as identified by the source of the path. This parameter must not be used when defining a server as the source type.

Initiator ID

The SCSI initiator ID that the source uses when accessing the destination. The parameter must not be used when defining a server as the source type.

For example, if you had a SCSI type library named AUTODLTLIB that had a device name of lb3.0.0.0, and you wanted to define it to a server named ASTRO1, you would issue the following command:

```
define path astrol autodlplib srctype=server desttype=library
device=lb3.0.0.0
```

If you had a drive, DRIVE01, that resided in library AUTODLTLIB, and had a device name of mt3.0.0.0, and you wanted to define it to server ASTRO1, you would issue the following command:

```
define path astrol drive01 srctype=server desttype=drive library=autodlplib
device=mt3.0.0.0
```

Defining device classes

A device class defines a device type for a set of volumes that can be created in a storage pool. Device classes are also important for storing database backups and for exporting and importing data.

About this task

Sequential-access device types include tape, and sequential-access disk. For random access storage, Tivoli Storage Manager supports only the DISK device class, which is defined by Tivoli Storage Manager.

To define a device class, use the **DEFINE DEVCLASS** command and specify the **DEVTYPE** parameter. The **DEVTYPE** parameter assigns a device type to the device class. You can define multiple device classes for each device type. For example, you might want to specify different attributes for different storage pools that use the same type of tape drive. Variations might be required that are not specific to the device, but rather to how you want to use the device (for example, mount retention or mount limit). For all device types other than FILE or SERVER, you must define libraries and drives to Tivoli Storage Manager before you define device classes.

To update an existing device class definition, use the **UPDATE DEVCLASS** command. You can also delete a device class and query a device class by using the **DELETE DEVCLASS** and **QUERY DEVCLASS** commands.

Task	Required privilege class
Define, update, or delete device classes	System or unrestricted storage
Request information about device classes	Any administrator

Remember:

- One device class can be associated with multiple storage pools, but each storage pool is associated with only one device class.
- If you include the DEVCONFIG option in the dsmserv.opt file, the files that you specify with that option are automatically updated with the results of the **DEFINE DEVCLASS**, **UPDATE DEVCLASS**, and **DELETE DEVCLASS** commands.
- Tivoli Storage Manager allows SCSI libraries to include tape drives of more than one device type. When you define the device class in this environment, you must declare a value for the **FORMAT** parameter.

See the following topics:

Tasks
"Defining tape device classes" on page 196
"Defining 3592 device classes" on page 200
"Device classes for devices not supported by the Tivoli Storage Manager server" on page 203
"Defining device classes for removable media devices" on page 203
"Defining sequential-access disk (FILE) device classes" on page 204
"Defining LTO device classes" on page 208
"Defining SERVER device classes" on page 211
"Defining device classes for StorageTek VolSafe devices" on page 212
"Defining device classes for CENTERA devices" on page 214
"Obtaining information about device classes" on page 215
"How Tivoli Storage Manager fills volumes" on page 216

For details about commands and command parameters, see the *Administrator's Reference*.

For the most up-to-date list of supported devices and valid device class formats, see the Tivoli Storage Manager Supported Devices website:

http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html

The examples in topics show how to perform tasks using the Tivoli Storage Manager command-line interface. For information about the commands, see the *Administrator's Reference*, or issue the HELP command from the command line of a Tivoli Storage Manager administrative client.

Sequential-access device types

With Tivoli Storage Manager, you can use tape devices, magnetic disk devices, removable media devices, and virtual volumes.

The following tables list the valid devices, media types, and Tivoli Storage Manager device types.

For details and updates, see the following website: http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html

Table 13. Tape devices

Examples	Media type	Device type
IBM 3590, 3590E drives	IBM 3590 cartridges	3590
IBM 3592 drives	IBM 3592 cartridges	3592
IBM 7206-005	4 mm cartridges	4MM
IBM 7208-001 and 7208-011	8 mm cartridges	8MM
Oracle StorageTek 9840 and T10000 drives	Tape cartridges	ECARTRIDGE
Tape drives that can be used by the operating system device drivers	Tape cartridges	GENERICTAPE
IBM 3580	LTO Ultrium cartridges	LTO
Tape drives that can be used by the NAS file server for backups	Unknown	NAS
Oracle StorageTek 9840 and T10000 drives	Write-once read-many (WORM) tape cartridges	VOLSAFE

Table 14. Magnetic disk devices

Examples	Media type	Device type
Sequential-access disk	File system or storage volumes	FILE
EMC CENTERA	File system or storage volumes	CENTERA

Table 15. Removable media (file system) devices

Examples	Media type	Device Type
Removable media devices that are attached as local, removable file systems	Iomega Zip or Jaz, DVD, or CD media	REMOVABLEFILE

Table 16. Virtual volumes

Examples	Media type	Device type
Tivoli Storage Manager target server	Storage volumes or files that are archived on another Tivoli Storage Manager server	SERVER

Defining tape device classes

Device class definitions for tapes include parameters that allow you to control storage operations.

Specifying the estimated capacity of tape volumes

Tivoli Storage Manager also uses estimated capacity to determine when to begin reclamation storage pool volumes.

About this task

For tape device classes, the default values selected by the server depend on the recording format that is used to write data to the volume. You can either accept the default for a device type or specify a value.

To specify estimated capacity for tape volumes, use the **ESTCAPACITY** parameter when you define the device class or update its definition.

For more information about how Tivoli Storage Manager uses the estimated capacity value, see “How Tivoli Storage Manager fills volumes” on page 216.

Specifying recording formats for tape media

You can specify the recording format that is used by Tivoli Storage Manager when writing data to tape media.

About this task

To specify a recording format, use the **FORMAT** parameter when you define the device class or update its definition.

If all drives associated with that device class are identical, specify **FORMAT=DRIVE**. The server selects the highest format that is supported by the drive on which a volume is mounted.

If some drives associated with the device class support a higher density format than others, specify a format that is compatible with all drives. If you specify **FORMAT=DRIVE**, mount errors can occur. For example, suppose a device class uses two incompatible devices such as an IBM 7208-2 and an IBM 7208-12. The server might select the high-density recording format of 8500 for each of two new volumes. Later, if the two volumes are to be mounted concurrently, one fails because only one of the drives is capable of the high-density recording format.

If drives in a single SCSI library use different tape technologies (for example, DLT and LTO Ultrium), specify a unique value for the **FORMAT** parameter in each device class definition.

The recording format that Tivoli Storage Manager uses for a volume is selected when the first piece of data is written to the volume. Updating the **FORMAT** parameter does not affect media that already contain data until those media are rewritten from the beginning. This process might happen after a volume is reclaimed or deleted, or after all of the data on the volume expires.

Associating library objects with device classes

A library contains the drives that can be used to mount the volume. Only one library can be associated with a device class. However, multiple device classes can reference the same library.

About this task

To associate a device class with a library, use the **LIBRARY** parameter when you define a device class or update its definition.

Controlling media-mount operations for tape devices

Using device class definitions, you can control the number of mounted volumes, the amount of time a volume remains mounted, and the amount of time that the Tivoli Storage Manager server waits for a drive to become available.

Controlling the number of simultaneously mounted volumes:

When setting a mount limit for a device class, you need to consider the number of storage devices connected to your system, whether you are using the simultaneous-write function, whether you are associating multiple device classes with a single library, and the number of processes that you want to run at the same time.

About this task

When you select a mount limit for a device class, consider the following issues:

- How many storage devices are connected to your system?

Do not specify a mount limit value that is greater than the number of associated available drives in your installation. If the server tries to mount as many volumes as specified by the mount limit and no drives are available for the required volume, an error occurs and client sessions might be terminated. (This does not apply when the **DRIVES** parameter is specified.)

- Are you using the simultaneous-write function to primary storage pools, copy storage pools, and active-data pools?

Specify a mount limit value that provides a sufficient number of mount points to support writing data simultaneously to the primary storage pool and all associated copy storage pools and active-data pools.

- Are you associating multiple device classes with a single library?

A device class that is associated with a library can use any drive in the library that is compatible with the device class' device type. Because you can associate more than one device class with a library, a single drive in the library can be used by more than one device class. However, Tivoli Storage Manager does not manage how a drive is shared among multiple device classes.

- How many Tivoli Storage Manager processes do you want to run at the same time, using devices in this device class?

Tivoli Storage Manager automatically cancels some processes to run other, higher priority processes. If the server is using all available drives in a device class to complete higher priority processes, lower priority processes must wait until a drive becomes available. For example, Tivoli Storage Manager cancels the process for a client backing up directly to tape if the drive being used is needed for a server migration or tape reclamation process. Tivoli Storage Manager cancels a tape reclamation process if the drive being used is needed for a client restore operation. For more information, see "Preempting operations" on page 605.

If processes are often canceled by other processes, consider whether you can make more drives available for Tivoli Storage Manager use. Otherwise, review your scheduling of operations to reduce the contention for drives.

This consideration also applies to the simultaneous-write function. You must have enough drives available to allow for a successful simultaneous-write operation.

Best Practice: If the library associated with this device class is EXTERNAL type, explicitly specify the mount limit instead of using MOUNTLIMIT=DRIVES.

To specify the maximum number of volumes that can be simultaneously mounted, use the **MOUNTLIMIT** parameter when you define the device class or update its definition.

Controlling the amount of time that a volume remains mounted:

You can control the amount of time that a mounted volume remains mounted after its last I/O activity. If a volume is used frequently, you can improve performance by setting a longer mount retention period to avoid unnecessary mount and dismount operations.

About this task

If mount operations are being handled by manual, operator-assisted activities, you might want to specify a long mount retention period. For example, if only one operator supports your entire operation on a weekend, then define a long mount retention period so that the operator is not being asked to mount volumes every few minutes.

To control the amount of time a mounted volume remains mounted, use the **MOUNTRETENTION** parameter when you define the device class or update its definition. For example, if the mount retention value is 60, and a mounted volume remains idle for 60 minutes, then the server dismounts the volume.

While Tivoli Storage Manager has a volume mounted, the drive is allocated to Tivoli Storage Manager and cannot be used for anything else. If you need to free the drive for other uses, you can cancel Tivoli Storage Manager operations that are using the drive and then dismount the volume. For example, you can cancel server migration or backup operations. For information on how to cancel processes and dismount volumes, see:

- “Canceling server processes” on page 604
- “Dismounting idle volumes” on page 159

Controlling the amount of time that the server waits for a drive:

You can specify the maximum amount of time, in minutes, that the Tivoli Storage Manager server waits for a drive to become available for the current mount request.

About this task

To control the wait time for a drive to become available for a mount request, use the **MOUNTWAIT** parameter when you define or update a device class.

This parameter is not valid for EXTERNAL library types.

Write-once, read-many devices

The **WORM** parameter specifies whether the drive that is being defined is a write-once, read-many WORM device. This parameter is not supported for all device classes. You cannot change the value of the **WORM** parameter with the **UPDATE DEVCLASS** command.

For an example that shows how to configure a VolSafe device with the **WORM** parameter, see “Defining device classes for StorageTek VolSafe devices” on page 212.

Defining 3592 device classes

Device class definitions for 3592 devices include parameters for faster volume-access speeds and drive encryption. Particular methods are required to prevent or minimize problems when mixing different generations of 3592 drives in a library.

Mixing generations of 3592 media in a single library:

For optimal performance, do not mix generations of 3592 media in a single library. Media problems can result when different drive generations are mixed. For example, Tivoli Storage Manager might not be able to read a volume's label.

About this task

The following table shows read-and-write interoperability for drive generations.

Drives	Generation 1 format	Generation 2 format	Generation 3 format	Generation 4 format
Generation 1	Read and write	n/a	n/a	n/a
Generation 2	Read and write	Read and write	n/a	n/a
Generation 3	Read only	Read and write	Read and write	n/a
Generation 4	n/a	Read only	Read and write	Read and write

If you must mix generations of drives in a library, use one of the methods in the following table to prevent or minimize the potential for problems.

Important: Mixed drive generations is not the optimal configuration. If possible, limit the drives in a library to a single generation.

Mixing generations of drives
<p>(349X, ACSLS, SCSI libraries) If your library contains two drive generations, force all drives to use the format of the earlier generation. For example, if your library contains generation 3 and generation 4 drives, force all the generation 4 drives to use the generation 3 format. The result is that all the drives can read and write to all the media.</p> <p>Remember: If you force a drive generation to write in the format of an earlier drive generation, both drive generations can verify labels and read media written in the format of the earlier drive generation. For example, if your library contains generation 2 and generation 3 drives, both drive generations can verify labels and read media written in the generation 2 format. However, this configuration does not allow the generation 3 drives to read or write in their optimal format.</p> <p>If your library contains three drive generations, the latest drive generation in your library can only read media from the earliest format, but cannot write with it. For example, if your library contains generation 2, generation 3, and generation 4 drives, the generation 4 drives can only read the generation 2 format. In this configuration, mark all media previously written in generation 2 format to read-only.</p>
<p>(349X and ACSLS libraries only) Logically partition the generations without partitioning the hardware. Define two or three new library objects for each drive generation that the physical library contains. For example, if you have a physical library with 3592-2 drives and 3592-3 drives, define two new library objects.</p> <p>Specify a path with the same special file name for each new library object. In addition, for 349X libraries, specify disjoint scratch categories (including the WORMSCRATCH category, if applicable) for each library object. Specify a new device class and a new storage pool that points to each new library object.</p>
<p>(SCSI libraries only) Define a new storage pool and device class for the latest drive generation. For example, suppose that you have a storage pool and device class for 3592-2. The storage pool contains all the media written in generation 2 format. Suppose that the value of the FORMAT parameter in the device class definition is set to 3952-2 (not DRIVE). You add generation 3 drives to the library. Complete the following steps:</p> <ol style="list-style-type: none"> 1. In the new device-class definition for the generation 3 drives, set the value of the FORMAT parameter to 3592-3 or 3592-3C. Do not specify DRIVE. 2. In the definition of the storage pool that is associated with generation 2 drives, update the MAXSCRATCH parameter to 0, for example: update stgpool genpool2 maxscratch=0 <p>This method allows both generations to use their optimal format and minimizes potential media problems that can result from mixing generations. However, it does not resolve all media issues. For example, competition for mount points and mount failures might result. (To learn more about mount point competition in the context of LTO drives and media, see “Defining LTO device classes” on page 208.) The following list describes media restrictions:</p> <ul style="list-style-type: none"> • CHECKIN LIBVOL: The issue is using the CHECKLABEL=YES option. If the label is written in a generation 3 or later format, and you specify the CHECKLABEL=YES option, drives of previous generations fail using this command. It is optimal to use CHECKLABEL=BARCODE. • LABEL LIBVOL: When the server tries to use drives of a previous generation to read the label that is written in a generation 3 or later format, the LABEL LIBVOL command fails unless OVERWRITE=YES is specified. Verify that the media that is being labeled with OVERWRITE=YES does not have any active data. • CHECKOUT LIBVOL: When Tivoli Storage Manager verifies the label (CHECKLABEL=YES), as a generation 3 or later format, and read operations by drives of previous generations, the command fails. As a best practice, use CHECKLABEL=NO.

Controlling data-access speeds for 3592 volumes:

You can reduce media capacity to create volumes with faster data-access speeds with Tivoli Storage Manager. The benefit is that can partition data into storage pools that have volumes with faster data-access speeds.

About this task

To reduce media capacity, use the **SCALECAPACITY** parameter when you define the device class or update its definition.

Specify a percentage value of 20, 90 or 100. A value of 20 percent provides the fastest access time, and 100 percent provides the largest storage capacity. For example, If you specify a scale capacity of 20 for a 3592 device class without compression, a 3592 volume in that device class would store 20 percent of its full capacity of 300 GB, or about 60 GB.

Scale capacity takes effect only when data is first written to a volume. Updates to the device class for scale capacity do not affect volumes that already have data written to them until the volume is returned to scratch status.

For information about setting up storage pool hierarchies, see “Setting up a storage pool hierarchy” on page 275.

Encrypting data with drives that are 3592 generation 2 and later:

With Tivoli Storage Manager, you can use the following types of drive encryption with drives that are 3592 generation 2 and later: Application, System, and Library. These methods are defined through the hardware.

Enabling 3592 drive encryption:

The **DRIVEENCRYPTION** parameter specifies whether drive encryption is enabled or can be enabled for drives that are 3592 generation 2 and later. Use this parameter to ensure Tivoli Storage Manager compatibility with hardware encryption settings for empty volumes.

About this task

- To use the Application method, in which Tivoli Storage Manager generates and manages encryption keys, set the **DRIVEENCRYPTION** parameter to 0N. This permits the encryption of data for empty volumes. If the parameter is set to 0N and if the hardware is configured for another encryption method, backup operations fail.
- To use the Library or System methods of encryption, set the parameter to **ALLOW**. This specifies that Tivoli Storage Manager is not the key manager for drive encryption, but allows the hardware to encrypt the volume's data through one of the other methods. Specifying this parameter does not automatically encrypt volumes. Data can be encrypted only by specifying the **ALLOW** parameter and configuring the hardware to use one of these methods.

Procedure

The following simplified example shows how to permit the encryption of data for empty volumes in a storage pool, by using Tivoli Storage Manager as the key manager:

1. Define a library. For example:

- ```
define library 3584 libtype=SCSI
```
2. Define a device class, 3592\_ENCRYPT, and specify the value ON for the **DRIVEENCRYPTION** parameter. For example:

```
define devclass 3592_encrypt library=3584 devtype=3592 driveencryption=on
```
  3. Define a storage pool. For example:

```
define stgpool 3592_encrypt_pool 3592_encrypt
```

## Results

The **DRIVEENCRYPTION** parameter is optional. The default value is to allow the Library or System methods of encryption.

For more information about using drive encryption, see “Encrypting data on tape” on page 526.

*Disabling 3592 drive encryption:*

To disable any method of encryption on new volumes, set the **DRIVEENCRYPTION** parameter to OFF. If the hardware is configured to encrypt data through either the Library or System method and **DRIVEENCRYPTION** is set to OFF, backup operations fail.

## Device classes for devices not supported by the Tivoli Storage Manager server

To use a tape device that is not supported by the Tivoli Storage Manager server, you must define a device class whose device type is GENERICTAPE.

For Windows systems, you must also define a drive path with GENERICTAPE=Yes to use a tape device.

For a manual library with multiple drives of device type GENERICTAPE, ensure that the device types and recording formats of the drives are compatible. Because the devices are controlled by the operating system device driver, the Tivoli Storage Manager server is not aware of the following:

- The actual type of device: 4 mm, 8 mm, digital linear tape, and so forth. For example, if you have a 4 mm device and an 8 mm device, you must define separate manual libraries for each device.
- The actual cartridge recording format. For example, if you have a manual library that is defined with two device classes of GENERICTAPE, ensure that the recording formats are the same for both drives.

## Defining device classes for removable media devices

To access volumes that belong to this device class, the server requests that the removable media be mounted in drives. The server then opens a file on the media and reads or writes the file data.

### About this task

Removable file devices include:

Iomega Zip drives, Iomega Jaz drives, CD drives, and DVD drives

To define a device class for removable media, use the **DEVTYPE=REMOVABLEFILE** parameter in the device class definition.



Tivoli Storage Manager REMOVABLEFILE device class supports only single-sided media. Therefore, if a data cartridge that is associated with a REMOVABLEFILE device class has two sides, the Tivoli Storage Manager server treats each side as a separate Tivoli Storage Manager volume.

When you use CD-ROM media for the REMOVABLEFILE device type, the library type must be specified as MANUAL. Access this media through a drive letter, for example, E:.

For more information, see:

“Configuring removable media devices” on page 101

## Defining sequential-access disk (FILE) device classes

FILE device classes are used for storing data on disk in simulated storage volumes. The storage volumes are actually files. Data is written sequentially into the file system of the server. Because each volume in a FILE device class is actually a file, a volume name must be a fully qualified file name.

### About this task

To define a FILE device class, use the **DEVTYPE=FILE** parameter in the device class definition.

Do not use raw partitions with a device class type of FILE.

### Concurrent access to FILE volumes

Concurrent access improves restore performance by allowing two or more clients to access the same volume at the same time.

The Tivoli Storage Manager server allows for multiple client sessions (archive, retrieve, backup, and restore) or server processes. For example, storage pool backup, to concurrently read a volume in a storage pool that is associated with a FILE-type device class. In addition, one client session or one server process can write to the volume while it is being read.

The following server processes are allowed shared read access to FILE volumes:

- BACKUP DB
- BACKUP STGPOOL
- COPY ACTIVATEDATA
- EXPORT/IMPORT NODE
- EXPORT/IMPORT SERVER
- GENERATE BACKUPSET
- RESTORE STGPOOL
- RESTORE VOLUME

The following server processes are not allowed shared read access to FILE volumes:

- AUDIT VOLUME
- DELETE VOLUME
- MIGRATION
- MOVE DATA
- MOVE NODEDATA

- RECLAMATION

## Mitigating performance degradation when backing up or archiving to FILE volumes

The minimum I/O to a volume associated with a FILE device class is 256 KB, regardless how much data is being written to the volume. For example, if you are backing up one 500-byte object, it takes 256 KB of I/O to store it on the volume. The size of the I/O for a volume that is associated with a FILE device class has the greatest impact when backing up or archiving many small objects, for example, small files or small directories.

### About this task

To reduce the potential for performance degradation, increase the size of aggregates that are created by the server. (An aggregate is an object that contains multiple logical files that are backed up or archived from a client in a single transaction.) To increase the size of aggregates, complete one of the following tasks:

- Increase the value of the **TXNGROUPMAX** option in the server options file, `dsmserv.opt`.
- Increase the value of the **TXNGROUPMAX** parameter on the **REGISTER NODE** or **UPDATE NODE** server commands.

In addition to increasing the **TXNGROUPMAX** value, you might also need to increase the values for the following options:

- The client option **TXNBYTELIMIT** in the client options file, `dsm.opt`
- The server options **MOVEBATCHSIZE** and **MOVESIZETHRESH**

For details about the client option **TXNBYTELIMIT**, refer to the *Backup-Archive Clients Installation and User's Guide*. For details about server commands and options, refer to the *Administrator's Reference*.

## Specifying directories in FILE device-class definitions

The directory name in a FILE device-class definition identifies the location where the server places the files that represent storage volumes for the device class. When processing the **DEFINE DEVCLASS** command, the server expands the specified directory name into its fully qualified form, starting from the root directory.

### About this task

You can specify one or more directories as the location of the files that are used in the FILE device class. The default is the current working directory of the server at the time the command is issued.

**Attention:** Do not specify multiple directories from the same file system. Doing so can cause incorrect space calculations. For example, if the directories `/usr/dir1` and `/usr/dir2` are in the same file system, the space check, which does a preliminary evaluation of available space during store operations, counts each directory as a separate file system. If space calculations are incorrect, the server might commit to a FILE storage pool, but not be able to obtain space, causing the operation to fail. If the space check is accurate, the server can skip the FILE pool in the storage hierarchy and use the next storage pool if one is available.

If the server needs to allocate a scratch volume, it creates a new file in the specified directory or directories. (The server can choose any of the directories in which to create new scratch volumes.) To optimize performance, ensure that multiple directories correspond to separate physical volumes.

The following table lists the file name extension that is created by the server for scratch volumes, depending on the type of data that is stored.

| For scratch volumes used to store this data: The file extension is: |      |
|---------------------------------------------------------------------|------|
| Client data                                                         | .BFS |
| Export                                                              | .EXP |
| Database backup                                                     | .DBV |

### Avoiding data-integrity problems when using disk subsystems and file systems:

Tivoli Storage Manager supports the use of remote file systems or drives for reading and writing storage pool data, database backups, and other data operations. Disk subsystems and file systems must not report successful write operations when they can fail after a successful write report to Tivoli Storage Manager.

#### About this task

A write failure after a successful notification constitutes a data-integrity problem because the data that was reported as successfully written is unavailable for retrieval. In this situation, all data subsequently written is also at risk due to positioning mismatches within the target file. To avoid these problems, ensure that disk subsystems and file systems, whatever implementation you use, are *always* able to return data when the data is requested.

For important disk-related information, see “Requirements for disk systems” on page 75.

### Giving storage agents access to FILE volumes:

You must ensure that storage agents can access newly created FILE volumes. To access FILE volumes, storage agents replace names from the directory list in the device class definition with the names in the directory list for the associated path definition.

#### About this task

The following example illustrates the importance of matching device classes and paths to ensure that storage agents can access newly created FILE volumes. Suppose you want to use these three directories for a FILE library:

```
c:\server
d:\server
e:\server
```

#### Procedure

1. Use the following command to set up a FILE library that is named CLASSA with one drive that is named CLASSA1 on SERVER1:

```
define devclass classa devtype=file
directory="c:\server,d:\server,e:\server"
shared=yes mountlimit=1
```
2. You want the storage agent STA1 to be able to use the FILE library, so you define the following path for storage agent STA1:

```
define path server1 stal srctype=server desttype=drive device=file
directory="\\192.168.1.10\c\server,\\192.168.1.10\d\server,
\\192.168.1.10\e\server" library=classa
```

In this scenario, the storage agent, STA1, replaces the directory name c:\server with the directory name \\192.168.1.10\c\server to access FILE volumes that are in the c:\server directory on the server.

## Results

File volume c:\server\file1.dsm is created by SERVER1. If you later change the first directory for the device class with the following command:

```
update devclass classa directory="c:\otherdir,d:\server,e:\server"
```

SERVER1 is still able to access file volume c:\server\file1.dsm, but the storage agent STA1 is not able to access it because a matching directory name in the PATH directory list no longer exists. If a directory name is not available in the directory list that is associated with the device class, the storage agent can lose access to a FILE volume in that directory. Although the volume is still accessible from the Tivoli Storage Manager server for reading, failure of the storage agent to access the FILE volume can cause operations to be retried on a LAN-only path or to fail.

## Controlling the size of FILE volumes

You can specify a maximum capacity value that controls the size of volumes (that is, files) associated with a FILE device class.

### About this task

To restrict the size of volumes, use the **MAXCAPACITY** parameter when you define a device class or update its definition. When the server detects that a volume reached a size equal to the maximum capacity, it treats the volume as full and stores any new data on a different volume.

## Controlling the number of concurrently open FILE volumes

You can restrict the number of mount points (volumes or files) that can be concurrently opened for access by server storage and retrieval operations with Tivoli Storage Manager. Attempts to access more volumes than the number indicated causes the requester to wait.

### About this task

When you select a mount limit for this device class, consider how many Tivoli Storage Manager processes you want to run at the same time.

Tivoli Storage Manager automatically cancels some processes to run other, higher priority processes. If the server is using all available mount points in a device class to complete higher priority processes, lower priority processes must wait until a mount point becomes available. For example, Tivoli Storage Manager cancels the process for a client backup if the mount point that is being used is needed for a server migration or reclamation process. Tivoli Storage Manager cancels a reclamation process if the mount point that is being used is needed for a client restore operation. For more information, see "Preempting operations" on page 605.

If processes are often canceled by other processes, consider whether you can make more mount points available for Tivoli Storage Manager use. Otherwise, review your scheduling of operations to reduce the contention for resources.

To specify the number of concurrently opened mount points, use the **MOUNTLIMIT** parameter when you define the device class or update its definition.

## Defining LTO device classes

Special consideration is required to prevent or minimize problems when mixing different generations of LTO drives and media in a single library. LTO drive encryption might also be a consideration.

### Mixing LTO drives and media in a library

When mixing different generations of LTO drives and media, you need to consider the read/write capabilities of each generation. As a best practice, configure a different device class for each generation of media.

#### About this task

If you are considering mixing different generations of LTO media and drives, be aware of the following restrictions:

*Table 17. Read - write capabilities for different generations of LTO drives*

| Drives       | Generation 1 media | Generation 2 media | Generation 3 media | Generation 4 media | Generation 5 media | Generation 6 media |
|--------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Generation 1 | Read and write     | n/a                | n/a                | n/a                | n/a                | n/a                |
| Generation 2 | Read and write     | Read and write     | n/a                | n/a                | n/a                | n/a                |
| Generation 3 | Read only          | Read and write     | Read and write     | n/a                | n/a                | n/a                |
| Generation 4 | n/a                | Read only          | Read and write     | Read and write     | n/a                | n/a                |
| Generation 5 | n/a                | n/a                | Read only          | Read and write     | Read and write     | n/a                |
| Generation 6 | n/a                | n/a                | n/a                | Read only          | Read and write     | Read and write     |

If you are mixing different types of drives and media, configure different device classes: one for each type of media. To specify the exact media type, use the **FORMAT** parameter in each of the device class definitions. (Do not specify **FORMAT=DRIVE**). For example, if you are mixing Ultrium Generation 1 and Ultrium Generation 2 drives, specify **FORMAT=ULTRIUMC** (or **ULTRIUM**) for the Ultrium Generation 1 device class, and **FORMAT=ULTRIUM2C** (or **ULTRIUM2**) for the Ultrium Generation 2 device class.

Both device classes can point to the same library in which there can be Ultrium Generation 1 and Ultrium Generation 2 drives. The drives are shared between the two storage pools. One storage pool uses the first device class and Ultrium Generation 1 media exclusively. The other storage pool uses the second device class and Ultrium Generation 2 media exclusively. Because the two storage pools share a single library, Ultrium Generation 1 media can be mounted on Ultrium Generation 2 drives as they become available during mount point processing.

**Remember:** If you are mixing older read-only media generations with newer read/write media in a single library, you must mark the read-only media as read-only and check out all read-only scratch media. For example, if you are

| mixing Ultrium Generation 4 with Ultrium Generation 6 drives and media in a  
| single library, you must mark the Generation 4 media as read-only, and all  
| Generation 4 scratch volumes must be checked out.

### Mount limits in LTO mixed-media environments

In a mixed-media library, in which multiple device classes point to the same library, compatible drives are shared between storage pools. You must pay special attention to setting an appropriate value for the **MOUNTLIMIT** parameter in each of the device classes. In a mixed media library that contains Ultrium Generation 1 and Ultrium Generation 2 drives and media, for example, Ultrium Generation 1 media can get mounted in Ultrium Generation 2 drives.

Consider the example of a mixed library that consists of the following drives and media:

- Four LTO Ultrium Generation 1 drives and LTO Ultrium Generation 1 media
- Four LTO Ultrium Generation 2 drives and LTO Ultrium Generation 2 media

You created the following device classes:

- LTO Ultrium Generation 1 device class LTO1CLASS specifying **FORMAT=ULTRIUMC**
- LTO Ultrium Generation 2 device class LTO2CLASS specifying **FORMAT=ULTRIUM2C**

You also created the following storage pools:

- LTO Ultrium Generation 1 storage pool LTO1POOL based on device class LTO1CLASS
- LTO Ultrium Generation 2 storage pool LTO2POOL based on device class LTO2CLASS

The number of mount points available for use by each storage pool is specified in the device class using the **MOUNTLIMIT** parameter. The **MOUNTLIMIT** parameter in the LTO2CLASS device class must be set to 4 to match the number of available drives that can mount only LTO2 media. The **MOUNTLIMIT** parameter in the LTO1CLASS device class must be set to a value higher (5 or possibly 6) than the number of available drives to adjust for the fact that Ultrium Generation 1 media can be mounted in Ultrium Generation 2 drives. The optimum value for **MOUNTLIMIT** depends on workload and storage pool access patterns.

Monitor and adjust the **MOUNTLIMIT** setting to suit changing workloads. If the **MOUNTLIMIT** for LTO1POOL is set too high, mount requests for the LTO2POOL might be delayed or fail because the Ultrium Generation 2 drives are used to satisfy Ultrium Generation 1 mount requests. In the worst scenario, too much competition for Ultrium Generation 2 drives might cause mounts for Generation 2 media to fail with the following message:

ANR8447E No drives are currently available in the library.

If the **MOUNTLIMIT** for LTO1POOL is not set high enough, mount requests that might potentially be satisfied LTO Ultrium Generation 2 drives are delayed.

Some restrictions apply when you mix Ultrium Generation 1 with Ultrium Generation 2 or Generation 3 drives because of how mount points are allocated. For example, processes that require multiple mount points that include both Ultrium Generation 1 and Ultrium Generation 2 volumes might try to reserve Ultrium Generation 2 drives only, even when one mount can be satisfied by an available Ultrium Generation 1 drive. Processes that behave in this manner include the **MOVE DATA** and **BACKUP STGPPOOL** commands. These processes wait until the

needed number of mount points can be satisfied with Ultrium Generation 2 drives.

## Encrypting data using LTO generation 4 tape drives

Tivoli Storage Manager supports the three types of drive encryption available with LTO generation 4 drives: Application, System, and Library. These methods are defined through the hardware.

### About this task

For more information about using drive encryption, refer to “Encrypting data on tape” on page 526.

#### Enabling LTO drive encryption:

The **DRIVEENCRYPTION** parameter specifies whether drive encryption is enabled or can be enabled for IBM and HP LTO generation 4, Ultrium4, and Ultrium4C formats. This parameter ensures Tivoli Storage Manager compatibility with hardware encryption settings for empty volumes.

### About this task

Tivoli Storage Manager supports the Application method of encryption with IBM and HP LTO-4 drives. Only IBM LTO-4 supports the System and Library methods. The Library method of encryption is supported only if your system hardware (for example, IBM 3584) supports it.

**Remember:** You cannot use drive encryption with write-once, read-many (WORM) media.

The Application method is defined through the hardware. To use the Application method, in which Tivoli Storage Manager generates and manages encryption keys, set the **DRIVEENCRYPTION** parameter to ON. This permits the encryption of data for empty volumes. If the parameter is set to ON and the hardware is configured for another encryption method, backup operations fail.

The following simplified example shows the steps that you would take to permit the encryption of data for empty volumes in a storage pool:

#### Procedure

1. Define a library:  
`define library 3584 libtype=SCSI`
2. Define a device class, LTO\_ENCRYPT, and specify Tivoli Storage Manager as the key manager:  
`define devclass lto_encrypt library=3584 devtype=lto driveencryption=on`
3. Define a storage pool:  
`define stgpool lto_encrypt_pool lto_encrypt`



### Disabling LTO drive encryption:

To disable encryption on new volumes, set the **DRIVEENCRYPTION** parameter to OFF. The default value is ALLOW. Drive encryption for empty volumes is permitted if another method of encryption is enabled.

## Defining SERVER device classes

With SERVER device classes, you can create volumes for one Tivoli Storage Manager server that exist as archived files in the storage hierarchy of another server, called a target server. These virtual volumes have the characteristics of sequential-access volumes such as tape.

### About this task

To define a SERVER device class, use the **DEFINE DEVCLASS** command with the **DEVTYPE=SERVER** parameter. For information about how to use a SERVER device class, see “Storing data on another server as virtual volumes” on page 726.

### Controlling the size of files created on a target server

You can specify a maximum capacity value that controls the size of files that are created on the target server to store data for the source server.

### About this task

To specify a file size, use the **MAXCAPACITY** parameter when you define the device class or update its definition.

The storage pool volumes of this device type are explicitly set to full when the volume is closed and dismounted.

### Controlling the number of simultaneous sessions between source and target servers

You can control the number of simultaneous sessions between the source server and the target server. Any attempts to access more sessions than indicated by the mount limit causes the requester to wait.

### About this task

To control the number of simultaneous sessions, use the **MOUNTLIMIT** parameter when you define the device class or update its definition.

When you specify a mount limit, consider your network load balancing and how many Tivoli Storage Manager processes you want to run at the same time.

Tivoli Storage Manager automatically cancels some processes to run other, higher priority processes. If the server is using all available sessions in a device class to complete higher priority processes, lower priority processes must wait until a session becomes available. For example, Tivoli Storage Manager cancels the process for a client backup if a session is needed for a server migration or reclamation process. Tivoli Storage Manager cancels a reclamation process if the session that is being used is needed for a client restore operation.

When you specify a mount limit, also consider the resources available on the target server when you set mount limits. Do not set a high mount limit value if the target cannot move enough data or access enough data to satisfy all of the requests.



If processes are often canceled by other processes, consider whether you can make more sessions available for Tivoli Storage Manager use. Otherwise, review your scheduling of operations to reduce the contention for network resources.

### Controlling the amount of time a SERVER volume remains mounted

You can improve response time for SERVER media mounts by leaving previously mounted volumes online.

#### About this task

To specify the number of minutes to retain an idle sequential access volume before it is dismounted, use the **MOUNTRETENTION** parameter when you define the device class or update its definition.

A value of 1 to 5 minutes is optimal.

## Defining device classes for StorageTek VolSafe devices

StorageTek VolSafe brand Ultrium drives use media that cannot be overwritten. Do not use this type of media for short-term backups of client files, the server database, or export tapes.

#### About this task

There are two methods for using VolSafe media and drives: This technology uses media that cannot be overwritten; therefore, do not use this type of media for short-term backups of client files, the server database, or export tapes.

- Define a device class by using the **DEFINE DEVCLASS** command and specify **DEVTYPE=VOLSAFE**. You can use this device class with EXTERNAL, SCSI, and ACSLS libraries. All drives in a library must be enabled for VolSafe use.
- Define a device class by using the **DEFINE DEVCLASS** command, and specify **DEVTYPE=ECARTRIDGE** and **WORM=YES**. For VolSafe devices, **WORM=YES** is required and must be specified when the device class is defined. You cannot update the **WORM** parameter by using the **UPDATE DEVCLASS** command. You cannot specify **DRIVEENCRYPTION=ON** if your drives are using WORM media.

To enable the VolSafe function, consult your StorageTek hardware documentation. Attempting to write to VolSafe media without a VolSafe-enabled drive results in errors.

To configure a VolSafe device in a SCSI library by using the **DEVTYPE=ECARTRIDGE** parameter, enter the following series of commands. (The values you select for the library variable, the drive variable, and so on might be different for your environment.)

#### Procedure

1. Define a library:  
`define library volsafelib libtype=scsi`
2. Define a drive:  
`define drive volsafelib drive01`
3. Define a path:  
`define path server01 drive01 srctype=server destype=drive device=mt4.0.0.1  
library=volsafelib`
4. Define a device class:

```
define devclass volsafeclass library=volsafelib devtype=ecartridge
format=drive worm=yes
```

## Results

For more information about VolSafe media, see “Write-once, read-many tape media” on page 147.

## Enabling ECARTRIDGE drive encryption

The **DRIVEENCRYPTION** parameter specifies whether drive encryption is enabled or can be enabled for DRIVE, T10000B, T10000B-C, T10000C, T10000C-C, T10000D, and T10000D-C formats. This parameter ensures Tivoli Storage Manager compatibility with hardware encryption settings for empty volumes.

### About this task

Tivoli Storage Manager supports the Application method of encryption with Oracle StorageTek T10000B, T10000C, or T10000D drives. The Library method of encryption is supported only if your system hardware supports it.

**Remember:** You cannot use drive encryption with write-once, read-many (WORM) media or VolSafe media.

The Application method, in which Tivoli Storage Manager generates and manages encryption keys, is defined through the hardware. To use the Application method, set the **DRIVEENCRYPTION** parameter to ON. This setting allows the encryption of data for empty volumes. If the parameter is set to ON and the hardware is configured for another encryption method, backup operations fail.

The following simplified example shows the steps that you would take to allow data encryption for empty volumes in a storage pool:

### Procedure

1. Define a library:

```
define library sl3000 libtype=scsi
```
2. Define a device class, ECART\_ENCRYPT, and specify Tivoli Storage Manager as the key manager:

```
define devclass ecart_encrypt library=sl3000
devtype=ecartridge driveencryption=on
```
3. Define a storage pool:

```
define stgpool ecart_encrypt_pool ecart_encrypt
```

### Related concepts:

“Choosing an encryption method” on page 527

## Disabling ECARTRIDGE drive encryption

To disable encryption on new volumes, set the **DRIVEENCRYPTION** parameter to OFF. The default value is ALLOW. You can use drive encryption for empty volumes if another method of encryption is enabled.

## Defining device classes for CENTERA devices

To use a Centera device, you must define a device class whose device type is CENTERA.

### Concurrent access to CENTERA volumes

Concurrent access improves performance while restoring or retrieving data because two or more clients can access the same volume at the same time.

Multiple client retrieve sessions, restore sessions, or server processes can read a volume concurrently in a storage pool that is associated with the CENTERA device type. In addition, one client session or one server process can write to the volume while it is being read.

The following server processes can share read access to CENTERA volumes:

- **EXPORT NODE**
- **EXPORT SERVER**
- **GENERATE BACKUPSET**

The following server processes cannot share read access to CENTERA volumes:

- **AUDIT VOLUME**
- **DELETE VOLUME**

### Server operations not supported by Centera

Centera storage devices do not support some Tivoli Storage Manager server operations.

The following server operations are not supported:

- Data-movement operations:
  - Moving node data into or out of a Centera storage pool.
  - Migrating data into or out of a Centera storage pool.
  - Reclaiming a Centera storage pool.
  - LAN-free data movement or Network Data Management Protocol (NDMP) operations. Centera storage pools cannot be the target or source of data for either of these operations.
- Backup operations:
  - Backing up a Centera storage pool.
  - Using a Centera device class to back up a database.
  - Backing up a storage pool to a Centera storage pool.
- Restore operations:
  - Restoring data from a copy storage pool or an active-data pool to a Centera storage pool.
  - Restoring volumes in a Centera storage pool.
- Other:
  - Exporting data to a Centera device class or importing data from a Centera device class. However, files stored in Centera storage pools can be exported and files being imported can be stored on Centera.

- If retention protection is not enabled, the server does not send a retention value to an EMC Centera storage device when storing objects during archive, import, and other operations. If this is the case, you can use a Centera storage device as a standard device from which archive and backup files can be deleted.
- Using a Centera device class for creating backup sets; however, files stored in Centera storage pools can be sent to backup sets.
- Defining Centera volumes.
- Using a Centera device class as the target of volume history, device configuration, trace logs, error logs, or query output files.
- Using a Centera device class as the target for a virtual volume operation.
- Data deduplication.
- Copying active versions of backup data either to or from a Centera storage pool.

## Controlling the number of concurrently open mount points for Centera devices

You can control the number of mount points that can be opened concurrently for access by server storage and retrieval operations. Any attempts to access more mount points than indicated by the mount limit causes the requester to wait.

### About this task

When you select a mount limit for this device class, consider how many Tivoli Storage Manager processes you want to run at the same time.

Tivoli Storage Manager automatically cancels some processes to run other, higher priority processes. If the server is using all available mount points in a device class to complete higher priority processes, lower priority processes must wait until a mount point becomes available. For example, the Tivoli Storage Manager server is currently performing a client backup request to an output volume and another request from another client to restore data from the same volume. The backup request is preempted and the volume is released for use by the restore request. For more information, see “Preempting operations” on page 605.

To control the number of mount points concurrently open for Centera devices, use the **MOUNTLIMIT** parameter when you define the device class or update its definition.

## Obtaining information about device classes

You can choose to view a standard or detailed report for a device class.

### About this task

| Task                                     | Required Privilege Class |
|------------------------------------------|--------------------------|
| Request information about device classes | Any administrator        |

To display a standard report on device classes, enter:  
query devclass

Figure 16 on page 216 provides an example of command output.

| Device Class Name | Device Access Strategy | Storage Pool Count | Device Type | Format  | Est/Max Capacity (MB) | Mount Limit |
|-------------------|------------------------|--------------------|-------------|---------|-----------------------|-------------|
| DISK              | Random                 | 9                  |             |         |                       |             |
| TAPE8MM           | Sequential             | 1                  | 8MM         | 8200    |                       | 2           |
| FILE              | Sequential             | 1                  | FILE        | DRIVE   | 5,000.0               | 1           |
| GEN1              | Sequential             | 2                  | LTO         | ULTRIUM |                       | DRIVES      |

Figure 16. Example of a standard device class report

To display a detailed report on the GEN1 device class, enter:

```
query devclass gen1 format=detailed
```

Figure 17 provides an example of command output.

```

Device Class Name: GEN1
Device Access Strategy: Sequential
Storage Pool Count: 2
Device Type: LTO
Format: ULTRIUM
Est/Max Capacity (MB):
Mount Limit: DRIVES
Mount Wait (min): 60
Mount Retention (min): 60
Label Prefix: ADSM
Drive Letter:
Library: GEN2LIB
Directory:
Server Name:
Retry Period:
Retry Interval:
TwoSided:
Shared:
High-level Address:
Minimum Capacity:
WORM:
Scaled Capacity:
Last Update by (administrator): ADMIN
Last Update Date/Time: 01/23/03 12:25:31

```

Figure 17. Example of a detailed device class report

## How Tivoli Storage Manager fills volumes

The **DEFINE DEVCLASS** command has an optional **ESTCAPACITY** parameter that indicates the estimated capacity for sequential volumes that are associated with the device class. Tivoli Storage Manager uses the estimated capacity of volumes to determine the estimated capacity of a storage pool, and the estimated percent utilized.

If the **ESTCAPACITY** parameter is not specified, Tivoli Storage Manager uses a default value that is based on the recording format that is specified for the device class (**FORMAT=**).

If you specify an estimated capacity that exceeds the actual capacity of the volume in the device class, Tivoli Storage Manager updates the estimated capacity of the volume when the volume becomes full. When Tivoli Storage Manager reaches the end of the volume, it updates the capacity for the amount that is written to the volume.

You can either accept the default estimated capacity for the device class, or explicitly specify an estimated capacity. An accurate estimated capacity value is not

required, but is useful. Tivoli Storage Manager uses the estimated capacity of volumes to determine the estimated capacity of a storage pool, and the estimated percent utilized. You might want to change the estimated capacity if:

- The default estimated capacity is inaccurate because data compression is being performed by the drives.
- You have volumes of nonstandard size.

## Data compression

Client files can be compressed to decrease the amount of data that is sent over networks and the space that is occupied by the data in Tivoli Storage Manager storage. With Tivoli Storage Manager, files can be compressed by the Tivoli Storage Manager client before the data is sent to the Tivoli Storage Manager server, or by the device where the file is finally stored.

Use either client compression or device compression, but not both. The following table summarizes the advantages and disadvantages of each type of compression.

| Type of Compression                       | Advantages                                                                                        | Disadvantages                                                                                                            |
|-------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Tivoli Storage Manager client compression | Reduced load on the network                                                                       | Higher processor usage by the client<br><br>Longer elapsed time for client operations such as backup                     |
| Drive compression                         | Amount of compression can be better than Tivoli Storage Manager client compression on some drives | Using drive compression on files that are already compressed by the Tivoli Storage Manager client can increase file size |

Either type of compression can affect tape drive performance because compression affects data rate. When the rate of data that is going to a tape drive is slower than the drive can write, the drive starts and stops while data is written, meaning relatively poorer performance. When the rate of data is fast enough, the tape drive can reach streaming mode, meaning better performance. If tape drive performance is more important than the space savings that compression can mean, you might want to complete timed test backups by using different approaches to determine what is best for your system.

Drive compression is specified with the **FORMAT** parameter for the drive's device class, and the hardware device must be able to support the compression format. For information about how to set up compression on the client, see "Node compression considerations" on page 436 and "Registering nodes with the server" on page 434.

## Tape volume capacity and data compression

How Tivoli Storage Manager views the capacity of the volume where the data is stored depends on whether files are compressed by the Tivoli Storage Manager client or by the storage device.

It can wrongly appear that you are not getting the full use of the capacity of your tapes, for the following reasons:

- A tape device manufacturer often reports the capacity of a tape that is based on an assumption of compression by the device. If a client compresses a file before it is sent, the device might not be able to compress it any further before storing it.

- Tivoli Storage Manager records the size of a file as it goes to a storage pool. If the client compresses the file, Tivoli Storage Manager records this smaller size in the database. If the drive compresses the file, Tivoli Storage Manager is not aware of this compression.

Figure 18 compares what Tivoli Storage Manager sees as the amount of data that is stored on tape when compression is done by the device and by the client. For this example, the tape has a physical capacity of 1.2 GB. However, the manufacturer reports the capacity of the tape as 2.4 GB by assuming the device compresses the data by a factor of two.

Suppose a client backs up a 2.4 GB file:

- When the client does not compress the file, the server records the file size as 2.4 GB, the file is compressed by the drive to 1.2 GB, and the file fills up one tape.
- When the client compresses the file, the server records the file size as 1.2 GB, the file cannot be compressed any further by the drive, and the file still fills one tape.

In both cases, Tivoli Storage Manager considers the volume to be full. However, Tivoli Storage Manager considers the capacity of the volume in the two cases to be different: 2.4 GB when the drive compresses the file, and 1.2 GB when the client compresses the file. Use the **QUERY VOLUME** command to see the capacity of volumes from Tivoli Storage Manager's viewpoint. See “Monitoring the use of storage pool volumes” on page 397.

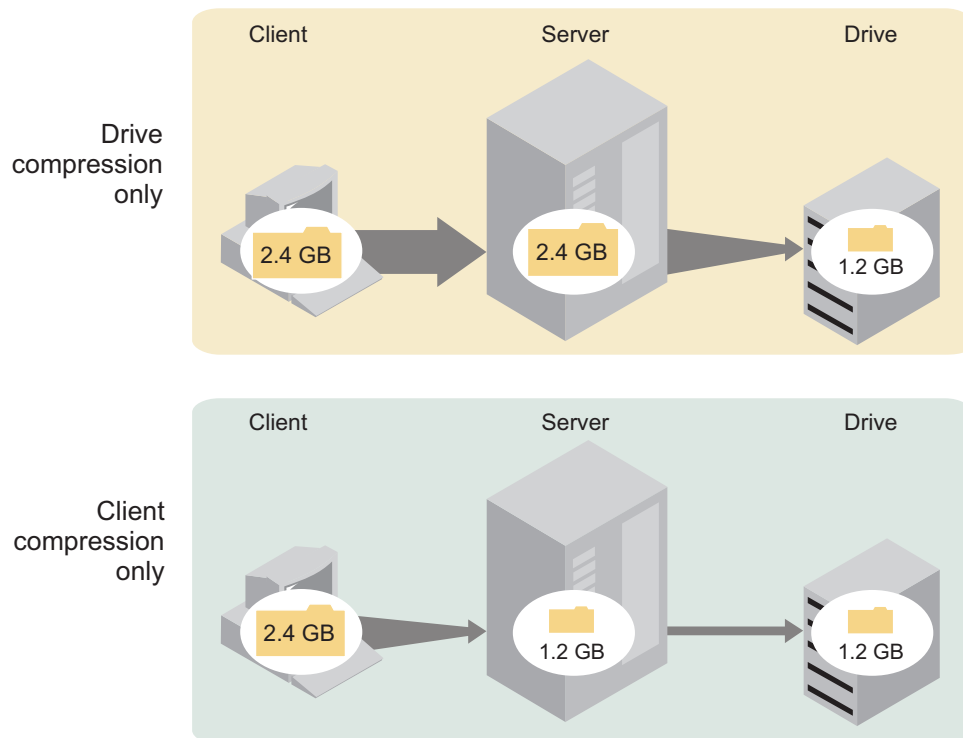


Figure 18. Comparing compression at the client and compression at the device

For how to set up compression on the client, see “Node compression considerations” on page 436 and “Registering nodes with the server” on page 434.

---

## Chapter 9. Using NDMP for operations with NAS file servers

You can plan, configure, and manage a backup environment that protects your network-attached storage (NAS) file server by using NDMP (network data management protocol). Tivoli Storage Manager Extended Edition includes support for the use of NDMP to back up and recover NAS file servers.

|                                                                                    |
|------------------------------------------------------------------------------------|
| <b>Tasks:</b>                                                                      |
| "Configuring Tivoli Storage Manager for NDMP operations" on page 227               |
| "Determining the location of NAS backup" on page 229                               |
| "Configuring a tape library for NDMP operations" on page 233                       |
| "Configuring Tivoli Storage Manager policy for NDMP operations" on page 228        |
| "Registering NAS nodes with the Tivoli Storage Manager server" on page 239         |
| "Defining a data mover for a NAS file server" on page 240                          |
| "Defining paths to libraries for NDMP operations" on page 244                      |
| "Defining paths to libraries for NDMP operations" on page 244                      |
| "Defining paths for NDMP operations" on page 240                                   |
| "Labeling and checking tapes into the library" on page 244                         |
| "Scheduling NDMP operations" on page 245                                           |
| "Defining virtual file spaces" on page 245                                         |
| "Tape-to-tape copy to back up data" on page 245                                    |
| "Tape-to-tape copy to move data" on page 246                                       |
| "Backing up and restoring NAS file servers using NDMP" on page 246                 |
| "Backing up NDMP file server to Tivoli Storage Manager server backups" on page 248 |
| "Managing tables of contents" on page 225                                          |
| "NDMP operations management" on page 223                                           |
| "Managing NAS file server nodes" on page 223                                       |
| "Managing data movers used in NDMP operations" on page 224                         |
| "Storage pool management for NDMP operations" on page 225                          |

---

### NDMP requirements

You must meet certain requirements when you use NDMP (network data management protocol) for operations with network-attached storage (NAS) file servers.

#### Tivoli Storage Manager Extended Edition

Licensed program that includes support for the use of NDMP.

#### NAS File Server

A NAS file server. The operating system on the file server must be supported by Tivoli Storage Manager. See [http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli\\_Storage\\_Manager](http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager) for a list of NAS file servers that are certified through the "Ready for IBM Tivoli software."



**Note:** Vendors on the “Ready for IBM Tivoli software” list follow guidelines to implement NDMP as specified by Tivoli Storage Manager. If a file server is on the list, tests were run to ensure that it is compatible with Tivoli Storage Manager.

The combination of file server model and operating system must be supported by the NAS file server. For more specifics, consult the product information for the NAS file server.

### **Tape Libraries**

This requirement is only necessary for a backup to a locally attached NAS device. The Tivoli Storage Manager server supports three types of libraries for operations that use NDMP. The libraries that are supported are SCSI, ACSLS (automated cartridge system library software), and VTL (virtual tape library). 349X tape libraries can also be used with certain NAS file servers.

#### **SCSI library**

A SCSI library that is supported by the Tivoli Storage Manager server. This type of library can be attached directly either to the Tivoli Storage Manager server or to the NAS file server. When the library is attached directly to the Tivoli Storage Manager server, the Tivoli Storage Manager server controls the library operations by passing the SCSI commands directly to the library. When the library is attached directly to the NAS file server, the Tivoli Storage Manager server controls the library by passing SCSI commands to the library through the NAS file server.

#### **ACSLs library**

An ACSLS library can be directly connected only to the Tivoli Storage Manager server. The Tivoli Storage Manager server controls the library by passing the library request through TCP/IP to the library control server.

**Note:** The Tivoli Storage Manager server does not include External Library support for the ACSLS library when the library is used for NDMP operations.

#### **VTL library**

A virtual tape library that is supported by the Tivoli Storage Manager server. This type of library can be attached directly either to the Tivoli Storage Manager server or to the NAS file server. A virtual tape library is essentially the same as a SCSI library but is enhanced for virtual tape library characteristics and allows for better mount performance.

**Note:** If you are defining a VTL library, your environment must not include any mixed-media. Paths must be defined between all drives in the library and all defined servers, including storage agents, that use the library. If either of these characteristics are not true, the overall performance can degrade to the same levels as the SCSI library type; especially during times of high stress.

#### **349X library**

A 349X library can be directly connected only to the Tivoli Storage Manager server. The Tivoli Storage Manager server controls the library by passing the library request through TCP/IP to the library manager.

**Library Sharing:** The Tivoli Storage Manager server that runs NDMP operations can be a library manager for either an ACSLS, SCSI, VTL, or 349X library, but cannot be a library client. The Tivoli Storage Manager server can also be a library client, in a configuration where the NAS filer sends data to a Tivoli Storage Manager server using TCP/IP rather than to a tape library attached to the NAS filer. If the Tivoli Storage Manager server that runs NDMP operations is a library manager, that server must control the library directly and not by passing commands through the NAS file server.

### Tape Drives

One or more tape drives in the tape library. A tape drive is only necessary for backup to a locally attached NAS device. The NAS file server must be able to access the drives. A NAS device is not supported in a mixed device library. The drives must be supported for tape backup operations by the NAS file server and its operating system. For complete NDMP device support, refer to the NAS file server product documentation.

**Drive Sharing:** The tape drives can be shared by the Tivoli Storage Manager server and one or more NAS file servers. Also, when a SCSI, VTL, or a 349X library is connected to the Tivoli Storage Manager server and not to the NAS file server, the drives can be shared by one or more NAS file servers and one or more Tivoli Storage Manager:

- Library clients
- Storage agents

**Drive Reservations:** When tape drives are attached to NAS devices and the **RESETDRIVES=YES** parameter on the **DEFINE LIBRARY** command is specified, the following limitations apply:

- If a tape drive is shared by a Tivoli Storage Manager server and a NAS device, drive reservation preemption is supported when the NAS device supports persistent reserve and it is enabled. For more information about setting persistent reserve, see the documentation for your NAS device.
- If a tape drive is attached only to a NAS device and not shared with a Tivoli Storage Manager server, drive reservation preemption is not supported. If you enable persistent reserve on the NAS device for these drives and a reservation is set by the NAS device but never cleared, you must use another method to clear the reservation.

Verify the compatibility of specific combinations of a NAS file server, tape devices, and SAN-attached devices with the hardware manufacturers.

**Attention:** Tivoli Storage Manager supports NDMP Version 4 for all NDMP operations. Tivoli Storage Manager continues to support all NDMP backup and restore operations with a NAS device that runs NDMP version 3. The Tivoli Storage Manager server negotiates the highest protocol level (either Version 3 or Version 4) with the NDMP server when it establishes an NDMP connection. If you experience any issues with Version 4, you might want to try Version 3.

## Interfaces for NDMP operations

You can use several interfaces to perform NDMP (network data management protocol) operations. You can schedule an NDMP operation using the **BACKUP NODE** and **RESTORE NODE** commands, and scheduling the operation as an administrative schedule.

### Client Interfaces:

- Backup-archive command-line client (on a Windows, 64 bit AIX, or 64 bit Oracle Solaris system)
- web client

### Server Interfaces:

- Server console
- Command line on the administrative client

**Tip:** All examples in this chapter use server commands.

The Tivoli Storage Manager web client interface, available with the backup-archive client, displays the file systems of the network-attached storage (NAS) file server in a graphical view. The client function is not required, but you can use the client interfaces for NDMP operations. The client function is recommended for file-level restore operations. See “File-level backup and restore for NDMP operations” on page 249 for more information about file-level restore.

Tivoli Storage Manager prompts you for an administrator ID and password when you perform NDMP functions using either of the client interfaces. See the *Backup-Archive Clients Installation and User's Guide* for more information about installing and activating client interfaces.

**Attention:** In order to use the Tivoli Storage Manager backup-archive client or web client to perform NAS operations, the file system names on the NAS device must have a forward slash (“/”) as the first character. This restriction does not affect NAS operations initiated from the Tivoli Storage Manager server command line.

## Data formats for NDMP backup operations

During filer-to-filer backup operations, that use NDMP (network data management protocol) and are not stored in the Tivoli Storage Manager server storage hierarchy, the network-attached storage (NAS) file server controls the format of the data written to the tape library.

The NDMP format is not the same as the data format used for traditional Tivoli Storage Manager backups. When you define a NAS file server as a data mover and define a storage pool for NDMP operations, you specify the data format. For example, you would specify **NETAPPDUMP** if the NAS file server is a NetApp or an IBM System Storage N Series device. You would specify **CELERRADUMP** if the NAS file server is an EMC Celerra device. For all other devices, you would specify **NDMPDUMP**.

---

## NDMP operations management

There are several administrator activities for NDMP operations.

These include:

- NAS nodes
- Data movers
- Tape libraries and drives
- Paths
- Device classes
- Storage pools
- Table of contents

### Managing NAS file server nodes

You can update, query, rename, and remove NAS (network attached storage) nodes.

#### About this task

For example, assume you have created a new policy domain named NASDOMAIN for NAS nodes and you want to update a NAS node named NASNODE1 to include it in the new domain.

#### Procedure

1. Query the node.  
`query node nasnode1 type=nas`
2. Change the domain of the node by issuing the following command:  
`update node nasnode1 domain=nasdomain`

#### Renaming a NAS node

To rename a NAS (network-attached storage) node, you must also rename the corresponding NAS data mover; both must have the same name.

#### Procedure

For example, to rename NASNODE1 to NAS1 you must complete the following steps:

1. Delete all paths between data mover NASNODE1 and libraries and between data mover NASNODE1 and drives.
2. Delete the data mover that is defined for the NAS node.
3. To rename NASNODE1 to NAS1, issue the following command:  
`rename node nasnode1 nas1`
4. Define the data mover by using the new node name. In this example, you must define a new data mover that is named NAS1 with the same parameters used to define NASNODE1.

**Attention:** When you define a new data mover for a node that you renamed, ensure that the data mover name matches the new node name. Also, ensure that the new data mover parameters are duplicates of the original data mover parameters. Any mismatch between a node name and a data mover name or between new data mover parameters and original data mover parameters can prevent you from establishing a session with the NAS file server.

5. For SCSI or 349X libraries, define a path between the NAS data mover and a library only if the tape library is physically connected directly to the NAS file server.
6. Define paths between the NAS data mover and any drives that are used for NDMP (network data management protocol) operations.

### Deleting a NAS node

To delete a NAS (network attached storage) node, first delete any file spaces for the node. Then delete any paths from the data mover before deleting the data mover.

#### Procedure

1. Delete any virtual file space definitions for the node.
2. Enter the following command:  

```
remove node nas1
```

## Managing data movers used in NDMP operations

You can update, query, and delete the data movers that you define for NAS (network attached storage) file servers.

### About this task

For example, if you shut down a NAS file server for maintenance, you might want to take the data mover offline.

#### Procedure

1. Query your data movers to identify the data mover for the NAS file server that you want to maintain.  

```
query datamover nasnode1
```
2. Issue the following command to make the data mover offline:  

```
update datamover nasnode1 online=no
```

To delete the data mover, you must first delete any path definitions in which the data mover has been used as the source.

3. Issue the following command to delete the data mover:  

```
delete datamover nasnode1
```

**Attention:** If the data mover has a path to the library, and you delete the data mover or make the data mover offline, you disable access to the library.

## Dedicating a Tivoli Storage Manager drive to NDMP operations

If you are already using a drive for Tivoli Storage Manager operations, you can dedicate that drive to NDMP (network data management protocol) operations.

#### Procedure

Remove Tivoli Storage Manager server access by deleting the path definition with the following command:

```
delete path server1 nasdrive1 srctype=server desttype=drive library=naslib
```

## Storage pool management for NDMP operations

When NETAPPDUMP, CELERRADUMP, or NDMPDUMP are designated as the type of storage pool, managing the storage pools produced by NDMP (network data management protocol) operations is different from managing storage pools containing media for traditional Tivoli Storage Manager backups.

You can query and update storage pools. You cannot update the **DATAFORMAT** parameter.

You cannot designate a CENTERA storage pool as a target pool of NDMP operations.

Maintaining separate storage pools for data from different NAS vendors is suggested even though the data format for both is NDMPDUMP.

The following **DEFINE STGPOOL** and **UPDATE STGPOOL** parameters are ignored because storage pool hierarchies, reclamation, and migration are not supported for these storage pools:

- MAXSIZE
- NEXTSTGPOOL
- LOWMIG
- HIGHMIG
- MIGDELAY
- MIGCONTINUE
- RECLAIMSTGPOOL
- OVFOLOCATION

**Attention:** Ensure that you do not accidentally use storage pools that were defined for NDMP operations in traditional Tivoli Storage Manager operations. Be especially careful when you assign the storage pool name as the value for the **DESTINATION** parameter of the **DEFINE COPYGROUP** command. Unless the destination is a storage pool with the appropriate data format, the backup fails.

## Managing tables of contents

You can use several commands to manage different aspects of your data contents.

### About this task

The **SET TOCLOADRETENTION** command can be used to specify the approximate number of minutes that an unreferenced table of contents (TOC) remains loaded in the Tivoli Storage Manager database. The Tivoli Storage Manager server-wide table of contents retention value will determine how long a loaded TOC is retained in the database after the latest access to information in the TOC.

Because TOC information is loaded into temporary database tables, this information is lost if the server is halted, even if the TOC retention period did not elapse. At installation, the retention time is set to 120 minutes. Use the **QUERY STATUS** command to see the TOC retention time.

Issue the **QUERY NASBACKUP** command to display information about the file system image objects that are backed up for a specific NAS (network-attached storage) node and file space. By issuing the command, you can see a display of all backup

images that are generated by NDMP (network data management protocol) and whether each image has a corresponding table of contents.

**Note:** The Tivoli Storage Manager server can store a full backup in excess of the number of versions you specified, if that full backup has dependent differential backups. Full NAS backups with dependent differential backups behave like other base files with dependent subfiles. Due to retention time specified in the **RETAIN EXTRA** setting, the full NAS backup is not expired, and the version is displayed in the output of a **QUERY NASBACKUP** command. See “File expiration and expiration processing” on page 486 for details.

Use the **QUERY TOC** command to display files and directories in a backup image that is generated by NDMP. By issuing the **QUERY TOC** server command, you can display all directories and files within a single specified TOC. The specified TOC is accessed in a storage pool each time the **QUERY TOC** command is issued because this command does not load TOC information into the Tivoli Storage Manager database. Then, use the **RESTORE NODE** command with the **FILELIST** parameter to restore individual files.

## Preventing long-running, inactive NDMP connections from closing

To prevent firewalls from closing network data-management protocol (NDMP) connections that are long-running but inactive, you can enable Transmission Control Protocol (TCP) keepalive on the NDMP control connections.

### About this task

The Tivoli Storage Manager server initiates control connections to network-attached storage (NAS) devices during NDMP backup or restore operations. These control connections might remain open and inactive for an extended amount of time. For example, suppose that two NDMP operations are started for the same NAS device. The control connection for one NDMP operation might remain open but inactive if the operation requires a resource, for example, a tape drive or sequential volume, that is being used by the other NDMP operation.

Some firewall software is configured to automatically close network connections that are inactive for a specified length of time. If a firewall exists between a Tivoli Storage Manager server and a NAS device, it is possible that the firewall can close NDMP control connections unexpectedly and cause the NDMP operation to fail.

The Tivoli Storage Manager server provides a mechanism, TCP keepalive, that you can enable to prevent long-running, inactive connections from being closed. If TCP keepalive is enabled, small packets are sent across the network at predefined intervals to the connection partner.

**Restriction:** To prevent errors, do not enable TCP keepalive in certain types of environments. One example is environments that do not have firewalls between the Tivoli Storage Manager server and a NAS device. Another example is environments with firewalls that tolerate long-running, inactive connections. Enabling TCP keepalive in these types of environments can cause an idle connection to be inadvertently closed if the connection partner temporarily fails to respond to TCP keepalive packets.



## Enabling TCP keepalive

To enable TCP keepalive, which keeps NDMP connections open, use the `NDMPENABLEKEEPALIVE` server option.

### Procedure

Add the option to the server options file `dsmserv.opt`:

```
ndmpenablekeepalive yes
```

## Specifying connection idle time for TCP keepalive

To specify the amount of connection idle time, in minutes, before the first TCP keepalive packet is sent, use the `NDMPKEEPIDLEMINUTES` server option.

### Procedure

Add the option to the server options file `dsmserv.opt`:

```
ndmpkeepidleminutes minutes
```

---

## Configuring Tivoli Storage Manager for NDMP operations

Before beginning the configuration of Tivoli Storage Manager for NDMP (network data management protocol) operations, ensure that you register the required license.

### Procedure

1. Set up the tape library and media. See “Configuring a tape library for NDMP operations” on page 233, where the following steps are described in more detail.
  - a. Attach the SCSI or virtual tape library (VTL) library to the NAS file server or to the Tivoli Storage Manager server, or attach the ACSLS library or 349X library to the Tivoli Storage Manager server.
  - b. Define the library with a library type of SCSI, VTL, ACSLS, or 349X.
  - c. Define a device class for the tape drives.
  - d. Define a storage pool for NAS backup media.
  - e. Define a storage pool for storing a table of contents. This step is optional.
2. Configure Tivoli Storage Manager policy for managing NAS image backups. See “Configuring Tivoli Storage Manager policy for NDMP operations” on page 228.
3. Register a NAS file server node with the Tivoli Storage Manager server. See “Registering NAS nodes with the Tivoli Storage Manager server” on page 239.
4. Define a data mover for the NAS file server. See “Defining a data mover for a NAS file server” on page 240.
5. Define a path from either the Tivoli Storage Manager server or the NAS file server to the library. See “Defining paths to libraries for NDMP operations” on page 244.
6. Define the tape drives to Tivoli Storage Manager, and define the paths to those drives from the NAS file server and optionally from the Tivoli Storage Manager server. See “Defining paths for NDMP operations” on page 240.
7. Check tapes into the library and label them. See “Labeling and checking tapes into the library” on page 244.
8. Set up scheduled backups for NAS file servers. This step is optional. See “Scheduling NDMP operations” on page 245.



9. Define a virtual file space name. This step is optional. See “Defining virtual file spaces” on page 245.
10. Configure for tape-to-tape copy to back up data. This step is optional. See “Tape-to-tape copy to back up data” on page 245.
11. Configure for tape-to-tape copy to move data to a different tape technology. This step is optional. See “Tape-to-tape copy to move data” on page 246.

## Configuring Tivoli Storage Manager policy for NDMP operations

With policy, you can manage the number and retention time of NDMP (network data management protocol) image backup versions.

### About this task

For more information, see “Configuring policy for NDMP operations” on page 510.

### Procedure

Complete the following steps to configure Tivoli Storage Manager policy for NDMP operations:

1. Create a policy domain for NAS (network-attached storage) file servers. For example, to define a policy domain that is named NASDOMAIN, enter the following command:  

```
define domain nasdomain description='Policy domain for NAS file servers'
```
2. Create a policy set in that domain. For example, to define a policy set named STANDARD in the policy domain that is named NASDOMAIN, issue the following command:  

```
define policyset nasdomain standard
```
3. Define a management class, and then assign the management class as the default for the policy set. For example, to define a management class that is named MC1 in the STANDARD policy set, and assign it as the default, issue the following commands:  

```
define mgmtclass nasdomain standard mc1
assign defmgmtclass nasdomain standard mc1
```
4. Define a backup copy group in the default management class. The destination must be the storage pool that you created for backup images that are produced by NDMP operations. In addition, you can specify the number of backup versions to retain. For example, to define a backup copy group for the MC1 management class where up to four versions of each file system are retained in the storage pool named NASPOOL, issue the following command:  

```
define copygroup nasdomain standard mc1 destination=naspool verexists=4
```

If you also chose the option to create a table of contents, TOCDESTINATION must be the storage pool that you created for the table of contents.

```
define copygroup nasdomain standard mc1 destination=naspool
tocdestination=tocpool verexists=4
```

**Attention:** When defining a copy group for a management class to which a file system image produced by NDMP is bound, be sure that the **DESTINATION** parameter specifies the name of a storage pool that is defined for NDMP operations. If the **DESTINATION** parameter specifies an invalid storage pool, backups by NDMP fail.

5. Activate the policy set. For example, to activate the STANDARD policy set in the NASDOMAIN policy domain, issue the following command:

```
activate policyset nasdomain standard
```

The policy is ready to be used. Nodes are associated with Tivoli Storage Manager policy when they are registered. For more information, see “Registering NAS nodes with the Tivoli Storage Manager server” on page 239.

## Policy for backups initiated with the client interface

When a client node initiates a backup, the policy is affected by the option file for that client node.

You can control the management classes that are applied to backup images produced by NDMP (network data management protocol) operations regardless of which node initiates the backup. You can do this by creating a set of options to be used by the client nodes. The option set can include an `include.fs.nas` statement to specify the management class for NAS (network attached storage) file server backups. See “Creating client option sets on the server” on page 473 for more information.

## Determining the location of NAS backup

When Tivoli Storage Manager uses NDMP (network data management protocol) to protect NAS (network attached storage) file servers, the Tivoli Storage Manager server controls operations while the NAS file server transfers the data, either to an attached library or directly to the Tivoli Storage Manager server.

You can also use a backup-archive client to back up a NAS file server by mounting the NAS file-server file system on the client machine (with either an NFS [network file system] mount or a CIFS [common internet file system] map) and then backing up as usual. Table 18 compares the three backup-and-restore methods.

**Note:** You can use a single method or a combination of methods in your individual storage environment.

Table 18. Comparing methods for backing up NDMP data

| Property                             | NDMP: Filer to server                                                                                                                                              | NDMP: Filer to attached library                                                                                                                                    | Backup-archive client to server                                                                                                          |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Network data traffic                 | All backup data goes across the LAN from the NAS file server to the server.                                                                                        | The server controls operations remotely, but the NAS device moves the data locally.                                                                                | All backup data goes across the LAN from the NAS device to the client and then to the server.                                            |
| File server processing during backup | Less file server processing is required, compared to the backup-archive client method, because the backup does not use file access protocols such as NFS and CIFS. | Less file server processing is required, compared to the backup-archive client method, because the backup does not use file access protocols such as NFS and CIFS. | More file server processing is required because file backups require additional overhead for file access protocols such as NFS and CIFS. |
| Distance between devices             | The Tivoli Storage Manager server must be within SCSI or Fibre Channel range of the tape library.                                                                  | The Tivoli Storage Manager server can be distant from the NAS file server and the tape library.                                                                    | The Tivoli Storage Manager server must be within SCSI or Fibre Channel range of the tape library.                                        |

Table 18. Comparing methods for backing up NDMP data (continued)

| Property                                                                                   | NDMP: Filer to server                                                                                                                                      | NDMP: Filer to attached library                                                                                              | Backup-archive client to server                                                               |
|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Firewall considerations                                                                    | More stringent than filer-to-attached- library because communications can be initiated by either the Tivoli Storage Manager server or the NAS file server. | Less stringent than filer-to-server because communications can be initiated only by the Tivoli Storage Manager server.       | Client passwords and data are encrypted.                                                      |
| Security considerations                                                                    | Data is sent unencrypted from NAS file server to the Tivoli Storage Manager server.                                                                        | Method must be used in a trusted environment because port numbers are not secure.                                            | Port number configuration allows for secure administrative sessions within a private network. |
| Load on the Tivoli Storage Manager server                                                  | Higher CPU workload is required to manage all back end data processes (for example, migration).                                                            | Lower CPU workload is required because migration and reclamation are not supported.                                          | Higher CPU workload is required to manage all back end data processes.                        |
| Backup of primary storage pools to copy storage pools                                      | Data can be backed up only to copy storage pools that have the NATIVE data format.                                                                         | Data can be backed up only to copy storage pools that have the same NDMP data format (NETAPPDUMP, CELERRADUMP, or NDMPDUMP). | Data can be backed up only to copy storage pools that have the NATIVE data format.            |
| Restore of primary storage pools and volumes from copy storage pools                       | Data can be restored only to storage pools and volumes that have the NATIVE data format.                                                                   | Data can be restored only to storage pools and volumes that have the same NDMP format.                                       | Data can be restored only to storage pools and volumes that have the NATIVE data format.      |
| Moving NDMP data from storage pool volumes                                                 | Data can be moved to another storage pool only if it has a NATIVE data format.                                                                             | Data can be moved to another storage pool only if it has the same NDMP data format.                                          | Data can be moved to another storage pool only if it has a NATIVE data format.                |
| Migration from one primary storage pool to another                                         | Supported                                                                                                                                                  | Not supported                                                                                                                | Supported                                                                                     |
| Reclamation of a storage pool                                                              | Supported                                                                                                                                                  | Not supported                                                                                                                | Supported                                                                                     |
| Simultaneous-write operations during backups                                               | Not supported                                                                                                                                              | Not supported                                                                                                                | Supported                                                                                     |
| Export and import operations                                                               | Not supported                                                                                                                                              | Not supported                                                                                                                | Supported                                                                                     |
| Backup set generation                                                                      | Not supported                                                                                                                                              | Not supported                                                                                                                | Supported                                                                                     |
| Cyclic Redundancy Checking (CRC) when data is moved using Tivoli Storage Manager processes | Supported                                                                                                                                                  | Not supported                                                                                                                | Supported                                                                                     |
| Validation using Tivoli Storage Manager audit commands                                     | Supported                                                                                                                                                  | Not supported                                                                                                                | Supported                                                                                     |
| Disaster recovery manager                                                                  | Supported                                                                                                                                                  | Supported                                                                                                                    | Supported                                                                                     |

## Tape libraries and drives for NDMP operations

Most of the planning required to implement backup and recovery operations that use NDMP (network data management protocol) is related to device configuration. You have choices about how to connect and use the libraries and drives.

Many of the configuration choices you have for libraries and drives are determined by the hardware features of your libraries. You can set up NDMP operations with any supported library and drives. However, the more features your library has, the more flexibility you can exercise in your implementation.

You might start by answering the following questions:

- What type of library (SCSI, ACSLS, or 349X) will you use?
- If you are using a SCSI library, do you want to attach tape library robotics to the Tivoli Storage Manager server or to the network-attached storage (NAS) file server?
- Will you want to move your NDMP data to tape?
- How do you want to use the tape drives in the library?
  - Dedicate all tape drives to NDMP operations.
  - Dedicate some tape drives to NDMP operations and others to traditional Tivoli Storage Manager operations.
  - Share tape drives between NDMP operations and traditional Tivoli Storage Manager operations.
- Will you back up data tape-to-tape for disaster recovery functions?
- Will you send backup data to a single Tivoli Storage Manager server instead of attaching a tape library to each NAS device?
- Do you want to keep all hardware on the Tivoli Storage Manager server and send NDMP data over the LAN?

### Determining library drive usage when backing up to NAS-attached libraries

Drives can be used for multiple purposes because of the flexible configurations allowed by Tivoli Storage Manager. For NDMP (network data management protocol) operations, the NAS (network attached storage) file server must have access to the drive. The Tivoli Storage Manager server can also have access to the same drive, depending on your hardware connections and limitations.

### About this task

All drives are defined to the Tivoli Storage Manager server. However, the same drive may be defined for both traditional Tivoli Storage Manager operations and NDMP operations. Figure 19 on page 232 illustrates one possible configuration. The Tivoli Storage Manager server has access to drives 2 and 3, and each NAS file server has access to drives 1 and 2.

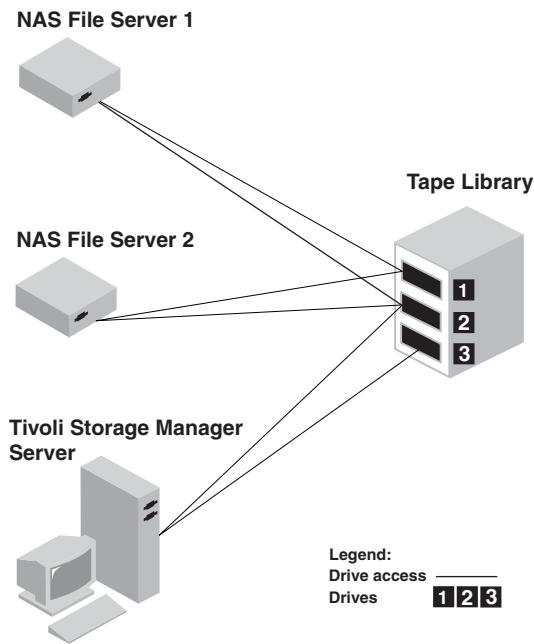


Figure 19. Tivoli Storage Manager drive usage example

To create the configuration shown in Figure 19, perform the following steps:

### Procedure

1. Define all three drives to Tivoli Storage Manager.
2. Define paths from the Tivoli Storage Manager server to drives 2 and 3. Because drive 1 is not accessed by the server, no path is defined.
3. Define each NAS file server as a separate data mover.
4. Define paths from each data mover to drive 1 and to drive 2.

### Results

To use the Tivoli Storage Manager back end data movement operations, the Tivoli Storage Manager server requires two available drive paths from a single NAS data mover. The drives can be in different libraries and can have different device types that are supported by NDMP. You can make copies between two different tape devices, for example, the source tape drive can be an DLT drive in a library and the target drive can be an LTO drive in another library.

During Tivoli Storage Manager back end data movements, the Tivoli Storage Manager server locates a NAS data mover that supports the same data format as the data to be copied from and that has two available mount points and paths to the drives. If the Tivoli Storage Manager server cannot locate such a data mover, the requested data movement operation is not performed. The number of available mount points and drives depends on the mount limits of the device classes for the storage pools involved in the back end data movements.

If the back end data movement function supports multiprocessing, each concurrent Tivoli Storage Manager back end data movement process requires two available mount points and two available drives. To run two Tivoli Storage Manager processes concurrently, at least four mount points and four drives must be available.

See “Defining paths for NDMP operations” on page 240 for more information.

## Configuring a tape library for NDMP operations

You can configure a tape library to back up a network-attached storage (NAS) device to tape.

### Procedure

Perform the following steps to set up tape libraries for NDMP operations:

1. Connect the library and drives to be used for NDMP operations.
  - a. Connect the SCSI library. Before you set up a SCSI tape library for NDMP operations, determine whether you want to attach your library robotics control to the Tivoli Storage Manager server or to the NAS file server. See “Tape libraries and drives for NDMP operations” on page 231. Connect the SCSI tape library robotics to the Tivoli Storage Manager server or to the NAS file server. Refer to your device manufacturer documentation for instructions.

If the library is connected to Tivoli Storage Manager, make a SCSI or Fibre Channel connection between the Tivoli Storage Manager server and the library robotics control port. Then, connect the NAS file server with the drives.

If the library is connected to NAS file server, make a SCSI or Fibre Channel connection between the NAS file server and the library robotics and drives.
  - b. Connect the ACSLS Library. Connect the ACSLS tape library to the Tivoli Storage Manager server.
  - c. Connect the 349X Library. Connect the 349X tape library to the Tivoli Storage Manager server.
2. Define the library for your library device by issuing the **DEFINE LIBRARY** command. The library must be a single device type, not a mixed device. Issue one of the following commands to define the library depending on the type of device that you are configuring:

#### SCSI Library

```
define library tsmlib libtype=scsi
```

#### ACSLs Library

```
define library acslib libtype=acsls acsid=1
```

#### 349X Library

```
define library tsmlib libtype=349x
```

3. Define a device class for your NDMP device by issuing the **DEFINE DEVCLASS** command.

**Tip:** A device class that is defined with a device type of NAS is not explicitly associated with a specific drive type, for example, LTO. However, as best practice, define a separate device class for different drive types.

In the **DEFINE DEVCLASS** command, use the following parameters and values:

- Specify **DEVTYPE=NAS**.
- Specify **MOUNTRETENTION=0**. It is required for NDMP operations.
- Specify a value for the **ESTCAPACITY** parameter.

For example, to define a device class that is named NASCLASS for a library named NASLIB with an estimated capacity is 40 GB for the media, issue the following command:

```
define devclass nasclass devtype=nas library=naslib mountretention=0
estcapacity=40g
```

4. Define a storage pool for NDMP media by issuing the **DEFINE STGPPOOL** command. When NETAPPDUMP, CELERRADUMP, or NDMPDUMP is designated as the type of storage pool, managing the storage pools that are produced by NDMP operations is different from managing storage pools that contain media for traditional Tivoli Storage Manager backups. Tivoli Storage Manager operations use storage pools that are defined with a NATIVE or NONBLOCK data format. If you select NETAPPDUMP, CELERRADUMP, or NDMPDUMP, NDMP operations require storage pools with a data format that matches the NAS file server and the selected backup method. Maintaining separate storage pools for data from different NAS vendors is optimal, even though the data format for both is NDMPDUMP. For example, to define a storage pool that is named NDMPPOOL for a file server, which is neither a NetApp or a Celerra file server, issue the following command:

```
define stgpool ndmpool nasclass maxscratch=10 dataformat=ndmpdump
```

To define a storage pool that is named NASPOOL for a NetApp file server, issue the following command:

```
define stgpool naspool nasclass maxscratch=10 dataformat=netappdump
```

To define a storage pool that is named CELERRAPOOL for an EMC Celerra file server, issue the following command:

```
define stgpool celerrapool nasclass maxscratch=10 dataformat=celerradump
```

**Attention:** Ensure that you do not accidentally use storage pools that are defined for NDMP operations in traditional Tivoli Storage Manager operations. Be especially careful when you assign the storage pool name as the value for the **DESTINATION** parameter of the **DEFINE COPYGROUP** command. Unless the destination is a storage pool with the appropriate data format, the backup can fail.

5. Optionally, define a storage pool for a table of contents. If you plan to create a table of contents, you must also define a disk storage pool in which to store the table of contents. You must set up policy so that the Tivoli Storage Manager server stores the table of contents in a different storage pool from the one where the backup image is stored. The table of contents is treated like any other object in that storage pool. For example, to define a storage pool that is named TOCPool for a DISK device class, issue the following command:

```
define stgpool tocpool disk
```

Then define volumes for the storage pool.

For more information about defining volumes, see “Configuring random access volumes on disk devices” on page 81.

## Attaching tape library robotics for NAS-attached libraries

If you have decided to back up your network-attached storage (NAS) data to a library directly attached to the NAS device and are using a SCSI tape library, one of the first steps in planning for NDMP (network data management protocol) operations is to determine where to attach it.

### About this task

You must determine whether to attach the library robotics to the Tivoli Storage Manager server or to the NAS file server. Regardless of where you connect library robotics, tape drives must always be connected to the NAS file server for NDMP operations.



Distance and your available hardware connections are factors to consider for SCSI libraries. If the library does not have separate ports for robotics control and drive access, the library must be attached to the NAS file server because the NAS file server must have access to the drives. If your SCSI library has separate ports for robotics control and drive access, you can choose to attach the library robotics to either the Tivoli Storage Manager server or the NAS file server. If the NAS file server is at a different location from the Tivoli Storage Manager server, the distance may mean that you must attach the library to the NAS file server.

Whether you are using a SCSI, ACSLS, or 349X library, you have the option of dedicating the library to NDMP operations, or of using the library for NDMP operations as well as most traditional Tivoli Storage Manager operations.

*Table 19. Summary of configurations for NDMP operations*

| Configuration                                                                    | Distance between Tivoli Storage Manager server and library | Library sharing | Drive sharing between Tivoli Storage Manager and NAS file server | Drive sharing between NAS file servers | Drive sharing between storage agent and NAS file server |
|----------------------------------------------------------------------------------|------------------------------------------------------------|-----------------|------------------------------------------------------------------|----------------------------------------|---------------------------------------------------------|
| Configuration 1<br>(SCSI library connected to the Tivoli Storage Manager server) | Limited by SCSI or FC connection                           | Supported       | Supported                                                        | Supported                              | Supported                                               |
| Configuration 2<br>(SCSI library connected to the NAS file server)               | No limitation                                              | Not supported   | Supported                                                        | Supported                              | Not supported                                           |
| Configuration 3<br>(349X library)                                                | May be limited by 349X connection                          | Supported       | Supported                                                        | Supported                              | Supported                                               |
| Configuration 4<br>(ACSLs library)                                               | May be limited by ACSLS connection                         | Supported       | Supported                                                        | Supported                              | Supported                                               |

### **Configuration 1: SCSI library connected to the Tivoli Storage Manager server**

In this configuration, the tape library must have separate ports for robotics control and for drive access. In addition, the library must be within Fibre-Channel range or SCSI bus range of both the Tivoli Storage Manager server and the network-attached storage (NAS) file server.

In this configuration, the Tivoli Storage Manager server controls the SCSI library through a direct, physical connection to the library robotics control port. For NDMP (network data management protocol) operations, the drives in the library are connected directly to the NAS file server, and a path must be defined from the NAS data mover to each of the drives to be used. The NAS file server transfers data to the tape drive at the request of the Tivoli Storage Manager server. To also use the drives for Tivoli Storage Manager operations, connect the Tivoli Storage Manager server to the tape drives and define paths from the Tivoli Storage Manager server to the tape drives. This configuration also supports a Tivoli Storage Manager storage agent having access to the drives for its LAN-free operations, and the Tivoli Storage Manager server can be a library manager.



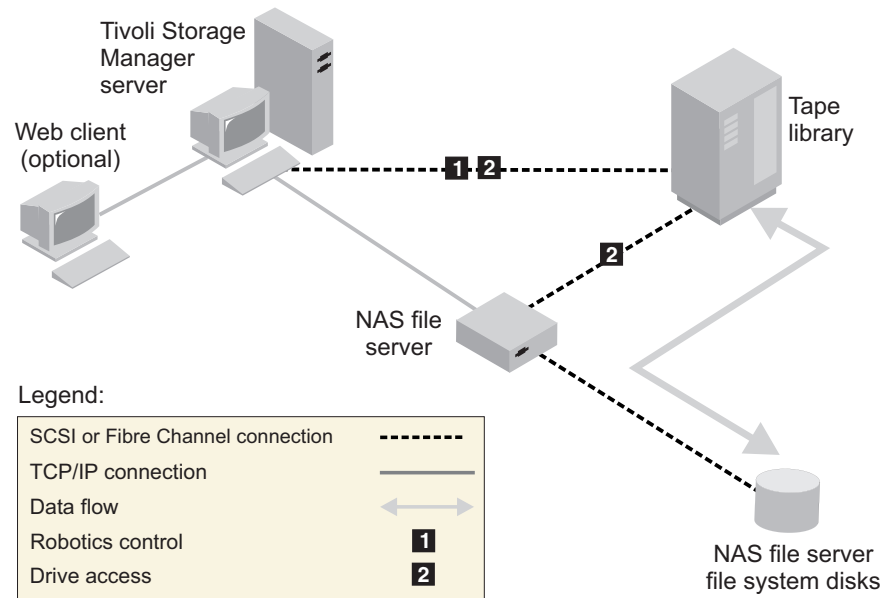


Figure 20. Configuration 1: SCSI library connected to Tivoli Storage Manager server

### Configuration 2: SCSI library connected to the NAS file server

In this configuration, the library robotics and the drives must be physically connected directly to the NAS (network attached storage) file server, and paths must be defined from the NAS data mover to the library and drives. No physical connection is required between the Tivoli Storage Manager server and the SCSI library.

The Tivoli Storage Manager server controls library robotics by sending library commands across the network to the NAS file server. The NAS file server passes the commands to the tape library. Any responses generated by the library are sent to the NAS file server, and passed back across the network to the Tivoli Storage Manager server. This configuration supports a physically distant Tivoli Storage Manager server and NAS file server. For example, the Tivoli Storage Manager server could be in one city, while the NAS file server and tape library are in another city.

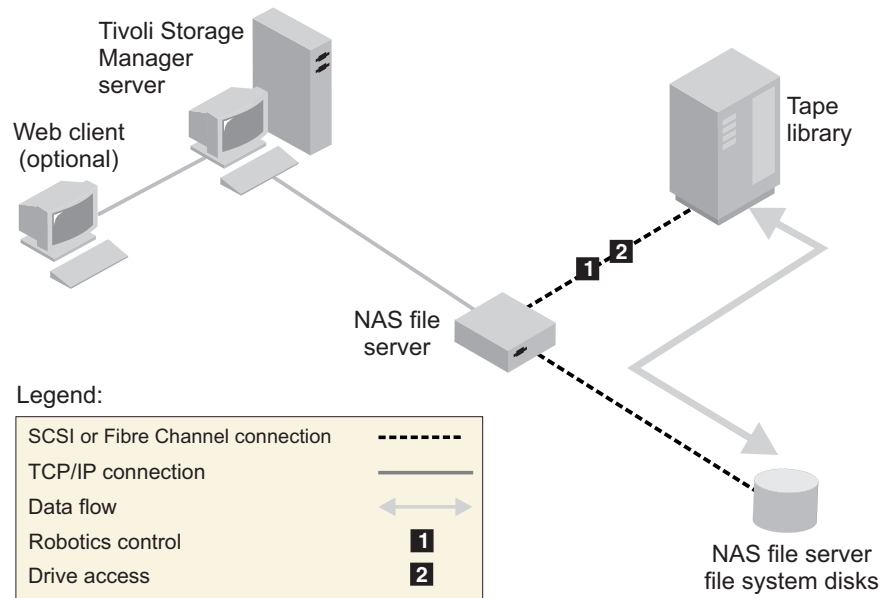


Figure 21. Configuration 2: SCSI library connected to the NAS file server

### Configuration 3: 349x library connected to the Tivoli Storage Manager server

For this configuration, you connect the tape library to the system as for traditional operations.

In this configuration, the 349X tape library is controlled by the Tivoli Storage Manager server. The Tivoli Storage Manager server controls the library by passing the request to the 349X library manager through TCP/IP.

In order to perform NAS (network attached storage) backup or restore operations, the NAS file server must be able to access one or more tape drives in the 349X library. Any tape drives used for NAS operations must be physically connected to the NAS file server, and paths need to be defined from the NAS data mover to the drives. The NAS file server transfers data to the tape drive at the request of the Tivoli Storage Manager server. Follow the manufacturer's instructions to attach the device to the server system.

This configuration supports a physically distant Tivoli Storage Manager server and NAS file server. For example, the Tivoli Storage Manager server could be in one city, while the NAS file server and tape library are in another city.

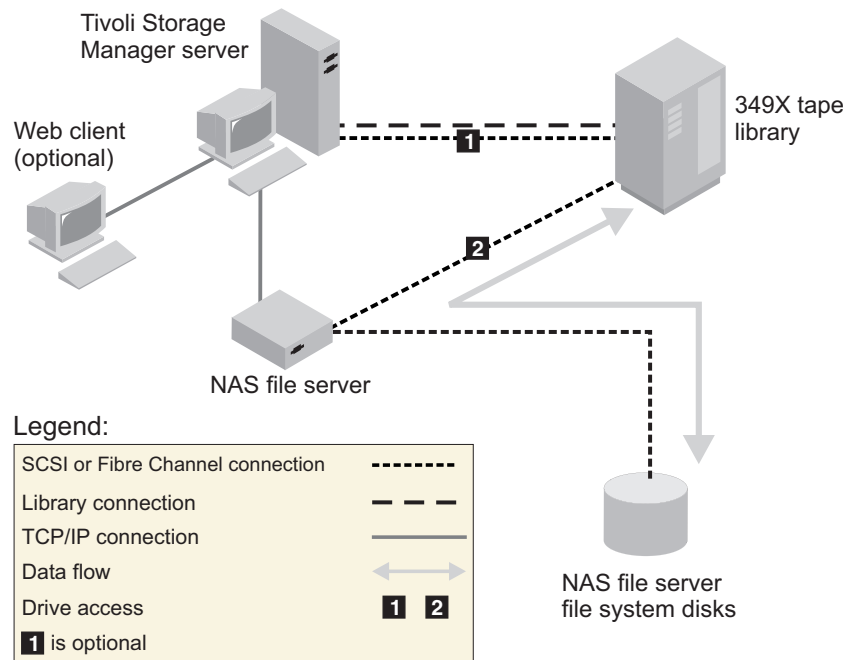


Figure 22. Configuration 3: 349x library connected to the Tivoli Storage Manager server

#### Configuration 4: ACSLS library connected to the Tivoli Storage Manager server

For this configuration, connect the tape library to the system as you do for traditional Tivoli Storage Manager operations.

The ACSLS (automated cartridge system library software) tape library is controlled by the Tivoli Storage Manager server. The Tivoli Storage Manager server controls the library by passing the request to the ACSLS library server through TCP/IP. The ACSLS library supports library sharing and LAN-free operations.

**Restriction:** In order to utilize ACSLS functions, StorageTek Library Attach software must be installed. See “ACSLs-managed libraries” on page 121 for more information.

In order to perform NAS (network attached storage) backup or restore operations, the NAS file server must be able to access one or more tape drives in the ACSLS library. Any tape drives used for NAS operations must be physically connected to the NAS file server, and any paths need to be defined from the NAS data mover to the drives. The NAS file server transfers data to the tape drive at the request of the Tivoli Storage Manager server. Follow the manufacturer's instructions to attach the device to the server system.

This configuration supports a physically distant Tivoli Storage Manager server and NAS file server. For example, the Tivoli Storage Manager server could be in one city while the NAS file server and tape library are in another city.

To also use the drives for Tivoli Storage Manager operations, connect the Tivoli Storage Manager server to the tape drives and define paths from the Tivoli Storage Manager server to the tape drives.

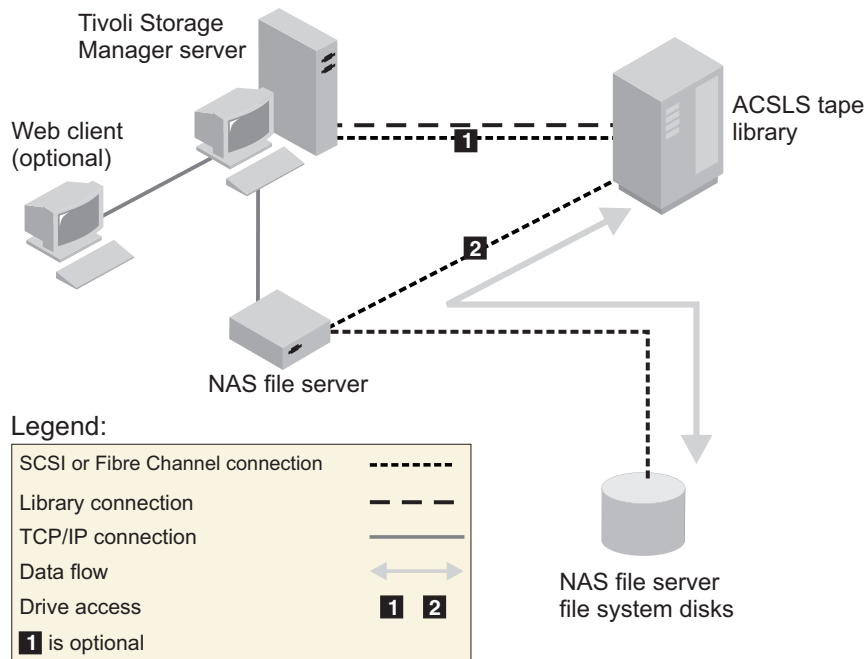


Figure 23. Configuration 4: ACSLS library connected to the Tivoli Storage Manager server

## Registering NAS nodes with the Tivoli Storage Manager server

Register the NAS (network-attached storage) file server as a Tivoli Storage Manager node, specifying **TYPE=NAS**. This node name is used to track the image backups for the NAS file server.

### Procedure

To register a NAS file server as a node named NASNODE1, with a password of NASPWD1, in a policy domain that is named NASDOMAIN, issue the following example command:

```
register node nasnode1 naspwd1 domain=nasdomain type=nas
```

If you are using a client option set, specify the option set when you register the node.

You can verify that this node is registered by issuing the following command:

```
query node type=nas
```

**Important:** You must specify **TYPE=NAS** so that only NAS nodes are displayed.

## Defining a data mover for a NAS file server

Define a data mover for each network-attached storage (NAS) file server, by using network data management protocol (NDMP) operations in your environment. The data mover name must match the node name that you specified when you registered the NAS node to the Tivoli Storage Manager server.

### About this task

Tivoli Storage Manager supports two types of data movers:

- For NDMP operations, data movers are NAS file servers. The definition for a NAS data mover contains the network address, authorization, and data formats that are required for NDMP operations. A data mover enables communication and ensures authority for NDMP operations between the Tivoli Storage Manager server and the NAS file server.
- For server-free data movement, data movers are devices such as the IBM SAN Data Gateway, that move data between disk devices and tape devices on the SAN.

### Procedure

To define a data mover for a NAS node that is named *NASNODE1*, use the **DEFINE DATAMOVER** command. For example, to define a data mover with these parameters:

- The high-level address is an IP address for the NAS file server, either a numerical address or a host name.
- The low-level address is the IP port for NDMP sessions with the NAS file server. The default is port number 10000.
- The user ID is the ID defined to the NAS file server that authorizes an NDMP session with the NAS file server (for this example, the user ID is the administrative ID for the NetApp file server).
- The password parameter is a valid password for authentication to an NDMP session with the NAS file server.
- The data format is NETAPPDUMP. This is the data format that the NetApp file server uses for tape backup. This data format must match the data format of the target storage pool.

Enter the following command:

```
define datamover nasnode1 type=nas hladdress=netapp2 lladdress=10000 userid=root
password=admin dataformat=netappdump
```

## Defining paths for NDMP operations

For network data management protocol (NDMP) operations, you create paths to drives and to libraries.

## Defining paths to drives for NDMP operations

The method that you choose for creating paths to drives depends on whether the drives are accessed by a network-attached storage (NAS) file server and the Tivoli Storage Manager server or only by a NAS file server.

### Defining paths for drives attached only to a NAS file server and to the Tivoli Storage Manager server:

If a tape drive is to be accessed by a network-attached storage (NAS) file server and the Tivoli Storage Manager server, you must create two paths. One path exists between the tape drive and the NAS file server. The other path exists between the tape drive and the Tivoli Storage Manager server.

#### Procedure

Complete the following steps:

1. If the drive is not defined for the Tivoli Storage Manager server, create the drive definition. For example, to define a drive NASDRIVE1 for a library NASLIB, issue the following command:

```
define drive naslib nasdrive1 element=autodetect
```

**Remember:** If the drive is attached to the Tivoli Storage Manager server, the element address is automatically detected.

2. Map the NAS drive name to the corresponding drive definition on the Tivoli Storage Manager server:
  - On the Tivoli Storage Manager server, issue the **QUERY DRIVE FORMAT=DETAILED** command to obtain the worldwide name (WWN) and serial number for the drive that is to be connected to the NAS file server.
  - On the NAS device, obtain the tape device name, serial number, and WWN for the drive.

If the WWN or serial number matches, a drive on a NAS file server is the same as the drive on the Tivoli Storage Manager server.

3. Using the drive name, define a path to the drive from the NAS file server and a path to the drive from the Tivoli Storage Manager server.
  - For example, to define a path between a tape drive with a device name of rst01 and a NetApp file server, issue the following command:

```
define path nasnode1 nasdrive1 srctype=datamover desttype=drive
library=naslib device=rst01
```
  - To define a path between the tape drive and the Tivoli Storage Manager server, issue the following command:

```
define path server1 nasdrive1 srctype=server desttype=drive
library=naslib device=mt3.0.0.2
```

#### Related information:

Obtaining device names for devices attached to NAS file servers

## Defining paths for drives attached only to NAS file servers:

If a tape drive is to be accessed only by a network-attached storage (NAS) file server and not by the Tivoli Storage Manager server, only a single path between the tape drive and the NAS file server is required.

### Procedure

Complete the following steps:

1. Obtain the SCSI element addresses, worldwide name (WWN), and serial numbers for the drive to be connected to NAS file server.

**Restriction:** If the SCSI drive is connected only to a NAS file server, the element address is not automatically detected, and you must supply it. If a library has more than one drive, you must specify an element address for each drive.

To obtain a SCSI element address, go to the following Tivoli device-support website:

- AIX, HP-UX, Solaris, and Windows: [http://www.ibm.com/software/sysmgmt/products/support/IBM\\_TSM\\_Supported\\_Devices\\_for\\_AIXHPSUNWIN.html](http://www.ibm.com/software/sysmgmt/products/support/IBM_TSM_Supported_Devices_for_AIXHPSUNWIN.html)

Element number assignment and device WWN assignments are also available from tape-library device manufacturers.

2. Create drive definitions by specifying the element addresses identified in the preceding step. Specify the element address in the **ELEMENT** parameter of the **DEFINE DRIVE** command. For example, to define a drive NASDRIVE1 with the element address 82 for the library NASLIB, issue the following command:  

```
define drive naslib nasdrive1 element=82
```

**Attention:** For a drive connected only to the NAS file server, do not specify ASNEEDED as the value for the **CLEANFREQUENCY** parameter of the **DEFINE DRIVE** command.

3. Obtain the device name, serial number, and WWN for the drive on the NAS device.
4. Using the information that is obtained in steps 1 and 3, map the NAS device name to the element address in the drive definition in the Tivoli Storage Manager server.
5. Define a path between the tape drive and the NAS file server. For example, to define a path between a NetApp file server and a tape drive with a device name of rst01, issue the following command:

```
define path nasnode1 nasdrive1 srctype=datamover desttype=drive
library=naslib device=rst01
```

### Related information:

Obtaining device names for devices attached to NAS file servers

## Obtaining names for devices attached to NAS file servers:

For paths from a network-attached storage (NAS) data mover, the value of the **DEVICE** parameter in the **DEFINE PATH** command is the name by which the NAS file server knows a library or drive.

### About this task

You can obtain these device names, also known as *special file names*, by querying the NAS file server. For information about how to obtain names for devices that are connected to a NAS file server, consult the product information for the file server.

### Procedure

- To obtain the device names for tape libraries on a Netapp Release ONTAP 10.0 GX, or later, file server, connect to the file server using telnet and issue the **SYSTEM HARDWARE TAPE LIBRARY SHOW** command. To obtain the device names for tape drives on a Netapp Release ONTAP 10.0 GX, or later, file server, connect to the file server using telnet and issue the **SYSTEM HARDWARE TAPE DRIVE SHOW** command. For details about these commands, see the Netapp ONTAP GX file server product documentation.
- For releases earlier than Netapp Release ONTAP 10.0 GX, continue to use the **SYSCONFIG** command. For example, to display the device names for tape libraries, connect to the file server using telnet and issue the following command:  
`sysconfig -m`

To display the device names for tape drives, issue the following command:  
`sysconfig -t`

- For fibre-channel-attached drives and the Celerra data mover, complete the following steps:
  1. Log on to the EMC Celerra control workstation using an administrative ID. Issue the following command:  
`server_devconfig server_1 -l -s -n`

**Tip:** The `-l` option for this command lists only the device information that was saved in the database of the data mover. The command and option do not display changes to the device configuration that occurred after the last database refresh on the data mover. For details about how to obtain the most recent device configuration for your data mover, see the EMC Celerra documentation.

The output for the **server\_devconfig** command includes the device names for the devices attached to the data mover. The device names are listed in the *addr* column, for example:

```
server_1:
Scsi Device Table
name addr type info
tape1 c64t010 tape IBM ULT3580-TD2 53Y2
ttape1 c96t010 tape IBM ULT3580-TD2 53Y2
```

2. Map the Celerra device name to the device worldwide name (WWN):
  - a. To list the WWN, log on to the EMC Celerra control workstation and issue the following command. Remember to enter a period ( `.` ) as the first character in this command.  
`.server_config server_# -v "fcv bind show"`



The output for this command includes the WWN, for example:

```
Chain 0064: WWN 500507630f418e29 HBA 2 N_PORT Bound
Chain 0096: WWN 500507630f418e18 HBA 2 N_PORT Bound
```

**Note:** The `.server_config` command is an undocumented EMC Celerra command. For more information about how to use it, contact EMC.

- b. Use the chain number to identify the tape device that was listed in the output of the `server_devconfig` command and that has the same WWN, for example:

| Tape device name | Chain number | WWN              |
|------------------|--------------|------------------|
| c64t0l0          | 0064         | 500507630f418e29 |
| c96t0l0          | 0096         | 500507630f418e18 |

Celerra commands might behave differently on different EMC Celerra systems and operating system levels. For details, see the EMC Celerra documentation or contact EMC.

## Defining paths to libraries for NDMP operations

Define a path to the SCSI library from either the Tivoli Storage Manager server or the network-attached storage (NAS) file server.

### Procedure

1. For a SCSI Library connected to Tivoli Storage Manager, issue the following example command to define a path from the server, named SERVER1, to the SCSI library named TSMLIB:  

```
define path server1 tsmlib srctype=server desttype=library
device=1b0.0.0.2
```
2. For a SCSI library connected to a NAS file server, issue the following example command to define a path between a NetApp NAS data mover named NASNODE1 and a library named NASLIB:  

```
define path nasnode1 naslib srctype=datamover desttype=library device=mc0
```
3. For a 349X library, define a path to the library from the Tivoli Storage Manager server. For example, issue the following command to define a path from the server, named SERVER1, to the 349X library named TSMLIB:  

```
define path server1 tsmlib srctype=server desttype=library
device=library1
```

**Attention:** The **DEFINE PATH** command is not needed for an automated cartridge system library software (ACSL) library.

## Labeling and checking tapes into the library

You must label the tapes and check them into the tape library.

### About this task

These tasks are the same as for other libraries. For more information, see: “Labeling media” on page 143

## Scheduling NDMP operations

You can schedule the backup or restore of images produced by NDMP (network data management protocol) operations by using administrative schedules that process the **BACKUP NODE** or **RESTORE NODE** administrative commands.

### About this task

The **BACKUP NODE** and **RESTORE NODE** commands can be used only for nodes of TYPE=NAS. See “Backing up and restoring NAS file servers using NDMP” on page 246 for information about the commands.

### Procedure

For example, to create an administrative schedule called NASSCHED to back up all file systems for a node named NASNODE1, enter the following:

```
define schedule nassched type=administrative cmd='backup node nasnode1' active=yes
starttime=20:00 period=1 perunits=days
```

The schedule is active, and is set to run at 8:00 p.m. every day. See Chapter 19, “Automating server operations,” on page 611 for more information.

## Defining virtual file spaces

Use a virtual file space definition to complete NAS (network-attached storage) directory level backups. To reduce backup and restore times for large file systems, map a directory path from a NAS file server to a virtual file space name on the Tivoli Storage Manager server.

### Procedure

To create a virtual file space name for the directory path on the NAS device, issue the **DEFINE VIRTUALFSMAPPING** command:

```
define virtualfsmapping nas1 /mikesdir /vol/vol1 /mikes
```

This command defines a virtual file space name of /MIKESDIR on the server, which represents the directory path of /VOL/VOL1/MIKES on the NAS file server that is represented by node NAS1. For more information, see “Directory-level backup and restore for NDMP operations” on page 252.

## Tape-to-tape copy to back up data

When using NDMP (network data management protocol) tape-to-tape function to back up data, the library type can be SCSI, 349X, or ACSLS (automated cartridge system library software). Drives can be shared between the NAS (network attached storage) devices and the Tivoli Storage Manager server.

### About this task

**Note:** When using the NDMP tape-to-tape copy function, your configuration setup could affect the performance of the Tivoli Storage Manager back end data movement.

## Procedure

To have one NAS device with paths to four drives in a library, use the **MOVE DATA** command after you are done with your configuration setup. This moves data on the volume VOL1 to any available volumes in the same storage pool as VOL1:

```
move data vol1
```

## Tape-to-tape copy to move data

In order to move data from an old tape technology to a new tape technology, using NDMP (network data management protocol) tape-to-tape copy operation, perform the steps below as well as the regular steps in your configuration setup.

### About this task

**Note:** When using the NDMP tape-to-tape copy function, your configuration setup could affect the performance of the Tivoli Storage Manager back end data movement.

## Procedure

1. Define one drive in the library, lib1, that has old tape technology:  

```
define drive lib1 drv1 element=1035
```
2. Define one drive in the library, lib2, that has new tape technology:  

```
define drive lib2 drv1 element=1036
```
3. Move data on volume vol1 in the primary storage pool to the volumes in another primary storage pool, nasprimpool2:  

```
move data vol1 stgpool=nasprimpool2
```

---

## Backing up and restoring NAS file servers using NDMP

After you have completed the steps to configure Tivoli Storage Manager for NDMP (network data management protocol) operations, you are ready to begin using NDMP.

## Procedure

Use either a client interface or an administrative interface to perform a file system image backup. For example, to use the Windows backup-archive client interface to back up a file system named /vol/vol1 on a NAS (network attached storage) file server named NAS1, issue the following command:

```
dsmc backup nas -nasnodename=nas1 {/vol/vol1}
```

For more information on the command, see the *Tivoli Storage Manager Backup-Archive Clients Installation and User's Guide*.

**Tip:** Whenever you use the client interface, you are asked to authenticate yourself as a Tivoli Storage Manager administrator before the operation can begin. The administrator ID must have at least client owner authority for the NAS node. You can perform the same backup operation with a server interface. For example, from the administrative command-line client, back up the file system named /vol/vol1 on a NAS file server named NAS1, by issuing the following command:  

```
backup node nas1 /vol/vol1
```

**Note:** The **BACKUP NAS** and **BACKUP NODE** commands do not include snapshots. To back up snapshots see “Backing up and restoring with snapshots” on page 253.

You can restore the image using either interface. Backups are identical whether they are backed up using a client interface or a server interface. For example, suppose you want to restore the image backed up in the previous examples. For this example the file system named /vol/vol1 is being restored to /vol/vol2. Restore the file system with the following command, issued from a Windows backup-archive client interface:

```
dsmc restore nas -nasnodename=nas1 {/vol/vol1} {/vol/vol2}
```

You can choose to restore the file system, using a server interface. For example, to restore the file system name /vol/vol1 to file system /vol/vol2, for a NAS file server named NAS1, enter the following command:

```
restore node nas1 /vol/vol1 /vol/vol2
```

You can restore data from one NAS vendor system to another NAS vendor system when you use the NDMPDUMP data format, but you should either verify compatibility between systems or maintain a separate storage pool for each NAS vendor.

## NAS file servers: backups to a single Tivoli Storage Manager server

If you have several NAS (network-attached storage) file servers that are in different locations, you might prefer to send the backup data to a single Tivoli Storage Manager server rather than attaching a tape library to each NAS device.

When you store NAS backup data in the Tivoli Storage Manager server's storage hierarchy, you can apply Tivoli Storage Manager backend data management functions. Migration, reclamation, and disaster recovery are among the supported features when you use the NDMP file server to Tivoli Storage Manager server option.

To back up a NAS device to a Tivoli Storage Manager native storage pool, set the destination storage pool in the copy group to point to the wanted native storage pool. The destination storage pool provides the information about the library and drives that are used for backup and restore. You must ensure that there is sufficient space in your target storage pool to contain the NAS data, which can be backed up to sequential, disk, or file type devices. Defining a separate device class is not necessary.

If you are creating a table of contents, a management class must be specified with the **TOCDESTINATION** parameter in the **DEFINE** and **UPDATE COPYGROUP** commands. When you back up a NAS file server to Tivoli Storage Manager native pools, the **TOCDESTINATION** can be the same as the destination of the NDMP (network data management protocol) data.

Firewall considerations are more stringent than they are for filer-to-attached-library because communications can be initiated by either the Tivoli Storage Manager server or the NAS file server. NDMP tape servers run as threads within the Tivoli Storage Manager server and the tape server accepts connections on port of 10001. This port number can be changed through the following option in the Tivoli Storage Manager server options file: NDMPPORTRANGE port-number-low, port-number-high.

During NDMP filer-to-server backup operations, you can use the NDMPREFDATAINTERFACE option to specify which network interface the Tivoli Storage Manager server uses to receive NDMP backup data. The value for this

option is a host name or IPV4 address that is associated with one of the active network interfaces of the system on which the Tivoli Storage Manager server is running. This interface must be IPV4 enabled.

Before you use this option, verify that your NAS device supports NDMP operations that use a different network interface for NDMP control and NDMP data connections. NDMP control connections are used by Tivoli Storage Manager to authenticate with an NDMP server and monitor an NDMP operation while NDMP data connections are used to transmit and receive back up data during NDMP operations. You must still configure your NAS device to route NDMP backup and restore data to the appropriate network interface.

When enabled, the `NDMPPREFDATAINTERFACE` option affects all subsequent NDMP filer-to-server operations. It does not affect NDMP control connections because they use the system's default network interface. You can update this server option without stopping and restarting the server by using the **SETOPT** command (Set a server option for dynamic update).

NetApp file servers provide an NDMP option (`ndmpd.preferred_interface`) to change the interface that is used for NDMP data connections. For more information, see the documentation that came with your NAS device.

See “Backing up NDMP file server to Tivoli Storage Manager server backups” for steps on how to complete NDMP filer-to-server backups.

See the *Administrator's Reference* for server option information.

## Backing up NDMP file server to Tivoli Storage Manager server backups

You can back up data to a single Tivoli Storage Manager server rather than attaching a tape library to each NAS device.

### Procedure

To back up a server on a NAS file system, complete the following steps:

1. Select an existing storage pool or set up a storage pool for the NAS data by issuing the following command:  
`define stgpool naspool disk`
2. Define volumes to add to the storage pool. For example, define a volume that is named `naspool_volAB`:  
`define volume naspool /usr/storage/naspool_volAB formatsize=100`
3. Set the copy destination to the storage pool defined previously and activate the associated policy set.  
`update copygroup standard standard standard destination=naspool  
tocdestination=naspool  
activate policyset standard standard`

The destination for NAS data is determined by the destination in the copy group. The storage size estimate for NAS differential backups uses the occupancy of the file space, the same value that is used for a full backup. You can use this size estimate as one of the considerations in choosing a storage pool. One of the attributes of a storage pool is the **MAXSIZE** value, which indicates that data is sent to the NEXT storage pool when the **MAXSIZE** value is exceeded by the estimated size. Because NAS differential backups to Tivoli

Storage Manager native storage pools use the base file space occupancy size as a storage size estimate, differential backups end up in the same storage pool as the full backup. Depending on collocation settings, differential backups might end up on the same media as the full backup.

4. Set up a node and data mover for the NAS device. The data format signifies that the backup images created by this NAS device are a dump type of backup image in a NetApp specific format.

```
register node nas1 nas1 type=nas domain=standard
define datamover nas1 type=nas hla=nas1 user=root
password=***** dataformat=netappdump
```

The NAS device is now ready to be backed up to a Tivoli Storage Manager server storage pool. Paths can be defined to local drives, but the destination that is specified by the management class determines the target location for this backup operation.

5. Back up the NAS device to the Tivoli Storage Manager storage pool by issuing the following command:

```
backup node nas1 /vol/vol0
```

6. Restore a NAS device from the Tivoli Storage Manager storage pool by issuing the following command:

```
restore node nas1 /vol/vol0
```

---

## File-level backup and restore for NDMP operations

When you do a backup via NDMP (network data management protocol), you can specify that the Tivoli Storage Manager server collect and store file-level information in a table of contents (TOC).

If you specify this option at the time of backup, you can later display the table of contents of the backup image. Through the backup-archive web client, you can select individual files or directories to restore directly from the backup images generated.

Collecting file-level information requires extra processing time, network resources, storage pool space, temporary database space, and possibly a mount point during the backup. You must consider dedicating more space in the Tivoli Storage Manager server database. You must set up policy so that the Tivoli Storage Manager server stores the table of contents in a different storage pool from the one where the backup image is stored. The table of contents is treated like any other object in that storage pool.

You can also do a backup via NDMP without collecting file-level restore information.

To allow creation of a table of contents for a backup via NDMP, you must define the **TOCDESTINATION** attribute in the backup copy group for the management class to which this backup image is bound. You cannot specify a copy storage pool or an active-data pool as the destination. The storage pool you specify for the TOC destination must have a data format of either NATIVE or NONBLOCK, so it cannot be the tape storage pool used for the backup image.

If you choose to collect file-level information, specify the **TOC** parameter in the **BACKUP NODE** server command. Or, if you initiate your backup by using the client, you can specify the TOC option in the client options file, client option set, or client command line. You can specify NO, PREFERRED, or YES. When you specify PREFERRED

or YES, the Tivoli Storage Manager server stores file information for a single NDMP-controlled backup in a table of contents (TOC). The table of contents is placed into a storage pool. After that, the Tivoli Storage Manager server can access the table of contents so that file and directory information can be queried by the server or client. Use of the **TOC** parameter allows a table of contents to be generated for some images and not others, without requiring different management classes for the images.

See the *Administrator's Reference* for more information about the **BACKUP NODE** command.

To avoid mount delays and ensure sufficient space, use random access storage pools (DISK device class) as the destination for the table of contents. For sequential access storage pools, no labeling or other preparation of volumes is necessary if scratch volumes are allowed.

For more information, see "Managing tables of contents" on page 225.

## Interfaces for file-level restore

When you restore individual files and directories, you have the choice of using one of two interfaces to initiate the restore: the backup-archive web client or the server interface.

### Restore Using Backup-Archive web Client

The backup-archive web client requires that a table of contents exist in order to restore files and directories. The web client must be on a Windows system. The Tivoli Storage Manager server accesses the table of contents from the storage pool and loads TOC information into a temporary database table. Then, you can use the backup-archive web client to examine directories and files contained in one or more file system images, and select individual files or directories to restore directly from the backup images generated.

### Restore Using Server Interface

- If you have a table of contents, use the **QUERY NASBACKUP** command to display information about backup images generated by NDMP (network data management protocol), and to see which images have a corresponding table of contents. Then, use the **RESTORE NODE** command with the **FILELIST** parameter.
- If you did not create a table of contents, the contents of the backup image cannot be displayed. You can restore individual files, directories, or both if you know the name of the file or directory, and in which image the backup is located. Use the **RESTORE NODE** command with the **FILELIST** parameter.



## International characters for NetApp file servers

All systems that create or access data on a particular NAS (network-attached storage) file server volume must do so in a manner compatible with the volume language setting.

You must install Data ONTAP 6.4.1 or later, if it is available, on your NetApp NAS file server to garner full support of international characters in the names of files and directories.

If your level of Data ONTAP is earlier than 6.4.1, you must have one of the following two configurations to collect and restore file-level information. Results with configurations other than the two listed are unpredictable. The Tivoli Storage Manager server prints a warning message (ANR4946W) during backup operations. The message indicates that the character encoding of NDMP file history messages is unknown, and UTF-8 is assumed to build a table of contents. It is safe to ignore this message only for the following two configurations.

- Your data has directory and file names that contain only English (7-bit ASCII) characters.
- Your data has directory and file names that contain non-English characters and the volume language is set to the UTF-8 version of the proper locale (for example, de.UTF-8 for German).

If your level of Data ONTAP is 6.4.1 or later, you must have one of the following three configurations to collect and restore file-level information. Results with configurations other than the three listed are unpredictable.

- Your data has directory and file names that contain only English (7-bit ASCII) characters and the volume language is either not set or is set to one of the following:
  - C (POSIX)
  - en
  - en\_US
  - en.UTF-8
  - en\_US.UTF-8
- Your data has directory and file names that contain non-English characters, and the volume language is set to the proper locale (for example, de.UTF-8 or de for German).

**Tip:** Using the UTF-8 version of the volume language setting is more efficient in terms of Tivoli Storage Manager server processing and table of contents storage space.

- You use CIFS only to create and access your data.



## File level restore from a directory-level backup image

File-level restore is supported for directory-level backup images.

As with a NAS (network attached storage) file system backup, a table of contents (TOC) is created during a directory-level backup and you are able to browse the files in the image, using the Web client. The default is that the files are restored to the original location. During a file-level restore from a directory-level backup, however, you can either select a different file system or another virtual file space name as a destination.

For a TOC of a directory level backup image, the path names for all files are relative to the directory specified in the virtual file space definition, not the root of the file system.

---

## Directory-level backup and restore

If you have a large NAS (network attached storage) file system, initiating a backup at a directory level will reduce backup and restore times and provide more flexibility in configuring your NAS backups. By defining virtual file spaces, a file system backup can be partitioned among several NDMP backup operations and multiple tape drives. You can also use different backup schedules to back up sub-trees of a file system.

The virtual file space name cannot be identical to any file system on the NAS node. If a file system is created on the NAS device with the same name as a virtual file system, a name conflict will occur on the Tivoli Storage Manager server when the new file space is backed up. See the *Administrator's Reference* for more information about virtual file space mapping commands.

**Note:** Virtual file space mappings are only supported for NAS nodes.

## Directory-level backup and restore for NDMP operations

The **DEFINE VIRTUALFSMAPPING** command maps a directory path of a NAS (network attached storage) file server to a virtual file space name on the Tivoli Storage Manager server. After a mapping is defined, you can conduct NAS operations such as **BACKUP NODE** and **RESTORE NODE**, using the virtual file space names as if they were actual NAS file spaces.

To start a backup of the directory, issue the **BACKUP NODE** command specifying the virtual file space name instead of a file space name. To restore the directory subtree to the original location, run the **RESTORE NODE** command and specify the virtual file space name.

Virtual file space definitions can also be specified as the destination in a **RESTORE NODE** command. This allows you restore backup images (either file system or directory) to a directory on any file system of the NAS device.

You can use the Web client to select files for restore from a directory-level backup image because the Tivoli Storage Manager client treats the virtual file space names as NAS file spaces.

## Backing up and restoring with snapshots

NDMP directory level backup gives you the ability to back up user created snapshots of a NAS file system. Those snapshots are then stored as subdirectories. The snapshots can be taken at any time, and the backup to tape can be deferred to a more convenient time.

### Procedure

For example, to back up a snapshot that is created for a NetApp file system, complete the following steps:

1. On the console for the NAS device, issue the command to create the snapshot. SNAP CREATE is the command for a NetApp device.

```
snap create vol2 february17
```

This example creates a snapshot that is named FEBRUARY 17 of the /vol/vol2 file system. The physical location for the snapshot data is in the directory /vol/vol2/.snapshot/february17. The stored location for snapshot data depends on the NAS vendor implementation. For NetApp, the SNAP LIST command can be used to display all snapshots for a file system.

2. Define a virtual file space mapping definition on the Tivoli Storage Manager server for the snapshot data that is created in the previous step.

```
define virtualfsmapping nas1 /feb17snapshot /vol/vol2 /.snapshot/february17
```

This example creates a virtual file space mapping definition named /feb17snapshot.

3. Back up the virtual file space mapping.

```
backup node nas1 /feb17snapshot mode=full toc=yes
```

4. After the backup is created, you can either restore the entire snapshot image or restore an individual file. Before you restore the data, you can create a virtual file space mapping name for the target directory. You can select any file system name as a target. The target location in this example is the directory /feb17snaprestore on the file system /vol/vol1.

```
define virtualfsmapping nas1 /feb17snaprestore /vol/vol1 /feb17snaprestore
```

5. Issue the restore of the snapshot backup image.

```
restore node nas1 /feb17snapshot /feb17snaprestore
```

This example restores a copy of the /vol/vol2 file system to the directory /vol/vol1/feb17snaprestore in the same state as when the snapshot was created in the first step.

---

## Backup and restore using NetApp SnapMirror to Tape feature

You can back up large NetApp file systems by using the NetApp SnapMirror to Tape feature. Using a block-level copy of data for backup, the SnapMirror to Tape method is faster than a traditional Network Data Management Protocol (NDMP) full backup and can be used when NDMP full backups are impractical.

Use the NDMP SnapMirror to Tape feature as a disaster recovery option for copying large NetAppfile systems to auxiliary storage. For most NetAppfile systems, use the standard NDMP full or differential backup method.

Using a parameter option on the **BACKUP NODE** and **RESTORE NODE** commands, you can back up and restore file systems by using SnapMirror to Tape. There are

several limitations and restrictions on how SnapMirror images can be used. Consider the following guidelines before you use it as a backup method:

- You cannot initiate a SnapMirror to Tape backup or restore operation from the Tivoli Storage Manager Operations Center, web client, or command-line client.
- You cannot perform differential backups of SnapMirror images.
- You cannot perform a directory-level backup using SnapMirror to Tape, thus Tivoli Storage Manager does not permit an SnapMirror to Tape backup operation on a server virtual file space.
- You cannot perform an NDMP file-level restore operation from SnapMirror to Tape images. Therefore, a table of contents is never created during SnapMirror to Tape image backups.
- At the start of a SnapMirror to Tape copy operation, the file server generates a snapshot of the file system. NetApp provides an NDMP environment variable to control whether this snapshot should be removed at the end of the SnapMirror to Tape operation. Tivoli Storage Manager always sets this variable to remove the snapshot.
- After a SnapMirror to Tape image is retrieved and copied to a NetApp file system, the target file system is left configured as a SnapMirror partner. NetApp provides an NDMP environment variable to control whether this SnapMirror relationship should be broken. Tivoli Storage Manager always "breaks" the SnapMirror relationship during the retrieval. After the restore operation is complete, the target file system is in the same state as that of the original file system at the point-in-time of backup.

See the **BACKUP NODE** and **RESTORE NODE** commands in the *Administrator's Reference* for more information about SnapMirror to Tape feature.

---

## NDMP backup operations using Celerra file server integrated checkpoints

When the Tivoli Storage Manager server initiates an NDMP backup operation on a Celerra data mover, the backup of a large file system might take several hours to complete. Without Celerra integrated checkpoints enabled, any changes occurring on the file system are written to the backup image.

As a result, the backup image includes changes made to the file system during the entire backup operation and is not a true point-in-time image of the file system.

If you are performing NDMP backups of Celerra file servers, you should upgrade the operating system of your data mover to Celerra file server version T5.5.25.1 or later. This version of the operating system allows enablement of integrated checkpoints for all NDMP backup operations from the Celerra Control Workstation. Enabling this feature ensures that NDMP backups represent true point-in-time images of the file system that is being backed up.

Refer to the Celerra file server documentation for instructions on enabling integrated checkpoints during all NDMP backup operations.

If your version of the Celerra file server operating system is earlier than version T5.5.25.1 and if you use NDMP to back up Celerra data movers, you should manually generate a snapshot of the file system using Celerra's command line checkpoint feature and then initiate an NDMP backup of the checkpoint file system rather than the original file system.

Refer to the Celerra file server documentation for instructions on creating and scheduling checkpoints from the Celerra control workstation.

---

## Replicating NAS nodes with NDMP backup data

You can replicate a network-attached storage (NAS) node that contains NDMP (network data management protocol) backup data.

Only NDMP backup data in NATIVE data format storage pools can be replicated. You cannot replicate NDMP images that are stored in storage pools that has the following data formats:

- NETAPPDUMP
- CELERRADUMP
- NDMPDUMP

A differential NDMP backup image requires the associated full backup to be restored. Therefore, to replicate a differential NDMP backup image, both full and differential images must be in NATIVE data format storage pools. A full NDMP image in a NATIVE data format storage pool is always eligible for replication. If an NDMP image is replicated, its associated Table of Contents data is also replicated.

When an NDMP image is replicated to a replication target server, a data mover definition must be created on the target replication server. To create a data mover definition, issue the **DEFINE DATAMOVER** command to restore the data.



---

## Chapter 10. Managing storage pools and volumes

When you configure devices so that the server can use them to store client data, you create storage pools and storage volumes.

### About this task

The procedures for configuring devices use the set of defaults that provides for storage pools and volumes. The defaults can work well. However, you might have specific requirements that are not met by the defaults. There are three common reasons to change the defaults:

- Optimize and control storage device usage by arranging the storage hierarchy and tuning migration through the hierarchy (next storage pool, migration thresholds).
- Reuse tape volumes through reclamation. Reuse is also related to policy and expiration.
- Keep a client's files on a minimal number of volumes (collocation).

You can also make other adjustments to tune the server for your systems. See the following sections to learn more. For some quick tips, see “Task tips for storage pools” on page 265.

The examples in topics show how to perform tasks using the Tivoli Storage Manager command-line interface. For information about the commands, see the *Administrator's Reference*, or issue the HELP command from the command line of a Tivoli Storage Manager administrative client.

---

## Defining storage pools

To optimize data storage, you can specify various properties when you define or update a storage pool using the **DEFINE STGPOOL** and **UPDATE STGPOOL** commands.

### About this task

**Tip:** When you define or update storage pools that use LTO Ultrium media, special considerations might apply.

| Task                 | Required Privilege Class       |
|----------------------|--------------------------------|
| Define storage pools | System                         |
| Update storage pools | System or unrestricted storage |

## Properties of storage pool definitions

You can define storage pools using a wide range of properties to control how data is stored. Each storage pool represents one type of media as specified in the device-class parameter.

When you define a primary storage pool, be prepared to specify some or all of the information that is shown in Table 20. Most of the information is optional. Some information applies only to random-access storage pools or only to sequential-access storage pools. Required parameters are marked.

Table 20. Information for defining a storage pool

| Information                                                                        | Explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Type of Storage Pool  |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Storage pool name<br>(Required)                                                    | The name of the storage pool.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | random,<br>sequential |
| Device class<br>(Required)                                                         | The name of the device class assigned for the storage pool.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | random,<br>sequential |
| Pool type                                                                          | The type of storage pool (primary or copy). The default is to define a primary storage pool. A storage pool's type cannot be changed after it has been defined.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | random,<br>sequential |
| Maximum number of scratch volumes <sup>2</sup><br>(Required for sequential access) | When you specify a value greater than zero, the server dynamically acquires scratch volumes when needed, up to this maximum number.<br><br>For automated libraries, set this value equal to the physical capacity of the library. For details, see:<br>"Adding scratch volumes to automated library devices" on page 152                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | sequential            |
| Access mode                                                                        | Defines access to volumes in the storage pool for user operations (such as backup and restore) and system operations (such as reclamation and server migration). Possible values are:<br><br><b>Read/Write</b><br>User and system operations can read from or write to the volumes.<br><br><b>Read-Only</b><br>User operations can read from the volumes, but not write. Server processes can move files within the volumes in the storage pool. However, no new writes are permitted to volumes in the storage pool from volumes outside the storage pool.<br><br><b>Unavailable</b><br>User operations cannot get access to volumes in the storage pool. No new writes are permitted to volumes in the storage pool from other volumes outside the storage pool. However, system processes (like reclamation) are permitted to move files within the volumes in the storage pool. | random,<br>sequential |
| Maximum file size <sup>1 2</sup>                                                   | To exclude large files from a storage pool, set a maximum file size. The maximum file size applies to the size of a physical file (a single client file or an aggregate of client files).<br><br>Do not set a maximum file size for the last storage pool in the hierarchy unless you want to exclude very large files from being stored in server storage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | random,<br>sequential |

Table 20. Information for defining a storage pool (continued)

| Information                                  | Explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Type of Storage Pool |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Cyclic Redundancy Check (CRC) <sup>1</sup>   | Specifies whether the server uses CRC to validate storage pool data during audit volume processing. For additional information see “Data validation during audit volume processing” on page 915.<br><br>Using the CRC option in conjunction with scheduling audit volume processing continually ensures the integrity of data stored in your storage hierarchy. If you always want your storage pool data validated, set your primary storage pool <code>crcdata</code> definition to YES. | random, sequential   |
| Name of the next storage pool <sup>1 2</sup> | Specifies the name of the next storage pool in the storage pool hierarchy, where files can be migrated or where files are stored that exceed the maximum size for this storage pool. See “Storage pool hierarchies” on page 27.                                                                                                                                                                                                                                                            | random, sequential   |
| Migration thresholds <sup>1 2</sup>          | Specifies a percentage of storage pool occupancy at which the server begins migrating files to the next storage pool (high threshold) and the percentage when migration stops (low threshold). See “Migrating files in a storage pool hierarchy” on page 285.                                                                                                                                                                                                                              | random, sequential   |
| Migration processes <sup>1 2</sup>           | Specifies the number of concurrent processes to use for migrating files from this storage pool. See “Migrating disk storage pools” on page 287 and “Specifying multiple concurrent migration processes” on page 297.                                                                                                                                                                                                                                                                       | random, sequential   |
| Migration delay <sup>1 2</sup>               | Specifies the minimum number of days a file must remain in a storage pool before it is eligible for migration. See “Keeping files in a storage pool” on page 292 and “How the server migrates files from sequential-access storage pools” on page 294.                                                                                                                                                                                                                                     | random, sequential   |
| Continue migration process <sup>1 2</sup>    | Specifies whether migration of files should continue even if files do not meet the requirement for migration delay. This setting is used only when the storage pool cannot go below the low migration threshold without moving additional files. See “Keeping files in a storage pool” on page 292 and “How the server migrates files from sequential-access storage pools” on page 294.                                                                                                   | random, sequential   |
| Cache                                        | Enables or disables cache. When cache is enabled, copies of files migrated by the server to the next storage pool are left on disk after the migration. In this way, a retrieval request can be satisfied quickly. See “Caching in disk storage pools” on page 298.                                                                                                                                                                                                                        | random               |
| Collocation <sup>2</sup>                     | With collocation enabled, the server tries to keep all files belonging on a minimal number of sequential-access storage volumes. The files can belong to a single client node, a group of client nodes, a client file space, or a group of file spaces. See “Keeping client files together using collocation” on page 372.                                                                                                                                                                 | sequential           |
| Reclamation threshold <sup>1 2</sup>         | Specifies what percentage of reclaimable space can accumulate on a volume before the server initiates a space reclamation process for the volume. See “Reclamation thresholds” on page 35.                                                                                                                                                                                                                                                                                                 | sequential           |
| Reclamation processes <sup>1 2</sup>         | Specifies the number of concurrent processes to use for reclaiming the volumes in a storage pool. See “Optimizing drive usage using multiple concurrent reclamation processes” on page 384.                                                                                                                                                                                                                                                                                                | sequential           |
| Off-site reclaim limit                       | Specifies the number of off-site volumes to have their space reclaimed during reclamation for a storage pool. See “Reclamation of offsite volumes” on page 388.                                                                                                                                                                                                                                                                                                                            | sequential           |
| Reclamation storage pool <sup>1 2</sup>      | Specifies the name of the storage pool to be used for storing data from volumes being reclaimed in this storage pool. Use for storage pools whose device class only has one drive or mount point. See “Reclaiming volumes in a storage pool with one drive” on page 385.                                                                                                                                                                                                                   | sequential           |



Table 20. Information for defining a storage pool (continued)

| Information                       | Explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Type of Storage Pool |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Reuse delay period <sup>2</sup>   | Specifies the number of days that must elapse after all of the files have been deleted from a volume, before the volume can be rewritten or returned to the scratch pool. See “Delaying reuse of volumes for recovery purposes” on page 911.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | sequential           |
| Overflow location <sup>1 2</sup>  | <p>Specifies the name of a location where volumes are stored when they are ejected from an automated library by the MOVE MEDIA command.</p> <p>Use for a storage pool that is associated with an automated library or an external library.</p> <p>For details, see:<br/> “Returning reclaimed volumes to a library” on page 151</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | sequential           |
| Data Format <sup>2</sup>          | The format in which data will be stored. NATIVE is the default data format. NETAPPDUMP and NONBLOCK are examples of other data formats.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | sequential           |
| Copy Storage Pools <sup>1 2</sup> | <p>Specifies the names of copy storage pools where the server simultaneously writes data when a client backup, archive, import or migration operation stores data to the primary storage pool. The server writes the data simultaneously to all listed copy storage pools. This option is restricted to primary random-access storage pools or to primary sequential-access storage pools that use the NATIVE or NONBLOCK data format. See the Copy Continue entry and “Writing data simultaneously to primary, copy, and active-data pools” on page 346 for related information.</p> <p><b>Attention:</b> The COPYSTGPools parameter is not intended to replace the BACKUP STGPPOOL command. If you use the simultaneous-write function, ensure that the copy of the primary storage pool is complete by regularly issuing the BACKUP STGPPOOL command. Failure to do so could result in the inability to recover the primary storage pool data if the primary storage pool becomes damaged or lost.</p> | random, sequential   |
| Copy Continue <sup>1 2</sup>      | <p>Specifies how the server should react to a copy storage pool write failure for any of the copy storage pools listed in the COPYSTGPools parameter. With a value of YES, during a write failure, the server will exclude the failing copy storage pool from any further writes while that specific client session is active. With a value of NO, during a write failure, the server will fail the entire transaction including the write to the primary storage pool.</p> <p>This option has no effect on active-data pools.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | sequential           |

Table 20. Information for defining a storage pool (continued)

| Information                      | Explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Type of Storage Pool |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Active-data pools <sup>1 2</sup> | <p>Specifies the names of active-data pools where the server simultaneously writes active versions of client node data during backups. The server writes the data simultaneously to all listed active-data pools. This option is restricted to primary random-access storage pools or to primary sequential-access storage pools that use the NATIVE or NONBLOCK data format. Nodes whose data is to be written to an active-data pool during a simultaneous-write operation must be members of a policy domain that specifies the active-data pool as the destination for active backup data.</p> <p><b>Attention:</b> The ACTIVEDATAPOOLS parameter is not intended to replace the COPY ACTIVE DATA command. If you use the simultaneous-write function, ensure that the copy of active backup data is complete by regularly issuing the COPY ACTIVE DATA command. If you do not issue the COPY ACTIVE DATA command regularly and you do not have copy storage pools, you might not be able to recover any of the data in a primary storage pool if the primary storage pool becomes damaged or lost.</p> | random, sequential   |
| Shredding                        | <p>Specifies whether data is physically overwritten when it is deleted. After client data is deleted, it might still be possible to recover it. For sensitive data, this condition is a potential security exposure. Shredding the deleted data increases the difficulty of discovering and reconstructing the data later. For more information, including how to set up shred pools and how shredding interacts with other command parameters, see “Securing sensitive client data” on page 529.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | random               |

<sup>1</sup> This information is not available for sequential-access storage pools that use the following data formats:

- CELERRADUMP
- NDMPDUMP
- NETAPPDUMP

<sup>2</sup> This information is not available or is ignored for Centera sequential-access storage pools.

## Example: Defining storage pools

An engineering department requires a separate storage hierarchy. You want the department's backed-up files to go to a disk storage pool. When that pool fills, you want the files to migrate to a tape storage pool.

### Before you begin

Consider the following restrictions for storage pools:

- You cannot establish a chain of storage pools that lead to an endless loop. For example, you cannot define StorageB as the next storage pool for StorageA, and then define StorageA as the next storage pool for StorageB.
- The storage pool hierarchy includes only primary storage pools, not copy storage pools or active-data pools.
- If a storage pool uses the data format NETAPPDUMP, CELERRADUMP, or NDMPDUMP, the server does not complete any of the following functions:
  - Migration
  - Reclamation
  - Volume audits

- Data validation
- Simultaneous-write operations
- The Tivoli Storage Manager server does not support the following functions for CENTERA storage pools:
  - Data-movement operations:
    - Moving node data into or out of a CENTERA storage pool.
    - Migrating data into or out of a CENTERA storage pool.
    - Reclaiming a CENTERA storage pool.
  - Backup operations:
    - Backing up a CENTERA storage pool.
    - Using a CENTERA device class to back up a database.
    - Backing up a storage pool to a CENTERA storage pool.
    - Copying active data to an active-data pool.
  - Restore operations:
    - Restoring data from a copy storage pool or an active-data pool to a CENTERA storage pool.
    - Restoring volumes in a CENTERA storage pool.
  - Other:
    - Exporting data to a CENTERA device class or importing data from a CENTERA device class; however, files that are stored in CENTERA storage pools can be exported and files that are being imported can be stored on CENTERA.
    - If retention protection is not enabled, the server does not send a retention value to an EMC CENTERA storage device when storing objects during archive, import, and other operations. If this is the case, you can use a CENTERA storage device as a standard device from which archive and backup files can be deleted.
    - Using a CENTERA device class for creating backup sets; however, files that are stored in CENTERA storage pools can be sent to back up sets.
    - Defining CENTERA volumes.
    - Using a CENTERA device class as the target of volume history, device configuration, trace logs, error logs, or query output files.

## About this task

For this example configuration, you want the storage pools to have the following characteristics:

- Disk primary storage pool
  - The pool that is named ENGBACK1 is the storage pool for the engineering department.
  - The size of the largest file that can be stored is 5 MB. Files larger than 5 MB are stored in the tape storage pool.
  - Files migrate from the disk storage pool to the tape storage pool when the disk storage pool is 85% full. File migration to the tape storage pool stops when the disk storage pool is down to 40% full.
  - The access mode is the default, read/write.
  - Cache is used.
- Tape primary storage pool
  - The name of the pool is BACKTAPE.

- The pool uses the device class TAPE, which is already defined.
- No limit is set for the maximum file size because this is the last storage pool in the hierarchy.
- To group files from the same client on a small number of volumes, use collocation at the client node level.
- Use scratch volumes for this pool, with a maximum number of 100 volumes.
- The access mode is the default, read/write.
- Use the default for reclamation: Reclaim a partially full volume (to allow tape reuse) when 60% of the volume's space can be reclaimed.

You can define the storage pools in a storage pool hierarchy from the top down or from the bottom up. Defining the hierarchy from the bottom up requires fewer steps. To define the hierarchy from the bottom up, complete the following steps:

### Procedure

1. Define the storage pool that is named BACKTAPE with the following command:

```
define stgpool backtape tape
description='tape storage pool for engineering backups'
maxsize=nolimit collocate=node maxscratch=100
```

2. Define the storage pool that is named ENGBACK1 with the following command:

```
define stgpool engback1 disk
description='disk storage pool for engineering backups'
maxsize=5m nextstgpool=backtape highmig=85 lowmig=40
```

### Related reference:

Chapter 9, “Using NDMP for operations with NAS file servers,” on page 219

## Example: Updating storage pools

You decide to increase the maximum size of a physical file that can be stored in the ENGBACK1 disk storage pool.

### About this task

In this example, the ENGBACK1 disk storage pool is defined as shown in “Example: Defining storage pools” on page 261. To increase the maximum size of a physical file that can be stored in the storage pool, use the following command:

```
update stgpool engback1 maxsize=100m
```

### Restrictions:

- You cannot use this command to change the data format for a storage pool.
- For storage pools that have the NETAPPDUMP, the CELERRADUMP, or the NDMPDUMP data format, you can modify the following parameters only:
  - ACCESS
  - COLLOCATE
  - DESCRIPTION
  - MAXSCRATCH
  - REUSEDELAY

## Example: Setting up server storage

All the data in four primary storage pools is backed up to one copy storage pool. Active versions of data are stored in an active-data pool.

### About this task

Figure 24 shows one way to set up server storage. In this example, the storage that is defined for the server includes:

- Three disk storage pools, which are primary storage pools: ARCHIVE, BACKUP, and HSM
- One primary storage pool that consists of tape cartridges
- One copy storage pool that consists of tape cartridges
- One active-data pool that consists of FILE volumes for fast client restore

Policies that are defined in management classes direct the server to store files from clients in the ARCHIVE, BACKUP, or HSM disk storage pools. An extra policy specifies the following:

- A select group of client nodes that requires fast restore of active backup data
- The active-data pool as the destination for the active-data belonging to these nodes
- The ARCHIVE, BACKUP, or HSM disk storage pools as destinations for archive, backup (active and inactive versions), and space-managed data

For each of the three disk storage pools, the tape primary storage pool is next in the hierarchy. As the disk storage pools fill, the server migrates files to tape to make room for new files. Large files can go directly to tape. For more information about setting up a storage hierarchy, see “Storage pool hierarchies” on page 27.

For more information about backing up primary storage pools, see “Backing up primary storage pools” on page 908.

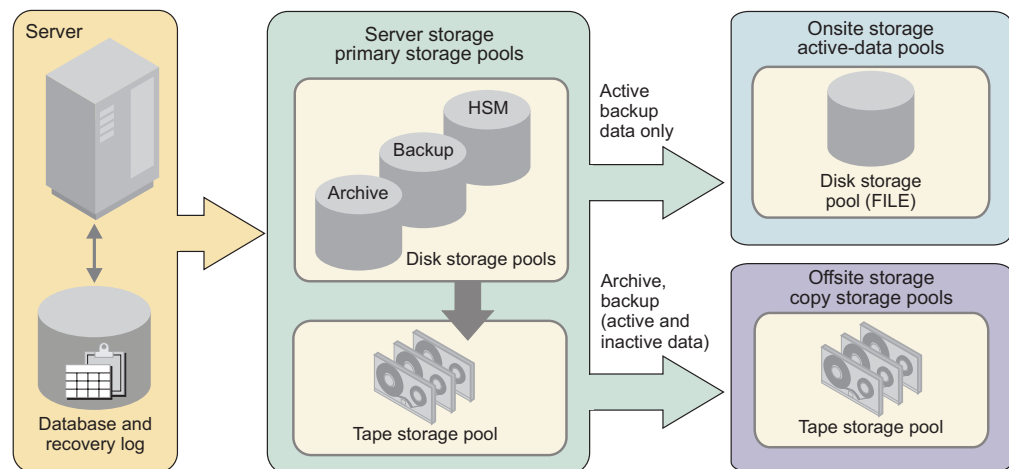


Figure 24. Example of server storage

To set up this server storage hierarchy, do the following:

## Procedure

1. Define the three disk storage pools, or use the three default storage pools that are defined when you install the server. Add volumes to the disk storage pools if you did not already do so.

For more information, see

“Configuring random access volumes on disk devices” on page 81

2. Define policies that direct the server to initially store files from clients in the disk storage pools. To do this, you define or change management classes and copy groups so that they point to the storage pools as destinations. Then, activate the changed policy. See “Changing policy” on page 486 for details.

Define another policy that specifies the active-data pool that you create as the destination for active data.

3. Assign nodes to the domains. Nodes whose active data you want to restore quickly must be assigned to the domain that specifies the active-data pool.
4. Attach one or more tape devices, or a tape library, to your server system.

For more information, see:

“Defining storage pools” on page 257

Chapter 6, “Configuring storage devices,” on page 97

5. Update the disk storage pools so that they point to the tape storage pool as the next storage pool in the hierarchy. See “Example: Updating storage pools” on page 263.
6. Define a copy storage pool and an active-data pool. The copy storage pool can use the same tape device or a different tape device as the primary tape storage pool. The active-data pool uses sequential-access disk storage (a FILE-type device class) for fast client restores. See “Defining copy storage pools and active-data pools” on page 422.
7. Set up administrative schedules or a script to back up the disk storage pools and the tape storage pool to the copy storage pool. Use the same or different schedules or scripts to copy active data to the active-data pool. Send the copy storage pool volumes off-site for safekeeping. See “Backing up primary storage pools” on page 908.

---

## Task tips for storage pools

Tivoli Storage Manager provides many functions, such as migration and reclamation, for optimizing data-storage operations. To take advantage of these functions, you can create specialized storage pools or specify certain properties in your storage pool definitions.

Table 21 gives tips on how to accomplish some tasks that are related to storage pools.

*Table 21. Goals and actions for storage pools*

| For this goal                                                                                                          | Do this                                   | For more information, see:                                    |
|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------|
| Keep the data for a group of client nodes, a single client node, or a client file space on as few volumes as possible. | Enable collocation for the storage pool.  | “Keeping client files together using collocation” on page 372 |
| Reduce the number of volume mounts needed to back up multiple clients.                                                 | Disable collocation for the storage pool. | “Keeping client files together using collocation” on page 372 |

Table 21. Goals and actions for storage pools (continued)

| For this goal                                                                                                                                                                                                                                                    | Do this                                                                                                                                                                                                 | For more information, see:                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Write data simultaneously to a primary storage pool and to copy storage pools and active-data pools.                                                                                                                                                             | Provide a list of copy storage pools and active-data pools when you define the primary storage pool.                                                                                                    | "Writing data simultaneously to primary, copy, and active-data pools" on page 346                                                                            |
| Specify how the server reuses tapes.                                                                                                                                                                                                                             | Set a reclamation threshold for the storage pool.<br><br>Optional: Identify a reclamation storage pool                                                                                                  | "Reclaiming space in sequential-access storage pools" on page 382                                                                                            |
| Move data from disk to tape automatically as needed.                                                                                                                                                                                                             | Set a migration threshold for the storage pool.<br><br>Identify the next storage pool.                                                                                                                  | "Migrating disk storage pools" on page 287                                                                                                                   |
| Move data from disk to tape automatically based on how frequently users access the data or how long the data has been in the storage pool.                                                                                                                       | Set a migration threshold for the storage pool.<br><br>Identify the next storage pool.<br><br>Set the migration delay period.                                                                           | "Migrating disk storage pools" on page 287                                                                                                                   |
| Improve client restore performance by using concurrent access to FILE volumes.                                                                                                                                                                                   | Implement a storage pool that is associated with the FILE device type.                                                                                                                                  | "Defining storage pools" on page 257<br><br>"Setting up copy storage pools and active-data pools" on page 280                                                |
| Back up your storage pools.                                                                                                                                                                                                                                      | Implement a copy storage pool.                                                                                                                                                                          | "Setting up copy storage pools and active-data pools" on page 280                                                                                            |
| Copy active data from a primary storage pool.                                                                                                                                                                                                                    | Implement an active-data pool.                                                                                                                                                                          | "Setting up copy storage pools and active-data pools" on page 280                                                                                            |
| Have clients back up directly to a tape storage pool.                                                                                                                                                                                                            | Define a sequential-access storage pool that uses a tape device class.<br><br>Change the policy that the clients use, so that the backup copy group points to the tape storage pool as the destination. | "Defining storage pools" on page 257<br><br>"Changing policy" on page 486                                                                                    |
| Make the best use of available tape drives and FILE volumes during reclamation and migration.                                                                                                                                                                    | Specify multiple concurrent processes.                                                                                                                                                                  | "Optimizing drive usage using multiple concurrent reclamation processes" on page 384<br><br>"Specifying multiple concurrent migration processes" on page 297 |
| Ensure that reclamation completes within the desired amount of time.                                                                                                                                                                                             | Limit the number of off-site volumes to be reclaimed.                                                                                                                                                   | "Reclamation of offsite volumes" on page 388<br><br>"Starting reclamation manually or in a schedule" on page 383                                             |
| For storage pools associated with random-access and sequential-access disk (DISK and FILE device classes), automatically create private volumes and preassign them to specified storage pools when predetermined space utilization thresholds have been reached. | Use the <b>DEFINE SPACETRIGGER</b> and <b>UPDATE SPACETRIGGER</b> commands to specify the number and size of volumes.                                                                                   | "Preparing volumes for random-access storage pools" on page 269<br><br>"Defining storage pool volumes" on page 271                                           |



Table 21. Goals and actions for storage pools (continued)

| For this goal                                                                                                                                                            | Do this                                                                                       | For more information, see:                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| For storage pools associated with random-access disk (DISK device class) and sequential-access disk (FILE device class), create and format volumes by using one command. | Use the <b>DEFINE VOLUME</b> command to specify the size and number of volumes to be created. | <p>"Preparing volumes for random-access storage pools" on page 269</p> <p>"Defining storage pool volumes" on page 271</p> |

## Managing storage pool volumes

Storage pool volumes are the physical media that are assigned to a storage pool. Storage pool volumes are either random-access or sequential-access, depending on the device type of the device class to which the storage pool is assigned.

The following are examples of volumes:

- Space that is allocated on a disk drive
- A tape cartridge

### Random-access storage pool volumes

Random-access storage pools consist of volumes on disk. Random-access storage pools are always associated with the DISK device class. All volumes in this type of storage pool have the same form.

A volume in a random-access storage pool is a fixed-size file that is created when you define a volume for the storage pool or when you use space triggers to automatically create volumes and assign them to specified storage pools.

#### Related tasks:

"Preparing volumes for random-access storage pools" on page 269

#### Related reference:

"Requirements for disk systems" on page 75

### Sequential-access storage pool volumes

Sequential-access volumes are volumes in data is accessed sequentially, one block at a time, one after the other. Each volume that is defined in a sequential-access storage pool must be the same type as the device class associated with the storage pool.

You can define volumes in a sequential-access storage pool or you can specify that the server dynamically acquire scratch volumes. You can also use a combination of defined and scratch volumes. What you choose depends on the amount of control you want over individual volumes.

You must decide whether to use scratch volumes for each storage pool that you define. If you do not use scratch volumes, you must define private volumes, or you can use space-triggers if the volume is assigned to a storage pool with a FILE device type. Tivoli Storage Manager keeps an inventory of volumes in each automated library it manages and tracks whether the volumes are in scratch or private status. When a volume mount is requested, Tivoli Storage Manager selects a scratch volume only if scratch volumes are allowed in the storage pool. The server can choose any scratch volume that is checked into the library.



You do not need to allocate volumes to different storage pools associated with the same automated library. Each storage pool that is associated with the library can dynamically acquire volumes from the library's inventory of scratch volumes. Even if only one storage pool is associated with a library, you do not need to explicitly define all of the volumes for the storage pool. The server automatically adds volumes to and deletes volumes from the storage pool.

**Tip:** A disadvantage of using scratch volumes is that volume usage information, which you can use to determine when the media has reached its end of life, is deleted when a private volume is returned to the scratch volume pool.

**Related tasks:**

“Preparing volumes for sequential-access storage pools” on page 270

## Types of sequential-access volumes

Each Tivoli Storage Manager sequential-access device type is associated with a particular type of storage pool volume.

The following list contains some examples of sequential-access volumes:

- Tape cartridge
- File

Table 22 lists the types of volumes that are associated with each device type.

*Table 22. Volume types*

| Device type   | Volume description                                                                                           | Label required |
|---------------|--------------------------------------------------------------------------------------------------------------|----------------|
| 3590          | IBM 3590 tape cartridge                                                                                      | Yes            |
| 3592          | IBM 3592 tape cartridge                                                                                      | Yes            |
| 4MM           | 4 mm tape cartridge                                                                                          | Yes            |
| 8MM           | 8 mm tape cartridge                                                                                          | Yes            |
| CENTERA       | A logical collection of files that are stored on the CENTERA storage device                                  | No             |
| DLT           | A digital linear tape                                                                                        | Yes            |
| ECARTRIDGE    | A cartridge tape that is used by a tape drive such as the StorageTek T10000 tape drive                       | Yes            |
| FILE          | A file in the file system of an operating system                                                             | No             |
| GENERICTAPE   | A tape that is compatible with the drives that are defined to the device class                               | Yes            |
| LTO           | IBM Ultrium tape cartridge                                                                                   | Yes            |
| NAS           | A tape drive that is used for NDMP backups by a network-attached storage (NAS) file server                   | Yes            |
| REMOVABLEFILE | A file on a removable medium. If the medium has two sides, each side is a separate volume.                   | Yes            |
| SERVER        | One or more objects that are archived in the server storage of another server                                | No             |
| VOLSAFE       | A StorageTek cartridge tape that is for write-once use on tape drives that are enabled for VolSafe function. | No             |

## Defined volumes

Use defined volumes when you want to control precisely which volumes are used in the storage pool. Defined volumes can also be useful when you want to establish a naming scheme for volumes.

You can also use defined volumes to reduce potential disk fragmentation and maintenance overhead for storage pools associated with random-access and sequential-access disk.

You must define private volumes to Tivoli Storage Manager, assigning each to a specific storage pool. However, if a storage pool contains only private volumes and runs out of them, storage operations to that pool stop until more volumes are defined.

## Scratch volumes

Use scratch volumes to enable the server to define a volume when needed and delete the volume when it becomes empty. Using scratch volumes frees you from the task of explicitly defining all of the volumes in a storage pool.

You can use tapes as scratch volumes, up to the number of scratch volumes you specified for the storage pool. Using scratch volumes allows Tivoli Storage Manager to acquire volumes as needed. A storage pool can request available scratch volumes up to the number specified for that storage pool.

The server tracks whether a volume being used was originally a scratch volume. Scratch volumes that the server acquired for a primary storage pool are deleted from the server database when they become empty. The volumes are then available for reuse by the server or other applications.

Scratch volumes in a copy storage pool or an active-data storage pool are handled in the same way as scratch volumes in a primary storage pool, except for volumes with the access value of off-site. If an off-site volume becomes empty, the server does not immediately return the volume to the scratch pool. The delay prevents the empty volumes from being deleted from the database, making it easier to determine which volumes should be returned to the on-site location. The administrator can query the server for empty off-site copy storage pool volumes or active-data pool volumes, and return them to the on-site location. The volume is returned to the scratch pool only when the access value is changed to READWRITE, READONLY, or UNAVAILABLE.

For scratch volumes that were acquired in a FILE device class, the space that the volumes occupied is freed by the server and returned to the file system.

## Preparing volumes for random-access storage pools

Volumes in random-access storage pools must be defined before the server can access them.

### About this task

| Task                                     | Required Privilege Class                                            |
|------------------------------------------|---------------------------------------------------------------------|
| Define volumes in any storage pool       | System or unrestricted storage                                      |
| Define volumes in specific storage pools | System, unrestricted storage, or restricted storage for those pools |

## Results

To prepare a volume for use in a random-access storage pool, define the volume. For example, enter the following command to define a 21 MB volume named stgv01.001 for the BACKUPPOOL storage pool that is located in the path *c:\program files\tivoli\tsm\server*:

```
define volume backuppool 'c:\program files\tivoli\tsm\server\stgv01.001'
 formatsize=21
```

If you do not specify a full path name for the volume name, the command uses the path associated with the registry key of this server instance.

You can also define volumes in a single step using the DEFINE VOLUME command. For example, to define ten, 5000 MB volumes in a random-access storage pool that uses a DISK device class, you would enter the following command:

```
define volume diskpool diskvol numberofvolumes=10 formatsize=5000
```

### Tips:

1. For important disk-related information, see “Requirements for disk systems” on page 75.
2. The file system where storage pool volumes are allocated can have an effect on performance and reliability. For better performance in backing up and restoring large numbers of small files, allocate storage pool volumes on a FAT file system. To take advantage of the ability of the operating system to recover from problems that can occur during I/O to a disk, allocate storage pool volumes on NTFS.

You can also use a space trigger to automatically create volumes assigned to a particular storage pool.

## Preparing volumes for sequential-access storage pools

For most purposes, in a sequential-access storage pool, the server can use dynamically acquired scratch volumes, volumes that you define, or a combination of both.

### About this task

For sequential-access storage pools with a FILE or SERVER device type, no labeling or other preparation of volumes is necessary. For sequential-access storage pools associated with device types other than a FILE or SERVER, you must prepare volumes for use.

When the server accesses a sequential-access volume, it checks the volume name in the header to ensure that the correct volume is being accessed. To prepare a volume:

### Procedure

1. Label the volume. Table 22 on page 268 shows the types of volumes that require labels. You must label those types of volumes before the server can use them.

**Tip:** When you use the **LABEL LIBVOLUME** command with drives in an automated library, you can label and check in the volumes with one command.

2. For storage pools in automated libraries, use the **CHECKIN LIBVOLUME** command to check the volume into the library.
3. If you have not allowed scratch volumes in the storage pool, you must identify the volume, by name, when you define it.

If you allowed scratch volumes in the storage pool by specifying a value greater than zero for the **MAXSCRATCH** parameter, you can let the server use scratch volumes, identify volumes by name, or do both.

**Related tasks:**

“Labeling media” on page 143

“Checking media into automated library devices” on page 144

## Defining storage pool volumes

You can use defined volumes to control precisely which volumes are used in the storage pool. Using defined volumes can also be useful when you want to establish a naming scheme for volumes.

### Before you begin

Before you define storage pool volumes, estimate how much client data you want to store. Consider defining at least enough volumes to hold one day of client backups.

### About this task

| Task                                     | Required Privilege Class                                            |
|------------------------------------------|---------------------------------------------------------------------|
| Define volumes in any storage pool       | System or unrestricted storage                                      |
| Define volumes in specific storage pools | System, unrestricted storage, or restricted storage for those pools |

When you define a storage pool volume, you inform the server that the volume is available for storing backup, archive, or space-managed data.

Each volume that is used by a server for any purpose must have a unique name. This requirement applies to all volumes, whether the volumes are used for storage pools, or used for operations such as database backup or export. The requirement also applies to volumes that are in different libraries but that are used by the same server.

For a sequential-access storage pool, the server can use dynamically acquired scratch volumes, volumes that you define, or a combination.

To format and define storage pool volumes, use the **DEFINE VOLUME** command. For example, to define a volume that is named VOL1 in the ENGBACK3 tape storage pool, enter:

```
define volume engback3 vol1
```

For storage pools associated with FILE device classes, you can define private volumes in a single step by using the **DEFINE VOLUME** command. For example, to define 10, 5000 MB volumes, in a sequential-access storage pool that uses a FILE device class, you would enter the following command.

```
define volume filepool filevol numberofvolumes=10 formatsize=5000
```

For storage pools associated with the FILE device class, you can also use the **DEFINE SPACETRIGGER** and **UPDATE SPACETRIGGER** commands to have the server create volumes and assign them to a specified storage pool when predetermined space-utilization thresholds are exceeded. One volume must be predefined.

### Acquiring scratch volumes dynamically

If you allow sequential-access storage pools to use scratch volumes, you do not need to define volumes. You can control the maximum number of scratch volumes that the server can request by using the **MAXSCRATCH** parameter on the **DEFINE STGPOOL** and **UPDATE STGPOOL** command.

### About this task

To allow the storage pool to acquire volumes as needed, set the **MAXSCRATCH** parameter to a value greater than zero. The server automatically defines the volumes as they are acquired. The server also automatically deletes scratch volumes from the storage pool when the server no longer needs them.

Before the server can use a scratch volume with a device type other than FILE or SERVER, the volume must have a label.

**Restriction:** Tivoli Storage Manager accepts only tapes that are labeled with IBM standard labels. IBM standard labels are similar to ANSI Standard X3.27 labels except that the IBM standard labels are written in EBCDIC (extended binary coded decimal interchange code). For a list of IBM media sales contacts who can provide compatible tapes, go to the IBM website. If you are using non-IBM storage devices and media, consult your tape-cartridge distributor.

#### Related tasks:

“Preparing volumes for sequential-access storage pools” on page 270

## Updating storage pool volumes

You can update a volume to reset an error state to an access mode of read/write. You can also update a volume to change the its location in a sequential-access storage pool. or to change the access mode of the volume, for example, if a tape cartridge is moved off-site or is damaged.

### About this task

| Task           | Required Privilege Class |
|----------------|--------------------------|
| Update volumes | System or operator       |

To change the properties of a volume that has been defined to a storage pool, issue the **UPDATE VOLUME** command. For example, suppose you accidentally damage a volume named VOL1. To change the access mode to unavailable so that the server does not try to write or read data from the volume, issue the following command:

```
update volume vol1 access=unavailable
```

For details about access modes, see “Access modes for storage pool volumes” on page 273.

## Volume properties that you can update

Update volume properties by changing the values of those properties in the volume definition.

Table 23 lists volume properties that you can update.

Table 23. Information for updating a storage pool volume

| Information               | Explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Volume name<br>(Required) | Specifies the name of the storage pool volume to be updated. You can specify a group of volumes to update by using wildcard characters in the volume name. You can also specify a group of volumes by specifying the storage pool, device class, current access mode, or status of the volumes you want to update. See the parameters that follow.                                                                                                                                                                                                                                                                                                                                 |
| New access mode           | <p>Specifies the new access mode for the volume (how users and server processes such as migration can access files in the storage pool volume). See “Access modes for storage pool volumes” for descriptions of access modes.</p> <p>A random-access volume must be varied offline before you can change its access mode to <i>unavailable</i> or <i>destroyed</i>. To vary a volume offline, use the VARY command. See “Varying disk volumes online or offline” on page 82.</p> <p>If a scratch volume that is empty and has an access mode of off-site is updated so that the access mode is read/write, read-only, or unavailable, the volume is deleted from the database.</p> |
| Location                  | Specifies the location of the volume. This parameter can be specified only for volumes in sequential-access storage pools.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Storage pool              | Restricts the update to volumes in the specified storage pool.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Device class              | Restricts the update to volumes in the specified device class.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Current access mode       | Restricts the update to volumes that currently have the specified access mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Status                    | Restricts the update to volumes with the specified status (online, offline, empty, pending, filling, or full).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Preview                   | Specifies whether you want to preview the update operation without actually performing the update.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Access modes for storage pool volumes

Access to a volume in a storage pool is determined by the access mode assigned to that volume. You can manually change the access mode of a volume, or the server can change the access mode based on what happens when it tries to access a volume.

For example, if the server cannot write to a volume having read/write access mode, the server automatically changes the access mode to read-only.

The following access modes apply to storage pool volumes:

### Read/write

Allows files to be read from or written to a volume in the storage pool.

If the server cannot write to a read/write access volume, the server automatically changes the access mode to read-only.

If a scratch volume that is empty and has an access mode of off-site is updated so that the access mode is read/write, the volume is deleted from the database.

#### **Read-only**

Allows files to be read from but not written to a disk or tape volume.

If a scratch volume that is empty and has an access mode of off-site is updated so that the access mode is read-only, the volume is deleted from the database.

#### **Unavailable**

Specifies that the volume is not available for any type of access by the server.

You must vary offline a random-access volume before you can change its access mode to *unavailable*. To vary a volume offline, use the VARY command. See “Varying disk volumes online or offline” on page 82.

If a scratch volume that is empty and has an access mode of off-site is updated so that the access mode is unavailable, the volume is deleted from the database.

#### **Destroyed**

Specifies that a primary storage pool volume has been permanently damaged. Neither users nor system processes (like migration) can access files stored on the volume.

This access mode is used to indicate an entire volume that should be restored using the RESTORE STGPOOL or RESTORE VOLUME command. After all files on a destroyed volume are restored to other volumes, the destroyed volume is automatically deleted from the database. See

Only volumes in primary storage pools can be updated to an access mode of destroyed.

You must vary offline a random-access volume before you can change its access mode to *destroyed*. To vary a volume offline, use the VARY command. See “Varying disk volumes online or offline” on page 82. Once you update a random-access storage pool volume to destroyed, you cannot vary the volume online without first changing the access mode.

If you update a sequential-access storage pool volume to destroyed, the server does not attempt to mount the volume.

If a volume contains no files and the UPDATE VOLUME command is used to change the access mode to destroyed, the volume is deleted from the database.

#### **Offsite**

Specifies that a copy storage pool volume or active-data pool volume is at an off-site location and therefore cannot be mounted. Use this mode to help you track volumes that are off-site. The server treats off-site volumes differently, as follows:

- Mount requests are not generated for off-site volumes.
- Data can be reclaimed or moved from off-site volumes by retrieving files from other storage pools.
- Empty, off-site scratch volumes are not deleted from the copy storage pool or from the active-data pool.

You can only update volumes in a copy storage pool or an active-data pool to off-site access mode. Volumes that have the device type of SERVER



(volumes that are actually archived objects stored on another Tivoli Storage Manager server) cannot have an access mode of off-site.

---

## Setting up a storage pool hierarchy

To establish a hierarchy, identify the next storage pool, sometimes called the subordinate storage pool. The server migrates data to the next storage pool if the original storage pool is full or unavailable.

### About this task

#### Restrictions:

- You cannot establish a chain of storage pools that leads to an endless loop. For example, you cannot define StorageB as the next storage pool for StorageA, and then define StorageA as the next storage pool for StorageB.
- The storage pool hierarchy includes only primary storage pools. It does not include copy storage pools or active-data pools. See “Backing up the data in a storage hierarchy” on page 279.
- A storage pool must use the NATIVE or NONBLOCK data formats to be part of a storage pool hierarchy. For example, a storage pool that uses the NETAPPDUMP data format cannot be part of a storage pool hierarchy.

For detailed information about how migration between storage pools works, see “Migrating files in a storage pool hierarchy” on page 285.

## Example: Defining a storage pool hierarchy

You determined that an engineering department requires a separate storage hierarchy. You set up policy so that the server initially stores backed up files for this department to a disk storage pool. When that pool fills, you want the server to migrate files to a tape storage pool.

### About this task

You want the storage pools to have the following characteristics:

- Primary storage pool on disk
  - Name the storage pool ENGBACK1.
  - Limit the size of the largest file that can be stored to 5 MB. The server stores files that are larger than 5 MB in the tape storage pool.
  - Files migrate from the disk storage pool to the tape storage pool when the disk storage pool is 85% full. File migration to the tape storage pool stops when the disk storage pool is down to 40% full.
  - Use caching, so that migrated files stay on disk until the space is needed for other files.
- Primary storage pool on tape:
  - Name the storage pool BACKTAPE.
  - Use the device class TAPE, which has already been defined, for this storage pool.
  - Do not set a limit for the maximum file size, because this is the last storage pool in the hierarchy.
  - Use scratch volumes for this pool, with a maximum number of 100 volumes.



You can define the storage pools in a storage pool hierarchy from the top down or from the bottom up. Defining the hierarchy from the bottom up requires fewer steps. To define the hierarchy from the bottom up:

### Procedure

1. Define the storage pool named BACKTAPE with the following command:

```
define stgpool backtape tape
description='tape storage pool for engineering backups'
maxsize=nolimit collocate=node maxscratch=100
```

2. Define the storage pool named ENGBACK1 with the following command:

```
define stgpool engback1 disk
description='disk storage pool for engineering backups'
maxsize=5M nextstgpool=backtape highmig=85 lowmig=40
```

## Example: Updating a storage pool hierarchy

You already defined the ENGBACK1 disk storage pool. Now you decide to set up a tape storage pool to which files from ENGBACK1 can migrate.

### About this task

If you have already defined the storage pool at the top of the hierarchy, you can update the storage hierarchy to include a new storage pool. You can update the storage pool by using the **UPDATE STGPPOOL** command.

To define the new tape storage pool and update the hierarchy:

### Procedure

1. Define the storage pool named BACKTAPE with the following command:

```
define stgpool backtape tape
description='tape storage pool for engineering backups'
maxsize=nolimit collocate=node maxscratch=100
```

2. Update the storage-pool definition for ENGBACK1 to specify that BACKTAPE is the next storage pool defined in the storage hierarchy:

```
update stgpool engback1 nextstgpool=backtape
```

## How the server groups files for storage

When client files are backed up or archived, the server can group them into an aggregate of files. By controlling the size of aggregates, you can control the performance of client operations.

The size of the aggregate depends on the sizes of the client files being stored, and the number of bytes and files that are allowed for a single transaction. Two options affect the number of files and bytes allowed for a single transaction. **TXNGROUPMAX**, in the server options file, affects the number of files allowed. **TXNBYTELIMIT**, in the client options file, affects the number of bytes allowed in the aggregate.

- The **TXNGROUPMAX** option in the server options file indicates the maximum number of logical files (client files) that a client might send to the server in a single transaction. The server might create multiple aggregates for a single transaction, depending on how large the transaction is.

It is possible to affect the performance of client backup, archive, restore, and retrieve operations by using a larger value for this option. When you transfer multiple small files, increasing the **TXNGROUPMAX** option can improve throughput for operations to tape.

**Important:** If you increase the value of the **TXNGROUPMAX** option by a large amount, watch for possible effects on the recovery log. A larger value for the **TXNGROUPMAX** option can result in increased utilization of the recovery log, and an increased length of time for a transaction to commit. If the effects are severe enough, they can lead to problems with operation of the server.

You can override the value of the **TXNGROUPMAX** server option for individual client nodes by using the **TXNGROUPMAX** parameter in the **REGISTER NODE** and **UPDATE NODE** commands.

- The **TXNBYTELIMIT** option in the client options file indicates the total number of bytes that the client can send to the server in a single transaction.

When a Tivoli Storage Manager for Space Management client (HSM client) migrates files to the server, the files are not grouped into an aggregate.

Server file aggregation is disabled for client nodes storing data that is associated with a management class that has a copy group whose destination is a Centera storage pool.

**Related concepts:**

“Files moved as a group between client and server” on page 679

## Where the server stores files

When a client file is backed up, archived, or migrated, the server verifies the management class that is bound to the file. The management class specifies the destination storage pool in which to store the file.

The server checks the destination storage pool to determine:

- If it is possible to write file data to the storage pool (access mode).
- If the size of the physical file exceeds the maximum file size allowed in the storage pool. For backup and archive operations, the physical file may be an aggregate or a single client file.
- Whether sufficient space is available on the available volumes in the storage pool.
- What the next storage pool is, if any of the previous conditions prevent the file from being stored in the storage pool that is being checked.

Using these factors, the server determines if the file can be written to that storage pool or the next storage pool in the hierarchy.

**Subfile backups:** When the client backs up a subfile, it still reports the size of the entire file. Therefore, allocation requests against server storage and placement in the storage hierarchy are based on the full size of the file. The server does not put a subfile in an aggregate with other files if the size of the entire file is too large to put in the aggregate. For example, the entire file is 8 MB, but the subfile is only 10 KB. The server does not typically put a large file in an aggregate, so the server begins to store this file as a stand-alone file. However, the client sends only 10 KB, and it is now too late for the server to put this 10 KB file with other files in an aggregate. As a result, the benefits of aggregation are not always realized when clients back up subfiles.

## Example: How the server determines where to store files in a hierarchy

The server determines where to store a file based upon the destination storage pool specified in the copy group of the management class to which the file is bound. The server also checks the capacity utilization of the storage pool and the maximum file size allowed.

Assume a company has a storage pool hierarchy as shown in Figure 25.

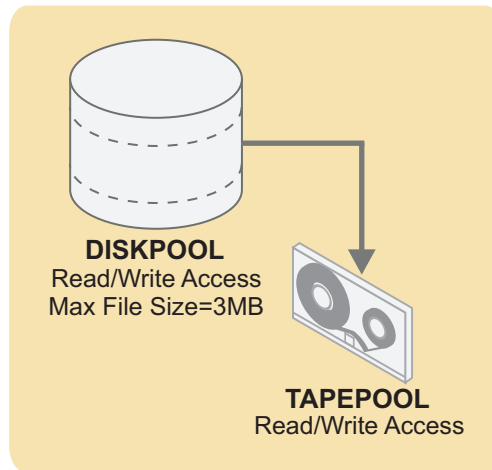


Figure 25. Storage hierarchy example

The storage pool hierarchy consists of two storage pools:

### **DISKPOOL**

The top of the storage hierarchy. It contains fast disk volumes for storing data.

### **TAPEPOOL**

The next storage pool in the hierarchy. It contains tape volumes accessed by high-performance tape drives.

Assume a user wants to archive a 5 MB file that is named *FileX*. *FileX* is bound to a management class that contains an archive copy group whose storage destination is DISKPOOL, see Figure 25.

When the user archives the file, the server determines where to store the file based on the following process:

1. The server selects DISKPOOL because it is the storage destination specified in the archive copy group.
2. Because the access mode for DISKPOOL is read/write, the server checks the maximum file size allowed in the storage pool.

The maximum file size applies to the physical file being stored, which may be a single client file or an aggregate. The maximum file size allowed in DISKPOOL is 3 MB. *FileX* is a 5 MB file and therefore cannot be stored in DISKPOOL.

3. The server searches for the next storage pool in the storage hierarchy.

If the DISKPOOL storage pool has no maximum file size specified, the server checks for enough space in the pool to store the physical file. If there is not enough space for the physical file, the server uses the next storage pool in the storage hierarchy to store the file.

4. The server checks the access mode of TAPEPOOL, which is the next storage pool in the storage hierarchy. The access mode for TAPEPOOL is read/write.
5. The server then checks the maximum file size allowed in the TAPEPOOL storage pool. Because TAPEPOOL is the last storage pool in the storage hierarchy, no maximum file size is specified. Therefore, if there is available space in TAPEPOOL, FileX can be stored in it.

## Backing up the data in a storage hierarchy

You can use copy storage pools and active-data pools to protect the data in primary storage pools. Copy storage pools can contain any combination of active and inactive data, archive data, or space-migrated data. Active-data pools contain only active versions of client backup data.

### Before you begin

Restoring a primary storage pool from an active-data pool might cause some or all inactive files to be deleted from the database if the server determines that an inactive file needs to be replaced but cannot find it in the active-data pool.

As a best practice, therefore, and to prevent the permanent loss of inactive versions of client backup data, you should create a minimum of one active-data pool, which contains active-data only, and one copy storage pool, which contains both active and inactive data. To recover from a disaster, use the active-data pool to restore critical client node data, and then restore the primary storage pools from the copy storage pool. Do not use active-data pools for recovery of a primary pool or volume unless the loss of inactive data is acceptable.

### About this task

Neither copy storage pools nor active-data pools are part of a storage hierarchy, which, by definition, consists only of primary storage pools. Data can be stored in copy storage pools and active-data pools using the following methods:

- Including the **BACKUP STGPOOL** and **COPY ACTIVE DATA** commands in administrative scripts or schedules so that data is automatically backed up or copied at regular intervals.
- Enabling the simultaneous-write function so that data is written to primary storage pools, copy storage pools, and active-data pools during the same transaction. Writing data simultaneously to copy storage pools is supported for backup, archive, space-management, and import operations. Writing data simultaneously to active-data pools is supported only for client backup operations and only for active backup versions.
- (*copy storage pools only*) Manually issuing the **BACKUP STGPOOL** command, specifying the primary storage pool as the source and a copy storage pool as the target. The **BACKUP STGPOOL** command backs up whatever data is in the primary storage pool (client backup data, archive data, and space-managed data).
- (*active-data pools only*) Manually issuing the **COPY ACTIVE DATA** command, specifying the primary storage pool as the source and an active-data pool as the target. The **COPY ACTIVE DATA** command copies only the active versions of client backup data. If an aggregate that is being copied contains all active files, then the entire aggregate is copied to the active-data pool during command processing. If an aggregate that is being copied contains some inactive files, the aggregate is reconstructed during command processing into a new aggregate without the inactive files.

For efficiency, you can use a single copy storage pool and a single active-data pool to back up all primary storage pools that are linked in a storage hierarchy. By backing up all primary storage pools to one copy storage pool and one active-data pool, you do not need to repeatedly copy a file when the file migrates from its original primary storage pool to another primary storage pool in the storage hierarchy.

In most cases, a single copy storage pool and a single active-data pool can be used for backup of all primary storage pools. However, the number of copy storage pools and active-data pools you actually need depends on whether you have more than one primary storage pool hierarchy and on the type of disaster recovery protection you want to implement. Multiple copy storage pools and active-data pools might be needed to handle particular situations, including the following:

- Special processing of certain primary storage hierarchies (for example, archive storage pools or storage pools that are dedicated to priority clients)
- Creation of multiple copies for multiple locations (for example, to keep one copy onsite and one copy offsite)
- Rotation of full storage pool backups

Inactive files in volumes in an active-data pool are deleted by reclamation processing. The rate at which reclaimable space accumulates in active-data pool volumes is typically faster than the rate for volumes in non-active-data pools. If reclamation of volumes in an active-data pool is occurring too frequently, requiring extra resources such as tape drives and libraries to mount and dismount volumes, you can adjust the reclamation threshold until the rate of reclamation is acceptable. The default reclamation threshold for active-data pools is 60 percent, which means that reclamation begins when the storage pool reaches 60 percent of capacity. Accelerated reclamation of volumes has more of an effect on active-data pools that use removable media and, in particular, on removable media that is taken offsite.

#### **Related tasks:**

“Setting up copy storage pools and active-data pools”

“Backing up primary storage pools” on page 908

## **Setting up copy storage pools and active-data pools**

To back up the data in primary storage pools, use copy storage pools, active-data pools, or combination of the two.

### **Procedure**

To set up a copy storage pool or an active-data pool:

1. Define a copy storage pool or active-data pool. For details, see “Defining copy storage pools and active-data pools” on page 422.
2. (*active-data pools only*) Create a policy domain, and specify the name of the active-data pool as the value of the **ACTIVEDATAPOL** parameter. To learn more about creating domains and the **ACTIVEDATAPOL** parameter, see “Defining and updating a policy domain” on page 493.
3. (*active-data pools only*) Identify the nodes whose active backup data is to be stored in the active-data pool, and then assign the nodes to the domain defined in step 2. For details about assigning nodes to a domain, see the **REGISTER NODE** command or the **UPDATE NODE** command.
4. (*optional*) If you want to use the simultaneous-write function, update the primary storage pool definition, specifying the name of the copy storage pool and active-data pool as the values of the **COPYSTGPOL**s and **ACTIVEDATAPOL**s

parameters, respectively. For details about the simultaneous-write function, see “Writing data simultaneously to primary, copy, and active-data pools” on page 346.

Ensure that client sessions have sufficient mount points. Each session requires one mount point for the primary storage pool and a mount point for each copy storage pool and each active-data pool. To allow a sufficient number of mounts points, use the **MAXNUMMP** parameter on the **REGISTER NODE** or **UPDATE NODE** commands.

5. Set up administrative schedules or scripts to automatically issue the **BACKUP STGPPOOL** and **COPY ACTIVE DATA** commands. See “Basic administrative command schedules” on page 612 and “Tivoli Storage Manager server scripts” on page 618.

### Example: Setting up an active-data pool for fast client restore:

A sequential-access disk (FILE) device class is used to set up an active-data pool for fast restore of client-node data.

### Before you begin

Decide which client nodes have data that needs to be restored quickly if a disaster occurs. Only the data belonging to those nodes should be stored in the active-data pool.

### About this task

For the purposes of this example, the following definitions already exist on the server:

- The default STANDARD domain, STANDARD policy set, STANDARD management class, and STANDARD copy group.
- A primary storage pool, BACKUPPOOL, and a copy storage pool, COPYPOOL. BACKUPPOOL is specified in the STANDARD copy group as the storage pool in which the server initially stores backup data. COPYPOOL contains copies of all the active and inactive data in BACKUPPOOL.
- Three nodes that are assigned to the STANDARD domain (NODE1, NODE2, and NODE 3).
- Two mount points assigned for each client session.
- A FILE device class named FILECLASS.

You have identified NODE2 as the only high-priority node, so you need to create a new domain to direct the data belonging to that node to an active-data pool. To set up and enable the active-data pool, follow these steps:

### Procedure

1. Define the active-data pool:  
`DEFINE STGPPOOL ADPPPOOL FILECLASS POOLTYPE=ACTIVEDATA MAXSCRATCH=1000`
2. Define a new domain and specify the active-data pool in which you want to store the data belonging to NODE2:  
`DEFINE DOMAIN ACTIVEDOMAIN ACTIVEDESTINATION=ADPPPOOL`
3. Define a new policy set:  
`DEFINE POLICYSET ACTIVEDOMAIN ACTIVEPOLICY`
4. Define a new management class:  
`DEFINE MGMTCLASS ACTIVEDOMAIN ACTIVEPOLICY ACTIVEMGMT`

5. Define a backup copy group:

```
DEFINE COPYGROUP ACTIVEDOMAIN ACTIVEPOLICY ACTIVEMGMT DESTINATION=BACKUPPOOL
```

This command specifies that the active and inactive data belonging to client nodes that are members of ACTIVEDOMAIN will be backed up to BACKUPPOOL. Note that this is the destination storage pool for data backed up from nodes that are members of the STANDARD domain.

6. Assign the default management class for the active-data pool policy set:

```
ASSIGN DEFMGMTCLASS ACTIVEDOMAIN ACTIVEPOLICY ACTIVEMGMT
```

7. Activate the policy set for the active-data pool:

```
ACTIVATE POLICYSET ACTIVEDOMAIN ACTIVEPOLICY
```

8. Assign the high-priority node, NODE2, to the new domain:

```
UPDATE NODE NODE2 DOMAIN=ACTIVEDOMAIN
```

A node can belong to only one domain. When you update a node by changing its domain, you remove it from its current domain.

9. (optional) Update the primary storage pool, BACKUPPOOL, with the name of the active-data pool, ADPPool, where the server simultaneously will write data during a client backup operation:

```
UPDATE STGPPOOL BACKUPPOOL ACTIVEDATAPools=ADPPool
```

Only active versions of backup data can be simultaneously written to active-data pools.

10. To ensure that copies of active data are complete, define a schedule to copy active data from BACKUPPOOL to ADPPool every day at 8:00 p.m.:

```
DEFINE SCHEDULE COPYACTIVE_BACKUPPOOL TYPE=ADMINISTRATIVE
 CMD="COPY ACTIVEDATA BACKUPPOOL ADPPool" ACTIVE=YES
 STARTTIME=20:00 PERIOD=1
```

Instead of defining a schedule, you can issue the COPY ACTIVEDATA command manually whenever it is convenient to copy the active data.

## Results

Every time NODE2 stores data into BACKUPPOOL, the server simultaneously writes the data to ADPPool. The schedule, COPYACTIVE\_BACKUPPOOL, ensures that any data that was not stored during simultaneous-write operations is copied to the active-data pool. When client nodes NODE1 and NODE3 are backed up, their data is stored in BACKUPPOOL only, and not in ADPPool. When the administrative schedule runs, only the data belonging to NODE2 is copied to the active-data pool.

**Remember:** If you want all the nodes belonging to an existing domain to store their data in the active-data pool, then you can skip steps 2 through 8. Use the UPDATE DOMAIN command to update the STANDARD domain, specifying the name of the active-data pool, ADPPool, as the value of the ACTIVEDESTINATION parameter.



### Example: Setting up an active-data pool to reduce media resources:

Backup data is simultaneously written to an active-data pool so that volumes in the pool can be taken off-site.

#### About this task

In addition to using active-data pools for fast restore of client-node data, you can also use active-data pools to reduce the number of tape volumes that are stored either onsite or offsite for disaster recovery. This example assumes that, in your current configuration, all data is backed up to a copy storage pool and taken off-site. However, your goal is to create an active-data pool, take the volumes in that pool off-site, and maintain the copy storage pool onsite to recover primary storage pools.

**Attention:** Active-data pools should not be considered for recovery of a primary pool or volume unless the loss of inactive data is acceptable.

The following definitions already exist on the server:

- The default STANDARD domain, STANDARD policy set, STANDARD management class, and STANDARD copy group.
- A primary storage pool, BACKUPPOOL, and a copy storage pool, COPYPOOL. BACKUPPOOL is specified in the STANDARD copy group as the storage pool in which the server initially stores backup data. COPYPOOL contains copies of all the active and inactive data in BACKUPPOOL.
- An administrative schedule, named BACKUP\_BACKUPPOOL, that issues a BACKUP STGPOOL command to back up the data in BACKUPPOOL to COPYPOOL. The schedule runs every day at 10:00 p.m.
- Three nodes that are assigned to the STANDARD domain (NODE1, NODE2, and NODE 3).
- Two mount points for each client session.
- A device class of type 3592 named 3592CLASS.

#### Procedure

To set up and enable an active-data pool, follow these steps:

1. Define the active-data pool:  
`DEFINE STGPOOL ADPPPOOL 3592CLASS POOLTYPE=ACTIVEDATA MAXSCRATCH=1000`
2. Update the STANDARD domain to allow data from all nodes to be stored in the active-data pool:  
`UPDATE DOMAIN STANDARD ACTIVEDESTINATION=ADPPPOOL`
3. Optional: To set up simultaneous write operations, complete the following steps:
  - Update the primary storage pool, BACKUPPOOL, with the name of the active-data pool, ADPPPOOL, where the server writes data simultaneously during client backup operations:  
`UPDATE STGPOOL BACKUPPOOL ACTIVEDATAPOOL=ADPPPOOL`

Only active versions of backup data can be simultaneously written to active-data pools.

- For each node, update the maximum number of mount points that are allowed to include the primary storage pool, the copy storage pool, and the active-data pool:



```
UPDATE NODE NODE2 MAXNUMP=3
```

4. To ensure that copies of active data are complete, define a schedule to copy active data from BACKUPPOOL to ADPPool every day at 8:00 p.m.:

```
DEFINE SCHEDULE COPYACTIVE_BACKUPPOOL TYPE=ADMINISTRATIVE
CMD="COPY ACTIVATEDATA BACKUPPOOL ADPPool" ACTIVE=YES STARTTIME=20:00 PERIOD=1
```

Instead of defining a schedule, you can issue the COPY ACTIVATEDATA command manually whenever it is convenient to copy the active data.

## Results

Every time data is stored into BACKUPPOOL, the data is simultaneously written to ADPPool. The schedule, COPYACTIVE\_BACKUPPOOL, ensures that any data that was not stored during a simultaneous-write operation is copied to the active-data pool. You can now move the volumes in the active-data pool to a safe location offsite.

## What to do next

If your goal is to replace the copy storage pool with the active-data pool, complete the following steps. As a best practice and to protect your inactive data, however, you should maintain the copy storage pool so that you can restore inactive versions of backup data if required. If the copy storage pool contains archive or files that were migrated by a Tivoli Storage Manager for Space Management client, do not delete it.

1. Stop backing up to the copy storage pool:

```
DELETE SCHEDULE BACKUP_BACKUPPOOL
UPDATE STGPOOL BACKUPPOOL COPYSTGPools=""
```

2. After all data is copied to the active-data pool, delete the copy storage pool and its volumes.

## Staging client data from disk to tape

Typically, client backup data is stored initially in disk-based storage pools. To make room for additional backups, you can migrate the older data to tape. If you are using copy storage pools or active-data pools, store data in those pools before you begin the migration process.

### About this task

Typically you need to ensure that you have enough disk storage to process one night's worth of the clients' incremental backups. While not always possible, this guideline proves to be valuable when considering storage pool backups.

For example, suppose you have enough disk space for nightly incremental backups for clients, but not enough disk space for a FILE-type, active-data pool. Suppose also that you have tape devices. With these resources, you can set up the following pools:

- A primary storage pool on disk, with enough volumes assigned to contain the nightly incremental backups for clients
- A primary storage pool on tape, which is identified as the next storage pool in the hierarchy for the disk storage pool
- An active-data pool on tape
- A copy storage pool on tape

You can then schedule the following steps every night:

### Procedure

1. Perform an incremental backup of the clients to the disk storage pool.
2. After clients complete their backups, back up the active and inactive versions in the disk primary storage pool (now containing the incremental backups) to the copy storage pool. Then copy the active backup versions to the active-data pool.

Backing up disk storage pools before migration processing allows you to copy as many files as possible while they are still on disk. This saves mount requests while performing your storage pool backups. If the migration process starts while active data is being copied to active-data pools or while active and inactive data is being backed up to copy storage pools, some files might be migrated before they are copied or backed up.

3. Start the migration of the files in the disk primary storage pool to the tape primary storage pool (the next pool in the hierarchy) by lowering the high migration threshold. For example, lower the threshold to 40%.

When this migration completes, raise the high migration threshold back to 100%.

4. To ensure that all files are backed up, back up the tape primary storage pool to the copy storage pool. In addition, copy the active backup data in the tape primary storage pool to the active-data pool.

The tape primary storage pool must still be backed up (and active files copied) to catch any files that might have been missed in the backup of the disk storage pools (for example, large files that went directly to sequential media).

#### Related tasks:

“Estimating space needs for storage pools” on page 392

## Migrating files in a storage pool hierarchy

To maintain free space in primary storage pools, the Tivoli Storage Manager server can automatically migrate data from one primary pool to the next in the hierarchy.

### About this task

The migration process can help to ensure that there is sufficient free space in the storage pools at the top of the hierarchy, where faster devices can provide the most benefit to clients. For example, the server can migrate data that is stored in a random-access disk storage pool to a slower, but less expensive sequential-access storage pool.

You can control the following options:

#### When migration begins and ends

Migration thresholds are used to control when migration begins and ends. Thresholds are set as levels of the space that is used in a storage pool. It is expressed as a percentage of the total space available in the storage pool. For random-access and sequential-access disk storage pools, the server compares the threshold to the amount of data that is stored in the pool as a percentage of the total data capacity of the volumes in the pool. Total data capacity for sequential-access disk storage pools includes the capacity of all scratch volumes that are specified for the pool. For tape storage pools, the server compares the threshold to the number of volumes that contain data as a percentage of the total number of volumes available to the pool, including scratch volumes.

You can also schedule migration activities to occur at optimal times in your environment. In addition, you can specify the following options:

- How long migration can run before it is automatically canceled
- Whether the server attempts reclamation before migration
- Whether the migration process runs in the background or foreground

#### **How the server chooses files to migrate**

By default, the server does not consider how long a file has been stored in a storage pool, or how long since the file was accessed before it chooses files to migrate. There are optional parameters available for you to change the default behavior of migration. To ensure that files remain in a storage pool for a minimum number of days before the server migrates them to another pool, you can set a migration delay period for the storage pool. For random-access disk storage pools, the last time the file was accessed is also considered for migration delay. For sequential-access storage pools, including sequential-access disk storage pools that are associated with a FILE device class, all files on a volume must exceed migration delay period before the server can migrate all of the files on the volume.

#### **The number of concurrent migration processes**

You can specify a single migration process or multiple concurrent migration processes for a random-access or sequential-access storage pool. You can use multiple concurrent processes to make better use of your available tape drives, and FILE volumes. Since you can run migration concurrently on different storage pools during auto-migration, you must carefully consider the resources (for example, drives) you have available for the operation.

If simultaneous-write operations during migration are enabled during multiple concurrent-migration processing, each process has the following requirements:

- A mount point
- A volume for each copy storage pool, and active-data pool that is defined to the target storage pool, and the primary pool

For details about the simultaneous-write function, see “Writing data simultaneously to primary, copy, and active-data pools” on page 346.

Migration processing can differ for disk storage pools versus sequential-access storage pools. If you plan to modify the default migration settings for storage pools or want to understand how migration works, read the following topics:

- “Migrating disk storage pools” on page 287
- “Migrating sequential-access storage pools” on page 293
- “Starting migration manually or in a schedule” on page 296

#### **Remember:**

- Data cannot be migrated in to or out of storage pools that are defined with a CENTERA device class.
- If you receive an error message during the migration process, refer to *IBM Tivoli Storage Manager Messages*, which can provide useful information to diagnose and fix problems.
- If a migration process is started from a storage pool that does not have the next storage pool identified in the hierarchy, a reclamation process is triggered for the source storage pool. To prevent the reclamation process, define the next storage pool in the hierarchy. For details, see “Setting up a storage pool hierarchy” on page 275

page 275. As an alternative to prevent automatic migration from running, set the **HIGHMIG** parameter of the storage pool definition to 100.

**Related tasks:**

“Writing data simultaneously to primary, copy, and active-data pools” on page 346

## **Migrating disk storage pools**

After you set up disk and tape storage pools, you can configure the server so that client data can be migrated to tape. By migrating data to tape from a disk storage pool, you can verify that tape devices are properly set up.

### **About this task**

You can use the defaults for the migration thresholds, or you can change the threshold values to identify the maximum and minimum amount of space for a storage pool.

To control how long files must stay in a storage pool before they are eligible for migration, specify a migration delay for a storage pool.

If you decide to enable cache for disk storage pools, files can temporarily remain on disks even after migration. When you use cache, you might want to set lower migration thresholds.

To migrate from a disk storage pool to a tape storage pool, devices must be allocated and tapes must be mounted. Mount messages are directed to the console message queue and to any administrative client that is started with either the mount mode or console mode option.

**Related concepts:**

“Migration thresholds” on page 290

**Related tasks:**

“Keeping files in a storage pool” on page 292

### **How the server selects files to migrate:**

When the amount of data in a storage pool is equal to the high migration threshold, the server must migrate files to the next storage pool. The process for selecting files to migrate is based on the space that is used by a client node's files and the migration delay setting.

The server selects the files to migrate as follows:

1. The server checks for the client node that backed up or migrated the largest single file space or archived files that occupy the most space.
2. The next pool collocation setting determines how data is processed. If the collocation setting is **GROUP**, all the filespaces for all nodes in the collocation group are processed together. If the setting is **NODE**, all the filespaces for that node are processed together. If the collocation setting is **NO** or **FILESPACE**, each filespace and data type (backup, archive, or migrate) is processed separately.
3. For *all* files from *every* filespace belonging to the client node that was identified, the server examines the following statistics:
  - The number of days since the files were stored in the storage pool
  - The number of days since the files were retrieved from the storage pool

The server compares the number (whichever is less) to the migration delay that is set for the storage pool. The server migrates any of these files for which the number is more than the migration delay set for the storage pool.

The server checks the low migration threshold for the storage pool:

- After the server migrates the files for the node to collocate by GROUP or NODE, or
- After the server migrates the processing group to the next storage pool

If the amount of space that is used in the storage pool is now below the low migration threshold, migration ends. If not, the server continues with that group to collocate by group, if there are nodes that are left in the group. The server can also choose another group by using criteria that has already been described, and the migration process continues.

The server might not be able to reach the low migration threshold by migrating only files that were stored longer than the migration delay period. If so, the server checks the storage pool characteristic that determines whether migration stops, even if the pool is still above the low migration threshold.

If multiple migration processes are running, the server might choose the files from more than one node for migration at the same time. The processes are controlled by the **MIGPROCESS** parameter of the **DEFINE STGPOOL** command.

For example, Table 24 displays information that is contained in the database that is used by the server to determine which files to migrate. This example assumes that the storage pool contains no space-managed files. This example also assumes that the migration delay period for the storage pool is set to zero. When the setting is zero, any files can be migrated. Regardless of the amount of time they are stored in the pool or the last time of access, all files are migrated.

Table 24. Database information about files stored in DISKPOOL

| Client Node | Backed-Up File Spaces and Sizes |        | Archived Files (All Client File Spaces) |
|-------------|---------------------------------|--------|-----------------------------------------|
|             |                                 |        |                                         |
| TOMC        | TOMC/C                          | 200 MB | 55 MB                                   |
|             | TOMC/D                          | 100 MB |                                         |
| CAROL       | CAROL                           | 50 MB  | 5 MB                                    |
| PEASE       | PEASE/home                      | 150 MB | 40 MB                                   |
|             | PEASE/temp                      | 175 MB |                                         |

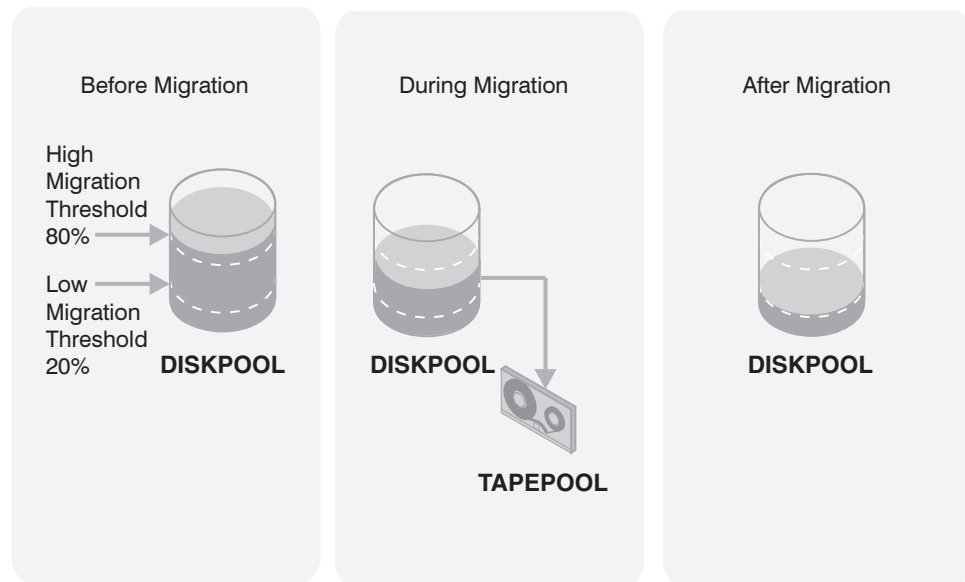


Figure 26. The migration process and migration thresholds

Figure 26 shows what happens when the following occur:

- The high migration threshold that is defined for the disk storage pool DISKPOOL is exceeded
- The TAPEPOOL COLLOCATE parameter is set at the default GROUP or NODE

When the amount of data that can be migrated in DISKPOOL reaches 80%, the server completes the following tasks:

1. Determines that the TOMC/C file space backup data is taking up the most space in the DISKPOOL storage pool. This space is more than any other single backed-up or space-managed or archived file space and more than any client node's archived files.
2. Locates all data that belongs to node TOMC stored in DISKPOOL. In this example, node TOMC backed up or archived files from file spaces TOMC/C and TOMC/D that are stored in the DISKPOOL storage pool.
3. Migrates all data from TOMC/C and TOMC/D to the next available storage pool. In this example, the data is migrated to the tape storage pool, TAPEPOOL.

The server migrates all of the data from both file spaces that belong to node TOMC. The migration happens, even if the occupancy of the storage pool drops below the low migration threshold before the second file space is migrated.

If the cache option is enabled, files that are migrated remain on disk storage (that is, the files are *cached*) until space is needed for new files.

4. After all files that belong to TOMC are migrated to the next storage pool, the server checks the low migration threshold. If the low migration threshold is not reached, the server determines which client node backed up or migrated the largest single file space or archived files that occupy the most space. The server begins migrating the files that belong to that node.

In this example, the server migrates *all* files that belong to the client node named PEASE to the TAPEPOOL storage pool.

5. After all the files that belong to PEASE are migrated to the next storage pool, the server checks the low migration threshold again. If the low migration threshold is reached or passed, migration ends.

If the TAPEPOOL COLLOCATE parameter is set to NO or FILESPACE, the server completes the following tasks:

1. Determines that the TOMC/C file space backup data is taking up the most space in the DISKPOOL storage pool. This space is more than any other single backed-up or space-managed file space and more than any client node's archived files.

2. Locates all backup data that belongs to node TOMC/C that is stored in the DISKPOOL storage pool.

3. Migrates all backup data from TOMC/C to the next available storage pool. In this example, the data migrates to the tape storage pool, TAPEPOOL.

The server migrates all of the backup data from filespace C belonging to node TOMC. The migration happens, even if the occupancy of the storage pool drops below the low migration threshold of all the data that was migrated.

If the cache option is enabled, files that are migrated remain on disk storage (files are cached) until space is needed for new files.

4. After all backup files that belong to TOMC/C are migrated to the next storage pool, the server checks the low migration threshold. If the low migration threshold is not reached, the server determines which filespace backed up, migrated, or archived files that occupy the most space. The server begins migrating files that belong to that filespace/type.

In this example, the server migrates all archive files that belong to the client node named PEASE filespace /temp to the TAPEPOOL storage pool.

5. After all the archive files that belong to PEASE/temp are migrated to the next storage pool, the server checks the low migration threshold again. If the low migration threshold was reached or passed, migration ends.

**Related tasks:**

“Keeping files in a storage pool” on page 292

“Caching in disk storage pools” on page 298

**Migration thresholds:**

Migration thresholds specify when the server should begin and stop migrating data to the next storage pool in the storage hierarchy. Migration thresholds are defined as a percentage of total storage-pool data capacity. Setting migration thresholds for disk storage pools ensures sufficient free space on faster devices, which can lead to better performance.

The server can perform migration as needed, based on migration thresholds that you set for the storage pools. Because migration from a disk to a tape storage pool uses resources such as drives and operators, you might want to ensure that migration occurs at a time that is best for your situation. You can control when migration occurs by setting migration thresholds with the **DEFINE STGPOOL** command.

Choosing thresholds appropriate for your situation takes some experimenting. Start by using the default high and low values. You need to ensure that migration occurs frequently enough to maintain some free space but not so frequently that the device is unavailable for other use. You might not want to empty the disk storage pool every time migration occurs by setting the low migration threshold to 0. You can typically keep the low threshold at 40%, and vary the high threshold from as high as 90% to as low as 50%.



### *High-migration thresholds:*

Before changing the high-migration threshold, you need to consider the amount of storage capacity provided for each storage pool and the amount of free storage space needed to store additional files, without having migration occur.

If you set the high-migration threshold too high, the pool may be just under the high threshold, but not have enough space to store an additional, typical client file. Or, with a high threshold of 100%, the pool may become full and a migration process must start before clients can back up any additional data to the disk storage pool. In either case, the server stores client files directly to tape until migration completes, resulting in slower performance.

If you set the high-migration threshold too low, migration runs more frequently and can interfere with other operations.

Keeping the high-migration threshold at a single value means that migration processing could start at any time of day, whenever that threshold is exceeded. You can control when migration occurs by using administrative command schedules to change the threshold. For example, set the high-migration threshold to 95% during the night when clients run their backup operations. Lower the high-migration threshold to 50% during the time of day when you want migration to occur. By scheduling when migration occurs, you can choose a time when your tape drives and mount operators are available for the operation.

### *Low-migration thresholds:*

Before setting the low-migration threshold, you must consider the amount of free disk storage space needed for normal daily processing.

To choose the low-migration threshold, consider:

- The amount of free disk storage space needed for normal daily processing. If you have disk space to spare, you can keep more data on the disk (a larger low threshold). If clients' daily backups are enough to fill the disk space every day, you might need to empty the disk (a smaller low threshold).  
If your disk space is limited, try setting the threshold so that migration frees up enough space for the pool to manage the amount of client data that is stored every day. Migration then runs about every day, or you can force it to run every day by lowering the high-migration threshold at a time of your choosing.  
You might also want to identify clients that are daily, transferring large amounts of data. For these clients, you might want to set up a policy (a new copy group or a new policy domain) so that their data is stored directly to tape. Using a separate policy like this can optimize disk use for most clients.
- Whether you use cache on disk storage pools to improve how quickly some files are retrieved. If you use cache, you can set the low threshold lower, yet still maintain faster retrieval for some data. Migrated data remains cached on the disk until new client data pushes the data off the disk. Using cache requires more disk space for the database, however, and can slow backup and archive operations that use the storage pool.  
If you do not use cache, you might want to keep the low threshold at a higher number so that more data stays on the disk.
- How frequently you want migration to occur, based on the availability of sequential-access storage devices and mount operators. The larger the low threshold, the shorter time that a migration process runs (because there is less data to migrate). But if the pool refills quickly, then migration occurs more



frequently. The smaller the low threshold, the longer time that a migration process runs, but the process runs less frequently.

You might need to balance the costs of larger disk storage pools with the costs of running migration (drives, tapes, and either operators or automated libraries).

- Whether data in the next storage pool is being collocated. When you collocate by GROUP, all the file spaces for all nodes in the collocation group are processed together. When you collocate by NODE, all file spaces for that node are processed as a group. When collocation is NO or FILESPACE, each filesystem and data type is processed separately, providing greater granularity.

### Keeping files in a storage pool:

For some applications, you might want to delay the migration of files in the storage pool where they were initially stored by the server. You can delay migration of files for a specified number of days.

### About this task

For example, you might have backups of monthly summary data that you want to keep in your disk storage pool for faster access until the data is 30 days old. After the 30 days, the server moves the files to a tape storage pool.

To delay file migration of files, set the MIGDELAY parameter when you define or update a storage pool. The number of days is counted from the day that a file was stored in the storage pool or accessed by a client, whichever is more recent. You can set the migration delay separately for each storage pool. When you set the delay to zero, the server can migrate any file from the storage pool, regardless of how short a time the file has been in the storage pool. When you set the delay to greater than zero, the server checks how long the file has been in the storage pool and when it was last accessed by a client. If the number of days exceeds the migration delay, the server migrates the file.

**Note:** If you want the number of days for migration delay to be counted based only on when a file was stored and not when it was retrieved, use the NORETRIEVEDATE server option. For more information about this option, see the *Administrator's Reference*.

If you set migration delay for a pool, you must decide what is more important: either ensuring that files stay in the storage pool for the migration delay period, or ensuring that there is enough space in the storage pool for new files. For each storage pool that has a migration delay set, you can choose what happens as the server tries to move enough data out of the storage pool to reach the low migration threshold. If the server cannot reach the low migration threshold by moving only files that have been stored longer than the migration delay, you can choose one of the following:

- Allow the server to move files out of the storage pool even if they have not been in the pool for the migration delay (MIGCONTINUE=YES). This is the default. Allowing migration to continue ensures that space is made available in the storage pool for new files that need to be stored there.
- Have the server stop migration without reaching the low migration threshold (MIGCONTINUE=NO). Stopping migration ensures that files remain in the storage pool for the time you specified with the migration delay. The administrator must ensure that there is always enough space available in the storage pool to hold the data for the required number of days.

If you allow more than one migration process for the storage pool and allow the server to move files that do not satisfy the migration delay time (MIGCONTINUE=YES), some files that do not satisfy the migration delay time may be migrated unnecessarily. As one process migrates files that satisfy the migration delay time, a second process could begin migrating files that do not satisfy the migration delay time to meet the low migration threshold. The first process that is still migrating files that satisfy the migration delay time might have, by itself, caused the storage pool to meet the low migration threshold.

#### **Minimizing access time to migrated files:**

Caching is a method of minimizing access time to files on disk storage, even if the server has migrated files to a tape storage pool. However, cached files are removed from disk when the space they occupy is required. The files must then be obtained from the storage pool to which they were migrated

#### **About this task**

**Important:** For information about the disadvantages of using cache, see “Caching in disk storage pools” on page 298.

To ensure that files remain on disk storage and do not migrate to other storage pools, use one of the following methods:

- Do not define the *next* storage pool.

A disadvantage of using this method is that if the file exceeds the space available in the storage pool, the operation to store the file fails.

- Set the high-migration threshold to 100%.

When you set the high migration threshold to 100%, files will not migrate at all. You can still define the next storage pool in the storage hierarchy, and set the maximum file size so that large files are stored in the next storage pool in the hierarchy.

A disadvantage of setting the high threshold to 100% is that after the pool becomes full, client files are stored directly to tape instead of to disk. Performance may be affected as a result.

#### **Migrating sequential-access storage pools**

You can set up migration thresholds for sequential-access storage pools. Migrating data from one sequential-access storage pool to another might be appropriate in some cases, for example, when you install a tape drive that uses a different type of tape and want to move data to that tape.

#### **About this task**

You probably will not want the server to migrate sequential-access storage pools on a regular basis. An operation such as tape-to-tape migration has limited benefits compared to disk-to-tape migration, and requires at least two tape drives.

You can migrate data from a sequential-access storage pool only to another sequential-access storage pool. You cannot migrate data from a sequential-access storage pool to a disk storage pool. If you need to move data from a sequential-access storage pool to a disk storage pool, use the **MOVE DATA** command. For more information, see “Moving data from one volume to another volume” on page 413.

To control the migration process, set migration thresholds and migration delays for each storage pool using the **DEFINE STGPOOL** and **UPDATE STGPOOL** commands. You can also specify multiple concurrent migration processes to better use your available tape drives or FILE volumes. (For details, see “Specifying multiple concurrent migration processes” on page 297.) Using the **MIGRATE STGPOOL** command, you can control the duration of the migration process and whether reclamation is attempted prior to migration. For additional information, see “Starting migration manually or in a schedule” on page 296.

**Tip:** Data in storage pools that have an NDMP format (NETAPPDUMP, CELERRADUMP, or NDMPDUMP) cannot be migrated. However, in primary storage pools that have an NDMP format, you can make space available by using the **MOVE DATA** command. The target storage pool must have the same data format as the source storage pool.

#### **How the server migrates files from sequential-access storage pools:**

The server migrates files by volume from sequential-access storage pools. Volumes that exceed the reclamation threshold are migrated first. Files in the least frequently referenced volumes are migrated next. The server checks the migration delay for the storage pool before any files are migrated.

For tape storage pools, the server begins the migration process when the ratio of volumes containing data to the total number of volumes in the storage pool, including scratch volumes, reaches the high migration threshold. For sequential-access disk (FILE) storage pools, the server starts the migration process when the ratio of data in a storage pool to the pool's total estimated data capacity reaches the high migration threshold. The calculation of data capacity includes the capacity of all the scratch volumes that are specified for the pool.

**Tip:** When Tivoli Storage Manager calculates the capacity for a sequential-access disk storage pool, it considers the amount of disk space available in the file system. For this reason, ensure that you have enough disk space in the file system to hold all the defined and scratch volumes that are specified for the storage pool. For example, suppose that the capacity of all the scratch volumes that are specified for a storage pool is 10 TB. (There are no predefined volumes.) However, only 9 TB of disk space is available in the file system. The capacity value that is used in the migration threshold is 9 TB, not 10 TB. If the high migration threshold is set to 70%, migration begins when the storage pool contains 6.3 TB of data, not 7 TB.

When migrating files by volume from sequential-access storage pools, including sequential-access disk storage pools associated with a FILE device class, the server completes the following procedure:

1. The server first reclaims volumes that exceed the reclamation threshold. Reclamation is a server process of consolidating files from several volumes onto one volume. (See “Reclaiming space in sequential-access storage pools” on page 382.)
2. After reclamation processing, the server compares the space that is used in the storage pool to the low migration threshold.
3. If the space used is now below the low migration threshold, the server stops processing. If the space used is still above the low migration threshold, the server determines which volume is the least recently referenced volume.
4. If the amount of time a file has been in the storage pool exceeds the amount of time that is specified as the migration delay for the storage pool, the file is

eligible for migration. The server selects the volume for migration only when all files on the volume are eligible for migration.

5. The server repeats steps 3 on page 294 and 4 on page 294 until the storage pool reaches the low migration threshold.

Migration delay can prevent volumes from being migrated. The server can migrate files from all eligible volumes but still find that the storage pool is above the low migration threshold. If you set migration delay for a pool, you must decide which of the following is of greater importance. Either ensuring that files stay in the storage pool for the amount of time that is specified as the migration delay, or ensuring there is enough space in the storage pool for new files. For each storage pool that has a migration delay that is set, you can choose what happens as the server tries to move enough files out of the storage pool to reach the low migration threshold. If the server cannot reach the low migration threshold by migrating only volumes that meet the migration delay requirement, you can choose one of the following:

- Allow the server to migrate volumes from the storage pool even if they do not meet the migration delay criteria (MIGCONTINUE=YES). This is the default. Allowing migration to continue ensures that space is made available in the storage pool for new files that must be stored there.
- Have the server stop migration without reaching the low migration threshold (MIGCONTINUE=NO). Stopping migration ensures that volumes are not migrated for the time you specified with the migration delay. The administrator must ensure that there is always enough space available in the storage pool to hold the data for the required number of days.

#### **Migration criteria for sequential-access storage pools:**

If you are planning to use migration for sequential-access storage pools, consider the time that is required to mount tapes into drives and whether collocation is enabled.

When you define migration criteria for sequential-access storage pools, consider:

- The capacity of the volumes in the storage pool
- The time that is required to migrate data to the next storage pool
- The speed of the devices that the storage pool uses
- The time that is required to mount media, such as tape volumes, into drives
- Whether operator presence is required
- The number of concurrent migration processes

If you decide to migrate data from one sequential-access storage pool to another, ensure that:

- Two drives (mount points) are available, one in each storage pool.
- The access mode for the next storage pool in the storage hierarchy is set to read/write.

For information about setting an access mode for sequential-access storage pools, see “Defining storage pools” on page 257.

- Collocation is set the same in both storage pools. For example, if collocation is set to NODE in the first storage pool, then set collocation to NODE in the next storage pool. If collocation is set to FILESPACE in the first storage pool, then set collocation to FILESPACE in the next storage pool.

When you enable collocation for a storage pool, the server tries to keep all files on a minimal number of volumes. The files can belong to a single client node, a

group of client nodes, a client file space, or a group of file spaces. For information about collocation for sequential-access storage pools, see “Keeping client files together using collocation” on page 372.

- You have sufficient resources (for example, staff) available to manage any necessary media mount and dismount operations. (This is especially true for multiple concurrent processing. For details, see “Specifying multiple concurrent migration processes” on page 297.) More mount operations occur because the server attempts to reclaim space from sequential-access storage pool volumes before it migrates files to the next storage pool.

If you want to limit migration from a sequential-access storage pool to another storage pool, set a high, high-migration threshold, such as 95%.

For information about setting a reclamation threshold for tape storage pools, see “Reclaiming space in sequential-access storage pools” on page 382.

There is no straightforward way to selectively migrate data for a specific node from one sequential storage pool to another. You can use the `MOVE NODEDATA` command to move file spaces for a node from one storage pool to another. See “Moving data belonging to a client node” on page 419.

### Starting migration manually or in a schedule:

To gain more control over how and when the migration process occurs, you can use the **MIGRATE STGPOOL** command. Issuing this command starts migration from one storage pool to the next storage pool in the hierarchy, regardless of the value of the **HIGHMIG** parameter of the storage pool definition.

### About this task

You can specify the maximum number of minutes the migration runs before automatically canceling. If you prefer, you can include this command in a schedule to perform migration when it is least intrusive to normal production needs.

For example, to migrate data from a storage pool named `ALTP00L` to the next storage pool, and specify that it end as soon as possible after one hour, issue the following command:

```
migrate stgpool altpool duration=60
```

Do not use this command if you are going to use automatic migration. To prevent automatic migration from running, set the **HIGHMIG** parameter of the storage pool definition to 100. For details about the **MIGRATE STGPOOL** command, refer to the *Administrator's Reference*.

**Restriction:** Data cannot be migrated into or out of storage pools that are defined with a `CENTERA` device class.

### Specifying multiple concurrent migration processes:

Running multiple migration processes concurrently lets you make better use of your available tape drives or FILE volumes. When calculating the number of concurrent processes to run, you must carefully consider available resources.

#### About this task

Each migration process requires at least two simultaneous volume mounts (at least two mount points) and, if the device type is not FILE, at least two drives. One of the drives is for the input volume in the storage pool from which files are being migrated. The other drive is for the output volume in the storage pool to which files are being migrated.

When calculating the number of concurrent processes to run, carefully consider the resources you have available, including the number of storage pools that will be involved with the migration, the number of mount points, the number of drives that can be dedicated to the operation, and (if appropriate) the number of mount operators available to manage migration requests. The number of available mount points and drives depends on other Tivoli Storage Manager and system activity and on the mount limits of the device classes for the storage pools that are involved in the migration.

For example, suppose that you want to migrate data on volumes in two sequential storage pools simultaneously and that all storage pools involved have the same device class. Each process requires two mount points and, if the device type is not FILE, two drives. To run four migration processes simultaneously (two for each storage pool), you need a total of at least eight mount points and eight drives if the device type is not FILE. The device class must have a mount limit of at least eight.

If the number of migration processes you specify is more than the number of available mount points or drives, the processes that do not obtain mount points or drives will wait indefinitely or until the other migration processes complete and mount points or drives become available.

To specify one or more migration processes for each primary sequential-access storage pool, use the **MIGPROCESS** parameter on the **DEFINE STGPPOOL** and **UPDATE STGPPOOL** commands.

The Tivoli Storage Manager server starts the specified number of migration processes regardless of the number of volumes that are eligible for migration. For example, if you specify ten migration processes and only six volumes are eligible for migration, the server will start ten processes and four of them will complete without processing a volume.

Multiple concurrent migration processing does not affect collocation. If you specify collocation and multiple concurrent processes, the Tivoli Storage Manager server attempts to migrate the files for each collocation group, client node, or client file space onto as few volumes as possible. If files are collocated by group, each process can migrate only one group at a single time. In addition, if files that belong to a single collocation group (or node or file space) are on different volumes and are being migrated at the same time by different processes, the files could be migrated to separate output volumes.



If simultaneous-write operations during migration are enabled during multiple concurrent-migration processing, each process has the following requirements:

- A mount point
- A volume for each copy storage pool and active-data pool that is defined to the target storage pool and the primary pool

**Related tasks:**

“Controlling the number of simultaneously mounted volumes” on page 198

“Writing data simultaneously to primary, copy, and active-data pools” on page 346

## **The effect of migration on copy storage pools and active-data pools**

Files in copy storage pools and active-data pools cannot be migrated. Migration of files between primary storage pools does not affect copy storage pool files or active-data pool files. Neither copy storage pool files nor active-data pool files move when primary storage pool files move.

For example, suppose a copy of a file is made while it is in a disk storage pool. The file then migrates to a primary tape storage pool. If you then back up the primary tape storage pool to the same copy storage pool, a new copy of the file is not needed. The server knows it already has a valid copy of the file.

The only way to store files in copy storage pools is by backing up (the **BACKUP STGPPOOL** command) or by using the simultaneous-write function. The only way to store files in active-data pools is by copying active data (the **COPY ACTIVEDATA** command) or by using the simultaneous-write function.

---

## **Caching in disk storage pools**

When cache is enabled, the migration process leaves behind duplicate copies of files after the server migrates these files to the next storage pool in the storage hierarchy. Using cache can improve the speed with which the server retrieves some files. Consider enabling cache for space-managed files that are frequently accessed by clients.

### **About this task**

If space is needed to store new data in the disk storage pool, cached files are erased and the space they occupied is used for the new data.

Using cache has some important disadvantages:

- Using cache can increase the time required for client backup operations to complete. Performance is affected because, as part of the backup operation, the server must erase cached files to make room for storing new files. The effect can be severe when the server is storing a very large file and must erase cached files. For the best performance for client backup operations to disk storage pools, do not use cache.
- Using cache can require more space for the server database. When you use cache, more database space is needed because the server has to keep track of both the cached copy of the file and the new copy in the next storage pool.
- If you want to use caching, you cannot also enable shredding for that disk storage pool. See “Securing sensitive client data” on page 529 for more information about shredding.

When cache is disabled and migration occurs, the server migrates the files to the next storage pool and erases the files from the disk storage pool. By default, the system disables caching for each disk storage pool because of the potential effects of cache on backup performance. If you leave cache disabled, consider higher migration thresholds for the disk storage pool. A higher migration threshold keeps files on disk longer because migration occurs less frequently.

If fast restores of active client data is your objective, you can also use active-data pools, which are storage pools containing only active versions of client backup data. For details, see “Active-data pools” on page 26.

To enable cache, specify `CACHE=YES` when defining or updating a storage pool.

## How the server removes cached files

When space is needed, the server reclaims space occupied by cached files. Files that have the oldest retrieval date are overwritten first.

For example, assume that two files, File A and File B, are cached files that are the same size. If File A was last retrieved on 05/16/08 and File B was last retrieved on 06/19/08, then File A is deleted to reclaim space first.

If you do not want the server to update the retrieval date for files when a client restores or retrieves the file, specify the server option `NORETRIEVEDATE` in the server options file. If you specify this option, the server removes copies of files in cache regardless how recently the files were retrieved.

## Effect of caching on storage pool statistics

The space-utilization statistic for the pool (Pct Util) includes the space used by any cached copies of files in the storage pool. The migratable-data statistic (Pct Migr) does not include space occupied by cached copies of files.

The server compares the migratable-data statistic with migration-threshold parameters to determine when migration should begin or end. For more information about storage pool statistics, see “Monitoring storage-pool and volume usage” on page 394.

---

## Deduplicating data

Data deduplication is a method for eliminating redundant data in order to reduce the storage that is required to retain the data. Only one instance of the data is retained in a deduplicated storage pool. Other instances of the same data are replaced with a pointer to the retained instance.

### About this task

Deduplicated data must be stored in sequential-access disk (FILE) primary, copy, and active-data storage pools that you enable for data deduplication. Because you can store more data on disk than on tape, data deduplication can reduce the overall amount of time that is required to retrieve data.

**Restriction:** When a client backs up or archives a file, the data is written to the primary storage pool specified by the copy group of the management class that is bound to the data. To deduplicate the client data, the primary storage pool must be a sequential-access disk (FILE) storage pool that is enabled for data deduplication.



## Data deduplication overview

IBM Tivoli Storage Manager provides two options for performing data deduplication; server-side data deduplication and client-side data deduplication. Both methods use the same process to identify redundant data, however the time and location of the deduplication processing is different. In server-side data deduplication, processing takes place exclusively on the server after the data is backed up. In client-side data deduplication, the processing is distributed between the server and the backup-archive client during the backup process.

The ability to deduplicate data on either the backup-archive client or the server provides flexibility in terms of resource utilization, policy management, and security. You can also combine both client-side and server-side data deduplication in the same production environment. For example, you can specify certain nodes for client-side data deduplication and certain nodes for server-side data deduplication. You can store the data for both sets of nodes in the same deduplicated storage pool.

Backup-archive clients that can deduplicate data can also access data that was deduplicated by server-side processes. Similarly, data that was deduplicated by client-side processes can be accessed by the server. Furthermore, duplicate data can be identified across objects regardless of whether the data deduplication is performed on the client or the server.

### Server-side data deduplication

Server-side data deduplication is a two-phase process. In the first phase, the server identifies duplicate data. In the second phase, duplicate data is removed by certain server processes.

In addition to whole files, Tivoli Storage Manager can also deduplicate parts of files that are common with parts of other files. Data becomes eligible for duplicate identification as volumes in the storage pool are filled. A volume does not have to be full before duplicate identification starts.

Duplicate data is removed by one of the following processes:

- Reclaiming volumes in the primary storage pool, copy storage pool, or active-data pool
- Backing up a primary storage pool to a copy storage pool that is also set up for data deduplication
- Copying active data in the primary storage pool to an active-data pool that is also set up for data deduplication
- Migrating data from the primary storage pool to another primary storage pool that is also set up for data deduplication
- Moving data from the primary storage pool to a different primary storage pool that is also set up for data deduplication
- Moving data within the same copy storage pool or moving data within the same active-data pool

## Client-side data deduplication

In client-side data deduplication, the backup-archive client and the server identify and remove duplicate data to save storage space on the server.

### Benefits

Client-side data deduplication provides the following advantages:

- It can reduce the amount of data that is sent over the local area network (LAN).
- Extra processing power and time that is required to remove duplicate data on the server is eliminated.
- Space savings occur immediately on the server because the client removed the duplicated data.
- Extra reclamation processing is not required to remove the redundant data from the server.
- It is no longer necessary to identify duplicates on the server.

Client-side data deduplication stores data directly in a deduplicated format. If storage pool backup is used to create secondary copies to a non-deduplicated storage pool, client extents are reassembled into contiguous files. (Extents are parts of a file that are created during the data-deduplication process.) This reassembly can cause storage pool backup processing to take longer when compared to processing data that was not previously deduplicated.

### Requirements

When you configure client-side data deduplication, the following requirements must be met:

- The client and server must be at version 6.2.0 or later.
- Client-side deduplication cannot be used in combination with LAN-free backups.
- The primary storage pool must be a sequential-access disk (FILE) storage pool that is enabled for data deduplication.
- The value of the DEDUPLICATION option on the client must be set to yes. You can set the DEDUPLICATION option in the client options file, in the preference editor of the Tivoli Storage Manager client GUI, or in the client option set on the Tivoli Storage Manager server.
- Client-side data deduplication must be enabled on the server by using the **DEDUPLICATION** parameter on the **REGISTER NODE** or **UPDATE NODE** server command.
- Files that are intended for deduplication must not be excluded.
- Files that are intended for deduplication must not be encrypted. Encrypted files and files from encrypted file systems cannot be deduplicated.

### Configuration options for client-side deduplication

To take advantage of the client-side data deduplication feature, the following options are available:

- Exclude specific files on a client from data deduplication by using the `exclude.dedup` client option.
- Enable a data deduplication cache, which reduces network traffic between the client and the server. The cache on the client can be enabled through the client options file.

Specify a size and location for a client cache.

**Restriction:** For applications that use the Tivoli Storage Manager API, do not use the data deduplication cache because backup failures might occur when the cache is out of sync with the Tivoli Storage Manager server. If multiple, concurrent Tivoli Storage Manager client sessions are configured, you must configure a separate cache for each session.

- Enable both client-side data deduplication and compression to reduce the amount of data that is stored on the server. Each extent is compressed before it is sent to the server. However, you must balance the benefits of storage savings versus the processing power that is required to compress client data. In general, if you compress and deduplicate data on the client system, you typically use about twice as much processing power as data deduplication alone.  
The server can process compressed data that has been deduplicated. In addition, backup-archive clients earlier than V6.2 can restore deduplicated, compressed data.

## Client-side data deduplication and storage pools

If client-side data deduplication is enabled and the primary destination storage pool is full, and another storage pool is in the hierarchy, the server stops the transaction. Client-side data deduplication is disabled, and the client tries the transaction again with files that are not deduplicated.

If the backup operation is successful and if the next storage pool is enabled for data deduplication, the files are deduplicated by the server. If the next storage pool is not enabled for data deduplication, the files are not deduplicated.

To ensure that client-side data deduplication can complete processing, maintain sufficient free storage in your primary destination storage pool.

For details about client-side data deduplication, including options for controlling data deduplication, see the *Backup-Archive Clients Installation and User's Guide*.

## LAN-free access to storage pools that contain client-side deduplicated data

Only V6.2 and later storage agents can use LAN-free data movement to access storage pools that contain data that was deduplicated by clients. V6.1 storage agents or later can complete operations over the LAN.

Table 25. Paths for data movement

|                               | Storage pool contains only client-side deduplicated data | Storage pool contains a mixture of client-side and server-side deduplicated data | Storage pool contains only server-side deduplicated data |
|-------------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------|
| V6.1 or earlier storage agent | Over the LAN                                             | Over the LAN                                                                     | LAN-free                                                 |
| V6.2 storage agent            | LAN-free                                                 | LAN-free                                                                         | LAN-free                                                 |

V6.2 backup-archive clients are compatible with V6.2 storage agents and provide LAN-free access to storage pools that contain client-side deduplicated data.

### Related concepts:

“Server-side data deduplication” on page 300

## Data deduplication limitations

Before implementing data deduplication, be aware that certain limitations apply.

### Version support

Server-side data deduplication is available only with Tivoli Storage Manager Version 6.1 or later servers. For optimal efficiency when using server-side data deduplication, upgrade to the backup-archive client V6.1 or later.

Client-side data deduplication is available only with Tivoli Storage Manager V6.2 or later servers and backup-archive clients V6.2 or later.

### Eligible storage pools

Data on random-access disk or on tape cannot be deduplicated. Only data in storage pools that are associated with sequential-access disk devices (FILE) can be deduplicated. You must enable FILE storage pools for data deduplication.

Client files must be bound to a management class that specifies a deduplication-enabled storage pool.

### Encrypted files

The Tivoli Storage Manager server and the backup-archive client cannot deduplicate encrypted files. If an encrypted file is encountered during data deduplication processing, the file is not deduplicated, and a message is logged.

**Tip:** You do not have to process encrypted files separately from files that are eligible for client-side data deduplication. Both types of files can be processed in the same operation. However, they are sent to the server in different transactions.

As a security precaution, you can take one or more of the following steps:

- Enable storage-device encryption together with client-side data deduplication.
- Use client-side data deduplication only for nodes that are secure.
- If you are uncertain about network security, enable Secure Sockets Layer (SSL).
- If you do not want certain objects (for example, image objects) to be processed by client-side data deduplication, you can exclude them on the client. If an object is excluded from client-side data deduplication and it is sent to a storage pool that is set up for data deduplication, the object is deduplicated on server.
- Use the **SET DEDUPVERIFICATIONLEVEL** command to detect possible security attacks on the server during client-side data deduplication. Using this command, you can specify a percentage of client extents for the server to verify. If the server detects a possible security attack, a message is displayed.

### File size

Only files that are more than 2 KB are deduplicated. Files that are 2 KB or less are not deduplicated.

### Operations that preempt client-side data deduplication

The following operations take precedence over client-side data deduplication:

- LAN-free data movement
- Subfile backup operations

- Simultaneous-write operations
- Server-initiated sessions

Do not schedule or enable any of those operations during client-side data deduplication. If any of those operations occur during client-side data deduplication, client-side data deduplication is turned off, and a message is issued to the error log.

The following is an example of how simultaneous operations can create problems when using client-side data deduplication.

When client-side data deduplication is used to back up or archive files, it is possible for a server operation to mark a file extent on the server as expired, before the client operation completes a backup or an archive that involves the same extent. If this happens, the client is notified of the expired extent. The client makes three attempts to copy the extent to the server before it gives up and processes the other files in the backup operation.

A return code (RC=254) and message are written to the dsmerror.log file. The message is also displayed in the command-line client. The error message is:

```
ANS7899E The client referenced a duplicated extent that does not exist
on the Tivoli Storage Manager server.
```

The workaround for this situation is to ensure that processes that can cause files to expire are not run at the same time that back up or archive operations with client-side data deduplication are performed.

## **Data deduplication of hierarchical storage management data**

Microsoft Windows HSM uses the Tivoli Storage Manager application programming interface (API), which can deduplicate client data. Server-side deduplication of HSM data from Microsoft Windows clients is allowed.

## **Collocation**

You can use collocation for storage pools that are set up for data deduplication. However, collocation might not have the same benefit as it does for storage pools that are not set up for data deduplication.

By using collocation with storage pools that are set up for data deduplication, you can control the placement of data on volumes. However, the physical location of duplicate data might be on different volumes. No-query-restore, and other processes remain efficient in selecting volumes that contain non-deduplicated data. However, the efficiency declines when additional volumes are required to provide the duplicate data.

## **Moving or copying data from a deduplicated storage pool to a non-deduplicated storage pool**

When you copy or move data from a deduplicated storage pool to a non-deduplicated storage pool, the data is reconstructed. However, after the data movement or copy operation, the amount of data that is reported as moved or copied is the amount of deduplicated data. For example, suppose that a storage pool contains 20 GB of deduplicated data that represents 50 GB of total file data. If the data is moved or copied, the server reports that 20 GB was moved or copied, even though 50 GB of data was sent.

## When data deduplication is not appropriate

Using Tivoli Storage Manager data deduplication can provide several advantages. However, there are some situations where data deduplication is not appropriate. Those situations are:

- Your primary storage of backup data is on a Virtual Tape Library or physical tape. If regular migration to tape is required, the benefits of using data deduplication are lessened, since the purpose of data deduplication is to reduce disk storage as the primary location of backup data.
- You have no flexibility with the backup processing window. Tivoli Storage Manager data deduplication processing requires additional resources, which can extend backup windows or server processing times for daily backup activities.
- Your restore processing times must be fast. Restore performance from deduplicated storage pools is slower than from a comparable disk storage pool that does not use data deduplication. If fast restore performance from disk is a high priority, restore performance benchmarking must be done to determine whether the effects of data deduplication can be accommodated.

### Related tasks:

“Keeping client files together using collocation” on page 372

“Detecting possible security attacks during client-side data deduplication” on page 317

## Planning guidelines for data deduplication

Planning for data deduplication is important because there are many factors to consider. These factors include database and log size capacity, data deduplication location, storage pool setup, and extra hardware requirements.

As part of the planning process, ensure that you benefit from using data deduplication. In the following situations, Tivoli Storage Manager data deduplication can provide a cost-effective method for reducing the amount of disk storage that is required for backups:

- You must reduce the disk space that is required for backup storage.
- You must complete remote backups over limited bandwidth connections.
- You are using Tivoli Storage Manager node replication for disaster recovery across geographically dispersed locations.
- You either configure disk-to-disk backup (where the final destination of backup data is on a deduplicating disk storage pool), or data is stored in the FILE storage pool for a significant time (for example 30 days), or until expiration.
- For guidance on the scalability of data deduplication with Tivoli Storage Manager, see the *Effective Planning and Use of IBM Tivoli Storage Manager V6 and V7 Deduplication* document at [http://www.ibm.com/developerworks/mydeveloperworks/wikis/home/wiki/Tivoli Storage Manager/page/Effective Planning and Use of IBM Tivoli Storage Manager V6 Deduplication](http://www.ibm.com/developerworks/mydeveloperworks/wikis/home/wiki/Tivoli%20Storage%20Manager/page/Effective%20Planning%20and%20Use%20of%20IBM%20Tivoli%20Storage%20Manager%20V6%20Deduplication).

### Related concepts:

“Example: Estimating active and archive log sizes for data deduplication operations” on page 652

### Related tasks:

“Detecting possible security attacks during client-side data deduplication” on page 317

## Implementing data deduplication

In order to implement data deduplication, you must make several decisions that are based on the outcome that you want to achieve.

### About this task

- Determine database capacity requirements. When you use data deduplication, considerably more database space is required as a result of storing the metadata that is related to duplicate data.
- Determine database log size requirements. It is essential that you properly size the storage capacity for the database active log and archive log.
- Determine which client nodes have data that you want to deduplicate.
- Determine whether you want to implement server-side data deduplication, client-side data deduplication, or a combination of both. To help you make that determination, consider the following factors:
  - Server-side data deduplication is a two-step process in which duplicate data is identified and then storage space is reclaimed to remove the duplicate data. Client-side data deduplication stores the data directly in a deduplicated format.
  - Data deduplication and data compression can be combined on the backup-archive client to reduce data storage. This reduction is typically more than you can achieve by using server-side data deduplication alone.
  - If bandwidth is not restrictive, client-side data deduplication processing typically causes an increase in time for backup operations to complete. Consider doubling the time that you allow for backups when you use client-side data deduplication in an environment that is not limited by the network. If you are creating a secondary copy by using storage pool backup, where the copy storage pool is not using data deduplication, it takes longer for data to be moved because of the extra processing that is required to reconstruct the deduplicated data.
  - Duplicate identification processing is handled by client systems when client-side deduplication is used. However, the Tivoli Storage Manager server still requires processing to handle the lookup requests from clients and to store data deduplication metadata that is produced by client systems.
  - Client-side data deduplication cannot be combined with LAN-free data movement that uses the Tivoli Storage Manager for Storage Area Networks feature. If you are implementing a Tivoli Storage Manager supported LAN-free to disk solution, consider server-side data deduplication.
- If you choose client-side data deduplication, decide what, if any, security precautions to take.
- Decide whether you want to define a new storage pool exclusively for data deduplication or update an existing storage pool. The storage pool must be a sequential-access disk (FILE) pool. Data deduplication occurs at the storage-pool level, and all data within a storage pool, except encrypted data, is deduplicated.
- If you want to implement server-side data deduplication, decide how best to control duplicate-identification processes. For example, you might want to run duplicate-identification processes automatically all the time. Alternatively, you might want to start and stop duplicate-identification processes manually. You can also start duplicate-identification processes automatically and then increase or decrease the number of processes depending on your server workload. Whatever you decide, you can change the settings later, after the initial setup, to meet the requirements of your operations.

The following table lists the options that you can use to control duplicate identification processes.



Table 26. Options for controlling duplicate-identification processes

| If you create a storage pool for data deduplication...                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | If you update an existing storage pool...                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>You can specify 1 - 20 duplicate-identification processes to start automatically. The Tivoli Storage Manager server does not start any processes if you specify zero.</p> <p>If you are creating a primary sequential-access storage pool and you do not specify a value, the server starts one process automatically. If you are creating a copy storage pool or an active-data pool and you do not specify a value, the server does not start any processes automatically.</p> <p>After the storage pool is created, you can increase and decrease the number of duplicate-identification processes manually. You can also start, stop, and restart duplicate-identification processes manually.</p> | <p>You can specify 0 - 20 duplicate-identification processes to start automatically. If you do not specify any duplicate-identification processes, you must start and stop processes manually.</p> <p>The Tivoli Storage Manager server does not start any duplicate-identification processes automatically by default.</p> |

- Decide whether to define or update a storage pool for data deduplication, but not actually perform data deduplication. For example, suppose that you have a primary sequential-access disk storage pool and a copy sequential-access disk storage pool. Both pools are set up for data deduplication. You might want to run duplicate-identification processes for only the primary storage pool. In this way, only the primary storage pool reads and deduplicates data. However, when the data is moved to the copy storage pool, the data deduplication is preserved, and no duplicate identification is required.
- Determine the best time to use data deduplication for the storage pool. The duplicate identification (IDENTIFY) processes can increase the workload on the processor and system memory. Schedule duplicate identification processes at the following times:
  - When the process does not conflict with other processes such as reclamation, migration, and storage pool backup
  - Before node replication (if node replication is being used) so that node replication can be used in combination with deduplication

**Related tasks:**

“Detecting possible security attacks during client-side data deduplication” on page 317

## Checklist for data deduplication

Data deduplication requires additional processing resources on the server or client. Use the checklist to verify that hardware and your Tivoli Storage Manager configuration have characteristics that are key to good performance.



| Question                                                                                                                                   | Tasks, characteristics, options, or settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | More information                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Are you using fast disk storage for the Tivoli Storage Manager database as measured in terms of input/output operations per second (IOPS)? | <p>Use high-performance disk for the Tivoli Storage Manager database. At a minimum, use 10000-rpm drives for smaller databases that are 200 GB or less. For databases over 500 GB, use 15000-rpm drives or solid-state drives.</p> <p>Tivoli Storage Manager database should have a minimum capability of 3,000 IOPS. For each TB of data that is backed up daily (before data deduplication), include an additional 1,000 IOPS to this minimum.</p> <p>For example, a Tivoli Storage Manager server that is ingesting 3 TB of data per day would need 6,000 IOPS for the database disks:</p> $3,000 \text{ IOPS minimum} + 3,000 (3 \text{ TB} \times 1,000 \text{ IOPS}) = 6,000 \text{ IOPS}$            | See the Checklist for server database disks ( <a href="http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/r_chklist_srddbds.html">http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/r_chklist_srddbds.html</a> ). |
| Do you have enough memory for the size of your database?                                                                                   | <p>Use a minimum of 64 GB of system memory for Tivoli Storage Manager servers that are deduplicating data. If the retained capacity of backup data grows, the memory requirement might need to be as high as 128 GB.</p> <p>Monitor memory usage regularly to determine whether more memory is required.</p>                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                          |
| Have you properly sized your disk space for the database, logs, and storage pools?                                                         | <p>For a rough estimate, plan for 150 GB of database storage for every 10 TB of data that is to be protected in deduplicated storage pools. <i>Protected data</i> is the amount of data before deduplication, including all versions of objects stored.</p> <p>Configure the server to have the maximum active log size of 128 GB by setting the <b>ACTIVELOGSIZE</b> server option to a value of 131072.</p> <p>Use a directory for the database archive logs with an initial free capacity of at least 500 GB. Specify the directory by using the <b>ARCHLOGDIRECTORY</b> server option.</p> <p>Define space for the archive failover log by using the <b>ARCHFAILOVERLOGDIRECTORY</b> server option.</p> |                                                                                                                                                                                                                                                                          |

| Question                                                                                                                                                                                                       | Tasks, characteristics, options, or settings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | More information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Are the Tivoli Storage Manager database and logs on separate disk volumes (LUNs)?</p> <p>Is the disk that is used for the database configured according to best practices for a transactional database?</p> | <p>The Tivoli Storage Manager database must not share disk volumes with Tivoli Storage Manager database logs or storage pools, or with any other application or file system.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <p>See the topic about Server database and recovery log configuration and tuning (<a href="http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/t_srvtune_dbrec.html">http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/t_srvtune_dbrec.html</a>).</p>                                                                                                                                                                                                                            |
| <p>Are you using a minimum of 8 (2.2 GHz or equivalent) processor cores for each Tivoli Storage Manager server that you plan to use with data deduplication?</p>                                               | <p>If you are planning to use client-side data deduplication, verify that client systems have adequate resources available during a backup operation to perform data deduplication processing. Use a processor that is at least the minimum equivalent of one 2.2 GHz processor core per backup process with client-side data deduplication.</p>                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <p>Have you estimated storage pool capacity to configure enough space for the size of your environment?</p>                                                                                                    | <p>You can estimate storage pool capacity requirements for a deduplicated storage pool by using the following technique:</p> <ol style="list-style-type: none"> <li>1. Estimate the base size of the source data.</li> <li>2. Estimate the daily backup size by using an estimated change and growth rate.</li> <li>3. Determine retention requirements.</li> <li>4. Estimate the total amount of source data by factoring in the base size, daily backup size, and retention requirements.</li> <li>5. Apply the deduplication ratio factor.</li> <li>6. Round up the estimate to consider transient storage pool usage.</li> </ol> | <p>For an example of using this technique, see <i>Effective Planning and Use of IBM Tivoli Storage Manager V6 and V7 Deduplication</i> at <a href="http://www.ibm.com/developerworks/mydeveloperworks/wikis/home/wiki/Tivoli%20Storage%20Manager/page/Effective%20Planning%20and%20Use%20of%20IBM%20Tivoli%20Storage%20Manager%20V6%20Deduplication">http://www.ibm.com/developerworks/mydeveloperworks/wikis/home/wiki/Tivoli Storage Manager/page/Effective Planning and Use of IBM Tivoli Storage Manager V6 Deduplication</a>.</p> |
| <p>Have you distributed disk I/O over many disk devices and controllers?</p>                                                                                                                                   | <p>Use arrays that consist of as many disks as possible, which is sometimes referred to as wide striping.</p> <p>Specify 8 or more file systems for the deduplicated storage pool device class so that I/O is distributed across as many LUNs and physical devices as possible.</p>                                                                                                                                                                                                                                                                                                                                                  | <p>See the Checklist for storage pools on disk (<a href="http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/r_srv_hw_disks.html">http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/r_srv_hw_disks.html</a>).</p>                                                                                                                                                                                                                                                                |

| Question                                                                             | Tasks, characteristics, options, or settings                                                                                                                                                                                                                                                                                              | More information |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Do you have adequate resources to cover client-side data deduplication requirements? | If you are planning to use client-side data deduplication, verify that client systems have adequate resources available during a backup operation to perform data deduplication processing. Use a processor that is at least the minimum equivalent of one 2.2 GHz processor core per backup process with client-side data deduplication. |                  |

## Best practices for data deduplication

Implement data deduplication in Tivoli Storage Manager by using the best practices to ensure that the benefits of data deduplication are optimized on your system.

When you use data deduplication, your system can achieve benefits such as these:

- Reduction in the storage capacity that is required for storage pools on the server that are associated with a FILE-type device class. This reduction applies for both server-side and client-side data deduplication.
- Reduction in the network traffic between the client and server. This reduction applies for client-side deduplication only.

Using data deduplication requires an increase in resources on the Tivoli Storage Manager server and clients. The upper limit on the size of objects that are stored in deduplicated storage pools is one primary consideration. However, in general, a server that uses data deduplication must be allocated additional resources.

When you implement the suggested practices for data deduplication, you can help to avoid problems such as these on your system:

- Server outages that are caused by running out of active log space or archive log space
- Server outages or client backup failures that are caused by exceeding the IBM DB2 internal lock list limit
- Process failures and hangs that are caused during server data management

### Properly size the server database, recovery log, and system memory:

When you use data deduplication, considerably more database space is required as a result of storing the metadata that is related to duplicate data. Data deduplication also tends to cause longer-running transactions and a related larger peak in recovery log usage.

In addition, more system memory is required for caching database pages that are used during duplicate data lookup for both server-side and client-side data deduplication.

#### Tips:

- Ensure that the Tivoli Storage Manager server has a minimum of 64 GB of system memory.
- Allocate a file system with two-to-three times more capacity for the server database than you would allocate for a server that does not use data

deduplication. You can plan for 150 GB of database storage for every 10 TB of data that is protected in the deduplicated storage pools.

- Configure the server to have the maximum active log size of 128 GB by setting the `ACTIVELOGSIZE` server option to a value of 131072.
- Use a directory for the database archive logs with an initial free capacity of at least 500 GB. Specify the directory by using the `ARCHLOGDIRECTORY` server option.

For more information about managing resources such as the database and recovery log, see Capacity planning ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.srv.install.doc/t\\_rpt\\_plan\\_capacity.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.srv.install.doc/t_rpt_plan_capacity.html)).

### **Avoid the overlap of server maintenance tasks with client backup windows:**

When you schedule client backups for a period during which server maintenance tasks are not running, you create a *backup window*. This practice is important when you use data deduplication. Use this process regardless of whether data deduplication is used with Tivoli Storage Manager.

Perform server maintenance tasks in a sequence that avoids contention between the different types of processing. The server maintenance tasks are:

- Migration
- Storage pool backup
- Duplicate identification
- Database backup
- Node replication
- Reclamation
- Expiration

Migration and reclamation are the tasks most likely to interfere with the success of client backups.

#### **Tips:**

- Schedule client backups in a backup window that is isolated from data maintenance processes, such as migration and reclamation.
- Schedule each type of data maintenance task with controlled start times and durations so that they do not overlap with each other.
- If storage-pool backup is used to create a secondary copy, schedule storage-pool backup operations before you start data deduplication processing to avoid restoring objects that are sent to a non-deduplicated copy storage pool.
- If you are using node replication to keep a secondary copy of your data, schedule the **REPLICATE NODE** command to run after duplicate identification processes are completed.

For more information about tuning the schedule for daily server maintenance tasks, see Tuning the schedule for daily operations ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.perf.doc/t\\_srv\\_tuning\\_daily.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/t_srv_tuning_daily.html)).

### **Modify DB2 lock list management:**

The lock list storage of DB2 that is automatically managed can become insufficient. If you deduplicate data that includes large files or large numbers of files concurrently, the data deduplication can cause insufficient storage. When the lock list storage is insufficient, backup failures, data management process failures, or server outages can occur.

File sizes greater than 500 GB that are processed by data deduplication are most likely to cause storage to become insufficient. However, if many backups use client-side data deduplication, this problem can also occur with smaller-sized files.

The following activities can use more lock list storage:

- Client backups that use client-side data deduplication
- Data movement within a deduplicated storage pool that uses the reclamation and **MOVE DATA** commands
- Data movement out of a deduplicated storage pool that uses the migration and **MOVE DATA** commands

See Technote 1430874 at <http://www.ibm.com/support/docview.wss?uid=swg21430874> for an explanation about how to estimate the peak volume of deduplication transactions that are processed. This document also contains information about the corresponding lock list requirements for managing the volume and information about how to change the DB2 limit, if necessary.

**Tip:** When you estimate the lock list storage requirements, follow the information described in the technote to manage storage for loads that are much larger than expected.

### **Limit the impact of large objects on data deduplication processing:**

You can use controls to limit the potential effect of large objects on data deduplication processing on the Tivoli Storage Manager server.

You can use the following controls when you deduplicate large-object data:

- Server controls that limit the size of objects. These controls limit the size of objects that are processed by data deduplication.
- Controls on the data management processes of the server. These controls limit the number of processes that can operate concurrently on the server.
- Scheduling options that control how many clients run scheduled backups simultaneously. These scheduling options can be used to limit the number of clients that perform client-side data deduplication at the same time.
- Client controls whereby larger objects can be processed as a collection of smaller objects. These controls are primarily related to the Tivoli Storage Manager data protection products.

*Server controls to limit the data deduplication of large objects:*

Use the server controls that are available on Tivoli Storage Manager server to prevent large objects from being processed by data deduplication.

Use the following parameter and server options to limit the object size for data deduplication:

#### **MAXSIZE**

For storage pools, the **MAXSIZE** parameter can be used to prevent large objects from being stored in a deduplicated storage pool. Use the default **NOLIMIT** parameter value, or set the value to be greater than **CLIENTDEDUPTXNLIMIT** and **SERVERDEDUPTXNLIMIT** option values.

Use the **MAXSIZE** parameter with a deduplicated storage pool to prevent objects that are too large to be eligible for data deduplication from being stored in a deduplicated storage pool. The objects are then redirected to the next storage pool in the storage pool hierarchy.

#### **SERVERDEDUPTXNLIMIT**

The **SERVERDEDUPTXNLIMIT** server option limits the total size of objects that can be deduplicated in a single transaction by duplicate identification processes. This option limits the maximum file size that is processed by server-side data deduplication. The default value for this option is 300 GB, and the maximum value is 2048 GB. Because less simultaneous activity is typical with server-side data deduplication, consider having a limit larger than 300 GB on the object size for server-side data deduplication.

#### **CLIENTDEDUPTXNLIMIT**

The **CLIENTDEDUPTXNLIMIT** server option restricts the total size of all objects that can be deduplicated in a single client transaction. This option limits the maximum object size that is processed by client-side data deduplication. However, there are some methods to break up larger objects. The default value for this option is 300 GB, and the maximum value is 2048 GB.

#### **Tips:**

- Set the **MAXSIZE** parameter for deduplicated storage pools to a value slightly greater than **CLIENTDEDUPTXNLIMIT** and **SERVERDEDUPTXNLIMIT** option values.
- If you increase **CLIENTDEDUPTXNLIMIT** or **SERVERDEDUPTXNLIMIT** option values beyond the defaults, reevaluate your sizing or the server recovery log. Also, reevaluate your sizing for the IBM DB2 lock list.
- If you plan to run many simultaneous client backups that use client-side data deduplication, consider lowering the setting of the **CLIENTDEDUPTXNLIMIT** option to the minimum setting of 32 GB. Lower the setting if large objects will not be deduplicated.

### *Controls for data management processes:*

Use the controls for the data management processes of the Tivoli Storage Manager server. These controls limit the number of large objects that are simultaneously processed by the server during data deduplication.

Use the following commands and parameters to limit the number of large objects that are simultaneously processed by the server:

- The storage pool parameters on the **DEFINE STGPOOL** command or the **UPDATE STGPOOL** command.
  - The **MIGPROCESS** parameter controls the number of migration processes for a specific storage pool.
  - The **RECLAIMPROCESS** parameter controls the number of simultaneous processes that are used for reclamation.
- The **IDENTIFYPROCESS** parameter on the **IDENTIFY DUPLICATES** command. The parameter controls the number of duplicate identification processes that can run at one time for a specific storage pool.

### **Tips:**

- You can safely run duplicate identification processes for more than one deduplicated storage pool at the same time. However, specify the **IDENTIFYPROCESS** parameter with the **IDENTIFY DUPLICATES** command to limit the total number of all simultaneous duplicate identification processes. Limit the total number to a number less than or equal to the number of processors that are available in the system.
- Schedule duplicate identification processes to run when the additional load does not affect client operations or conflict with other server processes. For example, schedule the duplicate identification process to run outside the client backup window. The duplicate identification processes for the server intensively use the database and system resources. These processes place additional processing on the processor and memory of the system.
- Do not overlap different types of operations, such as expiration, reclamation, migration, and storage pool backup.
- Read the information about data deduplication and the server storage pool. The effect of data deduplication on system resources is also related to the size of the file for deduplication. As the size of the file increases, more processing time, processor resources, memory, and active log space are needed on the server. Review the document for information about data deduplication and the server storage pool.

### *Schedule controls for client backups:*

For scheduled backups, you can limit the number of client backup sessions that perform client-side data deduplication at the same time.

You can use any of the following approaches to limit the number of client backup sessions:

- Clients can be clustered in groups by using different schedule definitions that run at different times during the backup window. Consider spreading clients that use client-side deduplication among these different groups.
- Increase the duration for scheduled startup windows and increase the randomization of schedule start times. This limits the number of backups that use client-side data deduplication that start at the same time.



- Separate client backup destinations by using the server policy definitions of the Tivoli Storage Manager server, so that different groups of clients use different storage pool destinations:
  - Clients for which data is never to be deduplicated cannot use a management class that has as its destination a storage pool with data deduplication enabled.
  - Clients that use client-side data deduplication can use storage pools where they are matched with other clients for which there is a higher likelihood of duplicate matches. For example, all clients that run Microsoft Windows operating systems can be set up to use a common storage pool. However, they do not necessarily benefit from sharing a storage pool with clients that perform backups of Oracle databases.

*Client controls to limit the data deduplication of large objects:*

A primary source of large objects that are processed by client-side data deduplication are backups by Tivoli Storage Manager data protection products. You can use controls to have the clients break these objects into multiple smaller objects that are within the object size limits for data deduplication.

Many of the data protection products process objects with sizes in the range of several hundred GBs to one TB. This range exceeds the maximum object size that is acceptable for data deduplication.

You can reduce large objects into multiple smaller objects by using the following methods:

- Use Tivoli Storage Manager client features that back up application data with the use of multiple streams. For example, a 1 TB database is not eligible for data deduplication as a whole. However, when backed up with four parallel streams, the resulting four 250 GB objects are eligible for deduplication. For Tivoli Storage Manager Data Protection for SQL, you can specify a number of stripes to change the backup into multiple streams.
- Use application controls that influence the maximum object size that is passed through to Tivoli Storage Manager. Tivoli Storage Manager Data Protection for Oracle has several RMAN configuration parameters that can cause larger databases to be broken into smaller objects. These configuration parameters include the use of multiple channels, or the MAXPIECESIZE option, or both.

**Restriction:** In some cases, large objects cannot be reduced in size, and therefore cannot be processed by Tivoli Storage Manager data deduplication:

- The backup-archive clients always send large files in a single transaction, which cannot be broken into smaller transactions.
- Image backups of a large file system are sent within a single transaction and cannot be broken into smaller components.



## Performance considerations for data deduplication

Finding duplicate data is a processor-intensive process. When you use client-side data deduplication, the processor consumption occurs on the client system during the backup. With server-side data deduplication, the processor consumption occurs on the server during the duplicate identification process. Consider factors such as processor usage, network bandwidth, restore performance, and compression when you decide to use data deduplication.

### Processor usage

The amount of processor resources that are used depends on how many client sessions or server processes are simultaneously active. Additionally, the amount of processor usage is increased because of other factors, such as the size of the files that are backed up. When I/O bandwidth is available and the files are large, for example 1 MB, finding duplicates can use an entire processor during a session or process. When files are smaller, other bottlenecks can occur. These bottlenecks can include reading files from the client disk or the updating of the Tivoli Storage Manager server database. In these bottleneck situations, data deduplication might not use all of the resources of the processor.

You can control processor resources by limiting or increasing the number of client sessions for a client or a server duplicate identification processes. To take advantage of your processor and to complete data deduplication faster, you can increase the number of identification processes or client sessions for the client. The increase can be up to the number of processors that are on the system. It can be more than that number if the processors support multiple hardware-assisted threads for the core, such as with simultaneous multithreading. Consider a minimum of at least 8 (2.2Ghz or equivalent) processor cores in any Tivoli Storage Manager server that is configured for data deduplication.

Client-side data deduplication can use a large amount of processor resources. Therefore, verify that the additional workload does not affect the primary workload of the client system.

Compressing the data, in addition to deduplicating it on the client, uses additional processor resources. However, it lowers the network bandwidth that is required if the data is compressible.

### Network bandwidth

A primary reason to use client-side data deduplication is to reduce the bandwidth that is required to transfer data to a Tivoli Storage Manager server. Client compression can reduce this bandwidth further. The amount that the bandwidth is reduced by is directly related to how much of the data is duplicate that is already stored on the server. It is also directly related to how compressible this data is.

Network bandwidth for the queries for data from the Tivoli Storage Manager client to the server can be reduced by using the `enablededupcache` client option. The cache stores information about extents that have been previously sent to the server. If an extent is found that was previously sent, it is not necessary to query the server again for that extent. Therefore, bandwidth and performance are not additionally reduced.

## Restore performance

During a restore operation, performance for a deduplicated storage pool can be slower than a restore from a non-deduplicated pool. When data deduplication is used, the extents for a given file can be spread across multiple volumes on the server. This spreading of extents makes the reads from the volumes more random in nature, and also slower than during a sequential operation. In addition, more database operations are required.

## Compression

Data deduplication is not performed on directories or file metadata. In comparison, compression can be performed on these types of data. Therefore, the reduction percentages do not typically add up to the total data-reduction percentage. When client-side data deduplication is used, the calculation of the compression-reduction percentage is performed differently. The calculation includes only the actual data reduction that results from use of the compression engine. Client-side data deduplication, when performed, occurs before compression.

For the quickest backups on an unconstrained network, choose server-side data deduplication. For the largest storage savings, choose client-side data deduplication combined with compression. Avoid performing client-compression in combination with server-side data deduplication.

For additional information about data deduplication and performance considerations, see the *Optimizing Performance* guide.

## Detecting possible security attacks during client-side data deduplication

A rogue application that is part of a client system and that imitates the client, API, or GUI application can initiate an attack on the server. To reduce server vulnerability to such attacks, you can specify a percentage of client extents for the server to verify.

### About this task

If the server detects that a security attack is in progress, the current session is canceled. In addition, setting of the node **DEDUPLICATION** parameter is changed from **CLIENTORSERVER** to **SERVERONLY**. The **SERVERONLY** setting disables client-side data deduplication for that node.

The server also issues a message that a potential security attack was detected and that client-side data deduplication was disabled for the node.

If client-side data deduplication is disabled, all other client operations (for example, backup operations) continue. Only the client-side data deduplication feature is disabled. If client-side data deduplication is disabled for a node because a potential attack was detected, the server deduplicates the data that is eligible for client-side data deduplication.

### Procedure

To detect a possible security attack when client-side data deduplication is enabled, issue the **SET DEDUPVERIFICATIONLEVEL** command. Specify an integer value 1 - 100 to indicate the percentage of client extents to be verified. The default value is 0.

This value indicates that no extents are verified.

## What to do next

**Tip:** Verifying extents consumes processing power and adversely affects server performance. For optimal performance, do not specify values greater than 10 for the **SET DEDUPVERIFICATIONLEVEL** command. Other methods for protecting the server include:

- Enabling client-side data deduplication only for clients that are secure. If you choose this method, do not change the default setting of **SET DEDUPVERIFICATIONLEVEL** command.
- Creating automated scripts to enable client-side data deduplication only during certain time periods.
- Using storage-device encryption together with client-side data deduplication
- Enabling Secure Sockets Layer (SSL)
- Deduplicating data that uses only server-side data deduplication. Server-side data deduplication does not expose the server to security attacks from the client.

To show the current value for **SET DEDUPVERIFICATIONLEVEL**, issue the **QUERY STATUS** command. Check the value in the **Client-side Deduplication Verification Level** field.

## Evaluating data deduplication in a test environment

Testing can give you important information about the possible benefits of server-side and client-side data deduplication in your production environment. Space savings and restore-and-retrieve times are two key indicators that you can test.

### Restore and retrieve operations from server-side and client-side deduplicated storage pools

Restore-and-retrieve operations from a sequential-access disk (FILE) storage pool that is set up for data deduplication have different performance characteristics than restore-and-retrieve operations from a FILE storage pool that is not set up for data deduplication. To ensure that performance objectives can be met, test your restore scenarios.

In a FILE storage pool that is not set up for data deduplication, files on a volume that are being restored or retrieved are read sequentially from the volume before the next volume is mounted. This process ensures optimal I/O performance and eliminates the need to mount a volume multiple times.

In a FILE storage pool that is set up for data deduplication, however, extents that comprise a single file can be distributed across multiple volumes. To restore or retrieve the file, each volume containing a file extent must be mounted. As a result, the I/O is more random, which can lead to slower restore-and-retrieve times. These results occur more often with small files that are less than 100 KB. In addition, more processor resources are consumed when restoring or retrieving from a deduplicated storage pool. The additional consumption occurs because the data is checked to ensure that it has been reassembled properly.

Although small-file, restore-and-retrieve operations from a deduplicated storage pool might be relatively slow, these operations are still typically faster than small-file restore-and-retrieve operations from tape because of the added tape mount-and-locate time. If you have data for which fastest-possible

restore-and-retrieval time is critical, you can use a sequential-access disk storage pool that is not set up for data deduplication.

**Tip:** To reduce the mounting and removing of FILE storage pool volumes, the server allows for multiple volumes to remain mounted until they are no longer needed. The number of volumes that can be mounted at a time is controlled by the `NUMOPENVOLSALLOWED` option.

## Estimating space savings from server-side data deduplication

Before you set up data deduplication in your production environment, you can estimate the amount of storage space that can be saved. Directions are provided for backing up the data in a primary storage pool to a temporary copy storage pool that is set up for data deduplication.

### Procedure

To estimate space savings, complete the following steps:

1. Create a sequential-access disk (FILE) copy storage pool and enable the pool for data deduplication.
2. Back up the contents of the primary storage pool that you want to test to the copy storage pool.
3. Run the duplicate-identification processes against the volumes in the copy storage pool.

If you specified one or more duplicate-identification processes when you created the copy storage pool, those processes start automatically. If you did not specify any processes, you must specify and start duplicate-identification processes manually.

4. After all the data in the copy storage pool is identified, start reclamation by changing the reclamation percentage on the copy storage pool to 1%.
5. When reclamation finishes, use the **QUERY STGPPOOL** command to check the copy storage-pool statistics to determine the amount of space that was saved.

### Results

If the results are satisfactory, complete one of the following tasks:

- If the primary storage pool is a sequential-access disk storage pool, update the storage, specifying data deduplication.
- If the primary storage pool is not a sequential-access disk storage pool, create a new primary sequential-access disk storage pool, specifying data deduplication. Move the data or migrate the data from the original storage pool to the new storage pool.

## Verifying your implementation

After you configured data deduplication, complete some actions to verify whether your solution is processing effectively.

### About this task

Use the following questions to evaluate your data deduplication configuration.

#### Have you scheduled data deduplication processing based on your backup strategy?

If you are not creating a secondary copy of backup data or if you are using node replication for the second copy, client backup and duplicate

identification can be overlapped. This can reduce the total elapsed time for these operations, but might increase the time that is required for client backup.

If you are using storage pool backup, do not overlap client backup and duplicate identification. The best practice sequence of operations is client backup, storage pool backup, and then duplicate identification.

For data that is not stored with client-side data deduplication, schedule storage-pool backup operations to complete before you start data deduplication processing. Set up your schedule this way to avoid reconstructing objects that are deduplicated to make a non-deduplicated copy to a different storage pool.

For more information, see Scheduling data deduplication and node replication processes ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.perf.doc/t\\_srv\\_sched\\_deduprep.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/t_srv_sched_deduprep.html)).

**Are the processes for identifying duplicates able to handle all new data that is backed up each day?**

If the process completes, or goes into an idle state before the next scheduled operation begins, then all new data is being processed.

**Is reclamation able to run to a sufficiently low threshold?**

If a low threshold cannot be reached, consider the following actions:

- Increase the number of processes that are used for reclamation.
- Upgrade to faster hardware.

**Is deduplication cleanup processing able to clean out the dereferenced extents to free disk space before the start of the next backup cycle?**

Run the **SHOW DEDUPDELETE** command. The output shows that all threads are idle when the workload is complete.

If cleanup processing cannot complete, consider the following actions:

- Increase the number of processes that are used for duplicate identification.
- Upgrade to faster hardware.
- Determine whether you are importing more data that your Tivoli Storage Manager server can process with data deduplication and consider deploying an additional Tivoli Storage Manager server.

**Related reference:**

“Checklist for data deduplication” on page 307

## **Managing deduplication-enabled storage pools**

You can create a storage pool for data deduplication or you can update an existing storage pool. If you are implementing server-side data deduplication, Tivoli Storage Manager provides the option of running duplicate-identification processes automatically or manually.

### **Before you begin**

Before you set up a storage pool:

- Determine which client nodes have data that you want to deduplicate. Decide whether you want to deduplicate data on a node-by-node basis, on either the client or the server.
- Decide whether you want to define a new storage pool exclusively for data deduplication or update an existing storage pool. If you update a storage pool

for data deduplication, Tivoli Storage Manager deduplicates the data that is already stored. No additional backup, archive, or migration is required. You can also define or update a storage pool for data deduplication, but not deduplicate data.

- Decide how you want to control duplicate-identification processes.

## About this task

You can create a storage pool for data deduplication or update an existing storage pool for data deduplication. You can store client-side deduplicated data and server-side deduplicated data in the same storage pool.

## Procedure

To set up a storage pool for data deduplication, complete the following steps:

- If you are defining a new storage pool:
  1. Use the **DEFINE STGPOOL** command and specify the **DEDUPLICATE=YES** parameter.
  2. Define a new policy domain to direct eligible client-node data to the storage pool.
- If you are updating an existing storage pool:
  1. Determine whether the storage pool contains data from one or more client nodes that you want to exclude from data deduplication. If it does:
    - a. Using the **MOVE DATA** command, move the data that belongs to the excluded nodes from the storage pool to be converted to another storage pool.
    - b. Direct data that belongs to the excluded nodes to the other storage pool. The easiest way to complete this task is to create another policy domain and designate the other storage pool as the destination storage pool.
  2. Change the storage-pool definition with the **UPDATE STGPOOL** command. Specify the **DEDUPLICATE** and **NUMPROCESSES** parameters.

## Results

As data is stored in the pool, the duplicates are identified. When the reclamation threshold for the storage pool is reached, reclamation begins, and the space that is occupied by duplicate data is reclaimed.

In the storage pool definition, you can specify as many as 50 duplicate-identification processes to start automatically. However, the number of duplicate-identification processes must not exceed the number of processor cores available on the Tivoli Storage Manager server. If you do not specify any duplicate-identification processes in the storage pool definition, you must control data deduplication manually. Duplicate identification requires extra disk I/O and processor resources. To mitigate the effects on server workload, you can manually increase or decrease the number of duplicate-identification processes, along with their duration.

**Attention:** By default, the Tivoli Storage Manager server requires that you back up deduplication-enabled primary storage pools before volumes in the storage pool are reclaimed and before duplicate data is discarded.

## Creating a copy of primary storage pools with data deduplication enabled

Tivoli Storage Manager provides two methods that you can use to create a copy of data in your deduplicated storage pools.

### About this task

You can create a copy of the data by using **BACKUP STGPOOL** or **REPLICATE NODE** command. When you back up a primary storage pool, you create a copy of the entire storage pool. When you replicate data by using node replication, you copy data from one or more nodes from primary storage pools to a primary storage pool on another Tivoli Storage Manager server.

For deduplicated storage pools, you must determine whether the DEDUPREQUIRESBACKUP should be set to yes or no.

The value of the DEDUPREQUIRESBACKUP option specifies whether the following actions will occur:

- Volumes in primary sequential-access storage pools that are set up for data deduplication can be reclaimed
- Duplicate data can be discarded before the storage pools are backed up

The default value is Yes.

**Important:** If you do not want to create a copy of the storage pool data, you must change the DEDUPREQUIRESBACKUP option to No. Failure to set the option correctly can cause deduplication to not work correctly and cause your data to not be reclaimed.

Table 27 describes the different scenarios that you can use to create a copy of data in your deduplicated storage pools, and which value of DEDUPREQUIRESBACKUP to use.

Table 27. Setting the value for the DEDUPREQUIRESBACKUP option

| Creating a copy of your primary storage pool data                                                           | DEDUPREQUIRESBACKUP value | Method                |
|-------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------|
| Back up your primary storage pool data to a non-deduplicated copy pool, such as a copy pool that uses tape. | Yes                       | <b>BACKUP STGPOOL</b> |
| Back up your primary storage pool data to a deduplicated copy pool.                                         | No                        | <b>BACKUP STGPOOL</b> |
| Use node replication to create a copy of your data on another Tivoli Storage Manager server.                | No                        | <b>REPLICATE NODE</b> |
| No copy is created.                                                                                         | No                        |                       |

Depending on the method that you chose to create a copy of the data in the primary storage pools, complete one of the following actions:

### Procedure

- Use the storage pool backup command to back up data:
  1. Issue the **BACKUP STGPOOL** command. If you set the DEDUPREQUIRESBACKUP option to yes, you must back up data to a copy storage pool that is not set up for data deduplication.



**Tip:** When you copy data to an active data pool, it does not provide the same level of protection that occurs when you create a storage pool backup or use node replication.

2. Issue the **IDENTIFY DUPLICATES** command to identify duplicate data.

**Tip:** If you backup storage pool data after duplicate data is identified, the copy process can take longer because the data must be reconstructed to find any duplicate data.

- Use the node replication command to back up data:
  1. Issue the **IDENTIFY DUPLICATES** command to identify duplicate data.
  2. Issue the **REPLICATE NODE** command to start node replication.

### Effects on data deduplication when moving or copying data

You can move or copy data between storage pools regardless of whether they are set up for data deduplication.

The following table illustrates what happens to data deduplication when data objects are moved or copied.

*Table 28. Effects when moving or copying data*

| If the source storage pool is...  | ...and you move or copy data to a target storage pool that is... | The result is...                                                                                                                                                                                                                                                                                             |
|-----------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Set up for data deduplication     | Set up for data deduplication                                    | All data objects in the source pool are examined for existence in the target pool. If an object exists in the target pool, information about data deduplication is preserved so that the data does not need to be deduplicated again. If an object does not exist in the target pool, it is moved or copied. |
|                                   | Not set up for data deduplication                                | The data is not deduplicated in the target storage pool. This rule applies to any type of storage pool, including storage pools that use virtual volumes.                                                                                                                                                    |
| Not set up for data deduplication | Set up for data deduplication                                    | Normal data deduplication processing takes place after the data is moved or copied.                                                                                                                                                                                                                          |
|                                   | Not set up for data deduplication                                | No data deduplication occurs.                                                                                                                                                                                                                                                                                |

When you copy or move data from a deduplicated storage pool to a non-deduplicated storage pool, the data is reconstructed. However, after the data movement or copy operation, the amount of data that is reported as moved or copied is the amount of deduplicated data. For example, suppose a storage pool contains 20 GB of deduplicated data that represents 50 GB of total file data. If the data is moved or copied, the server reports that 20 GB was moved or copied, even though 50 GB of data was sent.



## Turning data deduplication on or off for a storage pool

If you turn data deduplication off for a storage pool by updating the storage pool definition, new data that enters the storage pool is not deduplicated.

### About this task

Deduplicated data, which was in the storage pool before you turned off data deduplication, is not reassembled. Deduplicated data continues to be removed due to normal reclamation and deletion. All information about data deduplication for the storage pool is retained.

### Procedure

To turn off data deduplication for a storage pool, use the **UPDATE STGPPOOL** command and specify **DEDUPLICATE=NO**.

### What to do next

If you turn data deduplication on for the same storage pool, duplicate-identification processes resume, skipping any files that are previously processed. You can change the number of duplicate-identification processes. When you are calculating the number of duplicate-identification processes to specify, consider the workload on the server and the amount of data that requires data deduplication. The number of duplicate-identification processes must not exceed the number of processor cores available on the Tivoli Storage Manager server.

To enable data deduplication for a storage pool, specify **DEDUPLICATE=YES** on the **UPDATE STGPPOOL** command.

## Controlling data deduplication

If client files are bound to a management class that specifies a deduplication-enabled storage pool, the files are, by default, deduplicated on the server. Client-side data deduplication is enabled by using a combination of settings on the client and the server.

### About this task

The following table shows how the data deduplication settings on the client interact with the data deduplication settings on the Tivoli Storage Manager server.

*Table 29. Data deduplication settings: Client and server*

| Value of the DEDUPLICATION parameter for REGISTER NODE or UPDATE NODE | Value of the client DEDUPLICATION option in the client options file | Data deduplication location                                                |
|-----------------------------------------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------------------|
| SERVERONLY                                                            | Yes                                                                 | Server<br><br>The Yes value of the client option is ignored by the server. |
| CLIENTORSERVER                                                        | Yes                                                                 | Client                                                                     |
| CLIENTORSERVER                                                        | No                                                                  | Server                                                                     |
| SERVERONLY                                                            | No                                                                  | Server                                                                     |

You can set the DEDUPLICATION option in the client options file, in the preference editor of the Tivoli Storage Manager client GUI, or in the client option set on the Tivoli Storage Manager server. Use the **DEFINE CLIENTOPT** command to set the DEDUPLICATION option in a client option set. To prevent the client from overriding the value in the client option set, specify **FORCE=YES**.

## Controlling server-side data deduplication

If client files are bound to a management class that specifies a deduplication-enabled storage pool, the files are, by default, deduplicated on the server.

### Procedure

To enable server-side data deduplication, specify **SERVERONLY** as the value of the **DEDUPLICATION** parameter on the **REGISTER NODE** or **UPDATE NODE** command. If you specify **SERVERONLY**, the values of the client DEDUPLICATION option are ignored.

#### Related concepts:

“Server-side data deduplication” on page 300

### Controlling duplicate-identification processes:

In server-side data deduplication, client data is deduplicated on the server. When you define or update a storage pool for data deduplication, you can specify 0 - 20 duplicate-identification processes to start automatically and run indefinitely. To avoid resource impacts during server operations (for example, client backups), you can also control data deduplication processing manually.

#### About this task

For example, suppose that you specify eight duplicate-identification processes in your storage pool definition. These processes start automatically and run indefinitely. However, you decide that you want to reduce the number of processes during client backups, which take 60 minutes. You can manually reduce the number of duplicate-identification processes to four and set a duration of 60 minutes. After the backup is complete, the Tivoli Storage Manager server automatically restarts four processes so that the eight processes are running again.

Alternatively, you can identify duplicates manually. Specify 0 as the number of duplicate-identification processes in your storage pool definition. With this setting, the Tivoli Storage Manager server does not automatically start any duplicate-identification processes. Then, depending on your schedule and server workload, specify the number of duplicate-identification processes and their duration for one or more storage pools.

**Remember:** The number of duplicate-identification processes must not exceed the number of processor cores available on the Tivoli Storage Manager server.

### Duplicate-identification processing states:

Duplicate-identification processes are different from other server processes. When other server processes finish a task, they end. When duplicate-identification processes finish processing available files, they go into an idle state.

Duplicate-identification processes can be either active or idle. Processes that are currently working on files are active. Processes that are waiting for files to work on are idle. Processes remain idle until volumes with data to be deduplicated become available. Processes end only when canceled or when you change the number of duplicate-identification processes for the storage pool to a value less than the number that is currently specified.

The output of the **QUERY PROCESS** command for a duplicate-identification process includes the total number of bytes and files that have been processed since the process first started. For example, if a duplicate-identification process processes four files, idles, and then processes five more files, the total number of files processed is nine.

### Interaction of manual data deduplication controls:

You can change the number of duplicate-identification processes used during server-side data deduplication. You can also change the length of time that processes are allowed to run. You can adjust these settings as often as you want.

Table 30 on page 327 shows how these two controls, the number and duration of processes, interact for a particular storage pool.

### Remember:

- When the amount of time that you specify as a duration expires, the number of duplicate-identification processes always reverts to the number of processes that are specified in the storage pool definition.
- When the server stops a duplicate-identification process, the process completes the current physical file and then stops. As a result, it might take several minutes to reach the value that you specify as a duration.
- To change the number of duplicate-identification processes, you can also update the storage pool definition by using the **UPDATE STGPPOOL** command. However, when you update a storage pool definition, you cannot specify a duration. The processes that you specify in the storage pool definition run indefinitely, or until you issue the **IDENTIFY DUPLICATES** command, update the storage pool definition again, or cancel a process.

In this example, you specified three duplicate-identification processes in the storage pool definition. You use the **IDENTIFY DUPLICATES** command to change the number of processes and to specify the amount of time the change is to remain in effect.

Table 30. Controlling duplicate-identification processes manually

| Using the <b>IDENTIFY DUPLICATES</b> command, you specify... | ...and a duration of... | The result is...                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2 duplicate-identification processes                         | None specified          | One duplicate-identification process finishes the file that it is working on, if any, and then stops. Two processes run indefinitely, or until you reissue the <b>IDENTIFY DUPLICATES</b> command, update the storage pool definition, or cancel a process.                                 |
|                                                              | 60 minutes              | One duplicate-identification process finishes the file that it is working on, if any, and then stops. After 60 minutes, the server starts one process so that three are running.                                                                                                            |
| 4 duplicate-identification processes                         | None specified          | The server starts one duplicate-identification process. Four processes run indefinitely, or until you reissue the <b>IDENTIFY DUPLICATES</b> command, update the storage pool definition, or cancel a process.                                                                              |
|                                                              | 60 minutes              | The server starts one duplicate-identification process. At the end of 60 minutes, one process finishes the file that it is working on, if any, and then stops. The additional process started by this command might not be the one that stops when the duration expires.                    |
| 0 duplicate-identification processes                         | None specified          | All duplicate-identification processes finish the files that they are working on, if any, and stop. This change lasts indefinitely, or until you reissue the <b>IDENTIFY DUPLICATES</b> command, update the storage pool definition, or cancel a process.                                   |
|                                                              | 60 minutes              | All duplicate-identification processes finish the files that they are working on, if any, and stop. At the end of 60 minutes, the server starts three processes.                                                                                                                            |
| None specified                                               | Not available           | The number of duplicate-identification processes resets to the number of processes that are specified in the storage pool definition. This change lasts indefinitely, or until you reissue the <b>IDENTIFY DUPLICATES</b> command, update the storage pool definition, or cancel a process. |

The following example illustrates how you can control data deduplication by using a combination of automatic and manual duplicate-identification processes. Suppose you create two new storage pools for data deduplication, A and B. When you create the pools, you specify two duplicate-identification processes for A and one process for B. The Tivoli Storage Manager server is set by default to run those processes automatically. As data is stored in the pools, duplicates are identified and marked for removal. When there is no data to deduplicate, the duplicate-identification processes go into an idle state, but remain active.

Suppose you want to avoid resource impacts on the server during client-node backups. You must reduce the number of duplicate-identification processes manually. For A, you specify a value of 1 for the number of the duplicate-identification process. For B, you specify a value of 0. You also specify that these changes remain in effect for 60 minutes, the duration of your backup window.

Specifying these values causes two of the three running processes to finish the files on which they are working and to stop. One duplicate-identification process is

now running for A. No duplicate-identification processes are running for B. After 60 minutes, the Tivoli Storage Manager server automatically resets the data-deduplication processes to the values specified in the storage pool definition. One process starts for A, for a total of two running processes. One process also starts for B.

### **Starting and stopping duplicate-identification processes:**

In server-side data deduplication, you can start extra duplicate-identification processes and stop some or all active processes. You can also specify the amount of time that the change remains in effect. If you did not specify any duplicate-identification processes in the storage pool definition, you can start new processes and stop them manually.

### **Procedure**

To specify the number and duration of duplicate-identification processes for a storage pool, issue the **IDENTIFY DUPLICATES** command.

### **Example**

For example, suppose that you have four storage pools: stgpoolA, stgpoolB, stgpoolC, and stgpoolD. All the storage pools are associated with a particular Tivoli Storage Manager server. Storage pools A and B are each running one duplicate-identification process, and storage pools C and D are each running two. A 60-minute client backup is scheduled to take place, and you want to reduce the server workload from these processes by two-thirds.

To accomplish this task, issue the following commands:

```
IDENTIFY DUPLICATES STGPOOLA DURATION=60 NUMPROCESS=0
IDENTIFY DUPLICATES STGPOOLB DURATION=60 NUMPROCESS=0
IDENTIFY DUPLICATES STGPOOLC DURATION=60 NUMPROCESS=1
IDENTIFY DUPLICATES STGPOOLD DURATION=60 NUMPROCESS=1
```

Now two processes are running for 60 minutes, one third of the number that is running before the change. At the end of 60 minutes, the Tivoli Storage Manager server automatically restarts one duplicate-identification process in storage pools A and B, and one process in storage pools C and D.

### **Enabling deduplication of NetApp file-server data:**

To deduplicate data that is stored by a network-attached storage (NAS) file server, use the **ENABLENASDEDUP** server option. This option applies only to NetApp file servers. The default is **NO**. Deduplication for the storage pool must be enabled. If you are using NDMP backup of NetApp file servers in your environment, use the **YES** option.

## Controlling client-side data deduplication

The combination of client option and server parameter values determines whether data deduplication occurs on the client or the server. The default data deduplication setting is server-side data deduplication.

### Procedure

To enable client-side data deduplication, complete both of the following steps:

- Specify YES as the value of the DEDUPLICATION option for the client.  
You can set the DEDUPLICATION option in the client options file, in the preference editor of the Tivoli Storage Manager client GUI, or in the client option set on the Tivoli Storage Manager server. Use the **DEFINE CLIENTOPT** command to set the DEDUPLICATION option in a client option set. To prevent the client from overriding the value in the client option set, specify **FORCE=YES**.
- Specify **DEDUPLICATION=CLIENTORSERVER** on the **REGISTER NODE** or **UPDATE NODE** command.

### Results

For details about client-side data deduplication options, see the *Backup-Archive Clients Installation and User's Guide*.

#### Related concepts:

"Client-side data deduplication" on page 301

### Enabling client-side data deduplication for a single node:

In this example, you enable client-side data deduplication for a single node. You have a policy domain that you use to manage deduplicated data.

#### About this task

The name of the domain that you use to manage deduplicated data is dedupdomain1. The primary storage pool that is specified by the copy group of the default management class is a deduplication-enabled storage pool. The client, MATT, that you want to enable for data deduplication uses a default management class for backup operations.

### Procedure

To enable client-side data deduplication for a single node, complete the following steps:

- On the server, assign client node MATT to dedupdomain1:  

```
update node matt domain=dedupdomain1 deduplication=clientorserver
```

  
The setting of the **DEDUPLICATION** parameter must be CLIENTORSERVER
- Add the following option to the dsm.opt file:

```
deduplication yes
```

You can also set the DEDUPLICATION option in the preference editor of the Tivoli Storage Manager client GUI or in the client option set on the Tivoli Storage Manager server. Use the **DEFINE CLIENTOPT** command to set the DEDUPLICATION option in a client option set. To prevent the client from overriding the value in the client option set, specify **FORCE=YES**.

## What to do next

To determine the amount of data that was deduplicated, start a backup or archive operation. At the end of the operation, check the backup or archive report.

### Enabling client-side data deduplication for multiple client nodes:

In this example, you enable client-side data deduplication for more than one client node.

#### Procedure

Complete the following steps on the server. No configuration is necessary on the client.

1. Assign all the client nodes to a domain (DEDUPDOMAIN1) that has a deduplication-enabled destination storage pool:

```
update node node1 domain=dedupdomain1 deduplication=clientorserver
...
update node noden domain=dedupdomain1 deduplication=clientorserver
```

You can automate this step with a script or a macro.

2. To enable client-side data deduplication, define a client option set:

```
define cloptset client_dedup
define clientopt client_dedup deduplication yes force=yes
```

You can also add the following client-side data deduplication options to the client option set:

- ENABLEDEDUPCACHE
- DEDUPCACHEPATH
- DEDUPCACHESIZE
- INCLUDE.DEDUP
- EXCLUDE.DEDUP

3. Assign the client option set to the client nodes:

```
update node node1 cloptset=client_dedup
...
update node noden cloptset=client_dedup
```

You can automate this step with a script or a macro.

### Changing data deduplication location for a single client:

In this scenario, a client is deduplicating data. However, because of security concerns, you want the Tivoli Storage Manager server to deduplicate the data that belongs to the client.

#### About this task

The data that belongs to the client MATT is bound to a management class with a copy group that specifies a deduplication-enabled destination storage pool.

#### Procedure

To change the data deduplication location from the client to the server, issue the following command:

```
update node matt deduplication=serveronly
```

No configuration is necessary on the client.

## Specifying transaction and object size for deduplication

When you deduplicate large objects, intensive database activity can result from long-running transactions that are required to update the database. Server options are available to limit the size of transactions when client-side deduplicated data is backed up or archived and to limit the size of objects that are deduplicated by the server.

### About this task

High levels of database activity can produce the following symptoms:

- Reduced throughput for client backup and archive operations
- Resource contention that results from concurrent server operations
- Excessive recovery log activity

The extent to which these symptoms occur depends on the number and size of the objects that are being processed, the intensity, and the type of concurrent operations that are taking place on the Tivoli Storage Manager server. The symptoms also depend on the Tivoli Storage Manager server configuration.

### Procedure

With the `SERVERDEDUPTXNLIMIT` server option, you can limit the size of objects that can be deduplicated on the server. With the `CLIENTDEDUPTXNLIMIT` server option, you can limit the size of transactions when client-side deduplicated data is backed up or archived.

### Results

**Tip:** To control which objects are deduplicated, you can also use the **MAXSIZE** parameter of the **DEFINE STGPPOOL** and **UPDATE STGPPOOL** commands. Using the **MAXSIZE** parameter, you can force large objects to the NEXT storage pool for storage.

### What to do next

For details about these options, see the *Administrator's Reference*.

## Tiered data deduplication

With tiered data deduplication, you can use larger average extent sizes as objects reach a greater size.

Data deduplication uses an average extent size of 256 KB. When deduplicating large objects, for example, over 200 GB, the number of extents for an object can grow large. Assuming extents are 256 KB, there are 819,200 extents for a 200 GB object. When you need to restore this object, all 819,200 database records must be read before the object is accessible.

Tiered data deduplication can manage larger objects because a larger average extent size is used when deduplicating the data. For example, after an object reaches 200 GB, the Tivoli Storage Manager server uses 1 MB as the average extent size, instead of 256 KB. 819,200 extents become 204,800 extents.



Using the server options, DEDUPTIER2FILESIZE and DEDUPTIER3FILESIZE, you can configure three different tier sizes for data deduplication:

- Tier 1** All objects greater than 0 and less than the value set for the DEDUPTIER2FILESIZE option. Tier 1 uses an average extent size of 256 KB.
- Tier 2** All objects greater than or equal to the value of DEDUPTIER2FILESIZE and less than the value for DEDUPTIER3FILESIZE. Tier 2 uses an average extent size of 1 MB.
- Tier 3** All objects greater than or equal to the value for DEDUPTIER3FILESIZE. Tier 3 uses an average extent size of 2 MB.

**Note:** By default, objects under 100 GB in size are processed at Tier 1. Objects in the range of 100 GB to under 400 GB are processed in Tier 2. All objects 400 GB and larger are processed in Tier 3.

#### Setting options for tiered deduplication:

Depending on your environment, you can set different options for using tiered data deduplication. However, if possible, avoid changing the default tier settings. Small changes might be tolerated, but frequent changes to these settings can prevent matches between previously stored backups and future backups.

#### Example

If you want to use two tiers for data deduplication instead of three, you can set the DEDUPTIER2FILESIZE and DEDUPTIER3FILESIZE accordingly.

##### Use Tier 1 and Tier 2 only

To have two tiers with an average extent size of 256 KB and 1 MB, specify these values:

```
DEDUPTIER2FILESIZE 100
DEDUPTIER3FILESIZE 9999
```

##### Use Tier 1 and Tier 3 only

To have two tiers with an average extent size of 256 KB and 2 MB, specify these values:

```
DEDUPTIER2FILESIZE 100
DEDUPTIER3FILESIZE 100
```

If you do not want to use tiered data deduplication and instead preserve your existing environment, set the value for both of the tiered data deduplication options to 9999. For example:

```
DEDUPTIER2FILESIZE 9999
DEDUPTIER3FILESIZE 9999
```

If both options are set to 9999, then all files that are 10 TB or less are processed with the default extent size of 256 KB.

## Displaying statistics about server-side data deduplication

Important statistics about data deduplication are available by querying the server for information about storage pools or duplicate-identification processes.

### Querying a storage pool for statistics about data deduplication

You can query a storage pool for important statistics about data deduplication.

#### About this task

Querying a storage pool provides the following statistics:

- Whether the storage pool has been set up for data deduplication
- The number of duplicate-identification processes specified when the storage pool was created
- The amount of data that was removed from the storage pool by reclamation processing

#### Procedure

To query a storage pool for statistics about data deduplication, issue the **QUERY STGPPOOL** command.

#### What to do next

You might notice a discrepancy between the number of duplicate-identification processes specified as the default for a storage pool and the number of duplicate-identification processes currently running. This discrepancy occurs when you manually increase or decrease the number of duplicate-identification processes for the storage pool.

If you run a query before reclamation of the storage pool, the *Duplicate Data Not Stored* value in the command output is inaccurate and does not reflect the most recent data reduction.

**Remember:** Querying a storage pool displays storage-pool utilization as a percentage of its assigned capacity. (Storage-pool utilization is expressed as *Pct Util* in the command output.) This field does not display a value for storage pools that are set up for data deduplication. If you turn off data deduplication for a storage pool, a value for percentage utilized is not displayed until all duplicate data is removed from the storage pool.

### Querying a duplicate-identification process

Querying a duplicate-identification process displays the total number of bytes and total number of files processed.

#### Procedure

To query a duplicate-identification process, issue the **QUERY PROCESS** command.

## Querying a volume for information about linked files

You can query a volume for information about client files that link to files on other volumes. This information is useful when file extents created by data deduplication are distributed on different volumes.

### About this task

You can display information only about files that are linked to a volume or only about files that are stored on a volume. You can also display information about both stored files and linked files.

### Procedure

To display information about files on a volume, issue the **QUERY CONTENT** command and specify the **FOLLOWLINKS** parameter.

For example, suppose a volume in a deduplicated storage pool is physically destroyed. You must restore this volume. Before you do, you want to determine whether other volumes in the storage pool have files that are linked to files in the destroyed volume. With that information, you can decide whether to restore the other volumes. To identify links, you issue the **QUERY CONTENT** command for the destroyed volume and specify the **FOLLOWLINKS** parameter to list all the files with links to files on the destroyed volume.

## Displaying statistics about client-side data deduplication

Use client statistics to compare the amount of data that is transferred during a backup with the amount of data that would be transferred if no deduplication took place. Client statistics compare the amount of transferred data that was unique with the amount of data that was inspected by the client.

### About this task

You can use the activity log to view client statistics about data deduplication. The activity log can show historical information about one or more nodes. You can also view data reduction information for data deduplication by using the Tivoli Storage Manager API.

### Procedure

To view client statistics for data deduplication, see the activity log, or use the Tivoli Storage Manager API.

### Example

The following client statistics are taken from the activity log:

```
tsm> incremental c:\test* -sub=yes
Incremental backup of volume 'c:\test\'
Normal File--> 43,387,224 \\naxos\c$\test\newfile [Sent]
Successful incremental backup of '\\naxos\c$\test\'
```

|                                    |   |
|------------------------------------|---|
| Total number of objects inspected: | 7 |
| Total number of objects backed up: | 1 |
| Total number of objects updated:   | 0 |
| Total number of objects rebound:   | 0 |
| Total number of objects deleted:   | 0 |
| Total number of objects expired:   | 0 |
| Total number of objects failed:    | 0 |

```

Total objects deduplicated: 1
Total number of bytes inspected: 143.29 MB <= sum of all bytes inspected
Total number of bytes processed: 21.07 MB <= bytes after client-side
deduplication
Total number of bytes transferred: 21.07 MB <= bytes after compression
Data transfer time: 1.76 sec
Network data transfer rate: 12,217.36 KB/sec
Aggregate data transfer rate: 4,223.10 KB/sec
Objects compressed by: 0%
Deduplication reduction: 49.10% <== 1 - (21.07 / 41.37)
Total data reduction ratio: 85.30% <== 1 - (21.07 / 143.29)
Elapsed processing time: 00:00:05
ANS1900I Return code is 0.
ANS1901I Highest return code was 0.

```

The \\naxos\c\$\test directory uses approximately 143.29 MB of space. All files are already stored on the Tivoli Storage Manager server except the c:\test\newfile file, which is 41.37 MB (43,387,224 bytes). After client-side data deduplication, it is determined that only approximately 21 MB will be sent to the server.

The following client statistics are produced using the Tivoli Storage Manager API:

```

typedef struct tsmEndSendObjExOut_t
{
 dsUInt16_t stVersion; /* structure version */
 dsStruct64_t totalBytesSent; /* total bytes read from app */
 dsmBool_t objCompressed; /* was object compressed */
 dsStruct64_t totalCompressSize; /* total size after compress */
 dsStruct64_t totalLFBytesSent; /* total bytes sent LAN free */
 dsUInt8_t encryptionType; /* type of encryption used */
 dsmBool_t objDeduplicated; /* was object processed for dist. data dedup */
 dsStruct64_t totalDedupSize; /* total size after de-dup */
} tsmEndSendObjExOut_t;

```

The API returns the totalDedupSize member of the tsmEndSendObjExOut\_t structure. The calling application can calculate the client-side data deduplication reduction. It is calculated by comparing the total number of bytes that are sent to the server with the total deduplication size structure members. If data deduplication took place but no duplicate extents were found, the following calculation is used:

```
totalBytesSent == totalDedupSize
```

To determine whether client-side data deduplication processing took place, examine the Boolean value of the objDeduplicated member of the tsmEndSendObjExOut\_t structure.

## Querying the server activity log for client-side data deduplication statistics

You can use the Tivoli Storage Manager client reports for data deduplication statistics after each backup or archive operation. To find out the cumulative data reduction for a node or the reduction across multiple nodes, you can query the server activity log.

### About this task

After each backup or archive operation, the Tivoli Storage Manager client reports the data deduplication statistics in the server activity log.

## Procedure

To query the data deduplication statistics for the client, issue the **QUERY ACTLOG** command.

## Example

See the following example for sample information provided by the **QUERY ACTLOG** command:

```
tsm: HALLEY>q actlog nodename='modo'
```

| Date/Time         | Message                                                  |
|-------------------|----------------------------------------------------------|
| 03/15/10 09:56:56 | ANE4952I (Session: 406, Node: MOD0)                      |
|                   | Total number of objects inspected: 1 (SESSION: 406)      |
| 03/15/10 09:56:56 | ANE4954I (Session: 406, Node: MOD0)                      |
|                   | Total number of objects backed up: 1 (SESSION: 406)      |
| 03/15/10 09:56:56 | ANE4958I (Session: 406, Node: MOD0)                      |
|                   | Total number of objects updated: 0 (SESSION: 406)        |
| 03/15/10 09:56:56 | ANE4960I (Session: 406, Node: MOD0)                      |
|                   | Total number of objects rebound: 0 (SESSION: 406)        |
| 03/15/10 09:56:56 | ANE4957I (Session: 406, Node: MOD0)                      |
|                   | Total number of objects deleted: 0 (SESSION: 406)        |
| 03/15/10 09:56:56 | ANE4970I (Session: 406, Node: MOD0)                      |
|                   | Total number of objects expired: 0 (SESSION: 406)        |
| 03/15/10 09:56:56 | ANE4959I (Session: 406, Node: MOD0)                      |
|                   | Total number of objects failed: 0 (SESSION: 406)         |
| 03/15/10 09:56:56 | ANE4982I (Session: 406, Node: MOD0)                      |
|                   | Total objects deduplicated: 1 (SESSION: 406)             |
| 03/15/10 09:56:56 | ANE4977I (Session: 406, Node: MOD0)                      |
|                   | Total number of bytes inspected: 7.05 MB (SESSION: 406)  |
| 03/15/10 09:56:56 | ANE4975I (Session: 406, Node: MOD0)                      |
|                   | Total number of bytes processed: 33 B (SESSION: 406)     |
| 03/15/10 09:56:56 | ANE4961I (Session: 406, Node: MOD0)                      |
|                   | Total number of bytes transferred: 33 B (SESSION: 406)   |
| 03/15/10 09:56:56 | ANE4963I (Session: 406, Node: MOD0)                      |
|                   | Data transfer time: 0.00 sec (SESSION: 406)              |
| 03/15/10 09:56:56 | ANE4966I (Session: 406, Node: MOD0)                      |
|                   | Network data transfer rate: 77.09 KB/sec (SESSION: 406)  |
| 03/15/10 09:56:56 | ANE4967I (Session: 406, Node: MOD0)                      |
|                   | Aggregate data transfer rate: 0.01 KB/sec (SESSION: 406) |
| 03/15/10 09:56:56 | ANE4968I (Session: 406, Node: MOD0)                      |
|                   | Objects compressed by: 0% (SESSION: 406)                 |
| 03/15/10 09:56:56 | ANE4981I (Session: 406, Node: MOD0)                      |
|                   | Deduplication reduction: 100.00% (SESSION: 406)          |
| 03/15/10 09:56:56 | ANE4976I (Session: 406, Node: MOD0)                      |
|                   | Total data reduction ratio: 100.00% (SESSION: 406)       |
| 03/15/10 09:56:56 | ANE4964I (Session: 406, Node: MOD0)                      |
|                   | Elapsed processing time: 00:00:02 (SESSION: 406)         |

The following example shows how to use the activity log to gather the data reduction information across all nodes that belong to the DEDUP domain:

```
dsmadm -id=admin -password=admin -displaymode=list -scrollprompt=no "select
DISTINCT A1.MESSAGE, A2.MESSAGE from ACTLOG A1, ACTLOG A2 where A1.NODENAME
in (select NODE_NAME from nodes where domain_name='DEDUP') and
A1.SESSID=A2.SESSID and A1.MSGNO=4977 and A2.MSGNO=4961 and EXISTS
(select A3.SESSID from ACTLOG A3 where A3.SESSID=A1.SESSID and A3.MSGNO=4982)"
| grep 'MESSAGE:' | sed -r 's/MESSAGE:.*:\s+([0-9]+(\.[0-9]+)?)\s+
(B|KB|MB|GB|TB).*(SESSION: .*)\1 \3/' | sed -r 's/\././' | awk -f awk.txt
```

The `awk.txt` file contains the following statements:

```

BEGIN { bytesInspected = 0; bytesTransferred = 0; }

{ if ($2=="B") valueInKB = 0;
 if ($2=="KB") valueInKB = $1;
 if ($2=="MB") valueInKB = $1 * 1024;
 if ($2=="GB") valueInKB = $1 * 1024 * 1024;
 if ($2=="TB") valueInKB = $1 * 1024 * 1024 *1024;

 if (NR % 2 == 1) bytesInspected += valueInKB;
 if (NR % 2 == 0) bytesTransferred += valueInKB;
}

END {printf("Number of bytes inspected:
%d KB\n Number of bytes transferred: %d
KB\nData reduction ratio: %d %\n", bytesInspected,
bytesTransferred, (1-bytesTransferred/bytesInspected)*100)}

```

The **QUERY ACTLOG** command gives a summary, as shown in the following example:

```

Number of bytes inspected: 930808832 KB
Number of bytes transferred: 640679936 KB
Data reduction ratio: 31 %

```

#### Related tasks:

“Using the Tivoli Storage Manager activity log” on page 828

## Querying file spaces for information about deduplicated data

You can remove deduplicated data from a file space to make more space available. To view information about space available in the file space, use the **QUERY OCCUPANCY** command.

### Procedure

To query the storage pool where client file spaces are stored, and to view the amount of logical space they occupy, issue the **QUERY OCCUPANCY** command.

### Example

The Physical Space Occupied in the **QUERY OCCUPANCY** output represents the amount of space that is used by physical files, including empty space within aggregates. For storage pools that use data deduplication, the Physical Space Occupied is not displayed. The Logical Space Occupied represents the amount of space, excluding empty space within aggregates, that is used after data deduplication is completed for the node.

In the example, information is displayed for the following file spaces:

- \\abc\fs1: a file space in the **NODEDUPPOOL** storage pool that is not used for data deduplication.
- \\abc\fs2: a file space in the **YESDEDUPPOOL** storage pool that is used for data deduplication

```
tsm: SERVER1>q occupancy dedup*
```

| Node Name | Type | Filespace Name | FSID | Storage Pool Name | Number of Files | Physical Space Occupied (MB) | Logical Space Occupied (MB) |
|-----------|------|----------------|------|-------------------|-----------------|------------------------------|-----------------------------|
| DEDUP_N   | Bkup | \\abc\fs1      | 17   | NODEDUPPOOL       | 63              | 10.00                        | 8.00                        |
| DEDUP_Y   | Bkup | \\abc\fs2      | 18   | YESDEDUPPOOL      | 63              | -                            | 8.00                        |

For the **DEDUP\_N** node, 10 MB of data is placed in the fs1 file space. The amount of data that is marked for expiration is 2 MB, which is removed during the next expiration process. Therefore, Physical Space Occupied reports 10 MB and Logical Space Occupied reports 8 MB for the **DEDUP\_Y** node.

For the **DEDUP\_Y** node, 8 MB of data is placed in the fs2 file space, which represents the amount of data that is managed after it is reduced by data deduplication.

Issue the **select \* from occupancy** command to get LOGICAL\_MB and REPORTING\_MB values. The following command contains these values:

- LOGICAL\_MB is the amount of space that is used by a file space after it is reduced by data deduplication.
- REPORTING\_MB is the amount of space that is occupied before the data is deduplicated.

Use the REPORTING\_MB and the LOGICAL\_MB values to calculate the space that you save by using data deduplication:

REPORTING\_MB - LOGICAL\_MB =  
Space that you can save by using data deduplication (in MB)

The \\tsmsrv\fs1 file space manages 30 MB of space, but 10 MB is eliminated by either client-side or server-side data deduplication. The occupancy table contains the following information:

```
tsm: SERVER1>select * from occupancy where NODE_NAME='BRIAN'

 NODE_NAME: BRIAN
 TYPE: Bkup
FILESPACE_NAME: \\tsmsrv\fs1
 STGPPOOL_NAME: YESDEDUPPOOL
 NUM_FILES: 63
 PHYSICAL_MB: 0.00
 LOGICAL_MB: 20.00
 REPORTING_MB: 30.00
 FILESPACE_ID: 17
```

**Tip:** The LOGICAL\_MB value takes into account only the amount of data that is stored in the storage pool.

The \\tsmsrv\fs1 file space backs up 20 MB of unique data, which means that LOGICAL\_MB is 20 MB. The data deduplication saving for the file space is 10 MB.

## Scenarios for data deduplication

You can benefit from client-side data deduplication when it is used in combination with other Tivoli Storage Manager functions and products. You can reduce storage requirements when you use client-side data deduplication with image backups, system state backups, and file-level backups. When you use caching with data deduplication, you can reduce network traffic.

For example, IBM Tivoli Storage Manager for Mail and IBM Tivoli Storage Manager for Databases can use client-side data deduplication through the Tivoli Storage Manager API to create backup sets and export node data.

The progressive incremental backup technology in Tivoli Storage Manager provides an effective method of efficiently reducing the amount of data that is processed in each backup. This technology can also be effectively combined with data deduplication. When used in combination, data is initially reduced by the



incremental processing that is able to skip unchanged objects without applying deduplication processing against them. For those objects that do require a backup, data deduplication is applied.

Another Tivoli Storage Manager backup model is the use of incremental-forever backups. With this technology, each subsequent backup achieves significant storage savings by not having to send unchanged objects. These unchanged objects then do not need to go through deduplication processing, which is an efficient method of reducing data.

### **Reducing the storage requirement of image backups**

With client-side data deduplication, you can further reduce the storage requirement of image backups. Tivoli Storage Manager can perform a snapshot-based image backup during which the volume is available to other system applications.

Image backup can be full or incremental. In a typical scenario, full image backups are scheduled less frequently than incremental image backups. For example, a full image backup is scheduled weekly and incremental backups are scheduled daily, except for the day of the selective image backup. The frequency of full image backups is often driven by the available storage space. For example, each image backup of a 50 GB volume might need 50 GB of space in a storage pool.

One approach to reduce the required storage space is to use compression. To further reduce the storage footprint of image backups, you can use client-side data deduplication. With data deduplication, you can perform more frequent full image backups without significant use of storage space. The reduced need for storage space is because only unique data is sent to the server during an image backup operation.

### **Reducing the storage requirement of system state backups**

With client-side data deduplication, you can reduce the amount of duplicate data that is stored on the server during system state backups. *System state* consists of all system state and system services components that can be started. Tivoli Storage Manager uses Microsoft Volume Shadow Copy Service (VSS) to back up all system state components as a single object, which provides a consistent point-in-time snapshot of the system state.

You can use VSS on Windows Server 2003, Windows Server 2008, and Windows Vista operating systems. For details about backing up the Windows system state, see *Tivoli Storage Manager: Client Installation and User Guide*.

System state can contain thousands of objects and take a large amount of storage space on the server. It is likely that system state objects do not change much between backups. This results in a large amount of duplicate data being stored on the server. In addition, similar systems are likely to have a similar system state. Therefore, when you perform system state backups on these systems, there is an increase in duplicate data.

System state backup, when used in combination with client-side data deduplication, reduces the amount of duplicate data that is stored on the server. The reduction amount can vary, depending on the makeup of your data.

In the following example, a backup of the system state was performed on two similar systems that run Windows Server 2008. There was no data backed up to the storage pool. On the first system, the system-state data was deduplicated by



45%, as shown in Figure 27. A backup of the system state yielded a deduplication reduction of 98% on the second system, as shown in Figure 28.

This example shows a sample deduplication reduction of 45% for the system state data:

```
Total number of objects inspected: 63,800
Total number of objects backed up: 63,800
Total number of objects updated: 0
Total number of objects rebound: 0
Total number of objects deleted: 0
Total number of objects expired: 0
Total number of objects failed: 0
Total objects deduplicated: 43,302
Total number of bytes inspected: 9.77 GB
Total number of bytes processed: 5.32 GB
Total number of bytes transferred: 5.32 GB
Data transfer time: 70.30 sec
Network data transfer rate: 79,431.06 KB/sec
Aggregate data transfer rate: 482.50 KB/sec
Objects compressed by: 0%
Deduplication reduction: 45.75%
Total data reduction ratio: 45.51%
Elapsed processing time: 03:12:54
```

*Figure 27. Final statistics of the system state backup on system 1*

This example shows a sample deduplication reduction of 98% for the system state data:

```
Total number of objects inspected: 55,007
Total number of objects backed up: 55,007
Total number of objects updated: 0
Total number of objects rebound: 0
Total number of objects deleted: 0
Total number of objects expired: 0
Total number of objects failed: 0
Total objects deduplicated: 34,606
Total number of bytes inspected: 6.19 GB
Total number of bytes processed: 152.25 MB
Total number of bytes transferred: 152.25 MB
Data transfer time: 3.68 sec
Network data transfer rate: 42,354.40 KB/sec
Aggregate data transfer rate: 63.47 KB/sec
Objects compressed by: 0%
Deduplication reduction: 98.04%
Total data reduction ratio: 97.60%
Elapsed processing time: 00:40:56
```

*Figure 28. Final statistics of the system state backup on system 2*

## **Reducing the storage requirement of Tivoli Storage Manager for Virtual Environments backups**

A Tivoli Storage Manager for Virtual Environments backup can take a large amount of storage space on the server. Using client-side data deduplication, you can reduce the amount of duplicate data that is stored during a backup operation.

Tivoli Storage Manager for Virtual Environments backups consist of all virtual machines in the environment. Often, large portions of individual backups are common with other backups. Therefore, when you perform backup operations, there is an increase in duplicate data.

When you use client-side data deduplication in combination with backups for Tivoli Storage Manager for Virtual Environments, you can reduce the amount of duplicate data that is stored on the server. The reduction amount varies, depending on the makeup of your data.

## Reducing the storage requirement of Tivoli Storage Manager for Mail and Tivoli Storage Manager for Databases

You can use client-side data deduplication with Tivoli Storage Manager for Mail and Tivoli Storage Manager for Databases through the Tivoli Storage Manager API. Using client-side deduplication with these products reduces space requirements.

Before you use data deduplication, ensure that your system meets all prerequisites.

You can turn on client-side data deduplication by adding `DEDUPLICATION YES` to the `dsm.opt` file.

### Related concepts:

“Client-side data deduplication” on page 301

## Verifying data deduplication for Tivoli Storage Manager for Mail and Tivoli Storage Manager for Databases:

In Tivoli Storage Manager V6.1 or earlier, data protection clients do not provide data deduplication reduction statistics in the graphical user interface. In this situation, you can verify that data deduplication occurs.

### Procedure

To verify data deduplication in V6.1 or earlier, complete the following steps:

1. Add the following statements to the `dsm.opt` file:

```
TRACEFILE api.txt
TRACEFLAGS dedup api
```

2. Locate a trace entry for the `tsmEndSendObjEx` API call. The entry looks like the following example:

```
03/05/2010 13:41:16.286 : dsmsend.cpp (2052): tsmEndSendObjEx: Total bytes
send 0 2105534, encryptType is NO encryptAlg is NONE compress is 0, dedup
is 1, totalCompress is 0 0 totalLFBytesSent 0 0 totalDedupSize 0 15001
```

In the example, the **dedup** parameter of the **TRACEFLAGS** statement indicates whether the objects were processed for client-side data deduplication. The **totalDedupSize** parameter of the **TRACEFLAGS** statement reports the number of bytes that were sent to the server after deduplication.

With image and system-state backups, you can have more frequent full backups. Similarly, with client-side data deduplication you can have more frequent full backups of the application data, for example, with backups of databases and storage groups.

## **Reducing the storage requirement of file-level backups**

The Tivoli Storage Manager backup-archive client provides several data reduction methods. These methods include compression, incremental backup processing, subfile backup, and data deduplication. With client-side data deduplication, you can reduce the amount of data that is sent to the server during file-level backup.

When only the metadata of the file is changed, for example, with access control lists or extended attributes, typically the whole file is backed up again. With client-side data deduplication, although the file is backed up again, only the metadata is sent to the server.

## **Reducing network traffic by using data deduplication cache**

You can avoid queries to the Tivoli Storage Manager server during data deduplication when you cache hash sums that are already sent to the server. It is beneficial with client-side data deduplication to query the server, for example, when extents are identified and hash sums calculated. Also, data deduplication cache can be used to your advantage in some situations when multiple processes run concurrently. When you use data deduplication cache, consider factors such as insufficient file space and synchronization with the server that might impact on data deduplication.

Client-side data deduplication identifies extents in the data stream and calculates the associated hash sums. Data deduplication determines whether a data extent with the same hash sum is already stored on the server. If it is already stored, the backup-archive client only needs to notify the server about the hash sum, and can avoid sending the corresponding data extent. This process reduces the amount of data that is exchanged between the Tivoli Storage Manager backup-archive client and the server.

You can avoid having to query the server when the hash sums that are already sent to the server are cached. When additional data extents are identified with identical hash sums, the server can be notified of the hash sum, saving additional network traffic. The time spent on the query and response is also reduced. In most cases, it is beneficial to use client deduplication cache for these hash sums.

## **Multiple processes and API applications**

When multiple processes, such as concurrent backups or Tivoli Storage Manager API applications, transfer content concurrently, they cannot use the cache. In such a situation, only a single process between the open and close processes can access the client data deduplication cache. Multi-session backups from the same process can use the deduplication cache. In general, processes that do not get the lock on the cache can perform client-side data deduplication. However, the processes cannot query or store hash sums that are found in the cache.

## **Insufficient file space**

The Tivoli Storage Manager client cannot use a cache for data deduplication if there is not enough file space for a hash sum cache. Client-side data deduplication can take place, but it has no memory of hash sums that are already sent by the client or already found on the server. Data deduplication, generally, must query the server to find out if hash sums are duplicates. Hash sum lists are maintained in memory for the life of a transaction. If a hash sum is encountered multiple times within the same transaction, the hash sum is detectable without a cache.

## Synchronization of the cache for client-side data deduplication

The cache for client-side data deduplication can become unsynchronized with the deduplicated disk storage pool of the server. Object expiration, file space deletion, or overflow to an associated tape storage pool can cause the cache to be unsynchronized. When the client cache contains entries that are no longer in the deduplicated storage pool of the Tivoli Storage Manager server, the client cache resets. The client cache cannot delete specific entries when objects are deleted from the storage pool of the server.

In environments where it is likely that the client deduplication cache would become unsynchronized with the deduplicated storage pool of the server, use server-side data deduplication. The cache can become unsynchronized during a backup or an API application function. The Tivoli Storage Manager client can back up data again, but the Tivoli Storage Manager API cannot. Wherever it is difficult to perform a backup again, do not use the cache of client-side data deduplication.

## Restoring deduplicated data from backup sets

You can restore deduplicated objects to the same storage pool or to another storage pool that uses or does not use data deduplication.

When a backup set is created for a node by using the **GENERATE BACKUPSET** command, all associated node data is placed onto the backup media. It is also placed on the backup media when node data is exported for a node by the **EXPORT NODE** command. This placement ensures that the associated objects can be restored without any server dependencies, apart from the backup media.

When you restore deduplicated objects, consider the following situations:

- If the object is restored to the same storage pool, for example, by the **RECLAIM STGPPOOL** command, any duplicate data blocks are replaced with references to deduplicated extents. These duplicate data blocks were identified by the **IDENTIFY** processes.
- If a deduplicated object is moved to another storage pool that uses deduplication, duplicate extents are processed as the object is moved. The object is placed in the target storage pool in a deduplicated state, and no additional processing is needed on that object. The deduplicated object is moved, for example, by the **MOVE DATA** command or by storage pool migration.
- If a deduplicated object is moved to a storage pool that does not use deduplication, that object is created in the target storage pool. All associated data is also in the target storage pool.

## Data deduplication and data compatibility

With client-side data deduplication, data is compressed extent by extent, which means data compatibility is possible between the client and the server and between different versions of Tivoli Storage Manager. Also, data extents that are created by different operations are compatible, which can mean that a greater proportion can be deduplicated.

## Compression

With client-side data deduplication, compression is done extent by extent. When you use client-side data deduplication, data is compatible between compressed extents and extents that are not compressed. This compatibility means that extents

can be shared between the client and server, regardless of how the data was backed up. Compression can save storage space, however, it can increase processor usage on the client system.

Consider the following factors when you use data compression in an environment that uses multiple clients:

- Extents that are compressed by a backup-archive client that uses Tivoli Storage Manager V6.1 or earlier are not compatible with compressed extents from a V6.2 client. Extents are also not compatible with uncompressed extents because each version uses a different compression algorithm.
- With a deduplication storage pool that contains data from clients that are V6.2 and earlier, there is a mixture of compressed and non-compressed extents. For example, assume that a restore operation is run from a client that is earlier than V6.2. Compressed extents from a client at a later version of Tivoli Storage Manager are uncompressed by the server during the restore operation.
- When backup sets are generated for clients that are at a version earlier than V6.2, V6.2 compressed extents that are also part of the data to be backed up are uncompressed.

Even though most data is compatible when using compression, ensure that all clients are at V6.2 and later. This method minimizes the need for data compression when you restore data or create a backup set.

## **Compatibility with data from earlier client versions**

Data that is stored by earlier client versions and processed for deduplication extents by the server is compatible with new extents. For example, an extent that is identified by the server from an earlier client version matches the query from client-side data deduplication to the server. The extent is not sent to the server, only a reference to it is sent. Therefore, in the same storage pool, extents from different levels of the client are equivalent. Regardless of where extents are processed, whether on the server or on the client, they are compatible. Migration of client and server versions is possible without the data being sent again to the server.

## **File image and Tivoli Storage Manager FastBack® mount backups**

Data extents that are created by different operations are compatible. For example, data extents are compatible that are created by file-level, image, or IBM Tivoli Storage Manager FastBack mount backups. This can mean that a greater proportion of the extents can be deduplicated.

### **Image and Tivoli Storage Manager mount backups**

Assume that you integrate the Tivoli Storage Manager FastBack mount with Tivoli Storage Manager to back up volumes to a Tivoli Storage Manager server. The Tivoli Storage Manager client backs up the Tivoli Storage Manager FastBack repository to a remote server. You previously performed an image or a file-level backup of this data with Tivoli Storage Manager client. Then it is likely that the Tivoli Storage Manager FastBack mount backup can use many data extents that are already stored on the server.

For example, you perform an image backup of a volume that uses the Tivoli Storage Manager client. Then you back up the same volume with Tivoli Storage

Manager FastBack. You can expect a greater amount of data deduplication when you back up the Tivoli Storage Manager FastBack mount.

### **Image and file-level backups**

Data extents that are created by a file-level backup can be used by the Tivoli Storage Manager client during an image backup. For example, you perform a full incremental backup of the C drive on your computer. Then you run an image backup of the same drive. You can expect a greater amount of data deduplication during the image backup. You can also expect a greater amount of data deduplication during a file-level backup or an archive operation that immediately follows an image backup.

## **Data deduplication and disaster recovery management**

Use the following scenarios to help you consider factors that can affect disaster recovery management when you use deduplicated primary or copy storage pools.

Data deduplication is only permitted for storage pools that are associated with a devtype=FILE device class. The following scenarios show how you can implement the data deduplication of storage pools to ensure that you can restore data if a failure occurs.

### **Primary storage pool is deduplicated and a single copy storage pool is not deduplicated**

The amount of time required to back up the primary storage pool to a non-deduplicated copy storage pool can increase. While data is copied to the copy storage pool, the deduplicated data that represents a file must be read. The file must be recreated and stored in the copy storage pool.

With this scenario, to recover data at a disaster recovery site, you can use disaster recovery management and copy storage pool volumes that are off-site.

### **Primary storage pool is deduplicated and multiple copy storage pools are not deduplicated**

The amount of time required to back up the primary storage pool can increase. This is because of the reads that are necessary to get the various data that represent an object written to one of these copy storage pools.

With this scenario, to recover data at a disaster recovery site, you can use disaster recovery management and copy storage pool volumes that are off-site. There is also a copy of the storage pool data on-site, in addition to the off-site support.

### **Primary storage pool is deduplicated and a single copy storage pool is deduplicated**

The main aim of this scenario is space savings at the primary server location. However, you cannot use disaster recovery management. Also, you cannot use the off-site rotation of copy storage pool volumes because the deduplicated copy storage pool can be achieved only by using devtype=FILE volumes.

With this scenario, you can have a risk in that there is no off-site copy of the data. The off-site copy could be used if the primary server location, hardware, or data center is damaged or destroyed. This scenario can result in the loss of data or the inability to recover that data.

**Primary storage pool is deduplicated, a single copy storage pool is not deduplicated, and a single copy storage pool is deduplicated**

The deduplicated copy storage pool provides space savings for the primary server location and the duplication of the data in the primary storage pool. You use server-side data deduplication at the level of a single storage pool. Therefore, a deduplicated primary storage pool and a deduplicated copy storage pool reference different data. They also maintain different database references to track and manage the data that represent a given file.

Alternatively, you can use the non-deduplicated copy storage pool, which is probably tape, along with disaster recovery management as an off-site data protection site. You can use the copy storage pool volumes that are off-site, together with an appropriate database backup, to restore the server. You can also use the volumes to restore or retrieve data.

---

## **Writing data simultaneously to primary, copy, and active-data pools**

With Tivoli Storage Manager, you can write data simultaneously to a primary storage pool, copy storage pools, and active-data pools. The simultaneous-write function increases your level of data protection and reduces the amount of time required for storage pool backup.

### **About this task**

You can write data simultaneously during any of the following operations:

- Client store sessions, for example:
  - Backup and archive sessions by Tivoli Storage Manager backup-archive clients.
  - Backup and archive sessions by application clients using the Tivoli Storage Manager API.
  - Migration processes by hierarchical storage management (HSM) clients. Migrated data is simultaneously written only to copy storage pools. Migrated data is not permitted in active-data pools.
- Server migration of data within a storage pool hierarchy.
- Server import processes that involve copying exported file data from external media to a primary storage pool that is configured for the simultaneous-write function. Imported data is simultaneously written to copy storage pools. Imported data is not simultaneously written to active-data pools. To store newly imported data into an active-data pool, use the **COPY ACTIVEDATA** command.

The maximum number of copy storage pools and active-data pools to which data can be simultaneously written is three. For example, you can write data simultaneously to three copy storage pools, or you can write data simultaneously to two copy storage pools and one active-data pool.



**Attention:** Do not use the simultaneous-write function to replace the task of regularly backing up storage pools. If you use the function to simultaneously write to copy storage pools, active-data pools, or both, ensure that the copy of each primary storage pool is complete by regularly issuing the **BACKUP STGPOOL** command and the **COPY ACTIVE DATA** command. If you fail to regularly back up storage pools, you can lose the ability to recover primary storage pool data. For example, if a copy storage pool fails during a write operation and the **COPYCONTINUE** parameter is set to YES, the Tivoli Storage Manager server removes the failed copy storage pool from the copy pool list for the remainder of the client session. After the copy storage pool is removed, the Tivoli Storage Manager server continues to write to the primary storage pool and to any remaining copy storage pools and active-data pools. If these pools become damaged or lost, and if you did not issue the **BACKUP STGPOOL** command for the copy storage pool that failed, you might not be able to recover your data.

Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

## Guidelines for using the simultaneous-write function

The goal of the simultaneous-write function is to minimize the amount of time that is required for storage-pool backup operations. Tivoli Storage Manager provides several options for accomplishing this goal. Your choice depends on how you want to manage your environment.

You can specify the simultaneous-write function for a primary storage pool if it is the target for client store sessions, server import processes, or server data-migration processes. You can also specify the simultaneous-write function for a primary storage pool when it is the target for *all* of the eligible operations.

Writing data simultaneously during client store sessions might be the logical choice if you have sufficient time for mounting and removing tapes during the client store session. However, if you choose this option you must ensure that a sufficient number of mount points and drives are available to accommodate all the client nodes that are storing data.

As a best practice, you are probably issuing the **BACKUP STGPOOL** and **COPY ACTIVE DATA** commands for all the storage pools in your storage pool hierarchy. If you are, and if you migrate only a small percentage of data from the primary storage pool daily, writing data simultaneously during client store sessions is the most efficient option. This method is efficient because data is stored in copy storage pools and active-data pools when the client stores the data. Little or no data is left to copy during backup storage pool or copy active-data operations.

Writing data simultaneously during server data-migration processes is another option. It is the most efficient method of writing data simultaneously if you migrate *all* the data in your primary storage pool nightly and then back up the primary storage pools. The reason for the efficiency is that data written simultaneously to copy storage pools or active-data pools during migration is not copied during backup storage pool or copy active-data operations.

Use the simultaneous-write function during migration if you have many client nodes and the number of mount points that are required to write data simultaneously during client store sessions is unacceptable. Similarly, mounting



and removing tapes when writing data simultaneously during client store sessions might be taking too much time. If so, consider writing data simultaneously during migration.

Another option is to specify the simultaneous-write function for a primary storage pool if it is the target for any of the eligible operations (client store, server import, server migration). This choice is preferable if, for example, you have large files to back up (for example, image files, database backup files, or Tivoli Data Protection files). Instead of backing up these files to the random-access disk storage pool at the top of the storage hierarchy, you can back them up to the sequential-access disk storage pool that is the next storage pool in the hierarchy. If you specify the simultaneous-write function for any of the eligible operations for the next storage pool, the following events occur:

- Large files that are backed up to the next storage pool are simultaneously written to copy storage pools (and active-data pools, if you have them).
- Other files that migrate to the next storage pool are simultaneously written to the same copy storage pools (and active-data pools, if you have them).

By default, the Tivoli Storage Manager server writes data simultaneously during client store sessions if you have copy storage pools or active-data pools defined to the target storage pool.

You can also disable the simultaneous-write function. This option is useful if you have copy storage pools or active-data pools defined, but you want to disable the simultaneous-write function without deleting and redefining the pools.

## Limitations that apply to simultaneous-write operations

Using the simultaneous-write function requires consideration of factors such as storage devices and network configuration.

The following limitations apply:

- Data cannot be written simultaneously to copy storage pools and active-data pools during server data movements such as:
  - Reclamation
  - MOVE DATA processes
  - MOVE NODEDATA processes
  - Storage pool backup
  - Copy of active data to an active-data storage pool

The only server-data movement process that can write data simultaneously is migration.

- Simultaneous-write operations take precedence over LAN-free data movement. The operations go over the LAN, and the simultaneous-write configuration is accepted.
- You can back up or archive copies of files that were migrated by a Tivoli Storage Manager for Space Management client to the same Tivoli Storage Manager server to which they were migrated. However, the files are stored only in the primary storage pool. As a best practice, create current backup and archive versions of the files before the Tivoli Storage Manager for Space Management client migrates them.
- Target storage pools that are used for simultaneous-write operations can have different device classes if the device classes have compatible data formats. Performance is limited by the speed of the slowest device.

- Data deduplication has the following effects on simultaneous-write operations:

#### **Simultaneous write during client store operations**

If client-side deduplication is enabled, it is disabled before simultaneous-write operations occur. Non-deduplicated data is simultaneously written to target storage pools.

#### **Simultaneous write during server migration of data**

If a primary storage pool is set up for server-side deduplication, all copy storage pools and active-data pools are removed from simultaneous-write operations. For example, suppose that your simultaneous-write configuration comprises a primary storage pool, a copy storage pool, and an active-data pool. The primary storage pool is set up for server-side deduplication. Data is written only to the primary storage pool.

If a primary storage pool is not set up for server-side deduplication, data is written simultaneously only to copy storage pools or active data pools that are not set up for server-side deduplication. For example, suppose that your simultaneous-write configuration comprises a primary storage pool, a copy storage pool, and an active-data pool. The primary storage pool and the active-data pool are not set up for server-side deduplication. However, the copy storage pool is set up for server-side deduplication. When simultaneous-write operations occur, data is written only to the primary storage pool and the active-data pool.

- You cannot use the simultaneous-write function with Centera storage devices.
- The **COPYSTGPOLLS** and **ACTIVEDATAPOLLS** parameters are available only to primary storage pools that use **NATIVE** or **NONBLOCK** data format. This parameter is not available for storage pools that use the following data formats:
  - **NETAPPDUMP**
  - **CELERRADUMP**
  - **NDMPDUMP**
- Limitations apply when a NAS backup operation is writing a TOC file. If the primary storage pool that is specified in the **TOCDESTINATION** in the copy group of the management class has copy storage pools or active-data pools defined, the copy storage pools and active-data pools are ignored. The data is stored only in the primary storage pool.

## **Controlling the simultaneous-write function**

You control the simultaneous-write function by specifying certain parameters when you define or update primary storage pools. You can control when data is written simultaneously. You can also specify the copy storage pools and active-data pools to which data is simultaneously written.

### **Specifying when the simultaneous-write operations occur**

You can specify simultaneous-write operations for any primary storage pool that is the target of client store sessions, server import processes, or server data-migration processes. You can also disable the simultaneous-write function.

### **About this task**

To control the simultaneous-write function, use the **AUTOCOPY** parameter on the **DEFINE STGPPOOL** or **UPDATE STGPPOOL** commands for primary storage pools.

### **Remember:**

- Specify a value for the **AUTOCOPY** parameter on the primary storage pool that is the target of data movement. (The default is to write data simultaneously during client store sessions and server import processes.) For example, if you want to write data simultaneously only during server data-migration processes, specify **AUTOCOPY=MIGRATION** in the definition of the next storage pool in the storage pool hierarchy.
- The **AUTOCOPY** parameter is not available for copy storage pools or active-data pools.

Tivoli Storage Manager provides the following options for controlling when simultaneous-write operations occur:

### Procedure

- To disable the simultaneous-write function, specify **AUTOCOPY=NONE**.  
This option is useful, if, for example, you have copy storage pools or active-data pools defined, and you want to temporarily disable the simultaneous-write function without having to delete and then redefine the pools.
- To specify simultaneous-write operations only during client store sessions and server import processes, specify **AUTOCOPY=CLIENT**.  
During server import processes, data is simultaneously written only to copy storage pools. Data is not written to active-data pools during import processes.
- To specify that simultaneous-write operations take place only during server data-migration processes, specify **AUTOCOPY=MIGRATION**.  
During server data migration, data is simultaneously written to copy storage pools and active-data pools only if the data does not exist in those pools.
- To specify that simultaneous-write operations take place during client store sessions, server data-migration processes, and server import processes, specify **AUTOCOPY=ALL**.  
A primary storage pool can be the target for more than one type of data movement. For example, the next storage pool in a storage pool hierarchy can be the target for data migration from the primary storage pool at the top of the hierarchy. The next storage pool can also be the target for direct backup of certain types of client files (for example, image files). The **AUTOCOPY=ALL** setting on a primary storage pool ensures that data is written simultaneously during both server data-migration processes and client store sessions.

### Example

The following table provides examples of **AUTOCOPY** settings for some common scenarios in which the simultaneous-write function is used.

Table 31. **AUTOCOPY** settings

| If your goal is...                                                                                    | Set the <b>AUTOCOPY</b> parameter for the primary storage pool at the top of the storage hierarchy to... | Set the <b>AUTOCOPY</b> parameter for the next primary storage pool to... |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| To disable the simultaneous-write function                                                            | NONE                                                                                                     | NONE                                                                      |
| To enable simultaneous-write operations only during client store sessions and server import processes | CLIENT                                                                                                   | NONE                                                                      |

Table 31. **AUTOCOPY** settings (continued)

| If your goal is...                                                                                                                                                                                | Set the <b>AUTOCOPY</b> parameter for the primary storage pool at the top of the storage hierarchy to... | Set the <b>AUTOCOPY</b> parameter for the next primary storage pool to... |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| To enable simultaneous-write operations only during server data-migration processes                                                                                                               | NONE                                                                                                     | MIGRATION                                                                 |
| To simultaneously write client files to copy storage pools during migration. You also want simultaneous-write operations to occur for files that are directly backed up to the next storage pool. | NONE                                                                                                     | ALL                                                                       |
| To enable simultaneous-write operations during any of the following operations: client store sessions, server import processes, and server data-migration processes.                              | ALL                                                                                                      | ALL                                                                       |

For details about the **DEFINE STGPPOOL** and **UPDATE STGPPOOL** commands and parameters, see the *Administrator's Reference*.

## Specifying copy pools and active-data pools for simultaneous-write operations

The maximum number of copy storage pools and active-data pools to which data can be simultaneously written is three. For example, you can write data simultaneously to three copy storage pools. You can also write data simultaneously to two copy storage pools and one active-data pool, and so on.

### About this task

The parameters that are used to specify copy storage pools and active-data pools are on the **DEFINE STGPPOOL** and **UPDATE STGPPOOL** commands.

### Procedure

- To specify copy storage pools, use the **COPYSTGPOOLS** parameter.
- To specify active-data pools, use the **ACTIVEDATAPOLS** parameter.

### Results

Ensure that client sessions have sufficient mount points. Each session requires one mount point for the primary storage pool and a mount point for each copy storage pool and each active-data pool. To allow a sufficient number of mounts points, use the **MAXNUMP** parameter on the **REGISTER NODE** or **UPDATE NODE** commands.

### Example

For details about the **DEFINE STGPPOOL** and **UPDATE STGPPOOL** commands, refer to the *Administrator's Reference*.

**Related concepts:**

“Rules of inheritance for the simultaneous-write function” on page 353

## Specifying how the server reacts to a write failure during simultaneous-write operations

Write failures to copy or active-data pools might occur during while data is being simultaneously written. If a write failure occurs during a client store session, you can specify whether to continue or discontinue the operation.

### About this task

Use the **COPYCONTINUE** parameter on the **DEFINE STGPOOL** command to specify how the server reacts to a write failure to copy storage pools during client store sessions.

#### Restrictions:

- The setting of the **COPYCONTINUE** parameter does not affect active-data pools. If a write failure occurs for any of active-data pools, the server stops writing to the failing active-data pool for the remainder of the session, but continues storing files into the primary pool and any remaining active-data pools and copy storage pools. The active-data pool list is active only for the life of the session and applies to all the primary storage pools in a particular storage pool hierarchy.
- The setting of the **COPYCONTINUE** parameter does not affect the simultaneous-write function during server import. If data is being written simultaneously and a write failure occurs to the primary storage pool or any copy storage pool, the server import process fails.
- The setting of the **COPYCONTINUE** parameter does not affect the simultaneous-write function during migration. If data is being written simultaneously and a write failure occurs to any copy storage pool or active-data pool, the failing storage pool is removed and the data migration process continues. Write failures to the primary storage pool cause the migration process to fail.

### Procedure

- To stop writing to failing copy storage pools for the remainder of the session, but continue storing files into the primary pool and any remaining copy pools or active-data pools, specify **COPYCONTINUE=YES**.

The copy storage pool list is active only for the life of the session and applies to all the primary storage pools in a particular storage pool hierarchy.

- To fail the transaction and discontinue the store operation, specify **COPYCONTINUE=NO**.

For details about the **DEFINE STGPOOL** and **UPDATE STGPOOL** commands and parameters, refer to the *Administrator's Reference*.

#### Related concepts:

“Rules of inheritance for the simultaneous-write function” on page 353

## Rules of inheritance for the simultaneous-write function

When switching primary storage pools during client store sessions or server import processes, certain rules of inheritance apply to copy storage pool lists, active-data pool lists, and the setting of the **COPYCONTINUE** parameter.

When a client backs up, archives, or migrates a file, or when the server imports data, the data is written to the primary storage pool that is specified by the copy group of the management class that is bound to the data. If a data storage operation or a server import operation switches from the primary storage pool at the top of a storage hierarchy to a next primary storage pool in the hierarchy, the next storage pool inherits the list of copy storage pools, the list of active-data pools, and the value of the **COPYCONTINUE** parameter from the primary storage pool at the top of the storage pool hierarchy.

The following rules apply during a client store session or a server import process when the server must switch primary storage pools:

- If the destination primary storage pool has one or more copy storage pools or active-data pools defined using the **COPYSTGPOLLS** or **ACTIVEDATAPOLLS** parameters, the server writes the data to the next storage pool and to the copy storage pools and active-data pools that are defined to the destination primary pool, regardless whether the next pool has copy pools defined.

The setting of the **COPYCONTINUE** of the destination primary storage pool is inherited by the next primary storage pool. The **COPYCONTINUE** parameter specifies how the server reacts to a copy storage-pool write failure for any of the copy storage pools listed in the **COPYSTGPOLLS** parameter. If the next pool has copy storage pools or active-data pools defined, they are ignored as well as the value of the **COPYCONTINUE** parameter.

- If no copy storage pools or active-data pools are defined in the destination primary storage pool, the server writes the data to the next primary storage pool. If the next pool has copy storage pools or active-data pools defined, they are ignored.

These rules apply to all the primary storage pools within the storage pool hierarchy.

### Related tasks:

“Specifying copy pools and active-data pools for simultaneous-write operations” on page 351

“Specifying how the server reacts to a write failure during simultaneous-write operations” on page 352

## Simultaneous-write operations: Examples

Illustrated examples of simultaneous-write operations show how the function works in various storage pool configurations. Other examples show what happens when an error occurs during a simultaneous-write operation.

## Examples of simultaneous-write operations during client store operations

Examples show how the simultaneous-write function works during client store operations. In all the examples, client nodes, whose files require fast restore, are members of a policy domain that specifies an active-data pool.

For these examples, assume the following conditions:

- Primary storage pools DISKPOOL and TAPEPOOL are linked to form a storage hierarchy. DISKPOOL is at the top of the storage hierarchy and TAPEPOOL is the next pool in the storage hierarchy.
- The value of the **AUTOCOPY** parameter for DISKPOOL is CLIENT. The value of the **AUTOCOPY** parameter for TAPEPOOL is NONE.
- The active backup data belonging to certain clients must be restored as quickly as possible if a disaster occurs. These clients are members of policy domain FASTRESTORE, which specifies an active-data pool as the destination for active backup data. Files A and B belong to a node in this domain and are bound to management class STANDARD. The destination specified in its backup copy group is DISKPOOL.
- The data belonging to other nodes is less critical. Restore times are flexible. These nodes are assigned to policy domain NORMAL, which does not have an active-data pool specified. Files C, D, and E belong to one of the nodes in this domain and are bound to management class STANDARD. The destination that is specified in its backup copy group is DISKPOOL.
- DISKPOOL has enough space to store only files C and D, but its next pool (TAPEPOOL) has enough space for file E.

### Related concepts:

Chapter 13, “Implementing policies for client data,” on page 483

### Writing data simultaneously during a simple client store session:

In this example, the simultaneous-write function automatically copies client data to two copy storage pools and an active-data pool during a client store operation.

With DISKPOOL and TAPEPOOL already defined as your storage pool hierarchy, issue the following commands to enable the simultaneous-write function:

```
define stgpool cypool1 mytapedevice pooltype=copy
define stgpool cypool2 mytapedevice pooltype=copy
define stgpool activedatapool mydiskdevice pooltype=activedata
update stgpool diskpool copystgpools=cypool1,cypool2 copycontinue=yes
 activedatapools=activedatapool
```

where MYTAPEDEVICE is the device-class name associated with the copy storage pools and MYDISKDEVICE is the device-class name associated with the active-data pool.

The storage pool hierarchy and the copy storage pools and active-data pool associated with DISKPOOL are displayed in Figure 29 on page 355.



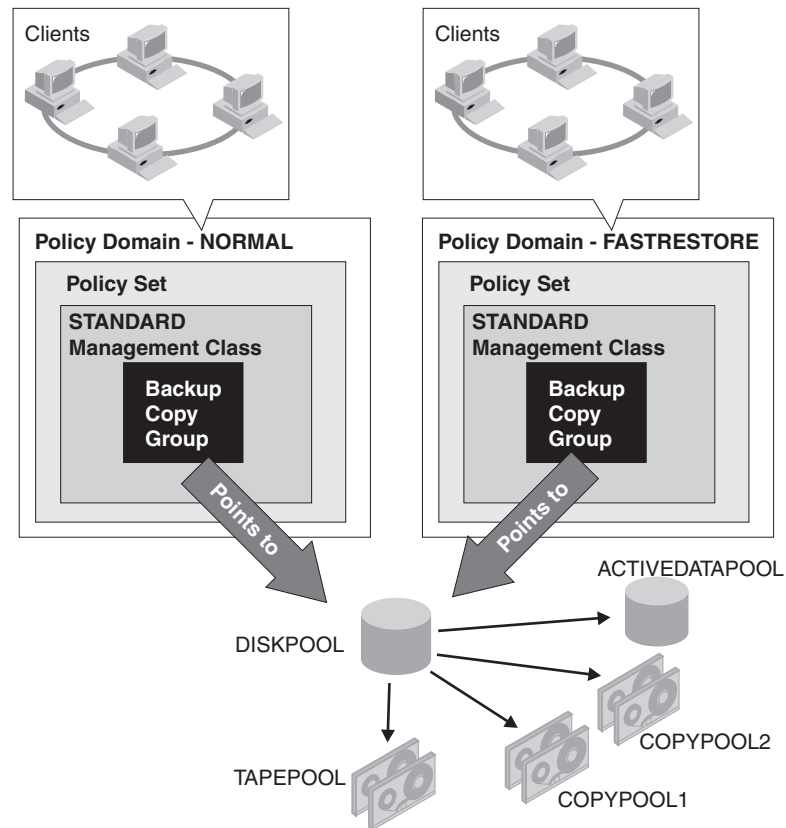


Figure 29. Example of storage pool hierarchy with copy storage pools defined for DISKPOOL

During a simultaneous-write operation, the next storage pool TAPEPOOL inherits the list of copy storage pools (COPYPOOL1 and COPYPOOL2) and the value of the COPYCONTINUE parameter from DISKPOOL, the primary pool at the top of the storage pool hierarchy. TAPEPOOL also inherits the list of active-data pools (ACTIVEDATAPOOL). When files A, B, C, D, and E are backed up, the following events occur:

- A and B are written to DISKPOOL, COPYPOOL1, COPYPOOL2, and ACTIVEDATAPOOL.
- C and D are written to DISKPOOL, COPYPOOL1, and COPYPOOL2.
- File E is written to TAPEPOOL, COPYPOOL1 and COPYPOOL2.

See Figure 30 on page 356.



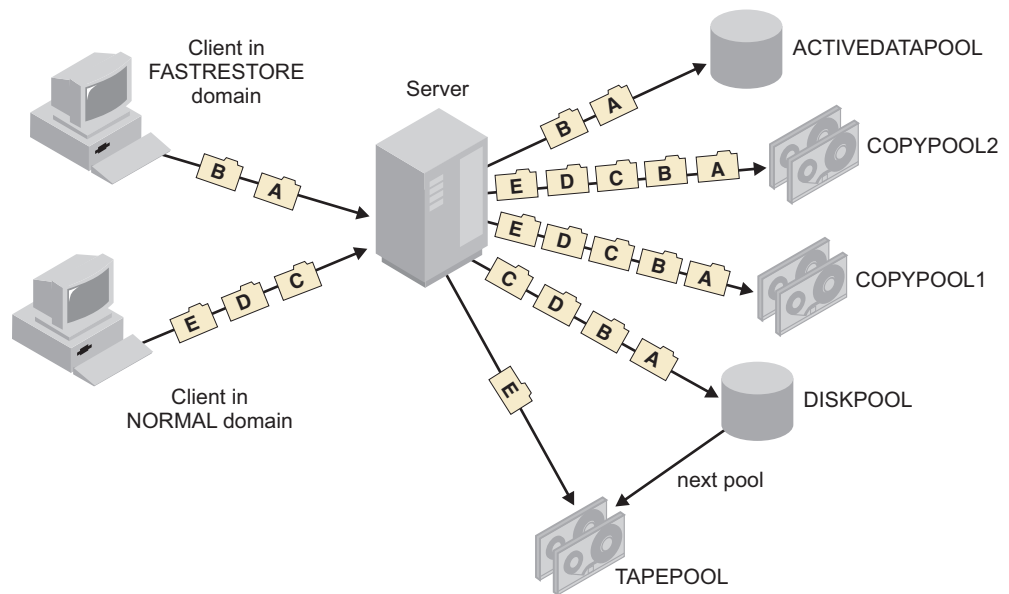


Figure 30. Inheriting a list of copy storage pools

As a precaution, issue the **BACKUP STGPOOL** and **COPY ACTIVE DATA** commands after the backup operation has completed. Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when storage pools are backed up or when active data is copied.

#### Inheritance of an empty copy storage-pool list during a simultaneous-write operation:

In this example, the next storage pool in a hierarchy inherits empty copy storage pool and active-data pool lists from the primary storage pool at the top of the storage hierarchy.

You do not specify a list of copy storage pools for DISKPOOL. However, you do specify copy storage pools for TAPEPOOL (COPYPOOL1 and COPYPOOL2) and an active-data pool (ACTIVEDATAPOOL). You also specify a value of YES for the COPYCONTINUE parameter. Issue the following commands to enable the simultaneous-write function:

```
define stgpool cypool1 mytapedevice pooltype=copy
define stgpool cypool2 mytapedevice pooltype=copy
define stgpool activedatapool mydiskdevice pooltype=active data
update stgpool tapepool copystgpools=cypool1,cypool2
copycontinue=yes activedatapools=activedatapool
```

where MYTAPEDEVICE is the device-class name associated with the copy storage pools and MYDISKDEVICE is the device-class name associated with the active-data pool. Figure 31 on page 357 displays this configuration.

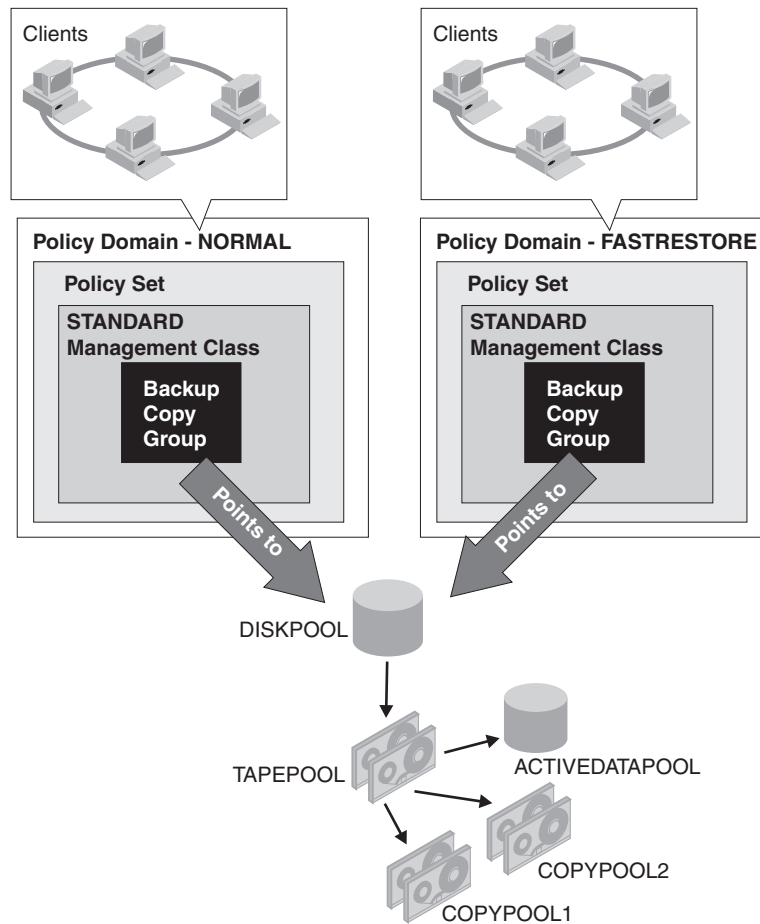


Figure 31. Example of storage pool hierarchy with copy storage pools defined for TAPEPOOL

When files A, B, C, D, and E are backed up, the following events occur:

- A, B, C, and D are written to DISKPOOL.
- File E is written to TAPEPOOL.

See Figure 32 on page 358.

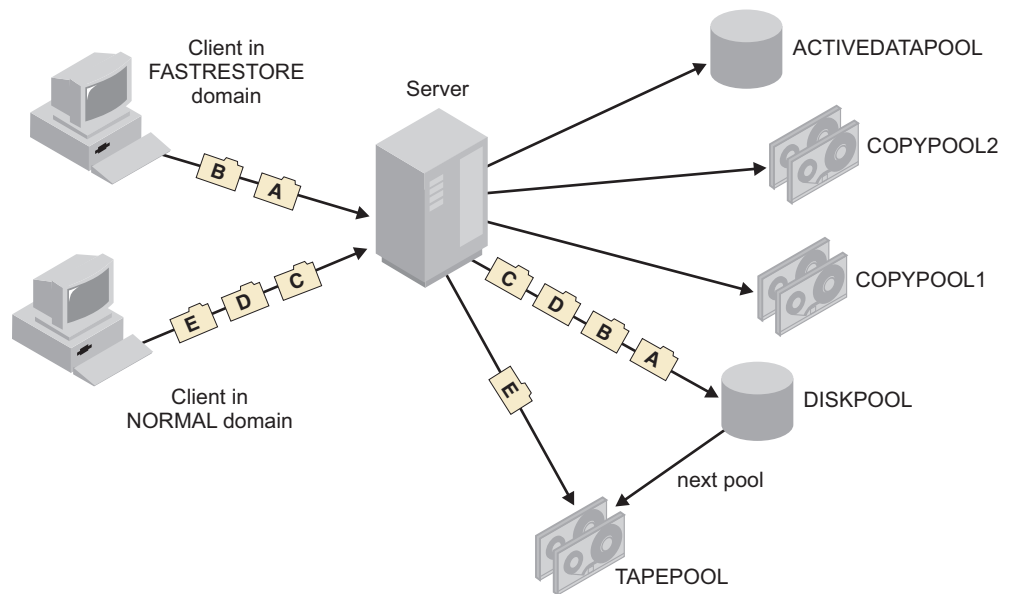


Figure 32. Inheriting an empty copy storage pool list

Although TAPEPOOL has copy storage pools and an active-data pool defined, file E is not copied because TAPEPOOL inherits empty copy storage pool and active-data pool lists from DISKPOOL.

As a precaution, issue the **BACKUP STGPPOOL** and **COPY ACTIVEDATA** commands after the backup operation has completed. Data that is simultaneously that is written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

#### A simultaneous-write error during a client store operation:

In this example, data is not written to one copy storage pool in a simultaneous-write operation.

You specify COPYPOOL1 and COPYPOOL2 as copy storage pools for DISKPOOL and you set the value of the COPYCONTINUE parameter to YES. You also specify ACTIVEDATAPOOL as the active-data pool for DISKPOOL. This configuration is identical to the configuration in the first example.

When files A, B, C, D, and E are backed up, the following events occur:

- An error occurs while writing to COPYPOOL1, and it is removed from the copy storage pool list that is held in memory by the server. The transaction fails.
- Because the value of the COPYCONTINUE parameter is YES, the client tries the backup operation again. The in-memory copy storage pool list, which is retained by the server for the duration of the client session, no longer contains COPYPOOL1.
- Files A and B are simultaneously written to DISKPOOL, ACTIVEDATAPOOL, and COPYPOOL2.
- Files C and D are simultaneously written to DISKPOOL and COPYPOOL2.
- File E is simultaneously written to TAPEPOOL and COPYPOOL2.

See Figure 33 on page 359.

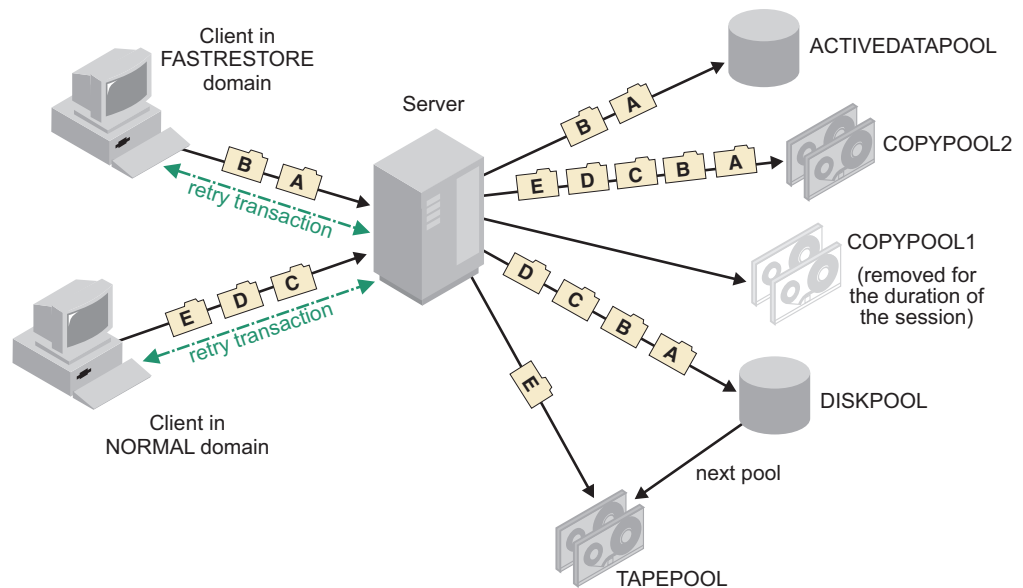


Figure 33. Inheriting a list of copy storage pools

In this scenario, if the primary storage pools and COPYPOOL2 become damaged or lost, you might not be able to recover your data. For this reason, issue the following BACKUP STGPPOOL command for the copy storage pool that failed:

```
backup stgpool diskpool copystgp001
backup stgpool tapepool copystgp001
```

Suppose, in this scenario, that an error occurred while writing to ACTIVEPOOL, rather than COPYPOOL1. In this situation, ACTIVEPOOL is removed from the active-data pool list held in memory by the server, and the transaction fails. The client tries the backup operation again. The in-memory active-data pool list does not contain ACTIVEPOOL. Files A, B, C, and D are written simultaneously to DISKPOOL, COPYPOOL1, and COPYPOOL2. File E is written to TAPEPOOL, COPYPOOL1, and COPYPOOL2. However, files A and B are not written to the active-data pool.

You can still recover the primary storage pools from COPYPOOL1 and, if necessary, COPYPOOL2. However, if you want active backup data available in the active-data pool for fast client restores, you must issue the following command:

```
copy activedata diskpool activedatapool
```

As a precaution, issue the **BACKUP STGPPOOL** and **COPY ACTIVEPOOL** commands after the backup operation has completed. Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

## Examples of simultaneous-write operations during server data-migration processes

Examples show how the simultaneous-write function works during server migration of data within a storage pool hierarchy.

For these examples, assume the following conditions:

- Primary storage pools FILEPOOL, which is associated with a sequential-access device (device type FILE), and TAPEPOOL are linked to form a storage hierarchy. FILEPOOL is at the top of the storage hierarchy. TAPEPOOL is the next pool in the storage hierarchy.
- The files in FILEPOOL are eligible to be migrated.
- One or more copy storage pools are defined to FILEPOOL and TAPEPOOL. There are no active-data pools.
- Copies of one or more of the files in FILEPOOL exist in a copy storage pool.

### Simultaneous-write operation in a simple migration scenario:

In this example, the storage pool hierarchy contains two primary storage pools. The next storage pool has two copy storage pools defined. A copy of one of the files to be migrated to the next storage pool exists in one of the copy storage pools.

FILEPOOL and TAPEPOOL are defined in your storage pool hierarchy. Two copy storage pools, COPYPOOL1 and COPYPOOL2, are defined to TAPEPOOL. Files A, B, and C are in FILEPOOL and eligible to be migrated. A copy of file C exists in COPYPOOL2.

The storage pool hierarchy and the copy storage pools that are associated with TAPEPOOL are displayed in Figure 34.

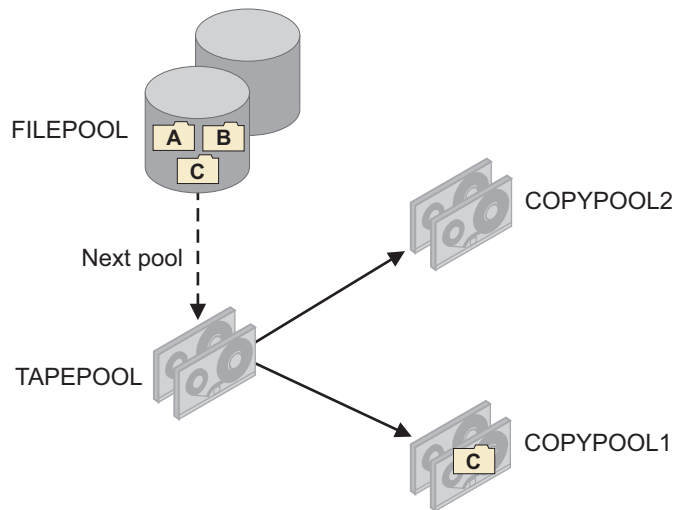


Figure 34. A storage pool hierarchy with files eligible to be migrated

To specify simultaneous-write operations only during migration, issue the following command for TAPEPOOL:

```
update stgpool tapepool autocopy=migration
```

**Tip:** In this example, the setting of the **AUTOCOPY** parameter for FILEPOOL is not relevant. TAPEPOOL is the target of the data migration.

When files A, B and C are migrated, the following events occur:

- Files A and B are simultaneously written to TAPEPOOL, COPYPOOL1 and COPYPOOL2.
- File C is simultaneously written to TAPEPOOL and COPYPOOL2. File C is not written to COPYPOOL1 because COPYPOOL1 has a copy of the file.

See Figure 35.

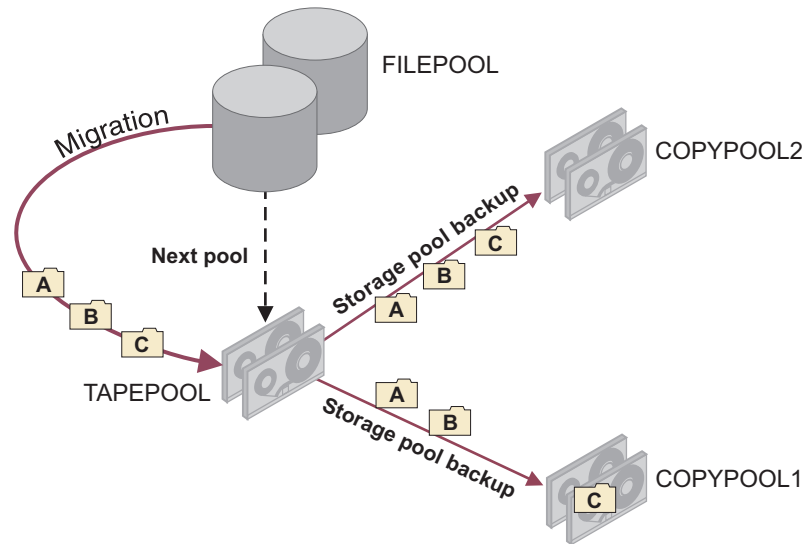


Figure 35. Simultaneous-write operation during migration to two copy storage pools

As a precaution, issue the **BACKUP STGPPOOL** and **COPY ACTIVEDATA** commands after the migration operation has completed. Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

#### A simultaneous-write error during server data migration:

In this example, the storage pool hierarchy contains two primary storage pools. The next storage pool has two copy storage pools defined. A copy of one of the files to be migrated to the next storage pool exists in a copy storage pool. A write error to the pool occurs.

FILEPOOL and TAPEPOOL are defined in the storage pool hierarchy. Two copy storage pools, COPYPOOL1 and COPYPOOL2, are defined to TAPEPOOL. Files A, B, and C are in FILEPOOL and are eligible to be migrated. A copy of file C exists in COPYPOOL1.

The storage pool hierarchy and the copy storage pools that are associated with TAPEPOOL are displayed in Figure 36 on page 362.

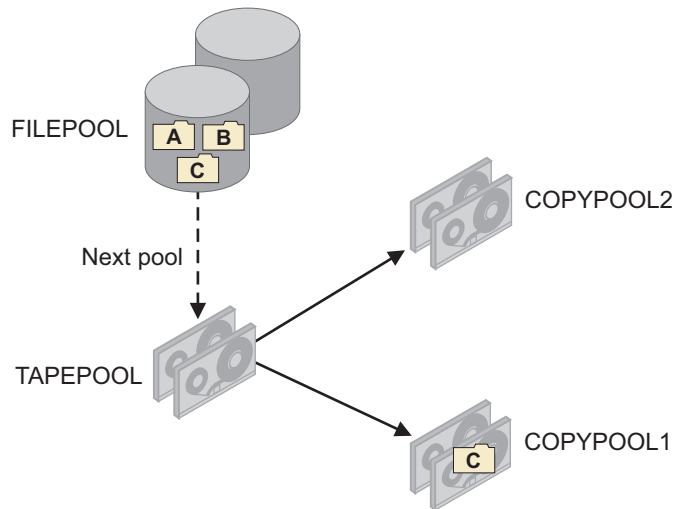


Figure 36. A storage pool hierarchy with files eligible to be migrated

To specify simultaneous-write operations only during migration, issue the following command for TAPEPOOL:

```
update stgpool tapepool autocopy=migration
```

**Tip:** In this example, the setting of the **AUTOCOPY** parameter for FILEPOOL is not relevant. TAPEPOOL is the target of the data migration.

When files A, B and C are migrated, the following events occur:

- An error occurs writing to COPYPOOL1.
- COPYPOOL1 is removed from the in-memory list. The in-memory list is kept for the duration of the migration process.
- The transaction fails and the server tries the operation again.
- Files A, B, and C are simultaneously written to TAPEPOOL and COPYPOOL2.

See Figure 37.

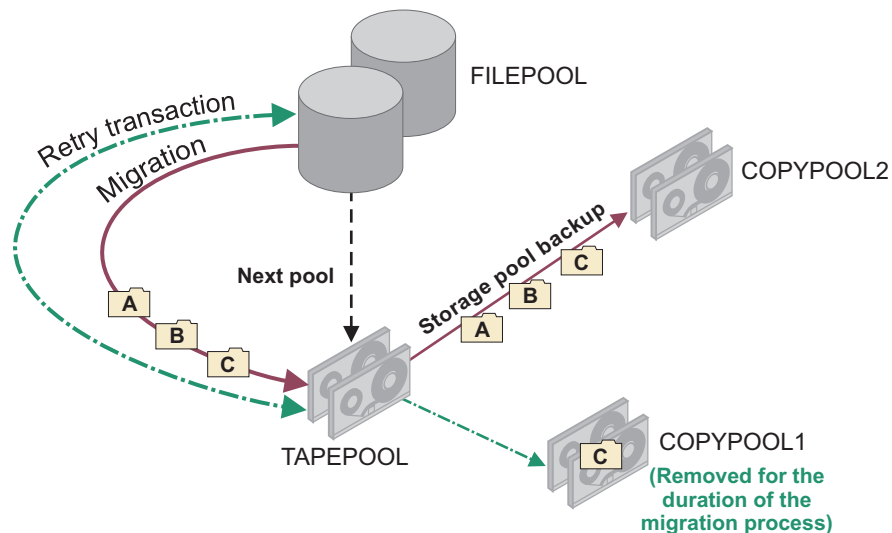


Figure 37. An error occurs during simultaneous-write operation during migration

As a precaution, issue the **BACKUP STGPOOL** and **COPY ACTIVEDATA** commands after the migration operation has completed. Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

#### Inheriting a list of copy storage pools during a simultaneous-write operation:

In this example, three primary storage pools are linked to form a storage pool hierarchy. The next storage pool in the hierarchy has a storage pool list. The last pool in the hierarchy inherits the list during a simultaneous-write operation.

FILEPOOL1, FILEPOOL2, and TAPEPOOL are defined in your storage pool hierarchy. One copy storage pool, COPYPOOL, is defined to FILEPOOL2.

- Files A, B, and C on FILEPOOL1 are eligible to be migrated.
- FILEPOOL2 has sufficient space only for files B and C, but not A. TAPEPOOL has enough space for file A.
- A copy of file C exists in COPYPOOL.

The storage pool hierarchy and the copy storage pool are displayed in Figure 38.

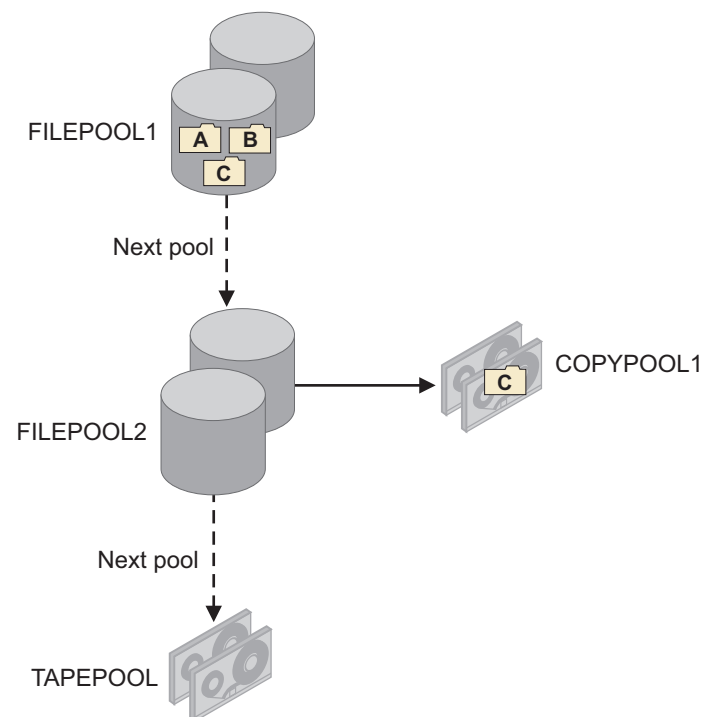


Figure 38. Three-tiered storage pool hierarchy with one copy storage pool

Issue the following commands for FILEPOOL2 and TAPEPOOL to enable the simultaneous-write function only during migration:

```
update stgpool filepool2 autocopy=migration
update stgpool tapepool autocopy=migration
```

**Tip:** In this example, the setting of the **AUTOCOPY** parameter for FILEPOOL1 is not relevant. FILEPOOL2 and TAPEPOOL are the targets of the data migration.

When files A, B, and C are migrated, the follow events occur:

- File B is migrated to FILEPOOL2 and simultaneously written to COPYPOOL.



- File C is migrated to FILEPOOL2. It is not written to COPYPOOL because a copy of that file exists in COPYPOOL.
- File A is migrated to TAPEPOOL. TAPEPOOL inherits the copy storage pool list from FILEPOOL2 and simultaneously writes File A to COPYPOOL.

See Figure 39.

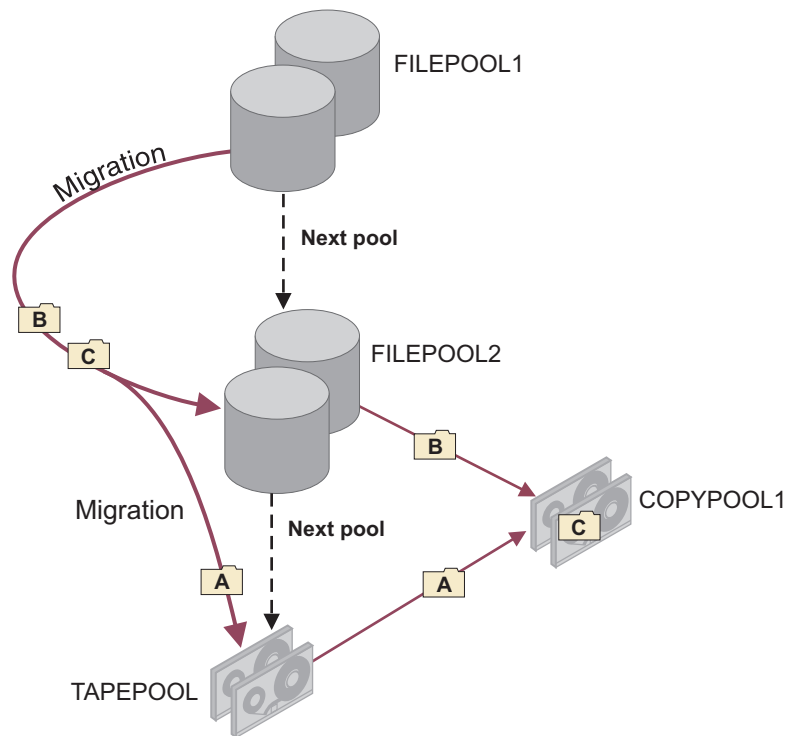


Figure 39. Inheriting a list of copy storage pools

As a precaution, issue the **BACKUP STGPOOL** and **COPY ACTIVEDATA** commands after the migration operation has completed. Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

### Example of migration without a simultaneous-write operation

In this example, the simultaneous-write function to two copy storage pools is enabled for client store sessions. Files in the primary storage pool at the top of the storage hierarchy are migrated. Simultaneous-write operations during migration are not enabled.

Primary storage pools FILEPOOL and TAPEPOOL are linked to form a storage hierarchy. FILEPOOL is at the top of the storage hierarchy. TAPEPOOL is the next pool in the storage hierarchy. Two copy storage pools, COPYPOOL1 and COPYPOOL2, are defined to FILEPOOL. The value of the **AUTOCOPY** parameter for FILEPOOL is CLIENT. The value of the **AUTOCOPY** parameter for TAPEPOOL is NONE.

- Files A, B, and C were written to FILEPOOL during client backup operations.
- File C was simultaneously written to COPYPOOL1.
- The files in FILEPOOL are eligible to be migrated.

The storage pool hierarchy and the copy storage pools associated with FILEPOOL are displayed in Figure 40.

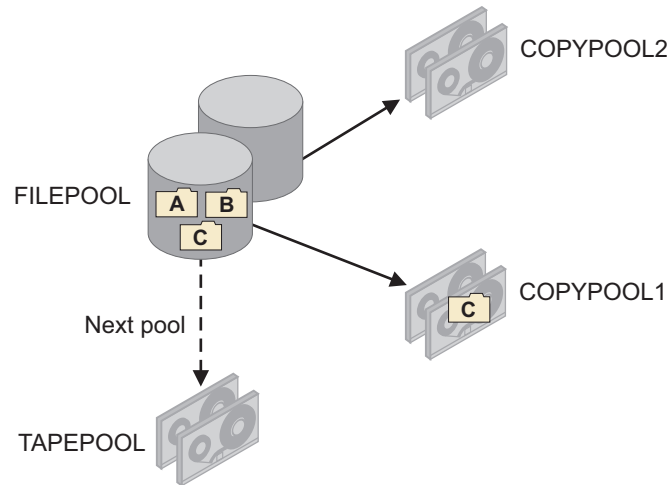


Figure 40. Storage pool hierarchy with files eligible to be migrated

When files A, B and C are migrated, they are written to TAPEPOOL. See Figure 41.

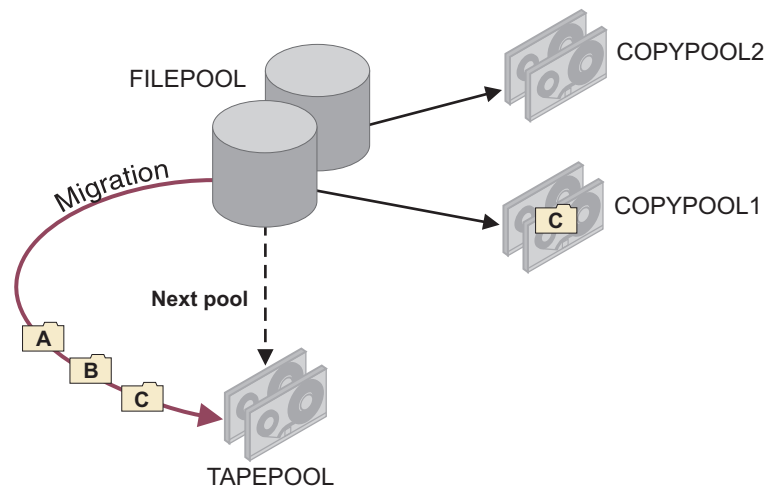


Figure 41. Migration after a simultaneous-write operation

As a precaution, issue the **BACKUP STGPOOL** and **COPY ACTIVEDATA** commands after the migration operation has completed. Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

### Example of a simultaneous-write operation during both migration and a client store operation

In this example, the storage pool hierarchy consists of a two primary storage pools. A single copy storage pool is defined to the pools. The simultaneous-write function during client store operations was enabled. However, one of the backed-up files was not written to the copy storage pool. The simultaneous-write function during migration is enabled.

Primary storage pools FILEPOOL and TAPEPOOL are linked to form a storage hierarchy. FILEPOOL is at the top of the storage hierarchy. TAPEPOOL is the next pool in the storage hierarchy. One copy storage pool, COPYPOOL, is defined to both FILEPOOL and TAPEPOOL:

- The simultaneous-write function during client store operations was enabled. (The setting of the **AUTOCOPY** parameter for FILEPOOL is CLIENT.)
- During client store operations, files A, B, and C were written to COPYPOOL. A failure occurred while writing file D to COPYPOOL.
- The simultaneous-write function during migration is enabled for TAPEPOOL. (The setting of the **AUTOCOPY** parameter for TAPEPOOL is MIGRATION.)

The storage pool hierarchy and the copy storage pool that are associated with FILEPOOL and TAPEPOOL are displayed in Figure 42.

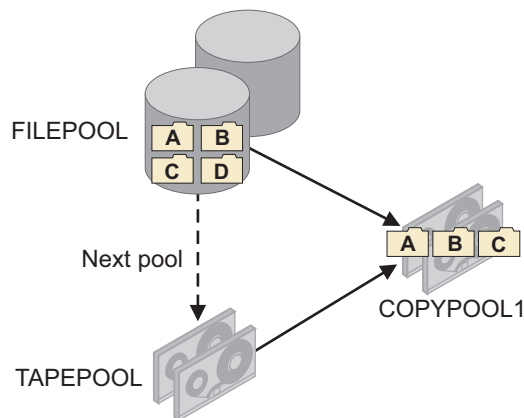


Figure 42. Storage pool hierarchy with files eligible to be migrated

When files A, B, C, and D are migrated, the follow events occur:

- File D is migrated to TAPEPOOL and simultaneously written to COPYPOOL.
- Files A, B, and C are migrated to TAPEPOOL. They are not written to COPYPOOL because copies of those files exist in COPYPOOL.

See Figure 43 on page 367.

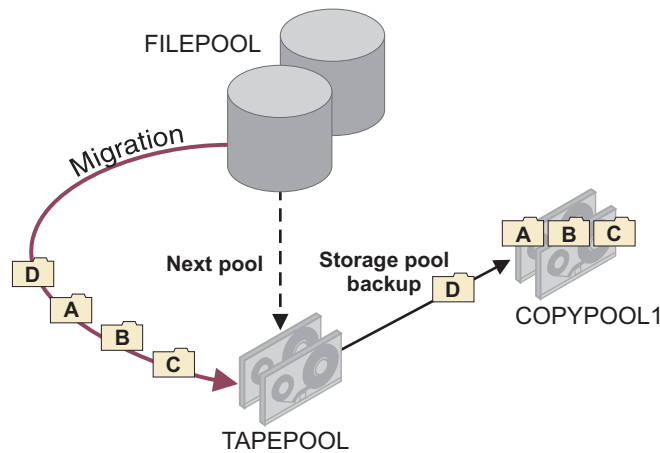


Figure 43. A simultaneous-write operation during both migration and client backup operations

As a precaution, issue the **BACKUP STGPPOOL** and **COPY ACTIVEDATA** commands after the migration operation has completed. Data that is simultaneously written to copy storage pools or active-data pools during migration is not copied when primary storage pools are backed up or when active data is copied.

## Planning simultaneous-write operations

Before enabling the simultaneous-write function, you must consider available resources and configuration settings. As a best practice, you can separate data into discrete storage hierarchies.

### Controlling the number of client mount points for simultaneous-write operations

During simultaneous-write operations, a client session requires a mount point for each sequential-access storage pool to which data is written. Transactions fail if the number of mount points that are required for a client session is insufficient.

#### About this task

Give careful consideration to the number of mount points that are available for a simultaneous-write operation. A client session requires a mount point to store data to a sequential-access storage pool. For example, if a storage pool hierarchy includes a *sequential* primary storage pool, the client node requires one mount point for that pool plus one mount point for each copy storage pool and active-data pool.

Suppose, for example, you create a storage pool hierarchy like the hierarchy shown in Figure 29 on page 355. DISKPOOL is a random-access storage pool, and TAPEPOOL, COPYPOOL1, COPYPOOL2, and ACTIVEDATAPOOL are sequential-access storage pools. For each client backup session, the client might have to acquire four mount points if it has to write data to TAPEPOOL. To run two backup sessions concurrently, the client requires a total of eight mount points.

To indicate the number of mount points a client can have, specify a value for the **MAXNUMMP** parameter on the **REGISTER NODE** or **UPDATE NODE** commands. Verify the value of the **MAXNUMMP** parameter and, if necessary, update it if you want to enable the simultaneous-write function. A value of 3 for the **MAXNUMMP** parameter might be sufficient if, during a client session, all the data is stored in DISKPOOL, COPYPOOL1, COPYPOOL2, and ACTIVEDATAPOOL.

If the number of mount points that are required for a client session exceeds the value of the client **MAXNUMMP** parameter, the transaction fails. If the transaction involves an active-data pool, all the active-data pools are removed from the active-data pool list for the duration of the client session, and the client tries the operation again. If the transaction involves a copy storage pool, the setting of the **COPYCONTINUE** parameter in the storage pool definition determines whether the transaction is tried again:

- If the value of the **COPYCONTINUE** parameter is NO, the client does not try the operation again.
- If the value of the **COPYCONTINUE** parameter is YES, **all** the copy storage pools are removed from the copy storage pool list for the duration of the client session. The client tries the operation again.

#### **Restrictions:**

- The setting of the **COPYCONTINUE** parameter does not affect active-data pools. If a write failure occurs for any of active-data pools, the server stops writing to the failing active-data pool for the remainder of the session, but continues storing files into the primary pool and any remaining active-data pools and copy storage pools. The active-data pool list is active only for the life of the session and applies to all the primary storage pools in a particular storage pool hierarchy.
- The setting of the **COPYCONTINUE** parameter does not affect the simultaneous-write function during server import. If data is being written simultaneously and a write failure occurs to the primary storage pool or any copy storage pool, the server import process fails.
- The setting of the **COPYCONTINUE** parameter does not affect the simultaneous-write function during migration. If data is being written simultaneously and a write failure occurs to any copy storage pool or active-data pool, the failing storage pool is removed and the data migration process continues. Write failures to the primary storage pool cause the migration process to fail.

### **Controlling the number of mount points for a device class during simultaneous-write operations**

If the number of sequential-access volumes that must be mounted for a simultaneous-write operation exceeds the maximum number of mount points specified for a device class, the server is not able to acquire the mount points and the operation fails.

#### **About this task**

To specify the maximum number of sequential-access volumes that can be simultaneously mounted, use the **MOUNTLIMIT** parameter in the device class definition.

If the simultaneous-write operation involves an active-data pool, the Tivoli Storage Manager server tries to remove the active-data pools that use this device class until enough mount points can be acquired. The transaction fails, and the client tries the operation again. If sufficient mount points can be acquired when the operation is tried again, the data is written into the primary storage pool, any remaining active-data pools, and any copy storage pools, if they exist.

If the operation involves a copy storage pool, the value of the **COPYCONTINUE** parameter in the storage pool definition determines whether the client tries the operation again:

- If the value of the **COPYCONTINUE** parameter is NO, the client does not try the operation again.
- If the value of the **COPYCONTINUE** parameter is YES, the server tries to remove the copy storage pools that use this device class until enough mount points can be acquired. The transaction fails, and the client tries the operation again. If sufficient mount points can be acquired when the operation is tried again, the data is written into the primary storage pool, any remaining copy storage pools, and any active-data pools, if they exist.

#### Restrictions:

- The setting of the **COPYCONTINUE** parameter does not affect active-data pools. If a write failure occurs for any of active-data pools, the server stops writing to the failing active-data pool for the remainder of the session, but continues storing files into the primary pool and any remaining active-data pools and copy storage pools. The active-data pool list is active only for the life of the session and applies to all the primary storage pools in a particular storage pool hierarchy.
- The setting of the **COPYCONTINUE** parameter does not affect the simultaneous-write function during server import. If data is being written simultaneously and a write failure occurs to the primary storage pool or any copy storage pool, the server import process fails.
- The setting of the **COPYCONTINUE** parameter does not affect the simultaneous-write function during migration. If data is being written simultaneously and a write failure occurs to any copy storage pool or active-data pool, the failing storage pool is removed and the data migration process continues. Write failures to the primary storage pool cause the migration process to fail.

### Storing data without using the simultaneous-write function

Writing data simultaneously to copy storage pools and active-data pools might not be an efficient solution for every primary storage pool. When simultaneous-write operations are not practical, use the **BACKUP STGPOOL** and **COPY ACTIVE DATA** commands to store data in copy storage pools and active-data pools.

#### About this task

Suppose you use a DISK primary storage pool that is accessed by many clients at the same time during client data-storage operations. If this storage pool is associated with copy storage pools, active-data pools, or both, the clients might have to wait until enough tape drives are available to perform the store operation. In this scenario, simultaneous-write operations could extend the amount of time required for client store operations. It might be more efficient to store the data in the primary storage pool and use the **BACKUP STGPOOL** command to back up the DISK storage pool to the copy storage pools and the **COPY ACTIVE DATA** command to copy active backup data from the DISK storage pool to the active-data pools.

### Reducing the potential for switching storage pools during simultaneous-write operations

Switching primary storage pools can delay the completion of a simultaneous-write operation. To reduce the potential for switching, ensure that enough space is available in the primary storage pools and that the pools can accommodate files of any size.

## About this task

Resources such as disk space, tape drives, and tapes are allocated at the beginning of a simultaneous-write operation, and typically remain allocated during the entire operation. If, for any reason, the destination primary pool cannot contain the data being stored, the Tivoli Storage Manager server attempts to store the data into a next storage pool in the storage hierarchy. This next storage pool typically uses a sequential-access device class. If new resources must be acquired for the next storage pool, or the allocated resources must be released because the server has to wait to acquire the new resources, the client session must wait until the resources are available.

To reduce the potential for switching storage pools, follow these guidelines:

- Ensure that enough space is available in the primary storage pools that are targets for the simultaneous-write operation. For example, to make space available, run the server migration operation before backing up or archiving client data and before migration operations by Hierarchical Storage Management (HSM) clients.
- The **MAXSIZE** parameter on the **DEFINE STGPOOL** and **UPDATE STGPOOL** commands limits the size of the files that the Tivoli Storage Manager server can store in the primary storage pools during client operations. Honoring the **MAXSIZE** parameter for a storage pool during a store operation causes the server to switch pools. To prevent switching pools, avoid using this parameter if possible.

## Separate storage hierarchies for simultaneous-write operations

When using the simultaneous-write function as part of a backup strategy, separate data into different storage pool hierarchies.

For example, you can configure production servers to store mission critical data in one storage pool hierarchy and use the simultaneous-write function to back up the data to copy storage pools and an active-data pool. See Figure 44 on page 371. In addition, you can configure the servers to store noncritical, workstation data in another storage pool hierarchy and back up that data using the **BACKUP STGPOOL** command.

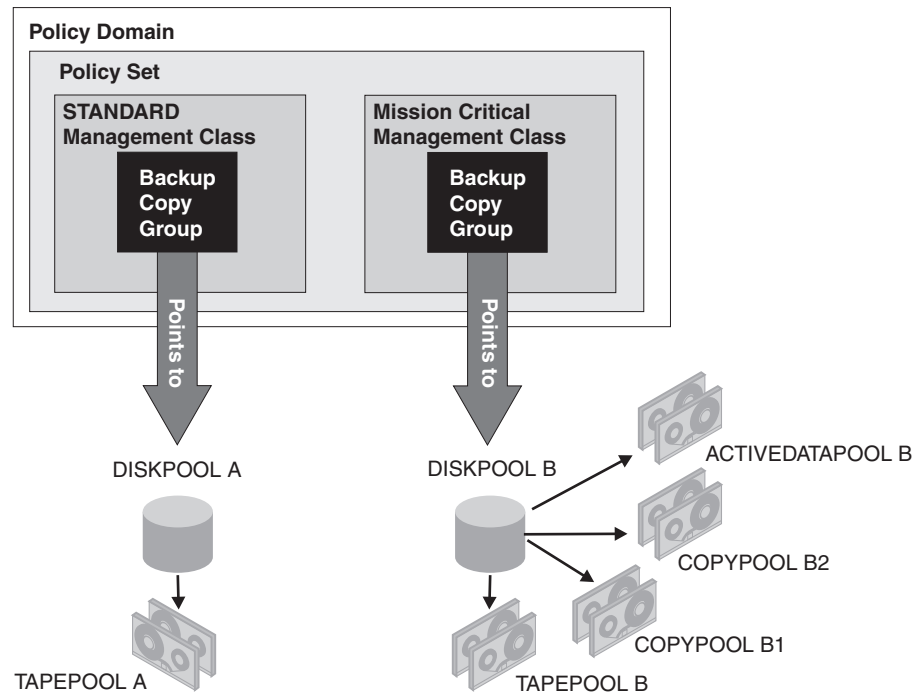


Figure 44. Separate storage pool hierarchies for different types of data

## Simultaneous-write function as part of a backup strategy: Example

The simultaneous-write function is used to create on-site backups of a storage pool for easy availability. The **BACKUP STGPOOL** command is used to create storage pool backups and database backups that are moved off-site to provide data protection in case a disaster occurs.

### About this task

This example also shows how to use the **COPY ACTIVE DATA** command to copy active data from primary storage pools to an on-site sequential-access disk (FILE) active-data pool. When designing a backup strategy, carefully consider your own system, data storage, and disaster-recovery requirements.

### Procedure

1. Define the following storage pools:
  - Two copy storage pools, **ONSITECOPYPOOL** and **DRCOPYPOOL**
  - One active-data pool, **ACTIVEDATAPOOL**
  - Two primary storage pools, **DISKPOOL** and **TAPEPOOL**

As part of the storage pool definition for **DISKPOOL**, specify **TAPEPOOL** as the next storage pool, **ONSITECOPYPOOL** as the copy storage pool, and **ACTIVEDATAPOOL** as the active-data pool. Set the copy continue parameter for copy storage pools to **YES**. If an error occurs writing to a copy storage pool, the operation will continue storing data into the primary pool, the remaining copy storage pool, and the active-data pool.

```

define stgpool tapepool mytapedevice
define stgpool onnsitepool mytapedevice
define stgpool drcopypool mytapedevice

```



```
define stgpool activedatapool mydiskdevice
define stgpool diskpool mydiskdevice nextstgpool=tapepool
 copystgpool=onsitecopypool copycontinue=yes activedatapools=
 activedatapool
```

This basic configuration is like the configuration that is shown in Figure 29 on page 355.

2. Schedule or issue the following commands to ensure that all the files are backed up:
 

```
backup stgpool diskpool onsitecopypool
backup stgpool tapepool onsitecopypool
copy activedata diskpool activedatapool
copy activedata tapepool activedatapool
```
3. To create the storage-pool backup volumes that to be moved off-site, schedule the following two commands to run every night:
 

```
backup stgpool diskpool drcopypool
backup stgpool tapepool drcopypool
```
4. Every night, after the storage pool backups have completed, back up the database.
5. To process the database and storage pool backups for off-site storage, issue the following command every night:
 

```
move drmedia copystgpool=drcopypool wherestate=mountable tostate=vault wait=yes
```
6. Start migration of the files in the DISKPOOL to ensure that sufficient space is available in DISKPOOL in preparation for the next storage operations:
 

```
migrate stgpool diskpool
```

---

## Keeping client files together using collocation

Collocation reduces the number of volume mounts required when users restore, retrieve, or recall a large number of files from the storage pool. Collocation thus reduces the amount of time required for these operations.

### About this task

With collocation enabled, the server tries to keep files on a minimal number of sequential-access storage volumes. The files can belong to a single client node, a group of client nodes, a client file space, or a group of file spaces. You can set collocation for each sequential-access storage pool when you define or update the pool.

Figure 45 on page 373 shows an example of collocation by client node with three clients, each having a separate volume containing that client's data.

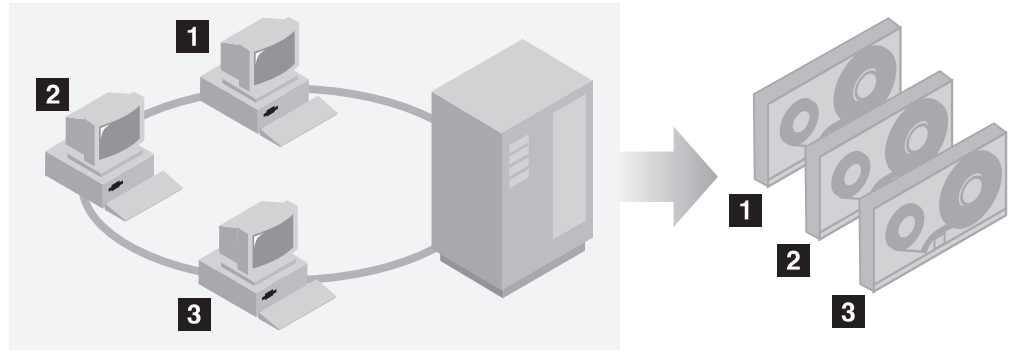


Figure 45. Example of collocation enabled

Figure 46 shows an example of collocation by group of client nodes. Three groups have been defined, and the data for each group is stored on separate volumes.

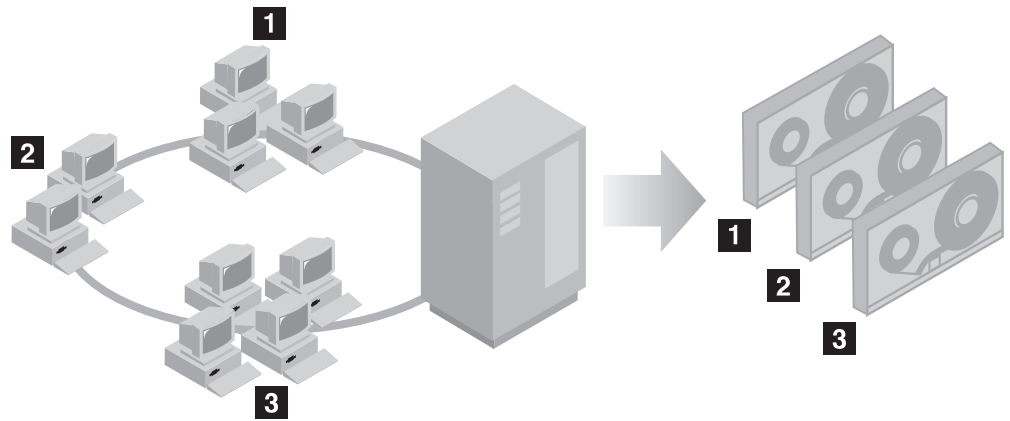


Figure 46. Example of collocation enabled by node collocation group

Figure 47 shows an example of collocation by file space group. Six groups have been defined. Each group contains data from file spaces that belong to a single node. The data for each group is stored on a separate volume.

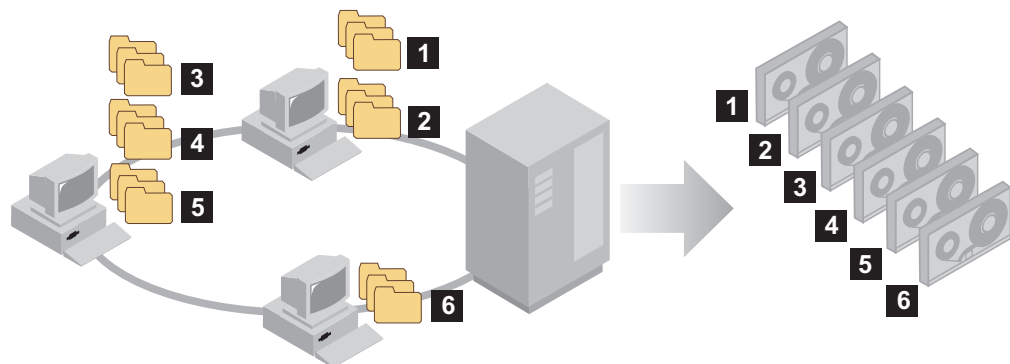


Figure 47. Example of collocation enabled by file space collocation group

When collocation is disabled, the server tries to use all available space on each volume before selecting a new volume. While this process provides better utilization of individual volumes, user files can become scattered across many volumes. Figure 48 on page 374 shows an example of collocation disabled, with

three clients sharing space on single volume.

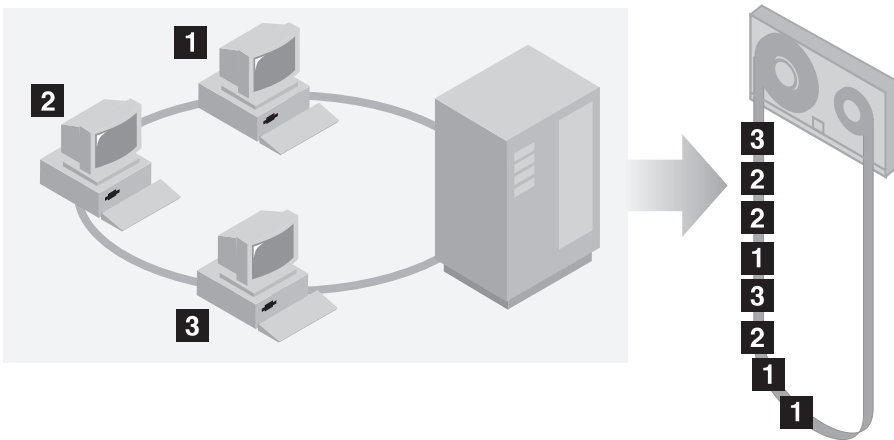


Figure 48. Example of collocation disabled

With collocation disabled, more media mount operations might be required to mount volumes when users restore, retrieve, or recall a large number of files.

Collocation by group is the Tivoli Storage Manager system default for primary sequential-access storage pools. The default for copy storage pools and active-data pools is *no collocation*.

## The effects of collocation on operations

The effect of collocation on resources and system performance depends on the type of operation that is being run.

Table 32 summarizes the effects of collocation on operations.

Table 32. Effect of collocation on operations

| Operation                                        | Collocation Enabled                                                                                                                   | Collocation Disabled                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Backing up, archiving, or migrating client files | More media mounts to collocate files.                                                                                                 | Fewer media mounts are required.                                                                                                                                                                                                                                                                                                                                            |
| Restoring, retrieving, or recalling client files | Large numbers of files can be restored, retrieved, or recalled more quickly because files are on fewer volumes.                       | Multiple mounts of media might be required for a single user because files might be spread across multiple volumes.<br><br>More than one user's files can be stored on the same sequential-access storage volume. For example, if two users try to recover a file that is on the same volume, the second user is forced to wait until the first user's files are recovered. |
| Storing data on tape                             | The server attempts to use all available tape volumes to separate user files before it uses all available space on every tape volume. | The server attempts to use all available space on each tape volume before you use another tape volume.                                                                                                                                                                                                                                                                      |

Table 32. Effect of collocation on operations (continued)

| Operation              | Collocation Enabled                                                                                                                                                                                                                                                                      | Collocation Disabled                                                                     |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Media mount operations | <p>More mount operations when user files are backed up, archived, or migrated from client nodes directly to sequential-access volumes.</p> <p>More mount operations during reclamation and storage pool migration.</p> <p>More volumes to manage because volumes are not fully used.</p> | More mount operations are required during restore, retrieve, and recall of client files. |
| Generating backup sets | Less time is spent searching database entries and fewer mount operations.                                                                                                                                                                                                                | More time is spent searching database entries and fewer mount operations.                |

When collocation is enabled for a group, single client node or file space, all the data that belongs to the group, the node, or the file space is moved or copied by one server process. For example, if data is collocated by group, all data for all nodes that belong to the same collocation group is migrated by the same process.

When collocating data, the Tivoli Storage Manager server tries to keep files together on a minimal number of sequential-access storage volumes. However, when the server is backing up data to volumes in a sequential-access storage pool, the backup process has priority over collocation settings. As a result, the server completes the backup, but might not be able to collocate the data.

For example, suppose that you are collocating by node and you specify that a node can use two mount points on the server. Suppose also that the data that is backed up from the node can easily fit on one tape volume. During backup, the server might mount two tape volumes, and the node's data might be distributed across two tapes, rather than one. When you used collocation, the following server operations use one server process:

- Moving data from random-access and sequential-access volumes
- Moving node data from sequential-access volumes
- Backing up a random-access or sequential-access storage pool
- Restoring a sequential-access storage pool
- Reclamation of a sequential-access storage pool or off-site volumes
- Migration from a random-access storage pool.

When migrating data from a random disk storage pool to a sequential storage pool, and collocation is by node or file space, nodes or file spaces are automatically selected for migration based on the amount of data to be migrated. The node or file space with the most data is migrated first. If collocation is by group, all nodes in the storage pool are evaluated to determine which node has the most data. The node with the most data is migrated first along with all the data for all the nodes that belong to that collocation group. This process takes place, regardless of how much data is stored in the file spaces of nodes and regardless of whether the low migration threshold was reached.

However, when migrating collocated data from a sequential storage pool to another sequential storage pool, the server orders the volumes according to the date when the volume was last accessed. The volume with the earliest access date is migrated first, and the volume with the latest access date is migrated last.

One reason to collocate by group is that individual client nodes often do not have sufficient data to fill high-capacity tape volumes. Collocating data by groups of nodes can reduce unused tape capacity by putting more collocated data on individual tapes. Also, collocating data by groups of file spaces reduces the unused tape to a finer degree.

The data that belongs to all the nodes in the same collocation group are migrated by the same process. Therefore, collocation by group can reduce the number of times a volume that is going to be migrated needs to be mounted. Collocation by group can also minimize database scanning and reduce tape passes during data transfer from one sequential-access storage pool to another.

## How the server selects volumes with collocation enabled

Volume selection depends on whether collocation is by group, by node, or by file space.

Table 33 shows how the Tivoli Storage Manager server selects the first volume when collocation is enabled for a storage pool at the client-node, collocation group, and file-space level.

*Table 33. How the server selects volumes when collocation is enabled*

| Volume Selection Order | When collocation is by group                                                                | When collocation is by node                                                         | When collocation is by file space                                                   |
|------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1                      | A volume that already contains files from the collocation group to which the client belongs | A volume that already contains files from the same client node                      | A volume that already contains files from the same file space of that client node   |
| 2                      | An empty predefined volume                                                                  | An empty predefined volume                                                          | An empty predefined volume                                                          |
| 3                      | An empty scratch volume                                                                     | An empty scratch volume                                                             | An empty scratch volume                                                             |
| 4                      | A volume with the most available free space among volumes that already contain data         | A volume with the most available free space among volumes that already contain data | A volume that contains data from the same client node                               |
| 5                      | Not applicable                                                                              | Not applicable                                                                      | A volume with the most available free space among volumes that already contain data |

When the server must continue to store data on a second volume, it uses the following selection order to acquire more space:

1. An empty predefined volume
2. An empty scratch volume
3. A volume with the most available free space among volumes that already contain data
4. Any available volume in the storage pool

When collocation is by client node or file space, the server tries to provide the best use of individual volumes and minimizes file mixing from different clients or file spaces on volumes. This configuration is depicted in Figure 49 on page 377, which shows that volume selection is *horizontal*, where all available volumes are used before all available space on each volume is used. A, B, C, and D represent files from four different client nodes.

**Remember:**

1. If collocation is by node and the node has multiple file spaces, the server does not attempt to collocate those file spaces.
2. If collocation is by file space and a node has multiple file spaces, the server attempts to put data for different file spaces on different volumes.

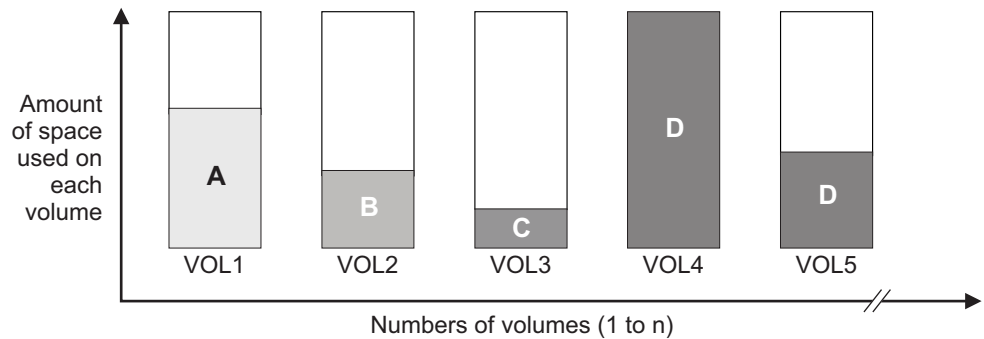


Figure 49. Using all available sequential access storage volumes with collocation enabled at the node or file space level

Collocation can be by filesystem group or node group. When collocation is by node group (node collocation group), the server tries to collocate data from nodes that belong to the same collocation group. A filesystem collocation group uses the same methods as a node collocation group, but can use up more space because of the granularity of filesystem sizes. As shown in Figure 50, data for the following groups of nodes was collocated:

- Group 1 consists of nodes A, B, and C
- Group 2 consists of nodes D and E
- Group 3 consists of nodes F, G, H, and I

Whenever possible, the Tivoli Storage Manager server collocates data that belongs to a group of nodes on a single tape, as represented by Group 2 in the figure. Data for a single node can also be spread across several tapes that are associated with a group (Group 1 and 2). If the nodes in the collocation group have multiple file spaces, the server does not attempt to collocate those file spaces.

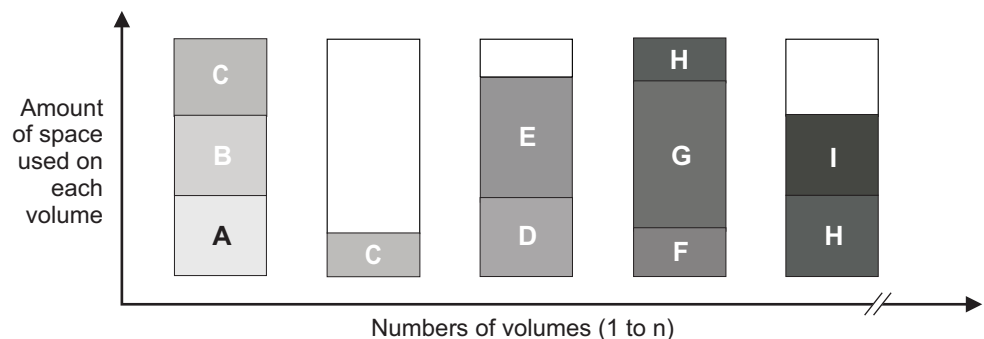


Figure 50. Using all available sequential access storage volumes with collocation enabled at the group level

**Remember:** Normally, the Tivoli Storage Manager server always writes data to the current filling volume for the operation that is running. Occasionally, however, you might notice more than one filling volume in a collocated storage pool. Having more than one filling volume in a collocated storage pool can occur if different

server processes or client sessions try to store data into the collocated pool at the same time. In this situation, Tivoli Storage Manager allocates a volume for each process or session that needs a volume so that both operations complete as quickly as possible.

## How the server selects volumes with collocation disabled

When collocation is disabled, the server attempts to use all available space in a storage volume before it accesses another volume.

When storing client files in a sequential-access storage pool where collocation is disabled, the server selects a volume using the following selection order:

1. A previously used sequential volume with available space (a volume with the most amount of data is selected first)
2. An empty volume

When the server needs to continue to store data on a second volume, it attempts to select an empty volume. If none exists, the server attempts to select any remaining available volume in the storage pool.

Figure 51 shows that volume utilization is *vertical* when collocation is disabled. In this example, fewer volumes are used because the server attempts to use all available space by mixing client files on individual volumes. A, B, C, and D represent files from four different client nodes.

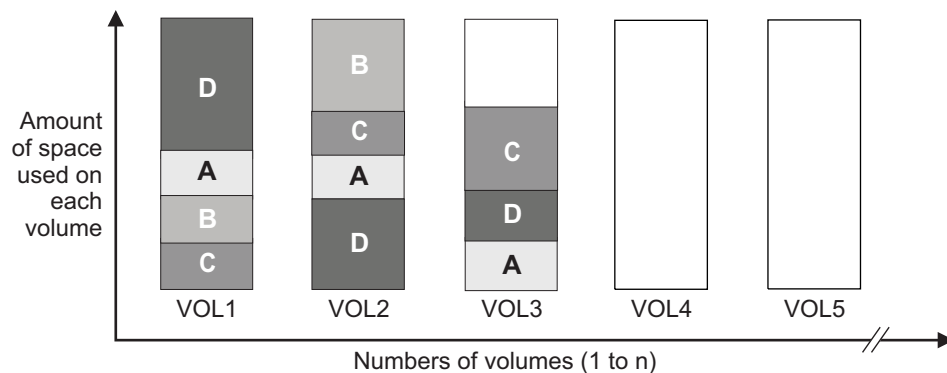


Figure 51. Using all available space on sequential volumes with collocation disabled

## Collocation on or off settings

After you define a storage pool, you can change the collocation setting by updating the storage pool. The change in collocation for the pool does not affect files that are already stored in the pool.

For example, if collocation is off for a storage pool and you turn it on, *from then on* client files stored in the pool are collocated. Files that had previously been stored in the pool are *not* moved to collocate them. As volumes are reclaimed, however, the data in the pool tends to become more collocated. You can also use the MOVE DATA or MOVE NODEDATA commands to move data to new volumes to increase collocation. However, this causes an increase in the processing time and the volume mount activity.

**Remember:** A mount wait can occur or increase when collocation by file space is enabled and a node has a volume containing multiple file spaces. If a volume is eligible to receive data, Tivoli Storage Manager will wait for that volume.

## Collocation of copy storage pools and active-data pools

Using collocation on copy storage pools and active-data pools requires special consideration. Collocation of copy storage pools and active-data pools, especially by node or file space, results in more partially filled volumes and potentially unnecessary offsite reclamation activity.

Using collocation on copy storage pools and active-data pools requires special consideration.

Primary storage pools complete a different recovery role than the recovery role completed by copy storage pools and active-data pools. Normally you use primary storage pools (or active-data pools) to recover data to clients directly. In a disaster, when both clients and the server are lost, you might use offsite active-data pool volumes to recover data directly to clients and the copy storage pool volumes to recover the primary storage pools. The types of recovery scenarios that concern you the most helps you to determine whether to use collocation on your copy storage pools and active-data pools.

Collocation typically results in partially filled volumes when you collocate by node or by file space. (Partially filled volumes are less prevalent, however, when you collocate by group.) Partially filled volumes might be acceptable for primary storage pools because the volumes remain available and can be filled during the next migration process. However, partially filled volumes might be unacceptable for copy storage pools and active-data pools whose storage pool volumes are taken offsite immediately. If you use collocation for copy storage pools or active-data pools, you must decide among the following:

- Taking more partially filled volumes offsite, which increases the reclamation activity when the reclamation threshold is lowered or reached. The rate of reclamation for volumes in an active-data pool is typically faster than the rate for volumes in other types of storage pools.
- Leaving these partially filled volumes onsite until they fill and risk not having an offsite copy of the data on these volumes.
- Whether to collocate by group to use as much tape capacity as possible.

With collocation disabled for a copy storage pool or an active-data pool, typically there will be only a few partially filled volumes after data is backed up to the copy storage pool or copied to the active-data pool.

Consider your options carefully before you use collocation for copy storage pools and active-data pools, and whether to use simultaneous write. When not using simultaneous write, if you use collocation for your primary storage pools, you might want to disable collocation for copy storage pools and active-data pools. Collocation on copy storage pools or active-data pools might be desirable if you have few clients with each of them having large amounts of incremental backup data each day. For collocation with simultaneous write, you must ensure that the collocate settings are identical for the primary storage pools, active-data pools, and copy storage pools.



## Planning for and enabling collocation

Understanding the effects of collocation can help reduce the number of media mounts, make better use of space on sequential volumes, and improve the efficiency of server operations.

### About this task

Table 34 lists the four collocation options that you can specify on the **DEFINE STGPPOOL** and **UPDATE STGPPOOL** commands. The table also shows the effects of collocation on data that belongs to nodes that are and are not members of collocation groups.

Table 34. Collocation options and the effects on node data

| Collocation option | If a node is not defined as a member of a collocation group                                                                                                                                                            | If a node is defined as a member of a collocation group                                                                                                                                                                |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No                 | The data for the node is not collocated.                                                                                                                                                                               | The data for the node is not collocated.                                                                                                                                                                               |
| Group              | The server stores the data for the node on as few volumes in the storage pool as possible.                                                                                                                             | The server stores the data for the node and for other nodes that belong to the same collocation group on as few volumes as possible.                                                                                   |
| Node               | The server stores the data for the node on as few volumes as possible.                                                                                                                                                 | The server stores the data for the node on as few volumes as possible.                                                                                                                                                 |
| Filespace          | The server stores the data for the node's file space on as few volumes as possible. If a node has multiple file spaces, the server stores the data for different file spaces on different volumes in the storage pool. | The server stores the data for the node's file space on as few volumes as possible. If a node has multiple file spaces, the server stores the data for different file spaces on different volumes in the storage pool. |

Table 35. Collocation group options and effects on file space data

| Collocation option | If a file space is not defined as a member of a collocation group                                                                                                                                                      | If a file space is defined as a member of a collocation group                                                                                                                                                    |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No                 | The data for the file space is not collocated.                                                                                                                                                                         | The data for the file space is not collocated.                                                                                                                                                                   |
| Group              | The server stores the data for the filesystem on as few volumes in the storage pool as possible.                                                                                                                       | The server stores the data for the file space and other file spaces that belong to the same collocation group on as few volumes as possible.                                                                     |
| Node               | The server stores the data for the node on as few volumes as possible.                                                                                                                                                 | The server stores the data for the node on as few volumes as possible.                                                                                                                                           |
| Filespace          | The server stores the data for the node's file space on as few volumes as possible. If a node has multiple file spaces, the server stores the data for different file spaces on different volumes in the storage pool. | The server stores the data for the file spaces on as few volumes as possible. If a node has multiple file spaces, the server stores the data for different file spaces on different volumes in the storage pool. |

When deciding whether and how to collocate data, complete the following steps:

### Procedure

1. Familiarize yourself with the potential advantages and disadvantages of collocation, in general. For a summary of effects of collocation on operations, see Table 32 on page 374.

2. If the decision is to collocate, determine how the data is to be organized, whether by client node, group of client nodes, or file space. If the decision is to collocate by group, you must decide how to group nodes:
  - If the goal is to save space, you might want to group small nodes together to better use tapes.
  - If the goal is potentially faster client restores, group nodes together so that they fill as many tapes as possible. Doing so increases the probability that individual node data will be distributed across two or more tapes and that more tapes can be mounted simultaneously during a multi-session No Query Restore operation.
  - If the goal is to departmentalize data, then you can group nodes by department.
3. If collocation by group is the wanted result:
  - a. Define collocation groups with the **DEFINE COLLOCGROUP** command.
  - b. Add client nodes to the collocation groups with the **DEFINE COLLOCMEMBER** command.

The following query commands are available to help in collocating groups:

#### **QUERY COLLOCGROUP**

Displays the collocation groups defined on the server.

#### **QUERY NODE**

Displays the collocation group, if any, to which a node belongs.

#### **QUERY NODEDATA**

Displays information about the data for one or more nodes in a sequential-access storage pool.

#### **QUERY STGPOOL**

Displays information about the location of client data in a sequential-access storage pool and the amount of space a node occupies in a volume.

For more information about these commands, see the *Administrator's Reference*.

You can also use Tivoli Storage Manager server scripts or PERL scripts to display information that can be useful in defining collocation groups.

4. Specify how data is to be collocated in a storage pool with the **COLLOCATE** parameter on the **DEFINE STGPOOL** or **UPDATE STGPOOL** command.
5. If you decide later that you want to delete members of a collocation group, you can use the **DELETE COLLOCMEMBER** command. You can also update the description of a collocation group with the **UPDATE COLLOCGROUP** command and delete entire collocation groups by issuing the **DELETE COLLOCGROUP** command.

## **Results**

**Tip:** If you use collocation, but want to reduce the number of media mounts and use space on sequential volumes more efficiently, you can:

- Define a storage pool hierarchy and policy to require that backed-up, archived, or space-managed files are stored initially in disk storage pools.

When files are migrated from a disk storage pool, the server attempts to migrate all files that belong to the client node or collocation group that is using the most disk space in the storage pool. This process works well with the collocation option because the server tries to place all of the files from a particular client on the same sequential-access storage volume.

- Use scratch volumes for sequential-access storage pools to allow the server to select new volumes for collocation.
- Specify the client option COLLOCATEBYFILESPEC to limit the number of tapes to which objects associated with one file specification are written. This collocation option makes collocation by the server more efficient; it does not override collocation by file space or collocation by node.

For details about the COLLOCATEBYFILESPEC option, see the *Backup-Archive Clients Installation and User's Guide*.

When creating collocation groups, keep in mind that the ultimate destination of the data that belongs to nodes in a collocation group depends on the policy domain to which nodes belong. For example, suppose that you create a collocation group that consists of nodes that belong to Policy Domain A. Policy Domain A specifies an active-data pool as the destination of active data only and has a backup copy group that specifies a primary storage pool, Primary1, as the destination for active and inactive data. Other nodes in the same collocation group belong to a domain, Policy Domain B, that does not specify an active-data pool, but that has a backup copy group that specifies Primary1 as the destination for active and inactive data. Primary1 has a designated copy storage pool. The collocation setting on PRIMARY1, the copy storage pool, and the active-data pool is GROUP.

When the node data is backed up and a simultaneous-write operation occurs, active and inactive data is stored in Primary1 and the copy storage pool. Note, however, that although all the nodes belong to a single collocation group, only the active data which belongs to nodes in Domain A are stored in the active-data pool. The data in Primary1 and the copy storage pool is collocated by group. The data in the active-data pool is also collocated by group, but the "group" consists only of nodes that are members of Policy Domain A.

**Related reference:**

"Managing client option files" on page 473

---

## Reclaiming space in sequential-access storage pools

Space on a sequential-access storage volume becomes reclaimable as files expire or are deleted from the volume. Reclamation processing involves consolidating the remaining data from many sequential-access volumes onto fewer new sequential-access volumes.

### About this task

Files become obsolete because of aging or limits on the number of versions of a file. Space in volumes in active-data pools also becomes reclaimable as updated files are added to the pools and as older file versions are deactivated. In reclamation processing, the server rewrites files on the volume being reclaimed to other volumes in the storage pool, making the reclaimed volume available for reuse.

The server reclaims the space in storage pools based on a reclamation threshold that you can set for each sequential-access storage pool. When the percentage of space that can be reclaimed on a volume rises above the reclamation threshold, the server reclaims the volume.

**Restrictions:**

- Storage pools that are defined with the NETAPPDUMP, the CELERRADUMP or the NDMPDUMP data format cannot be reclaimed. However, you can use the **MOVE DATA** command to move data out of a volume so that the volume can be reused. The volumes in the target storage pool must have the same data format as the volumes in the source storage pool.
- Storage pools that are defined with a CENTERA device class cannot be reclaimed.

## Reclaiming volumes with the most reclaimable space

If you have been running with a high reclamation threshold and decide you need to reclaim volumes, you can lower the threshold in several steps. Lowering the threshold in steps ensures that volumes with the most reclaimable space are reclaimed first.

### About this task

For example, if you set the reclamation threshold to 100%, first lower the threshold to 98%. Volumes that have reclaimable space of 98% or greater are reclaimed by the server. Lower the threshold again to reclaim more volumes.

If you lower the reclamation threshold while a reclamation process is active, the reclamation process does not immediately stop. If an on-site volume is being reclaimed, the server uses the new threshold setting when the process begins to reclaim the next volume. If off-site volumes are being reclaimed, the server does not use the new threshold setting during the process that is running (because all eligible off-site volumes are reclaimed at the same time).

Use the **CANCEL PROCESS** command to stop a reclamation process.

## Starting reclamation manually or in a schedule

To gain more control over how and when the reclamation process occurs, you can use the **RECLAIM STGPOOL** command. You can also specify the maximum amount of time a reclamation process takes before it is automatically canceled.

### About this task

To perform reclamation when it is least intrusive to normal production needs, include the **RECLAIM STGPOOL** command in a schedule. For example, to start reclamation in a storage pool named ALTP00L, and to have reclamation end as soon as possible after one hour, you would issue the following command:

```
reclaim stgpool altpool duration=60
```

For copy storage pools and active-data pools, you can also use the **RECLAIM STGPOOL** command to specify the maximum number of offsite storage pool volumes the server should attempt to reclaim:

```
reclaim stgpool altpool duration=60 offsitereclaimlimit=230
```

Do not use this command if you are going to use automatic reclamation for the storage pool. To prevent automatic reclamation from running, set the **RECLAIM** parameter of the storage pool definition to 100.

For details about the **RECLAIM STGPOOL** command, refer to the *Administrator's Reference*.

**Restriction:** Storage pools that are defined with a CENTERA device class cannot be reclaimed.

## Optimizing drive usage using multiple concurrent reclamation processes

Multiple reclamation processes run concurrently, which makes better use of your available tape drives or FILE volumes.

### About this task

You can specify one or more reclamation processes for each primary sequential-access storage pool, copy storage pool, or active-data pool by using the **RECLAIMPROCESS** parameter on the **DEFINE STGPOOL** and **UPDATE STGPOOL** commands.

Each reclamation process requires at least two simultaneous volume mounts (at least two mount points) and, if the device type is not FILE, at least two drives. One of the drives is for the input volume in the storage pool that is being reclaimed. The other drive is for the output volume in the storage pool to which files are being moved.

When you calculate the number of concurrent processes to run, you must carefully consider the resources that you have available. You must consider the number of storage pools that are involved with the reclamation, the number of mount points, the number of drives that can be dedicated to the operation, and (if appropriate) the number of mount operators available to manage reclamation requests. The number of available mount points and drives depends on other Tivoli Storage Manager and system activity and on the mount limits of the device classes for the storage pools that are involved in the reclamation.

For more information about mount limit, see: “Controlling the number of simultaneously mounted volumes” on page 198

For example, suppose that you want to reclaim the volumes from two sequential storage pools simultaneously and that all storage pools involved have the same device class. Each process requires two mount points and, if the device type is not FILE, two drives. To run four reclamation processes simultaneously (two for each storage pool), you need a total of at least eight mount points and eight drives. The device class for each storage pool must have a mount limit of at least eight.

If the device class for the storage pools being reclaimed does not have enough mount points or drives, you can use the **RECLAIMSTGPOOL** parameter to direct the reclamation to a storage pool with a different device class that has the additional mount points or drives.

If the number of reclamation processes you specify is more than the number of available mount points or drives, the processes that do not obtain mount points or drives wait indefinitely or until the other reclamation processes complete and mount points or drives become available.

The Tivoli Storage Manager server starts the specified number of reclamation processes regardless of the number of volumes that are eligible for reclamation. For example, if you specify ten reclamation processes and only six volumes are eligible for reclamation, the server starts ten processes and four of them complete without processing a volume.

Multiple concurrent reclamation processing does not affect collocation. For more information, see “How collocation affects reclamation” on page 391.

## Reclaiming volumes in a storage pool with one drive

When a storage pool has only one mount point (that is, just one drive) available to it through the device class, data cannot be reclaimed from one volume to another within that same storage pool. To reclaim volumes in a storage pool that has only one drive, you can define a *reclamation storage pool* and use it for temporary storage of reclaimed data.

### About this task

When the server reclaims volumes, the server moves the data from volumes in the original storage pool to volumes in the reclamation storage pool. The server always uses the reclamation storage pool when one is defined, even when the mount limit is greater than one.

If the reclamation storage pool does not have enough space to hold all of the data being reclaimed, the server moves as much of the data as possible into the reclamation storage pool. Any data that could not be moved to volumes in the reclamation storage pool still remains on volumes in the original storage pool.

The pool identified as the reclamation storage pool must be a primary sequential storage pool. The primary purpose of the reclamation storage pool is for temporary storage of reclaimed data. To ensure that data moved to the reclamation storage pool eventually moves back into the original storage pool, specify the original storage pool as the next pool in the storage hierarchy for the reclamation storage pool. For example, if you have a tape library with one drive, you can define a storage pool to be used for reclamation using a device class with a device type of FILE:

```
define stgpool reclaimpool fileclass maxscratch=100
```

Define the storage pool for the tape drive as follows:

```
define stgpool tapepool1 tapeclass maxscratch=100
reclaimstgpool=reclaimpool
```

Finally, update the reclamation storage pool so that data migrates back to the tape storage pool:

```
update stgpool reclaimpool nextstgpool=tapepool1
```

### Tip:

- In a mixed-media library, reclaiming volumes in a storage pool defined with a device class with a single mount point (that is, a single drive) requires one of the following:
  - At least one other drive with a compatible read/write format
  - Enough disk space to create a storage pool with a device type of FILE

## Reducing the time to reclaim tape volumes with high capacity

When a storage pool uses tape volumes with high capacity, reclamation processes might run for a long time if the drives are relatively slow at positioning tapes. There are steps that you can take to reduce overall process time.

### Procedure

To help reduce overall process time:

1. Set up the storage pool hierarchy so that the tape storage pool is the next storage pool for a storage pool that uses either a DISK device type or a FILE device type.
2. When you need to reclaim volumes, move data from the tape storage pool to the DISK or FILE storage pool.
3. Allow the data to migrate from the DISK or FILE storage pool back to the tape storage pool by adjusting the migration thresholds.

## Reclamation of write-once, read-many (WORM) media

Reclamation of WORM volumes does not mean that you can reuse this write-once media. However, reclamation does allow you to make more library space available.

Reclamation of WORM volumes consolidates data from partially filled volumes to other WORM volumes. You can then eject the empty, used WORM volumes and add new volumes.

To allow reclamation, you can set the reclamation value to something lower when you define or update the storage pool.

## Controlling reclamation of virtual volumes

When virtual volumes (volumes with the device type of SERVER) in a primary storage pool are reclaimed, the client data stored on those volumes is sent across the network between the source server and the target server. As a result, the reclamation process can tie up your network resources.

### About this task

To control when reclamation starts for these volumes, consider setting the reclamation threshold to 100% for any primary storage pool that uses virtual volumes. Lower the reclamation threshold at a time when your network is less busy, so that the server can reclaim volumes.

For virtual volumes in a copy storage pool or an active-data pool, the server reclaims a volume as follows:

### Procedure

1. The source server determines which files on the volume are still valid.
2. The source server obtains these valid files from volumes in a primary storage pool, or if necessary, from removable-media volumes in an on-site copy storage pool or in an on-site active-data pool. The server can also obtain files from virtual volumes in a copy storage pool or an active-data pool.
3. The source server writes the files to one or more new virtual volumes in the copy storage pool or active-data pool and updates its database.
4. The server issues a message indicating that the volume was reclaimed.



For information about using the SERVER device type, see “Storing data on another server as virtual volumes” on page 726.

## Reclaiming copy storage pools and active-data pools

On-site and off-site volumes in copy storage pools and active-data pools are reclaimed when the amount of unused space exceeds the reclamation threshold. When reclamation occurs and how reclamation processing is done depends on whether the volumes are marked as off-site.

### About this task

Reclamation of volumes in copy storage pools and active-data pools is similar to reclamation in primary storage pools. For volumes that are on-site, reclamation usually occurs after the volume is full and then begins to empty because of file deletion, expiration, or, in the case of active-data pools, deactivation. When the percentage of reclaimable space on a volume rises above the reclamation threshold, the server reclaims the volume. Active files on the volume are rewritten to other volumes in the storage pool, making the original volume available for new files.

For off-site volumes, reclamation can occur when the percentage of unused space on the volume is greater than the reclaim parameter value. The unused space in copy storage pool volumes includes both space that has never been used on the volume and space that has become empty because of file deletion or expiration. For volumes in active-data pools, reclaimable space also includes inactive versions of files. Most volumes in copy storage pools and active-data pools might be set to an access mode of off-site, making them ineligible to be mounted. During reclamation, the server copies valid files on off-site volumes from the original files in the primary storage pools. In this way, the server copies valid files on off-site volumes without having to mount these volumes. For more information, see “Reclamation of offsite volumes” on page 388.

Reclamation of copy storage pool volumes and active-data pool volumes should be done periodically to allow the reuse of partially filled volumes that are off-site. Reclamation can be done automatically by setting the reclamation threshold for the copy storage pool or the active-data pool to less than 100%. However, you need to consider controlling when reclamation occurs because of how off-site volumes are treated. For more information, see “Controlling when reclamation occurs for off-site volumes” on page 388.

**Virtual Volumes:** Virtual volumes (volumes that are stored on another Tivoli Storage Manager server through the use of a device type of SERVER) cannot be set to the off-site access mode.

Using the RECLAIMPROCESS parameter on the DEFINE STGPOOL or UPDATE STGPOOL command, you can specify multiple concurrent reclamation processes for a single copy storage pool or active-data pool. Doing so will let you make better use of your available tape drives or FILE volumes. The principles underlying multiple concurrent reclamation processes for copy storage pools and active-data pools are the same principles as those for primary sequential-access storage pools. In particular, you need to carefully consider available resources (for example, the number of mount points) when calculating how many processes you can run concurrently. For details, see “Optimizing drive usage using multiple concurrent reclamation processes” on page 384.



Reclamation of primary storage pool volumes does not affect copy storage pool files or files in active-data pools.

## Reclamation of offsite volumes

Volumes with the access value of offsite are eligible for reclamation if the amount of empty space on a volume exceeds the reclamation threshold for the copy storage pool or active-data pool. The default reclamation threshold for copy storage pools and active-data pools is 100%, which means that reclamation is not performed.

When an offsite volume is reclaimed, the files on the volume are rewritten to a read/write volume. Effectively, these files are moved back to the onsite location. The files might be obtained from the offsite volume after a disaster, if the volume has not been reused and the database backup that you use for recovery references the files on the offsite volume.

The server reclaims an offsite volume as follows:

1. The server determines which files on the volume are still valid.
2. The server obtains these valid files from a primary storage pool or, if necessary, from an onsite volume of a copy storage pool.
3. The server writes the files to one or more volumes in the copy storage pool or active-data pool and then updates the database. If a file is an aggregate with unused space, the unused space is removed during this process.
4. A message is issued indicating that the offsite volume was reclaimed.

During offsite reclamation, active-data pools cannot be used to obtain data.

For a single storage pool, the server reclaims all offsite volumes that are eligible for reclamation at the same time. Reclaiming all the eligible volumes at the same time minimizes the tape mounts for primary storage pool volumes.

If you are using the disaster recovery manager, see “Moving copy storage pool and active-data pool volumes onsite” on page 1090.

## Controlling when reclamation occurs for off-site volumes

If you send copy storage pool volumes off-site, you can control reclamation by adjusting the reclamation threshold.

### About this task

Suppose you plan to make daily storage pool backups to a copy storage pool, then mark all new volumes in the copy storage pool as *offsite* and send them to the off-site storage location. This strategy works well with one consideration if you are using automatic reclamation (the reclamation threshold is less than 100%).

Each day's storage pool backups will create a number of new copy-storage pool volumes, the last one being only partially filled. If the percentage of empty space on this partially filled volume is higher than the reclaim percentage, this volume becomes eligible for reclamation as soon as you mark it off-site. The reclamation process would cause a new volume to be created with the same files on it. The volume you take off-site would then be empty according to the Tivoli Storage Manager database. If you do not recognize what is happening, you could perpetuate this process by marking the new partially filled volume off-site.

One way to resolve this situation is to keep partially filled volumes on-site until they fill up. However, this would mean a small amount of your data would be without an off-site copy for another day.

If you send copy storage pool volumes off-site, it is recommended you control pool reclamation by using the default value of 100. This turns reclamation off for the copy storage pool. You can start reclamation processing at desired times by changing the reclamation threshold for the storage pool. To monitor off-site volume utilization and help you decide what reclamation threshold to use, enter the following command:

```
query volume * access=offsite format=detailed
```

Depending on your data expiration patterns, you may not need to do reclamation of off-site volumes each day. You may choose to perform off-site reclamation on a less frequent basis. For example, suppose you ship copy-storage pool volumes to and from your off-site storage location once a week. You can run reclamation for the copy-storage pool weekly, so that as off-site volumes become empty they are sent back for reuse.

When you do perform reclamation for off-site volumes, the following sequence is recommended:

### **Procedure**

1. Back up your primary-storage pools to copy-storage pools or copy the active data in primary-storage pools to active-data pools.
2. Turn on reclamation for copy-storage pools and active-data pools by lowering the reclamation threshold for copy-storage pools below 100%. The default for active-data pools is 60.
3. When reclamation processing completes, turn off reclamation by raising the reclamation thresholds to 100%.
4. Mark any newly created copy-storage pool volumes and active-data pool volumes as off-site, and then move them to the off-site location.

### **Results**

This sequence ensures that the files on the new copy-storage pool volumes and active-data pool volumes are sent off-site, and are not inadvertently kept on-site because of reclamation.

### **Preventing off-site marking of partially-filled copy storage pool and active-data pool volumes:**

To prevent marking partially-filled copy storage pool or active-data pool volumes as off-site, you can use storage on another Tivoli Storage Manager server (device type of SERVER) for storage-pool backups.

### **About this task**

If the other server is at a different site, the copy-storage pool volumes or active-data pool volumes are already off-site, with no moving of physical volumes between the sites. See "Storing data on another server as virtual volumes" on page 726 for more information.

## Limiting the number of off-site volumes to be reclaimed

To ensure that reclamation completes within the desired amount of time, you can use **OFFSITERECLAIMLIMIT** parameter on the **DEFINE STGPOOL** or **UPDATE STGPOOL** command to limit the number of off-site volumes to be reclaimed.

### About this task

When determining the value for the **OFFSITERECLAIMLIMIT** parameter, consider using the statistical information in the message issued at the end of the off-site volume reclamation operation.

Alternatively, you can use the following Tivoli Storage Manager **SQL SELECT** command to obtain records from the SUMMARY table for the off-site volume reclamation operation:

```
select * from summary where activity='OFFSITE RECLAMATION'
```

Two kinds of records are displayed for the off-site reclamation process. One volume record is displayed for each reclaimed off-site volume. However, the volume record does not display the following items:

- The number of examined files.
- The number of affected files.
- The total bytes involved in the operation.

This information is summarized in the statistical summary record for the offsite reclamation. The statistical summary record displays the following items:

- The number of examined files.
- The number of affected files.
- The total bytes involved in the operation.
- The number of off-site volumes that were processed.
- The number of parallel processes that were used.
- The total amount of time required for the processing.

The order in which off-site volumes are reclaimed is based on the amount of unused space in a volume. (Unused space includes both space that has never been used on the volume and space that has become empty because of file deletion.) Volumes with the largest amount of unused space are reclaimed first.

For example, suppose a copy storage pool contains three volumes: VOL1, VOL2, and VOL3. VOL1 has the largest amount of unused space, and VOL3 has the least amount of unused space. Suppose further that the percentage of unused space in each of the three volumes is greater than the value of the **RECLAIM** parameter. If you do not specify a value for the **OFFSITERECLAIMLIMIT** parameter, all three volumes will be reclaimed when the reclamation runs. If you specify a value of 2, only VOL1 and VOL2 will be reclaimed when the reclamation runs. If you specify a value of 1, only VOL1 will be reclaimed.

## Delayed reuse of reclaimed volumes

Delaying reuse may help you to recover data under certain conditions during recovery from a disaster.

As a best practice, delay the reuse of any reclaimed volumes in copy storage pools and active-data pools for as long as you keep your oldest database backup. For more information about delaying volume reuse, see “Delaying reuse of volumes for recovery purposes” on page 911.

## Reclamation of volumes in active-data pools

Inactive files in volumes in an active-data pool are deleted by reclamation processing. The rate at which reclaimable space accumulates in active-data pool volumes is typically faster than the rate for volumes in non-active-data pools.

If reclamation of volumes in an active-data pool is occurring too frequently, requiring extra resources such as tape drives and libraries to mount and dismount volumes, you can adjust the reclamation threshold until the rate of reclamation is acceptable. The default reclamation threshold for active-data pools is 60 percent, which means that reclamation begins when the storage pool reaches 60 percent of capacity. Accelerated reclamation of volumes has more of an effect on active-data pools that use removable media and, in particular, on removable media that is taken off-site.

## How collocation affects reclamation

If collocation is enabled and reclamation occurs, the server tries to move the files for each client node, group of client nodes or client file space onto a minimal number of volumes.

If the volumes are manually mounted, the mount operators must:

- Be aware that a tape volume might be rewound more than once if the server completes a separate pass to move the data for each client node or client file space.
- Mount and dismount multiple volumes to allow the server to select the most appropriate volume on which to move data for each client node or client file space. The server tries to select a volume in the following order:
  1. A volume that already contains files belonging to the client file space or client node
  2. An empty volume
  3. The volume with the most available space
  4. Any available volume

If collocation is disabled and reclamation occurs, the server tries to move usable data to new volumes by using the following volume selection criteria, in the order shown:

1. The volume that contains the most data
2. Any partially full volume
3. An empty predefined volume
4. An empty scratch volume

If you specify collocation and multiple concurrent processes, the server attempts to move the files for each collocation group, client node, or client file space onto as few volumes as possible. However, if files belonging to a single collocation group (or node or file space) are on different volumes to begin with and are being moved

at the same time by different processes, the files might be moved to separate output volumes. For details about multiple concurrent reclamation processing, see “Optimizing drive usage using multiple concurrent reclamation processes” on page 384.

For more information, see “Reducing the time to reclaim tape volumes with high capacity” on page 386.

---

## Estimating space needs for storage pools

Three default random-access disk storage pools are provided at installation. You can add space to these storage pools by adding volumes, or you can define additional storage pools.

### About this task

The following default random-access disk storage pools are available at installation:

- BACKUPPOOL for backed-up files
- ARCHIVEPOOL for archived files
- SPACEMGPOOL for files migrated from client nodes (space-managed files)

As your storage environment grows, you may want to consider how policy and storage pool definitions affect where workstation files are stored. Then you can define and maintain multiple storage pools in a hierarchy that allows you to control storage costs by using sequential-access storage pools in addition to disk storage pools, and still provide appropriate levels of service to users.

To help you determine how to adjust your policies and storage pools, get information about how much storage is being used (by client node) and for what purposes in your existing storage pools. For more information on how to do this, see “Obtaining information about the use of storage space” on page 409.

## Estimating space requirements in random-access storage pools

The amount of storage space required for each random-access disk storage pool is based on your storage needs for backup, archive, and space-management operations.

### About this task

To estimate the amount of storage space required for each random-access disk storage pool:

- Determine the amount of disk space needed for different purposes:
  - For backup storage pools, provide enough disk space to support efficient daily incremental backups.
  - For archive storage pools, provide sufficient space for a user to archive a moderate size file system without causing migration from the disk storage pool to occur.
  - For storage pools for space-managed files, provide enough disk space to support the daily space-management load from HSM clients, without causing migration from the disk storage pool to occur.

- Decide what percentage of this data you want to keep on disk storage space. Establish migration thresholds to have the server automatically migrate the remainder of the data to less expensive storage media in sequential-access storage pools.

See “Migration thresholds” on page 290 for recommendations on setting migration thresholds.

## **Estimating space for backed-up files in random-access storage pools**

Space requirements for backed-up files stored in a single random-access storage pool are based on the total number of workstations, the average data capacity of a workstation, the fraction of each workstation disk space used, and the number backup versions you will keep.

### **About this task**

To estimate the total amount of space needed for all backed-up files stored in a single random-access (disk) storage pool, use the following formula:

$\text{Backup space} = \text{WkstSize} * \text{Utilization} * \text{VersionExpansion} * \text{NumWkst}$

where:

#### **Backup Space**

The total amount of storage pool disk space needed.

#### **WkstSize**

The average data storage capacity of a workstation. For example, if the typical workstation at your installation has a 4 GB hard drive, then the average workstation storage capacity is 4 GB.

#### **Utilization**

An estimate of the fraction of each workstation disk space used, in the range 0 to 1. For example, if you expect that disks on workstations are 75% full, then use 0.75.

#### **VersionExpansion**

An expansion factor (greater than 1) that takes into account the additional backup versions, as defined in the copy group. A rough estimate allows 5% additional files for each backup copy. For example, for a version limit of 2, use 1.05, and for a version limit of 3, use 1.10.

#### **NumWkst**

The estimated total number of workstations that the server supports.

If clients use compression, the amount of space required may be less than the amount calculated, depending on whether the data is compressible.

## **Estimating space for archived files in random-access storage pools**

The number of archived files generated by users is not necessarily related to the amount of data stored on their workstations. To estimate the total amount of space needed for all archived files in a single random-access (disk) storage pool, determine what percentage of user files are typically archived.

### **About this task**

Work with policy administrators to calculate this percentage based on the number and type of archive copy groups defined. For example, if policy administrators

have defined archive copy groups for only half of the policy domains in your enterprise, then estimate that you need less than 50% of the amount of space you have defined for backed-up files.

Because additional storage space can be added at any time, you can start with a modest amount of storage space and increase the space by adding storage volumes to the archive storage pool, as required.

## **Estimating space needs in sequential-access storage pools**

Estimating the space needs in sequential-access storage pools is a relatively complex calculation based upon multiple considerations.

### **About this task**

To estimate the amount of space required for sequential-access storage pools, consider:

- The amount of data being migrated from disk storage pools
- The length of time backed-up files are retained, as defined in backup copy groups
- The length of time archived files are retained, as defined in archive copy groups
- How frequently you reclaim unused space on sequential volumes

See “Reclaiming space in sequential-access storage pools” on page 382 for information about setting a reclamation threshold.

- Whether or not you use collocation to reduce the number of volume mounts required when restoring or retrieving large numbers of files from sequential volumes

If you use collocation, you may need additional tape drives and volumes.

See “Keeping client files together using collocation” on page 372 for information about using collocation for your storage pools.

- The type of storage devices and sequential volumes supported at your installation

---

## **Monitoring storage-pool and volume usage**

Monitor your storage pools and volumes to determine space requirements, the status of data migration from one to storage pool to the next storage pool in the storage hierarchy, and the use of disk space by cached copies of files that have been migrated to the next storage pool.

### **Monitoring space available in a storage pool**

Monitoring the space available in storage pools is important to ensure that client operations such as backup can complete successfully. To make more space available, you might need to define more volumes for disk storage pools, or add more volumes for sequential-access storage pools such as tape.

For more information about maintaining a supply of volumes in libraries, see:

“Managing volumes” on page 142



## Obtaining capacity estimates and utilization percentages of storage pools

Standard reports about storage pools list basic information, such as the estimated capacity and utilization percentage of all storage pools that are defined to the system.

### About this task

To obtain a standard report, issue the following command:

```
query stgpool
```

Figure 52 shows a standard report with all storage pools defined to the system. To monitor the use of storage pool space, review the *Estimated Capacity* and *Pct Util* columns.

| Storage<br>Pool Name | Device<br>Class Name | Estimated<br>Capacity | Pct<br>Util | Pct<br>Migr | High<br>Mig<br>Pct | Low<br>Mig<br>Pct | Next<br>Storage<br>Pool |
|----------------------|----------------------|-----------------------|-------------|-------------|--------------------|-------------------|-------------------------|
| ARCHIVEPOOL          | DISK                 | 0.0 M                 | 0.0         | 0.0         | 90                 | 70                |                         |
| BACKTAPE             | TAPE                 | 180.0 M               | 85.0        | 100.0       | 90                 | 70                |                         |
| BACKUPPOOL           | DISK                 | 80.0 M                | 51.6        | 51.6        | 50                 | 30                | BACKTAPE                |
| COPYPOOL             | TAPE                 | 300.0 M               | 42.0        |             |                    |                   |                         |
| ENGBACK1             | DISK                 | 0.0 M                 | 0.0         | 0.0         | 85                 | 40                | BACKTAPE                |

Figure 52. Information about storage pools

### Estimated Capacity

Specifies the space available in the storage pool in megabytes (M) or gigabytes (G).

For a disk storage pool, this value reflects the total amount of available space in the storage pool, including any volumes that are varied offline.

For sequential-access storage pools, estimated capacity is the total estimated space of all the sequential-access volumes in the storage pool, regardless of their access mode. At least one volume must be used in a sequential-access storage pool (either a scratch volume or a private volume) to calculate estimated capacity.

For tape and FILE, the estimated capacity for the storage pool includes the following factors:

- The capacity of all the scratch volumes that the storage pool already acquired or can acquire. The number of scratch volumes is defined by the **MAXSCRATCH** parameter on the **DEFINE STGPPOOL** or **UPDATE STGPPOOL** command.
- The capacity of all the private volumes that are defined to the storage pool when using the **DEFINE VOLUME** command.

The calculations for estimated capacity depend on the available space of the storage for the device that is assigned to the storage pool. For FILE storage pools, the capacity for the storage pool is reduced if the available storage falls below the total estimated space of all the FILE volumes in the storage pool. The value that is displayed for capacity is reduced by the size of a FILE volume incrementally as the available space continues to decline.

Tape volumes in a sequential-access storage pool, unlike those in a disk storage pool, do not contain a precisely known amount of space. Data is written to a tape volume as necessary until the end of the volume is



reached. For this reason, the estimated capacity is truly an estimate of the amount of available space in a sequential-access storage pool. This characteristic does not apply to FILE volumes in sequential-access storage pools.

#### **Pct Util**

Specifies, as a percentage, the space that is used in each storage pool.

For disk storage pools, this value reflects the total number of disk blocks currently allocated by Tivoli Storage Manager. Space is allocated for backed-up, archived, or space-managed files that are eligible for server migration, cached files that are copies of server-migrated files, and files that reside on any volumes that are varied offline.

**Note:** The value for Pct Util can be higher than the value for Pct Migr if you query for storage pool information while a client transaction (such as a backup) is in progress. The value for Pct Util is determined by the amount of space actually allocated (while the transaction is in progress). The value for Pct Migr represents only the space that is occupied by committed files. At the end of the transaction, Pct Util and Pct Migr become synchronized.

For sequential-access storage pools, this value is the percentage of the total bytes of storage available that are currently being used to store active data (data that is not expired). Because the server can only estimate the available capacity of a sequential-access storage pool, this percentage also reflects an estimate of the actual utilization of the storage pool.

Figure 52 on page 395 shows that the estimated capacity for a disk storage pool named BACKUPPOOL is 80 MB, which is the amount of available space on disk storage. More than half (51.6%) of the available space is occupied by either backup files or cached copies of backup files.

The estimated capacity for the tape storage pool named BACKTAPE is 180 MB, which is the total estimated space available on all tape volumes in the storage pool. This report shows that 85% of the estimated space is currently being used to store workstation files.

**Note:** This report also shows that volumes have not yet been defined to the ARCHIVEPOOL and ENGBACK1 storage pools because the storage pools show an estimated capacity of 0.0 MB.

### **Obtaining statistics about space-trigger and scratch-volume utilization in storage pools**

Detailed reports about a storage pools list not only estimated capacity and utilization percentage, but also space-trigger and scratch-volume utilization.

#### **About this task**

To obtain a detailed report, issue the following command:

```
query stgpool format=detailed
```

#### **Space Trigger Utilization**

Specifies the utilization of a storage pool, as calculated by the storage pool space trigger, if any, for the storage pool. You can define space triggers only for storage pools associated with DISK or FILE device types.

For sequential-access devices, space trigger utilization is expressed as a percentage of the number of used bytes on each sequential-access volume

relative to the size of the volume, and the estimated capacity of all existing volumes in the storage pool. It does not include potential scratch volumes. Unlike the calculation for percent utilization (Pct Util), the calculation for space trigger utilization favors creation of new private file volumes by the space trigger over usage of additional scratch volumes.

For disk devices, space trigger utilization is expressed as a percentage of the estimated capacity, including cached data and deleted data that is waiting to be shredded. However, it excludes data that resides on any volumes that are varied offline. If you issue QUERY STGPOOL while a file creation is in progress, the value for space trigger utilization can be higher than the value for percent migration (Pct Migr). The value for space trigger utilization is determined by the amount of space actually allocated while the transaction is in progress. The value for percent migration represents only the space occupied by committed files. At the end of the transaction, these values are synchronized.

The value for space trigger utilization includes cached data on disk volumes. Therefore, when cache is enabled and migration occurs, the value remains the same because the migrated data remains on the volume as cached data. The value decreases only when the cached data expires or when the space that cached files occupy needs to be used for no-cached files.

#### **Number of Scratch Volumes Used**

Specifies the number of scratch volumes used in a sequential-access storage pool. You can use this value, along with the value of the field Maximum Scratch Volumes Allowed to determine the remaining number of scratch volumes that the server can request for a storage pool.

## **Monitoring the use of storage pool volumes**

Monitoring how storage pool volumes are used lets you make the most efficient use available storage.

### **About this task**

| Task                              | Required Privilege Class |
|-----------------------------------|--------------------------|
| Display information about volumes | Any administrator        |

You can query the server for information about storage pool volumes:

- General information about a volume, for example:
  - Current access mode and status of the volume
  - Amount of available space on the volume
  - Location
- Contents of a storage pool volume (user files on the volume)
- The volumes that are used by a client node

## Obtaining information about storage pool volumes

Standard reports provide a quick overview of basic information about storage pool volumes. More information is available in detailed reports.

### About this task

To request general information about all volumes defined to the server, enter:

```
query volume
```

Figure 53 shows an example of the output of this standard query. The example illustrates that data is being stored on the 8 mm tape volume named WREN01, as well as on several other volumes in various storage pools.

| Volume Name      | Storage Pool Name | Device Class Name | Estimated Capacity | Pct Util | Volume Status |
|------------------|-------------------|-------------------|--------------------|----------|---------------|
| D:\STOR\AIXVOL.1 | AIXPOOL1          | DISK              | 240.0 M            | 26.3     | On-Line       |
| D:\STOR\AIXVOL.2 | AIXPOOL2          | DISK              | 240.0 M            | 36.9     | On-Line       |
| D:\STOR\DOSVOL.1 | DOSPOOL1          | DISK              | 240.0 M            | 72.2     | On-Line       |
| D:\STOR\DOSVOL.2 | DOSPOOL2          | DISK              | 240.0 M            | 74.1     | On-Line       |
| D:\STOR\OS2VOL.1 | OS2POOL1          | DISK              | 240.0 M            | 55.7     | On-Line       |
| D:\STOR\OS2VOL.2 | OS2POOL2          | DISK              | 240.0 M            | 51.0     | On-Line       |
| WREN00           | TAPEPOOL          | TAPE8MM           | 2.4 G              | 0.0      | Filling       |
| WREN01           | TAPEPOOL          | TAPE8MM           | 2.4 G              | 2.2      | Filling       |

Figure 53. Information about storage pool volumes

To query the server for a detailed report on volume WREN01 in the storage pool named TAPEPOOL, enter:

```
query volume wren01 format=detailed
```

Figure 54 shows the output of this detailed query. Table 36 on page 399 gives some suggestions on how you can use the information.

|                                                |
|------------------------------------------------|
| Volume Name: WREN01                            |
| Storage Pool Name: TAPEPOOL                    |
| Device Class Name: TAPE8MM                     |
| Estimated Capacity: 2.4 G                      |
| Pct Util: 26.3                                 |
| Volume Status: Filling                         |
| Access: Read/Write                             |
| Pct. Reclaimable Space: 5.3                    |
| Scratch Volume?: No                            |
| In Error State?: No                            |
| Number of Writable Sides: 1                    |
| Number of Times Mounted: 4                     |
| Write Pass Number: 2                           |
| Approx. Date Last Written: 09/04/2002 11:33:26 |
| Approx. Date Last Read: 09/03/2002 16:42:55    |
| Date Became Pending:                           |
| Number of Write Errors: 0                      |
| Number of Read Errors: 0                       |
| Volume Location:                               |
| Last Update by (administrator): TANAGER        |
| Last Update Date/Time: 09/04/2002 11:33:26     |

Figure 54. Detailed information for a storage pool volume

Table 36. Using the detailed report for a volume

| Task                                    | Fields and Description                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ensure the volume is available.         | <p><i>Volume Status</i><br/><i>Access</i></p> <hr/> <p>Check the <i>Volume Status</i> to see if a disk volume has been varied offline, or if a sequential-access volume is currently being filled with data.</p> <p>Check the <i>Access</i> to determine whether files can be read from or written to this volume.</p>                                                                               |
| Monitor the use of storage space.       | <p><i>Estimated Capacity</i><br/><i>Pct Util</i></p> <hr/> <p>The <i>Estimated Capacity</i> is determined by the device class associated with the storage pool to which this volume belongs. Based on the estimated capacity, the system tracks the percentage of space occupied by client files (<i>Pct Util</i>).</p> <p>In this example, 26.3% of the estimated capacity is currently in use.</p> |
| Monitor the error status of the volume. | <p><i>Number of Write Errors</i><br/><i>Number of Read Errors</i></p> <hr/> <p>The server reports when the volume is in an error state and automatically updates the access mode of the volume to read-only. The <i>Number of Write Errors</i> and <i>Number of Read Errors</i> indicate the type and severity of the problem. Audit a volume when it is placed in error state.</p>                  |

Table 36. Using the detailed report for a volume (continued)

| Task                                                                                                       | Fields and Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Monitor the life of sequential-access volumes that you have defined to the storage pool.                   | <p><i>Scratch Volume?</i><br/> <i>Write Pass Number</i><br/> <i>Number of Times Mounted</i><br/> <i>Approx. Date Last Written</i><br/> <i>Approx. Date Last Read</i></p> <hr/> <p>The server maintains usage statistics on volumes that are defined to storage pools. Statistics on a volume that is explicitly defined by an administrator remain for as long as the volume is defined to the storage pool. The server continues to maintain the statistics on defined volumes even as the volume is reclaimed and reused. However, the server deletes the statistics on the usage of a scratch volume when the volume returns to scratch status (after reclamation or after all files are deleted from the volume).</p> <p>In this example, WREN01 is a volume defined to the server by an administrator, not a scratch volume (<i>Scratch Volume?</i> is No).</p> <p>The <i>Write Pass Number</i> indicates the number of times the volume has been written to, starting from the beginning of the volume. A value of one indicates that a volume is being used for the first time.</p> <p>In this example, WREN01 has a write pass number of two, which indicates space on this volume may have been reclaimed or deleted once before.</p> <p>Compare this value to the specifications provided with the media that you are using. The manufacturer may recommend a maximum number of write passes for some types of tape media. You may need to retire your tape volumes after reaching the maximum passes to better ensure the integrity of your data. To retire a volume, move the data off the volume by using the <b>MOVE DATA</b> command.</p> <p>Use the <i>Number of Times Mounted</i>, the <i>Approx. Date Last Written</i>, and the <i>Approx. Date Last Read</i> to help you estimate the life of the volume. For example, if more than six months have passed since the last time this volume has been written to or read from, audit the volume to ensure that files can still be accessed.</p> <p>The number given in the field, <i>Number of Times Mounted</i>, is a count of the number of times that the server has opened the volume for use. The number of times that the server has opened the volume is not always the same as the number of times that the volume has been physically mounted in a drive. After a volume is physically mounted, the server can open the same volume multiple times for different operations, for example for different client backup sessions.</p> |
| Determine the location of a volume in a sequential-access storage pool.                                    | <p><i>Location</i></p> <hr/> <p>When you define or update a sequential-access volume, you can give location information for the volume. The detailed query displays this location name. The location information can be useful to help you track volumes (for example, offsite volumes in copy storage pools or active-data pools).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Determine if a volume in a sequential-access storage pool is waiting for the reuse delay period to expire. | <p><i>Date Became Pending</i></p> <hr/> <p>A sequential-access volume is placed in the pending state after the last file is deleted or moved from the volume. All the files that the pending volume had contained were expired or deleted, or were moved from the volume. Volumes remain in the pending state for as long as specified with the <b>REUSEDELAY</b> parameter for the storage pool to which the volume belongs.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

Whether or not a volume is full, at times the Pct Util (percent of the volume utilized) plus the Pct Reclaimable Space (percent of the volume that can be

reclaimed) may add up to more than 100 percent. This can happen when a volume contains aggregates that have empty space because of files in the aggregates that have expired or been deleted. The Pct Util field shows all space occupied by both non-aggregated files and aggregates, including empty space within aggregates. The Pct Reclaimable Space field includes any space that is reclaimable on the volume, also including empty space within aggregates. Because both fields include the empty space within aggregates, these values may add up to more than 100 percent.

**Related concepts:**

“How the server groups files for storage” on page 276

**Related tasks:**

“Auditing storage pool volumes” on page 912

“Moving data from one volume to another volume” on page 413

“Obtaining information about the use of storage space” on page 409

## **Obtaining information about the contents of a storage pool volume**

Any administrator can request information about the contents of a storage pool volume. Viewing the contents of a storage volume is useful when a volume is damaged or before you request the server to correct inconsistencies in the volume, move files from one volume to another, or delete a volume from a storage pool.

### **About this task**

Because the server tracks the contents of a storage volume through its database, the server does not need to access the requested volume to determine its contents.

To produce a report that shows the contents of a volume, issue the QUERY CONTENT command.

This report can be extremely large and may take a long time to produce. To reduce the size of this report, narrow your search by selecting one or all of the following search criteria:

**Node name**

Name of the node whose files you want to include in the query.

**File space name**

Names of file spaces to include in the query. File space names are case-sensitive and must be entered exactly as they are known to the server. Use the QUERY FILESPACE command to find the correct capitalization.

**Number of files to be displayed**

Enter a positive integer, such as 10, to list the first ten files stored on the volume. Enter a negative integer, such as -15, to list the last fifteen files stored on the volume.

**Filetype**

Specifies which types of files, that is, backup versions, archive copies, or space-managed files, or a combination of these. If the volume being queried is assigned to an active-data pool, the only valid values are ANY and Backup.

**Format of how the information is displayed**

Standard or detailed information for the specified volume.

**Damaged**

Specifies whether to restrict the query output either to files that are known to be damaged, or to files that are not known to be damaged.

## Copied

Specifies whether to restrict the query output to either files that are backed up to a copy storage pool, or to files that are not backed up to a copy storage pool. Whether files are stored in an active-data pool does not affect the output.

**Note:** There are several reasons why a file might have no usable copy in a copy storage pool:

### **The file was recently added to the volume and has not yet been backed up to a copy storage pool**

The file should be copied the next time the storage pool is backed up.

### **The file is damaged**

To determine whether the file is damaged, issue the QUERY CONTENT command, specifying the DAMAGED=YES parameter.

### **The volume that contains the files is damaged**

To determine which volumes contain damaged files, issue the following command:

```
select * from contents where damaged=yes
```

### **The file is segmented across multiple volumes, and one or more of the other volumes is damaged**

To determine whether the file is segmented, issue the QUERY CONTENT command, specifying the FORMAT=DETAILED parameter. If the file is segmented, issue the following command to determine whether any of the volumes containing the additional file segments are damaged:

```
select volume_name from contents where damaged=yes and
file_name like '%filename%'
```

For more information about using the SELECT command, see the *Administrator's Reference*.

## **Example: Generating a standard report about the contents of a volume:**

A standard report about the contents of a volume displays basic information such as the names of files.

### **About this task**

To view the first seven backup files on volume WREN01 from file space /usr on client node TOMC, for example, enter:

```
query content wren01 node=tomc filespace=/usr count=7 type=backup
```

Figure 55 on page 403 displays a standard report which shows the first seven files from file space /usr on TOMC stored in WREN01.

| Node Name | Type | Filespace Name | Client's Name for File |
|-----------|------|----------------|------------------------|
| TOMC      | Bkup | /usr           | /bin/ acctcom          |
| TOMC      | Bkup | /usr           | /bin/ acledit          |
| TOMC      | Bkup | /usr           | /bin/ aclput           |
| TOMC      | Bkup | /usr           | /bin/ admin            |
| TOMC      | Bkup | /usr           | /bin/ ar               |
| TOMC      | Bkup | /usr           | /bin/ arcv             |
| TOMC      | Bkup | /usr           | /bin/ banner           |

Figure 55. A standard report on the contents of a volume

The report lists logical files on the volume. If a file on the volume is an aggregate of logical files (backed-up or archived client files), all logical files that are part of the aggregate are included in the report. An aggregate can be stored on more than one volume, and therefore not all of the logical files in the report may actually be stored on the volume being queried.

#### Example: Generating a detailed report about the contents of a volume:

A detailed report about volume contents provides basic information as well as information about whether the file is stored across multiple volumes, whether the file is part of an aggregate, and whether the file is a cached copy of a file that has been migrated to the next storage pool in the hierarchy.

#### About this task

To display detailed information about the files stored on volume VOL1, enter:  
`query content vol1 format=detailed`

Figure 56 on page 404 displays a detailed report that shows the files stored on VOL1. The report lists logical files and shows whether each file is part of an aggregate. If a logical file is stored as part of an aggregate, the information in the **Segment Number**, **Stored Size**, and **Cached Copy?** fields apply to the aggregate, not to the individual logical file.

If a logical file is part of an aggregate, the **Aggregated?** field shows the sequence number of the logical file within the aggregate. For example, the **Aggregated?** field contains the value 2/4 for the file AB0CTGLO.IDE, meaning that this file is the second of four files in the aggregate. All logical files that are part of an aggregate are included in the report. An aggregate can be stored on more than one volume, and therefore not all of the logical files in the report may actually be stored on the volume being queried.

For disk volumes, the **Cached Copy?** field identifies whether the file is a cached copy of a file that has been migrated to the next storage pool in the hierarchy.



```

Node Name: DWE
Type: Bkup
Filespace Name: OS2
Client's Name for File: \ README
Aggregated?: No
Stored Size: 27,089
Segment Number: 1/1
Cached Copy?: No

Node Name: DWE
Type: Bkup
Filespace Name: DRIVE_L_K:
Client's Name for File: \COMMON\DSMCOMM\ AB0CTCOM.ENT
Aggregated?: 1/4
Stored Size: 202,927
Segment Number: 1/1
Cached Copy?: No

Node Name: DWE
Type: Bkup
Filespace Name: DRIVE_L_K:
Client's Name for File: \COMMON\DSMCOMM\ AB0CTGLO.IDE
Aggregated?: 2/4
Stored Size: 202,927
Segment Number: 1/1
Cached Copy?: No

Node Name: DWE
Type: Bkup
Filespace Name: DRIVE_L_K:
Client's Name for File: \COMMON\DSMCOMM\ AB0CTTRD.IDE
Aggregated?: 3/4
Stored Size: 202,927
Segment Number: 1/1
Cached Copy?: No

Node Name: DWE
Type: Bkup
Filespace Name: DRIVE_L_K:
Client's Name for File: \COMMON\DSMCOMM\ AB0CTSYM.ENT
Aggregated?: 4/4
Stored Size: 202,927
Segment Number: 1/1
Cached Copy?: No

```

Figure 56. Viewing a detailed report of the contents of a volume

## Identifying the volumes used by a client node

To identify the sequential volumes used by a client node, you can use the server's SELECT command.

### About this task

The SELECT command queries the VOLUMEUSAGE table in the Tivoli Storage Manager database. For example, to get a list of volumes used by the EXCH1 client node in the TAPEPOOL storage pool, enter the following command:

```
select volume_name from volumeusage where node_name='EXCH1' and
stgpool_name='TAPEPOOL'
```

The results are something like the following:

```

VOLUME_NAME

TAPE01
TAPE08
TAPE13
TAPE21

```

For more information about using the SELECT command, see the *Administrator's Reference*.

## Monitoring migration processes

To obtain information about migration processing, you can request a standard storage-pool report.

### About this task

Four fields on the standard storage-pool report provide you with information about the migration process. They include:

#### Pct Migr

Specifies the percentage of data in each storage pool that can be migrated. This value is used to determine when to start or stop migration.

For random-access and sequential-access disk storage pools, this value represents the amount of disk space occupied by backed-up, archived, or space-managed files that can be migrated to another storage pool. The calculation for random-access disk storage pools excludes cached data, but includes files on volumes that are varied offline.

For sequential-access tape storage pools, this value is the percentage of the total volumes in the storage pool that actually contain data at the moment. For example, assume that a storage pool has four explicitly defined volumes, and a maximum scratch value of six volumes. If only two volumes actually contain data at the moment, then Pct Migr is 20%.

This field is blank for copy storage pools and active-data pools.

#### High Mig Pct

Specifies when the server can begin migrating data from this storage pool. Migration can begin when the percentage of data that can be migrated reaches this threshold. (This field is blank for copy storage pools and active-data pools.)

#### Low Mig Pct

Specifies when the server can stop migrating data from this storage pool. Migration can end when the percentage of data that can be migrated falls below this threshold. (This field is blank for copy storage pools and active-data pools.)

#### Next Storage Pool

Specifies the primary storage pool destination to which data is migrated. (This field is blank for copy storage pools and active-data pools.)

### Example: Monitoring data migration between storage pools

A storage pool is queried to determine high and low migration thresholds. The server is queried to monitor the migration process.

### About this task

Figure 52 on page 395 shows that the migration thresholds for BACKUPPOOL storage pool are set to 50% for the *high migration threshold* and 30% for the *low migration threshold*.

When the amount of migratable data stored in the BACKUPPOOL storage pool reaches 50%, the server can begin to migrate files to BACKTAPE.

To monitor the migration of files from BACKUPPOOL to BACKTAPE, enter:  
query stgpool back\*

See Figure 57 for an example of the results of this command.

If caching is on for a disk storage pool and files are migrated, the Pct Util value does not change because the cached files still occupy space in the disk storage pool. However, the Pct Migr value decreases because the space occupied by cached files is no longer migratable.

| Storage<br>Pool Name | Device<br>Class Name | Estimated<br>Capacity | Pct<br>Util | Pct<br>Migr | High<br>Mig<br>Pct | Low<br>Mig<br>Pct | Next<br>Storage<br>Pool |
|----------------------|----------------------|-----------------------|-------------|-------------|--------------------|-------------------|-------------------------|
| BACKTAPE             | TAPE                 | 180.0 M               | 95.2        | 100.0       | 90                 | 70                |                         |
| BACKUPPOOL           | DISK                 | 80.0 M                | 51.6        | 28.8        | 50                 | 30                | BACKTAPE                |

Figure 57. Information on backup storage pools

You can query the server to monitor the migration process by entering:  
query process

A message similar to Figure 58 is displayed:

| Process<br>Number | Process Description | Status                                                                                                                 |
|-------------------|---------------------|------------------------------------------------------------------------------------------------------------------------|
| 2                 | Migration           | Disk Storage Pool BACKUPPOOL, Moved Files:<br>1086, Moved Bytes: 25555579, Unreadable<br>Files: 0, Unreadable Bytes: 0 |

Figure 58. Information on the migration process

When migration is finished, the server displays the following message:

ANR1101I Migration ended for storage pool BACKUPPOOL.

## Managing problems during migration processes

Migration processes can be suspended if a problem occurs. If migration is suspended, you can retry the process, cancel the process, end the migration process by changing the attributes of the storage pool from which data is being migrated, or provide additional space.

### Canceling migration processes

To stop server migration when a problem occurs or when you need the resources the process is using, you can cancel the process.

### About this task

First determine the identification number of the migration process by entering:  
query process

A message similar to Figure 59 on page 407 is displayed:

| Process Number | Process Description | Status                                                                                                     |
|----------------|---------------------|------------------------------------------------------------------------------------------------------------|
| 1              | Migration           | ANR1113W Migration suspended for storage pool BACKUPPOOL - insufficient space in subordinate storage pool. |

Figure 59. Getting the identification number of the migration process

Then you can cancel the migration process by entering:

```
cancel process 1
```

## Stopping repeated attempts by the server to restart migration

Some errors cause the server to continue attempting to restart the migration process after 60 seconds. (If the problem still exists after several minutes, the migration process ends.) To stop the repeated attempts at restart, you can change some characteristics of the storage pool from which data is being migrated.

### About this task

Depending on your environment, you can:

- Set higher migration thresholds for the storage pool from which data is being migrated. The higher threshold means the storage pool must have more migratable data before migration starts. This change delays migration.

In the example in “Example: Monitoring data migration between storage pools” on page 405, you could update the disk storage pool BACKUPPOOL.

- Add volumes to the pool from which data is being migrated. Adding volumes decreases the percentage of data that is migratable (Pct Migr).

In the example in “Example: Monitoring data migration between storage pools” on page 405, you could add volumes to the disk storage pool BACKUPPOOL to increase its storage capacity.

**Tip:** Do this only if you received an out-of-space message for the storage pool to which data is being migrated.

## Providing additional space for the migration process

A migration process can be suspended because of insufficient space in the storage pool to which data is being migrated. To allow the migration process to complete, you can provide additional storage volumes for that storage pool.

### About this task

In the example in “Example: Monitoring data migration between storage pools” on page 405, you can add volumes to the BACKTAPE storage pool or increase the maximum number of scratch tapes allowed for it. Either way, you increase the storage capacity of BACKTAPE.

## Monitoring the use of cache space on disk storage

To determine whether cache is being used on disk storage and to monitor how much space is being used by cached copies, query the server for a detailed storage pool report.

### About this task

The Pct Util value includes cached data on a volume (when cache is enabled) and the Pct Migr value excludes cached data. Therefore, when cache is enabled and migration occurs, the Pct Migr value decreases while the Pct Util value remains the same. The Pct Util value remains the same because the migrated data remains on the volume as cached data. In this case, the Pct Util value only decreases when the cached data expires.

If you update a storage pool from CACHE=YES to CACHE=NO, the cached files will not disappear immediately. The Pct Util value will be unchanged. The cache space will be reclaimed over time as the server needs the space, and no additional cached files will be created.

For example, to request a detailed report for BACKUPPOOL, enter:

```
query stgpool backuppool format=detailed
```

Figure 60 on page 409 displays a detailed report for the storage pool.

```

Storage Pool Name: BACKUPPOOL
Storage Pool Type: PRIMARY
Device Class Name: DISK
Estimated Capacity: 80.0 M
Space Trigger Util: 0.0
 Pct Util: 42.0
 Pct Migr: 29.6
 Pct Logical: 82.1
 High Mig Pct: 50
 Low Mig Pct: 30
 Migration Delay: 0
 Migration Continue: Yes
 Migration Processes: 1
 Reclamation Processes:
 Next Storage Pool: BACKTAPE
 Reclaim Storage Pool:
 Maximum Size Threshold: No Limit
 Access: Read/Write
 Description:
 Overflow Location:
 Cache Migrated Files?: Yes
 Collocate?:
 Reclamation Threshold:
 Offsite Reclamation Limit:
 Maximum Scratch Volumes Allowed:
 Number of Scratch Volumes Used:
 Delay Period for Volume Reuse: 0 Day(s)
 Migration in Progress?: Yes
 Amount Migrated (MB): 0.10
 Elapsed Migration Time (seconds): 5
 Reclamation in Progress?:
 Last Update by (administrator): SERVER_CONSOLE
 Last Update Date/Time: 09/04/2002 16:47:49
 Storage Pool Data Format: Native
 Copy Storage Pool(s):
 Active-data Pool(s):
 Continue Copy on Error?:
 CRC Data: No
 Reclamation Type:
 Overwrite Data when Deleted: 2 Time(s)

```

*Figure 60. Detailed storage pool report*

When **Cache Migrated Files?** is set to **Yes**, the value for Pct Util should not change because of migration, because cached copies of files migrated to the next storage pool remain in disk storage.

This example shows that utilization remains at 42%, even after files have been migrated to the BACKTAPE storage pool, and the current amount of data eligible for migration is 29.6%.

When **Cache Migrated Files?** is set to **No**, the value for Pct Util more closely matches the value for Pct Migr because cached copies are not retained in disk storage.

## Obtaining information about the use of storage space

You can generate reports to determine the amount of space used by client nodes and file spaces, storage pools and device classes, or types of data (backup, archive, or space-managed). Generating occupancy reports on a regular basis can help you with capacity planning.

## About this task

| Task                                                  | Required Privilege Class |
|-------------------------------------------------------|--------------------------|
| Query the server for information about server storage | Any administrator        |

To obtain reports with information broken out by node or file space, issue the **QUERY OCCUPANCY** command.

Each report gives two measures of the space in use by a storage pool:

- Logical space occupied  
The amount of space used for logical files. A logical file is a client file. A logical file is stored either as a single physical file, or in an aggregate with other logical files. The logical space occupied in active-data pools includes the space occupied by inactive logical files. Inactive logical files in active-data pools are removed by reclamation.
- Physical space occupied  
The amount of space used for physical files. A physical file is either a single logical file, or an aggregate composed of logical files.  
An aggregate might contain empty space that was used by logical files that are now expired or deleted, or that were deactivated in active-data pools. Therefore, the amount of space used by physical files is equal to or greater than the space used by logical files. The difference gives you a measure of how much unused space any aggregates may have. The unused space can be reclaimed in sequential storage pools.

You can also use this report to evaluate the average size of workstation files stored in server storage.

## Obtaining information about space used by client nodes

You can request information about how much data a client backs up, archives, or migrates to server storage. You can also request information about the amount of storage space that is used by each client node and file space, as well as the number of files that are in server storage that were backed up to a copy storage pool or an active-data pool.

## About this task

To determine the amount of server storage space that is used by the `/home` file space belonging to the client node MIKE, for example, enter:

```
query occupancy mike /home
```

File space names are case-sensitive and must be entered exactly as they are known to the server. To determine the correct capitalization, issue the **QUERY FILESPACE** command.

Figure 61 on page 411 shows the results of the query. The report shows the number of files that are backed up, archived, or migrated from the `/home` file space belonging to MIKE. The report also shows how much space is occupied in each storage pool.

If you back up the ENGBACK1 storage pool to a copy storage pool, the copy storage pool would also be listed in the report. To determine how many of the client node's files in the primary storage pool are backed up to a copy storage

pool, compare the number of files in each pool type for the client node.

| Node Name | Type | Filespace Name | Storage Pool Name | Number of Files | Physical Space Occupied (MB) | Logical Space Occupied (MB) |
|-----------|------|----------------|-------------------|-----------------|------------------------------|-----------------------------|
| MIKE      | Bkup | /home          | ENGBACK1          | 513             | 3.52                         | 3.01                        |

Figure 61. A report of the occupancy of storage pools by client node

You can also use the **QUERY NODEDATA** command to display information about the data for one or more nodes in a sequential-access storage pool. (The command is not supported for random-access storage pools.) The output of the **QUERY NODEDATA** command displays the name of the volume on which a node's data is written, the name of the storage pool in which the volume is located, and the amount of space that is occupied by the data on the volume. For example, to display information about the data for nodes whose names begin with the letter "e," you would enter the following command using a wildcard character:

```
query nodedata e*
```

| Node Name | Volume Name                | Storage Pool Name | Physical Space Occupied (MB) |
|-----------|----------------------------|-------------------|------------------------------|
| EDU_J2    | E:\tsm\server\00000117.BFS | EDU512            | 0.01                         |
| EDU_J2    | E:\tsm\server\00000122.BFS | EDU319            | 0.01                         |
| EDU_J3    | E:\tsm\server\00000116.BFS | EDU512            | 0.01                         |

For details about the **QUERY FILESPACE** and **QUERY NODEDATA** commands, refer to the *Administrator's Reference*.

#### Related reference:

"Managing file spaces" on page 459

### Obtaining information about space utilization of storage pools

You can monitor the amount of space being used by an individual storage pool or a group of storage pools.

#### About this task

To query the server for the amount of data stored in backup tape storage pools belonging to the TAPECLASS device class, for example, enter:

```
query occupancy devclass=tapeclass
```

Figure 62 on page 412 displays a report on the occupancy of tape storage pools assigned to the TAPECLASS device class.



| Node Name | Type | Filespace Name     | Storage Pool Name | Number of Files | Physical Space Occupied (MB) | Logical Space Occupied (MB) |
|-----------|------|--------------------|-------------------|-----------------|------------------------------|-----------------------------|
| CAROL     | Arch | OS2C               | ARCHTAPE          | 5               | .92                          | .89                         |
| CAROL     | Bkup | OS2C               | BACKTAPE          | 21              | 1.02                         | 1.02                        |
| PEASE     | Arch | /home/pease/dir    | ARCHTAPE          | 492             | 18.40                        | 18.40                       |
| PEASE     | Bkup | /home/pease/dir    | BACKTAPE          | 33              | 7.60                         | 7.38                        |
| PEASE     | Bkup | /home/pease/dir1   | BACKTAPE          | 2               | .80                          | .80                         |
| TOMC      | Arch | /home/tomc/driver5 | ARCHTAPE          | 573             | 20.85                        | 19.27                       |
| TOMC      | Bkup | /home              | BACKTAPE          | 13              | 2.02                         | 1.88                        |

Figure 62. A report on the occupancy of storage pools by device class

**Tip:** For archived data, you might see (*archive*) in the Filespace Name column instead of a file space name. This means that the data was archived before collocation by file space was supported by the server.

### Requesting information about space used by backed-up, archived, and space-managed files

You can query the server for the amount of space used by backed-up, archived, and space-managed files. By determining the average size of workstation files stored in server storage, you can estimate how much storage capacity you might need when registering new client nodes to the server.

#### About this task

For example, to request a report about backup versions stored in the disk storage pool named BACKUPPOOL, enter:

```
query occupancy stgpool=backuppools type=backup
```

Figure 63 displays a report on the amount of server storage used for backed-up files.

| Node Name | Type | Filespace Name | Storage Pool Name | Number of Files | Physical Space Occupied (MB) | Logical Space Occupied (MB) |
|-----------|------|----------------|-------------------|-----------------|------------------------------|-----------------------------|
| CAROL     | Bkup | OS2C           | BACKUPPOOL        | 513             | 23.52                        | 23.52                       |
| CAROL     | Bkup | OS2D           | BACKUPPOOL        | 573             | 20.85                        | 20.85                       |
| PEASE     | Bkup | /marketing     | BACKUPPOOL        | 132             | 12.90                        | 9.01                        |
| PEASE     | Bkup | /business      | BACKUPPOOL        | 365             | 13.68                        | 6.18                        |
| TOMC      | Bkup | /              | BACKUPPOOL        | 177             | 21.27                        | 21.27                       |

Figure 63. A report of the occupancy of backed-up files in storage pools

To determine the average size of backup versions stored in BACKUPPOOL, complete the following steps using the data provided in Figure 63:

#### Procedure

1. Add the number of megabytes of space occupied by backup versions. In this example, backup versions occupy 92.22 MB of space in BACKUPPOOL.
2. Add the number of files stored in the storage pool. In this example, 1760 backup versions reside in BACKUPPOOL.

3. Divide the space occupied by the number of files to determine the average size of each file backed up to the BACKUPPOOL. In this example, the average size of each workstation file backed up to BACKUPPOOL is about 0.05 MB, or approximately 50 KB.

## Results

You can use this average to estimate the capacity required for additional storage pools that are defined to the server.

For information about planning storage space, see “Estimating space needs for storage pools” on page 392 and “Estimating space for archived files in random-access storage pools” on page 393.

## Obtaining information about free disk space in FILE device classes

You can monitor the amount of free disk space in directories associated with FILE device classes. The Tivoli Storage Manager server uses directories as the location for files that represent storage-pool volumes.

## Procedure

To request information about the amount of free disk space in each directory for all device classes with a device type of FILE, issue **QUERY DIRSPACE** command.

## Example

Figure 64 displays the output for this command.

| Device Class | Directory                  | Estimated Capacity | Estimated Available |
|--------------|----------------------------|--------------------|---------------------|
| DBBKUP       | G:\This\is\large\directory | 13,000 M           | 5,543 M             |
| DBBKUP       | G:\This\is\directory2      | 13,000 M           | 7,123 M             |
| DBBKUP2      | G:\This\is\huge\directory  | 2,256 G            | 2,200 G             |

Figure 64. A report of the free disk space for all device classes of device type FILE

To obtain the amount of free space associated with a particular device class, issue the following command:

```
query dirspace device_class_name
```

---

## Moving data from one volume to another volume

You might need to move data in some situations, for example, when you need to salvage readable data from a damaged volume. To move data (files) from one volume to another volume in the same or a different storage pool, use the MOVE DATA command. The volumes can be onsite volumes or off-site volumes.

## About this task

| Task                                                                                    | Required Privilege Class       |
|-----------------------------------------------------------------------------------------|--------------------------------|
| Move files from a volume in any storage pool to an available volume in any storage pool | System or unrestricted storage |

| Task                                                                                              | Required Privilege Class |
|---------------------------------------------------------------------------------------------------|--------------------------|
| Move files from one volume to an available volume in any storage pool to which you are authorized | Restricted storage       |

During the data movement process, the server:

- Moves any readable files to available volumes in the specified destination storage pool
- Deletes any cached copies from a disk volume
- Attempts to bypass any files that previously were marked as damaged

During the data movement process, users cannot access the volume to restore or retrieve files, and no new files can be written to the volume.

**Remember:**

- Files in a copy storage pool or an active-data pool do not move when primary files are moved.
- You cannot move data into or out of a storage pool that is defined with a CENTERA device class.
- In addition to moving data from volumes in storage pools that have NATIVE or NONBLOCK data formats, you can also move data from volumes in storage pools that have NDMP data formats (NETAPPDUMP, CELERRADUMP, or NDMPDUMP). The target storage pool must have the same data format as the source storage pool. If you are moving data out of a storage pool for the purpose of upgrading to new tape technology, the target primary storage pool must be associated with a library that has the new device for the tape drives.
- If you run the **MOVE DATA** command on an offsite volume that contains collocated data, it might be necessary to issue the **MOVE DATA** command multiple times to move all of the data out of the volume. Each **MOVE DATA** command moves the data for a single collocation group.

## Data movement within the same storage pool

Moving files from one volume to other volumes in the same storage pool provides a number of benefits.

Moving files from one volume to other volumes in the same storage pool is useful:

- When you want to free up all space on a volume so that it can be deleted from the Tivoli Storage Manager server  
See “Deleting storage pool volumes” on page 428 for information about deleting backed-up, archived, or space-managed data before you delete a volume from a storage pool.

- When you need to salvage readable files from a volume that has been damaged
- When you want to delete cached files from disk volumes

If you want to force the removal of cached files, you can delete them by moving data from one volume to another volume. During the move process, the server deletes cached files remaining on disk volumes.

If you move data between volumes within the same storage pool and you run out of space in the storage pool before all data is moved from the target volume, then you cannot move all the data from the target volume. In this case, consider moving data to available space in another storage pool as described in “Data movement to

a different storage pool.”

## Data movement to a different storage pool

You can move all data from a volume in one storage pool to volumes in another storage pool. When you specify a target storage pool that is different than the source storage pool, the server uses the storage hierarchy to move data if more space is required.

**Remember:** Data cannot be moved from a primary storage pool to a copy storage pool or to an active-data pool. Data in a copy storage pool or an active-data pool cannot be moved to another storage pool.

You can move data from random-access storage pools to sequential-access storage pools. For example, if you have a damaged disk volume and you have a limited amount of disk storage space, you could move all files from the disk volume to a tape storage pool. Moving files from a disk volume to a sequential storage pool may require many volume mount operations if the target storage pool is collocated. Ensure that you have sufficient personnel and media to move files from disk to sequential storage.

When a data move from a shred pool is complete, the original data is shredded. However, if the destination is not another shred pool, you must set the SHREDTONOSHRED parameter to YES to force the movement to occur. If this value is not specified, the server issues an error message and does not allow the data to be moved. See “Securing sensitive client data” on page 529 for more information about shredding.

## Data movement from offsite volumes in copy storage pools or active-data pools

You can move data from offsite volumes without bringing the volumes onsite.

Processing of the **MOVE DATA** command for volumes in copy-storage pools and active-data pools is similar to that of primary-storage pools, with the following exceptions:

- Volumes in copy-storage pools and active-data pools might be set to an access mode of offsite, making them ineligible to be mounted. During processing of the **MOVE DATA** command, valid files on offsite volumes are copied from the original files in the primary-storage pools. In this way, valid files on offsite volumes are copied without having to mount these volumes. These new copies of the files are written to another volume in the copy-storage pool or active-data pool.
- With the **MOVE DATA** command, you can move data from any primary-storage pool volume to any primary-storage pool. However, you can move data from a copy-storage pool volume only to another volume within the same-copy storage pool. Similarly, you can move data from an active-data pool volume only to another volume within the same active-data pool.

When you move files from a volume that is marked as offsite, the server performs the following actions:

1. Determines which files still remain on the volume from which you are moving data
2. Obtains the remaining files from a primary-storage pool or from another copy-storage pool

3. Copies the files to one or more volumes in the destination copy-storage pool or active-data pool

During the data movement process, active-data pools cannot be used to obtain data.

Processing of the **MOVE DATA** command for primary-storage pool volumes does not affect copy-storage pool or active-data pool files.

## Moving data

You can move data using the **MOVE DATA** command. Before moving data, however, take steps to ensure that the move operation succeeds.

### Before you begin

Before beginning this procedure:

- If you want to ensure that no new files are written to a volume after you move data from it, change the volume's access mode to read-only. This prevents the server from filling the volume with data again as soon as data is moved. You might want to do this if you want to delete the volume.

See "Updating storage pool volumes" on page 272 for information about updating the access mode of a storage pool volume.

- Ensure that sufficient space is available on volumes within the specified destination storage pool by:
  1. Querying the source storage volume to determine how much space is required on other volumes. See "Monitoring the use of storage pool volumes" on page 397 for information about requesting information about a storage volume.
  2. Querying the specified destination storage pool to ensure that there is sufficient capacity to store the files that are being moved. See "Monitoring space available in a storage pool" on page 394 for information about querying a storage pool.

If you need more storage space, define volumes or increase the maximum number of scratch volumes in the specified destination storage pool. See "Defining storage pool volumes" on page 271 for preparing volumes to be used for server storage.

- If you are moving files from a volume in a sequential storage pool to another volume in the same storage pool, ensure that the mount limit of the device class associated with the storage pool is greater than one.

For information about the mount limit value for the device class, see:

"Obtaining information about device classes" on page 215

- If you are moving files from a tape volume to a tape storage pool, ensure that the two tape drives that are required are available.

### Procedure

To move data, issue the **MOVE DATA** command.

For example, to move the files that are stored in the d:\storage\vol3 volume to any available volume in the STGTMP1 storage pool, enter:

```
move data d:\storage\vol3 stgpool=stgtmp1
```

When you move data from a volume, the server starts a background process and sends informational messages, such as:

ANR1140I Move Data process started for volume D:\STORAGE\VOL3  
(process ID 32).

To run the **MOVE DATA** command in the foreground on an administrative client, issue the command with the **WAIT=YES** parameter.

**Remember:**

- A volume might not be totally empty after a move data operation completes. For example, the server might be unable to relocate one or more files to another volume because of input/output errors on the device or because errors were found in the file. You can delete the volume with **DISCARD DATA=YES** to delete the volume and any remaining files. The server then deletes the remaining files that had I/O or other errors.
- In addition to moving data from volumes in storage pools that have **NATIVE** or **NONBLOCK** data formats, you can also move data from volumes in storage pools that have **NDMP** data formats (**NETAPPDUMP**, **CELERRADUMP**, or **NDMPDUMP**). The target storage pool must have the same data format as the source storage pool. If you are moving data out of a storage pool for the purpose of upgrading to new tape technology, the target primary storage pool must be associated with a library that has the new device for the tape drives.
- If you run the **MOVE DATA** command on an offsite volume that contains collocated data, it might be necessary to issue the **MOVE DATA** command multiple times to move all of the data out of the volume. Each **MOVE DATA** command moves the data for a single collocation group.

## Requesting information about the data-movement process

You can query the server for statistics about the data-movement process.

### About this task

To request information, issue the **QUERY PROCESS** command.

Figure 65 shows an example of the report that you receive about the data movement process.

| Process Number | Process Description | Status                                                                                                                                                                                                                                     |
|----------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 32             | Move Data           | Volume D:\STORAGE\VOL3, (storage pool BACKUPPOOL),<br>Target Pool STGTMP1, Moved Files: 49, Moved<br>Bytes: 9,121,792, Unreadable Files: 0,<br>Unreadable Bytes: 0. Current File (bytes):<br>3,522,560<br><br>Current output volume: VOL1. |

Figure 65. Information about the file movement process

## Reclaiming space in aggregates by moving data

Empty space accumulates in a file aggregate as logical files in that aggregate are deleted. During reclamation processing, the aggregate is reconstructed by removing the empty space left by the deleted files. However, you cannot start reclamation processing for specific volumes.

### About this task

To remove empty space in a specific volume and reconstruct an aggregate, issue the **MOVE DATA** command. By default, this command removes the empty space occupied by deleted files in an aggregate.

#### Remember:

1. Reclaiming empty space in NDMP-generated images is not an issue because NDMP-generated images are not aggregated.
2. Reconstruction removes inactive backup files in active-data pools. Specifying **RECONSTRUCT=NO** when moving data from volumes in an active-data pool prevents the inactive backup files from being removed.

## Monitoring the movement of data between volumes

You can query the server for volume information to monitor the movement of data between volumes.

### Procedure

To request information, use the **QUERY VOLUME** command.

### Example

For example, to see how much data has moved from the source volume in the move operation example, enter:

```
query volume d:\storage\vol3 stgpool=backuppool
```

Near the beginning of the move process, querying the volume from which data is being moved gives the following results:

| Volume Name     | Storage Pool Name | Device Class Name | Estimated Capacity | Pct Util | Volume Status |
|-----------------|-------------------|-------------------|--------------------|----------|---------------|
| -----           | -----             | -----             | -----              | -----    | -----         |
| D:\STORAGE\VOL3 | BACKUPPOOL        | DISK              | 15.0 M             | 59.9     | On-Line       |

Querying the volume to which data is being moved (VOL1, according to the process query output) gives the following results:

| Volume Name | Storage Pool Name | Device Class Name | Estimated Capacity | Pct Util | Volume Status |
|-------------|-------------------|-------------------|--------------------|----------|---------------|
| -----       | -----             | -----             | -----              | -----    | -----         |
| VOL1        | STGTMP1           | 8500DEV           | 4.8 G              | 0.3      | Filling       |

At the end of the move process, querying the volume from which data was moved gives the following results:

| Volume Name     | Storage Pool Name | Device Class Name | Estimated Capacity | Pct Util | Volume Status |
|-----------------|-------------------|-------------------|--------------------|----------|---------------|
| -----           | -----             | -----             | -----              | -----    | -----         |
| D:\STORAGE\VOL3 | BACKUPPOOL        | DISK              | 15.0 M             | 0.0      | On-Line       |



---

## Moving data belonging to a client node

You can move data in a sequential-access storage pool for one or more nodes, or for a single node with selected file spaces, using the **MOVE NODEDATA** command. The data can be in either a primary storage pool, copy storage pool, or active-data pool.

### About this task

When the source storage pool is a primary storage pool, you can move data to other volumes within the same pool or to another primary storage pool. When the source storage pool is a copy storage pool, data can only be moved to other volumes within that storage pool. When the source storage pool is an active-data pool, data can only be moved to other volumes within that same storage pool.

#### Tips:

- In addition to moving data from volumes in storage pools that have **NATIVE** or **NONBLOCK** data formats, you can also move data from volumes in storage pools that have **NDMP** data formats (**NETAPPDUMP**, **CELERRADUMP**, or **NDMPDUMP**). The target storage pool must have the same data format as the source storage pool.
- If you are moving files within the same storage pool, there must be volumes available that do not contain the data that you are moving. That is, the server cannot use a destination volume that contains data that needs to be moved.
- When you move data from volumes in an active-data pool, you have the option of reconstructing file aggregates during data movement. Reconstruction removes inactive backup files in the pool. Specifying no reconstruction prevents the inactive files from being removed.
- You cannot move node data into or out of a storage pool that is defined with a **CENTERA** device class.

| Task              | Required Privilege Class                           |
|-------------------|----------------------------------------------------|
| Move data by node | System, unrestricted storage or restricted storage |

## Moving data in all file spaces belonging to one or more nodes

Moving data for all file spaces on one or more nodes provides a number of benefits.

### About this task

Moving data is useful:

- When you want to optimize performance by reducing the number of volume mounts required during a restore operation by consolidating data for a specific node or nodes within a storage pool
- When you want to move data for specified nodes into a different storage pool
- When you want to increase performance of client restore processing by first moving data to a random-access storage pool

**Best practice:** Avoid movement of data into, out of, or within a storage pool while **MOVE NODEDATA** is concurrently processing data on the same storage pool.



To move all file spaces for a single node named ACCOUNTING where the data is in storage pool ACCTPOOL and the destination storage pool is BACKUPPOOL enter:

```
move nodedata accounting fromstgpool=acctpool tostgpool=backuppool
```

## Moving data in selected file spaces belonging to a single node

Moving data for selected file spaces for one node provides a number of benefits.

### About this task

Moving data is useful:

- When you want to optimize performance by reducing the number of volume mounts required during a restore operation by consolidating data for specific file spaces within a storage pool.
- When you want to consolidate data for critical file spaces allowing restore of these files to be given higher priority during recovery situations. This would be advantageous during data recovery when it is essential to first restore only business-critical data and then restore non-business-critical data.
- When you want to move specific file spaces into a different storage pool.
- When you want to increase performance of client restore processing by first moving data to a random-access storage pool.

For example, consider moving data for a single node and restricting the data movement to files in a specific non-Unicode file space (for this example, \\eng\e\$) as well as a specific Unicode file space (for this example, \\eng\d\$ ). The node name owning the data is ENGINEERING and it currently has data stored in the ENGPPOOL storage pool. After the move is complete, the data is located in the destination storage pool BACKUPPOOL. To move the data enter the following:

```
move nodedata engineering fromstgpool=engpool
tostgpool=backuppool filespace=\\eng\e$ unifiespace=\\eng\d$
```

Another example is to move data for a single node named MARKETING from all primary sequential-access storage pools to a random-access storage pool named DISKPOOL. First obtain a list of storage pools that contain data for node MARKETING, issue either:

```
query occupancy marketing
```

or

```
SELECT * from OCCUPANCY where node_name='MARKETING';
```

For this example the list of resulting storage pool names all begin with the characters FALLPLAN. To move the data repeat the following command for every instance of FALLPLAN. The following example displays the command for FALLPLAN3:

```
move nodedata marketing fromstgpool=fallplan3
tostgpool=diskpool
```

A final example shows moving both non-Unicode and Unicode file spaces for a node. For node NOAH move non-Unicode file space \\servtuc\d\$ and Unicode file space \\tsmserv1\e\$ that has a file space ID of 2 from sequential-access storage pool TAPEPOOL to random-access storage pool DISKPOOL.

```
move nodedata noah fromstgpool=tapepool tostgpool=diskpool
 filepath=\\servtuc\d$ fsid=2
```

## Obtaining information about data-movement processes

You can query the server for statistics about the data movement for a client node.

### About this task

To request information on the data movement process, enter:

query process

Figure 66 shows an example of the report that you receive about the data movement process.

| Process Number | Process Description | Status                                                                                                                                                                                                                                  |
|----------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3              | Move Node Data      | Storage Pool 3590FC, Target Pool 3590FC Files Moved: 0, Bytes Moved: 0, Unreadable Files: 0, Unreadable Bytes: 0. Current Physical File (bytes): 268,468,584<br><br>Current input volume: DST308.<br><br>Current output volume: DST279. |

Figure 66. Information on the data movement process

## Troubleshooting incomplete data-movement operations

There are several reasons why an operation to move node data might not complete.

### About this task

The most common reasons are:

- Files are marked as damaged in the source storage pool. For more information about how to work with files that are marked as damaged, see “Fixing damaged files” on page 921.
- Files in the source storage pool reside on volumes whose access mode is offsite, destroyed, or unavailable. To complete the move operation, bring the volumes onsite, restore destroyed volumes from a copy storage pool or an active-data pool, or make the volumes available.
- Files were moved, added, or deleted during the move operation. To prevent this situation, avoid the following operations during move processing:
  - Migration of any type relating to the storage pool
  - Reclamation of volumes within the storage pool
  - Simultaneously running MOVE DATA processing for a volume in a storage pool that contains data to be moved during MOVE NODEDATA processing

- Backup operations into a copy storage pool or an active-data pool while a **MOVE NODEDATA** is running for that pool
- Storage of files from a client directly into the storage pool

**Note:** If you run the **MOVE DATA** command on an offsite volume that contains collocated data, it might be necessary to issue the **MOVE DATA** command multiple times to move all of the data out of the volume. Each **MOVE DATA** command moves the data for a single collocation group.

---

## Renaming storage pools

When you distribute policy using enterprise configuration, you might need to rename a storage pool. Renaming a storage pool can require changing the destination storage pool in copy groups and management classes.

### Procedure

To rename a storage pool, issue the **RENAME STGPOOL** command.

When you rename a storage pool, any administrators with restricted storage privilege for the storage pool automatically have restricted storage privilege to the storage pool under the new name. If the renamed storage pool is in a storage pool hierarchy, the hierarchy is preserved.

Copy groups and management classes might contain a storage pool name as a destination. If you rename a storage pool that is used as a destination, the destination in a copy group or management class is not changed to the new name of the storage pool. To continue to use the policy with the renamed storage pool as a destination, you must change the destination in the copy groups and management classes. You then activate the policy set with the changed destinations.

For information about setting up a managed server in an enterprise configuration, see “Setting up a managed server” on page 699.

---

## Defining copy storage pools and active-data pools

Use a copy storage pool or an active-data pool to back up one or more primary storage pools. When you define copy storage pools or active-data pools, you can take advantage of various Tivoli Storage Manager functions by specifying certain properties.

### About this task

To define a copy storage pool, issue the **DEFINE STGPOOL** command and specify **POOLTYPE=COPY**. To define an active-data pool, issue the **DEFINE STGPOOL** command and specify **POOLTYPE=ACTIVEDATA**. When you define a copy storage pool or an active-data pool, be prepared to provide some or all of the information in Table 37 on page 423.

#### Remember:

1. To back up a primary storage pool to an active-data pool, the data format must be **NATIVE** or **NONBLOCK**. You can back up a primary storage pool to a copy storage pool using **NATIVE**, **NONBLOCK**, or any of the **NDMP** formats. The target storage pool must have the same data format as the source storage pool.
2. You cannot define copy storage pools or active-data pools for a Centera device class.

Table 37. Information for defining copy storage pools and active-data pools

| Information                       | Explanation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device class                      | Specifies the name of the device class assigned for the storage pool. This is a required parameter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Pool type                         | Specifies that you want to define a copy storage pool or an active-data pool. This is a required parameter. You cannot change the pool type when updating a storage pool.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Access mode                       | <p>Defines access to volumes in the storage pool for user operations (such as backup and restore) and system operations (such as reclamation). Possible values are:</p> <p><b>Read/Write</b><br/>User and system operations can read from or write to the volumes.</p> <p><b>Read-Only</b><br/>User operations can read from the volumes, but not write. However, system processes can move files within the volumes in the storage pool.</p> <p><b>Unavailable</b><br/>Specifies that users cannot access files stored on volumes in the copy storage pool or an active-data pool. Files can be moved from volume to volume with the same copy storage pool or from volume to volume within the same active-data pool, but no new writes are permitted to the volumes in the storage pool from volumes outside the storage pool.</p>                                                                                                                                                                                                                              |
| Maximum number of scratch volumes | <p>When you specify a value greater than zero, the server dynamically acquires scratch volumes when needed, up to this maximum number. This is a required parameter.</p> <p>For automated libraries, set this value equal to the physical capacity of the library. For details, see:<br/>“Adding scratch volumes to automated library devices” on page 152</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Collocation                       | When collocation is enabled, the server tries to keep all files on a minimal number of sequential-access storage volumes. The files can belong to a single client node, a group of client nodes, a client file space, or a group of file spaces. See “Collocation of copy storage pools and active-data pools” on page 379.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Reclamation threshold             | <p>Specifies when to initiate reclamation of volumes in the copy storage pool or active-data pool. Reclamation is a process that moves any remaining files from one volume to another volume, thus making the original volume available for reuse. A volume is eligible for reclamation when the percentage of unused space on the volume is greater than the reclaim parameter value.</p> <p>Reclamation processing works differently for off-site copy storage pool volumes, active-data pool volumes, and virtual volumes. When a copy storage pool volume or an active-data pool volume that is off-site becomes eligible for reclamation, the reclamation process tries to retrieve the files on the reclaimable volume from a primary or copy storage pool volume that is onsite. The process then writes these files to an available volume in the original copy storage pool or active-data pool. See “Reclaiming copy storage pools and active-data pools” on page 387 and “Controlling reclamation of virtual volumes” on page 386 for more details.</p> |

*Table 37. Information for defining copy storage pools and active-data pools (continued)*

| Information            | Explanation                                                                                                                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reuse delay period     | Specifies the number of days that must elapse after all of the files have been deleted from a volume before the volume can be rewritten or returned to the scratch pool. See “Delayed reuse of reclaimed volumes” on page 391. |
| Off-site reclaim limit | Specifies the number of off-site volumes to be reclaimed during reclamation for a storage pool. See “Reclamation of offsite volumes” on page 388.                                                                              |
| Reclamation processes  | Specifies the number of concurrent processes to use for reclaiming the volumes in a storage pool. See “Reclaiming copy storage pools and active-data pools” on page 387.                                                       |

For more information, see “Backing up primary storage pools” on page 908.

## Example: Defining a copy storage pool

Copies of the files are stored in the Tivoli Storage Manager default disk storage pools for disaster recovery purposes. You create a copy storage pool and decide to use only scratch tapes in the new pool.

### About this task

Assume you need to maintain copies of the files stored in BACKUPPOOL, ARCHIVEPOOL, and SPACEMGPOOL (default disk storage pools) for disaster recovery purposes. You want to create a copy storage pool named DISASTER-RECOVERY. You decide to use only scratch tapes in the new pool, setting the maximum number of scratch volumes to an appropriate value. You enter the following command:

```
define stgpool disaster-recovery tapeclass pooltype=copy
maxscratch=100
```

To store data in the new storage pool, you must back up the primary storage pools (BACKUPPOOL, ARCHIVEPOOL, and SPACEMGPOOL) to the DISASTER-RECOVERY pool. See “Backing up primary storage pools” on page 908.

## Properties of primary, copy, and active-data pools

Primary-storage pools, copy-storage pools, and active-data pools have different properties. Understanding these differences helps you make the most efficient use of storage space.

Table 38 compares the characteristics of primary, copy-storage, and active-data pools.

*Table 38. Comparing primary-storage pools, copy-storage pools, and active-data pools*

| Characteristic                                                                           | Primary-storage pool | Copy-storage pool | Active-data pool |
|------------------------------------------------------------------------------------------|----------------------|-------------------|------------------|
| Destination for backed-up or archived files (specified in backup or archive copy groups) | Yes                  | No                | No               |
| Destination for space-managed files (specified in the management class)                  | Yes                  | No                | No               |

Table 38. Comparing primary-storage pools, copy-storage pools, and active-data pools (continued)

| Characteristic                    | Primary-storage pool                                                 | Copy-storage pool                                                                                                                                                                                                                                                                                    | Active-data pool                                                                                                                                                                                                                                                                                     |
|-----------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Off-site access mode for volumes  | No                                                                   | Yes, except for volumes with device type SERVER                                                                                                                                                                                                                                                      | Yes, except for volumes with device type SERVER                                                                                                                                                                                                                                                      |
| Destroyed access mode for volumes | Yes                                                                  | No                                                                                                                                                                                                                                                                                                   | No                                                                                                                                                                                                                                                                                                   |
| Random-access storage volumes     | Yes                                                                  | No                                                                                                                                                                                                                                                                                                   | No                                                                                                                                                                                                                                                                                                   |
| Sequential-access storage volumes | Yes                                                                  | Yes                                                                                                                                                                                                                                                                                                  | Yes                                                                                                                                                                                                                                                                                                  |
| Contents                          | Client files (backup versions, archived files, space-managed files)  | Copies of files that are stored in primary storage pools                                                                                                                                                                                                                                             | Active-only versions of client backup files that are stored in primary storage pools. Archive data and space-managed files are not permitted.                                                                                                                                                        |
| Moving data allowed               | Within the same primary-storage pool, or to any primary-storage pool | <p>Within the same storage pool only.</p> <ul style="list-style-type: none"> <li>• If moving data by volume and volumes are off-site, data is copied from the original files in primary-storage pools.</li> <li>• If volumes are off-site, you cannot move data in those volumes by node.</li> </ul> | <p>Within the same storage pool only.</p> <ul style="list-style-type: none"> <li>• If moving data by volume and volumes are off-site, data is copied from the original files in primary-storage pools.</li> <li>• If volumes are off-site, you cannot move data in those volumes by node.</li> </ul> |
| Collocation                       | Yes (sequential-access storage pools only)                           | Yes                                                                                                                                                                                                                                                                                                  | Yes                                                                                                                                                                                                                                                                                                  |
| Reclamation                       | Yes (sequential-access storage pools only)                           | <p>Yes</p> <p>Virtual volumes (volumes with device type SERVER) and off-site volumes are handled differently. For details, see “Controlling reclamation of virtual volumes” on page 386 and “Reclamation of offsite volumes” on page 388.</p>                                                        | <p>Yes</p> <p>Virtual volumes (volumes with device type SERVER) and off-site volumes are handled differently. For details, see “Controlling reclamation of virtual volumes” on page 386 and “Reclamation of offsite volumes” on page 388.</p>                                                        |

Table 38. Comparing primary-storage pools, copy-storage pools, and active-data pools (continued)

| Characteristic | Primary-storage pool                                                                                                                                                                                                                                                                                                                                                                                                           | Copy-storage pool                                                                                                                                                                                                                                                                                                                                                                                                           | Active-data pool                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| File deletion  | <p>Files are deleted:</p> <ul style="list-style-type: none"> <li>• During inventory expiration processing, if the files have expired</li> <li>• When a file space is deleted</li> <li>• When a volume is deleted with the option to discard the data</li> <li>• When a primary-storage pool volume is audited with the FIX=YES option, if the files on the volume are damaged and no other copies of the file exist</li> </ul> | <p>Files are deleted:</p> <ul style="list-style-type: none"> <li>• Whenever the primary-copy of the file is deleted from the primary-storage pool (because of expiration, file space deletion, or volume deletion)</li> <li>• When a volume is deleted with the option to discard the data</li> <li>• When a copy-storage pool volume is audited with the FIX=YES option, if the files on the volume are damaged</li> </ul> | <p>Files are deleted:</p> <ul style="list-style-type: none"> <li>• During reclamation when inactive backup files are removed</li> <li>• Whenever the primary copy of the file is deleted from the primary-storage pool (because of expiration, file space deletion, or volume deletion)</li> <li>• When a volume is deleted with the option to discard the data</li> <li>• When an active-data pool volume is audited with the FIX=YES option, if the files on the volume are damaged</li> </ul> |

## Copying active versions of client backup data to active-data pools

To copy active versions of client backup files from primary storage pools to active-data pools, you can issue the **COPY ACTIVATEDATA** command or you can use the simultaneous-write function. The simultaneous-write function automatically writes active backup data to active-data pools at the same time that the backup data is written to a primary storage pool.

### About this task

You can issue the **COPY ACTIVATEDATA** command either manually or in an administrative schedule or maintenance script.

Regardless whether you use the **COPY ACTIVATEDATA** command or the simultaneous-write function, the Tivoli Storage Manager server writes data to an active-data pool only if the data belongs to a node that is a member of a policy domain that specifies the active-data pool as the destination for active data.

**Restriction:** You cannot use the **BACKUP STGPOOL** command for active-data pools.

## Selection for active file versions

The Tivoli Storage Manager uses a search order to locate active file versions.

During client sessions and processes that require active file versions, the Tivoli Storage Manager server searches certain types of storage pools, if they exist.

1. An active-data pool that is associated with a FILE device class
2. A random-access disk (DISK) storage pool
3. A primary or copy storage pool that is associated with a FILE device class
4. A primary, copy, or active-data pool that is associated with onsite or offsite removable tape media

Even though the list implies a selection order, the server might select a volume with an active file version from a storage pool lower in the order if a volume higher in the order cannot be accessed because of the requirements of the session or process, volume availability, or contention for resources such as mount points, drives, and data.

---

## Deleting storage pools

Before deleting a storage pool, you need to take certain precautions to prevent data loss and to ensure uninterrupted storage operations.

### About this task

| Task                 | Required Privilege Class |
|----------------------|--------------------------|
| Delete storage pools | System                   |

Before you delete a storage pool, ensure that:

- All volumes within the storage pool have been deleted  
Ensure that you have saved any readable data that you want to preserve by issuing the MOVE DATA command. Moving all of the data that you want to preserve may require you to issue the MOVE DATA command several times.  
Before you begin deleting all volumes that belong to the storage pool, change the access mode of the storage pool to unavailable so that no files can be written to or read from volumes in the storage pool.  
See “Deleting storage pool volumes that contain data” on page 429 for information about deleting volumes.
- The storage pool is not identified as the next storage pool within the storage hierarchy  
To determine whether this storage pool is referenced as the next storage pool within the storage hierarchy, query for storage pool information as described in “Monitoring space available in a storage pool” on page 394.  
Update any storage pool definitions to remove this storage pool from the storage hierarchy by performing one of the following:
  - Naming another storage pool as the next storage pool in the storage hierarchy
  - Entering the value for the NEXTSTGPOOL parameter as "" (double quotation marks) to remove this storage pool from the storage hierarchy definitionSee “Defining storage pools” on page 257 for information about defining and updating storage pools.
- The storage pool to be deleted is not specified as the destination for any copy group in any management class within the active policy set of any domain. Also, a storage pool to be deleted cannot be the destination for space-managed files (specified in any management class within the active policy set of any domain). If this pool is a destination and the pool is deleted, operations fail because there is no storage space to store the data.

To delete a storage pool, issue the DELETE STGPOOL command.



---

## Deleting storage pool volumes

You can delete empty storage pool volumes or volumes that contain data from primary storage pools, copy storage pools, or active-data pools. You can also delete the client files that those volumes contain.

### About this task

If files that are not cached are deleted from a primary storage pool volume, any copies of these files in copy storage pools and active-data pools are deleted.

Files in a copy storage pool or an active-data pool are never deleted unless the following conditions apply:

- Data retention is off, or the files have met their retention criterion.
- The volume that contains the copy file is deleted by using the DISCARDATA=YES option.
- A read error is detected by using the **AUDIT VOLUME** command with the FIX=YES option for a copy storage pool volume or an active-data pool volume.
- The primary file is deleted due to policy-based file expiration or file space deletion, or because the primary storage pool volume is deleted.

You cannot delete a CENTERA volume if the data in the volume was stored by using a server with retention protection enabled and if the data is not expired.

#### Restrictions:

- To delete many volumes, delete the volumes one at a time. If you concurrently delete many volumes, server performance can be affected.
- When you issue the **AUDIT VOLUME** command, only the storage pool volume is audited. When you issue the **AUDIT LIBVOLUME** command, the entire physical tape volume is audited. For example, assume that the storage pool volume and the tape volume both contain a damaged file which is named X that is on volume Y. If the X file is deleted from the storage pool, and you issue the **AUDIT VOLUME** command on volume Y, the command would not detect the damaged data. However, if you issue the **AUDIT LIBVOLUME** command, it detects the damaged data on volume Y.

| Task                                                                    | Required Privilege Class       |
|-------------------------------------------------------------------------|--------------------------------|
| Delete volumes from any storage pool                                    | System or unrestricted storage |
| Delete volumes from storage pools over which the volumes have authority | Restricted storage             |

## Deleting empty storage pool volumes

Use the DELETE VOLUME command to delete empty volumes. Before deleting a volume, the server issues a confirmation message.

### About this task

You can delete empty storage pool volumes. For example, to delete an empty volume named WREN03, enter:

```
delete volume wren03
```

On an administrative client, you will receive the following confirmation messages, unless the client is running with the NOCONFIRM option:

```
ANR2200W This command will delete volume WREN03
 from its storage pool after verifying that the volume
 contains no data.
 Do you wish to proceed? (Y/N)
```

Volumes in a shred pool (DISK pools only) are not deleted until shredding is completed. See “Securing sensitive client data” on page 529 for more information.

After you respond yes, the server generates a background process to delete the volume.

The command can be run in the foreground on an administrative client by issuing the command with the WAIT=YES parameter.

## Deleting storage pool volumes that contain data

To prevent accidental deletion of backed-up, archived, or space-managed files, the server does not allow you to delete a volume that contains user data unless you specify DISCARDATA=YES on the **DELETE VOLUME** command. After all files are deleted from the volume, the server deletes the volume from the storage pool.

### About this task

1. The Tivoli Storage Manager server will not delete archive files that are on deletion hold.
2. If archive retention protection is enabled, the Tivoli Storage Manager server will delete only archive files whose retention period has expired.
3. Volumes in a shred pool (DISK pools only) are not deleted until the data on it is shredded.

For example, to discard all data from volume WREN03 and delete the volume from its storage pool, enter:

```
delete volume wren03 discarddata=yes
```

The server generates a background process and deletes data in a series of batch database transactions. After all files have been deleted from the volume, the server deletes the volume from the storage pool. If the volume deletion process is canceled or if a system failure occurs, the volume might still contain data. Reissue the **DELETE VOLUME** command and explicitly request the server to discard the remaining files on the volume.

To delete a volume but not the files it contains, move the files to another volume.

**Residual data:** Even after you move data, residual data may remain on the volume because of I/O errors or because of files that were previously marked as damaged. (Tivoli Storage Manager does not move files that are marked as damaged.) To delete any volume that contains residual data that cannot be moved, you must explicitly specify that files should be discarded from the volume.

### Related concepts:

“Securing sensitive client data” on page 529

### Related tasks:

“Moving data from one volume to another volume” on page 413



---

## Part 3. Managing client operations

Installations of Tivoli Storage Manager typically include Backup-Archive Clients, Tivoli Storage Manager for Space Management (HSM clients), and application clients. You must register these clients with the server. Other priorities include managing their access to the server, managing client data, and scheduling operations such as backing up and archiving.



---

## Chapter 11. Adding client nodes

When adding client nodes, the server views its registered clients as nodes that require services and resources from the server.

When the Tivoli Storage Manager server is installed, the Tivoli Storage Manager backup-archive client and the administrative client are installed on the same server by default. However, many installations of Tivoli Storage Manager include remote clients, and application clients on other servers, often running on different operating systems.

The term “nodes” indicate the following type of clients and servers that you can register as client nodes:

- Tivoli Storage Manager backup-archive clients
- Tivoli Storage Manager application clients, such as Tivoli Storage Manager for Mail clients
- Tivoli Storage Manager for Space Management (HSM client)
- Tivoli Storage Manager source server registered as a node on a target server
- Network-attached storage (NAS) file server using NDMP support

Each node must be registered with the server and requires an option file with a pointer to the server.

For details on many of the topics in this chapter, refer to the *Backup-Archive Clients Installation and User's Guide*.

### **Related concepts:**

“Accepting default closed registration or enabling open registration” on page 435

“Overview of clients and servers as nodes”

### **Related tasks:**

“Installing client node software” on page 434

“Registering nodes with the server” on page 434

### **Related reference:**

“Connecting nodes with the server” on page 439

“Comparing network-attached nodes to local nodes” on page 441

---

## Overview of clients and servers as nodes

Each backup-archive client, Tivoli Storage Manager for Space Management (HSM client), application client, and source server is given a node name when it is registered as a node with the Tivoli Storage Manager server. The server considers each as a node that requires services and resources from the server.

Typically a node is equivalent to a server, as in the case of a backup-archive client that is installed on a user's computer for file system backups. However, multiple nodes can exist on a single server. For example, a Structured Query Language (SQL) server can contain both a Tivoli Storage Manager for SQL server application client for database and transaction log backups, and a Tivoli Storage Manager backup-archive client for file system backups.

---

## Installing client node software

Administrators can install backup-archive clients, application clients, or Tivoli Storage Manager for Space Management clients by using three different methods.

### About this task

The following are the methods for installing client node software:

- Install directly from the CD
- Transfer installable files from the CD to a target server
- Create client software images and install the images

You can also install by using the silent installation technique.

For more information about installing:

- Client software, refer to the *Backup-Archive Clients Installation and User's Guide*.
- System Storage Archive Manager application client software, refer to the application client documentation for your particular client.
- Tivoli Storage Manager application client software, refer to the application client documentation for your particular client.

Use the related procedures to configure a node after it is installed.

---

## Registering nodes with the server

Administrators can register Tivoli Storage Manager clients, application clients, and Tivoli Storage Manager for Space Management (HSM clients) as client nodes.

### About this task

When a node is registered, Tivoli Storage Manager automatically creates an administrative user ID with client owner authority over the node. You can use this administrative user ID to access the Web backup-archive client from remote locations through a Web browser. If an administrative user ID already exists with the same name, an administrative user ID is not automatically defined.

**Tip:** You can connect to a Web backup-archive client directly from a supported Web browser or from a hyperlink in the Web administrative Enterprise Console. To do so, specify the node's URL and port number during the registration process or update the node later with this information.

#### Related concepts:

"Overview of remote access to web backup-archive clients" on page 455

## Accepting default closed registration or enabling open registration

Before a user can request Tivoli Storage Manager services, the node must be registered with the server.

The administrator must register client nodes with the server when registration is set to closed. Closed registration is the default.

Windows users can also use the Minimal Configuration option in the Initial Configuration Task List.

Open registration allows the client nodes to register their node names, passwords, and compression options. On UNIX and Linux systems, only the root user can register a client node with the server.

With either registration mode, by default, an administrative user ID with client owner authority is created over the node.

**Important:** Changes to the registration process do not affect existing registered client nodes.

### Adding nodes with closed registration

To add a node with closed registration, an administrator can issue the **REGISTER NODE** command to register the node and specify the initial password.

#### About this task

The administrator can also specify the following optional parameters:

- Contact information.
- The name of the policy domain to which the node is assigned.
- Whether the node compresses its files before sending them to the server for backup and archive.
- Whether the node can delete backups and archives from server storage.
- The name of a client option set to be used by the node.
- Whether to force a node to change or reset the password.
- The type of node being registered.
- The URL address used to administer the client node.
- The maximum number of mount points the node can use.
- Whether the client node keeps a mount point for an entire session.
- The transfer path used when the node sends data.
- The transfer path used when data is read for a client.
- Whether the server or client node initiates sessions.
- The IP address of the node.
- The low level address of the node.



## Adding nodes with open registration

The server prompts the user, on their first attempt to connect to the server, for a node name, password, and contact information. That information is added to a node during open registration.

### About this task

With open registration, the server automatically assigns the node to the STANDARD policy domain. The server, by default, allows users to delete archive copies, but not backups in server storage. Nodes are created with the default authentication method that is defined on the server. Nodes are registered with the default authentication method if it is defined on the server with the **SET DEFAULTAUTHENTICATION** command. The default is LOCAL.

### Procedure

1. Enable open registration by entering the following command from an administrative client command line:

```
set registration open
```

For examples and a list of open registration defaults, see the *Administrator's Reference*.

2. To change the defaults for a registered node, issue the **UPDATE NODE** command.

## Node compression considerations

When you enable compression, it reduces network utilization and saves server storage, but causes additional central processing unit (CPU) overhead to the node. Data compression is recommended only when there is insufficient network capacity.

### About this task

To optimize performance or to ease memory constraints at the workstation, an administrator can restrict file compression. You can select one of three options:

- Compress files.
- Do not compress files.
- Use the value set in the COMPRESSION option.

Set the COMPRESSION option in the client system options file or in the API configuration file.

On a UNIX or a Linux system, a root user can define the COMPRESSION option in the dsm.opt client options file.

**Remember:** Use either client compression or drive compression, but not both.

### Related concepts:

“Data compression” on page 217

## Registering nodes with client options sets

Administrators can use client options sets in conjunction with the client options file to register nodes with the server.

### About this task

Client option sets are considered advanced implementation.

### Procedure

Specify an option set for a node when you register or update the node. Issue the following example command:

```
register node mike pass2eng cloptset=engbackup
```

The client node MIKE is registered with the password pass2eng. When the client node MIKE performs a scheduling operation, the schedule log entries are kept for 5 days.

#### Related reference:

“Managing client option files” on page 473

## Registering a network-attached storage file server as a node

To include a network-attached storage (NAS) file server as a node that Tivoli Storage Manager can back up and restore with NDMP (network data management protocol) operations, you can register the file server as a NAS node. Data that is backed up from the NAS file server will be associated with the NAS node name.

### About this task

The **REGISTER NODE** and **UPDATE NODE** commands have a default parameter of **TYPE=CLIENT**.

### Procedure

To register a NAS file server as a node, specify the **TYPE=NAS** parameter. Issue the following command, which is an example, to register a NAS file server with a node name of NASXYZ and a password of PW4PW:

```
register node nasxyz pw4pw type=nas
```

You must use this same node name when you later define the corresponding data mover name.

#### Related reference:

Chapter 9, “Using NDMP for operations with NAS file servers,” on page 219

## Registering a source server as a node on a target server

A virtual volume is a volume that appears to be a sequential media volume on a source server. The volume is actually stored as an archive file on a target server.

### About this task

To use virtual volumes, register the source server as a client node on the target server.

The **REGISTER NODE** and **UPDATE NODE** commands have a default parameter of **TYPE=CLIENT**.

### Procedure

Register a source server as a node. Specify the **TYPE=SERVER** parameter.

#### Related tasks:

“Storing data on another server as virtual volumes” on page 726

## Registering an API to the server

Workstation users can request IBM Tivoli Storage Manager services by using an application that uses the Tivoli Storage Manager application programming interface (API).

An administrator can issue the **REGISTER NODE** command to register the workstation as a node.

### Setting the compression option

There are several ways to determine the compression for applications that use the IBM Tivoli Storage Manager application programming interface (API).

You can determine the compression by using one of the following methods:

- An administrator during registration who can:
  - Require that files are compressed
  - Restrict the client from compressing files
  - Allow the application user or the client user to determine the compression status
- The client options file. If an administrator does not set compression on or off, Tivoli Storage Manager checks the compression status that is set in the client options file. The client options file is required, but the API user configuration file is optional.
- One of the object attributes. When an application sends an object to the server, some object attributes can be specified. One of the object attributes is a flag that indicates whether or not the data has already been compressed. If the application turns this flag on during either a backup or an archive operation, then Tivoli Storage Manager does not compress the data a second time. This process overrides what the administrator sets during registration.

For more information on setting options for the API and on controlling compression, see *IBM Tivoli Storage Manager Using the Application Program Interface*

## Setting the file deletion option

An administrator can set the file deletion option for applications that use the Tivoli Storage Manager application programming interface (API).

The administrator who sets the file deletion option can use the following methods:

- An administrator during registration  
If an administrator does not allow file deletion, then an administrator must delete objects or file spaces that are associated with the workstation from server storage.  
If an administrator allows file deletion, then Tivoli Storage Manager checks the client options file.
- An application using the Tivoli Storage Manager API deletion program calls  
If the application uses the `dsmDeleteObj` or `dsmDeleteFS` program call, then objects or files are marked for deletion when the application is executed.

---

## Connecting nodes with the server

The client options file connects each node to the server. Administrators and users on all platforms can modify their client options file (`dsm.opt`) with a text editor. Client options files can be updated differently across platforms.

On the Windows platform, you can use a wizard to work with the client options file.

**Important:** If any changes are made to the `dsm.opt` file, the client must be restarted for changes in the options file to have any affect.

The client options file `dsm.opt` is located in the client, application client, or host server directory. If the file does not exist, copy the `dsm.smp` file. Users and administrators can edit the client options file to specify:

- The network address of the server
- The communication protocol
- Backup and archive options
- Space management options
- Scheduling options

**Related concepts:**

“Creating or updating a client options file” on page 440

## Required client options

Each node requires a client options file. Each client options file must contain the network address of the IBM Tivoli Storage Manager server and other communication options that allow the node to communicate with the server.

Figure 67 on page 440 shows the contents of a client options file that is configured to connect to the server using TCP/IP. The communication options that are specified in the client options file satisfy the minimum requirements for the node to connect to the server.

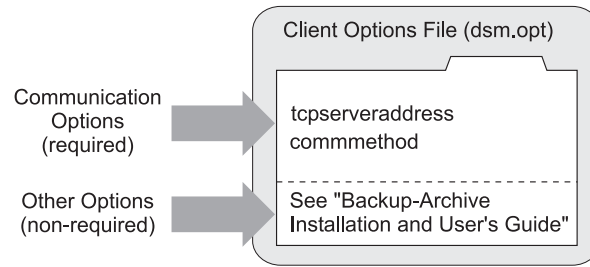


Figure 67. Client options file

Many non-required options are available that can be set at any time. These options control the behavior of Tivoli Storage Manager processing.

Refer to the *Backup-Archive Clients Installation and User's Guide* for more information about non-required client options.

**Related concepts:**

"Creating or updating a client options file"

## UNIX and Linux client options

For UNIX and Linux, client options are located in the client systems options file, client user options file, and the include-exclude options file.

Clients on other platforms use a single options file.

---

## Updating the password for scheduling operations

Administrators can determine passwords when they register the nodes.

For nodes and host servers that run Windows, one more step is required. Administrators must update passwords by using the IBM Tivoli Storage Manager Scheduler Configuration Utility (DSMCUTIL). This utility allows administrators to store Tivoli Storage Manager passwords in the Windows registry. After a password is stored in the registry, the scheduler can run as a protected account under its own authority. If the password expires, Tivoli Storage Manager automatically generates a new password. To specify that the server provide a new password if the current password expires, remove the asterisk from the following line in the client options file: \* passwordaccess generate.

---

## Creating or updating a client options file

Creating or updating client options files depends on the client platform. You might use a text editor, the client configuration wizard, or the client options file wizard.

## Using a text editor to create or configure a client options file

All options files (dsm.opt) can be edited with a text editor. Anyone can edit the client options file if they have access to the directory where the node software is installed.

Editing individual options files is the most direct method, but may not be suitable for sites with many client nodes.

## Using the client configuration wizard to create or update a client options file

When a local backup-archive client GUI starts initially and Tivoli Storage Manager does not find an options file, a setup wizard guides the user through the configuration process.

From the backup-archive client GUI, the client can also display the setup wizard by selecting **Utilities > Setup Wizard**. The user can follow the panels in the setup wizard to browse Tivoli Storage Manager server information in the Active Directory. The user can determine which server to connect to and what communication protocol to use.

**Restriction:** This wizard is not available for the Web client.

---

## Comparing network-attached nodes to local nodes

A Tivoli Storage Manager environment can be either a server and client on the same server (stand-alone environment) or a server and network-attached clients (network environment).

The stand-alone environment of Tivoli Storage Manager consists of a backup-archive client and an administrative client on the same computer as the server. There is nothing more to do to connect the client. This is shown in Figure 68.

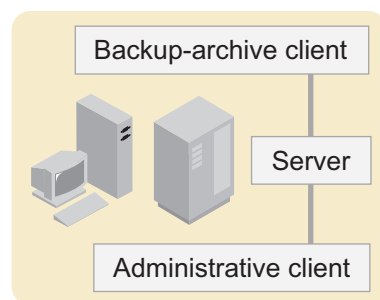


Figure 68. Stand-alone environment

Figure 69 on page 442 shows that a network environment Tivoli Storage Manager consists of a backup-archive client and an administrative client on the same computer as the server. However, network-attached client nodes can also connect to the server.

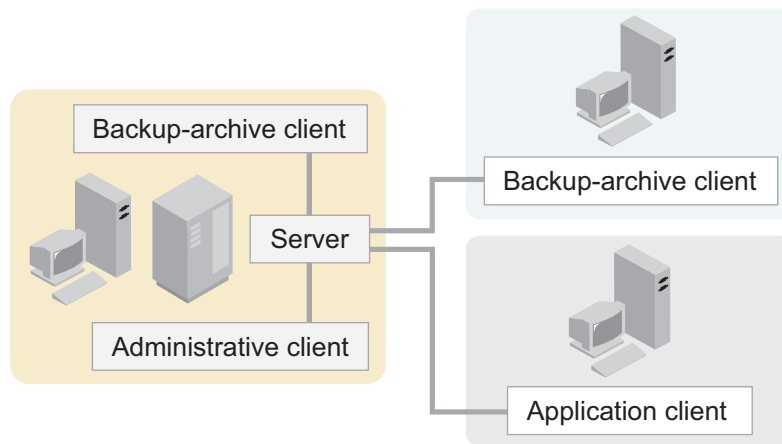


Figure 69. Network environment

Each client requires a client options file. A user can edit the client options file at the client node. The options file contains a default set of processing options that identify the server, communication method, backup and archive options, space management options, and scheduling options.

## Adding clients through the administrative command line client

The administrator can register nodes by issuing the **REGISTER NODE** command. For more information, refer to the *Administrator's Reference*.

### Enabling open registration

The default registration mode at installation is closed.

#### Procedure

To change the default to open so users can register their own client nodes, issue the following command:

```
set registration open
```

This is true unless you use the Minimal Configuration option.

### Example: registering three client nodes using the administrative command line

For this example, the goal is to register three workstations from the engineering department and assign them to the ENGPOLDOM policy domain.

#### About this task

Before you can assign client nodes to a policy domain, the policy domain must exist.

You want to let users delete backed up or archived files from storage pools. From an administrative client, you can use the macro facility to register more than one client node at a time.

## Procedure

1. Create a macro file named `REGENG.MAC`, that contains the following **REGISTER** **NODE** commands:

```
register node ssteiner choir contact='department 21'
domain=engpoldom archdelete=yes backdelete=yes
register node carolh skiing contact='department 21, second shift'
domain=engpoldom archdelete=yes backdelete=yes
register node mab guitar contact='department 21, third shift'
domain=engpoldom archdelete=yes backdelete=yes
```

2. Issue the **MACRO** command.

```
macro regeng.mac
```

For information on the **MACRO** command, see the *Administrator's Reference*.

### Related concepts:

Chapter 13, "Implementing policies for client data," on page 483





---

## Chapter 12. Managing client nodes

If you have already installed and configured your client nodes, you must be able to manage and control their access to the server.

The Tivoli Storage Manager server views its registered clients, application clients, and source servers as nodes. The term “client node” refers to the following type of clients and servers:

- Tivoli Storage Manager backup-archive clients
- Tivoli Storage Manager application clients, such as Tivoli Storage Manager for Mail clients
- Tivoli Storage Manager source servers registered as nodes on a target server
- Network-attached storage (NAS) file servers using network data management protocol (NDMP) support

**Related concepts:**

“Accepting default closed registration or enabling open registration” on page 435

“Overview of clients and servers as nodes” on page 433

**Related tasks:**

“Installing client node software” on page 434

“Registering nodes with the server” on page 434

**Related reference:**

“Connecting nodes with the server” on page 439

“Comparing network-attached nodes to local nodes” on page 441

---

## Managing nodes

From the perspective of the server, each client and application client is a node requiring IBM Tivoli Storage Manager services.

Client nodes can be local or remote to the server.

Administrators can perform the following activities when managing client nodes.

| Task                                                                                       | Required Privilege Class                                            |
|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Updating, renaming, locking, or unlocking any client nodes                                 | System or unrestricted policy                                       |
| Updating, renaming, locking, or unlocking client nodes assigned to specific policy domains | System, unrestricted policy, or restricted policy for those domains |
| Displaying information about client nodes or file spaces                                   | Any administrator                                                   |
| Deleting any client nodes                                                                  | System or unrestricted policy                                       |
| Removing client nodes assigned to specific policy domains                                  | System, unrestricted policy, or restricted policy for those domains |
| Managing client access authority levels                                                    | System                                                              |

**Related reference:**

“Defining client nodes and file spaces” on page 460

## Managing client nodes across a firewall

In most cases, the IBM Tivoli Storage Manager server and clients can work across a firewall or the server can securely manage client backup and restore operations and administrative functions across a firewall. Because every firewall is different, the firewall administrator might need to consult the instructions for the firewall software or hardware in use.

IBM Tivoli Storage Manager has two methods for enabling communication between the client and the server across a firewall: client-initiated communication and server-initiated communication. To allow either client-initiated or server-initiated communication across a firewall, client options must be set in concurrence with server parameters on the **REGISTER NODE** or **UPDATE NODE** commands. Enabling server-initiated communication overrides client-initiated communication, including client address information that the server may have previously gathered in server-prompted sessions.

**Attention:** A firewall should not be configured in a manner that causes terminations of sessions in use by either the server or the storage agent. When a firewall terminates a valid session, unpredictable problems can occur which make processes and sessions appear to stop due to communication input/output (I/O). Configuring IBM Tivoli Storage Manager components with known ports helps when you want to exclude IBM Tivoli Storage Manager sessions from timeout restrictions.

### Client-initiated sessions

You can enable clients to communicate with a server across a firewall by opening the TCP/IP port for the server and modifying the `dsmserv.opt` file.

#### Procedure

1. To enable clients to communicate with a server across a firewall, open the TCP/IP port for the server on the `TCPPORT` option in the `dsmserv.opt` file. The default TCP/IP port is 1500. When authentication is turned on, the information that is sent over the wire is encrypted.
2. To enable administrative clients to communicate with a server across a firewall, open the TCP/IP port for the server on the `TCPADMINPORT` option in the `dsmserv.opt` file. The default TCP/IP port is the `TCPPORT` value. When authentication is turned on, the information that is sent over the wire is encrypted. See the *Backup-Archive Clients Installation and User's Guide* for more information.

#### Results

1. If the `TCPADMINPORT` option is specified, sessions from clients without administration authority can be started on the `TCPPORT` port only. If the server `dsmserv.opt` specifies `TCPADMINPORT` that is different from the `TCPPORT` and sets `ADMINONCLIENTPORT` to `NO`, then administrative client sessions can be started on the `TCPADMINPORT` port only.
2. You can specify either IPv4 or IPv4/IPv6 in the `COMMMETHOD` option when you start the server, storage agent, client, or API application. The same port numbers are used by the server, storage agent, client, or API application for both IPv4 and IPv6.

IPv6 address formats are acceptable for all functions that support IPv6. However, if you use IPv6 addresses for functions that do not support IPv6, communications fail. The following functions do not support IPv6:

- Network data management protocol (NDMP): backing up and restoring storage pools, copying and moving data
- Automated cartridge system library software (ACSL)
- Simple network management protocol (SNMP)
- Centera device support
- Shared memory protocol
- Windows Microsoft Management Console functions
- Tivoli Enterprise Console<sup>®</sup> support

**Remember:** You can continue to use IPv4 address formats for the following functions:

- NDMP: backing up and restoring storage pools, copying and moving data
- ACSLS
- SNMP
- Centera device support
- Shared memory protocol
- Windows Microsoft Management Console functions

If you select the `CLIENTORSERVER` option of the **SESSIONINITIATION** server parameter, the client may start sessions with the server. Or, server-prompted scheduling may be used to prompt the client to connect to the server.

## Server-initiated sessions

To limit the start of backup-archive client sessions to the IBM Tivoli Storage Manager server, specify the **SESSIONINITIATION** parameter on the server. You must also synchronize the information in the client option file.

## About this task

In either the **REGISTER NODE** or **UPDATE NODE** command, select the `SERVERONLY` option of the **SESSIONINITIATION** parameter. Provide the **HLADDRESS** and **LLADDRESS** client node addresses. For example,

```
register node fran secretpw hladdress=9.11.521.125 lladdress=1501
sessioninitiation=serveronly
```

The **HLADDRESS** specifies the IP address of the client node, and is used whenever the server contacts the client. The **LLADDRESS** specifies the low level address of the client node and is used whenever the server contacts the client. The client node listens for sessions from the server on the **LLADDRESS** port number.

If `SESSIONINITIATION=SERVERONLY` for a node defined on the IBM Tivoli Storage Manager server, the client must have `SESSIONINITIATION=SERVERONLY` in its option file. In addition, the TCP/IP address of the client must correspond to the information supplied with the **HLADDRESS** server parameter. Finally, `TCPCLIENTPORT` in the client option file must correspond to the information supplied with the **LLADDRESS** server parameter, or the server will not know how to contact the client.

**Restriction:** Server-initiated sessions cannot utilize SSL (Secure Sockets Layer) or LDAP authenticated passwords.

**Note:**

1. If you switch from server-prompted to server-initiated sessions, the server will discard any addressing information it had and will use only the information from the **HLADDRESS** and **LLADDRESS** parameters of the **REGISTER NODE** and **UPDATE NODE** commands in contacting the client.
2. The server uses Domain Name System (DNS) to determine the name of client nodes. If your DNS is not correctly configured, there may be delays or failures in looking up names. The **DNSLOOKUP** option is available to restrict usage of DNS services. It can be changed dynamically through the **SETOPT DNSLOOKUP** command.
3. Server-initiated sessions cannot utilize SSL (Secure Sockets Layer) or LDAP authenticated passwords.

*Table 39. Server-Initiated sessions*

| Setting or parameter on the IBM Tivoli Storage Manager server: | Location on the IBM Tivoli Storage Manager server  | Must match this on the client: | Location on the client |
|----------------------------------------------------------------|----------------------------------------------------|--------------------------------|------------------------|
| SESSIONINITIATION=SERVERONLY                                   | <b>REGISTER NODE</b> or <b>UPDATE NODE</b> command | SESSIONINITIATION=SERVERONLY   | client option file     |
| <b>HLADDRESS</b>                                               | <b>REGISTER NODE</b> or <b>UPDATE NODE</b> command | TCP/IP address                 | TCP/IP address         |
| <b>LLADDRESS</b>                                               | <b>REGISTER NODE</b> or <b>UPDATE NODE</b> command | TCPCLIENTPORT                  | client option file     |

## Updating client node information

You can issue the **UPDATE NODE** command to update information such as the client's assigned policy domain, the user's password or contact information, and the client option set used by the node.

### Procedure

Update client node TOMC to prevent it from deleting archived files from storage pools by entering the following example command:

```
update node tomc archdelete=no
```

## Automatic deployment feature for the backup-archive client

The backup-archive client automatic deployment feature helps you schedule updates to one or more backup-archive clients. The updates can be fix packs or new releases.

You must have previously installed the backup-archive client in order to update to a new level or new release. You can use the Administration Center V6.3.4.300 with a Tivoli Storage Manager V7.1 or later server to automatically deploy backup-archive clients. Alternatively, you can manually set up automatic deployment on a Tivoli Storage Manager server by completing the steps in Technote 1673299 at: <http://www.ibm.com/support/docview.wss?uid=swg21673299>.

## Renaming client nodes

You can rename a client node by issuing the **RENAME NODE** command. You might need to rename a client node if the workstation network name or host name changes. For example, with UNIX and Linux clients, users define their node name based on the value returned by the **HOSTNAME** command.

### About this task

When users access the server, their IBM Tivoli Storage Manager user IDs match the host name of their workstations. If the host name changes, you can update a client node user ID to match the new host name.

### Procedure

To rename CAROLH to ENGNODE, issue the following example command:

```
rename node carolh engnode
```

ENGNODE retains the contact information and access to back up and archive data that belonged to CAROLH. All files backed up or archived by CAROLH now belong to ENGNODE.

### Results

If you rename a node that authenticates with an LDAP directory server, names for same-named nodes on other servers that share namespace are not renamed. You must issue a **RENAME** command for each node. If you want to keep the nodes in sync, change their name to match the new name. If you do not, the node on the other server can no longer authenticate with the LDAP directory server if you specify **SYNCLDAPDELETE=YES**.

### Rename all nodes *starship* that authenticate to LDAP directory servers

If you have a node that shares namespace on an LDAP directory server with other nodes, you can rename each node. The renaming must, however, be done on each server. For example, you can issue the following command on each server:

```
rename node starship moonship syncldapdelete=yes
```

The node *starship*, that authenticates to an LDAP directory server, changes their name to *moonship*. With **SYNCLDAPDELETE=YES**, the entry on the LDAP directory server changes to *moonship* and removes node *starship* from the LDAP server. Therefore, other servers cannot authenticate node *starship* with the LDAP server. You can register node *starship* with the LDAP server, or rename node *starship* to *moonship*.

## Locking and unlocking client nodes

You can prevent client nodes from accessing the server with the **LOCK NODE** command. This prevents client nodes from performing functions such as either backup and restore or archive and retrieve.

### About this task

You can restore a locked node's access to the server with the **UNLOCK NODE** command.

## Procedure

1. To prevent client node MAB from accessing the server, issue the following example command:  
`lock node mab`
2. To let client node MAB access the server again, issue the following example command:  
`unlock node mab`

### Related tasks:

“Disabling or enabling access to the server” on page 479

## Deleting client nodes

You can delete a client node from the server with the **REMOVE NODE** command. All file spaces that belong to the client node must first be deleted from server storage. After all of the client node's file spaces are deleted, you can delete the node.

### Before you begin

Before you can delete a network-attached storage (NAS) node, you must first delete any file spaces, then delete any defined paths for the data mover with the **DELETE PATH** command. Delete the corresponding data mover with the **DELETE DATAMOVER** command. Then you can issue the **REMOVE NODE** command to delete the NAS node.

## Procedure

Remove client node DEBBYG by completing the following example commands:

1. Issue the following command:  
`delete filespace debbyg * type=any`
2. To delete the DEBBYG node, issue the following command:  
`remove node debbyg`

### Related tasks:

“Deleting file spaces” on page 472

## Consolidating multiple clients under a single client node name

Backups of multiple nodes which share storage can be consolidated to a common target node name on the Tivoli Storage Manager server. For example, several nodes in an IBM General Parallel File System (GPFS™) cluster, NODE\_1, NODE\_2, and NODE\_3, can back up to the same node (NODE\_OLIV) on the server.

This is useful when the server responsible for performing the backup may change over time, such as with a cluster. Consolidating shared data from multiple servers under a single name space on the Tivoli Storage Manager server means that the directories and files can be easily found when restore operations are required. Backup time can be reduced and clustered configurations can store data with proxy node support. Client nodes can also be configured with proxy node authority to support many of the systems which support clustering failover.

By granting client nodes proxy node authority to another node, you gain the ability to backup, archive, migrate, restore, recall, and retrieve shared data on multiple clients under a single node name on the Tivoli Storage Manager server. When authorized as agent nodes, Tivoli Storage Manager nodes and Tivoli Storage Manager for Space Management (HSM) clients can be directed to backup or restore

data on behalf of another node (the target node).

## Distributing workloads to reduce backup and restore time

Concurrent operations can reduce backup and restore times in environments such as IBM General Parallel File System (GPFS). Conventional cluster backups are unable to do this with very large file systems because if a password is changed by the Tivoli Storage Manager server, it takes some time to communicate that change to all the nodes.

Administrators must then create scripts that change the passwords manually before they expire. Using proxy node support, it is possible to break up a large GPFS into smaller units for backup purposes and not have password coordination issues.

The following example shows how scheduling would work where workload is distributed, for example in the DB2 Universal Database Enterprise Extended Edition (EEE) environment. In this example, `NODE_A`, `NODE_B` and `NODE_C` all work together to back up this distributed environment, all acting on behalf of `NODE_Z`. `NODE_A` directs the backup for all three physical servers. `NODE_A` either has `ASNODENAME=NODE_Z` in its local options file or the server (through the **DEFINE SCHEDULE** command) has indicated that `NODE_A` needs to request proxy authority to `NODE_Z`. See the *Backup-Archive Clients Installation and User's Guide* for more information on the `ASNODENAME` client option.

An administrator can define the schedule that does a DB2 UDB EEE backup on behalf of `NODE_Z` by issuing the following command:

```
DEFINE SCHEDULE STANDARD BACKUP-SCHED ACTION=INCREMENTAL
OPTIONS='-ASNODENAME=NODE_Z'
```

Define the association of the schedule to the three nodes:

```
DEFINE ASSOCIATION STANDARD BACKUP-SCHED NODE_A
```

## Defining agent and target nodes

Target client nodes own data and agent nodes act on behalf of the target nodes. When granted proxy node authority to a target node, an agent node can perform backup and restore operations for the target node. Data that the agent node stores on behalf of the target node is stored under the target node's name in server storage.

Agent nodes are considered traditional nodes in that there is usually a one-to-one relationship between a traditional node and a physical server. A target node can be a logical entity, meaning no physical server corresponds to the node. Or, it can be a predefined node which corresponds to a physical server.

By using the **GRANT PROXYNODE** command, you can grant proxy node authority to all nodes sharing data in the cluster environment to access the target node on the Tivoli Storage Manager server. **QUERY PROXYNODE** displays the nodes to which a proxy node relationship was authorized. See the *Administrator's Reference* for more information about these commands.

Relationships between agent nodes and target nodes:

- A client node can be both an agent and a target at the same time. For example, `NODE_A` is an agent node for `NODE_Z`. `NODE_A` can also act as a target node for agent node `NODE_D`.
- Proxy node relationships can work conversely. For example, `NODE_A` can be an agent node for `NODE_Z`, and `NODE_Z` can be an agent node for `NODE_A`.



- Proxy node relationships cannot be inherited. For example, if NODE\_A is an agent for NODE\_X, and NODE\_X is an agent for NODE\_Z, NODE\_A is not automatically an agent for NODE\_Z.

Proxy node relationships will not be imported by default; however, the associations can be preserved by specifying the PROXYNODEASSOC option on the **IMPORT NODE** and **IMPORT SERVER** commands. Exporting to sequential media maintains proxy node relationships, but exporting to a server requires specifying the PROXYNODEASSOC option on **EXPORT NODE** and **EXPORT SERVER**.

**Important:**

- If a proxy node relationship is authorized for incompatible file spaces, there is a possibility of data loss or other corruption.
- Central command routing or importing of the **GRANT PROXYNODE** and **REVOKE PROXYNODE** commands can create access issues.
- The maximum number of mount points for agent nodes should be increased to allow parallel backup operations across the target nodes.

## Configuring shared access example

Shared access must be configured according to the nodes on the server and the relationships between the nodes.

### About this task

The following example shows how to set up proxy node authority for shared access. In the example, client agent nodes NODE\_1, NODE\_2, and NODE\_3 all share the same General Parallel File System (GPFS). Because the file space is so large, it is neither practical nor cost effective to back up this file system from a single client node. By using Tivoli Storage Manager proxy node support, the very large file system can be backed up by the three agent nodes for the target NODE\_GPFS. The backup effort is divided among the three nodes. The end result is that NODE\_GPFS has a backup from a given point in time.

All settings used in the proxy node session are determined by the definitions of the target node, in this case NODE\_GPFS. For example, any settings for DATAWRITEPATH or DATAREADPATH are determined by the target node, not the agent nodes (NODE\_1, NODE\_2, NODE\_3).

Assume that NODE\_1, NODE\_2 and NODE\_3 each need to execute an incremental backup and store all the information under NODE\_GPFS on the server.

### Procedure

Perform the following steps to set up a proxy node authority for shared access:

1. Define four nodes on the server: NODE\_1, NODE\_2, NODE\_3, and NODE\_GPFS. Issue the following commands:
 

```
register node node_1 mysecretpa5s
register node node_2 mysecret9pas
register node node_3 mypass1secret
register node node_gpfs myhiddp3as
```
2. Define a proxy node relationship among the nodes by issuing the following commands:
 

```
grant proxynode target=node_gpfs agent=node_1,node_2,node_3
```

3. Define the node name and asnode name for each of the servers in the respective `dsm.sys` files. See the *Backup-Archive Clients Installation and User's Guide* for more information on the `NODENAME` and `ASNODENAME` client options. Issue the following commands:

```
nodename node_1
asnodename node_gpfs
```

4. Optionally, define a schedule:

```
define schedule standard gpfs-sched action=macro options="gpfs_script"
```

5. Assign a schedule to each client node by issuing the following commands:

```
define association standard gpfs-sched node_1
define association standard gpfs-sched node_2
define association standard gpfs-sched node_3
```

6. Execute the schedules by issuing the following command:

```
dsmc schedule
```

## Displaying information about client nodes

You can display information about client nodes in different aspects.

For example, as a policy administrator, you might query the server about all client nodes assigned to the policy domains for which you have authority. Or you might query the server for detailed information about one client node.

### Displaying information about client nodes assigned to specific policy domains

You can display information about client nodes that are assigned to specific policy domains.

#### Procedure

Issue the following command to view information about client nodes that are assigned to the `STANDARD` and `ENGPOLDOM` policy domains:

```
query node * domain=standard,engpoldom
```

The data from that command might display similar to the following output:

| Node Name | Platform | Policy Domain<br>Name | Days Since<br>Last<br>Access | Days Since<br>Password<br>Set | Locked? |
|-----------|----------|-----------------------|------------------------------|-------------------------------|---------|
| -----     | -----    | -----                 | -----                        | -----                         | -----   |
| JOE       | WinNT    | STANDARD              | 6                            | 6                             | No      |
| ENGNODE   | AIX      | ENGPOLDOM             | <1                           | 1                             | No      |
| HTANG     | Mac      | STANDARD              | 4                            | 11                            | No      |
| MAB       | AIX      | ENGPOLDOM             | <1                           | 1                             | No      |
| PEASE     | Linux86  | STANDARD              | 3                            | 12                            | No      |
| SSTEINER  | SOLARIS  | ENGPOLDOM             | <1                           | 1                             | No      |

## Displaying information about a specific client node

You can view information about specific client nodes.

### Procedure

For example, to review the registration parameters defined for client node JOE, issue the following command:

```
query node joe format=detailed
```

The resulting report may appear similar to the following output:

```
Node Name: JOE
Platform: WinNT
Client OS Level: 5.00
Client Version: Version 5, Release 1, Level 5.0
Policy Domain Name: STANDARD
Last Access Date/Time: 05/19/2002 18:55:46
Days Since Last Access: 6
Password Set Date/Time: 05/19/2002 18:26:43
Days Since Password Set: 6
Invalid Sign-on Count: 0
Locked?: No
Contact:
Compression: Client's Choice
Archive Delete Allowed?: Yes
Backup Delete Allowed?: No
Registration Date/Time: 03/19/2002 18:26:43
Registering Administrator: SERVER_CONSOLE
Last Communication Method Used: Tcp/Ip
Bytes Received Last Session: 108,731
Bytes Sent Last Session: 698
Duration of Last Session (sec): 0.00
Pct. Idle Wait Last Session: 0.00
Pct. Comm. Wait Last Session: 0.00
Pct. Media Wait Last Session: 0.00
Optionset:
URL: http://client.host.name:1581
Node Type: Client
Password Expiration Period: 60
Keep Mount Point?: No
Maximum Mount Points Allowed: 1
Auto Filespace Rename: No
Validate Protocol: No
TCP/IP Name: JOE
TCP/IP Address: 9.11.153.39
Globally Unique ID: 11.9c.54.e0.8a.b5.11.d6.b3.c3.00.06.29.45.c1.5b
Transaction Group Max: 0
Data Write Path: ANY
Data Read Path: ANY
Session Initiation: ClientOrServer
High-level Address: 9.11.521.125
Low-level Address: 1501
Collocation Group Name: minster
Proxynode Target: node_gpfs
Proxynode Agent: node_1
Node Groups:
```

## Overview of remote access to web backup-archive clients

With the introduction of the web backup-archive client, when a client node is registered with an IBM Tivoli Storage Manager server, an identical administrative user ID is created at the same time. This user ID has client owner authority over the node by default.

**Restriction:** Administrators who authenticate their password with an LDAP directory server cannot access the web client.

A web backup-archive client can be accessed from a web browser or opened from the Operations Center interface. This allows an administrator with the proper authority to perform backup, archive, restore, and retrieve operations on any server that is running the web backup-archive client.

You can establish access to a web backup-archive client for help desk personnel that do not have system or policy privileges by granting those users client-access authority to the nodes that they must manage. Help desk personnel can then perform activities on behalf of the client node such as backup and restore operations.

A native backup-archive client can log on to Tivoli Storage Manager using their node name and password, or administrative user ID and password. The administrative user ID password is managed independently from the password that is generated with the `passwordaccess generate client` option. The client must have the option `passwordaccess generate` specified in their client option file to enable use of the web backup-archive client.

To use the web backup-archive client from your web browser, specify the URL and port number of the Tivoli Storage Manager backup-archive client computer that is running the web client. The browser that you use to connect to a web backup-archive client must be Microsoft Internet Explorer 5.0 or Netscape 4.7 or later. The browser must have the Java Runtime Environment (JRE) 1.3.1, which includes the Java Plug-in software. The JRE is available at <http://www.oracle.com/>.

During node registration, you have the option of granting client owner or client access authority to an existing administrative user ID. You can also prevent the server from creating an administrative user ID at registration. If an administrative user ID exists with the same name as the node that is being registered, the server registers the node but does not automatically create an administrative user ID. This process also applies if your site uses open registration.

For more information about installing and configuring the web backup-archive client, refer to *Backup-Archive Clients Installation and User's Guide*.

### Defining node privilege class and client access authorities

Access to a web backup-archive client requires either client owner authority or client access authority.

Administrators with system or policy privileges over the client node's domain, have client owner authority by default. The administrative user ID created automatically at registration has client owner authority by default. This administrative user ID is displayed when an administrator issues a **QUERY ADMIN** command.

The following definitions describe the difference between client owner and client access authority when defined for a user that has the node privilege class:

#### **Client owner**

You can access the client through the web backup-archive client or native backup-archive client.

You own the data and have a right to physically gain access to the data remotely. You can back up and restore files on the same or different servers and you can delete file spaces or archive data.

The user ID with client owner authority can also access the data from another server by using the **-NODENAME** or **-VIRTUALNODENAME** parameter.

The administrator can change the client node's password for which they have authority.

This is the default authority level for the client at registration. An administrator with system or policy privileges to a client's domain has client owner authority by default.

#### **Client access**

You can only access the client through the web backup-archive client.

You can restore data only to the original client.

A user ID with client access authority cannot access the client from another server by using the **-NODENAME** or **-VIRTUALNODENAME** parameter.

This privilege class authority is useful for help desk personnel so they can assist users in backing up or restoring data without having system or policy privileges. The client data can only be restored to none other than the original client. A user ID with client access privilege cannot directly access client's data from a native backup-archive client.

## **Managing client access authority levels**

By default, an administrator with system or policy privilege over a client's domain can remotely access clients and perform backup and restore operations.

You can grant client access or client owner authority to other administrators by specifying **CLASS=NODE** and **AUTHORITY=ACCESS** or **AUTHORITY=OWNER** parameters on the **GRANT AUTHORITY** command. You must have one of the following privileges to grant or revoke client access or client owner authority:

- System privilege
- Policy privilege in the client's domain
- Client owner privilege over the node
- Client access privilege over the node

You can grant an administrator client access authority to individual clients or to all clients in a specified policy domain. For example, you may want to grant client access privileges to users that staff help desk environments.

#### **Related tasks:**

"Example: Setting up help desk access to client computers in a specific policy domain" on page 458

## Granting client authority

You might have to grant client authority to a user at some time.

### Procedure

1. Issue the following command to grant client access authority to administrator FRED for the LABCLIENT node:

```
grant authority fred class=node node=labclient
```

The administrator FRED can now access the LABCLIENT client, and perform backup and restore. The administrator can only restore data to the LABCLIENT node.

2. Issue the following command to grant client owner authority to ADMIN1 for the STUDENT1 node:

```
grant authority admin1 class=node authority=owner node=student1
```

The user ID ADMIN1 can now perform backup and restore operations for the STUDENT1 client node. The user ID ADMIN1 can also restore files from the STUDENT1 client node to a different client node.

## Automatically creating an administrative user ID with client owner authority

When you issue the **REGISTER NODE** command, by default, the server creates an administrative user ID in addition to the client node. The administrative user ID has client owner authority to the node when the node is defined to the server.

### About this task

When the node is created, the authentication method and Secure Sockets Layer (SSL) settings are inherited by the administrator.

### Procedure

To register client node DESK2, issue the following example command:

```
register node desk2 pass2dsk
```

The following output is an example of this command:

```
ANR2060I Node DESK2 registered in policy domain STANDARD.
ANR2099I Administrative userid DESK2 defined for OWNER access to node DESK2.
```

The DESK2 client node is registered, in addition to an administrative user ID with the same ID. The administrative user ID DESK2 has a password of pass2dsk with client owner authority to the DESK2 node. When the PASSWORDACCESS=GENERATE option is used by the client to change the password, the administrative DESK2 ID can still access the client from a remote location.

## Preventing automatic creation of an administrative user ID with client owner authority

You can prevent automatic creation of an administrative user ID with client owner authority by specifying `USERID=NONE` on the **REGISTER NODE** command.

### Procedure

To register DESK2 without creating an administrative user ID with client owner authority by default, issue the following example command:

```
register node desk2 pass2dsk userid=none
```

## Registering a node and granting an existing administrative ID client owner authority

You can grant client owner authority to an existing administrative user ID.

### Procedure

To give client owner authority to the HELPADMIN user ID when registering the NEWCLIENT node, issue the following command:

```
register node newclient pass2new userid=helpadmin
```

This command results in the NEWCLIENT node being registered with a password of pass2new, and also grants HELPADMIN client owner authority. This command would not create an administrator ID. The HELPADMIN client user ID is now able to access the NEWCLIENT node from a remote location.

## Example: Setting up help desk access to client computers in a specific policy domain

The example is for setting up help desk access for user HELP1 to the client nodes in the FINANCE domain.

### About this task

You are also granting HELP1 client access authority to the FINANCE domain without having to grant system or policy privileges.

The client nodes are previously set up as follows:

- Installed and configured. The URL and port numbers were specified during the **REGISTER NODE** process.
- Assigned to the FINANCE policy domain.
- Started the Client Acceptor service.
- Specified passwordaccess generate option in their client option files.

The help desk person, using HELP1 user ID, has a web browser with Java Runtime Environment (JRE) 1.3.1.

### Procedure

1. Register an administrative user ID of HELP1.  

```
register admin help1 05x23 contact="M. Smith, Help Desk x0001"
```
2. Grant the HELP1 administrative user ID client access authority to all clients in the FINANCE domain. With client access authority, HELP1 can perform backup and restore operations for clients in the FINANCE domain. Client nodes in the FINANCE domain are Dave, Sara, and Joe.  

```
grant authority help1 class=node authority=access domains=finance
```

The following output is generated by this command:

```
ANR2126I GRANT AUTHORITY: Administrator HELP1 was granted ACCESS authority for client
DAVE.
ANR2126I GRANT AUTHORITY: Administrator HELP1 was granted ACCESS authority for client
JOE.
ANR2126I GRANT AUTHORITY: Administrator HELP1 was granted ACCESS authority for client
SARA.
```

3. The help desk person, HELP1, opens the web browser and specifies the URL and port number for client computer Sara:  
`http://sara.computer.name:1581`  
A Java applet is started, and the client hub window is displayed in the main window of the web browser. When HELP1 accesses the backup function from the client hub, the Tivoli Storage Manager login screen is displayed in a separate Java applet window. HELP1 authenticates with the administrative user ID and password. HELP1 can perform a backup for Sara.

### What to do next

For information about what functions are not supported on the web backup-archive client, refer to the *Backup-Archive Clients Installation and User's Guide*.

---

## Managing file spaces

A file space name identifies a group of files that are stored as a logical unit in server storage. Administrators manage file spaces in which IBM Tivoli Storage Manager stores each client node's data.

Administrators can perform the following activities when managing file spaces:

| Task                                                                                                                   | Required Privilege Class                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Determine when existing file spaces are renamed to allow for the creation of new Unicode-enabled file spaces           | System, unrestricted policy privilege, or restricted policy privilege for the policy domain to which the client node is assigned.                                                                                                                                                    |
| Displaying information about file spaces                                                                               | Any administrator                                                                                                                                                                                                                                                                    |
| Move selected file spaces for a single node, as well as move a node's data located in a sequential access storage pool | System, unrestricted storage, or restricted storage privilege for the source storage pool. If your authorization is restricted storage privilege and you intend to move data to another storage pool, you must also have the appropriate authority for the destination storage pool. |
| Deleting file spaces                                                                                                   | System or unrestricted policy                                                                                                                                                                                                                                                        |
| Deleting file spaces assigned to specific policy domains                                                               | System, unrestricted policy, or restricted policy for those domains                                                                                                                                                                                                                  |

### Related reference:

“Defining client nodes and file spaces” on page 460



## Defining client nodes and file spaces

Each client is given a node name when it is registered with the server. The server views its registered nodes as clients that require services and resources from the server.

Typically, a node is equivalent to a computer as in the case of a backup-archive client installed on a user's computer for file system backups. However, multiple nodes can exist on a single computer as in the case of a SQL server containing both an application client for SQL database and transaction log backups, and a backup-archive client for file system backups.

Typically, each client file system is represented on the server as a unique file space that belongs to each client node. Therefore, the number of file spaces a node has depends on the number of file systems on the client computer. For example, a Windows desktop system may have multiple drives (file systems), such as C: and D:. In this case, the client's node has two file spaces on the server; one for the C: drive and a second for the D: drive. The file spaces can grow as a client stores more data on the server. The file spaces decrease as backup and archive file versions expire and the server reclaims the space.

IBM Tivoli Storage Manager does not allow an administrator to delete a node unless the node's file spaces have been deleted.

### Mapping file spaces for clients

For client nodes running on Windows, file spaces map to logical partitions and shares. Each file space is named with the UNC name of the respective client partition or share.

For client nodes running on NetWare, file spaces map to NetWare volumes. Each file space is named with the corresponding NetWare volume name.

For clients running on Macintosh, file spaces map to Macintosh volumes. Each file space is named with the corresponding Macintosh volume name.

For clients running on UNIX or Linux, a file space name maps to a file space in storage that has the same name as the file system or virtual mount point from which the files originated. The VIRTUALMOUNTPOINT option allows users to define a virtual mount point for a file system to back up or archive files beginning with a specific directory or subdirectory. For information on the VIRTUALMOUNTPOINT option, refer to the appropriate *Backup-Archive Clients Installation and User's Guide*.

### Defining object names for clients

A fully qualified name for a client object can refer to a full file name and path that is combined, or to the full directory structure for the object.

### About this task

For client nodes that are running on Windows, it is possible to create objects with long fully qualified names. The IBM Tivoli Storage Manager clients for Windows are able to support fully qualified names of up to 8704 bytes in length for backup and restore functions. These long names are often generated with an automatic naming function or are assigned by an application.

**Important:** The Unicode representation of a character can occupy several bytes, so the maximum number of characters that a fully qualified name might contain can vary.

See *Setting options in the client options file in the Backup-Archive Clients Installation and User's Guide for Windows* for a full explanation of file path names and limits.

Long object names can be difficult to display and use through normal operating system facilities, such as a command prompt window or Windows Explorer. To manage them, Tivoli Storage Manager assigns an identifying token to the name and abbreviates the length. The token ID is then used to display the full object name. For example, an error message might display as follows, where [TSMOBJ:9.1.2084] is the assigned token ID:

```
ANR9999D file.c(1999) Error handling file [TSMOBJ:9.1.2084] because of
lack of server resources.
```

The token ID can then be used to display the fully qualified object name by specifying it in the **DISPLAY OBJNAME** command.

## Procedure

Issue the **DISPLAY OBJNAME** command with the token ID [TSMOBJ:9.1.2084]:

[illegible]

The fully qualified object name is displayed. If you are displaying long object names that are included in backup sets, a token ID might not be included if the entries for the path no longer exist in the Tivoli Storage Manager server database. You cannot obtain a token ID by issuing **QUERY BACKUPSETCONTENTS**. To view the fully qualified name, you can load the backup set table of contents from the client. For more information about fully qualified object names and issuing the **DISPLAY OBJNAME** command, see the *Administrator's Reference*.

## Supporting Unicode-enabled clients

Unicode is a universal character encoding standard that supports the interchange, processing, and display of text that is written in any of the languages of the modern world.

For Windows, Macintosh OS X, and NetWare systems with the Unicode-enabled client, the server supports storing file spaces with Unicode file space names, directory names, and file names in server storage. The file spaces in server storage that have Unicode names are called Unicode-enabled file spaces. Support for Unicode names enables a client to successfully process an Tivoli Storage Manager operation, even when the file spaces contain directory names or files in multiple languages, or when the client uses a different code page than the server.

New clients storing data on the server for the first time require no special setup. If the client has the latest Tivoli Storage Manager client software installed, the server automatically stores Unicode-enabled file spaces for that client.

However, if you have clients that already have data stored on the server and the clients install the Unicode-enabled Tivoli Storage Manager client software, you need to plan for the migration to Unicode-enabled file spaces. To allow clients with existing data to begin to store data in Unicode-enabled file spaces, Tivoli Storage Manager provides a function for automatic renaming of existing file spaces. The file data itself is not affected; only the file space name is changed. After the existing file space is renamed, the operation creates a new file space that is Unicode-enabled. The creation of the new Unicode-enabled file space for clients can greatly increase the amount of space required for storage pools and the amount of space required for the server database. It can also increase the amount of time required for a client to run a full incremental backup, because the first incremental backup after the creation of the Unicode-enabled file space is a full backup.

When clients with existing file spaces migrate to Unicode-enabled file spaces, you need to ensure that sufficient storage space for the server database and storage pools is available. You also need to allow for potentially longer backup windows for the complete backups.

**Attention:** After the server is at the latest level of software that includes support for Unicode-enabled file spaces, you can only go back to a previous level of the server by restoring an earlier version of Tivoli Storage Manager and the database.

A Unicode-enabled Tivoli Storage Manager client is currently available for Windows, Macintosh OS X, and NetWare operating systems. Data in a Unicode code page from any other source, including down-level clients and API clients, will not be identified or treated as Unicode-enabled.

It is strongly recommended that users of Windows, Macintosh, and NetWare operating systems migrate their non-Unicode file spaces to Unicode-enabled file spaces.

For more information see the *Backup-Archive Clients Installation and User's Guide*.

**Related concepts:**

"Unicode-enabled clients and existing backup sets" on page 471

**Related tasks:**

"Migrating clients to Unicode-enabled file spaces" on page 463

**Related reference:**

“Reasons for migrating clients to Unicode-enabled file spaces”

“Querying Unicode-enabled file spaces” on page 470

**Reasons for migrating clients to Unicode-enabled file spaces**

Without IBM Tivoli Storage Manager support for storing Unicode-enabled file spaces, some clients experience backup failures when file spaces contain names of directories or files in multiple languages, or have names that cannot be converted to the server's code page.

When IBM Tivoli Storage Manager cannot convert the code page, the client may receive one or all of the following messages if they were using the command line: ANS1228E, ANS4042E, and ANS1803E. Clients that are using the GUI may see a “Path not found” message. If you have clients that are experiencing such backup failures, then you need to migrate the file spaces for these clients to ensure that these systems are completely protected with backups. If you have a large number of clients, set the priority for migrating the clients based on how critical each client's data is to your business.

Any new file spaces that are backed up from client systems with the Unicode-enabled IBM Tivoli Storage Manager client are automatically stored as Unicode-enabled file spaces in server storage.

Objects backed up or archived with a Unicode-enabled IBM Tivoli Storage Manager client in any supported language environment can be restored or retrieved with a Unicode-enabled client in the same or any other supported language environment. This means, for example, that files backed up by a Japanese Unicode-enabled client can be restored by a German Unicode-enabled client.

**Important:** Objects backed up or archived by a Unicode-enabled IBM Tivoli Storage Manager client cannot be restored or retrieved by a client that is not Unicode-enabled.

**Related tasks:**

“Migrating clients to Unicode-enabled file spaces”

**Migrating clients to Unicode-enabled file spaces**

To allow clients with existing data to migrate to Unicode-enabled file spaces, IBM Tivoli Storage Manager provides an automatic rename function for file spaces.

**About this task**

When enabled, IBM Tivoli Storage Manager uses the rename function when it recognizes that a file space that is not Unicode-enabled in server storage matches the name of a file space on a client. The existing file space in server storage is renamed, so that the file space in the current operation is then treated as a new, Unicode-enabled file space. For example, if the operation is an incremental backup at the file space level, the entire file space is then backed up to the server as a Unicode-enabled file space.

The following example shows how this process works when automatic renaming is enabled from the server, for an existing client node that has file spaces in server storage.

## Procedure

1. The administrator updates a client node definition by issuing an **UPDATE NODE** command with the parameter, **AUTOFSRENAME YES**.
2. The client processes an incremental back up.
3. The IBM Tivoli Storage Manager processes the backup as follows:
  - a. Renames the existing file space (\_OLD)
  - b. Creates a new Unicode-enabled file space
  - c. Processes the backup in the current operation to the new Unicode-enabled file space

## Results

If you force the file space renaming for all clients at the same time, backups can contend for network and storage resources, and storage pools can run out of storage space.

### Related tasks:

"Planning for Unicode versions of existing client file spaces" on page 466

"Examining issues when migrating to Unicode" on page 468

"Example of a migration process" on page 469

### Related reference:

"Defining options for automatically renaming file spaces"

"Defining the rules for automatically renaming file spaces" on page 466

### Defining options for automatically renaming file spaces:

As an administrator, you can control whether the file spaces of any existing clients are renamed to force the creation of new Unicode-enabled file spaces. By default, no automatic renaming occurs.

To control the automatic renaming, use the parameter **AUTOFSRENAME** when you register or update a node. You can also allow clients to make the choice. Clients can use the client option **AUTOFSRENAME**.

**Restriction:** The setting for **AUTOFSRENAME** affects only clients that are Unicode-enabled.

You have the following options:

- Do not allow existing file spaces to be renamed, so that Unicode-enabled file spaces are not created (**AUTOFSRENAME=NO**, the default).

IBM Tivoli Storage Manager does not automatically rename client file spaces when the client system upgrades to the Unicode-enabled Tivoli Storage Manager client. This setting can help an administrator control how many clients' file spaces can be renamed at one time. The administrator can determine how many Unicode-enabled clients exist by issuing the **QUERY NODE FORMAT=DETAILED** command. The output displays the client level.

- Automatically rename existing file spaces, forcing the creation of Unicode-enabled file spaces in place of the renamed file spaces (**AUTOFSRENAME=YES**).

Tivoli Storage Manager automatically renames client file spaces in server storage when the client upgrades to the Unicode-enabled client and runs one of the following operations: archive, selective backup, full incremental backup, or partial incremental backup. Tivoli Storage Manager automatically renames the

file spaces that are specified in the current operation and creates new, Unicode-enabled file spaces where files and directories are stored to complete the operation. Other file spaces that are not specified in the current operation are not affected by the rename. Therefore, a client can have mixed file spaces.

**Attention:** If you force the renaming of the file space for all clients at the same time, client operations can contend for network and storage resources. Also, storage pools can run out of storage space.

- Allow clients to choose whether to rename files spaces, in effect, choosing whether new Unicode-enabled file spaces are created (AUTOFSPRENAME=CLIENT).

If you use this value for a client node, the client can set its AUTOFSPRENAME option in its options file. The client option determines whether file spaces are renamed or whether the user is prompted for renaming during a Tivoli Storage Manager operation (PROMPT).

The default value for the client option is PROMPT. When the option is set for prompting, the client is presented with a choice about renaming file spaces. When a client that has existing file spaces on server storage upgrades to the Unicode-enabled client, the file spaces might be renamed. If the client runs a Tivoli Storage Manager operation with the server, the user is asked to choose whether to rename the file spaces that are involved in the current operation.

The client is prompted only one time about renaming a particular file space.

If the client does not choose to rename the file space, the administrator can later rename the file space to create a new Unicode-enabled file space. The file space is created the next time that the client processes an archive, selective backup, full incremental backup, or partial incremental backup.

**Attention:** There is no prompt for operations that run with the client scheduler. If the client is running the scheduler and the client AUTOFSPRENAME option is set to PROMPT, there is no prompt and the file space is not renamed. A client session can then run unattended. The prompt is displayed during the next interactive session on the client.

The following table summarizes what occurs with different parameter and option settings.

Table 40. The effects of the AUTOFSPRENAME option settings

| Parameter on the server (for each client) | Option on the client | Result for file spaces                                                                          | Is the file space renamed?                        |
|-------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------|
| Yes                                       | Yes, No, Prompt      | Renamed                                                                                         | Yes                                               |
| No                                        | Yes, No, Prompt      | Not renamed                                                                                     | No                                                |
| Client                                    | Yes                  | Renamed                                                                                         | Yes                                               |
| Client                                    | No                   | Not renamed                                                                                     | Yes                                               |
| Client                                    | Prompt               | Command-line or GUI: The user receives a one-time-only prompt about renaming                    | Depends on the response from the user (yes or no) |
| Client                                    | Prompt               | Client Scheduler: Not renamed (prompt is displayed during the next command-line or GUI session) | No                                                |

**Related reference:**

“Defining the rules for automatically renaming file spaces” on page 466

**Defining the rules for automatically renaming file spaces:**

With its automatic renaming function, IBM Tivoli Storage Manager renames a file space by adding the suffix `_OLD`.

For example:

| Original file space name | New file space name |
|--------------------------|---------------------|
| \\maria\c\$              | \\maria\c\$_OLD     |

If the new name would conflict with the name of another file space, a number is added to the suffix. For example:

| Original file space name | New file space name | Other existing file spaces |
|--------------------------|---------------------|----------------------------|
| \\maria\c\$              | \\maria\c\$_OLD     | \\maria\c\$_OLD1           |
|                          |                     | \\maria\c\$_OLD2           |

If the new name for the file space exceeds the limit of 64 characters, the file space name is truncated before the suffix `_OLD` is added.

**Planning for Unicode versions of existing client file spaces:**

Several factors must be considered before you plan for Unicode versions of existing client file spaces.

**About this task**

Consider the following items when planning:

- After clients with existing file spaces start to create Unicode-enabled file spaces, they will still need to have access to the renamed file spaces that are not Unicode-enabled for some period of time.
- Your storage pool and database space requirements can double if you allow all clients to create Unicode-enabled file spaces in addition to their existing file spaces that are not Unicode-enabled.
- Because the initial backups after migration are complete backups, it can also greatly increase the time required to finish backup operations.

To minimize problems, you need to plan the storage of Unicode-enabled file spaces for clients that already have existing file spaces in server storage.

**Procedure**

1. Determine which clients need to migrate.  
Clients that have had problems with backing up files because their file spaces contain names of directories or files that cannot be converted to the server's code page should have the highest priority. Balance that with clients that are most critical to your operations. If you have a large number of clients that need to become Unicode-enabled, you can control the migration of the clients.  
Change the rename option for a few clients at a time to keep control of storage space usage and processing time. Also consider staging migration for clients that have a large amount of data backed up.
2. Allow for increased backup time and network resource usage when the Unicode-enabled file spaces are first created in server storage.



Based on the number of clients and the amount of data those clients have, consider whether you need to stage the migration. Staging the migration means setting the **AUTOFSRENAME** parameter to YES or CLIENT for only a small number of clients every day.

**Note:** If you set the **AUTOFSRENAME** parameter to CLIENT, be sure to have the clients (that run the client scheduler) set their option to **AUTOFSRENAME YES**. This ensures the file spaces are renamed.

3. Check the current storage usage for the clients that need to become Unicode-enabled.

You can use the **QUERY OCCUPANCY** command to display information on how much space each client is currently using. Initially, clients will need only the amount of space used by active files. Therefore, you need to estimate how much of the current space is used by copies (different versions of the same file). Migration will result in a complete backup at the next incremental backup, so clients will need space for that backup, plus for any other extra versions that they will keep. Therefore, the amount of storage required also depends on policy (see the next step). Your Tivoli Storage Manager policy specifies how files are backed up, archived, migrated from client node storage, and managed in server storage.

4. Understand how your Tivoli Storage Manager policies affect the storage that will be needed.

If your policies expire files based only on the number of versions (Versions Data Exists), storage space required for each client will eventually double, until you delete the old file spaces.

If your policies expire files based only on age (Retain Extra Versions), storage space required for each client will increase initially, but will not double.

If your policies use both the number of versions and their age, each client will need less than double their current usage.

5. Estimate the effect on the database size.

The database size depends on the number of files in server storage, as well as the number of versions of those files. As Unicode-enabled file spaces are backed up, the original file spaces that were renamed remain. Therefore, the server requires additional space in the database to store information about the increased number of file spaces and files.

6. Arrange for the additional storage pool space, including space in copy storage pools and active-data pools, based on your estimate from step 3 and 4.
7. Check the server database space that is available and compare with your estimate from step 5.
8. Ensure that you have a full database backup before you proceed with migration of Unicode-enabled file spaces.
9. Consider how you will manage the renamed file spaces as they age. The administrator can delete them, or the clients can be allowed to delete their own file spaces.

**Related tasks:**

“Estimating database space requirements” on page 641



## Examining issues when migrating to Unicode:

When you migrate to Unicode, there are several issues that you must consider.

### About this task

The server manages a Unicode-enabled client and its file spaces as follows:

- When a client upgrades to a Unicode-enabled client and logs in to the server, the server identifies the client as Unicode-enabled.

**Remember:** That same client (same node name) cannot log in to the server with a previous version of IBM Tivoli Storage Manager or a client that is not Unicode-enabled.

- The original file space that was renamed (\_OLD) remains with both its active and inactive file versions that the client can restore if needed. The original file space will no longer be updated. The server will not mark existing active files inactive when the same files are backed up in the corresponding Unicode-enabled file space.

**Important:** Before the Unicode-enabled client is installed, the client can back up files in a code page other than the current locale, but cannot restore those files. After the Unicode-enabled client is installed, if the same client continues to use file spaces that are not Unicode-enabled, the client skips files that are not in the same code page as the current locale during a backup. Because the files are skipped, they appear to have been deleted from the client. Active versions of the files in server storage are made inactive on the server. When a client in this situation is updated to a Unicode-enabled client, you should migrate the file spaces for that client to Unicode-enabled file spaces.

- The server does not allow a Unicode-enabled file space to be sent to a client that is not Unicode-enabled during a restore or retrieve process.
- Clients should be aware that they will not see all their data on the Unicode-enabled file space until a full incremental backup has been processed.

When a client performs a selective backup of a file or directory and the original file space is renamed, the new Unicode-enabled file space will contain only the file or directory specified for that backup operation. All other directories and files are backed up on the next full incremental backup.

If a client needs to restore a file before the next full incremental backup, the client can perform a restore from the renamed file space instead of the new Unicode-enabled file space. For example:

- Sue had been backing up her file space, \\sue-node\d\$.
- Sue upgrades the IBM Tivoli Storage Manager client on her system to the Unicode-enabled IBM Tivoli Storage Manager client.
- Sue performs a selective backup of the HILITE.TXT file.
- The automatic file space renaming function is in effect and IBM Tivoli Storage Manager renames \\sue-node\d\$ to \\sue-node\d\$\_OLD. IBM Tivoli Storage Manager then creates a new Unicode-enabled file space on the server with the name \\sue-node\d\$. This new Unicode-enabled file space contains only the HILITE.TXT file.
- All other directories and files in Sue's file system will be backed up on the next full incremental backup. If Sue needs to restore a file before the next full incremental backup, she can restore the file from the \\sue-node\d\$\_OLD file space.

Refer to the *Backup-Archive Clients Installation and User's Guide* for more information.

### Example of a migration process:

The example of a migration process includes one possible sequence for migrating clients.

### About this task

Assumptions for this scenario are:

- The IBM Tivoli Storage Manager server database has been backed up.
- The latest server software has been installed. This installation has also performed an upgrade to the server database.
- Clients have installed the latest software.
- A few clients are file servers. Most clients are workstations used by individuals.
- Clients generally run scheduled incremental backups every night.

The following migration process is possible to perform:

### Procedure

1. Have all clients install the Unicode-enabled IBM Tivoli Storage Manager client software.
2. Migrate the file servers first. For clients that are file servers, update the **AUTOFSRENAME** parameter to enable automatic renaming for the file spaces. For example, if the client node names for all file servers begin with FILE, issue the following command:

```
update node file* autofsrname=yes
```

This forces the file spaces to be renamed at the time of the next backup or archive operation on the file servers. If the file servers are large, consider changing the renaming parameter for one file server each day.

3. Allow backup and archive schedules to run as usual. Monitor the results.
  - a. Check for the renamed file spaces for the file server clients. Renamed file spaces have the suffix `_OLD` or `_OLDn`, where `n` is a number.
  - b. Check the capacity of the storage pools. Add tape or disk volumes to storage pools as needed.
  - c. Check database usage statistics to ensure you have enough space.

**Note:** If you are using the client acceptor to start the scheduler, you must first modify the default scheduling mode.

4. Migrate the workstation clients. For example, migrate all clients with names that start with the letter a.

```
update node a* autofsrname=yes
```

5. Allow backup and archive schedules to run as usual that night. Monitor the results.
6. After sufficient time passes, consider deleting the old, renamed file spaces.

### Related tasks:

"Modifying the default scheduling mode" on page 566

### Related reference:

"Managing the renamed file spaces" on page 470

“Defining the rules for automatically renaming file spaces” on page 466

### Managing the renamed file spaces:

The file spaces that were automatically renamed (\_OLD) to allow the creation of Unicode-enabled file spaces continue to exist on the server. Users can still access the file versions in these file spaces.

Because a renamed file space is not backed up again with its new name, the files that are active (the most recent backup version) in the renamed file space remain active and never expire. The inactive files in the file space expire according to the policy settings for how long versions are retained. To determine how long the files are retained, check the values for the parameters, **Retain Extra Versions** and **Retain Only Versions**, in the backup copy group of the management class to which the files are bound.

When users no longer have a need for their old, renamed file spaces, you can delete them. If possible, wait for the longest retention time for the only version (**Retain Only Version**) that any management class allows. If your system has storage constraints, you may need to delete these file spaces before that.

### Querying Unicode-enabled file spaces

You can determine which file spaces are Unicode-enabled by querying all of the file spaces.

Issue the following command:

```
query filesystem
```

The result is similar to the following output:

| Node Name | Filespace Name | FSID | Platform | Filespace Type | Is Filespace Unicode? | Capacity (MB) | Pct Util |
|-----------|----------------|------|----------|----------------|-----------------------|---------------|----------|
| SUE       | \\sue\c\$      | 1    | WinNT    | NTFS           | Yes                   | 2,502.3       | 75.2     |
| SUE       | \\sue\d\$      | 2    | WinNT    | NTFS           | Yes                   | 6,173.4       | 59.6     |
| JOE       | \\joe\c\$      | 1    | WinNT    | NTFS           | No                    | 12,299.7      | 31.7     |

To query a specific Unicode-enabled file space, it may be more convenient to use the file space identifier (FSID) than the file space name. File space names for Unicode-enabled file spaces may not be readable when displayed in the server's code page. Attempting to enter the name of a Unicode-enabled file space may not work because it depends on the server's code page and conversion routines that attempt to convert from the server's code page to Unicode.

### Related tasks:

“Displaying information about file spaces” on page 471

## Unicode-enabled clients and existing backup sets

A client can have a backup set that contains both file spaces that are Unicode-enabled and file spaces that are not Unicode-enabled. The client must have the same level of IBM Tivoli Storage Manager or higher to restore the data in the backup set.

For example, a Version 5.1.0 client backs up file spaces, and then upgrades to Version 5.2.0 with support for Unicode-enabled file spaces. That same client can still restore the non-Unicode file spaces from the backup set.

Unicode-enabled file spaces in a backup set can only be accessed by a Unicode-enabled client, and not by an earlier version of the client. The server allows only Unicode-enabled clients to restore data from Unicode-enabled file spaces.

### Related reference:

“Restoring backup sets from a backup-archive client” on page 538

## Displaying information about file spaces

You can display file space information by identifying the client node name and file space name.

### About this task

You can display file space information for the following reasons:

- To identify file spaces that are defined to each client node, so that you can delete each file space from the server before removing the client node from the server
- To identify file spaces that are Unicode-enabled and identify their file space ID (FSID)
- To monitor the space that is used on workstation's disks
- To monitor whether backups are completing successfully for the file space
- To determine the date and time of the last backup

**Note:** File space names are case-sensitive and must be entered exactly as known to the server.

### Procedure

To view information about file spaces that are defined for client node JOE, issue the following command:

```
query file space joe *
```

The following figure shows the output from this command:

| Node Name | Filespace Name | FSID | Platform | Filespace Type | Is Filespace Unicode? | Capacity (MB) | Pct Util |
|-----------|----------------|------|----------|----------------|-----------------------|---------------|----------|
| JOE       | \\joe\c\$      | 1    | WinNT    | NTFS           | Yes                   | 2,502.3       | 75.2     |
| JOE       | \\joe\d\$      | 2    | WinNT    | NTFS           | Yes                   | 6,173.4       | 59.6     |

When you display file space information in detailed format, the Filespace Name field might display file space names as “...”. This indicates to the administrator that a file space does exist but could not be converted to the server's code page. Conversion can fail if the string includes characters that are not available in the server code page, or if the server has a problem accessing system conversion

routines.

File space names and file names that can be in a different code page or locale than the server do not display correctly in the Operations Center or the administrative command-line interface. The data itself is backed up and can be restored properly, but the file space name or file name may display with a combination of invalid characters or blank spaces.

Refer to the *Administrator's Reference* for details.

## Moving data for a client node

You can move a client node's data in a sequential-access storage pool or move selected file spaces for a single node.

### Related tasks:

"Moving data belonging to a client node" on page 419

## Deleting file spaces

You can delete a client node from a server, but first you must delete all of that client's data from server storage by deleting any file spaces that belong to the node.

### About this task

Administrators might want to delete a file space in the following cases:

- Users are not authorized to delete backed-up or archived files in storage pools.
- You want to remove a client node from the server.
- You want to delete a specific user's files.

### Procedure

1. For users who are not authorized to delete backed-up or archived files in storage pools, as an example, client node PEASE no longer needs archived files in file space /home/pease/dir2. However, the user does not have the authority to delete those files. To delete the files in /home/pease/dir2, issue the following command:

```
delete filepace pease /home/pease/dir2 type=archive
```

The authority to delete backed-up or archived files from server storage is set when a client node is registered.

2. You must delete a user's files from storage pools before you can remove a client node. For example, to delete all file spaces that belong to client node DEBBYG, issue the following command:

```
delete filepace debbyg * type=any
```

After you delete all of a client node's file spaces, you can delete the node with the **REMOVE NODE** command.

### Results

For client nodes that support multiple users, such as UNIX or Linux, a file owner name is associated with each file on the server. The owner name is the user ID of the operating system, such as the UNIX Linux user ID. When you delete a file space that belongs to a specific owner, only files that have the specified owner name in the file space are deleted.

When a node has more than one file space and you issue a **DELETE FILESPACE** command for only one file space, a **QUERY FILESPACE** command for the node during

the delete process shows no file spaces. When the delete process ends, you can view the remaining file spaces with the **QUERY FILESPACE** command. If data retention protection is enabled, the only files that are deleted from the file space are those that meet the retention criterion. The file space is not deleted if one or more files within the file space cannot be deleted.

**Note:** Data stored using the System Storage Archive Manager product cannot be deleted using the **DELETE FILESPACE** command if the retention period for the data has not expired. If this data is stored in a Centera storage pool, then it is additionally protected from deletion by the retention protection feature of the Centera storage device.

**Related concepts:**

“Accepting default closed registration or enabling open registration” on page 435

**Related tasks:**

“Deleting client nodes” on page 450

---

## Managing client option files

A client node connects with the server by using the information in a client options file (dsm.opt). This file, located in the client directory, contains client options that control processing and connections with the server.

The most important option is the network address of the server, but you can add many other client options at any time. Administrators can also control client options by creating client option sets on the server that are used in conjunction with client option files on client nodes.

**Related tasks:**

“Creating client option sets on the server”

“Managing client option sets” on page 475

**Related reference:**

“Connecting nodes with the server” on page 439

## Creating client option sets on the server

An administrator can create a set of client options to be used by a client node that is at IBM Tivoli Storage Manager Version 3 or later. The client options specified in the set are used in conjunction with the client options dsm.opt file.

### About this task

Client option sets allow the administrator to specify additional options that may not be included in the client's option file (dsm.opt). You can specify which clients use the option set with the **REGISTER NODE** or **UPDATE NODE** commands. The client can use these defined options during a backup, archive, restore, or retrieve process.

See the *Backup-Archive Clients Installation and User's Guide* for detailed information about individual client options.

### Procedure

To create a client option set and have the clients use the option set, perform the following steps:

1. Create the client option set with the **DEFINE CLOPTSET** command.
2. Add client options to the option set with the **DEFINE CLIENTOPT** command.

3. Specify which clients should use the option set with the **REGISTER NODE** or **UPDATE NODE** command.

**Related reference:**

"Connecting nodes with the server" on page 439

## Creating a client option set

When you create a client option set, you define a name for the option set and can, optionally, provide a description of the option set.

### Procedure

To provide a description of the option set, issue the following example command:  
define cloptset engbackup description='Backup options for eng. dept.'

**Tip:** The option set is empty when it is first defined.

## Adding client options in an option set

You can add client options in a defined client option set.

### Procedure

Issue the following example command to add a client option (MAXCMDRETRIES) in the ENGBACKUP option set:

```
define clientopt engbackup maxcmdretries 5
```

For a list of client options that you can specify, refer to *Administrative client options* in the *Administrator's Reference*.

The server automatically assigns sequence numbers to the specified options, or you can choose to specify the sequence number for order of processing. This is helpful if you have defined more than one of the same option as in the following example:

```
define clientopt engbackup inclexcl "include d:\admin"
define clientopt engbackup inclexcl "include d:\payroll"
```

A sequence number of 0 is assigned to the option include d:\admin. A sequence number of 1 is assigned to the option include d:\payroll. If you want to specifically process one option before another, include the sequence parameter as follows:

```
define clientopt engbackup inclexcl "include d:\admin" seqnumber=2"
define clientopt engbackup inclexcl "include d:\payroll" seqnumber=1"
```

The options are processed starting with the highest sequence number.

Any include-exclude statements in the server client option set have priority over the include-exclude statements in the local client options file. The server include-exclude statements are always enforced and placed last in the include-exclude list and evaluated before the client include-exclude statements. If the server option set has several include-exclude statements, the statements are processed starting with the first sequence number. The client can issue the **QUERY INCLEXCL** command to show the include-exclude statements in the order that they are processed. **QUERY INCLEXCL** also displays the source of each include-exclude statement.

For more information on the processing of the include-exclude statements see the *Backup-Archive Clients Installation and User's Guide*.

The **FORCE** parameter allows an administrator to specify whether the server forces the client to use an option value. This parameter has no effect on additive options such as INCLEXCL and DOMAIN. The default value is NO. If FORCE=YES, the server



forces the client to use the value, and the client cannot override the value. The following example shows how you can prevent a client from using subfile backup:

```
define clientopt engbackup subfilebackup no force=yes
```

**Related reference:**

“The include-exclude list” on page 42

## **Registering client nodes and assigning them to an option set**

You can register or update a client node and specify an option set for the client to use.

### **Procedure**

Issue the following command to register or update a client node:

```
register node mike pass2eng cloptset=engbackup
```

The client node MIKE is registered with the password pass2eng. When the client node MIKE performs a scheduling operation, his schedule log entries are kept for five days.

## **Managing client option sets**

Administrators can perform several activities to manage client option sets.

### **Procedure**

Perform the following steps:

1. Update the sequence number for a client option.

You can update the sequence number for a client option to change its processing order. This is helpful if you have more than one of the same option, for example several INCLUDE options.

The following command shows you how to change the sequence number for the DATEFORMAT option from 0 to 9:

```
update clientopt engbackup dateformat 0 9
```

2. Delete an option from a client option set.

You can remove an option that is defined in a client option set.

The following example shows you how to remove the SCHEDMODE polling option from the financeschd option set:

```
delete clientopt financeschd schedmode
```

3. Copy a client option set. You can copy an existing client option to another option set.

The following example shows you how to copy the engbackup option set to financeschd option set:

```
copy cloptset engbackup financeschd
```

4. Request information about a client option set. To display information about the contents of a client option set, issue the following command:

```
query cloptset financeschd
```

5. Update the description for a client option set. You can update the description for a client option set. The following example shows you how to update the description for the engbackup option set:

```
update cloptset engbackup description='Scheduling information'
```



6. Delete a client option set. When you delete a client option set, client node references to the option set are null. The clients continue to use their existing client options file. The following example shows you how to delete the engbackup client option set:

```
delete cloptset engbackup
```

---

## Managing IBM Tivoli Storage Manager sessions

Each time an administrator or client node connects with the server, an administrative or client session is established. IBM Tivoli Storage Manager tracks its sessions in the server database.

Backup-archive clients are eligible for client restartable restore sessions; however, application clients are not.

Tivoli Storage Manager can hold a client restore session in DSMC loop mode until one of these conditions is met:

- The device class MOUNTRETENTION limit is satisfied.
- The client IDLETIMEOUT period is satisfied.
- The loop session ends.

Administrators can perform the following activities when managing IBM Tivoli Storage Manager sessions:

| Task                                         | Required Privilege Class |
|----------------------------------------------|--------------------------|
| Displaying information about client sessions | Any administrator        |
| Canceling a client session                   | System or operator       |
| Disabling or enabling a client session       | System or operator       |

### Related concepts:

“Managing client restartable restore sessions” on page 480

## Displaying information about IBM Tivoli Storage Manager sessions

Each client session is assigned a unique session number.

### Procedure

To display information about client sessions, issue the following command:

```
query session
```

The output shows a sample client session report:

| Sess Number | Comm. Method | Sess State | Wait Time | Bytes Sent | Bytes Recvd | Sess Type | Platform | Client Name |
|-------------|--------------|------------|-----------|------------|-------------|-----------|----------|-------------|
| -----       | -----        | -----      | -----     | -----      | -----       | -----     | -----    | -----       |
| 471         | Tcp/Ip       | IdleW      | 36 S      | 592        | 186 Node    | WinNT     | JOEUSER  |             |
| 472         | Tcp/Ip       | RecvW      | 0 S       | 730        | 638 Node    | WinNT     | STATION1 |             |

You can determine the state of the server by examining the session state and wait time to determine how long (in seconds, minutes, or hours) the session has been in the current state.

## Server session states

The server session state can be Start, Run, End, RecvW, SendW, MediaW, or IdleW.

See the following definitions for the server session states:

**Start** Connecting with a client session.

**Run** Executing a client request.

**End** Ending a client session.

### RecvW

Waiting to receive an expected message from the client while a database transaction is in progress. A session in this state is subject to the COMMTIMEOUT limit.

### SendW

Waiting for acknowledgment that the client has received a message sent by the server.

### MediaW

Waiting for removable media to become available.

Aggregation can cause multiple media waits within a transaction and is indicated by one client message.

**Important:** If **QUERY SESSION FORMAT=DETAILED** is specified, the Media Access Status field displays the type of media wait state.

### IdleW

Waiting for communication from the client, and a database transaction is NOT in progress. A session in this state is subject to the limit as specified in the server options file.

If a client does not initiate communication within the specified time limit set by the IDLETIMEOUT option in the server options file, then the server cancels the client session.

For example, if the IDLETIMEOUT option is set to 30 minutes, and a user does not initiate any operations within those 30 minutes, then the server cancels the client session. The client session is automatically reconnected to the server when it starts to send data again.

### Related tasks:

“Reclaiming space in sequential-access storage pools” on page 382

## Canceling an IBM Tivoli Storage Manager session

You can cancel a client session with the **CANCEL SESSION** command and the associated session number. Canceling sessions may be necessary when a user's computer is not responding or as a prerequisite to halting the server.

### About this task

Administrators can display a session number with the **QUERY SESSION** command.

Users and administrators whose sessions have been canceled must reissue their last command to access the server again.

If an operation, such as a backup or an archive process, is interrupted when you cancel the session, the server rolls back the results of the current transaction. That

is, any changes made by the operation that are not yet committed to the database are undone. If necessary, the cancellation process may be delayed.

If the session is in the Run state when it is canceled, the cancel process does not take place until the session enters the SendW, RecvW, or IdleW state.

If the session you cancel is currently waiting for a media mount, the mount request is automatically canceled. If a volume associated with the client session is currently being mounted by an automated library, the cancel may not take effect until the mount is complete.

## Procedure

For example, to cancel a session for client MARIE:

1. Query client sessions to determine the session number. The example report displays MARIE's session number 6.
2. Cancel node MARIE's session by entering:  
`cancel session 6`

## Results

If you want to cancel all backup and archive sessions, enter:

```
cancel session all
```

### Related tasks:

"Displaying information about IBM Tivoli Storage Manager sessions" on page 476

### Related reference:

"Server session states" on page 477

## When a client session is automatically canceled

Client sessions can be automatically canceled.

The reasons are based on the settings of the following server options:

### COMMTIMEOUT

Specifies how many seconds the server waits for an expected client message during a transaction that causes a database update. If the length of time exceeds this time-out, the server rolls back the transaction that was in progress and ends the client session. The amount of time it takes for a client to respond depends on the speed and processor load for the client and the network load.

### IDLETIMEOUT

Specifies how many minutes the server waits for a client to initiate communication. If the client does not initiate communication with the server within the time specified, the server ends the client session. For example, the server prompts the client for a scheduled backup operation but the client node is not started. Another example can be that the client program is idle while waiting for the user to choose an action to perform (for example, backup archive, restore, or retrieve files). If a user starts the client session and does not choose an action to perform, the session will time out. The client program automatically reconnects to the server when the user chooses an action that requires server processing. A large number of idle sessions can inadvertently prevent other users from connecting to the server.

## THROUGHPUTDATATHRESHOLD

Specifies a throughput threshold, in kilobytes per second, a client session must achieve to prevent being cancelled after the time threshold is reached. Throughput is computed by adding send and receive byte counts and dividing by the length of the session. The length does not include time spent waiting for media mounts and starts at the time a client sends data to the server for storage. This option is used in conjunction with the THROUGHPUTTIMETHRESHOLD server option.

## THROUGHPUTTIMETHRESHOLD

Specifies the time threshold, in minutes, for a session after which it may be canceled for low throughput. The server ends a client session when it has been active for more minutes than specified and the data transfer rate is less than the amount specified in the THROUGHPUTDATATHRESHOLD server option.

Refer to the *Administrator's Reference* for more information.

## Disabling or enabling access to the server

You can prevent clients from establishing sessions with the server by issuing the **DISABLE SESSIONS** command.

### About this task

This command does not cancel sessions currently in progress or system processes such as migration and reclamation.

| Task                                                    | Required Privilege Class |
|---------------------------------------------------------|--------------------------|
| Disabling and enabling client node access to the server | System or operator       |
| Displaying server status                                | Any administrator        |

### Procedure

To disable client node access to the server, issue the following example command:

```
disable sessions
```

You continue to access the server and current client activities complete unless a user logs off or an administrator cancels a client session. After the client sessions have been disabled, you can enable client sessions and resume normal operations by issuing the following command:

```
enable sessions
```

You can issue the **QUERY STATUS** command to determine if the server is enabled or disabled.

#### Related tasks:

“Locking and unlocking client nodes” on page 449

## Managing client restartable restore sessions

Some large restore operations might invoke a special type of restore operation called client restartable restore sessions. These special sessions allow users to restart the restore session from where it stopped, if the session was interrupted.

Tivoli Storage Manager identifies client restartable restore sessions by displaying message ANS1247I on the client computer when the session starts. These restore sessions can be restarted if the restore interval has not expired.

After a restore operation that comes directly from tape, the Tivoli Storage Manager server does not release the mount point to IDLE status from INUSE status. The server does not close the volume to allow additional restore requests to be made to that volume. However, if there is a request to perform a backup in the same session, and that mount point is the only one available, then the backup operation stops and the server issues message ANS1114I. You can avoid this by closing the DSMC restore session after the restore operation completes. This releases the mount point for subsequent sessions.

When a restartable restore session is saved in the server database the file space is locked in server storage. The following rules are in effect during the file space lock:

- Files residing on sequential volumes that are associated with the file space cannot be moved.
- Files associated with the restore cannot be backed up. However, files that are not associated with the restartable restore session that are in the same file space are eligible for backup. For example, if you are restoring all files in directory A, you can still back up files in directory B from the same file space.

The RESTOREINTERVAL server option allows administrators to specify how long client restartable restore sessions are saved in the server database. Consider scheduled backup operations when you set this option.

For more information, refer to the RESTOREINTERVAL server option in the *Administrator's Reference*.

Administrators can perform the following activities when managing client restartable restore sessions:

| Task                                                             | Required Privilege Class |
|------------------------------------------------------------------|--------------------------|
| Displaying information about client restartable restore sessions | Any administrator        |
| Canceling client restartable restore sessions                    | System or operator       |
| Interrupting client restartable restore sessions                 | System or operator       |

## Displaying information about a client restartable restore session

You can display information about client restartable restore sessions with the **QUERY RESTORE** command.

### Procedure

To determine which client nodes have eligible restartable restore sessions, issue the following example command:

```
query restore
```

Restartable restore sessions have a negative session number.

## Canceling a client restartable restore session

When a client restore session is in a restartable state, the file space is locked in server storage and no files can be moved from sequential volumes. This prevents the data from being migrated, moved, reclaimed, or backed up by another operation.

### About this task

These sessions will automatically expire when the specified restore interval has passed.

An administrator can cancel a restartable restore session that is in an active or restartable state. If the restore session is active, any outstanding mount requests related to the active session are automatically canceled. When a restartable restore session is canceled with the **CANCEL RESTORE** command, it cannot be restarted from the point of interruption. A restartable restore session always has a negative session number.

### Procedure

To cancel a restartable restore session, you must specify the session number. For example:

```
cancel restore -1
```

## Interrupting an active client restartable restore session

An administrator can interrupt an active restartable restore session by canceling the session, but the session can not then be restarted.

### About this task

A session that ends prematurely through an error or ends by an administrator using CTRL-C on the Tivoli Storage Manager client might be restartable. Issue the **QUERY RESTORE** command to show the restartable restore sessions. A session with a negative number can be restarted.

### Procedure

Issue the following command to cancel a session:

```
cancel session -2
```

Session -2 cannot be restarted after you issue this command.



---

## Chapter 13. Implementing policies for client data

Policies are rules that you set at the IBM Tivoli Storage Manager server to help you manage client data. Policies control how and when client data is stored.

For example:

- How and when files are backed up and archived to server storage
- How space-managed files are migrated to server storage
- The number of copies of a file and the length of time copies are kept in server storage

IBM Tivoli Storage Manager provides a standard policy that sets rules to provide a basic amount of protection for data on workstations. If this standard policy meets your needs, you can begin using Tivoli Storage Manager immediately.

The server process of expiration is one way that the server enforces policies that you define. Expiration processing determines when files are no longer needed, that is, when the files are expired. For example, if you have a policy that requires only four copies of a file be kept, the fifth and oldest copy is expired. During expiration processing, the server removes entries for expired files from the database, effectively deleting the files from server storage.

You might need more flexibility in your policies than the standard policy provides. To accommodate individual user's needs, you may fine-tune the STANDARD policy, or create your own policies. Some types of clients or situations require special policy. For example, you may want to enable clients to restore backed-up files to a specific point-in-time.

Policy can be distributed from a configuration manager to managed servers.

### **Related tasks:**

"Policy-based data management" on page 36

---

## Basic policy planning

Start out simply to plan your policy. You may be able to use the default policy that comes with the server.

Ask the following questions:

- How many backup versions do clients need?
- How long do clients need the backup versions?

Examine the default policy to see if it meets your needs:

- Up to two backup versions of a file on the client's system are retained in server storage.
- The most recent backup version is retained for as long as the original file is on the client file system. All other versions are retained for up to 30 days after they become inactive.
- One backup version of a file that has been deleted from the client's system is retained in server storage for 60 days.
- An archive copy is kept for up to 365 days.



The server manages files based on whether the files are active or inactive. The most current backup or archived copy of a file is the active version. All other versions are called inactive versions. An active version of a file becomes inactive when:

- A new backup is made
- A user deletes that file on the client node and then runs an incremental backup

Policy determines how many inactive versions of files the server keeps, and for how long. When files exceed the criteria, the files expire. Expiration processing can then remove the files from the server database.

**Related tasks:**

“Client operations controlled by policy” on page 38

## Reviewing the standard policy

The standard policy consists of a standard policy domain, policy set, management class, backup copy group, and archive copy group. Each of these parts is named STANDARD.

The attributes of the default policy are as follows:

*Table 41. Summary of default policy*

| Policy                                                                                                                                                                                                                                                                             | Object where the policy is set                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Backup Policies                                                                                                                                                                                                                                                                    |                                                                                                               |
| Files are backed up to the default disk storage pool, BACKUPPOOL.                                                                                                                                                                                                                  | STANDARD backup copy group, <b>DESTINATION</b> parameter                                                      |
| An incremental backup is performed only if the file has changed since the last backup.                                                                                                                                                                                             | STANDARD backup copy group, <b>MODE</b> parameter                                                             |
| Files cannot be backed up while they are being modified.                                                                                                                                                                                                                           | STANDARD backup copy group, <b>SERIALIZATION</b> parameter                                                    |
| Up to two backup versions of a file on the client's system are retained in server storage. The most recent backup version is retained for as long as the original file is on the client file system. All other versions are retained for up to 30 days after they become inactive. | STANDARD backup copy group, the following parameters:<br><b>VEREXISTS</b><br><b>RETEXTRA</b><br><b>REONLY</b> |
| One backup version of a file that has been deleted from the client's system is retained in server storage for 60 days.                                                                                                                                                             | STANDARD backup copy group, <b>VERDELETED</b> parameter                                                       |
| When a backed up file is no longer associated with a backup copy group, it remains in server storage for 30 days (backup retention grace period).                                                                                                                                  | STANDARD policy domain, <b>BACKRETENTION</b> parameter                                                        |
| Archive Policies                                                                                                                                                                                                                                                                   |                                                                                                               |
| Files are archived in the default disk storage pool, ARCHIVEPOOL.                                                                                                                                                                                                                  | STANDARD archive copy group, <b>DESTINATION</b> parameter                                                     |
| Files cannot be archived while they are being modified.                                                                                                                                                                                                                            | STANDARD archive copy group, <b>SERIALIZATION</b> parameter                                                   |
| An archive copy is kept for up to 365 days.                                                                                                                                                                                                                                        | STANDARD archive copy group, <b>RETVER</b> parameter                                                          |
| When an archived file is no longer associated with an archive copy group, it remains in server storage for 365 days (archive retention grace period).                                                                                                                              | STANDARD policy domain, <b>ARCHRETENTION</b> parameter                                                        |
| General                                                                                                                                                                                                                                                                            |                                                                                                               |

Table 41. Summary of default policy (continued)

| Policy                                                         | Object where the policy is set                                      |
|----------------------------------------------------------------|---------------------------------------------------------------------|
| The default management class is STANDARD.                      | STANDARD policy set (ACTIVE),<br><b>ASSIGN DEFMGMTCLASS</b> command |
| Tivoli Storage Manager for Space Management (HSM) Policy       |                                                                     |
| Client files are not space-managed (there are no HSM clients). | STANDARD management class,<br><b>SPACEMGTECHNIQUE</b> parameter     |

**Related reference:**

“Policy components” on page 36

## Getting users started

When you register a client node, the default is to assign the node to the STANDARD policy domain. If users register their own workstations during open registration, they are also assigned to the STANDARD policy domain.

### About this task

To help users take advantage of IBM Tivoli Storage Manager, you can further tune the policy environment by performing the following tasks:

- Define sets of client options for the different groups of users.
- Help users with creating the include-exclude list. For example:
  - Create include-exclude lists to help inexperienced users who have simple file management needs. One way to do this is to define a basic include-exclude list as part of a client option set. This also gives the administrator some control over client usage.
  - Provide a sample include-exclude list to users who want to specify how the server manages their files. You can show users who prefer to manage their own files how to:
    - Request information about management classes
    - Select a management class that meets backup and archive requirements
    - Use include-exclude options to select management classes for their files

For information on the include-exclude list, see the user’s guide for the appropriate client.

- Automate incremental backup procedures by defining schedules for each policy domain. Then associate schedules with client nodes in each policy domain.

**Related tasks:**

“Creating client option sets on the server” on page 473

Chapter 15, “Scheduling operations for client nodes,” on page 549

**Related reference:**

“The include-exclude list” on page 42

## Changing policy

Some types of clients and situations require policy changes. For example, if you need to direct client data to storage pools different from the default storage pools, you need to change policy.

### About this task

To change policy in a policy domain, you must replace the ACTIVE policy set. You replace the ACTIVE policy set by activating another policy set.

### Procedure

Perform the following steps:

1. Create or modify a policy set so that it contains the policy that you want to implement.
  - Create a new policy set either by defining a new policy set or by copying a policy set.
  - Modify an existing policy set (it cannot be the ACTIVE policy set).

**Note:** You cannot directly modify the ACTIVE policy set. If you want to make a small change to the ACTIVE policy set, copy the policy to modify it and follow the steps here.

2. Update the management classes, backup copy groups, and archive copy groups in the new policy set, depending on the changes that you are making.
3. Validate the policy set.
4. Activate the policy set. The contents of your new policy set becomes the ACTIVE policy set.

#### Related tasks:

“Policy configuration scenarios” on page 507

#### Related reference:

“Creating your own policies” on page 492

## File expiration and expiration processing

An expired file is a file that the server no longer needs to keep, according to policy.

Files expire under the following conditions:

- Users delete file spaces from client nodes
- Users expire files by using the EXPIRE command on the client
- A file that is a backup version exceeds the criteria in the backup copy group (how long a file is kept and how many inactive versions of a file are kept)
- An archived file exceeds the time criteria in the archive copy group (how long archived copies are kept)
- A backup set exceeds the retention time that is specified for it

#### Important:

1. A base file is not eligible for expiration until all of its dependent subfiles expire.
2. An archive file is not eligible for expiration if there is a deletion hold on it. If a file is not held, it is handled according to existing expiration processing.

If you use the policies that are defined on the target replication server to manage replicated client-node data, files that are marked for immediate expiration on the

source replication server are not deleted until they are replicated to the target replication server. Files cannot be deleted by expiration processing in the following scenarios:

- If the metadata for a file is updated, you must replicate the file to the target replication server before it is deleted by expiration processing.
- If a backup file that is due to expire on the source replication server and it is not yet replicated to the target replication server, replicate the file before it is deleted.

The server deletes expired files from the server database only during expiration processing. After expired files are deleted from the database, the server can reuse the space in the storage pools that was occupied by expired files. Ensure that expiration processing runs periodically to allow the server to reuse space.

Expiration processing also removes from the database any restartable restore sessions that exceed the time limit set for such sessions by the `RESTOREINTERVAL` server option.

**Related concepts:**

“Managing client restartable restore sessions” on page 480

**Related reference:**

“Running expiration processing to delete expired files” on page 514

---

## How Tivoli Storage Manager selects files for policy operations

The IBM Tivoli Storage Manager selects files for full and partial incremental backups, selective backups, logical volume backups, archives, and automatic migration from an HSM client (Tivoli Storage Manager for Space Management).

### Incremental backup

Backup-archive clients can choose to back up their files using full or partial incremental backup. A full incremental backup ensures that clients' backed-up files are always managed according to policies. Clients are urged to use full incremental backup whenever possible.

If the amount of time for backup is limited, clients may sometimes need to use partial incremental backup. A partial incremental backup should complete more quickly and require less memory. When a client uses partial incremental backup, only files that have changed since the last incremental backup are backed up. Attributes in the management class that would cause a file to be backed up when doing a full incremental backup are ignored. For example, unchanged files are not backed up even when they are assigned to a management class that specifies absolute mode and the minimum days between backups (frequency) has passed.

The server also does less processing for a partial incremental backup. For example, the server does not expire files or rebind management classes to files during a partial incremental backup.

If clients must use partial incremental backups, they should periodically perform full incremental backups to ensure that complete backups are done and backup files are stored according to policies. For example, clients can do partial incremental backups every night during the week, and a full incremental backup on the weekend.

Performing full incremental backups is important if clients want the ability to restore files to a specific time. Only a full incremental backup can detect whether files have been deleted since the last backup. If full incremental backup is not done often enough, clients who restore to a specific time may find that many files that had actually been deleted from the workstation get restored. As a result, a client's file system may run out of space during a restore process.

**Related reference:**

“Setting policy to enable point-in-time restore for clients” on page 513

## **Full incremental backup**

When a user requests a full incremental backup, the IBM Tivoli Storage Manager determines its eligibility.

### **Procedure**

The IBM Tivoli Storage Manager ensures the following items are identified:

1. Checks each file against the user's include-exclude list:
  - Files that are excluded are not eligible for backup.
  - If files are not excluded and a management class is specified with the INCLUDE option, IBM Tivoli Storage Manager uses that management class.
  - If files are not excluded but a management class is not specified with the INCLUDE option, IBM Tivoli Storage Manager uses the default management class.
  - If no include-exclude list exists, all files in the client domain are eligible for backup, and IBM Tivoli Storage Manager uses the default management class.
2. Checks the management class of each included file:
  - If there is a backup copy group, the process continues with step 3.
  - If there is no backup copy group, the file is not eligible for backup.
3. Checks the mode, frequency, and serialization defined in the backup copy group.

**Mode** Specifies whether the file is backed up only if it has changed since the last backup (modified) or whenever a backup is requested (absolute).

**Frequency**

Specifies the minimum number of days that must elapse between backups.

**Tip:** For Windows this attribute is ignored during a journal-based backup.

**Serialization**

Specifies how files are handled if they are modified while being backed up and what happens if modification occurs.

- If the mode is modified and the minimum number of days have elapsed since the file was last backed up, IBM Tivoli Storage Manager determines if the file has been changed since it was last backed up:
  - If the file has been changed and the serialization requirement is met, the file is backed up.
  - If the file has not been changed, it is not backed up.
- If the mode is modified and the minimum number of days have not elapsed since the file was last backed up, the file is not eligible for backup.

- If the mode is absolute, the minimum number of days have elapsed since the file was last backed up, and the serialization requirement is met, the file is backed up.
- If the mode is absolute and the minimum number of days have not elapsed since the file was last backed up, the file is not eligible for backup.

### **Partial incremental backup**

When a user requests a partial incremental backup, the IBM Tivoli Storage Manager determines its eligibility.

#### **Procedure**

Tivoli Storage Manager ensures the following items are identified:

1. Checks each file against the user's include-exclude list:
  - Files that are excluded are not eligible for backup.
  - If files are not excluded and a management class is specified with the INCLUDE option, the server uses that management class.
  - If files are not excluded but a management class is not specified with the INCLUDE option, the server uses the default management class.
  - If no include-exclude list exists, all files in the client domain are eligible for backup, and the server uses the default management class.
2. Checks the management class of each included file:
  - If there is a backup copy group, the process continues with step 3.
  - If there is no backup copy group, the file is not eligible for backup.
3. Checks the date and time of the last incremental backup by the client, and the serialization requirement defined in the backup copy group. (Serialization specifies how files are handled if they are modified while being backed up and what happens if modification occurs.)
  - If the file has not changed since the last incremental backup, the file is not backed up.
  - If the file has changed since the last incremental backup and the serialization requirement is met, the file is backed up.

### **Selective backup**

When a user requests a selective backup, the IBM Tivoli Storage Manager ensures its eligibility.

#### **Procedure**

IBM Tivoli Storage Manager ensures the following items are identified:

1. Checks the file against any include or exclude statements contained in the user include-exclude list:
  - Files that are not excluded are eligible for backup. If a management class is specified with the INCLUDE option, IBM Tivoli Storage Manager uses that management class.
  - If no include-exclude list exists, the files selected are eligible for backup, and IBM Tivoli Storage Manager uses the default management class.
2. Checks the management class of each included file:

- If the management class contains a backup copy group and the serialization requirement is met, the file is backed up. Serialization specifies how files are handled if they are modified while being backed up and what happens if modification occurs.
- If the management class does not contain a backup copy group, the file is not eligible for backup.

## Results

An important characteristic of selective backup is that a file is backed up without regard for whether the file has changed. This result may not always be what you want. For example, suppose a management class specifies to keep three backup versions of a file. If the client uses incremental backup, the file is backed up only when it changes, and the three versions in storage will be at different levels. If the client uses selective backup, the file is backed up regardless of whether it has changed. If the client uses selective backup on the file three times without changing the file, the three versions of the file in server storage are identical. Earlier, different versions are lost.

## Logical volume backup

When a user requests a logical volume backup, the IBM Tivoli Storage Manager determines its eligibility.

### Procedure

IBM Tivoli Storage Manager ensures the following items are identified:

1. Checks the specification of the logical volume against any include or exclude statements contained in the user include-exclude list:
  - If no include-exclude list exists, the logical volumes selected are eligible for backup, and IBM Tivoli Storage Manager uses the default management class.
  - Logical volumes that are not excluded are eligible for backup. If the include-exclude list has an INCLUDE option for the volume with a management class specified, IBM Tivoli Storage Manager uses that management class. Otherwise, the default management class is used.
2. Checks the management class of each included logical volume:
  - If the management class contains a backup copy group and the logical volume meets the serialization requirement, the logical volume is backed up. Serialization specifies how logical volumes are handled if they are modified while being backed up and what happens if modification occurs.
  - If the management class does not contain a backup copy group, the logical volume is not eligible for backup.

## Archive

When a user requests the archiving of a file or a group of files, the IBM Tivoli Storage Manager determine its eligibility.

### Procedure

IBM Tivoli Storage Manager ensures the following items are identified:

1. Checks the files against the user's include-exclude list to see if any management classes are specified:
  - IBM Tivoli Storage Manager uses the default management class for files that are not bound to a management class.



- If no include-exclude list exists, IBM Tivoli Storage Manager uses the default management class unless the user specifies another management class. See the user's guide for the appropriate client for details.
2. Checks the management class for each file to be archived.
    - If the management class contains an archive copy group and the serialization requirement is met, the file is archived. Serialization specifies how files are handled if they are modified while being archived and what happens if modification occurs.
    - If the management class does not contain an archive copy group, the file is not archived.

## Results

If you need to frequently create archives for the same data, consider using instant archive (backup sets) instead. Frequent archive operations can create a large amount of metadata in the server database resulting in increased database growth and decreased performance for server operations such as expiration. Frequently, you can achieve the same objectives with incremental backup or backup sets. Although the archive function is a powerful way to store inactive data with fixed retention, it should not be used on a frequent and large scale basis as the primary backup method.

### Related concepts:

"Creating and using client backup sets" on page 533

## Automatic migration from a client node

A file is eligible for automatic migration from an HSM client (Tivoli Storage Manager for Space Management) if it meets certain criteria.

The criteria for a file to be eligible for automatic migration from an HSM client are displayed in the following list:

- It resides on a node on which the root user has added and activated hierarchical storage management. It must also reside in a local file system to which the root user has added space management, and not in the root (/) or /tmp file system.
- It is not excluded from migration in the include-exclude list.
- It meets management class requirements for migration:
  - The file is not a character special file, a block special file, a FIFO special file (that is, a named pipe file) or a directory.
  - The file is assigned to a management class that calls for space management.
  - The management class calls for automatic migration after a specified number of days, and that time has elapsed.
  - A backup version of the file exists if the management class requires it.
  - The file is larger than the stub file that would replace it (plus one byte) or the file system block size, whichever is larger.



## Creating your own policies

You can create your own policies by defining the parts of a policy and specifying each attribute, or by copying existing policy parts and updating only those attributes that you want to change.

Table 42 describes Tivoli Storage Manager policy objects and lists the server commands available to work with them.

*Table 42. Tasks for policies*

| Policy object    | Tasks                                                                                                                                                                                                                                                                                                                                                                                                   | Server commands                                                                                                                                                                                                                                    |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Policy domain    | <ul style="list-style-type: none"><li>Define a new policy domain from scratch</li><li>Create a policy domain by copying an existing domain and updating it</li><li>Display information about a policy domain</li><li>Delete a policy domain</li></ul>                                                                                                                                                   | Use the following commands to work with policy domains:<br><b>DEFINE DOMAIN</b><br><b>COPY DOMAIN</b><br><b>UPDATE DOMAIN</b><br><b>QUERY DOMAIN</b><br><b>DELETE DOMAIN</b>                                                                       |
| Policy set       | <ul style="list-style-type: none"><li>Define a policy set in a policy domain</li><li>Create a copy of a policy set within the same policy domain</li><li>Change the description for a policy set</li><li>Validate and activate a policy set to put it into effect</li><li>Display information about a policy set</li><li>Delete a policy set</li></ul>                                                  | Use the following commands to work with policy sets:<br><b>DEFINE POLICYSET</b><br><b>COPY POLICYSET</b><br><b>UPDATE POLICYSET</b><br><b>ACTIVATE POLICYSET</b><br><b>VALIDATE POLICYSET</b><br><b>QUERY POLICYSET</b><br><b>DELETE POLICYSET</b> |
| Copy group       | <ul style="list-style-type: none"><li>Define backup and archive copy groups</li><li>Change the parameters for a backup or archive copy group</li><li>Display information about a copy group</li><li>Delete a copy group</li></ul>                                                                                                                                                                       | Use the following commands to work with copy groups:<br><b>DEFINE COPYGROUP</b><br><b>UPDATE COPYGROUP</b><br><b>QUERY COPYGROUP</b><br><b>DELETE COPYGROUP</b>                                                                                    |
| Management class | <ul style="list-style-type: none"><li>Define a new management class to a policy set</li><li>Create a copy of a management class within the same policy set</li><li>Change the parameters for a management class</li><li>Assign a default management class to a nonactive policy set in a policy domain</li><li>Display information about a management class</li><li>Delete a management class</li></ul> | Use the following commands to work with management classes:<br><b>DEFINE MGMTCLASS</b><br><b>COPY MGMTCLASS</b><br><b>UPDATE MGMTCLASS</b><br><b>ASSIGN DEFMGMTCLASS</b><br><b>QUERY MGMTCLASS</b><br><b>DELETE MGMTCLASS</b>                      |

Table 43 shows that an advantage of copying existing policy parts is that some associated parts are copied in a single operation.

*Table 43. Cause and effect of copying existing policy parts*

| If you copy this... | Then you create this...                                                                                                                                                                                                                                                    |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Policy Domain       | A new policy domain with: <ul style="list-style-type: none"><li>• A copy of each policy set from the original domain</li><li>• A copy of each management class in each original policy set</li><li>• A copy of each copy group in each original management class</li></ul> |
| Policy Set          | A new policy set in the same policy domain with: <ul style="list-style-type: none"><li>• A copy of each management class in the original policy set</li><li>• A copy of each copy group in the original management class</li></ul>                                         |
| Management Class    | A new management class in the same policy set and a copy of each copy group in the management class                                                                                                                                                                        |

**Related reference:**

“Policy components” on page 36

## Defining and updating a policy domain

When you update or define a policy domain, you specify the backup retention grace period, the archive retention grace period, and the destination for active backup data.

See the following definitions:

### **Backup Retention Grace Period**

Specifies the number of days to retain an inactive backup version when the server cannot rebind the file to an appropriate management class. The backup retention grace period protects backup versions from being immediately expired when the management class to which a file is bound no longer exists or no longer contains a backup copy group, and the default management class does not contain a backup copy group.

Backup versions of the file managed by the grace period are retained in server storage only for the backup retention grace period. This period starts from the day of the backup. For example, if the backup retention grace period for the STANDARD policy domain is used and set to 30 days, backup versions using the grace period expire in 30 days from the day of the backup.

Backup versions of the file continue to be managed by the grace period unless one of the following events occur:

- The client binds the file to a management class containing a backup copy group and then backs up the file
- A backup copy group is added to the file's management class
- A backup copy group is added to the default management class

### **Archive Retention Grace Period**

Specifies the number of days to retain an archive copy when the management class for the file no longer contains an archive copy group and the default management class does not contain an archive copy group. The retention grace period protects archive copies from being immediately expired.

The archive copy of the file managed by the grace period is retained in server storage for the number of days specified by the archive retention grace period. This period starts from the day on which the file is first archived. For example, if the archive retention grace period for the policy domain STANDARD is used, an archive copy expires 365 days from the day the file is first archived.

The archive copy of the file continues to be managed by the grace period unless an archive copy group is added to the file's management class or to the default management class.

#### **Destination for Active Backup Data**

Specifies the names active-data pools that store active versions of backup data for nodes assigned to the domain. Before the IBM Tivoli Storage Manager server writes data to an active-data pool, it verifies that the node owning the data is assigned to a domain that has the active-data pool defined in the list of active-data pools. If the server verifies that the node meets this criteria, the data is stored in the active-data pool. If the node does not meet the criteria, then the data is not stored in the active-data pool.

If client backup is performed using simultaneous-write operations to an active-data pool, the server performs the verification during backup operations by IBM Tivoli Storage Manager backup-archive clients or by application clients using the IBM Tivoli Storage Manager API. The verification is also performed when active data is being copied using the **COPY ACTIVE DATA** command.

## **Managing backup copy groups**

When you are defining and updating a backup copy group, you will have to know where to store it, how to manage files that are modified during backup, how to designate the frequency of your backups, and how to retain the backup versions.

#### **Related reference:**

"Where to store backed-up files"

"How to manage files that are modified during backup" on page 495

"Defining the frequency of backing up files" on page 496

"Retaining backup versions" on page 497

#### **Where to store backed-up files**

Specify a storage pool where the server initially stores the files associated with this backup copy group. This is called the destination.

Your choice can depend on factors such as the following items:

- Whether the server and the client nodes have access to shared devices on a storage area network (SAN).
- The number of client nodes backing up to the storage pool. When many user files are stored in the same storage pool, volume contention can occur as users try to back up to or restore files from the storage pool.
- How quickly the files must be restored. If users need immediate access to backup versions, you may want to specify a disk storage pool as the destination.

**Attention:** You cannot specify a copy storage pool or an active-data pool as the destination.

## How to manage files that are modified during backup

You can use the `SERIALIZATION` attribute on the **DEFINE COPYGROUP** command to specify how files are managed if they are modified during a backup.

This attribute can be one of four values: `STATIC`, `SHRSTATIC` (shared static), `DYNAMIC`, or `SHRDYNAMIC` (shared dynamic).

The value you choose depends on how you want IBM Tivoli Storage Manager to manage files that are modified while they are being backed up.

### Do not back up files that are modified during the backup

You will want to prevent the server from backing up a file while it is being modified. Use one of the following values:

#### **STATIC**

Specifies that IBM Tivoli Storage Manager will attempt to back up the file only once. If the file or directory is modified during a backup, the server does not back it up.

#### **SHRSTATIC (Shared static)**

Specifies that if the file or directory is modified during a backup, the server retries the backup as many times as specified by the `CHANGINGRETRIES` option in the client options file. If the file is modified during the last attempt, the file or directory is not backed up.

### Back up files that are modified during the backup

Some files are in constant use, such as an error log. Consequently, these files may never be backed up when serialization is set to `STATIC` or `SHRSTATIC`. To back up files that are modified during the backup, use one of the following values:

#### **DYNAMIC**

Specifies that a file or directory is backed up on the first attempt, even if the file or directory is modified during the backup.

#### **SHRDYNAMIC (Shared dynamic)**

Specifies that if a file or directory is modified during a backup, the server retries the backup as many times as specified by the `CHANGINGRETRIES` option in the client options file. The server backs up the file on the last attempt, even if the file or directory is being modified.

**Attention:**

- If a file is modified during backup and DYNAMIC or SHRDYNAMIC is specified, then the backup may not contain all the changes and may not be usable. For example, the backup version may contain a truncated record. Under some circumstances, it may be acceptable to capture a dynamic or “fuzzy” backup of a file (the file was changed during the backup). For example, a dynamic backup of an error log file that is continuously appended may be acceptable. However, a dynamic backup of a database file may not be acceptable, since restoring such a backup could result in an unusable database. Carefully consider dynamic backups of files as well as possible problems that may result from restoring potentially “fuzzy” backups.
- When certain users or processes open files, they may deny any other access, including “read” access, to the files by any other user or process. When this happens, even with serialization set to DYNAMIC or SHRDYNAMIC, IBM Tivoli Storage Manager will not be able to open the file at all, so the server cannot back up the file.

**Defining the frequency of backing up files**

You can specify how frequently files can be backed up with two parameters, **FREQUENCY** and **MODE**.

See the following definitions:

**Frequency**

The frequency is the minimum number of days that must elapse between full incremental backups.

**Note:** This attribute is ignored during a journal-based backup.

**Mode** The mode parameter specifies whether a file or directory must have been modified to be considered for backup during a full incremental backup process. IBM Tivoli Storage Manager does not check this attribute when a user requests a partial incremental backup, a selective backup for a file, or a backup of a logical volume. You can select from two modes:

**Modified**

A file is considered for full incremental backup only if it has changed since the last backup. A file is considered changed if any of the following items is different:

- Date on which the file was last modified
- File size
- File owner
- File permissions

**Absolute**

A file is considered for full incremental backup regardless of whether it has changed since the last backup.

The server considers both parameters to determine how frequently files can be backed up. For example, if frequency is 3 and mode is Modified, a file or directory is backed up only if it has been changed and if three days have passed since the last backup. If frequency is 3 and mode is Absolute, a file or directory is backed up after three days have passed whether or not the file has changed.

Use the Modified mode when you want to ensure that the server retains multiple, different backup versions. If you set the mode to Absolute, users may find that they have three identical backup versions, rather than three different backup versions.

Absolute mode can be useful for forcing a full backup. It can also be useful for ensuring that extended attribute files are backed up, because Tivoli Storage Manager does not detect changes if the size of the extended attribute file remains the same.

When you set the mode to Absolute, set the frequency to 0 if you want to ensure that a file is backed up each time full incremental backups are scheduled for or initiated by a client.

## Retaining backup versions

Multiple versions of files are useful when users continually update files and sometimes need to restore the original file from which they started. The most current backup version of a file is called the active version. All other versions are called inactive versions.

You can specify the number of versions to keep by:

- Directly specifying the number of versions  
You specify the number of backup versions with two parameters:
  - **Versions Data Exists** (number of versions to keep when the data still exists on the client node)
  - **Versions Data Deleted** (number of versions to keep when the data no longer exists on the client node)
- Specifying the number of days to keep each backup version  
You specify the number of days to keep backup versions with two parameters:
  - **Retain Extra Versions** (how many days to keep inactive backup versions; the days are counted from the day that the version became inactive)
  - **Retain Only Versions** (how many days to keep the last backup version of a file that has been deleted)
- Specifying a combination of the number of versions and the days to keep them  
Use a combination of the four parameters: **Versions Data Exists**, **Versions Data Deleted**, **Retain Extra Versions**, and **Retain Only Versions**.

These parameters interact to determine the backup versions that the server retains. When the number of inactive backup versions exceeds the number of versions allowed (**Versions Data Exists** and **Versions Data Deleted**), the oldest version expires and the server deletes the file from the database the next time expiration processing runs. How many inactive versions the server keeps is also related to the parameter for how long inactive versions are kept (**Retain Extra Versions**). Inactive versions expire when the number of days that they have been inactive exceeds the value specified for retaining extra versions, even when the number of versions is not exceeded.

**Important:** A base file is not eligible for expiration until all its dependent subfiles have been expired.

For example, see Table 44 on page 498 and Figure 70 on page 498. A client node has backed up the file REPORT.TXT four times in one month, from March 23 to April 23. The settings in the backup copy group of the management class to which REPORT.TXT is bound determine how the server treats these backup versions.

Table 45 shows some examples of how different copy group settings would affect the versions. The examples show the effects as of April 24 (one day after the file was last backed up).

Table 44. Status of REPORT.TXT as of april 24

| Version    | Date Created | Days the Version Has Been Inactive |
|------------|--------------|------------------------------------|
| Active     | April 23     | (not applicable)                   |
| Inactive 1 | April 13     | 1 (since April 23)                 |
| Inactive 2 | March 31     | 11 (since April 13)                |
| Inactive 3 | March 23     | 24 (since March 31)                |

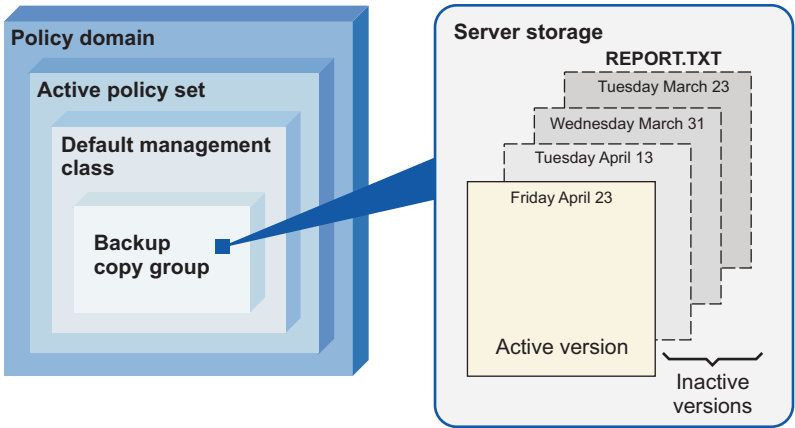


Figure 70. Active and inactive versions of REPORT.TXT

Table 45. Effects of backup copy group policy on backup versions for REPORT.TXT as of april 24. One day after the file was last backed up.

| Versions Data Exists | Versions Data Deleted | Retain Extra Versions | Retain Only Version | Results                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------|-----------------------|-----------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4 versions           | 2 versions            | 60 days               | 180 days            | <b>Versions Data Exists</b> and <b>Retain Extra Versions</b> control the expiration of the versions. The version created on March 23 is retained until the client node backs up the file again (creating a fourth inactive version), or until that version has been inactive for 60 days.<br><br>If the user deletes the REPORT.TXT file from the client node, the server notes the deletion at the next full incremental backup of the client node. From that point, the <b>Versions Data Deleted</b> and <b>Retain Only Version</b> parameters also have an effect. All versions are now inactive. Two of the four versions expire immediately (the March 23 and March 31 versions expire). The April 13 version expires when it has been inactive for 60 days (on June 23). The server keeps the last remaining inactive version, the April 23 version, for 180 days after it becomes inactive. |



Table 45. Effects of backup copy group policy on backup versions for REPORT.TXT as of april 24 (continued). One day after the file was last backed up.

| Versions Data Exists | Versions Data Deleted | Retain Extra Versions | Retain Only Version | Results                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------|-----------------------|-----------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NOLIMIT              | 2 versions            | 60 days               | 180 days            | <p><b>Retain Extra Versions</b> controls expiration of the versions. The inactive versions (other than the last remaining version) are expired when they have been inactive for 60 days.</p> <p>If the user deletes the REPORT.TXT file from the client node, the server notes the deletion at the next full incremental backup of the client node. From that point, the <b>Versions Data Deleted</b> and <b>Retain Only Version</b> parameters also have an effect. All versions are now inactive. Two of the four versions expire immediately (the March 23 and March 31 versions expire) because only two versions are allowed. The April 13 version expires when it has been inactive for 60 days (on June 22). The server keeps the last remaining inactive version, the April 23 version, for 180 days after it becomes inactive.</p> |
| NOLIMIT              | NOLIMIT               | 60 days               | 180 days            | <p><b>Retain Extra Versions</b> controls expiration of the versions. The server does not expire inactive versions based on the maximum number of backup copies. The inactive versions (other than the last remaining version) are expired when they have been inactive for 60 days.</p> <p>If the user deletes the REPORT.TXT file from the client node, the server notes the deletion at the next full incremental backup of the client node. From that point, the <b>Retain Only Version</b> parameter also has an effect. All versions are now inactive. The three of four versions will expire after each of them has been inactive for 60 days. The server keeps the last remaining inactive version, the April 23 version, for 180 days after it becomes inactive.</p>                                                                |
| 4 versions           | 2 versions            | NOLIMIT               | NOLIMIT             | <p><b>Versions Data Exists</b> controls the expiration of the versions until a user deletes the file from the client node. The server does not expire inactive versions based on age.</p> <p>If the user deletes the REPORT.TXT file from the client node, the server notes the deletion at the next full incremental backup of the client node. From that point, the <b>Versions Data Deleted</b> parameter controls expiration. All versions are now inactive. Two of the four versions expire immediately (the March 23 and March 31 versions expire) because only two versions are allowed. The server keeps the two remaining inactive versions indefinitely.</p>                                                                                                                                                                      |

See *Administrator's Reference* for details about the parameters. The following list gives some tips on using the NOLIMIT value:

#### Versions Data Exists

Setting the value to NOLIMIT may require increased storage, but that value may be needed for some situations. For example, to enable client nodes to restore files to a specific point in time, set the value for **Versions Data Exists** to NOLIMIT. Setting the value this high ensures that the server retains versions according to the **Retain Extra Versions** parameter for the copy group.

#### Versions Data Deleted



Setting the value to NOLIMIT may require increased storage, but that value may be needed for some situations. For example, set the value for **Versions Data Deleted** to NOLIMIT to enable client nodes to restore files to a specific point in time. Setting the value this high ensures that the server retains versions according to the **Retain Extra Versions** parameter for the copy group.

#### **Retain Extra Versions**

If NOLIMIT is specified, inactive backup versions are deleted based on the **Versions Data Exists** or **Versions Data Deleted** parameters.

To enable client nodes to restore files to a specific point in time, set the parameters **Versions Data Exists** or **Versions Data Deleted** to NOLIMIT. Set the value for **Retain Extra Versions** to the number of days that you expect clients may need versions of files available for possible point-in-time restoration. For example, to enable clients to restore files from a point in time 60 days in the past, set **Retain Extra Versions** to 60.

#### **Retain Only Version**

If NOLIMIT is specified, the last version is retained forever unless a user or administrator deletes the file from server storage.

#### **Related concepts:**

“Enabling clients to use subfile backup” on page 542

## **Defining and updating an archive copy group**

To define or update an archive copy group, you must specify where the archived files are to be stored, if files can be modified during archive, how long to retain an archived copy, and the minimum amount of days to retain an object.

### **Procedure**

1. Where archived files are to be stored, specify a defined storage pool as the initial destination. Your choice can depend on factors such as:
  - Whether the server and the client nodes have access to shared devices on a SAN
  - The number of client nodes archiving files to the storage pool. When many user files are stored in the same storage pool, volume contention can occur as users archive files to and retrieve files from the storage pool.
  - How quickly the files must be restored. If users need immediate access to archive copies, you could specify a disk storage pool as the destination.
  - Whether the archive copy group is for a management class that is the default for a policy domain. The default management class is used by clients registered in the policy domain, when they do not specify a management class for a file. This includes servers that are registered as clients to this server.

**Note:** You cannot specify a copy storage pool or an active-data pool as a destination.

2. If files can be modified during archive, specify how files are handled if they are modified while being archived. This attribute, called serialization, can be one of four values:

**Static** Specifies that if the file is modified during an archiving process, the server does not archive it. IBM Tivoli Storage Manager does not retry the archive.

### Shared Static

Specifies that if the file is modified during an archive process, the server does not archive it. However, IBM Tivoli Storage Manager retries the archive process as many times as specified by the `CHANGINGRETRIES` option in the client options file.

### Dynamic

Specifies that a file is archived on the first attempt, even if the file is being modified during the archive process.

### Shared Dynamic

Specifies that if the file is modified during the archive attempt, the server archives it on its last try even if the file is being modified. IBM Tivoli Storage Manager retries the archive process as many times as specified by the `CHANGINGRETRIES` option in the client options file.

For most files, set serialization to either static or shared static to prevent the server from archiving a file while it is being modified.

However, you may want to define a copy group with a serialization of shared dynamic or dynamic for files where log records are continuously added, such as an error log. If you only have copy groups that use static or shared static, these files may never be archived because they are constantly in use. With shared dynamic or dynamic, the log files are archived. However, the archive copy may contain a truncated message.

**Attention:** If a file is archived while it is in use (shared dynamic or dynamic serialization), the copy may not contain all the changes and may not be usable.

**Note:** When certain users or processes open files, they deny read access to the files for any other user or process. When this happens, even with serialization set to dynamic or shared dynamic, the server does not back up the file.

3. How long to retain an archived copy specifies the number of days to retain an archived copy in storage. When the time elapses, the archived copy expires and the server deletes the file the next time expiration processing runs.

When a user archives directories, the server uses the default management class unless the user specifies otherwise. If the default management class does not have an archive copy group, the server binds the directory to the management class that currently has the shortest retention time for archive. When you change the retention time for an archive copy group, you may also be changing the retention time for any directories that were archived using that copy group.

The user can change the archive characteristics by using Archive Options in the interface or by using the `ARCHMC` option on the command.

4. The **RETMIN** parameter in archive copy groups specifies the minimum number of days an object will be retained after the object is archived. For objects that are managed by event-based retention policy, this parameter ensures that objects are retained for a minimum time period regardless of when an event triggers retention

After you have defined an archive copy group, using the **RETMIN=n** parameter, ensure that the appropriate archive data will be bound to the management class with this archive copy group. You can do this either by using the default management class or by modifying the client options file to specify the management class for the appropriate archive data.

Placing a deletion hold on an object does not extend its retention period. For example, if an object is thirty days away from the end of its retention period and it is placed on hold for ninety days, it will be eligible for expiration immediately upon the hold being released.

**Related concepts:**

“Deletion hold” on page 517

**Related tasks:**

“Storing data on another server as virtual volumes” on page 726

## Policy set validation and activation

After you have defined a policy set and defined management classes to it, you can validate the policy set and activate the policy set for the policy domain. Only one policy set is active in a policy domain.

### Validating a policy set

When you validate a policy set, the server examines the management class and copy group definitions in the policy set and reports on conditions that are considered if the policy set is activated.

Validation fails if the policy set does not contain a default management class and results in warning messages if any of the following conditions exist.

| Condition                                                                                                                                                                      | Reason for warning                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The storage destinations that are specified for backup, archive, or migration do not refer to defined storage pools.                                                           | A storage pool must exist before you can specify it as a destination.                                                                                                                                                                                                                                                                                                  |
| A storage destination that is specified for backup, archive, or migration is a copy storage pool or an active-data pool.                                                       | The storage destination must be a primary storage pool.                                                                                                                                                                                                                                                                                                                |
| The default management class does not contain a backup or archive copy group.                                                                                                  | When the default management class does not contain a backup or archive copy group, any user files bound to the default management class are not backed up or archived.                                                                                                                                                                                                 |
| The current ACTIVE policy set names a management class that is not defined in the policy set that is being validated.                                                          | When you back up files that were bound to a management class that no longer exists in the active policy set, backup versions are rebound to the default management class.                                                                                                                                                                                              |
|                                                                                                                                                                                | When the management class to which an archive copy is bound no longer exists and the default management class does not contain an archive copy group, the archive retention grace period is used to retain the archive copy.                                                                                                                                           |
| The current ACTIVE policy set contains copy groups that are not defined in the policy set being validated.                                                                     | When you perform a backup and the backup copy group no longer exists in the management class to which a file is bound, backup versions are managed by the default management class. If the default management class does not contain a backup copy group, backup versions are managed by the backup retention grace period, and the workstation file is not backed up. |
| A management class specifies that a backup version must exist before a file can be migrated from a client node, but the management class does not contain a backup copy group. | The contradictions within the management classes can cause problems for Tivoli Storage Manager for Space Management (HSM) users.                                                                                                                                                                                                                                       |

## Activating a policy set

When you activate a policy set, the server performs a final validation of the contents of the policy set and copies the original policy set to the ACTIVE policy set.

You cannot update the ACTIVE policy set; the original and the ACTIVE policy sets are two separate objects. For example, updating the original policy set has no effect on the ACTIVE policy set. To change the contents of the ACTIVE policy set, you must create or change another policy set and then activate that policy set.

If data retention protection is active, the following rules apply during policy set validation and activation. The server can be a managed server and receive policy definitions through enterprise configuration, but it is not possible to activate propagated policy sets if these rules are not satisfied.

- All management classes in the policy set to be validated and activated must contain an archive copy group.
- If a management class exists in the active policy set, a management class with the same name must exist in the policy set to be validated and activated.
- If an archive copy group exists in the active policy set, the corresponding copy group in the policy set to be validated and activated must have RETVER and RETMIN values at least as large as the corresponding values in the active copy group.

### Example: Sample policy objects

Sample policy objects are used to show an example procedure for creating a policy domain with two policy sets.

Figure 71 on page 504 shows the policies for an engineering department.

The domain contains two policy sets that are named STANDARD and TEST. The administrator activated the policy set that is named STANDARD. When you activate a policy set, the server makes a copy of the policy set and names it ACTIVE. Only one policy set can be active at a time.

The ACTIVE policy set contains two management classes: MCENG and STANDARD. The default management class is STANDARD.

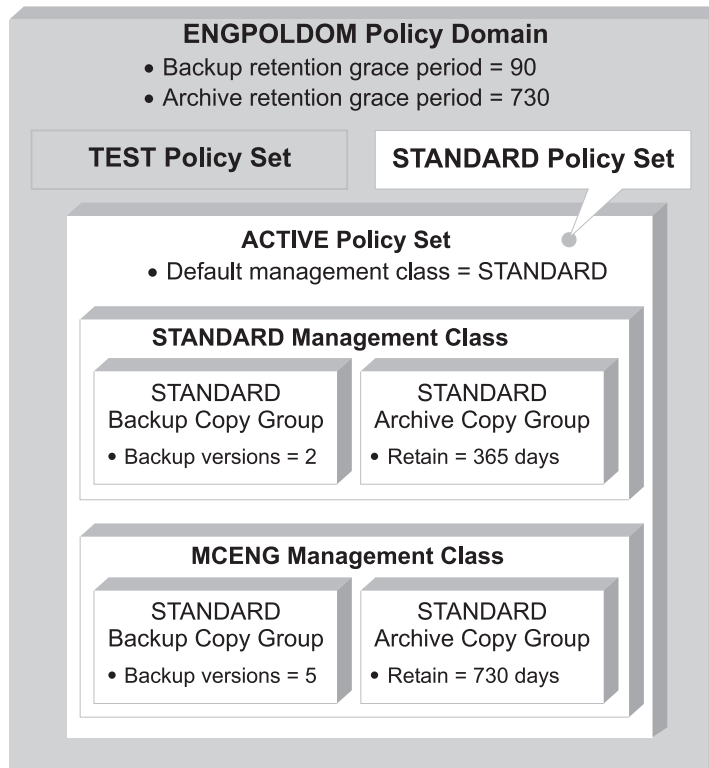


Figure 71. An example of policy objects defined for an engineering department

To create the sample policy, ENGPOLDOM, complete the following steps:

1. Copy the STANDARD policy domain to the ENGPOLDOM policy domain by entering the following command:

```
copy domain standard engpoldom
```

ENGPOLDOM now contains the standard policy set, management class, backup copy group, and archive copy group.

2. Update the policy domain ENGPOLDOM with the following changes:
  - Extend the backup retention grace period to 90 days
  - Extend the archive retention grace period to two years
  - Specify an active-data pool that is named *engactivedata* as the destination for active versions of backup data that belongs to nodes assigned to the domain

Issue the following command:

```
update domain engpoldom description='Engineering Policy Domain'
backretention=90 archretention=730 activedestination=engactivedata
```

3. To create the TEST policy set in the ENGPOLDOM policy domain, copy the STANDARD policy set and name the new policy set TEST by issuing the following command:

```
copy policyset engpoldom standard test
```

4. Update the description of the policy set named TEST:

```
update policyset engpoldom test
description='Policy set for testing'
```

5. Define a new management class that is named MCENG by issuing the following command:

```
define mgmtclass engpoldom standard mceng
```

6. Update the description of the MCENG management class with the **UPDATE MGMTCLASS** command:

```
update mgmtclass engpoldom standard mceng
description='Engineering Management Class for Backup and Archive'
```

7. Define a backup copy group that belongs to the MCENG management class in the STANDARD policy set belonging to the ENGPOLDOM policy domain that can complete the following tasks:

- Let users back up changed files, regardless of how much time has elapsed since the last backup, by using the default value 0 for the Frequency parameter (frequency parameter not specified)
- Retain up to four inactive backup versions when the original file resides on the user workstation, by using the Versions Data Exists parameter (verexists=5)
- Retain up to four inactive backup versions when the original file is deleted from the user workstation, by using the Versions Data Deleted parameter (verdeleted=4)
- Retain inactive backup versions for no more than 90 days, by using the Retain Extra Versions parameter (retextra=90)
- If there is only one backup version, retain it for 600 days after the original is deleted from the workstation, by using the Retain Only Version parameter (retonly=600)
- Prevent files from being backed up if they are in use, by using the Serialization parameter (serialization=static)
- Store files in the ENGBACK1 storage pool, by using the Destination parameter (destination=engback1)

Issue the following command:

```
define copygroup engpoldom standard mceng standard
destination=engback1 serialization=static
verexists=5 verdeleted=4 retextra=90 retonly=600
```

8. Define a STANDARD archive copy group to the MCENG management class in the STANDARD policy set belonging to the ENGPOLDOM policy domain that can complete the following tasks:

- Allow users to archive a file if it is not in use (serialization=static)
- Retain the archive copy for 730 days (retver=730)
- Store files in the ENGARCH1 storage pool (destination=engarch1)

Issue the following command:

```
define copygroup engpoldom standard mceng standard
type=archive destination=engarch1 serialization=static
retver=730
```

9. Assign the STANDARD management class as the default management class for the TEST policy set in the ENGPOLDOM policy domain by issuing the following command:

```
assign defmgmtclass engpoldom standard standard
```

10. Validate the STANDARD policy set in the ENGPOLDOM policy domain by issuing the following command:

```
validate policyset engpoldom standard
```

Examine any messages that result and correct the problems.

11. Activate the STANDARD policy set by issuing the following command:

```
activate policyset engpoldom standard
```

After you create and activate a new policy domain, you can assign client nodes in one of two ways:

- To assign an existing client node to the new policy domain, use the **UPDATE NODE** command. For example, to assign client node APPCLIENT1 to the ENGPOLDOM policy domain, issue the following command:

```
update node appclient1 domain=engpoldom
```

- To create a new client node and associate it with an existing policy domain, use the **REGISTER NODE** command. For example, create a node, NEWUSER, and assign it to the ENGPOLDOM policy domain by issuing the following command:

```
register node newuser newuser domain=engpoldom
```

**Related tasks:**

“Defining and updating an archive copy group” on page 500

**Related reference:**

“Defining and updating a policy domain” on page 493

“Managing backup copy groups” on page 494

“Running expiration processing to delete expired files” on page 514

## Example: Create a new policy

You can create new policies by copying existing policy parts and then updating the parts that you want to change.

### About this task

The Tivoli Storage Manager default policy specifies how Tivoli Storage Manager manages client files. For example, it specifies that Tivoli Storage Manager retains up to two backup versions of any file that exists on the client. Two versions might be enough for most clients. However, if some clients need more versions to be kept, you can do either of the following:

- Create a new policy domain and assign these clients to that domain.
- Create a new management class within the default policy domain. The include-exclude lists for all the affected clients must now be updated.

**Remember:** Under the default policy, client files are stored directly to disk. You can define policies for storing client files directly to tape. In a copy group, name a tape pool as the destination. However, if you store directly to tape, the number of available tape drives limits the number of client nodes that can store data at the same time.

### Procedure

The following example shows how to create a new policy by copying the default policy domain, updating the backup copy group to retain a greater number of backup versions, and then assigning clients.

1. Copy the default policy domain, STANDARD, to the new policy domain, NEWDOMAIN:

```
copy domain standard newdomain
```

This operation copies the policy domain, and all associated policy sets, management classes, and copy groups. Within the policy domain that is named NEWDOMAIN and the policy set named STANDARD, you have:

- Management class named STANDARD



- Backup copy group named STANDARD
- Archive copy group named STANDARD

In this example, you update only the backup copy group.

2. Update the backup copy group by specifying that 10 versions of backed up files are to be kept:

```
update copygroup newdomain standard standard standard -
type=backup verexists=10
```

3. Validate and activate the STANDARD policy set in NEWDOMAIN:

```
validate policyset newdomain standard
activate policyset newdomain standard
```

**Important:** The following conditions result in warning messages during validation:

- A destination storage pool is not a defined storage pool.
  - The default management class does not contain a backup or archive copy group.
  - The current ACTIVE policy set names a management class that is not defined in the policy set being validated.
  - The current ACTIVE policy set contains copy groups that are not defined in the named policy set.
  - A management class specifies that a backup version must exist before a file can be migrated from a client node, but the management class does not contain a backup copy group.
4. Assign client nodes to the NEWDOMAIN policy domain by either updating existing client nodes or registering new nodes. For example, to update client node **mercedes**:

```
update node mercedes domain=newdomain
```

Because it is assigned to the NEWDOMAIN policy domain, Tivoli Storage Manager keeps up to ten versions of backed up files for client node **mercedes**.

**Remember:** If you associate a client that is currently running with a new domain, the client must be stopped and restarted before the new association takes effect.

---

## Policy configuration scenarios

The scenarios that are published are designed to show you some cases for which policy changes may be needed.

### Related reference:

“Basic policy planning” on page 483

“Policy components” on page 36



## Configuring policy for direct-to-tape backups

The server default policy enables client nodes to back up data to disk storage pools on the server. As an alternative, you can configure a policy to store client data directly in tape storage pools to reduce contention for disk resources.

### About this task

If you back up directly to tape, the number of clients that can back up data at the same time is equal to the number of drives available to the storage pool (through the mount limit of the device class). For example, if you have one drive, only one client at a time can back up data.

The direct-to-tape backup eliminates the need to migrate data from disk to tape. However, performance of tape drives is often lower when backing up directly to tape than when backing up to disk and then migrating to tape. Backing up data directly to tape usually means more starting and stopping of the tape drive. Backing up to disk then migrating to tape usually means the tape drive moves more continuously, meaning better performance.

At the server command line, you can define a new policy domain that enables client nodes to back up or archive data directly to tape storage pools. For example, you can define a policy domain named DIR2TAPE with the following steps:

### Procedure

1. Copy the default policy domain STANDARD as a template:

```
copy domain standard dir2tape
```

This command creates the DIR2TAPE policy domain that contains a default policy set, management class, backup and archive copy group, each named STANDARD.

2. Update the backup or archive copy group in the DIR2TAPE policy domain to specify the destination to be a tape storage pool. For example, to use a tape storage pool named TAPEPOOL for backup, issue the following command:

```
update copygroup dir2tape standard standard destination=tapepool
```

To use a tape storage pool named TAPEPOOL for archive, issue the following command:

```
update copygroup dir2tape standard standard type=archive
destination=tapepool
```

3. Activate the changed policy set.

```
activate policyset dir2tape standard
```

4. Assign client nodes to the DIR2TAPE policy domain. For example, to assign a client node named TAPEUSER1 to the DIR2TAPE policy domain, issue the following command:

```
update node tapeuser1 domain=dir2tape
```

## Configuring policy for Tivoli Storage Manager application clients

The Tivoli Storage Manager application clients that use the server to store data might require that you configure policies to make the most efficient use of server storage. See the documentation for each application client for the policy requirements.

Some of the application clients include a timestamp in each database backup. Because the default policy for the server keeps one backup version of each unique file, database backups that are managed by default policy are never deleted. The backups are not deleted because each backup is uniquely named with its timestamp. To ensure that the server deletes backups as required, configure policy as recommended by the documentation for the application client.

## Policy for logical volume backups

Consider defining a management class specifically for logical volume backups. To enable clients to restore a logical volume and then reconcile the results of any file backup operations since the logical volume backup was made, you must set up management classes with the backup copy group set up differently from the STANDARD.

The **Versions Data Exists**, **Versions Data Deleted**, and **Retain Extra Versions** parameters work together to determine over what time period a client can restore a logical volume image and reconcile later file backups. Also, you may have server storage constraints that require you to control the number of backup versions allowed for logical volumes. The server handles logical volume backups the same as regular incremental or selective backups. Logical volume backups differ from selective, incremental, or archive operations in that each file space that is backed up is treated as a single large file.

Backups of logical volumes are intended to help speed the restoration of a computer. One way to use the capability is to have users periodically (for example, once a month) perform a logical volume backup, and schedule daily full incremental backups. If a user restores a logical volume, the program first restores the logical volume backup and then any files that were changed since the backup (incremental or other file backup processes). The user can also specify that the restore process reconcile any discrepancies that can result when files are deleted.

For example, a user backs up a logical volume, and the following week deletes one or more files from the volume. At the next incremental backup, the server records in its database that the files were deleted from the client. When the user restores the logical volume, the program can recognize that files have been deleted since the backup was created. The program can delete the files as part of the restore process. To ensure that users can use the capability to reconcile later incremental backups with a restored logical volume, you need to ensure that you coordinate policy for incremental backups with policy for backups for logical volumes.

For example, you decide to ensure that clients can choose to restore files and logical volumes from any time in the previous 60 days. You can create two management classes, one for files and one for logical volumes. Table 46 on page 510 shows the relevant parameters. In the backup copy group of both management classes, set the Retain Extra Versions parameter to 60 days.

In the management class for files, set the parameters so that the server keeps versions based on age rather than how many versions exist. More than one backup

version of a file may be stored per day if clients perform selective backups or if clients perform incremental backups more than once a day. The **Versions Data Exists** parameter and the **Versions Data Deleted** parameter control how many of these versions are kept by the server. To ensure that any number of backup versions are kept for the required 60 days, set both the **Versions Data Exists** parameter and the **Versions Data Deleted** parameter to NOLIMIT for the management class for files. This means that the server retains backup versions based on how old the versions are, instead of how many backup versions of the same file exist.

For logical volume backups, the server ignores the frequency attribute in the backup copy group.

*Table 46. Example of backup policy for files and logical volumes*

| Parameter (backup copy group in the management class) | Management Class for Files | Management Class for Logical Volumes |
|-------------------------------------------------------|----------------------------|--------------------------------------|
| <b>Versions Data Exists</b>                           | NOLIMIT                    | 3 versions                           |
| <b>Versions Data Deleted</b>                          | NOLIMIT                    | 1                                    |
| <b>Retain Extra Versions</b>                          | 60 days                    | 60 days                              |
| <b>Retain Only Version</b>                            | 120 days                   | 120 days                             |

## Configuring policy for NDMP operations

You can register a network-attached storage (NAS) file server as a node, using network data management protocol (NDMP) operations. Under the direction of the Tivoli Storage Manager server, the NAS file server performs backup and restore of file system and directory images to a tape library.

The Tivoli Storage Manager server initiates the backup, allocates a drive, and selects and mounts the media. The NAS file server then transfers the data to tape.

Because the NAS file server performs the backup, the data is stored in its own format. For most NAS file servers, the data is stored in the NDMPDUMP data format. For NetApp file servers, the data is stored in the NETAPPDUMP data format. For EMC file servers, the data is stored in the CELERRADUMP data format. To manage NAS file server image backups, copy groups for NAS nodes must point to a storage pool that has a data format of NDMPDUMP, NETAPPDUMP, or CELERRADUMP.

The following backup copy group attributes are ignored for NAS images:

- Frequency
- Mode
- Retain Only Versions
- Serialization
- Versions Data Deleted

To set up the required policy for NAS nodes, you can define a new, separate policy domain.

Backups for NAS nodes can be initiated from the server, or from a client that has at least client owner authority over the NAS node. For client-initiated backups, you can use client option sets that contain include and exclude statements to bind NAS

file system or directory images to a specific management class. The valid options that can be used for a NAS node are: `include.fs.nas`, `exclude.fs.nas`, and `domain.nas`. NAS backups initiated from the Tivoli Storage Manager server with the **BACKUP NODE** command ignore client options specified in option files or client option sets. For details on the options see the *Backup-Archive Clients Installation and User's Guide* for your particular client platform.

When the Tivoli Storage Manager server creates a table of contents (TOC), you can view a collection of individual files and directories backed up via NDMP and select which to restore. To establish where to send data and store the table of contents, policy should be set so that:

- Image backup data is sent to a storage pool with a NDMPDUMP, NETAPPDUMP or CELERRADUMP format.
- The table of contents is sent to a storage pool with either NATIVE or NONBLOCK format.

**Related tasks:**

“Creating client option sets on the server” on page 473

**Related reference:**

Chapter 9, “Using NDMP for operations with NAS file servers,” on page 219

## Configuring policy for LAN-free data movement

For LAN-free data movement, you can set up a SAN configuration in which a client directly accesses a storage device to read or write data. LAN-free data movement requires setup on the server and on the client, and the installation of a storage agent on the client computer.

The storage agent transfers data between the client and the storage device. See *Storage Agent User's Guide* for details. See the Web site for details on clients that support the feature: [http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli\\_Storage\\_Manager](http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager).

One task in configuring your systems to use this feature is to set up policy for the clients. Copy groups for these clients must point to the storage pool that is associated with the SAN devices. If you have defined a path from the client to a drive on the SAN, drives in this storage pool can then use the SAN to send data directly to the device for backup, archive, restore, and retrieve.

To set up the required policy, either define a new, separate policy domain, or define a new management class in an existing policy domain.

**Related tasks:**

“Configuring Tivoli Storage Manager for LAN-free data movement” on page 134

### Define a new policy domain

One way to configure policy for clients is to define a separate policy domain in which the active policy set has a default management class with the required settings. Then register all clients using SAN data transfer to that domain.

### Procedure

Complete the following steps to define a new policy domain:

1. Create the policy domain for the clients. For example, to define a policy domain that is named SANCLIENTS, issue the following command:

```
define domain sanclients
 description='Policy domain for clients using SAN devices'
```

2. Create a policy set in that domain. For example, to define the policy set that is named BASE in the SANCLIENTS policy domain, issue the following command:

```
define policyset sanclients base
```

3. Create the default management class for the policy set. First define the management class, then assign the management class as the default for the policy set.

For example, to define the management class that is named SANCLIENTMC, issue the following command:

```
define mgmtclass sanclients base sanclientmc
```

Then assign the new management class as the default:

```
assign defmgmtclass sanclients base sanclientmc
```

4. Define the backup copy group in the default management class, as follows:
  - Specify the DESTINATION, the name of the storage pool that is associated with the SAN devices on the server.  
The storage pool must already be set up. The storage pool must point to a device class that is associated with the library for the SAN devices.
  - Accept the default settings for all remaining parameters.

For example, to define the backup copy group for the SANCLIENTMC management class, issue the following command:

```
define copygroup sanclients base sanclientmc standard destination=sanpool
```

5. Define the archive copy group in the default management class, as follows:
  - Specify the DESTINATION, the name of the storage pool that is associated with the SAN devices on the server.  
The storage pool must already be set up. The storage pool must point to a device class that is associated with the library for the SAN devices.
  - Accept the default settings for all remaining parameters.

For example, to define the archive copy group for the SANCLIENTMC management class, issue the following command:

```
define copygroup sanclients base sanclientmc standard
 type=archive destination=sanpool
```

6. Activate the policy set.

For example, to activate the BASE policy set in the SANCLIENTS policy domain, issue the following command:

```
activate policyset sanclients base
```

7. Register or update the application clients to associate them with the new policy domain.

For example, to update the node SANCLIENT1, issue the following command:

```
update node sanclient1 domain=sanclients
```

## Define a new management class in an existing policy domain

If you choose not to define a separate policy domain with the appropriate management class as the default, you must define a new management class within an existing policy domain and activate the policy set.

Because the new management class is not the default for the policy domain, you must add an include statement to each client options file to bind objects to that management class.

For example, suppose `sanclientmc` is the name of the management class that you defined for clients that are using devices on a SAN. You want the client to be able to use the SAN for backing up any file on the c drive. Put the following line at the end of the client's include-exclude list:

```
include c:* sanclientmc
```

For details on the include-exclude list, see *Backup-Archive Clients Installation and User's Guide*.

## Policy for Tivoli Storage Manager servers as clients

One server (a source server) can be registered as a client to another server (the target server). Data stored by the source server appears as archived files on the target server. The source server is registered to a policy domain on the target server, and uses the default management class for that policy domain.

In the default management class, the destination for the archive copy group determines where the target server stores data for the source server. Other policy specifications, such as how long to retain the data, do not apply to data stored for a source server.

### Related tasks:

"Storing data on another server as virtual volumes" on page 726

## Setting policy to enable point-in-time restore for clients

To enable clients to restore backed-up files to a specific point in time, you must set up the backup copy group differently from the STANDARD. The **Versions Data Exists**, **Versions Data Deleted**, and **Retain Extra Versions** parameters work together to determine over what time period a client can perform a point-in-time restore operation.

For example, you decide to ensure that clients can choose to restore files from anytime in the previous 60 days. In the backup copy group, set the **Retain Extra Versions** parameter to 60 days. More than one backup version of a file may be stored per day if clients perform selective backups or if clients perform incremental backups more than once a day. The **Versions Data Exists** parameter and the **Versions Data Deleted** parameter control how many of these versions are kept by the server. To ensure that any number of backup versions are kept for the required 60 days, set both the **Versions Data Exists** parameter and the **Versions Data Deleted** parameter to NOLIMIT. This means that the server essentially determines the backup versions to keep based on how old the versions are, instead of how many backup versions of the same file exist.

Keeping backed-up versions of files long enough to allow clients to restore their data to a point in time can mean increased resource costs. Requirements for server storage increase because more file versions are kept, and the size of the server

database increases to track all of the file versions. Because of these increased costs, you may want to choose carefully which clients can use the policy that allows for point-in-time restore operations.

Clients need to run full incremental backup operations frequently enough so that IBM Tivoli Storage Manager can detect files that have been deleted on the client file system. Only a full incremental backup can detect whether files have been deleted since the last backup. If full incremental backup is not done often enough, clients who restore to a specific time may find that many files that had actually been deleted from the workstation get restored. As a result, a client's file system may run out of space during a restore process.

**Important:** The server will not attempt to retrieve client files from an active-data pool during a point-in-time restore. Point-in-time restores require both active and inactive file versions. Active-data pools contain only active file versions. For optimal efficiency during point-in-time restores and to avoid switching between active-data pools and primary or copy storage pools, the server retrieves both active and inactive versions from the same storage pool and volumes.

---

## Running expiration processing to delete expired files

Expiration processing deletes expired client files from the server storage. Expiration processing also removes from the database any restartable restore sessions that exceed the time limit for saving such sessions.

You can run expiration processing either automatically or by command. You should ensure that expiration processing runs periodically to allow the server to reuse storage pool space that is occupied by expired client files.

### Note:

1. A base file is not eligible for expiration until all of its dependent subfiles have been expired.
2. An archive file is not eligible for expiration if there is a deletion hold on it. If a file is not held, it will be handled according to existing expiration processing.

### Related concepts:

"Expiration processing of base files and subfiles" on page 544

"Deletion hold" on page 517

## Running expiration processing automatically

You control automatic expiration processing by specifying the expiration interval option, **EXPINTERVAL**, in the server options file. You can also control when restartable restore sessions expire with another server option, **RESTOREINTERVAL**.

You can set server options by editing the `dsmserv.opt` file. If you use the server options file to control automatic expiration, the server runs expiration processing each time that you start the server. After that, the server runs expiration processing at the interval you specified with the option, which is measured from the start time of the server.

For more information about specifying server options, see the *Administrator's Reference*.



## Using commands to control expiration processing

You can manually run expiration by issuing the **EXPIRE INVENTORY** command or you can set a specific schedule for expiration processing by using the **DEFINE SCHEDULE** command.

After issuing **EXPIRE INVENTORY**, expired files are deleted from the database according to how you specify parameters on the command.

You can control how long the expiration process runs by using the **DURATION** parameter with the **EXPIRE INVENTORY** command. You can run several (up to 40) expiration processes in parallel by specifying **RESOURCE=x**, where *x* equals the number of nodes that you want to process. Inventory expiration can also be distributed across more than one resource on a file space level to help distribute the workload for nodes with many file spaces.

You can use the **DEFINE SCHEDULE** command to set a specific schedule for this command. This automatically starts inventory expiration processing. If you schedule the **EXPIRE INVENTORY** command, set the expiration interval to 0 (zero) in the server options so that the server does not run expiration processing when you start the server.

When expiration processing runs, the server normally sends detailed messages about policy changes made since the last time expiration processing ran. You can reduce those messages by using the **QUIET=YES** parameter with the **EXPIRE INVENTORY** command, or the following options:

- The Use Quiet Expiration option in the server options

When you use the quiet option or parameter, the server issues messages about policy changes during expiration processing only when files are deleted, and either the default management class or retention grace period for the domain has been used to expire the files.

## Additional expiration processing with disaster recovery manager

If you have disaster recovery manager (DRM), one or more database backup volumes may also be deleted during expiration processing.



These volumes may be deleted if the following conditions are true:

- The volume has a device type of SERVER
- The volume is not part of the most recent database backup series
- The last volume of the database backup series has exceeded the expiration value specified with the SET **DRMDBBACKUPEXPIREDAYS** command

### Related tasks:

“Moving copy storage pool and active-data pool volumes onsite” on page 1090



---

## Protection and expiration of archive data

There are two separate ways to protect Tivoli Storage Manager archive objects so that they will not be inadvertently deleted. One method is to activate data retention protection on a server level.

For example, securities brokers and other regulated institutions enforce retention requirements for certain records, including electronic mail, customer statements, trade settlements, check images and new account forms. Data retention protection prevents deliberate or accidental deletion of data until its specified retention criterion is met.

Another method of additional protection is to place a deletion hold on an object using the client API. For example, federal regulatory requirements allow a broker-dealer to delete records when the regulatory retention period has lapsed, but other legal requirements might mandate that the records continue to be maintained. By using deletion hold, you ensure that data is not deleted until the hold is released.

### Data retention protection

Data retention protection ensures that archive objects are not deleted from the Tivoli Storage Manager server until policy-based retention requirements for that object are satisfied. It is enforced at the server level by the **SET ARCHIVERETENTIONPROTECTION** command.

Retention protection can only be activated on a new server that does not already have stored objects (backup, archive, or space-managed). Activating retention protection applies to all archive objects subsequently stored on that server. After retention protection is set, the server cannot store backup objects, space-managed objects, or backupsets. Retention protection cannot be added for an object that was previously stored on a Tivoli Storage Manager server. After an object is stored with retention protection, retention protection cannot be removed.

Retention protection is based on the retention criterion for each object, which is determined by the **RETVER** parameter of the archive copy group of the management class to which the object is bound. If an object uses event-based retention, the object does not expire until whatever comes later: either the date the object was archived plus the number of days in the **RETMIN** parameter or the date the event was signaled plus the number of days that are specified in the **RETVER** parameter. On servers that have retention protection enabled, the following operations will not delete objects whose retention criterion is not satisfied:

- Requests from the client to delete an archive object
- **DELETE FILESPACE** (from either a client or administrative command)
- **DELETE VOLUME DISCARDDATA=YES**
- **AUDIT VOLUME FIX=YES**

**Important:** A cached copy of data can be deleted, but data in primary storage pools, copy storage pools, and active-data pools can only be marked damaged and is never deleted.

If your server has data retention protection activated, the following items are restrictions:

- A registered node cannot be reassigned to a different policy domain.
- You cannot define a device class with a device type of **SERVER**.

- You can export data but it will not be retention protected after it is imported.
- You cannot import data to a retention protected server.

The server does not send a retention value to an EMC Centera storage device if retention protection is not enabled. If this is the case, you can use a Centera storage device as a standard device from which archive and backup files can be deleted.

For more information about server commands and options, see the *Administrator's Reference*.

**Related tasks:**

Chapter 27, "Protecting and recovering the server infrastructure and client data," on page 893

## Deletion hold

If a hold is placed on an object through the client API, the object is not deleted until the hold is released.

There is no limit to how often you alternate holding and releasing an object. An object can have only one hold on it at a time, so if you attempt to hold an object that is already held, you will get an error message.

If an object with event-based policy is on hold, an event can still be signaled. The hold does not extend the retention period for an object. If the retention period specified in the **RETVER** and **RETMIN** parameters expires while the object is on hold, the object will be eligible for deletion whenever the hold is released.

If an object is held, it is not deleted whether or not data retention protection is active. If an object is not held, it is handled according to existing processing such as normal expiration, data retention protection, or event-based retention. Data that is in deletion hold status can be exported. The hold status is preserved when the data is imported to another system.

The following deletion operations are prevented if a hold is on an object:

- Requests from the client to delete an archive object
- **DELETE FILESPACE** (from either a client or administrative command)
- **DELETE VOLUME DISCARDDATA=YES**
- **AUDIT VOLUME FIX=YES**

**Note:** A cached copy of data can be deleted, but data in primary storage pools, copy storage pools, and active-data pools can only be marked damaged and is never deleted.

For more information about server commands, see the *Backup-Archive Clients Installation and User's Guide*.

---

## Protecting data using the NetApp SnapLock licensed feature

The NetApp SnapLock licensed feature helps meet federal regulatory requirements for archived data. The SnapLock feature allows Tivoli Storage Manager to set a retention date for files and to commit a file to a WORM (write once, read many) state.

Data stored with a retention date cannot be deleted from the file system before the retention period expires. The SnapLock feature can only be used by Tivoli Storage Manager servers that have data retention protection enabled.

Data archived by data retention protection servers and stored to NetApp NAS file servers is stored as Tivoli Storage Manager FILE volumes. At the end of a write transaction, a retention date is set for the FILE volume, through the SnapLock interface. This date is calculated by using the **RETVER** and **RETMIN** parameters of the archive copy group used when archiving the data. Having a retention date associated with the FILE volume gives it a characteristic of WORM media by not allowing the data to be destroyed or overwritten until the retention date has passed. These FILE volumes are referred to as WORM FILE volumes. After a retention date has been set, the WORM FILE volume cannot be deleted until the retention date has passed. System Storage Archive Manager combined with WORM FILE volume reclamation ensures protection for the life of the data.

Storage pools can be managed either by threshold or by data retention period. The **RECLAMATIONTYPE** storage pool parameter indicates that a storage pool is managed based on a data retention period. When a traditional storage pool is queried with the **FORMAT=DETAILED** parameter, this output is displayed:

Reclamation Type: THRESHOLD

Tivoli Storage Manager servers that have data retention protection enabled through System Storage Archive Manager and have access to a NetApp filer with the SnapLock licensed feature can define a storage pool with **RECLAMATIONTYPE** set to **SNAPLOCK**. This means that data created on volumes in this storage pool are managed by retention date. When a SnapLock storage pool is queried with the **FORMAT=DETAILED** parameter, the output displayed indicates that the storage pools are managed by data retention period.

Reclamation Type: SNAPLOCK

See the NetApp document *Data ONTAP Storage Management Guide* for details on the SnapLock filer. Note this is NetApp documentation.

**Attention:** It is not recommended that you use this feature to protect data with a retention period of less than three months.

**Related concepts:**

“Data retention protection” on page 516

## Reclamation and the SnapLock feature

It is recommended that you set the NetApp default retention period to 30 days to match the WORM FILE default reclamation period. Tivoli Storage Manager reclaims any remaining data on a WORM FILE volume just before the retention date expiration.

The reclamation of a WORM FILE volume to another WORM FILE volume before the retention date expiration ensures that data is always protected by the SnapLock feature.

Because this protection is at a Tivoli Storage Manager volume level, the data on the volumes can be managed by Tivoli Storage Manager policy without consideration of where the data is stored. Data stored on WORM FILE volumes is protected both by data retention protection and by the retention period stored with the physical file on the SnapLock volume. If a Tivoli Storage Manager administrator issues a command to delete the data, the command fails. If someone attempt to delete the file through a series of network file system calls, the SnapLock feature prevents the data from being deleted.

During reclamation processing, if the Tivoli Storage Manager server cannot move data from an expiring SnapLock volume to a new SnapLock volume, a warning message is issued.

### Retention periods

Tivoli Storage Manager policies manage the retention time for the WORM FILE volume. The retention of some files might exceed the retention time for the WORM FILE volume they were stored on. This could require moving them to another volume to ensure that the files are stored on WORM media.

Some objects on the volume might need to be retained longer than other objects on the volume for the following reasons:

- They are bound to management classes with different retention times.
- They cannot be removed because of a deletion hold.
- They are waiting for an event to occur before expiring.
- The retention period for a copy group is increased, requiring a longer retention time than that specified in the SnapLock feature when the WORM FILE volume was committed.

Use the **DEFINE STGPPOOL** command to set up a storage pool for use with the SnapLock feature. Selecting **RECLAMATIONTYPE=SNAPLOCK** enables Tivoli Storage Manager to manage FILE volumes by a retention date. After a storage pool has been set up as a SnapLock storage pool, the **RECLAMATIONTYPE** parameter cannot be updated to **THRESHOLD**. When a SnapLock storage pool is defined, a check is made to ensure that the directories specified in the device class are SnapLock WORM volumes. When a file class is defined and storage pools are created with the reclamation type of **SNAPLOCK**, all volumes must be WORM volumes or the operation fails. If a device class is updated to contain additional directories and there are SnapLock storage pools assigned to it, the same check is made to ensure all directories are SnapLock WORM volumes.

There are three retention periods available in the NetApp SnapLock feature. These must be configured correctly so that the Tivoli Storage Manager server can properly manage WORM data stored in SnapLock volumes. The Tivoli Storage Manager server sets the retention period for data being stored on NetApp SnapLock volumes based on the values in the copy group for the data being

archived. The NetApp filer should not conflict with the ability of the Tivoli Storage Manager server to set the retention period. The following settings are the Tivoli Storage Manager recommendations for retention periods in the NetApp filer:

1. Minimum Retention Period Set the higher value: either 30 days or the minimum number of days specified by any copy group (using a NetApp SnapLock filer for WORM FILE storage) for the data retention period. The copy group is the one in use storing data on NetApp SnapLock volumes.
2. Maximum Retention Period Leave default of 30 years. This allows the Tivoli Storage Manager server to set the actual volume retention period based on the settings in the archive copy group.
3. Default Retention Period Set to 30 days. If you do not set this value and you do not set the maximum retention period, each volume's retention period will be set to 30 years. If this occurs, the Tivoli Storage Manager server's ability to manage expiration and reuse of NetApp SnapLock volumes will be largely defeated in that no volume will be able to be reused for thirty years.

With the NetApp SnapLock retention periods appropriately set, Tivoli Storage Manager can manage the data in SnapLock storage pools with maximum efficiency. For each volume that is in a SNAPLOCK storage pool, a Tivoli Storage Manager reclamation period is created. The Tivoli Storage Manager reclamation period has a start date, BEGIN RECLAIM PERIOD, and an end date, END RECLAIM PERIOD. View these dates by issuing the **QUERY VOLUME** command with the **FORMAT=DETAILED** parameter on a SnapLock volume. For example:

```
Begin Reclaim Period: 09/05/2010
End Reclaim Period: 10/06/2010
```

When Tivoli Storage Manager archives files to a SnapLock volume, it keeps track of the latest expiration date of those files, and the BEGIN RECLAIM PERIOD is set to that latest expiration date. When more files are added to the SnapLock volume, the starting date is set to that later date if there is a file with a later expiration date than the one currently on the volume. The start date is set to the latest expiration date for any file on that volume. The expectation is that all files on that volume should have already either expired, or should be expiring on that day and the following day there should be no valid data left on that volume.

The END RECLAIM PERIOD is set to a month later than the BEGIN RECLAIM PERIOD. The retention date set in the NetApp filer for that volume is set to the END RECLAIM PERIOD date. This means the NetApp filer will prevent any deletion of that volume until the END RECLAIM PERIOD date has passed. This is approximately a month after the data has actually expired in the Tivoli Storage Manager server. If an END RECLAIM PERIOD date is calculated by the Tivoli Storage Manager server for a volume, and the date is later than the current END RECLAIM PERIOD, the new date will be reset in the NetApp filer for that volume to the later date. This guarantees that the Tivoli Storage Manager WORM FILE volume will not be deleted until all data on the volume has expired, or the data has been moved to another SnapLock volume.

The Tivoli Storage Manager reclamation period is the amount of time between the begin date and the end date. It is also the time period which the Tivoli Storage Manager server has to delete volumes on which all the data has expired, or to move files which have not expired on expiring SnapLock volumes to new SnapLock volumes with new dates. This month is critical to how the server safely and efficiently manages the data on WORM FILE volumes. Data on a SnapLock volume typically expires by the time the beginning date arrives, and the volume

should be empty. When the end date arrives, the volume can be safely deleted from the Tivoli Storage Manager inventory and the SnapLock filer.

However, some events may occur which mean that there is still valid data on a SnapLock volume:

1. Expiration processing in the Tivoli Storage Manager server for that volume may have been delayed or has not completed yet.
2. The retention parameters on the copy group or associated management classes may have been altered for a file after it was archived, and that file is not going to expire for some period of time.
3. A deletion hold may have been placed on one or more of the files on the volume.
4. Reclamation processing has either been disabled or is encountering errors moving data to new SnapLock volumes on a SnapLock storage pool.
5. A file is waiting for an event to occur before the Tivoli Storage Manager server can begin the expiration of the file.

If there are files which have not expired on a SnapLock volume when the beginning date arrives, they must be moved to a new SnapLock volume with a new begin and end date. This will properly protect that data. However, if expiration processing on the Tivoli Storage Manager server has been delayed, and those files will expire as soon as expiration processing on the Tivoli Storage Manager server runs, it is inefficient to move those files to a new SnapLock volume. To ensure that unnecessary data movement does not occur for files which are due to expire, movement of files on expiring SnapLock volumes will be delayed some small number of days after the BEGIN RECLAIM PERIOD date. Since the data is protected in the SnapLock filer until the END RECLAIM PERIOD date, there is no risk to the data in delaying this movement. This allows Tivoli Storage Manager expiration processing to complete. After that number of days, if there is still valid data on an expiring SnapLock volume, it will be moved to a new SnapLock volume, thus continuing the protection of the data.

Since the data was initially archived, there may have been changes in the retention parameters for that data (for example, changes in the management class or copy pool parameters) or there may be a deletion hold on that data. However, the data on that volume will only be protected by SnapLock until the END RECLAIM PERIOD date. Data that has not expired is moved to new SnapLock volumes during the Tivoli Storage Manager reclamation period. If errors occur moving data to a new SnapLock volume, a distinct warning message is issued indicating that the data will soon be unprotected. If the error persists, it is recommended that you issue a **MOVE DATA** command for the problem volume.

**Attention:** Disabling reclamation processing on a SnapLock storage pool is not recommended because after the processing is disabled, the Tivoli Storage Manager server has no way to issue warning messages that data will become unprotected. This situation can also occur if reclamation and migration is disabled for the entire server (for example, NOMIGRRECL set in the server options file). Be very careful when managing SnapLock storage pools so that data doesn't inadvertently become unprotected.



## Configuring SnapLock for event-based retention

Data stored in SnapLock volumes that are managed by System Storage Archive Manager and event-based retention can result in excessive reclamation, which causes performance degradation of the server.

If data is managed by event-based retention, Tivoli Storage Manager initially sets the retention period to the greater of the RETVER and RETMIN values for the archive copy group. When the volume enters the reclamation period and data that remains on the volume is moved, the retention period for the target volume is set to the remaining retention period of the data, which is typically 0. The new volume then enters the reclamation period shortly after receiving the data, resulting in the reclamation of volumes that were just created.

You can avoid this situation by using the RETENTIONEXTENSION server option. This option allows the server to set or extend the retention date of a SnapLock volume. You can specify from 30 to 9999 days. The default is 365 days.

When selecting volumes in a SnapLock storage pool for reclamation, the server checks if the volume is within the reclamation period.

- If the volume is not within the reclamation period, no action is taken. The volume is not reclaimed, and the retention date is unchanged
- If the volume is within the reclamation period, the server checks if the percent of reclaimable space on the volume is greater than the reclamation threshold of the storage pool or of the threshold percentage passed in on the THRESHOLD parameter of a **RECLAIM STGPOOL** command.
  - If the reclaimable space is greater than the threshold, the server reclaims the volume and sets the retention date of the target volume is set to the greater of these values:
    - The remaining retention time of the data plus 30 days for the reclamation period.
    - The RETENTIONEXTENSION value plus 30 days for the reclamation period.
  - If the reclaimable space is not greater than the threshold, the server resets the retention date of the volume by the amount specified in the RETENTIONEXTENSION option. The new retention period is calculated by adding the number of days specified to the current date.

In the examples described below, the SnapLock volume, VolumeA, is in a storage pool whose reclamation threshold is set to 60%. The RETENTIONEXTENSION server option is set to 365 days. The retention period VolumeA is in the reclamation period. The following situations show how retention is affected:

- The reclaimable space on VolumeA is less than 60%. The retention date of VolumeA is extended by 365 days.
- The reclaimable space on VolumeA is greater than 60%, and the remaining retention time of the data is more than 365 days. VolumeA is reclaimed, and the retention date of the target volume is set based on the remaining retention of the data plus 30 days for the reclamation period.
- The reclaimable space on VolumeA is greater than 60%, and the retention time of the data is less than 365 days. VolumeA is reclaimed, and its retention date is set to 365 days, the RETENTIONEXTENSION value, plus 30 days for the reclamation period.

## Ensuring continuous data protection

Data that is stored on a volume with the SnapLock feature enabled and moved or copied to a non-SnapLock volume loses the unique hardware protection that is available through the NetApp WORM volumes.

The Tivoli Storage Manager server allows this type of movement, but if data is moved from a WORM FILE volume to another type of media, the data may no longer be protected from inadvertent or malicious deletion. If this data is on WORM volumes to meet data retention and protection requirements for certain legal purposes and is moved to other media, the data may no longer meet those requirements. You should configure your storage pools so this type of data is kept in storage pools which consist of SnapLock WORM volumes during the entire data retention period.

## Set up SnapLock volumes as Tivoli Storage Manager WORM FILE volumes

When defining or updating configurations that involve SnapLock storage pools, you should ensure that the storage pools selected for the **NEXTSTGPOOL**, **RECLAIMSTGPOOL**, and **COPYSTGPools** parameters have the **RECLAMATIONTYPE=SNAPLOCK** option specified.

### About this task

When you configure the storage pools this way, you ensure that your data is properly protected. If you define a next, reclaim, copy storage pool, or active-data pool without selecting the **RECLAMATIONTYPE=SNAPLOCK** option, you will not have a protected storage pool. The command succeeds, but a warning message is issued.

### Procedure

Complete the following steps to set up a SnapLock volume for use as a Tivoli Storage Manager WORM FILE volume:

1. Install and set up SnapLock on the NetApp filer. See NetApp documentation for more information.
2. Properly configure the minimum, maximum, and default retention periods. If these retention periods are not configured properly, Tivoli Storage Manager will not be able to properly manage the data and volumes.
3. Install and configure a Tivoli Storage Manager server with data retention protection. Ensure the **SET ARCHIVERETENTIONPROTECTION** command is activated.
4. Set up policy by using the **DEFINE COPYGROUP** command. Select **RETVER** and **RETMIN** values in the archive copy group which will meet your requirements for protecting this data in WORM storage. If the **RETVER** or **RETMIN** values are not set, the default management classes values will be used.
5. Set up storage by using the **DEFINE DEVCLASS** command.
  - Use the **FILE** device class.
  - Specify the **DIRECTORY** parameter to point to the directory or directories on the SnapLock volumes.
6. Define a storage pool using the device class you defined above.
  - Specify **RECLAMATIONTYPE=SNAPLOCK**.
7. Update the copy group to point to the storage pool you just defined.



8. Use the Tivoli Storage Manager API to archive your objects into the SnapLock storage pool. This feature is not available on standard Tivoli Storage Manager backup-archive clients.

**Related reference:**

“Retention periods” on page 519

---

## Distributing policy using enterprise configuration

If you set up one Tivoli Storage Manager server as a configuration manager, you can distribute policy to other Tivoli Storage Manager servers.

To distribute policy, you associate a policy domain with a profile. Managed servers that subscribe to the profile then receive the following definitions:

- The policy domain itself
- Policy sets in that domain, except for the ACTIVE policy set
- Management classes in the policy sets
- Backup and archive copy groups in the management classes
- Client schedules associated with the policy domain

The names of client nodes and client-schedule associations are not distributed. The ACTIVE policy set is also not distributed.

The distributed policy becomes managed objects (policy domain, policy sets, management classes, and so on) defined in the database of each managed server. To use the managed policy, you must activate a policy set on each managed server. If storage pools specified as destinations in the policy do not exist on the managed server, you receive messages pointing out the problem when you activate the policy set. You can create new storage pools to match the names in the policy set, or you can rename existing storage pools.

On the managed server you also must associate client nodes with the managed policy domain and associate client nodes with schedules.

**Related tasks:**

“Setting up enterprise configurations” on page 695

---

## Chapter 14. Managing data for client nodes

You might need help to generate backup sets and enable subfile backups for client nodes. Subfile backups are only applicable to Windows clients. You can also use data validation for client nodes so that any data corruption is identified when data is sent over the network between the client and server.

|                                                                  |
|------------------------------------------------------------------|
| <b>Tasks:</b>                                                    |
| “Validating node data during a client session” on page 526       |
| “Securing communications” on page 855                            |
| “Encrypting data on tape” on page 526                            |
| “Setting up shredding” on page 530                               |
| “Generating client backup sets on the server” on page 534        |
| “Restoring backup sets from a backup-archive client” on page 538 |
| “Moving backup sets to other servers” on page 538                |
| “Managing client backup sets” on page 539                        |
| “Enabling clients to use subfile backup” on page 542             |
| “Managing storage usage for archives” on page 545                |
| <b>Concepts:</b>                                                 |
| “Performance considerations for data validation” on page 526     |
| “Securing sensitive client data” on page 529                     |
| “Creating and using client backup sets” on page 533              |

---

### Validating node data

Data validation can identify data corruption during a client session when data is sent between a client and the server. Tivoli Storage Manager provides the option of specifying whether a cyclic redundancy check (CRC) is performed during a client session to validate data that is sent over the network between a client or a storage agent and the server.

Cyclic redundancy checking is performed at the client when the client requests services from the server. For example, the client issues a query, backup, or archive request. The server also performs a CRC operation on the data that is sent by the client and compares its value with the value calculated by the client. If the CRC values do not match, the server issues an error message once per session. Depending on the operation, the client might attempt to automatically try the operation again.

After Tivoli Storage Manager completes the data validation, the client and server discard the CRC values that are generated in the current session.

Data validation can be enabled for one or all of the following items:

- Tivoli Storage Manager client nodes.
- Tivoli Storage Manager storage agents. For details, refer to the *Storage Agent User's Guide* for your particular operating system.

**Related tasks:**

“Choosing when to enable data validation” on page 915

## Performance considerations for data validation

Consider the impact on performance when you decide whether data validation is necessary for all nodes or some nodes. Data validation impacts performance because additional CPU overhead is required on both the client and server to calculate and compare CRC values.

This type of validation is independent from validating data written to a storage pool volume. See “Data validation during audit volume processing” on page 915.

## Validating node data during a client session

You can enable data validation for a node by using either the **REGISTER NODE** or **UPDATE NODE** command. By default, data validation is set to NO.

Methods for enabling data validation for a node include choosing data validation for individual nodes, specifying a set of nodes by using a wildcard search string, or specifying a group of nodes in a policy domain.

For example, to enable data validation for existing node, ED, you can issue an **UPDATE NODE** command. This user backs up the company payroll records weekly and you have decided it is necessary to have all the user data validated: the data itself and metadata.

```
update node ed validateprotocol=all
```

Later, the network has shown to be stable and no data corruption has been identified when user ED has processed backups. You can then disable data validation to minimize the performance impact of validating all of ED's data during a client session. For example:

```
update node ed validateprotocol=no
```

---

## Encrypting data on tape

It is often critical to secure client data, especially when that data might be of a sensitive nature. To ensure that data for off-site volumes is protected, IBM tape encryption technology is available.

This technology uses a stronger level of encryption by requiring 256-bit Advanced Encryption Standard (AES) encryption keys. Keys are passed to the drive by a key manager to encrypt and decrypt data.

IBM tape technology supports different methods of drive encryption for the following devices:

- IBM 3592 generation 2 and generation 3
- IBM linear tape open (LTO) generation 4 and generation 5

### Application encryption

Encryption keys are managed by the application, in this case, Tivoli Storage Manager. Tivoli Storage Manager generates and stores the keys in the server database. Data is encrypted during WRITE operations, when the encryption key is passed from the server to the drive. Data is decrypted for READ operations.

**Attention:** When using application encryption, you must take extra care to secure database backups because the encryption keys that are used to encrypt and decrypt data are stored in the server database. To restore your data, you must have the correct database backup and corresponding encryption keys to access your information. Ensure that you back up the database frequently and safeguard the backups to prevent data loss or theft. Anyone who has access to both the database backup and the encryption keys has access to your data.

Use application-managed encryption for only storage pool volumes. Other volumes such as backup-set tapes, export volumes, and database backups are not encrypted using the application method.

### **Library encryption**

Encryption keys are managed by the library. Keys are stored in an encryption key manager and provided to the drive. If you set up the hardware to use the library encryption, you can use this method by setting the **DRIVEENCRYPTION** parameter in the device class definition to ALLOW.

**Restriction:** Only certain IBM libraries support IBM LTO-4 library encryption.

### **System encryption**

System encryption is available on AIX. Encryption keys that are provided to the drive are managed by the device driver or operating system and stored in an encryption key manager. If the hardware is set up to use system encryption, you can use this method by setting the **DRIVEENCRYPTION** parameter in the device class definition to ALLOW.

The methods of drive encryption that you can use with Tivoli Storage Manager are set up at the hardware level. Tivoli Storage Manager cannot control or change which encryption method is used in the hardware configuration. If the hardware is set up for the application encryption method, Tivoli Storage Manager can turn encryption on or off depending on the **DRIVEENCRYPTION** value on the device class. For more information about specifying this parameter, see the following topics:

- “Encrypting data with drives that are 3592 generation 2 and later” on page 202
- “Encrypting data using LTO generation 4 tape drives” on page 210
- “Enabling ECARTRIDGE drive encryption” on page 213 and “Disabling ECARTRIDGE drive encryption” on page 214

## **Choosing an encryption method**

Deciding on which encryption method you want to use depends on how you want to manage your data. If you only want to encrypt storage pool volumes and eliminate some encryption processing on your system, the Application method should be enabled.

This method allows Tivoli Storage Manager to manage the encryption keys. When using Application encryption, you must take extra care to secure database backups since the encryption keys are stored in the server database. Without access to database backups and matching encryption keys, you will not be able to restore your data.

If you want to encrypt all of your data in a particular logical library or encrypt data on more than just storage pool volumes, the System or Library method can be

used. These methods are virtually transparent to the server. Tivoli Storage Manager is aware of them being used and displays informational messages when writing to an empty volume.

Library managed encryption allows you to control which volumes are encrypted through the use of their serial numbers. You can specify a range or set of volumes to encrypt. With Application managed encryption, you can create dedicated storage pools that only contain encrypted volumes. This way, you can use storage pool hierarchies and policies to manage the way data is encrypted.

The Library and System methods of encryption can share the same encryption key manager, which allows the two modes to be interchanged. However, this can only occur if the encryption key manager is set up to share keys. Tivoli Storage Manager cannot currently verify if encryption key managers for both methods are the same. Neither can Tivoli Storage Manager share or use encryption keys between the application method and either library or system methods of encryption.

To determine whether or not a volume is encrypted and which method was used, you can issue the **QUERY VOLUME** command with **FORMAT=DETAILED**. For more information on data encryption using the backup-archive client, see the *Backup-Archive Clients Installation and User's Guide*.

## Changing your encryption method and hardware configuration

If you want to change the encryption method for a given set of volumes, the volumes need to be returned to scratch status. Updating the parameter value will only affect empty volumes.

For example, if you currently have Application managed encryption enabled, and you decide that you don't want encryption enabled at all, only empty volumes will be impacted by the change. Filling volumes will continue to be encrypted while new volumes will not. If you do not want currently filling volumes to continue being encrypted, the volume status should be changed to **READONLY**. This will ensure that Tivoli Storage Manager does not append any more encrypted data to the volumes. You can use the **MOVE DATA** command to transfer the data to a new volume after the update of the **DRIVEENCRYPTION** parameter. The data will then be available in an un-encrypted format.

When migrating from one hardware configuration to another, you will need to move your data from the old volumes to new volumes with new encryption keys and key managers. You can do this by setting up two logical libraries and storage pools (each with a different encryption method) and migrating the data from the old volumes to the new volumes. This will eliminate volumes that were encrypted using the original method. Assume that you have volumes that were encrypted using the Library method and you want to migrate to the Application method. Tivoli Storage Manager will be unable to determine which encryption keys are needed for data on these volumes because the library's encryption key manager stores these keys and Tivoli Storage Manager does not have access to them. Table 47 on page 529 illustrates considerations for changing your hardware encryption method.

Table 47. Hardware and encryption method compatibility

|                                       | Volumes with No Encryption | Volumes with Application Managed Encryption                                   | Volumes with Library Managed Encryption                                       | Volumes with System Managed Encryption                                        |
|---------------------------------------|----------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Desired Hardware Method = None        | No Special Consideration   | Incompatible. Scratch tape labels will be unreadable and need to be relabeled | Incompatible. Scratch tape labels will be unreadable and need to be relabeled | Incompatible. Scratch tape labels will be unreadable and need to be relabeled |
| Desired Hardware Method = Application | No Special Consideration   | No Special Consideration                                                      | Incompatible                                                                  | Incompatible                                                                  |
| Desired Hardware Method = Library     | No Special Consideration   | Incompatible                                                                  | No Special Consideration                                                      | Ensure the same key bank/server is still used                                 |
| Desired Hardware Method = System      | No Special Consideration   | Incompatible                                                                  | Ensure the same key bank/server is still used                                 | No Special Consideration                                                      |

**Restriction:** If encryption is enabled for a device class, and the device class is associated with a storage pool, the storage pool should not share a scratch pool with other device classes that cannot be encrypted. If a tape is encrypted, and you plan to use it on a drive that cannot be encrypted, you must manually relabel the tape before it can be used on that drive.

## Securing sensitive client data

After client data has been deleted, it might still be possible to recover it. For sensitive data, this condition is a potential security exposure. The destruction of deleted data, also known as shredding, lets you store sensitive data so that it is overwritten one or more times after it is deleted.

This process increases the difficulty of discovering and reconstructing the data later. Tivoli Storage Manager performs shredding only on data in random-access disk storage pools. You can configure the server to ensure that sensitive data is stored only in storage pools in which shredding is enforced (shred pools).

Shredding occurs only after a data deletion commits, but it is not necessarily completed immediately after the deletion. The space occupied by the data to be shredded remains occupied while the shredding takes place, and is not available as free space for new data until the shredding is complete. When sensitive data is written to server storage and the write operation fails, the data that was already written is shredded.

Shredding performance is affected by the amount of data to be shredded, the number of times that data is to be overwritten, and the speed of the disk and server hardware. You can specify that the data is to be overwritten up to ten times. The greater the number of times, the greater the security but also the greater the impact on server performance. It is strongly recommended that write caching be

disabled for any disk devices used to store sensitive data. If write caching is enabled, the overwrite operations are adversely affected.

Shredding can be done either automatically after the data is deleted or manually by command. The advantage of automatic shredding is that it is performed without administrator intervention whenever deletion of data occurs. This limits the time that sensitive data might be compromised. Automatic shredding also limits the time that the space used by deleted data is occupied. The advantage of manual shredding is that it can be performed when it will not interfere with other server operations.

## Setting up shredding

You must configure Tivoli Storage Manager so that data identified as sensitive is stored only in storage pools that will enforce shredding after that data is deleted.

### Procedure

Complete the following steps to set up your shredding configuration:

1. Specify that you want data to be shredded either automatically after it is deleted or manually by an administrator. You can specify how shredding is to be done by setting the SHREDDING server option.

```
shredding automatic
```

You can also set the shredding option dynamically by using the **SETOPT** command.

2. Set up one or more random access disk storage pool hierarchies that will enforce shredding and specify how many times the data is to be overwritten after deletion. For example,

```
define stgpool shred2 disk shred=5
define stgpool shred1 disk nextstgpool=shred2 shred=5
```

3. Define volumes to those pools, and specify disks for which write caching can be disabled.

```
define volume shred1 j:\storage\bf.dsm formatsize=100
define volume shred2 m:\storage\bg.dsm formatsize=100
```

4. Define and activate a policy for the sensitive data. The policy will bind the data to a management class whose copy groups specify shred storage pools.

```
define domain shreddom
define policyset shreddom shredpol
define mgmtclass shreddom shredpol shredclass
define copygroup shreddom shredpol shredclass type=backup
destination=shred1
define copygroup shreddom shredpol shredclass type=archive
destination=shred1
activate policyset shreddom shredpol
```

5. Identify those client nodes whose data should be shredded after deletion, and assign them to the new domain.

```
update node engineering12 domain=shreddom
```

### Results

If you have specified manual shredding with the SHREDDING server option, you can start the shredding process by issuing the **SHRED DATA** command. This command lets you specify how long the process will run before it is canceled and how the process responds to an I/O error during shredding. For objects that cannot be shredded, the server reports each object.



**Note:** If you specify manual shredding, run the **SHRED DATA** command regularly, at least as often as you perform other routine server-maintenance tasks (for example, expiration, reclamation, and so on). Doing so can prevent performance degradation of certain server processes (in particular, migration). For best results, run **SHRED DATA** after any operation (for example, expiration and migration) that deletes files from a shred pool.

To see the status and amount of data waiting to be shredded, you can issue the **QUERY SHREDSTATUS** command. The server reports a summary of the number and size of objects waiting to be shredded. To display detailed information about data shredding on the server, issuing the following command:

```
query shredstatus format=detailed
```

Figure 72 displays a detailed report for the storage pool.

| Shredding<br>Active | Objects<br>Awaiting<br>Shred | Occupied<br>Space<br>(MB) | Data left<br>to shred<br>(MB) |
|---------------------|------------------------------|---------------------------|-------------------------------|
| -----               | -----                        | -----                     | -----                         |
| NO                  | 4                            | 182                       | 364                           |

Figure 72. Querying shredding status

When data shredding completes, a message is issued that reports the amount of data that was successfully shredded and the amount of data that was skipped, if any.

## Ensuring that shredding is enforced

It is important to ensure that sensitive data is stored only in shred storage pools. Only data that is in a shred pool is shredded after being deleted.

Some changes to objects and some server operations involving the moving or copying of data could result in sensitive data that cannot be shredded. This would compromise the intent and value of shredding.

Table 48 describes these types of operations.

Table 48. Commands affecting the shredding process

| Command                | Operation                                                                                                                                                                                                                                                                                                                                                              |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>BACKUP STGPOOL</b>  | To back up a shred pool to a copy storage pool you must set the <b>SHREDTONOSHRED</b> parameter to YES. If this value is not specified, the server issues an error message and does not allow the backup. If this value is specified, the server does not issue a warning message when the shred pool is backed up, and that data cannot be shredded.                  |
| <b>COPY ACTIVEDATA</b> | To copy data from a shred pool to an active-data pool you must set the <b>SHREDTONOSHRED</b> parameter to YES. If this value is not specified, the server issues an error message and does not allow the data to be copied. If this value is specified, the server does not issue a warning when data from the shred pool is copied, and that data cannot be shredded. |



Table 48. Commands affecting the shredding process (continued)

| Command                                                        | Operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DEFINE STGPOOL</b>                                          | Tivoli Storage Manager does not require that the next storage pool for a shred pool also be a shred pool. When you define a storage pool and you specify a non-shred pool as the next storage pool, a warning message is issued, but you can choose to continue with the definition. After the storage pool is defined and migration occurs, no message is issued. However, the data in the next storage pool cannot be shredded.                                                                                                                                                                                                                                                                                             |
| <b>EXPIRE INVENTORY<br/>DELETE FILESPACE<br/>DELETE VOLUME</b> | Data in a shred pool is deleted after inventory expiration and after deletion of a file space or volume. After the data is deleted, it is shredded. However, if data is deleted that has copies in both shred and non-shred pools, the server shreds only those copies in the shred pools and does not issue a warning message before deletion. The data non-shred pools cannot be shredded.                                                                                                                                                                                                                                                                                                                                  |
| <b>EXPORT NODE<br/>EXPORT SERVER</b>                           | To export data from a shred pool you must set the <b>ALLOWSHREDDABLE</b> parameter to YES. If this value is specified, and the exported data includes data from shred pools, that data cannot be shredded. If the export operation includes data from shred pools, the server does not issue a warning message.                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>GENERATE BACKUPSET</b>                                      | To include data from a shred pool when you generate a backup set, you must set the <b>ALLOWSHREDDABLE</b> parameter to YES. If this value is specified and the backup set includes data from shred pools, that data cannot be shredded, and no warning message is issued.                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>MOVE DATA</b>                                               | You cannot move data from a shred pool to a destination that is not another shred pool unless you set the <b>SHREDTONOSHRED</b> parameter to YES. When the move is complete, the original data is shredded but the data in the destination storage pool cannot be shredded.                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>UPDATE STGPOOL</b>                                          | <p>The server issues a warning message for any of the storage pool updates listed below. You can choose to continue with the operation, but the result is that some or all sensitive data cannot be shredded.</p> <ul style="list-style-type: none"> <li>• For a shred pool, add or change a non-shred pool as the next pool in the hierarchy. This includes copy storage pools and active data storage pools.</li> <li>• Change a pool from non-shred to shred when the NEXTSTGPOOL attribute specifies a non-shred pool.</li> <li>• Change a pool with COPYSTGPools or ACTIVEDATAPOOLS attributes from non-shred to shred.</li> <li>• Change a pool from shred to non-shred by setting the SHRED parameter to 0.</li> </ul> |

---

## Creating and using client backup sets

A backup set is a collection of backed-up data from one client, which is stored and managed as a single object on specific media in server storage. The server creates copies of active versions of a client's backed up objects that are within the one or more file spaces specified with the **GENERATE BACKUPSET** command, and consolidates them onto sequential media.

Currently, the backup object types that are supported for backup sets include directories, files, and image data. If you are upgrading from Tivoli Storage Manager Express®, backup sets can also contain data from Data Protection for Microsoft SQL and Data Protection for Microsoft Exchange servers. The backup set process is also called instant archive.

You can generate backup sets on the server for individual client nodes or for groups of nodes. A node group is a group of client nodes that are acted upon as a single entity. If you specify one or more node groups, the server generates a backup set for each node and places all of the backup sets together on a single set of output volumes. To create a node group, use the **DEFINE NODEGROUP** command, and then use the **DEFINE NODEGROUPMEMBER** command to add nodes to the group. For details, see the *Administrator's Reference*. The client node for which a backup set is generated must be registered to the server.

Centera storage devices do not support backup sets.

The media might be directly readable by something such as the following device:

- A CD-ROM, JAZ, or ZIP drive attached to a client's computer.

Administrators can generate multiple copies of backup sets that correspond to some point-in-time. The backup sets can be retained for various time periods. This is an efficient way to create long-term storage of periodic backups, without requiring the data to be sent over the network again.

While an administrator can generate a backup set from any client's backed up files, backup sets can only be used by a backup-archive client.

You cannot generate a backup set with files that were backed up to Tivoli Storage Manager by using NDMP. However, you can create a backup set with files that were backed up using NetApp SnapShot Difference.

When generating backup sets, the server searches for active file versions in an active-data storage pool associated with a FILE device class, if such a pool exists. For details about the complete storage-pool search-and-selection order, see "Selection for active file versions" on page 426.

Data from a shred storage pool will not be included in a backup set unless you explicitly permit it by setting the **ALLOWSHREDDABLE** parameter to YES in the **GENERATE BACKUPSET** command. If this value is specified, and the client node data includes data from shred pools, that data cannot be shredded. The server does not issue a warning if the backup set operation includes data from shred pools. For more information about shredding, see "Securing sensitive client data" on page 529.

For details about creating and using backup sets, see the following sections:

- "Generating client backup sets on the server" on page 534

- “Restoring backup sets from a backup-archive client” on page 538
- “Moving backup sets to other servers” on page 538
- “Managing client backup sets” on page 539

## Generating client backup sets on the server

You can generate backup sets on the server for client nodes. The client node for which a backup set is generated must be registered to the server. An incremental backup must be completed for a client node before the server can generate a backup set for the client node.

### About this task

The **GENERATE BACKUPSET** command runs as a background process on the server. If you cancel the background process created by this command, the media may not contain a complete backup set. You must have system or restricted policy over the domain to which the node is assigned to generate a backup set.

Generate backup set processing attempts to process all available objects onto the backup set media. However, objects may be skipped due to being unavailable on the server or other errors (I/O, media, hardware) that can occur at the time of backup set generation. Some errors may lead to termination of processing before all available data can be processed. For example, if the source data for a backup set is on multiple sequential volumes and the second or subsequent segment of an object spanning volumes is on a volume that is unavailable, processing is terminated.

If objects are skipped or other problems occur to terminate processing, review all of the messages associated with the process to determine whether or not it should be run again. To obtain a complete backup set, correct any problems that are indicated and reissue the **GENERATE BACKUPSET** command.

### Procedure

To improve performance when generating backup sets, you can do one or both of the following tasks:

- Collocate the primary storage pool in which the client node data is stored. If a primary storage pool is collocated, client node data is likely to be on fewer tape volumes than it would be if the storage pool were not collocated. With collocation, less time is spent searching database entries, and fewer mount operations are required.
- Store active backup data in an active-data pool associated with a FILE device class. When generating a backup set, the server will search this type of active-data pool for active file versions before searching other possible sources.

### Results

See the following sections:

- “Choosing media for generating the backup set” on page 535
- “Selecting a name for the backup set” on page 535
- “Setting a retention period for the backup set” on page 536
- “Example: generating a client backup set” on page 536
- “Generating backup sets to a specific point-in-time” on page 536
- “Generating backup sets with multiple data types” on page 537

- “Creating a single set of backup volumes with data from multiple nodes” on page 537

## Choosing media for generating the backup set

To generate a backup set, you must specify a device class that is associated with the media to which the backup set will be written.

### About this task

You can write backup sets to sequential media: sequential tape and device class FILE. The tape volumes containing the backup set are not associated with storage pools and, therefore, are not migrated through the storage pool hierarchy.

For device class FILE, the server creates each backup set with a file extension of OST. You can copy FILE device class volumes to removable media that is associated with CD-ROM, JAZ, or ZIP devices, by using the REMOVABLEFILE device type.

You can determine whether to use scratch volumes when you generate a backup set. If you do not use specific volumes, the server uses scratch volumes for the backup set.

You can use specific volumes for the backup set. If there is not enough space to store the backup set on the volumes, the server uses scratch volumes to store the remainder of the backup set.

### Procedure

Consider the following items when you select a device class for writing the backup set:

- Generate the backup set on any sequential access devices whose device types are supported on both the client and server. If you do not have access to compatible devices, you will need to define a device class for a device type that is supported on both the client and server.
- Ensure that the media type and recording format used for generating the backup set is supported by the device that will be reading the backup set.
- You must restore, with the IBM Tivoli Storage Manager server, backup sets that are written to more than one volume and generated to a REMOVABLEFILE device. Issue the **RESTORE BACKUPSET** command and specify `-location=server` to indicate that the backup set is on the Tivoli Storage Manager server.

### Results

For more information, see “Configuring removable media devices” on page 101.

## Selecting a name for the backup set

The server adds a unique suffix to the name you specify for the backup set. For example, if you name the backup set mybackupset, the server adds a unique extension, such as 3099, to the name. This allows you to create backup sets with the same name without overwriting previous backup sets.

To later display information about this backup set, you can include a wildcard character with the name, such as mybackupset\*, or you can specify the fully qualified name, such as mybackupset.3099.

## Setting a retention period for the backup set

You can set the retention period, specified as a number of days, to retain the backup set on the server. You can specify a number between zero and 30,000 days.

Backup sets are retained on the server for 365 days if you do not specify a value. The server uses the retention period to determine when to expire the volumes on which the backup set resides.

## Example: generating a client backup set

Generate a backup set on CD-ROM that the client can later use to restore the data. Because CD-ROM is a read-only medium, you must create a backup set on a device that the server can write to before you create the backup set on the CD-ROM. Do not exceed the CD-ROM data capacity.

### Procedure

Complete the following steps to generate a backup set on a CD-ROM:

1. Define a device class whose device type is FILE. Name the device class CDFILE:  

```
define devclass cdfile devtype=file maxcapacity=640M dir=/backupset
```
2. Create a backup set with a device type of FILE for client node JOHNSON. Name the backup set PROJECT and retain it for 90 days.  

```
generate backupset johnson project devclass=file
volumes=BK1,BK2,BK3 retention=90
```

**Attention:** Volumes=BK1,BK2,BK3 specifies that the backup set is put into files named BK1, BK2 and BK3. This assumes that the backup set is large enough to require three 650MB files.

3. Use any CD-ROM authoring software to put these files onto CD-ROMs. For this example, the CD-ROM volume names are BK1, BK2, and BK3.
  - The authoring software must label each CD-ROM.
  - The label must exactly match the name of the file.

For an example of using the backup set on the CD-ROM, see “Moving backup sets to other servers” on page 538.

## Generating backup sets to a specific point-in-time

You can generate a backup set to a specific point-in-time by using the **PITDATE** and **PITTIME** parameters on the **GENERATE BACKUPSET** command. When these dates are specified, the new backup set will contain files that were active at the specified date and time, even if the files are inactive at the time the **GENERATE BACKUPSET** command is issued.

Backup sets are generated to a point-in-time by using one of two date and time specifications: the date and time specified on the **GENERATE BACKUPSET** command, or the date and time that the **GENERATE BACKUPSET** command was issued.

Point-in-time backup set generation works best if a recent date and time are specified. Files that have expired, or are marked as expire-immediately cannot be included in the backup set.

## Generating backup sets with multiple data types

You can use the **GENERATE BACKUPSET** command to generate backup sets that contain either file or image data. You can use the **DATATYPE** parameter to specify the types of data to be included. A separate backup set is generated for each specified data type, but all the backup sets are stored together on a single set of output media.

You can use the **DATATYPE** parameter to limit the backup set to only one data type. For example, you might do this if you don't want to store redundant data on the backup set media. Alternatively, you can specify that both file and image backup data be included from a machine in order to reduce the number of tapes that must be included in your off-site tape rotation.

Image backup sets include the image and all files and directories changed or deleted since the image was backed up so that all backup sets on the media represent the same point in time. Tables of contents are automatically generated for any backup sets that contain image or application data. If the **GENERATE BACKUPSET** command cannot generate a table of contents for one of these backup sets, then it will fail.

For file level backup sets, the table of contents generation is optional. By default, the command attempts to create a table of contents for file level backup sets, but it will not fail if a table of contents is not created. You can control the table of contents option by specifying the **TOC** parameter.

## Creating a single set of backup volumes with data from multiple nodes

On the **GENERATE BACKUPSET** command, you can specify multiple nodes or node groups, and you can use wildcards with node names.

A separate backup set is generated for each specified node, but all of the backup sets will be stored together on the same set of output volumes. The backup set for each node has its own entry in the database. The **QUERY BACKUPSET** command will display information about all backup sets, whether they are on their own tape or stacked together with other backup sets onto one tape.

On the **DEFINE BACKUPSET** command, you can also specify multiple nodes or node groups, and you can use wildcards with node names. **DEFINE BACKUPSET** determines what backup sets are on the set of tapes and defines any that match the specified nodes. Specifying only a single wildcard character (\*) for the node name has the effect of defining all the backup sets on the set of tapes. Conversely, you can define only those backup sets belonging to a particular node by specifying just the name of that node. Backup sets on tapes belonging to nodes that are not specified on the command are not defined. They will still exist on the tape, but cannot be accessed.

The **QUERY**, **UPDATE**, and **DELETE BACKUPSET** commands also allow the specification of node group names in addition to node names. When you delete backup sets, the volumes on which the backup sets are stored are not returned to scratch as long as any backup set on the volumes remain active.

## Restoring backup sets from a backup-archive client

Backup-archive client nodes can restore their backup sets either directly from the server or by using a device attached to the client's computer that will read the media in which the backup set is stored. This second method only works for file-level backup sets.

Backup sets can only be used by a backup-archive client, and only if the files in the backup set originated from a backup-archive client.

For more information about restoring backup sets, see the *Backup-Archive Clients Installation and User's Guide* for your particular operating system.

### Selecting individual files for restore

You can query a backup set table of contents to select individual files for restore. Table of contents are generated when a new backup set is created. They contain entries for each object stored in the backup set. Entries detail the position of the object within the backup set.

In order to query the contents of a backup set and choose files to restore, tables of contents need to be loaded into the server database. The backup-archive client can specify more than one backup set table of contents to be loaded to the server at the beginning of a restore session.

### Restoring image data from backup sets

Backup sets containing image data can be used during a disaster recovery situation, for example, when a hard drive crashes and needs to be replaced. Individual file restore is not possible using an image backup, so backup sets containing normal file system data should be maintained for most other restores. A backup set may contain image data or file system data, including files and directories, but not both.

Image backups and restores require a table of contents when generating a backup set for image data. If the table of contents existed but was deleted for some reason then the image backup set cannot be restored until the table of contents is regenerated with the **GENERATE BACKUPSETTOC** command.

## Moving backup sets to other servers

You can define (move) a backup set generated on one server to another Tivoli Storage Manager server. Any client backup set that you generate on one server can be defined to another server as long as the servers share ../common device type.

### About this task

The level of the server defining the backup set must be equal to or greater than the level of the server that generated the backup set.

| Task                | Required Privilege Class                                                                                                                                                                                                        |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Define a backup set | If the REQSYSAUTHOUTFILE server option is set to YES, system privilege is required. If the REQSYSAUTHOUTFILE server option is set to NO, system or restricted policy over the domain to which the node is assigned is required. |



## Procedure

Using the example described in “Example: generating a client backup set” on page 536, you can make the backup set that was copied to the CD-ROM available to another server by issuing the following command:

```
define backupset johnson project devclass=cdrom volumes=BK1,BK2,BK3
description="backup set copied to CD-ROM"
```

## Results

If you have multiple servers connecting to different clients, the **DEFINE BACKUPSET** command makes it possible for you to take a previously generated backup set and make it available to other servers. The purpose is to allow the user flexibility in moving backup sets to different servers, thus allowing the user the ability to restore their data from a server other than the one on which the backup set was created.

### Important:

1. Devclass=cdrom specifies a device class of type REMOVABLEFILE that points to your CD-ROM drive. CD-ROMs have a maximum capacity of 650MB.
2. Volumes=BK1,BK2,BK3 specifies the names of the volumes containing the backup set. The volume label of these CD-ROMs must match the name of the file on the volume exactly.

## Managing client backup sets

You can update, query, and delete backup sets.

### About this task

| Task                                                 | Required Privilege Class                                                                                                                                                                                                        |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Update the retention period assigned to a backup set | System or restricted policy over the domain to which the node is assigned                                                                                                                                                       |
| Display information about backup sets                | Any administrator                                                                                                                                                                                                               |
| Display information about backup set contents        | System or restricted policy over the domain to which the node is assigned                                                                                                                                                       |
| Delete backup set                                    | If the REQSYSAUTHOUTFILE server option is set to YES, system privilege is required. If the REQSYSAUTHOUTFILE server option is set to NO, system or restricted policy over the domain to which the node is assigned is required. |

### Generating a table of contents for a backup set

Tables of contents for backup sets are created as part of backup set generation.

- By default, when generating a backup set containing files and directories, the server will attempt to create a table of contents for a new backup set, but will not fail the backup set generation process if it cannot do so. You can, however, choose to require a table of contents by setting the TOC parameter to YES.
- When generating a backup set that contains API data or images, the server will require that a table of contents is generated. You cannot override this default.

In either case, if a table of contents is required and the server cannot create it, the backup set generation process will fail.



Tables of contents:

- Reside on the server even if the backup set's media has been moved off-site.
- Can be generated for existing backup sets that do not contain a table of contents.
- Can be re-generated when a backup set is defined on a new server, or if using a user-generated copy on a different medium.

The **GENERATE BACKUPSETTOC** command allows a table of contents to be created for backup sets that do not have one. It may be used after a backup set is added to the server via the **DEFINE BACKUPSET** command or for backup sets that were generated by an earlier release of the Tivoli Storage Manager server.

Backup set tables of contents are stored in the storage pool identified by the **TOCDESTINATION** attribute of the backup copy group associated with the management class to which the backup set is bound. The management class to which the backup set is bound will either be the default management class in the policy domain in which the backup set's node is registered, or the management class specified by the **TOCMGmtclass** parameter of the **GENERATE BACKUPSET**, **GENERATE BACKUPSETTOC**, or **DEFINE BACKUPSET** command. Tables of contents for backup sets are retained until the backup set with which they are associated expires or is deleted. They are not subject to the policy associated with their management class. You can issue the **QUERY BACKUPSET** command to show whether a given backup set has a table of contents or not. Output from the **QUERY BACKUPSET** command can be filtered based on the existence of a table of contents. This allows you to determine which backup sets may need to have a new table of contents created, or conversely, which backup sets could be used with the client's file-level restore.

## Updating the retention period of a backup set

When you want to change the number of days the server retains a backup set, update the retention period that is associated with the backup set.

### Procedure

To update the retention period assigned to backup set named **ENGDATA.3099**, belonging to client node **JANE**, to 120 days, issue the following example command:

```
update backupset jane engdata.3099 retention=120
```

## Displaying backup set information

To view information about backup sets, you can use the **QUERY BACKUPSET** command. The output that is displayed lists information such as the name of the client node whose data is contained in the backup set as well as the description of the backup set, assuming one has been used.

### About this task

The following figure shows the report that is displayed after you enter:

```
query backupset f=d
```

```
Node Name: JANE
Backup Set Name: MYBACKUPSET.3099
Date/Time: 09/04/2002 16:17:47
Retention Period: 60
Device Class Name: DCFILE
Description:
Filespace names: \\jane\c$ \\jane\d$
Volume names: /tsmpool/bksetvo101.ost /tsmpool/bksetvo102.ost
```

The **FORMAT=DETAILED** parameter on the **QUERY BACKUPSET** provides the client file spaces contained in the backup set and the list of volumes of the backup set.

## Displaying contents of backup sets

You can display information about the contents of backup sets by using the **QUERY BACKUPSETCONTENTS** command. When you issue the query, the server displays only one backup set at a time.

The server displays information about the files and directories that are contained in a backup set. After you issue the query backupsetcontents jane engdata.3099 command, the following output is displayed:

| Node Name | Filespace Name | Client's Name for File |
|-----------|----------------|------------------------|
| JANE      | /srvr          | /deblock               |
| JANE      | /srvr          | /deblock.c             |
| JANE      | /srvr          | /dsmerror.log          |
| JANE      | /srvr          | /dsmxxxxx.log          |
| JANE      | ...            | .....                  |

**Tip:** To display the contents of an image backup set, specify **DATATYPE=IMAGE** on the **QUERY BACKUPSETCONTENTS** command.

## Displaying file space and file names

File space names and file names that can be in a different code page or locale than the server do not display correctly in the Operations Center or the administrative command-line interface. The data itself is backed up and can be restored properly, but the file space or file name may display with a combination of invalid characters or blank spaces.

If the file space name is Unicode enabled, the name is converted to the server's code page for display. The results of the conversion for characters not supported by the current code page depends on the operating system. For names that Tivoli Storage Manager is able to partially convert, you may see question marks (??), blanks, unprintable characters, or "...". These characters indicate to the administrator that files do exist. If the conversion is not successful, the name is displayed as "...". Conversion can fail if the string includes characters that are not available in the server code page, or if the server has a problem accessing system conversion routines.

## Deleting backup sets

When the server creates a backup set, the retention period assigned to the backup set determines how long the backup set remains in the database.

### Procedure

To delete a backup set named ENGDATA.3099, belonging to client node JANE, created before 11:59 p.m. on March 18, 1999, issue the following command:

```
delete backupset jane engdata.3099 begindate=03/18/1999 begintime=23:59
```

To delete all backup sets belonging to client node JANE, created before 11:59 p.m. on March 18, 1999, enter:

```
delete backupset jane * begindate=03/18/1999 begintime=23:59
```

### Results

When that date passes, the server automatically deletes the backup set when expiration processing runs. However, you can also manually delete the client's backup set from the server before it is scheduled to expire by using the **DELETE BACKUPSET** command.

After a backup set is deleted, the volumes return to scratch status if Tivoli Storage Manager acquired them as scratch volumes. Scratch volumes associated with a device type of FILE are deleted. However, if multiple backup sets are stored on the volumes, all of the backup sets must expire or be deleted before the volumes are returned to scratch.

---

## Enabling clients to use subfile backup

A basic problem that remote and mobile users face today is connecting to storage management services by using modems with limited bandwidth or poor line quality. This creates a need for users to minimize the amount of data they send over the network, as well as the time that they are connected to the network.

To help address this problem, you can use subfile backups. When a client's file has been previously backed up, any subsequent backups are typically made of the portion of the client's file that has changed (a subfile), rather than the entire file. A base file is represented by a backup of the entire file and is the file on which subfiles are dependent. If the changes to a file are extensive, a user can request a backup on the entire file. A new base file is established on which subsequent subfile backups are dependent.

This type of backup makes it possible for mobile users to reduce connection time, network traffic, and the time it takes to do a backup.

To enable this type of backup, see "Setting up clients to use subfile backup" on page 543.

### Subfile backups

Assume that on a Monday, a user requests an incremental backup of a file called CUST.TXT. The user makes daily updates to the CUST.TXT file and requests subsequent backups.

The following table describes how Tivoli Storage Manager manages backups of this file.

| Version | Day of subsequent backup | What Tivoli Storage Manager backs up                                                                                                                                                                                                    |
|---------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| One     | Monday                   | The entire CUST.TXT file (the base file)                                                                                                                                                                                                |
| Two     | Tuesday                  | A subfile of CUST.TXT. The server compares the file backed up on Monday with the file that needs to be backed up on Tuesday. A subfile containing the changes between the two files is sent to the server for the backup.               |
| Three   | Wednesday                | A subfile of CUST.TXT. Tivoli Storage Manager compares the file backed up on Monday with the file that needs to be backed up on Wednesday. A subfile containing the changes between the two files is sent to the server for the backup. |

**Related reference:**

“Setting policy to enable point-in-time restore for clients” on page 513

“Policy for logical volume backups” on page 509

## Setting up clients to use subfile backup

The subfile backup pertains to the sections of the files that have changed.

### Procedure

To enable subfile backup, complete the following tasks:

1. On the server: You must set up the server to allow clients to back up subfiles. Issue the **SET SUBFILE** command:

```
set subfile client
```

2. On the clients: The SUBFILEBACKUP, SUBFILECACHEPATH, and SUBFILECACHESIZE options must be set in the client's options file (dsm.opt).

You can control these options from the server by including them in client option sets. For example, you can disable subfile backup for individual client nodes by setting SUBFILEBACKUP=NO in the client option set associated with the client node. See “Creating client option sets on the server” on page 473 for how to set up and use client option sets.

See *Backup-Archive Clients Installation and User's Guide* for more information about the options.

## Managing subfile backups

Tivoli Storage Manager manages subfiles that are restored, exported, imported, or added to a backup set.

## Restoring subfiles

When a client issues a request to restore subfiles, Tivoli Storage Manager restores subfiles along with the corresponding base file back to the client. This process is transparent to the client. That is, the client does not have to determine whether all subfiles and corresponding base file were restored during the restore operation.

You can define (move) a backup set that contains subfiles to an earlier version of a server that is not enabled for subfile backup. That server can restore the backup set containing the subfiles to a client not able to restore subfiles. However, this process is not recommended as it could result in a data integrity problem.

## Exporting and importing subfiles

When subfiles are exported during an export operation, Tivoli Storage Manager also exports the corresponding base file to volumes you specify.

When the base file and its dependent subfiles are imported from the volumes to a target server and import processing is canceled while the base file and subfiles are being imported, the server automatically deletes any incomplete base files and subfiles that were stored on the target server.

## Expiration processing of base files and subfiles

Because subfiles are useless without the corresponding base file, the server processes base files eligible for expiration differently.

For example, when expiration processing runs, Tivoli Storage Manager recognizes a base file as eligible for expiration but does not delete the file until all its dependent subfiles have expired. For more information on how the server manages file expiration, see “Running expiration processing to delete expired files” on page 514.

## Adding subfiles to backup sets

When a subfile is added to a backup set, Tivoli Storage Manager includes its corresponding base file with the backup set.

If the base file and dependent subfiles are stored on separate volumes when a backup set is created, additional volume mounts may be required to create the backup set.

## Deleting base files

If a base file is deleted as a result of processing a **DELETE VOLUME** command, the server recognizes its dependent subfiles and deletes them from the server as well. Subfiles without the corresponding base file are incomplete and useless to the user.

---

## Archiving data

Managing archive data on the server becomes important when you have client nodes that archive large numbers (hundreds or thousands) of files every day.

If you archive files with automated tools that start the command-line client or API, you might encounter large numbers. If performance degrades over time during an archive operation, or you have a large amount of storage that is used by archives, consider advanced techniques. See “Archive operations overview” on page 545 and “Managing storage usage for archives” on page 545.

## Archive operations overview

IBM Tivoli Storage Manager allows clients to organize archived files into packages. The description field of an archive request serves as the way to identify the package.

All files that are archived with the same description become members of the same archive package. If the user does not specify a description when archiving, the client program provides a default description with each archive request. The default description includes the date.

When files are archived, the client program archives the paths (directories) to those files to preserve access permissions which are specific to the operating system. Directories are also included in archive packages. If the same directory is archived with different descriptions, the directory is stored once with each package. If a command line user issues a **QUERY ARCHIVE** command, multiple entries for the same directory may appear. Closer inspection shows that each entry has a different description.

The GUI and Web client programs allow a user to navigate through a client node's archives by first displaying all descriptions (the package identifiers), then the directories, and finally the files. Users can retrieve or delete individual files or all files in a directory. Command line client and API users can specify a description when they archive files, or when they send requests to query, retrieve or delete archived files.

When retrieving files, the server searches for the most current file versions. It will search in an active-data storage pool associated with a FILE device class, if such a pool exists.

## Managing storage usage for archives

The amount of server database storage needed for archive operations is affected by the use of descriptions for archiving and by the archiving of directories.

Consider the following two actions that you can take to minimize the storage usage:

### Minimize the number of unique descriptions

You can reduce storage usage by archiving more files into fewer packages (by reducing the number of unique descriptions). The amount of storage used for directories is also affected by the number of packages. If you archive a file three different times using three different descriptions, the server stores both the file and the directory three times, once in each package. If you archives the same file three different times using just one description, the server stores the file three times, but the directory is stored just one time.

### Archive directories only if needed

Archiving directories might be necessary if the directories are needed to group files for query or retrieve, or if the directory-level access permission information needs to be archived.

The users of the GUI and Web client programs need descriptions to aid in navigation, to find archived files. You can minimize storage usage for archives by reducing the number of packages. For client nodes that are always accessed via the command-line interface you can also use some other techniques.

See the following topics for more information:

“Minimizing archive storage use”

“Reducing archive storage use for client nodes with many archives”

“Preventing archive of directory-level access permissions” on page 547

## Minimizing archive storage use

You can minimize the storage used for new archives for a client node that is always accessed through the command-line interface by ensuring that each file archived by the client node has a unique name and that you use the same description or a limited number of unique descriptions to group and identify archived files for the client node.

If the user follows these guidelines, the client node will have one or a limited number of archive packages. Because of the small number of packages, there are only small numbers of copies of each directory entry. The savings in storage space that result are noticeable when files with the same path specification are archived multiple times over multiple days.

Having a unique description for an archive is not necessary if archived files themselves have unique names. For example, files might already have a date or time stamp encoded in their names. The same description can be used each time a client node archives files. The user must specify the description to avoid getting the default for the description, which is Archive Date: yyyy/mm/dd. The user can specify a description as short as one character, or as simple as a blank space (but not a null entry). For example, the user enters this command:

```
dsmc archive c:\10sept2003ch1.doc -description=" "
```

If the user follows these guidelines, you do not need to convert the node because converting the node affects archive descriptions. A client node that is used with these guidelines has only one or a small number of archive descriptions, so there is no improvement in performance to be gained by converting the node.

See the *Backup-Archive Clients Installation and User's Guide* for details about archive operations and client options.

## Reducing archive storage use for client nodes with many archives

If a client node already has a large number of archive packages, you can reduce the storage use by updating that node's archives.

Do not run the **UPDATE ARCHIVE** command while any other processing for the node is running. If this command is issued for a node with any other object insertion or deletion activity occurring at the same time, locking contention may occur. This may result in processes and sessions hanging until the resource timeout is reached and the processes and sessions terminate.

When you update archives for a node, you have two choices for the action to take:

### Delete directory entries in all archive packages

This action preserves the archive packages, but removes directory entries for all packages, reducing the amount of storage used for archives. Do this only when directory entries that include access permissions are not needed in the archive packages, and the paths are not needed to query or retrieve a group of files. The amount of reduction depends on the number of packages and the number of directory entries. For example, to remove directory entries for the client node SNOOPY, enter this command:



```
update archive snoopy deletedirs
```

**Attention:** After you delete the directory entries, the directory entries cannot be recreated in the archive packages. Do not use this option if users of the client node need to archive access permissions for directories.

#### **Reduce the number of archive packages to a single package for the node**

This action removes all unique descriptions, thereby reducing the number of archive packages to one for the client node. Do this only when the descriptions are not needed and are causing large use of storage. This action also removes directory entries in the archive packages. Because there is now one package, there is one entry for each directory. For example, to reduce the archive packages to one for the client node SNOOPY, enter this command:

```
update archive snoopy resetdescriptions
```

After updating the archives for a node in this way, keep the archive package count to a minimum.

**Attention:** You cannot recreate the packages after the descriptions have been deleted. Do not use this option if users of the client node manage archives by packages, or if the client node is accessed via the GUI or Web client interface.

#### **Preventing archive of directory-level access permissions**

Command-line users who do not need to archive the directory-level access permissions can reduce storage requirements by using the `v2archive` option with the archive request. This option prevents the creation of directory entries in archive packages.

See *Backup-Archive Clients Installation and User's Guide* for details about the option.

**Tip:** The GUI and Web client programs use the directories to allow users to navigate to the archived files. This option is not recommended for GUI or Web client interface users.





---

## Chapter 15. Scheduling operations for client nodes

Scheduling client operations can provide better protection for data, because operations can occur consistently without user intervention. Scheduling can also maximize utilization of resources. When client backups are scheduled at times of lower usage, the impact on the network is minimized.

### About this task

You can schedule operations such as the following:

- Archiving and retrieving client data.
- Running operating system commands.
- Running macro or command files that contain operating system commands, commands, or both. You can schedule a command file to run on clients or application clients.
- Backing up and restoring client data and application client data.

Administrators can perform the following activities to schedule client operations:

| Tasks:                                                                                  |
|-----------------------------------------------------------------------------------------|
| "Scheduling a client operation" on page 550                                             |
| "Starting the scheduler on the clients" on page 552                                     |
| "Displaying information about schedules" on page 561                                    |
| "Starting the scheduler on the clients" on page 552                                     |
| "Displaying information about schedules" on page 561                                    |
| "Creating schedules for running command files" on page 554                              |
| "Updating the client options file to automatically generate a new password" on page 555 |

---

## Prerequisites to scheduling operations

To interact with Tivoli Storage Manager for scheduling operations, client machines must meet certain prerequisites.

- The client node must be registered with the server. For information, see Chapter 11, "Adding client nodes," on page 433.
- The client options file (dsm.opt) must contain the network address of the server that the client will contact for services. See "Connecting nodes with the server" on page 439 for more information.
- The scheduler must be configured and started on the client machine. See the *Backup-Archive Clients Installation and User's Guide* for details.

---

## Scheduling a client operation

To automate client operations, you can define new schedules.

### About this task

When you define a schedule, you assign it to a specific policy domain. You can define more than one schedule for each policy domain.

### Procedure

To set up a client schedule on the server, complete the following steps:

1. Define a schedule by using the **DEFINE SCHEDULE** command. See “Defining client schedules” on page 551.
2. Associate client nodes with the schedule by using the **DEFINE ASSOCIATION** command. See “Associating client nodes with schedules” on page 552.
3. Ensure that the clients start the client scheduler. See “Starting the scheduler on the clients” on page 552.
4. View schedule information and check that the schedule completed successfully by using the **QUERY SCHEDULE** and **QUERY EVENT** commands. See “Displaying schedule information” on page 553.

### Example

The following example shows the commands that are used to schedule client backups for three registered client nodes that are assigned to the STANDARD policy domain.

1. Schedule an incremental backup and associate the schedule with the clients.

```
define schedule standard daily_incr action=incremental -
 starttime=23:00

define association standard daily_incr bill,mark,mercedes
```

The schedule, named DAILY\_INCR, is for the Tivoli Storage Manager default policy domain, named STANDARD. The default specifies backup to the disk storage pool BACKUPPOOL. This schedule calls for a schedule window with the following characteristics:

- Begins on the date the schedule is defined (the default) at 11:00 p.m.
  - Lasts for 1 hour (the default)
  - Is repeated daily (the default)
  - Stays in effect indefinitely (the default)
2. Start the client scheduler.  
For the schedules to become active for a workstation, a user must start the scheduler from the node.

```
dsmc schedule
```

To help ensure that the scheduler is running on the clients, start the client acceptor daemon (CAD) or client acceptor service. The include-exclude list on each client also affects which files are backed up or archived by the two schedules that are defined in the preceding steps. For example, if a file is excluded from backup with an EXCLUDE statement, the file is not backed up when the DAILY\_INCR schedule runs.

3. Because the DAILY\_INCR schedule is to run daily, you can verify whether it is working on the day after you define the schedule and associate it with clients. If the schedule runs successfully, the status is *Completed*.

```
query event standard daily_incr begindate=today-1
```

You can limit the query of events to display only schedules that did not run as expected. For example, you can use the following command daily to see which clients did not run the DAILY\_INCR schedule the previous day:

```
query event standard daily_incr begindate=today-1 -
exceptionsonly=yes
```

Schedules that did not complete successfully have a status of *Failed*, *Missed*, or *Severed*.

4. Check the results of the schedule DAILY\_INCR on one of the clients that was associated with that schedule. For most clients, information about what happens when a schedule runs is stored in the file dsmsched.log. See the *Backup-Archive Clients Installation and User's Guide*.

## What to do next

You can modify, copy, and delete any schedule that you create. For more information, see Chapter 16, “Managing schedules for client nodes,” on page 559.

## Defining client schedules

When you schedule client operations, you need to know what operation you want to run and the time, day, and frequency to run your operation.

### About this task

| Task                                                | Required Privilege Class                                            |
|-----------------------------------------------------|---------------------------------------------------------------------|
| Define client schedules for any policy domain       | System or unrestricted policy                                       |
| Define client schedules for specific policy domains | System, unrestricted policy, or restricted policy for those domains |

To define a schedule for daily incremental backups, use the **DEFINE SCHEDULE** command. You must specify the policy domain to which the schedule belongs and the name of the schedule (the policy domain must already be defined). For example:

```
define schedule engpoldom daily_backup starttime=21:00
duration=2 durunits=hours
```

This command results in the following:

- Schedule DAILY\_BACKUP is defined for policy domain ENGPOLDOM.
- The scheduled action is an incremental backup, which is the default.
- The priority for the operation is 5, which is the default. If schedules conflict, the schedule with the highest priority (lowest number) runs first.
- The schedule window begins at 9:00 p.m., and the schedule itself has 2 hours to start.
- The start window is scheduled every day, which is the default.
- The schedule never expires, which is the default.
- The schedule style is classic, which is the default.

As a best practice, define schedules with durations longer than 10 minutes. This action gives the Tivoli Storage Manager scheduler enough time to process the schedule and prompt the client.

To change the defaults, see the **DEFINE SCHEDULE** command in the *Administrator's Reference*.

## Associating client nodes with schedules

Client nodes process operations according to the schedules associated with the nodes. A client node can be associated with more than one schedule. However, a node must be assigned to the policy domain to which a schedule belongs.

### About this task

You must have system privilege, unrestricted policy, or restricted policy (for the policy domain to which the schedule belongs) to associate client nodes with schedules. Issue the **DEFINE ASSOCIATION** command to associate client nodes with a schedule.

### Procedure

Complete the following step to associate the ENGNODE client node with the WEEKLY\_BACKUP schedule, both of which belong to the ENGPOLDOM policy domain:

```
define association engpoldom weekly_backup engnode
```

### Results

After a client schedule is defined, you can associate client nodes with it by identifying the following information:

- Policy domain to which the schedule belongs
- List of client nodes to associate with the schedule

## Starting the scheduler on the clients

The client scheduler must be started before work scheduled by an administrator can be initiated.

Administrators must ensure that users start the Tivoli Storage Manager scheduler on the client or application client directory, and that the scheduler is running at the schedule start time. After the client scheduler starts, it continues to run and initiates scheduled events until it is stopped.

The way that users start the Tivoli Storage Manager scheduler varies, depending on the operating system that the machine is running. The user can choose to start the client scheduler automatically when the operating system is started, or can start it manually at any time. The user can also have the client acceptor manage the scheduler, starting the scheduler only when needed. For instructions on these tasks, see the *Backup-Archive Clients Installation and User's Guide*.

The client and the Tivoli Storage Manager server can be set up to allow all sessions to be initiated by the server. See "Server-initiated sessions" on page 447 for instructions.

**Note:** Tivoli Storage Manager does not recognize changes that you made to the client options file while the scheduler is running. For Tivoli Storage Manager to

use the new values immediately, you must stop the scheduler and restart it.

## Displaying schedule information

When you request information about schedules, the server displays details. You must have administrative privilege to display information about scheduled operations.

### About this task

- Schedule name
- Policy domain name
- Type of operation to perform
- Start date and time for the initial startup window
- Duration of the startup window
- Time period between startup windows (if using a classic schedule)
- Day (classic schedule) or days (enhanced schedule) of the week on which scheduled operations can begin

The following output shows an example of a report for a classic schedule that is displayed after you enter:

```
query schedule engpoldom
```

| Domain     | * Schedule Name | Action | Start Date/Time     | Duration | Period | Day |
|------------|-----------------|--------|---------------------|----------|--------|-----|
| ENGPOLODOM | MONTHLY_BACKUP  | Inc Bk | 09/04/2002 12:45:14 | 2 H      | 2 Mo   | Sat |
| ENGPOLODOM | WEEKLY_BACKUP   | Inc Bk | 09/04/2002 12:46:21 | 4 H      | 1 W    | Sat |

For enhanced schedules, the standard schedule format displays a blank period column and an asterisk in the day of week column. Issue `FORMAT=DETAILED` to display complete information about an enhanced schedule. Refer to the *Administrator's Reference* for command details. The following output shows an example of a report for an enhanced schedule that is displayed after you enter:

```
query schedule engpoldom
```

| Domain     | * Schedule Name | Action | Start Date/Time     | Duration | Period | Day |
|------------|-----------------|--------|---------------------|----------|--------|-----|
| ENGPOLODOM | MONTHLY_BACKUP  | Inc Bk | 09/04/2002 12:45:14 | 2 H      | 2 Mo   | Sat |
| ENGPOLODOM | WEEKLY_BACKUP   | Inc Bk | 09/04/2002 12:46:21 | 4 H      |        | (*) |

## Checking the status of scheduled operations

A schedule completes successfully if the command associated with the schedule is successfully issued. The success of the issued command is independent on the success of the schedule.

### About this task

Answer the following two questions:

- Did the schedule run successfully?

To determine the success of a scheduled operation, query the server. Each scheduled client operation is called an *event*, and is tracked by the server. You can get information about projected and actual scheduled processes by using the `QUERY EVENT` command. You can get information about scheduled processes that did not complete successfully by using exception reporting with this command.

For example, you can issue the following command to find out which events were missed (did not start) in the ENGPOLDOM policy domain for the WEEKLY\_BACKUP schedule in the previous week:

```
query event engpoldom weekly_backup begindate=-7 begintime=now
enddate=today endtime=now exceptionsonly=yes
```

For more information about managing event records, see “Managing event records” on page 563.

- Did the operation or commands run as a result of the schedule run successfully?  
To determine the success of the commands issued as the result of a successful schedule, you can:

- Check the client's schedule log.

The schedule log is a file that contains information such as the statistics about the backed-up objects, the name of the server backing up the objects, and the time and date of the next scheduled operation. By default, Tivoli Storage Manager stores the schedule log as a file called *dsmsched.log* and places the file in the directory where the Tivoli Storage Manager backup-archive client is installed. Refer to *Backup-Archive Clients Installation and User's Guide* for more information.

- Check the server's activity log.

Search or query the activity log for related messages. For example, search for messages that mention the client node name, within the time period that the schedule ran. For example:

```
query actlog begindate=02/23/2001 enddate=02/26/2001 originator=client
nodename=hermione
```

- Issue the QUERY EVENT command with FORMAT=DETAILED, and view the Result field of the output screen. For example:

```
query event nodes=joe domain2 standard begindate=02/26/2002 enddate=02/27/2002
format=detailed
```

Refer to *Backup-Archive Clients Installation and User's Guide* for an explanation of the Result field.

---

## Creating schedules for running command files

For some clients, you may want to run a command for a different application before running a Tivoli Storage Manager backup. For example, you may want to stop a database application, back up files with Tivoli Storage Manager, and then restart the application. To do this, you can schedule the running of a command file. Application clients *require* schedules that run command files.

### About this task

A command file (also known as a macro or batch file on different operating systems) is stored on the client. This file contains a sequence of commands that are intended to be run during a scheduled start date and time window. Commands can include operating system commands, the Tivoli Storage Manager client's DSMC command, and commands for other applications.

The default schedules do not support command files so you must create a new schedule to schedule command files.

To use command files, administrators must create schedules with the ACTION=MACRO parameter. For example, you can define a schedule called DAILY\_INCR that will process a command file called *c:\incr.cmd* on the client:

```
define schedule standard daily_incr description="daily incremental file"
 action=macro objects="c:\incr.cmd" starttime=18:00 duration=5
 durunits=minutes period=1 perunits=day dayofweek=any
```

Associate the client with the schedule and ensure that the scheduler is started on the client or application client directory. The schedule runs the file called *c:\incr.cmd* once a day between 6:00 p.m. and 6:05 p.m., every day of the week.

---

## Updating the client options file to automatically generate a new password

If the server uses password authentication, clients must use passwords. Passwords are then also required for the server to process scheduled operations for client nodes.

### About this task

If a password expires and is not updated, scheduled operations fail. You can prevent failed operations by allowing Tivoli Storage Manager to generate a new password when the current password expires. If you set the `PASSWORDACCESS` option to `GENERATE` in the Tivoli Storage Manager client options file, *dsm.opt*, Tivoli Storage Manager automatically generates a new password for your client node each time it expires, encrypts and stores the password in a file, and retrieves the password from that file during scheduled operations. You are not prompted for the password.

The `PASSWORDACCESS GENERATE` option is also required in other situations, such as when you want to use the Web backup-archive client to access a client node. See the *Backup-Archive Clients Installation and User's Guide* for more information.

---

## Configuring the scheduler to run under the site-server account

Standard Tivoli Storage Manager security requirements apply to the Microsoft Exchange application client. That is, the application client must be registered to Tivoli Storage Manager and use the appropriate node name and password when connecting with the Tivoli Storage Manager server.

### About this task

To access the Exchange Server APIs, the application client must be running under the Site Services Account. The Site Services Account is the account under which the Exchange services are running. The scheduler service must logon using this account. The scheduler service account information can be specified using the services applet in the Windows Control Panel. For more information about the Site Services Account, see the Microsoft Exchange Server documentation.



## Overview of the Tivoli Storage Manager scheduler running as a Windows service

Client nodes on Windows systems run scheduled operations through the Tivoli Storage Manager scheduler, as do other client nodes. However, client nodes on Windows benefit from running the Tivoli Storage Manager scheduler as a service. This feature allows the Tivoli Storage Manager scheduler to run as a protected account, but does not require you to be logged on to run the service.

The Client Acceptor daemon (CAD) cannot be used by a client node when `SESSIONINITIATION=SERVERONLY`.

Figure 73 shows three Windows machines configured for scheduling.

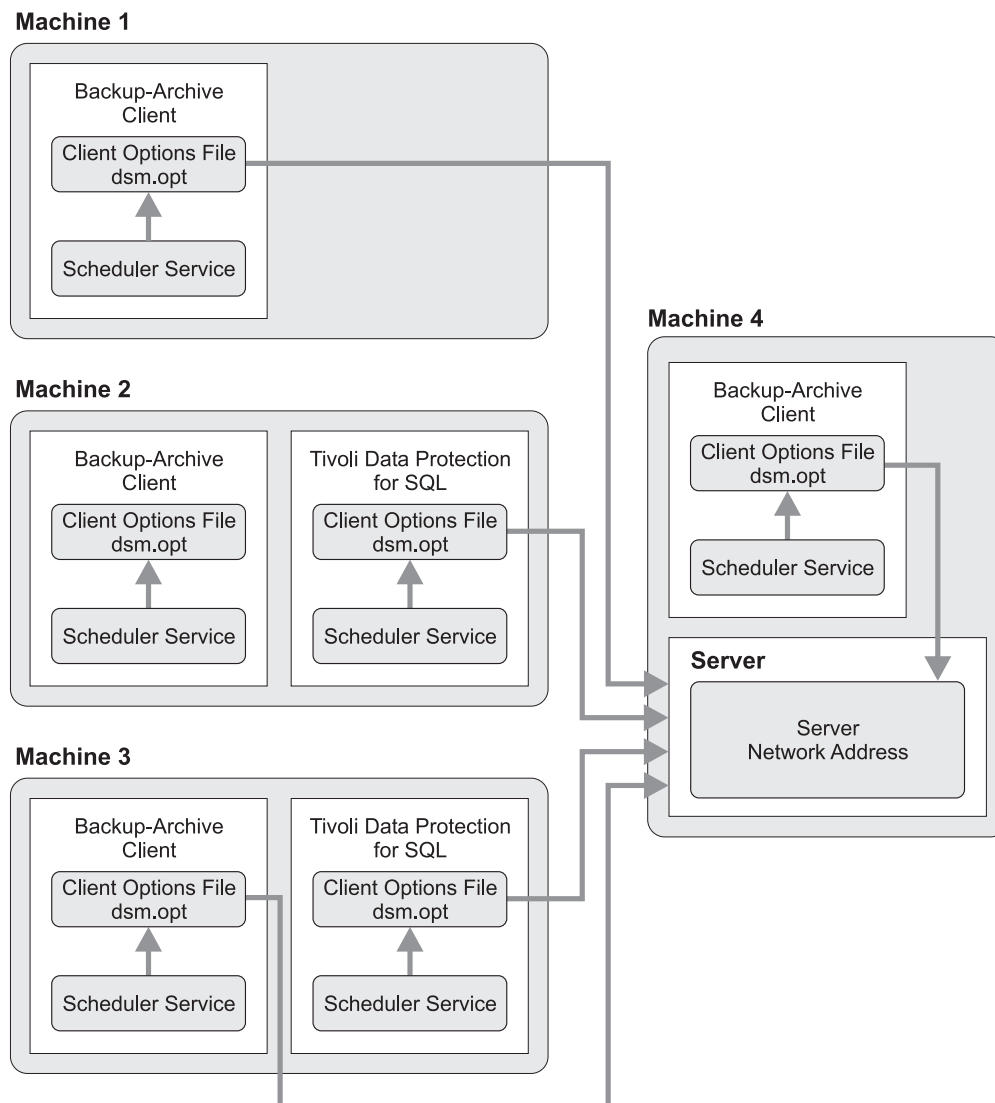


Figure 73. Overview of the Tivoli Storage Manager Scheduler as a Windows Service

### Machine 1 — Remote Client

Machine 1 contains only a backup-archive client. It has been configured to back up its file system to the server on Machine 4. The Tivoli Storage Manager scheduler has been configured. The client uses the information in

the client options file (dsm.opt) to connect to the server. The client options file contains the server address of the server (Machine 4).

**Machine 2 — Tivoli Storage Manager application client**

Machine 2 contains an application client and a backup-archive client. Note that the backup-archive client is not connected to the server. The backup-archive client on Machine 2 has been installed only to provide access to the DSMCUTIL utility, not to back up the resident file system. After the backup-archive client has been used to install the scheduler, it may continue to be required for updating the password or other scheduling service parameters. The application client uses the information in its client options file to connect to the server.

**Machine 3 — Tivoli Storage Manager application client and backup-archive client on the same machine**

Machine 3 contains an application client and a backup-archive client. The application client backs up databases and transaction logs to the server. The backup-archive client backs up other files on Machine 3's file system, including the database administrator's online documentation and performance records. The scheduler wizard is used to install a scheduler service for the backup-archive client and a second scheduler service for the application client. The two clients use the information in their client options files to connect to the server.

**Machine 4 — Server and local backup-archive client on the same machine**

Machine 4 contains a server and a local backup-archive client. For this client (packaged with the Tivoli Storage Manager server), the scheduler is configured during setup, and the administrator needs only to update the password.



---

## Chapter 16. Managing schedules for client nodes

You can manage and coordinate Tivoli Storage Manager schedules for registered client nodes.

### About this task

Administrators can perform the following tasks:

| Tasks:                                                        |
|---------------------------------------------------------------|
| "Managing node associations with schedules" on page 561       |
| "Specifying one-time actions for client nodes" on page 573    |
| "Managing event records" on page 563                          |
| "Managing the throughput of scheduled operations" on page 566 |
| "Managing IBM Tivoli Storage Manager schedules"               |

For a description of what Tivoli Storage Manager views as client nodes, see Chapter 11, "Adding client nodes," on page 433. For information about the scheduler and creating schedules, see Chapter 15, "Scheduling operations for client nodes," on page 549

---

## Managing IBM Tivoli Storage Manager schedules

You can perform the following activities to manage schedules.

### About this task

| Task                                                                      | Required Privilege Class                                            |
|---------------------------------------------------------------------------|---------------------------------------------------------------------|
| Verify that the schedule ran                                              | Any administrator                                                   |
| Add, copy, modify, or delete client schedules in any policy domain        | System or unrestricted policy                                       |
| Add, copy, modify, or delete client schedules for specific policy domains | System, unrestricted policy, or restricted policy for those domains |
| Display information about scheduled operations                            | Any administrator                                                   |

## Adding new schedules

You can add and associate schedules by using the Tivoli Storage Manager command-line interface.

### About this task

You can add new Tivoli Storage Manager schedules by using the DEFINE SCHEDULE command.

After you add a new schedule, associate the node with the schedule. For more information, see "Defining client schedules" on page 551.

## Copying existing schedules

You can create new schedules by copying existing schedules to the same policy domain or a different policy domain. The schedule description and all schedule parameter values are copied to the new schedule. You can then modify the new schedule to meet site-specific requirements.

### About this task

Client node associations are not copied to the new schedule. You must associate client nodes with the new schedule before it can be used. The associations for the old schedule are not changed.

To copy the WINTER schedule from policy domain DOMAIN1 to DOMAIN2 and name the new schedule WINTERCOPY, enter:

```
copy schedule domain1 winter domain2 wintercopy
```

For information, see “Associating client nodes with schedules” on page 552.

## Modifying schedules

You can modify existing schedules by issuing the **UPDATE SCHEDULE** command.

### About this task

You can use the server command line to modify existing schedules in a policy domain.

### Procedure

To modify the ENGWEEKLY client schedule in the ENGPOLDOM policy domain, issue the following command:

```
update schedule engpoldom engweekly period=5 perunits=days
```

### Results

The ENGWEEKLY schedule is updated so that the incremental backup period is now every five days.

## Deleting schedules

When you delete a schedule, Tivoli Storage Manager deletes all client node associations for that schedule.

### About this task

To delete the schedule WINTER in the ENGPOLDOM policy domain, enter:

```
delete schedule engpoldom winter
```

Rather than delete a schedule, you may want to remove all nodes from the schedule and save the schedule for future use. For information, see “Removing nodes from schedules” on page 563.

See “Associating client nodes with schedules” on page 552 for more information.

## Displaying information about schedules

You can display information about schedules such as domain, schedule name, date, time, duration or day of the week.

### About this task

The following information is displayed:

- Schedule name
- Policy domain name
- Type of operation to be performed
- Start date and time for the initial startup window
- Duration of the startup window
- Time period between startup windows (if using a classic schedule)
- Day (classic schedule) or days (enhanced schedule) of the week on which scheduled operations can begin

The following output shows an example of a report for a classic schedule that is displayed after you enter:

```
query schedule engpoldom
```

| Domain    | * Schedule Name | Action | Start Date/Time     | Duration | Period | Day |
|-----------|-----------------|--------|---------------------|----------|--------|-----|
| ENGPOLDOM | MONTHLY_BACKUP  | Inc Bk | 09/04/2002 12:45:14 | 2 H      | 2 Mo   | Sat |
| ENGPOLDOM | WEEKLY_BACKUP   | Inc Bk | 09/04/2002 12:46:21 | 4 H      | 1 W    | Sat |

For enhanced schedules, the standard schedule format displays a blank period column and an asterisk in the day of week column. Issue `FORMAT=DETAILED` to display complete information about an enhanced schedule. Refer to the *Administrator's Reference* for command details. The following output shows an example of a report for an enhanced schedule that is displayed after you enter:

```
query schedule engpoldom
```

| Domain    | * Schedule Name | Action | Start Date/Time     | Duration | Period | Day |
|-----------|-----------------|--------|---------------------|----------|--------|-----|
| ENGPOLDOM | MONTHLY_BACKUP  | Inc Bk | 09/04/2002 12:45:14 | 2 H      | 2 Mo   | Sat |
| ENGPOLDOM | WEEKLY_BACKUP   | Inc Bk | 09/04/2002 12:46:21 | 4 H      |        | (*) |

---

## Managing node associations with schedules

You can add and delete node associations from schedules. Nodes can be associated with more than one schedule.

### About this task

You can perform the following activities to manage associations of client nodes with schedules.

| Task                                    | Required Privilege Class                                                  |
|-----------------------------------------|---------------------------------------------------------------------------|
| Add new nodes to existing schedules     | System or restricted policy over the domain to which the node is assigned |
| Move nodes to existing schedules        | System or restricted policy over the domain to which the node is assigned |
| Delete nodes associated with a schedule | System or restricted policy over the domain to which the node is assigned |

| Task                                              | Required Privilege Class |
|---------------------------------------------------|--------------------------|
| Display nodes associated with a specific schedule | Any administrator        |

## Adding new nodes to existing schedules

You can add new nodes to existing schedules by associating the node with the schedule.

### About this task

To associate client nodes with a schedule, you can use the following method:

Issue the **DEFINE ASSOCIATION** command from the command-line interface.

For more information, see “Associating client nodes with schedules” on page 552.

## Moving nodes from one schedule to another

You can move a node from one schedule to another schedule.

### Procedure

1. Associate the node to the new schedule. For information, see “Adding new nodes to existing schedules.”
2. Delete the association of that node from the original schedule.

### Related tasks:

“Associating client nodes with schedules” on page 552

“Removing nodes from schedules” on page 563

## Displaying nodes associated with schedules

You can display information about the nodes that are associated with a specific schedule.

### About this task

For example, you should query an association before deleting a client schedule.

Figure 74 shows the report that is displayed after you enter:

```
query association engpoldom
```

```
Policy Domain Name: ENGPOLDOM
Schedule Name: MONTHLY_BACKUP
Associated Nodes: MAB SSTEINER

Policy Domain Name: ENGPOLDOM
Schedule Name: WEEKLY_BACKUP
Associated Nodes: MAB SSTEINER
```

*Figure 74. Query association output*

## Removing nodes from schedules

When you remove the association of a node to a client schedule, the client no longer runs operations specified by the schedule. However, the remaining client nodes still use the schedule.

### About this task

To delete the association of the ENGNOD client with the ENGWEEKLY schedule, in the policy domain named ENGPOLDOM, enter:

```
delete association engpoldom engweekly engnod
```

Instead of deleting a schedule, you may want to delete all associations to it and save the schedule for possible reuse in the future.

---

## Managing event records

Each scheduled client operation is called an *event*. All scheduled events, including their status, are tracked by the server. An *event record* is created in the server database whenever a scheduled event is completed or missed.

### About this task

You can perform the following activities to manage event records:

| Task                                       | Required Privilege Class      |
|--------------------------------------------|-------------------------------|
| Display information about scheduled events | Any administrator             |
| Set the retention period for event records | System                        |
| Delete event records                       | System or unrestricted policy |

## Displaying information about scheduled events

To help manage schedules for client operations, you can request information about scheduled and completed events by using the QUERY EVENT command.

### About this task

- To get information about past and projected scheduled processes, use a simple query for events. If the time range you specify includes the future, the results show which events should occur in the future based on current schedules.
- To get information about scheduled processes that did not complete successfully, use the exceptions-only option with the query.

To minimize the processing time when querying events:

- Minimize the time range
- For client schedules, restrict the query to those policy domains, schedules, and client node names for which information is required

You can also find information about scheduled events by checking the log file described in “Checking the schedule log file” on page 565.



### Displaying all client schedule events

You can display information about all client events by issuing the QUERY EVENT command. The information includes events for both successful and failed schedules. If the administrator specifies a time range that includes the future, Tivoli Storage Manager displays future events with a status of *future*.

#### About this task

Figure 75 shows an example of a report for client node GOODELL that is displayed after you enter:

```
query event standard weekly_backup node=goodell enddate=today+7
```

| Scheduled Start     | Actual Start        | Schedule Name | Node Name | Status  |
|---------------------|---------------------|---------------|-----------|---------|
| 09/04/2002 06:40:00 | 09/04/2002 07:38:09 | WEEKLY_BACKUP | GOODELL   | Started |
| 09/16/2002 06:40:00 |                     | WEEKLY_BACKUP | GOODELL   | Future  |

Figure 75. Events for a node

### Displaying events that ended unsuccessfully

You can display information about scheduled events that ended unsuccessfully by using exception reporting.

#### About this task

For example, you can issue the following command to find out which events were missed in the previous 24 hours, for the DAILY\_BACKUP schedule in the STANDARD policy domain:

```
query event standard daily_backup begindate=-1 begintime=now
enddate=today endtime=now exceptionsonly=yes
```

Figure 76 shows an example of the results of this query. To find out why a schedule was missed or failed, you may need to check the schedule log on the client node itself. For example, a schedule can be missed because the scheduler was not started on the client node.

| Scheduled Start     | Actual Start | Schedule Name | Node Name | Status |
|---------------------|--------------|---------------|-----------|--------|
| 09/04/2002 20:30:00 |              | DAILY_BACKUP  | ANDREA    | Missed |
| 09/04/2002 20:30:00 |              | DAILY_BACKUP  | EMILY     | Missed |

Figure 76. Exception report of events

### Displaying past events

If you query the server for events, the server may display past events even if the event records have been deleted.

#### About this task

Such events are displayed with a status of *Uncertain*, indicating that complete information is not available because the event records have been deleted. To determine if event records have been deleted, check the message that is issued after the DELETE EVENT command is processed.

## Checking the schedule log file

The Tivoli Storage Manager client stores detailed information about each scheduled event in a file. This file contains information such as the statistics about the backed-up objects, the name of the server to which the objects are backed up, and the time and date of the next scheduled operation.

### About this task

The default name for the schedule log file is `dsmsched.log`. The file is located in the directory where the Tivoli Storage Manager backup-archive client is installed. You can override this file name and location by specifying the **SCHEDLOGNAME** option in the client options file. See the Backup-Archive Clients Installation and User's Guide for more information.

## Managing event records in the server database

By default, the server retains event records for 10 days before automatically removing them from the database. The server automatically deletes event records from the database after the event retention period has passed and after the startup window for the event has elapsed.

### About this task

You can specify how long event records stay in the database before the server automatically deletes them by using the `SET EVENTRETENTION` command. You can also manually delete event records from the database, if database space is required.

## Setting the event retention period

You can modify the retention period for event records in the database.

### About this task

To change the retention period to 15 days, enter:

```
set eventretention 15
```

## Manually deleting event records

You may want to manually delete event records to increase available database space.

### About this task

For example, to delete all event records written prior to 11:59 p.m. on June 30, 2002, enter:

```
delete event 06/30/2002 23:59
```

---

## Managing the throughput of scheduled operations

In the Tivoli Storage Manager environment where many nodes attempt to initiate scheduled operations simultaneously, you may have to manage scheduling throughput. You can choose a scheduling mode, and you can control how often client nodes contact the server to perform a scheduled operation.

### About this task

Administrators can perform the following activities to manage the throughput of scheduled operations.

| Task                                                           | Required Privilege Class |
|----------------------------------------------------------------|--------------------------|
| Modify the default scheduling mode                             | System                   |
| Modify the scheduling period for incremental backup operations | System                   |
| Balance the scheduled workload for the server                  | System                   |
| Set the frequency at which client nodes contact the server     | System                   |

## Modifying the default scheduling mode

Tivoli Storage Manager provides two scheduling modes: *client-polling* and *server-prompted*. The mode indicates how client nodes interact with the server for scheduling operations.

### About this task

With client-polling mode, client nodes poll the server for the next scheduled event. With server-prompted mode, the server contacts the nodes at the scheduled start time. By default, the server permits both scheduling modes. The default (ANY) allows nodes to specify either scheduling mode in their client options files. You can modify this scheduling mode.

If you modify the default server setting to permit only one scheduling mode, *all* client nodes must specify the same scheduling mode in their client options file. Clients that do not have a matching scheduling mode will not process the scheduled operations. The default mode for client nodes is client-polling.

The scheduler must be started on the client node's machine before a schedule can run in either scheduling mode.

For more information about modes, see “Overview of scheduling modes” on page 567.

By default, clients contact the server (client-polling scheduling mode and SESSIONINITIATION=CLIENTORSERVER). If SESSIONINITIATION is set to the default CLIENTORSERVER value, you can use either client-polling or server-prompted scheduling modes. The client might start sessions with the server by communicating on the TCP/IP port that was defined with a server option. Server-prompted scheduling also can be used to prompt the client to connect to the server.

You can instead prevent clients from starting sessions, and allow only the server to start sessions with clients.

## Procedure

To limit the start of backup-archive client sessions to the server only, complete the following steps for each node:

1. Use the **REGISTER NODE** command or the **UPDATE NODE** command to change the value of the `SESSIONINITIATION` parameter to `SERVERONLY`, Specify the high-level address and low-level address options. These options must match what the client is using, otherwise the server will not know how to contact the client.
2. Set the scheduling mode to server-prompted. All sessions must be started by server-prompted scheduling on the port that was defined for the client with the **REGISTER NODE** or the **UPDATE NODE** commands.
3. Ensure that the scheduler on the client is started. You cannot use the client acceptor (`dsmcad`) to start the scheduler when `SESSIONINITIATION` is set to `SERVERONLY`.

## Overview of scheduling modes

With client-polling mode, client nodes poll the server for the next scheduled event. With server-prompted mode, the server contacts the nodes at the scheduled start time.

See Table 50 on page 568 and Table 49 for the advantages and disadvantages of client-polling and server-prompted modes.

*Table 49. Client-Polling mode*

| How the mode works                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Advantages and disadvantages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"><li>1. A client node queries the server at prescribed time intervals to obtain a schedule. This interval is set with a client option, <code>QUERYSCHEDPERIOD</code>. For information about client options, refer to the appropriate <i>Backup-Archive Clients Installation and User's Guide</i>.</li><li>2. At the scheduled start time, the client node performs the scheduled operation.</li><li>3. When the operation completes, the client sends the results to the server.</li><li>4. The client node queries the server for its next scheduled operation.</li></ol> | <ul style="list-style-type: none"><li>• Useful when a high percentage of clients start the scheduler manually on a daily basis, for example when their workstations are powered off nightly.</li><li>• Supports <i>randomization</i>, which is the random distribution of scheduled start times. The administrator can control randomization. By randomizing the start times, Tivoli Storage Manager prevents all clients from attempting to start the schedule at the same time, which could overwhelm server resources.</li><li>• Valid with all communication methods.</li></ul> |

Table 50. Server-Prompted mode

| How the mode works                                                                                                                                                                                                                                                                                                        | Advantages and disadvantages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. The server contacts the client node when scheduled operations need to be performed and a server session is available.</li> <li>2. When contacted, the client node queries the server for the operation, performs the operation, and sends the results to the server.</li> </ol> | <ul style="list-style-type: none"> <li>• Useful if you change the schedule start time frequently. The new start time is implemented without any action required from the client node.</li> <li>• Useful when a high percentage of clients are running the scheduler and are waiting for work.</li> <li>• Useful if you want to restrict sessions to server-initiated.</li> <li>• Does not allow for randomization of scheduled start times.</li> <li>• Valid only with client nodes that use TCP/IP to communicate with the server.</li> </ul> |

## Modifying the scheduling mode on the server

If you modify the default so that the server permits only one scheduling mode for the server, all clients must specify the same scheduling mode in their client options file. Clients that do not have a matching scheduling mode do not process scheduled operations.

### About this task

**Client-Polling Scheduling Mode:** To have clients poll the server for scheduled operations, enter:

```
set schedmodes polling
```

Ensure that client nodes specify the same mode in their client options files.

**Server-Prompted Scheduling Mode:** To have the server prompt clients for scheduled operations, enter:

```
set schedmodes prompted
```

Ensure that client nodes specify the same mode in their client options files.

**Any Scheduling Mode:** To return to the default scheduling mode so that the server supports both client-polling and server-prompted scheduling modes, enter:

```
set schedmodes any
```

Client nodes can then specify either polling or prompted mode.

## Modifying the default scheduling mode on client nodes

Users can set the scheduling mode on client nodes.

### About this task

They specify either the client-polling or the server-prompted scheduling mode on the command line or in the client user options file. (On UNIX and Linux systems, root users set the scheduling mode in the client system options file.)

For more information, refer to the appropriate *Backup-Archive Clients Installation and User's Guide*.

## Specifying the schedule period for incremental backup operations

When you define a backup copy group, you specify the copy frequency, which is the minimum interval between successive backups of a file.

### About this task

When you define a schedule, you specify the length of time between processing of the schedule. Consider how these interact to ensure that the clients get the backup coverage that you intend.

See “Managing backup copy groups” on page 494.

## Balancing the scheduled workload for the server

You can control the server’s workload and ensure that the server can perform all scheduled operations within the specified window.

### About this task

To enable the server to complete all schedules for clients, you may need to use trial and error to control the workload. To estimate how long client operations take, test schedules on several representative client nodes. Keep in mind, for example, that the first incremental backup for a client node takes longer than subsequent incremental backups.

You can balance the server’s scheduled workload by:

- Adjusting the number of sessions that the server allocates to scheduled operations
- Randomizing scheduled start time for client operations (if clients use client-polling scheduling mode)
- Increasing the length of the startup window

### Setting the number of sessions the server allocates to scheduled operations

The maximum number of concurrent client/server sessions is defined by the MAXSESSIONS server option.

### About this task

Of these sessions, you can set a maximum percentage to be available for processing scheduled operations. Limiting the number of sessions available for scheduled operations ensures that sessions are available when users initiate any unscheduled operations, such as restoring file or retrieving files.

If the number of sessions for scheduled operations is insufficient, you can increase either the total number of sessions or the maximum percentage of scheduled sessions. However, increasing the total number of sessions can adversely affect server performance. Increasing the maximum percentage of scheduled sessions can reduce the server availability to process unscheduled operations.

For example, assume that the maximum number of sessions between client nodes and the server is 80. If you want 25% of these sessions to be used by for scheduled operations, enter:

```
set maxschedsessions 25
```

The server then allows a maximum of 20 sessions to be used for scheduled operations.

The following table shows the trade-offs of using either the SET MAXSCHEDSESSIONS command or the MAXSESSIONS server option.

| Administrator actions                                                   | Command or option            | Result                                                            |
|-------------------------------------------------------------------------|------------------------------|-------------------------------------------------------------------|
| Increase the total number of sessions                                   | MAXSESSIONS server option    | May adversely affect the server's performance                     |
| Increase the total number of sessions allocated to scheduled operations | SET MAXSCHEDSESSIONS command | May reduce the server's ability to process unscheduled operations |

For information about the MAXSESSIONS option and the SET MAXSCHEDSESSIONS command, refer to *Administrator's Reference*.

## Randomizing schedule start times

To randomize start times for schedules, means to scatter each schedule's start time across its startup window.

### About this task

A startup window is defined by the start time and duration during which a schedule must be initiated. For example, if the start time is 1:00 a.m. and the duration is 4 hours, the startup window is 1:00 a.m. to 5:00 a.m. For the client-polling scheduling mode, specify the percentage of the startup window that the server can use to randomize start times for different client nodes that are associated with a schedule.

If you set randomization to 0, no randomization occurs. This process can result in communication errors if many client nodes try to contact the server at the same instant.

The settings for randomization and the maximum percentage of scheduled sessions can affect whether schedules are successfully completed for client nodes. Users receive a message if all sessions are in use when they attempt to process a schedule. If this happens, you can increase randomization and the percentage of scheduled sessions that are allowed to make sure that the server can handle the workload. The maximum percentage of randomization that is allowed is 50%. This limit ensures that half of the startup window is available for trying again, the scheduled commands that failed.

To set randomization to 50%, enter:

```
set randomize 50
```

It is possible, especially after a client node or the server has been restarted, that a client node may not poll the server until after the beginning of the startup window in which the next scheduled event is to start. In this case, the starting time is randomized over the specified percentage of the remaining duration of the startup window.

Consider the following situation:

- The schedule start time is 8:00 a.m. and its duration is 1 hour. Therefore the startup window for the event is from 8:00 to 9:00 a.m.
- Ten client nodes are associated with the schedule.

- Randomization is set to 50%.
- Nine client nodes poll the server before 8:00 a.m.
- One client node does not poll the server until 8:30 a.m.

The result is that the nine client nodes that polled the server before the beginning of the startup window are assigned randomly selected starting times between 8:00 and 8:30. The client node that polled at 8:30 receives a randomly selected starting time that is between 8:30 and 8:45.

### **Increasing the length of the schedule startup window**

Increasing the size of the startup window (by increasing the schedule's duration) can also affect whether a schedule completes successfully.

#### **About this task**

A larger startup window gives the client node more time to attempt initiation of a session with the server.

## **Controlling how often client nodes contact the server**

To control how often client nodes contact the server to perform a scheduled operation, an administrator can set the frequency for certain events.

#### **About this task**

- How often nodes query the server
- The number of command retry attempts
- The amount of time between retry attempts

Users can also set these values in their client user options files. (Root users on UNIX and Linux systems set the values in client system options files.) However, user values are overridden by the values that the administrator specifies on the server.

The communication paths from client node to server can vary widely with regard to response time or the number of gateways. In such cases, you can choose *not* to set these values so that users can tailor them for their own needs.

#### **Related tasks:**

"Setting how often clients query the server"

"Setting the number of command retry attempts" on page 572

"Setting the amount of time between retry attempts" on page 572

### **Setting how often clients query the server**

When scheduling client nodes with client-polling scheduling, you can specify how often the nodes query the server for a schedule. If nodes poll frequently for schedules, changes to scheduling information (through administrator commands) are propagated more quickly to the nodes. However, increased polling by client nodes also increases network traffic.

#### **About this task**

For the client-polling scheduling mode, you can specify the maximum number of hours that the scheduler on a client node waits between attempts to contact the server to obtain a schedule. You can set this period to correspond to the frequency with which the schedule changes are being made. If client nodes poll more frequently for schedules, changes to scheduling information (through administrator commands) are propagated more quickly to client nodes.



If you want to have all clients using polling mode contact the server every 24 hours, enter:

```
set querieschedperiod 24
```

This setting has no effect on clients that use the server-prompted scheduling mode.

The clients also have a QUERYSCHEDPERIOD option that can be set on each client. The server value overrides the client value once the client successfully contacts the server.

### **Setting the number of command retry attempts**

You can specify the maximum number of times the scheduler on a client node can retry a scheduled command that fails.

#### **About this task**

The maximum number of command retry attempts does not limit the number of times that the client node can contact the server to obtain a schedule. The client node never gives up when trying to query the server for the next schedule.

Be sure not to specify so many retry attempts that the total retry time is longer than the average startup window.

If you want to have all client schedulers retry a failed attempt to process a scheduled command up to two times, enter:

```
set maxcmdretries 2
```

Maximum command retries can also be set on each client with a client option, MAXCMDRETRIES. The server value overrides the client value once the client successfully contacts the server.

### **Setting the amount of time between retry attempts**

You can specify the length of time that the scheduler waits between command retry attempts. Command retry attempts occur when a client node is unsuccessful in establishing a session with the server or when a scheduled command fails to process.

#### **About this task**

Typically, this setting is effective when set to half of the estimated time it takes to process an average schedule. If you want to have the client scheduler retry every 15 minutes any failed attempts to either contact the server or process scheduled commands, enter:

```
set retryperiod 15
```

You can use this setting in conjunction with the SET MAXCMDRETRIES command (number of command retry attempts) to control when a client node contacts the server to process a failed command. See “Setting the number of command retry attempts.”

The retry period can also be set on each client with a client option, RETRYPERIOD. The server value overrides the client value once the client successfully contacts the server.

---

## Specifying one-time actions for client nodes

You can use the `DEFINE CLIENTACTION` command to specify that one or more client nodes perform a one-time action if the client schedulers are active.

### About this task

If the scheduling mode is set to prompted, the client performs the action within 3 to 10 minutes. If the scheduling mode is set to polling, the client processes the command at its prescribed time interval. The time interval is set by the `QUERYSCHEDPERIOD` client option. The `DEFINE CLIENTACTION` command causes Tivoli Storage Manager to automatically define a schedule and associate client nodes with that schedule. With the schedule name provided, you can later query or delete the schedule and associated nodes. The names of one-time client action schedules can be identified by a special character followed by numerals, for example @1.

The schedule name and association information is returned to the server console or the administrative client with messages ANR2500I and ANR2510I.

For example, you can issue a `DEFINE CLIENTACTION` command that specifies an incremental backup command for client node HERMIONE in domain ENGPOLDOM:

```
define clientaction hermione domain=engpoldom action=incremental
```

Tivoli Storage Manager defines a schedule and associates client node HERMIONE with the schedule. The server assigns the schedule priority 1, sets the period units (PERUNITS) to ONETIME, and determines the number of days to keep the schedule active based on the value set with `SET CLIENTACTDURATION` command.

For a list of valid actions, see the `DEFINE CLIENTACTION` command in the *Administrator's Reference*. You can optionally include the `OPTIONS` and `OBJECTS` parameters.

## Determining how long the one-time schedule remains active

You can determine how long schedules that were defined via `DEFINE CLIENTACTION` commands remain active by using the `SET CLIENTACTDURATION` command.

### About this task

This `SET CLIENTACTDURATION` command allows you to specify the number of days that schedules that were created with the `DEFINE CLIENTACTION` command are active. These schedules are automatically removed from the database whether the associated nodes have processed the schedule or not, after the specified number of days. The following example specifies that schedules for client actions be active for 3 days:

```
set clientactduration 3
```

If the duration of client actions is set to zero, the server sets the `DURUNITS` parameter (duration units) as indefinite for schedules defined with `DEFINE CLIENTACTION` command. The indefinite setting for `DURUNITS` means that the schedules are not deleted from the database.



---

## Part 4. Maintaining the server

To help you maintain server operations, Tivoli Storage Manager allows you to automate tasks that should occur regularly, monitor processes, and ensure the availability and integrity of the database. In addition, Tivoli Storage Manager provides the tools needed to set up and manage a network of servers, and to move data from one server to another.



## Chapter 17. Managing the storage environment from the Operations Center

The Operations Center provides web and mobile access to status information about the Tivoli Storage Manager environment. You can use the Operations Center to monitor multiple servers and to complete some administrative tasks. The Operations Center also provides web access to the Tivoli Storage Manager command line.

### Operations Center overview

The Operations Center includes an Overview page where you can view high-level status information. From the Overview page, you can navigate to other pages that provide more details.

For more information about the Overview page, see Chapter 23, “Daily monitoring from the Operations Center,” on page 771.

The Operations Center includes controls for accessing the command line (for example, to issue server commands) and for updating certain configuration settings. Table 51 describes the primary controls in the Operations Center.

*Table 51. Primary controls in the Operations Center*





| Control      | How to access the control                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Command line | <p>To open the command-line interface, hover over the globe icon  in the Operations Center menu bar, and click <b>Command Line</b>.</p> <p>In the command-line interface, you can issue commands to manage Tivoli Storage Manager servers that are configured as hub or spoke servers.</p>                                                                                                                                                                                 |
| Settings     | <p>To view or change global configuration settings, hover over the globe icon  in the Operations Center menu bar, and click <b>Settings</b>.</p> <p>For example, you can change the following settings from the Settings page:</p> <ul style="list-style-type: none"><li>• The frequency at which status data is refreshed</li><li>• The duration that alerts remain active, inactive, or closed</li><li>• The conditions that indicate that clients are at risk</li></ul> |
| Shared links | <p>System administrators can maintain a list of URLs to share.</p> <p>To view these shared links, hover over the bookmark icon  in the Operations Center menu bar.</p>                                                                                                                                                                                                                                                                                                   |

Table 51. Primary controls in the Operations Center (continued)

| Control | How to access the control                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Help    | <p>To view general help for the Operations Center, including message help, hover over the help icon  in the Operations Center menu bar, and click <b>Documentation</b>.</p> <p>To view help for the page that is open, hover over the same icon, and click the respective page title.</p> <p>The general help includes information about how to use the Operations Center, such as information about the following subjects:</p> <ul style="list-style-type: none"> <li>• Alert monitoring</li> <li>• Managing clients, services, servers, storage pools, and storage devices</li> <li>• Issuing commands from the Operations Center command-line interface</li> </ul> |
| Log out | To disconnect from the Operations Center, hover over the administrator name in the Operations Center menu bar, and click <b>Log Out</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Alert monitoring overview

Alert monitoring in Tivoli Storage Manager can help identify and track relevant problems on the server.

An alert is a notification of a relevant problem on the Tivoli Storage Manager server and is triggered by a Tivoli Storage Manager server message. You can define which server messages trigger alerts, and only those messages are reported as alerts in the Operations Center or in an email.

For a newly installed server or for an upgraded server without defined alerts, a default set of messages is defined to trigger alerts. You can add messages to, or delete messages from, the default set.

### Alert states

The three states of an alert are active, inactive, and closed. You can define how long alerts remain in each state.

**Active** An alert is initially registered in the Tivoli Storage Manager server database as active.

If the message that triggered the alert does not recur within the defined time interval for the active state, the alert is changed from active to inactive state. From the Operations Center, you can also change the alert state from active to inactive.

#### Inactive

If the message that triggered the alert recurs within the defined time interval for the inactive state, the alert is changed from inactive to active state.

If the message that triggered the alert does not recur within the defined time interval for the inactive state, the alert is changed from inactive to closed state. From the Operations Center, you can also change the alert state from inactive to closed.

#### Closed

Choose one of the following options to define when an alert in the closed state is deleted from the Tivoli Storage Manager server:

- Delete the alert as soon as its state is changed to closed.
- Delete the alert after it is in the closed state for a defined time interval.

## Configuration tasks for alert monitoring

You can configure various aspects of alert monitoring. For example, email alerts can be sent to administrators, and you can update which server messages trigger alerts.

Table 52 lists the configuration tasks that you can complete, and includes instructions for completing each task in the Operations Center or by using server commands.

For more information about the commands described in the following table, see the *Administrator's Reference*.

Table 52. Configuration tasks for alert monitoring

| Alert configuration task                | Task instructions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Query the settings for alert monitoring | Use the following command:<br><b>QUERY MONITORSETTINGS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Activate alert monitoring               | When you configure a Tivoli Storage Manager server as a hub or spoke server for the Operations Center, alert monitoring is activated by default. However, email notification about alerts is not activated by default.<br><br>You can also use the following command to activate alert monitoring:<br><b>SET ALERTMONITOR</b>                                                                                                                                                                                                                                                                                                                                                                     |
| Send email alerts to administrators     | <ol style="list-style-type: none"> <li>1. On the Alerts page, click <b>Configure</b>.</li> <li>2. From the Configure Alerts page, you can select the administrators who will receive email notification.</li> </ol> <p>For more information about configuring email notification for alerts, see the information about sending email alerts to administrators in the <i>Installation Guide</i>. For example, to complete the configuration, you might need to use the following commands:</p> <p><b>SET ALERTEMAIL</b><br/> <b>SET ALERTEMAILFROMADDR</b><br/> <b>SET ALERTEMAILSMTPHOST</b><br/> <b>SET ALERTEMAILSMTPPORT</b><br/> <b>SET ALERTSUMMARYTOADMINS</b><br/> <b>UPDATE ADMIN</b></p> |



Table 52. Configuration tasks for alert monitoring (continued)

| Alert configuration task                                   | Task instructions                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Query which messages trigger alerts                        | <p>On the Alerts page, you can see which server message triggers each alert.</p> <p>You can also use the following command to obtain this information:</p> <p><b>QUERY ALERTTRIGGER</b></p>                                                                                                                                                                                                                                                                                        |
| Update which messages trigger alerts                       | <ol style="list-style-type: none"> <li>1. On the Alerts page, click <b>Configure</b>.</li> <li>2. From the Configure Alerts page, you can add or delete a server message as an alert trigger.</li> </ol> <p>You can also use the following commands:</p> <p><b>DEFINE ALERTTRIGGER</b></p> <p><b>DELETE ALERTTRIGGER</b></p>                                                                                                                                                       |
| Change the alert category                                  | <ol style="list-style-type: none"> <li>1. On the Alerts page, click <b>Configure</b>.</li> <li>2. On the Configure Alerts page, click one or more alerts, and click <b>More &gt; Change Category</b>.</li> </ol> <p>You can also use the following command to change the alert category:</p> <p><b>UPDATE ALERTTRIGGER</b></p> <p><b>Tip:</b> A category change is effective only for future alerts. The category for existing alerts in the Operations Center is not updated.</p> |
| Define how often alerts are updated in the server database | <p>Use the following command:</p> <p><b>SET ALERTUPDATEINTERVAL</b></p>                                                                                                                                                                                                                                                                                                                                                                                                            |
| Define how long alerts remain in each state                | <p>On the Settings page of the Operations Center, you can change the duration that alerts remain active, inactive, or closed.</p> <p>You can also use the following commands:</p> <p><b>SET ALERTACTIVEDURATION</b></p> <p><b>SET ALERTINACTIVEDURATION</b></p> <p><b>SET ALERTCLOSEDDURATION</b></p>                                                                                                                                                                              |

## Opening the Operations Center

The Overview page is the default initial view in the Operations Center. However, in your web browser, you can bookmark the page that you want to open when you log in to the Operations Center.

### Procedure

1. In a web browser, enter the following address, where *hostname* represents the name of the computer where the Operations Center is installed, and *secure\_port* represents the port number that the Operations Center uses for HTTPS communication on that computer:  
[https://hostname:secure\\_port/oc](https://hostname:secure_port/oc)

### Tips:

- The URL is case-sensitive. For example, ensure that you type “oc” in lowercase as indicated.
  - The default port number for HTTPS communication is 11090, but a different port number can be specified during Operations Center installation. For more information about the port number, see the Operations Center installation checklist in the *Installation Guide*.
2. Log in, using an administrator ID that is registered on the hub server.  
In the Overview page, you can view summary information for clients, services, servers, storage pools, and storage devices. You can view more details by clicking items or by using the Operations Center menu bar.

**Monitoring from a mobile device:** To remotely monitor the storage environment, you can view the Overview page of the Operations Center in the web browser of a mobile device. The Operations Center supports the Apple Safari web browser on the iPad. Other mobile devices can also be used.

---

## Changing the Operations Center configuration

You might want to change the Operations Center configuration. Some configuration changes require stopping and restarting the Operations Center web server, or restarting the initial configuration wizard.

### Changing the hub server

You can remove the hub server of the Operations Center, and configure another server as the hub server.

#### Procedure

1. Restart the initial configuration wizard of the Operations Center. As part of this procedure, you delete the existing hub server connection.
2. Use the wizard to configure the Operations Center to connect to the new hub server.

#### Related tasks:

“Restarting the initial configuration wizard” on page 584

### Removing a spoke server

You can remove a spoke server from the Operations Center.

#### About this task

For example, you might need to remove a spoke server in the following situations:

- You want to move the spoke server from one hub server to another hub server.
- You want to decommission the spoke server.

#### Procedure

To remove the spoke server from the group of servers that are managed by the hub server, complete the following steps:

1. From the Tivoli Storage Manager command line, issue the following command on the hub server:  
`QUERY MONITORSETTINGS`
2. From the output of the command, copy the name that is in the **Monitored Group** field.

3. Issue the following command on the hub server, where *group\_name* represents the name of the monitored group, and *member\_name* represents the name of the spoke server:

```
DELETE GRPMEMBER group_name member_name
```

4. Optional: If you want to move the spoke server from one hub server to another hub server, do not complete this step. Otherwise, you can disable alerting and monitoring on the spoke server by issuing the following commands on the spoke server:

```
SET STATUSMONITOR OFF
SET ALERTMONITOR OFF
```

5. Optional: If the spoke server definition is used for other purposes, such as enterprise configuration, command routing, storing virtual volumes, or library management, do not complete this step. Otherwise, you can delete the spoke server definition on the hub server by issuing the following command on the hub server:

```
DELETE SERVER spoke_server_name
```

## Restoring the configuration to the preconfigured state

If certain problems occur, you might want to restore the Operations Center configuration to the preconfigured state where the Tivoli Storage Manager servers are not defined as hub or spoke servers.

### Procedure

To restore the configuration, complete the following steps:

1. Stop the Operations Center web server.
2. Unconfigure the hub server by completing the following steps:

- a. On the hub server, issue the following commands:

```
SET MONITORINGADMIN ""
SET MONITOREDSEVERGROUP ""
SET STATUSMONITOR OFF
SET ALERTMONITOR OFF
REMOVE ADMIN IBM-OC-hub_server_name
```

**Tip:** IBM-OC-*hub\_server\_name* represents the monitoring administrator ID that was automatically created when you initially configured the hub server.

- b. Reset the password for the hub server by issuing the following command on the hub server:

```
SET SERVERPASSWORD ""
```

**Attention:** Do not complete this step if the hub server is configured with other servers for other purposes, such as library sharing, exporting and importing of data, or node replication.

3. Unconfigure any spoke servers by completing the following steps:

- a. On the hub server, to determine whether any spoke servers remain as members of the server group, issue the following command:

```
QUERY SERVERGROUP IBM-OC-hub_server_name
```

**Tip:** IBM-OC-*hub\_server\_name* represents the name of the monitored server group that was automatically created when you configured the first spoke server. This server group name is also the same as the monitoring administrator ID that was automatically created when you initially configured the hub server.

- b. On the hub server, to delete spoke servers from the server group, issue the following command for each spoke server:

```
DELETE GRPMEMBER IBM-OC-hub_server_name spoke_server_name
```

- c. After all spoke servers are deleted from the server group, issue the following commands on the hub server:

```
DELETE SERVERGROUP IBM-OC-hub_server_name
SET MONITOREDSEVERGROUP ""
```

- d. On each spoke server, issue the following commands:

```
REMOVE ADMIN IBM-OC-hub_server_name
SETOPT PUSHSTATUS NO
SET ALERTMONITOR OFF
SET STATUSMONITOR OFF
```

- e. On each spoke server, delete the definition of the hub server by issuing the following command:

```
DELETE SERVER hub_server_name
```

**Attention:** Do not complete this step if the definition is used for other purposes, such as library sharing, exporting and importing of data, or node replication.

- f. On the hub server, delete the definition of each spoke server by issuing the following command:

```
DELETE SERVER spoke_server_name
```

**Attention:** Do not complete this step if the server definition is used for other purposes, such as library sharing, exporting and importing of data, or node replication.

4. Restore the default settings on each server by issuing the following commands:

```
SET STATUSREFRESHINTERVAL 5
SET ALERTUPDATEINTERVAL 10
SET ALERTACTIVEDURATION 480
SET ALERTINACTIVEDURATION 480
SET ALERTCLOSEDDURATION 60
SET STATUSATRISKINTERVAL TYPE=AP INTERVAL=24
SET STATUSATRISKINTERVAL TYPE=VM INTERVAL=24
SET STATUSATRISKINTERVAL TYPE=SY INTERVAL=24
SET STATUSSKIPASFAILURE YES TYPE=ALL
```

5. Restart the initial configuration wizard of the Operations Center.

## Starting and stopping the web server

The web server of the Operations Center runs as a service and starts automatically. You might need to stop and start the web server, for example, to make configuration changes.

### Procedure

Stop and start the web server.

- From the Services window, stop or start the **Tivoli Storage Manager Operations Center** service.

## Restarting the initial configuration wizard

You might need to restart the initial configuration wizard of the Operations Center, for example, to make configuration changes.

### Before you begin

To change the following settings, use the Settings page in the Operations Center rather than restarting the initial configuration wizard:

- The frequency at which status data is refreshed
- The duration that alerts remain active, inactive, or closed
- The conditions that indicate that clients are at risk

The Operations Center help includes more information about how to change these settings.

### About this task

To restart the initial configuration wizard, you must delete a properties file that includes information about the hub server connection. However, any alerting, monitoring, at-risk, or multiserver settings that were configured for the hub server are not deleted. These settings are used as the default settings in the configuration wizard when the wizard restarts.

### Procedure

1. Stop the Operations Center web server.
2. On the computer where the Operations Center is installed, go to the following directory, where *installation\_dir* represents the directory in which the Operations Center is installed:
  - *installation\_dir*\ui\Liberty\usr\servers\guiServer
- For example:
  - c:\Program Files\Tivoli\TSM\ui\Liberty\usr\servers\guiServer
3. In the guiServer directory, delete the serverConnection.properties file.
4. Start the Operations Center web server.
5. Open the Operations Center.
6. Use the configuration wizard to reconfigure the Operations Center. Specify a new password for the monitoring administrator ID.
7. On any spoke servers that were previously connected to the hub server, update the password for the monitoring administrator ID by issuing the following command from the Tivoli Storage Manager command-line interface:

```
UPDATE ADMIN IBM-OC-hub_server_name new_password
```

**Restriction:** Do not change any other settings for this administrator ID. After you specify the initial password, this password is managed automatically by the Operations Center.

### Related tasks:

“Opening the Operations Center” on page 580

## Setting the language of daily email reports

The Operations Center can send daily email reports about the storage environment to multiple recipients. By default, reports are in the language that is set for the web server of the Operations Center. However, you can set a different language for the reports.

### About this task

The procedure below requires you to enter a code corresponding to the language that you choose for the email reports. The following table lists the codes:

Table 53. Codes for email-report languages

| Language              | Code  |
|-----------------------|-------|
| Chinese, Simplified   | zh_CN |
| Chinese, Traditional  | Zh_TW |
| English               | en    |
| French                | fr    |
| German                | de    |
| Italian               | it    |
| Japanese              | ja    |
| Korean                | ko    |
| Portuguese, Brazilian | pt_BR |
| Russian               | ru    |
| Spanish               | es    |

### Procedure

To set the language of daily email reports, complete the following steps:

1. Stop the Operations Center web server.
2. Complete the following steps:
  - a. On the computer where the Operations Center is installed, go to the following directory, where *installation\_dir* represents the directory in which the Operations Center is installed:  
`installation_dir\ui\Liberty\conf\`
  - b. Open the `wrapper.conf` file in a text editor.
  - c. Under `# Java Additional Parameters`, go to the following line:  
`wrapper.java.additional.1=-javaagent:../../lib/bootstrap-agent.jar`
  - d. Add a space to the end of the line, and add the following code after the space:  
`-Duser.language=code`  
where *code* represents the code of the language that you want to set.
  - e. Save and close the file.
3. Start the Operations Center web server.

### What to do next

For information about receiving and opening email reports, see the help system of the Operations Center. You can access the help system by hovering over the help

l icon  on the Operations Center menu bar and clicking **Documentation**.

---

## Chapter 18. Managing server operations

Administrators can complete server operations such as licensing purchased features, starting and halting the server, and monitoring server information.

### About this task

When possible, avoid running simultaneous data movement or delete operations, or running simultaneous storage pool data access operations. One or more of the operations might end prematurely if the data involved in a data access operation is also involved in a data movement operation.

Examples of a data access operation include restoring, retrieving, or recalling data from a client. Data access operations also include the **GENERATE BACKUPSET** and **EXPORT** commands and storage pool backups. Examples of data movement and delete operations include migration, reclamation, **MOVE DATA**, **EXPIRE INVENTORY**, **DELETE FILESPACE**, and **DELETE VOLUME** when **DISCARD DATA=YES**.

Also, if a delete operation is processing data that is involved in either a data access or a data movement operation, either operation might end prematurely.

See the following topics:

| Tasks:                                                                   |
|--------------------------------------------------------------------------|
| "Licensing Tivoli Storage Manager"                                       |
| "Starting the Tivoli Storage Manager server" on page 596                 |
| "Moving the Tivoli Storage Manager server to another system" on page 602 |
| "Date and time on the server" on page 603                                |
| "Managing server processes" on page 603                                  |
| "Preempting operations" on page 605                                      |
| "Setting the server name" on page 607                                    |
| "Add or update server options" on page 608                               |
| "Getting help on commands and error messages" on page 610                |

---

## Licensing Tivoli Storage Manager

The tasks that are involved when you are licensing an Tivoli Storage Manager system include registration, save, and audit.

| Task                                | Required Privilege Class |
|-------------------------------------|--------------------------|
| Register licenses<br>Audit licenses | System                   |
| Shows license information           | Any administrator        |

For current information about supported clients and devices, see the Tivoli Storage Manager home page at [http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli\\_Storage\\_Manager](http://www.ibm.com/support/entry/portal/Overview/Software/Tivoli/Tivoli_Storage_Manager).



The base Tivoli Storage Manager feature includes the following support:

- An unlimited number of administrative clients.
- Enterprise Administration, which includes command routing, enterprise configuration, and enterprise event logging (server-to-server).
- Server-to-server Virtual Volume capabilities (does not include database and storage pool backup).
- Network Enabler (network connections for clients).

## License registration

You must register a new license if you want to add support for any of the features that are not already in your existing license agreement. Tivoli Storage Manager uses a license file and the **REGISTER LICENSE** command to complete this task.

Licenses are stored in enrollment certificate files, which contain licensing information for the server product. The enrollment certificate files are on the installation media, and are placed on the server during installation. When registered, the licenses are stored in a NODELOCK file within the current directory.

To register a license, issue the **REGISTER LICENSE** command. The command registers new licenses for server components, including Tivoli Storage Manager (base), Tivoli Storage Manager Extended Edition, and System Storage Archive Manager. You must specify the name of the enrollment certificate file that contains the license to be registered when you issue the **REGISTER LICENSE** command. To unregister licenses, erase the NODELOCK file that is in the server instance directory and reregister the licenses.

The file specification can contain a wildcard character (\*). The following are possible certificate file names:

### **tsmbasic.lic**

Registers Tivoli Storage Manager base edition.

### **tsmee.lic**

Registers Tivoli Storage Manager Extended Edition, which includes the disaster recovery manager, large libraries, and NDMP.

### **dataret.lic**

Registers the System Storage Archive Manager, which is required to enable Data Retention Protection and Expiration and Deletion Suspension (Deletion Hold).

**\*.lic** Registers all Tivoli Storage Manager licenses for server components.

### **Notes:**

- You cannot register licenses for components that are licensed based on processors. For example, Tivoli Storage Manager for Mail, Tivoli Storage Manager for Databases, Tivoli Storage Manager for Enterprise Resource Planning, Tivoli Storage Manager for Hardware, and Tivoli Storage Manager for Space Management.

**Attention:**

- Save the installation media that contains your enrollment certificate files. You might need to register your licenses again for any of the following reasons:
  - The server is corrupted.
  - The server is moved to a different computer.
  - The NODELOCK file is corrupted. IBM Tivoli Storage Manager stores license information in the NODELOCK file, which is in the directory from which the server is started.

## License compliance

When license terms change, for example; a new license is specified for the server, the server conducts an audit. The audit determines whether the current server configuration conforms to the license terms. The server also periodically audits compliance with license terms. The results of an audit are used to check and enforce license terms.

If it is 30 days since the previous license audit elapsed, the administrator cannot cancel the audit. If a Tivoli Storage Manager system exceeds the terms of its license agreement, one of the following actions occur:

- The server issues a warning message that indicates that it is not in compliance with the licensing terms.
- If you are running in Try Buy mode, operations fail because the server is not licensed for specific features.

You must contact your Tivoli Storage Manager account representative to modify your agreement.

An administrator can monitor license compliance by:

**Auditing licenses**

Use the `AUDIT LICENSES` command to compare the current configuration with the current licenses.

**Note:** During a license audit, the server calculates, by node, the amount of backup, archive, and space management storage in use. This calculation can take a great deal of processor time and can stall other server activity. Use the `AUDITSTORAGE` server option to specify that storage is not to be calculated as part of a license audit.

**Displaying license information**

Use the `QUERY LICENSE` command to display details of your current licenses and determine licensing compliance.

**Scheduling automatic license audits**

Use the `SET LICENSEAUDITPERIOD` command to specify the number of days between automatic audits.

## Role of processor value units in assessing licensing requirements

You can obtain information about the use of processor value units (PVUs) by server devices. You can also obtain information about the number of client and server devices that are managed by Tivoli Storage Manager. Use the data that you collect to assess the licensing requirements for the Tivoli Storage Manager system.

**Important:** The PVU calculations that are provided by Tivoli Storage Manager are considered estimates and are not legally binding. The PVU information reported by Tivoli Storage Manager is not considered an acceptable substitute for the IBM License Metric Tool.

### Collecting PVU information

Review the following procedure to understand how Tivoli Storage Manager estimates PVUs. The procedure also describes the steps that you can take to make the estimates more accurate.

1. When you install a Tivoli Storage Manager V6.3 or later server, or upgrade a server to V6.3 or later, Common Inventory Technology is installed automatically. Common Inventory Technology is a software component that collects the metrics that are used to calculate PVUs.
2. When Tivoli Storage Manager clients connect to the Tivoli Storage Manager server, the clients send Common Inventory Technology information to the Tivoli Storage Manager server. This information includes the number of client and server devices, the number of physical processors, the processor vendor and type, and related information. The server estimates PVUs only for nodes that are classified as server nodes. If you change the default classification for a device, the classification that you specify is used for PVU estimation. For instructions about classifying devices, see “Device classification” on page 591.

#### Restrictions:

- A client node can send Common Inventory Technology information to the server only if a V6.3 or later backup-archive client is installed on the client node.
  - Common Inventory Technology is not installed automatically on client nodes that are running on Linux operating systems. To obtain PVU information from a client node that is running on a Linux operating system, you must install Common Inventory Technology on the client node. For instructions, see the topic about installing UNIX and Linux backup-archive clients in the *IBM Tivoli Storage Manager Backup-Archive Clients Installation and User's Guide*.
3. The Tivoli Storage Manager server stores the Common Inventory Technology information in the Tivoli Storage Manager database.
  4. The Tivoli Storage Manager server generates PVU estimates. The estimates are based on the values that are stored in the Tivoli Storage Manager database. The estimates are also based on the PVU values that are defined for each processor type in the `IBM_ProcessorValueUnitTable.xml` file. The `IBM_ProcessorValueUnitTable.xml` file is installed automatically during the Tivoli Storage Manager server installation. You also can download the latest version of the file from an IBM FTP site. For instructions about downloading the file, see “Estimating processor value units” on page 593.
  5. You can browse PVU information by issuing commands that provide PVU estimates. For instructions about obtaining and adjusting PVU estimates, see “Estimating processor value units” on page 593.

The following graphic illustrates the PVU estimation process.

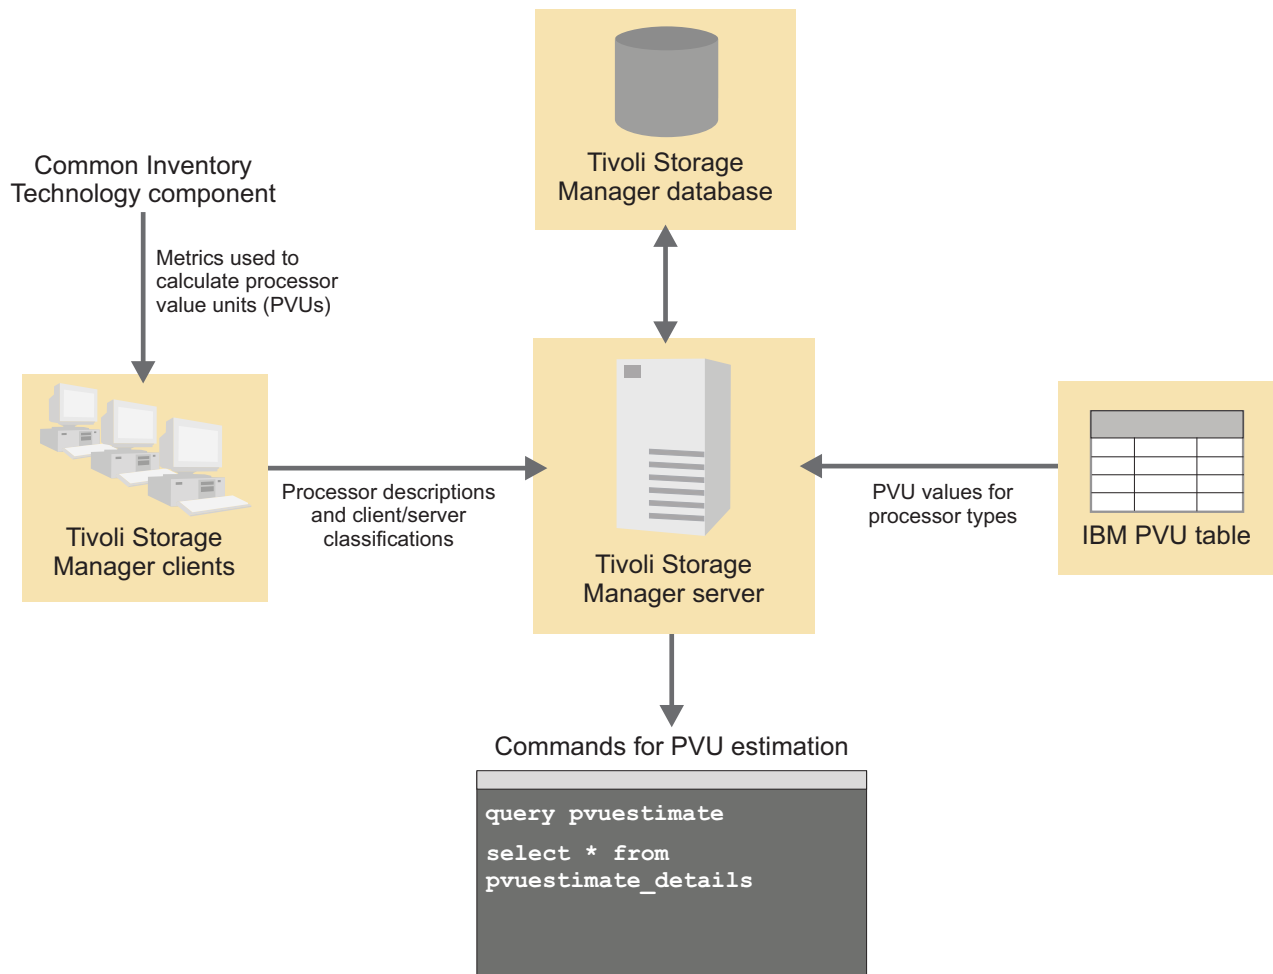


Figure 77. PVU estimation overview

## Device classification

For purposes of PVU calculation, you can classify devices, such as workstations and servers, as client nodes, server nodes, or other. By default, devices are classified as client or server:

**Client** Backup-archive clients that run on Microsoft Windows 7, Microsoft Windows XP Professional, and Apple systems are classified as client devices.

**Server** Backup-archive clients that run on all operating system except for Microsoft Windows 7, Microsoft Windows XP Professional, and Apple systems are classified as server devices. All other node types are also classified as server devices. The server on which Tivoli Storage Manager is running is classified as a server device.

You can change the node classification to reflect how the device is used in the system. For example, if a node is classified as a server, but functions as a client, you can reclassify it as a client. If a node is not used in the system, you can reclassify it as other.

When you assign a classification, consider the services that are associated with the device. For example, a Microsoft Windows XP Professional notebook might be a client device if it is distributed to a university staff member as a single-use workstation. The same computer might be a server device if it is distributed to a department administrator, who provides more services. The department administrator might provide services such as sharing files on the computer to multiple workstations.

In a Tivoli Storage Manager system, you can assign multiple client node names to the same physical workstation. For example, a clustering solution can have several node names that are defined in the Tivoli Storage Manager server environment to provide protection if a failover occurs. Redundant node names, or node names that manage data for physical workstations that no longer exist, must not be counted for licensing purposes. In this case, you might classify the node as other by using the **UPDATE NODE** command.

## Limitations

The PVU calculations are estimates because the software cannot determine all factors that are required for a final number. The following factors affect the accuracy of the calculations:

- PVU estimates are provided only for Tivoli Storage Manager V6.3 or later server devices that are connected with the Tivoli Storage Manager server since the installation of or upgrade to Tivoli Storage Manager V6.3 or later.
- The default classification of nodes is based on assumptions, as described in “Device classification” on page 591.
- The PVU estimate might not reflect the actual number of processors or processor cores in use.
- The PVU estimate might not reflect cluster configurations.
- The PVU estimate might not reflect virtualization, including VMware and AIX LPAR and WPAR.
- Common Inventory Technology might not be able to identify some processors, and some processors might not have corresponding entries in the PVU table.
- A client node can provide Common Inventory Technology information to the server only if a V6.3 or later backup-archive client is installed on the client node.

## Formula for PVU estimation

You must have the following information to calculate PVUs:

- The node classification. PVUs are calculated only for server devices.
- The number of processors on the node.
- The processor vendor, brand, type (number of cores), and model. This information is used to look up the PVU value in the IBM PVU table.

Calculate the PVUs for a node by using the following formula:

$$\text{PVUs} = \text{number of processors on the node} * \text{processor type (core count)} * \text{pvu value}$$

To calculate the total PVUs, sum the PVUs for all nodes.

## Related information

Table 54. Information about PVUs and licensing

| Information type                       | Location                                                                                                                                                                                    |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IBM PVU table                          | <a href="ftp://public.dhe.ibm.com/software/tivoli_support/misc/CandO/PVUTable/">ftp://public.dhe.ibm.com/software/tivoli_support/misc/CandO/PVUTable/</a>                                   |
| PVU calculator                         | <a href="https://www.ibm.com/software/howtobuy/passportadvantage/valueunitcalculator/vucalc.wss">https://www.ibm.com/software/howtobuy/passportadvantage/valueunitcalculator/vucalc.wss</a> |
| PVU frequently asked questions         | <a href="http://www.ibm.com/software/lotus/passportadvantage/pvufaagen.html">http://www.ibm.com/software/lotus/passportadvantage/pvufaagen.html</a>                                         |
| PVU licensing for distributed software | <a href="http://www.ibm.com/software/lotus/passportadvantage/pvu_licensing_for_customers.html">http://www.ibm.com/software/lotus/passportadvantage/pvu_licensing_for_customers.html</a>     |
| PVU terminology                        | <a href="http://www.ibm.com/software/lotus/passportadvantage/pvu_terminology_for_customers.html">http://www.ibm.com/software/lotus/passportadvantage/pvu_terminology_for_customers.html</a> |

## Estimating processor value units

To estimate the number of processor value units (PVUs) for your system, use the **QUERY PVUESTIMATE**, **SELECT \* FROM PVUESTIMATE\_DETAILS**, or **QUERY NODE** command.

### Before you begin

Review the information about how PVUs are estimated, and the restrictions that apply, in “Role of processor value units in assessing licensing requirements” on page 590.

**Important:** The PVU calculations that are provided by Tivoli Storage Manager are considered estimates and are not legally binding.

### Procedure

To estimate PVUs, complete the following steps:

1. To ensure that you have the latest IBM PVU table, go to the FTP site at [ftp://public.dhe.ibm.com/software/tivoli\\_support/misc/CandO/PVUTable/](ftp://public.dhe.ibm.com/software/tivoli_support/misc/CandO/PVUTable/).
2. Download the file for the latest table and rename it `IBM_ProcessorValueUnitTable.xml`.
3. Copy the renamed file to the Tivoli Storage Manager server instance directory. Alternatively, you can store the file in the server installation directory, where it replaces the installed file. Then, restart the server.
4. Obtain the type of PVU information that you require:

Table 55. Obtaining PVU information

| Type of information       | How to obtain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product-based information | <p>To obtain a PVU report that is categorized by product, issue the <b>QUERY PVUESTIMATE</b> command. For instructions about issuing the <b>QUERY PVUESTIMATE</b> command, see the <i>Administrator's Reference</i>.</p> <p>The reports that are produced by the <b>QUERY PVUESTIMATE</b> and <b>SQL SELECT * FROM PVUESTIMATE_DETAIL</b> commands provide information about client and server devices that are managed by the Tivoli Storage Manager server. However, PVU estimates are provided only for the V6.3 or later server devices that established a connection with the Tivoli Storage Manager server since the installation of or upgrade to Tivoli Storage Manager V6.3 or later. In addition, a client node can provide Common Inventory Technology information to the server only if a V6.3 or later backup-archive client is installed on the client node.</p>                                                                              |
| Node-based information    | <p>To obtain a PVU report that provides detailed information at the node level, issue the <b>SELECT * FROM PVUESTIMATE_DETAILS</b> command. For instructions about issuing the <b>SELECT</b> command, see the <i>Administrator's Reference</i>. After you obtain data from the <b>SELECT * FROM PVUESTIMATE_DETAILS</b> command output, you can move the data to a spreadsheet. Then, modify the data to obtain a more accurate estimate.</p> <p>To export data to a spreadsheet, use the <b>-comma</b> and <b>&gt;</b> output redirection options of the <b>dsmadm</b> administrative command-line client with the <b>SELECT</b> administrative command. For example, complete the following steps:</p> <ol style="list-style-type: none"> <li>1. Issue the following command:<br/> <code>dsmadm -comma select * from pvuestimate_details &gt; pvuestimatefile.csv</code></li> <li>2. Import the resulting CSV file into a spreadsheet program.</li> </ol> |
| Complete information      | <p>To view complete information, issue the <b>QUERY NODE</b> command and specify the <b>DETAILED</b> value for the <b>FORMAT</b> parameter. Complete information includes PVU-related fields that are provided by Common Inventory Technology, such as processor vendor, brand, type, model, and processor count for selected nodes. For instructions about issuing the <b>QUERY NODE</b> command, see the <i>Administrator's Reference</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

5. To obtain a more accurate PVU estimate, you might want to change the classifications of nodes. To change node classifications, issue the **UPDATE NODE** command. For instructions about issuing the **UPDATE NODE** command, see the *Administrator's Reference*.
6. To calculate the PVUs for a node, use the following formula: PVUs = number of processors on the node \* processor type (core count) \* pvu value. To calculate the total PVUs, sum the PVUs for all nodes. For instructions about using the PVU estimation formula, see "Role of processor value units in assessing licensing requirements" on page 590.
7. After you generate a PVU report, you can update the report by removing redundancies and deleting obsolete information. In addition, you can account for known systems that are not logged in to and connected to the server.

**Tip:** If you cannot obtain PVU information from a client node that is running on a Linux operating system, ensure that Common Inventory Technology is installed on that client node. After you install Common Inventory Technology, obtain a new PVU estimate.

## Collecting processor value unit information in a VMware host environment

If you are installing Tivoli Storage Manager on a system that uses VMware virtualization software, ensure that PVU information is collected in the virtual environment. To collect PVU information in a virtual environment, you must have VMware ESX 4 software installed on your system, and you must set up and run hardware scans.

### Procedure

Complete the following steps:

1. Obtain the Tivoli Storage Manager backup-archive client installation package for the Linux x86 operating system.  
For information about obtaining installation packages, see the Passport Advantage® website at <http://www.ibm.com/software/lotus/passportadvantage/pacustomers.html>.
2. Install the Tivoli Storage Manager backup-archive client on a computer in your system.
3. From the `../CIT/VMware/esx-4` directory, download the dispatcher, `retrieve.sh`, `wenvmw.sh`, and `cpuid` files.
4. Copy the downloaded files to the ESX 4 host operating system.

**Tip:** You can copy the files to any location on the host operating system, but ensure that all files are copied to the same directory.

5. Ensure that guest virtual machines are running. This step is necessary to ensure that the guest virtual machines are detected during the hardware scan.
6. To collect PVU information, issue the following command:  
`retrieve -v`

### What to do next

If you restart the host computer or change the configuration, run the **retrieve** command again to ensure that current information is retrieved.

**Tip:** When the IBM Tivoli Storage Manager for Virtual Environments license file is installed on a VMware vStorage backup server, the platform string that is stored on the Tivoli Storage Manager server is set to TDP VMware for any node name that is used on the server. The reason is that the server is licensed for Tivoli Storage Manager for Virtual Environments. The TDP VMware platform string can be used for PVU calculations. If a node is used to back up the server with standard backup-archive client functions, such as file-level and image backup, interpret the TDP VMware platform string as a backup-archive client for PVU calculations.



---

## Starting the Tivoli Storage Manager server

You can select different methods for starting the Tivoli Storage Manager server, depending on the operating system on which the server is installed.

To review the methods that are available if the server is installed on Windows, see “Starting the server on Windows.”

### Starting the server on Windows

You can start the Tivoli Storage Manager server as a Windows service, which is the preferred method, or in the foreground.

#### Before you begin

Select one of the following methods for starting the server:

##### As a Windows service

This method is useful in a production environment. When you configure the server to run as a service, you can specify that the server starts automatically whenever the system is started.

##### In the foreground

This method is useful when you are configuring or testing the server. When you start the server in the foreground, Tivoli Storage Manager provides a special administrator user ID that is named SERVER\_CONSOLE. All server messages are displayed in the foreground. The messages can be useful if you must debug startup problems.

#### Procedure

Follow the instructions for your selected option:

| Option                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Starting the server as a Windows service | <p>To start the server as a Windows service, take one of the following actions:</p> <ul style="list-style-type: none"><li>• If you configured the server by using the configuration wizard, or you upgraded the server by using the upgrade wizard, complete the following steps:<ol style="list-style-type: none"><li>1. Configure the server to start as a Windows service by following the instructions in “Configuring the server to start as a Windows service” on page 597.</li><li>2. Start the server by following the instructions in “Starting the server as a Windows service” on page 598.</li></ol></li><li>• If you did not use the configuration wizard or the upgrade wizard, create and configure the Windows service by following the instructions in “Manually creating and configuring a Windows service” on page 599.</li></ul> |
| Starting the server in the foreground    | <p>To start the server in the foreground, follow the instructions in “Starting the server in the foreground” on page 600.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## Configuring the server to start as a Windows service

Before you can start the server as a Windows service, you must ensure that options and access rights are set correctly.

### Before you begin

A Windows service must be created. If you configured the server by using the configuration wizard, or you upgraded the server by using the upgrade wizard, a Windows service was created automatically. In that case, use this procedure to configure the server to start as a Windows service.

If you did not use a wizard to create the Windows service, you must create and configure the Windows service manually. Follow the steps in “Manually creating and configuring a Windows service” on page 599.

### Procedure

1. From the Windows **Start** menu, click **Run**, type `services.msc`, and click **OK**.
2. In the Services window, select the server instance that you want to start as a service, and click **Properties**. For example, select **TSM INST1**, and click **Properties**.
3. To ensure that the server service starts automatically, click the **General** tab. From the **Startup type** list, select **Automatic**.
4. To set the user for starting the server service, click the **Log On** tab, and take one of the following actions:
  - If you plan to run the server service under the Local System account, select **Local System account** and click **OK**.
  - If you plan to run the server service under the instance user ID, take the following actions:
    - a. Select **This account**, and browse for the user ID that owns the server DB2 instance and has permissions for starting the server.
    - b. In the Select User window, in the **Enter the object name to select** field, enter the user ID.
    - c. Click **Check Names**.
    - d. Click **OK** twice.
5. If you configured the server service to run under the Local System account, grant database access to the Local System account:
  - a. Log on with the user ID that was used to create the Tivoli Storage Manager server database. This user ID is the user ID that was used to run the **DSMSERV FORMAT** utility to initialize the server database. Alternatively, if you configured the server with the **dsmicfgx** configuration wizard, this user ID is the user ID that was used to create the instance.
  - b. Open a DB2 command window by taking one of the following actions:
    - If the Tivoli Storage Manager server is installed on Windows Server 2008 or Windows Server 2008 R2, click **Start > All Programs > IBM DB2 DB2TSM1 > DB2 Command Window - Administrator**.
    - If the Tivoli Storage Manager server is installed on Windows Server 2012, open the Start window, and click **DB2 Command Window - Administrator**.
  - c. In the DB2 command window, enter the following commands:

```
set DB2INSTANCE=server1
db2 connect to TSMDB1
db2 grant dbadm with dataaccess with accessctrl on database to user system
db2 grant secadm on database to user system
```

**Tip:** When the server service is configured to run under the Local System account, the database can be accessed by any administrator on the system. In addition, any administrator who can log on to the system can run the Tivoli Storage Manager server.

## What to do next

To start the service, follow the instructions in “Starting the server as a Windows service.”

## Starting the server as a Windows service

If you are running Tivoli Storage Manager on a Windows operating system, you can start the server as a service.

## Before you begin

A Windows service must be created. The service was created automatically if you configured the server by using the configuration wizard, or you upgraded the server by using the upgrade wizard. If the service was created automatically, you must configure the server to start as a service by following the steps in “Configuring the server to start as a Windows service” on page 597. Then, use this procedure to start the server as a service.

If you did not use the configuration wizard or the upgrade wizard to create the service, you must create and configure the service manually. Follow the steps in “Manually creating and configuring a Windows service” on page 599.

## Procedure

To start the server as a Windows service, complete the following steps:

1. Log on to the Tivoli Storage Manager server with a user ID that is in the Administrators group.
2. From the Windows **Start** menu, click **Run**, type `services.msc`, and click **OK**.
3. In the Services window, select the server instance that you want to start, and click **Start**.

## What to do next

Because the server service can issue requests that require action, it is important to monitor server activity with the Operations Center or the administrative client.

To view start and stop completion messages that are logged in the Windows application log, use the Event Viewer tool in the Administrative Tools folder.

## Manually creating and configuring a Windows service

If you configured the Tivoli Storage Manager server by using the configuration wizard, or you upgraded the server by using the upgrade wizard, a Windows service was created automatically. If a service was not created automatically, you must create it.

### Before you begin

To complete this procedure, you must log on with a user ID that is in the Administrators group.

### Procedure

To create a Windows service and configure the startup options for the service, complete the following step:

Open a command window and enter the **sc.exe create** command:

```
sc.exe create server_name binPath= "path_to_server -k instance_name"
start= start_type obj= account_name password= password
```

where:

*server\_name*

Specifies the name of the server service.

*path\_to\_server*

Specifies the path to the dsmsvc.exe executable file, including the file name. This path is the default path:

C:\Program Files\Tivoli\TSM\server

*instance\_name*

Specifies the name of the DB2 instance, which is also the name of the server instance, for example, Server1.

*start\_type*

Specifies the method for starting the service. To automatically start the service, enter auto. If you specify the auto option, the service starts automatically at system startup and restarts automatically whenever the system is restarted. To manually start the service, enter demand.

*account\_name*

Specifies the user ID for the account under which the service runs. For example, the account name might be Administrator. This parameter is optional. If it is not specified, the Local System account is used.

*password*

Specifies the password for the *account\_name* user account.

**Tip:** When you enter the command, ensure that you enter a space after each equal sign (=).

### Results

The server starts as a Windows service.

## Starting the server in the foreground

To directly interact with a Tivoli Storage Manager server, start the server in the foreground. For example, if you want to enter commands, start the server in the foreground.

### Procedure

1. Change to the directory where the server is installed. For example, change to the `c:\program files\tivoli\tsm\server` directory.
2. Enter the following command:

```
dsmserv -k instance_name
```

where *instance\_name* specifies the Tivoli Storage Manager server instance.

## Running multiple server instances on a single system

To run multiple server instances on a single system, set up separate database and recovery log directories for each server instance. Also, set up an instance directory for each server instance to contain the server options file and other files that are required to run the instance.

### About this task

The server instances can be owned by the same or different user accounts.

The files for one instance of the server are stored separately from the files that are used by another server instance on the same system, and separately from the server program files. Database and recovery log files are stored in separate directories, not in the server instance directory.

As part of server configuration, you create a directory to store the files for the server instance. The following files are stored in the server instance directory:

- The server options file, `dsmserv.opt`
- The server key database file, `cert.kdb`, and the `.arm` files, which are used by clients and other servers to import the Secure Sockets Layer certificates of the server
- The device configuration file, if the `DEVCONFIG` server option does not specify a fully qualified name
- The volume history file, if the `VOLUMEHISTORY` server option does not specify a fully qualified name
- The volumes for storage pools of the `FILE` device type, if the directory for the device class is not fully qualified
- The user exits
- The trace output file, if the trace file name is not fully qualified
- The log file for first-failure data capture, `dsmffdc.log`

### Procedure

1. Set up database and recovery log directories for each server instance.
2. Set up an instance directory for each server instance. For example, to run two server instances, `tsminst1` and `tsminst2`, create instance directories such as `/tsminst1` and `/tsminst2`. In each directory, place the `dsmserv.opt` file for that server. Each `dsmserv.opt` file must specify a different port for the server to use. Ensure that all required files are included in the instance directory.

3. To manage the system memory that is used by each server on a system, use the **DBMEMPERCENT** server option. Limit the percentage of system memory that can be used by the database manager of each server. If all servers are equally important, use the same value for each server. If one server is a production server and other servers are test servers, set the value for the production server to a higher value than the test servers.
4. Optional: Set up the server instances to start automatically.  
For instructions, see “Starting the server as a Windows service” on page 598.

---

## Halting the server

You can halt the server without warning if an unplanned operating system problem requires the server to be stopped.

| Task                                | Required Privilege Class |
|-------------------------------------|--------------------------|
| Start, halt, and restart the server | System or operator       |

When you halt the server, all processes are abruptly stopped and client sessions are canceled, even if they are not complete. Any in-progress transactions are rolled back when the server is restarted. Administrator activity is not possible.

If possible, halt the server only after current administrative and client node sessions are finished or canceled. To shut down the server without severely impacting administrative and client node activity with the server, you must complete the following steps:

1. Disable the server to prevent new client node sessions from starting by issuing the **DISABLE SESSIONS** command. This command does not cancel sessions currently in progress or system processes like migration and reclamation.
2. Notify any existing administrative and client node sessions that you plan to shut down the server. The server does not provide a network notification facility; you must use external means to notify users.
3. Cancel any existing administrative or client node sessions by issuing the **CANCEL SESSION** command and the associated session number. To obtain session numbers and determine whether any sessions are running, use the **QUERY SESSION** command. If a session is running, a table is displayed showing the session number on the leftmost of the screen.
4. Find out whether any other processes are running, such as server migration or inventory expiration, by using the **QUERY PROCESS** command. If a database backup process is running, allow it to complete before you halt the server. If other types of processes are running, cancel them by using the **CANCEL PROCESS** command.

**Note:** If the process you want to cancel is waiting for a tape volume to be mounted (for example, a process that is initiated by **EXPORT**, **IMPORT**, or **MOVE DATA** commands), the mount request is automatically canceled. If a volume associated with the process is being mounted by an *automated* library, the cancel might not take effect until the mount is complete.

5. Halt the server to shut down all server operations by using the **HALT** command.

### Note:

1. The **HALT** command can be replicated by using the **ALIASHALT** server option. By using the server option, you can define a term other than **HALT** that

completes the same function. The HALT command functions, however the server option provides an extra method for issuing the HALT command.

2. In order for the administrative client to recognize an alias for the HALT command, the client must be started with the CHECKALIASHALT option specified.

---

## Moving the Tivoli Storage Manager server to another system

You can move your Tivoli Storage Manager server from one computer to another.

### Before you begin

The following prerequisites back up the database from one server and restore it to another server.

- The same operating system must be running on both servers.
- The sequential storage pool that you use to back up the server database must be accessible from both servers. Only manual and SCSI library types are supported for the restore operation.
- The restore operation must be done by a Tivoli Storage Manager server at a code level that is the same as the code level on the server that was backed up.

### Procedure

To move the database to another system, complete the following steps:

1. Install Tivoli Storage Manager on the target server. Ensure that you install the instance as if you were creating a new server. See the *Installation Guide* for details.
2. Back up the database to sequential media. For example, issue the following command:

```
backup db devclass=1to4 type=full
```

The sequential storage pool that you use to back up the server database must be accessible from both servers.

3. Halt the server.
4. Move any libraries and devices from the original server to the new server, or ensure that they are accessible through a storage area network.
5. Move copies of the volume history file, device configuration file, and server options file to the target server.
6. Restore the backed up database on the target server. Ensure that you issue the following commands as the instance user. For example:
  - To maintain the current directory structure on the target server, issue this command:

```
dsmserv restore db
```
  - To change the current directory structure on the target server, create a file; for example `dbdir.txt`. List the directories that must be restored on separate lines. Issue this command:

```
dsmserv restore db on=dbdir.txt
```
7. Start the target server.

### Related tasks:

"Moving the database and recovery log on a server" on page 676

---

## Date and time on the server

The date and time on the server must be correct. If the server detects an invalid date or time, server sessions become disabled.

Every time the server is started and for each hour thereafter, a date and time check occurs. A date is invalid if any of the following conditions are true:

- The date and time are earlier than the server installation date and time.
- The date and time are more than one hour earlier than the last time the date was checked.
- The date and time are more than 30 days later than the last time the date was checked.

An error message (ANR0110E) is displayed and expiration, migration, reclamation, and volume history deletion operations are not allowed. You can either change the system date if it is in error, or issue the `ACCEPT DATE` command to force the server to accept the current system date as valid. Use the `ENABLE SESSIONS` command after you issue the `ACCEPT DATE` command to re-enable the server for client node activity.

---

## Managing server processes

When a user or administrator issues a Tivoli Storage Manager command or uses a graphical user interface to complete an operation, the server starts a process. Some examples of an operation are registering a client node, deleting a management class, or canceling a client session.

| Task                                                  | Required Privilege Class |
|-------------------------------------------------------|--------------------------|
| Display information about a server background process | Any administrator        |
| Cancel a server process                               | System                   |

Most processes occur quickly and are run in the foreground, but others that take longer to complete run as background processes.

The server runs the following operations as background processes:

- Auditing an automated library
- Auditing licenses
- Auditing a volume
- Backing up the database
- Backing up a storage pool
- Checking volumes in and out of an automated library
- Deleting a file space
- Deleting a storage volume
- Expiring the inventory
- Exporting or importing data
- Generating a backup set
- Migrating files from one storage pool to the next storage pool
- Moving data from a storage volume
- Reclaiming space from tape storage volumes



- Restoring a storage pool
- Restoring a volume

**Note:** To prevent contention for the same tapes, the server does not allow a reclamation process to start if a **DELETE FILESPACE** process is active. The server checks every hour for whether the **DELETE FILESPACE** process completed so that the reclamation process can start. After the **DELETE FILESPACE** process completes, reclamation begins within one hour.

The server assigns each background process an ID number and displays the process ID when the operation starts. This process ID number is used for tracking purposes. For example, if you issue an **EXPORT NODE** command, the server displays a message similar to the following message:

```
EXPORT NODE started as Process 10
```

Some of these processes can also be run in the foreground by using the **WAIT=YES** parameter when you issue the command from an administrative client. See *Administrator's Reference* for details.

## Requesting information about server processes

You can request information about server background processes. If you know the process ID number, you can use the number to limit the search.

If you do not know the process ID, you can display information about all background processes by entering:

```
query process
```

The following figure shows a server background process report that was returned after a **DELETE FILESPACE** command was issued. The report displays a process ID number, a description, and a completion status for each background process.

| Process Number | Process Description | Status                                                              |
|----------------|---------------------|---------------------------------------------------------------------|
| 2              | DELETE FILESPACE    | Deleting filesystem DRIVE_D for node CLIENT1:<br>172 files deleted. |

## Canceling server processes

You can cancel a server background process by specifying its ID number and issuing the **CANCEL PROCESS** command.

### About this task

To find the process number, issue the **QUERY PROCESS** command. For details, see "Requesting information about server processes."

When you cancel processes, the following conditions apply:

- If a process is waiting for a tape volume to be mounted (for example, a process that is initiated by **EXPORT**, **IMPORT**, or **MOVE DATA** commands), the mount request is automatically canceled.
- If a volume associated with a process is being mounted by an *automated* library, the cancel might not take effect until the mount is complete.

- If a process has a pending mount request, the process might not respond to a **CANCEL PROCESS** command until the mount request is answered, canceled, or times out. For example, reclamation automatically generates mount requests as part of the process.

To answer a mount request, issue the **REPLY REQUEST** command. To cancel a mount request, issue the **CANCEL REQUEST** command.

**Note:**

1. To list open mount requests, issue the **QUERY REQUEST** command. You can also query the activity log to determine whether a process has a pending mount request.
2. A mount request indicates that a volume is needed for the current process. However, the volume might not be available in the library. If the volume is not available, the reason might be that you either issued the **MOVE MEDIA** or **CHECKOUT LIBVOLUME** command, or that you manually removed the volume from the library.

## Preempting operations

The server can preempt server or client operations for a higher priority operation when a mount point is in use and no others are available, or access to a specific volume is required. When an operation is preempted, it is canceled.

You can use the **QUERY MOUNT** command to see the status of the volume for the mount point.

By default, preemption is enabled on the server. To disable preemption, specify **NOPREEMPT** in the server options file. If you specify this option, the **BACKUP DB** command, and the export and import commands are the only operations that can preempt other operations.

### Mount point preemption

If a high-priority operation requires a mount point that is in a specific device class and all the mount points in the device class are in use, the high-priority operation can preempt a mount point from a lower-priority operation.

Mount points can be preempted only when the device class of the operation preempting and the operation that is being preempted is the same.

The following high-priority operations can preempt other operations for a mount point.

- Back up database operations
- Retrieve, restore, or HSM recall operations that are initiated by clients
- Restore operations by using a remote data mover
- Export operations
- Import operations
- Backup set generation operations

The following server operations cannot preempt other operations or be preempted:

- Audit a volume
- Restore data from a copy or active-data pool
- Prepare a recovery plan file
- Store data by using a remote data mover

The following operations can be preempted and are listed in order of priority, from highest priority to lowest priority. The server selects the lowest priority operation to preempt, for example, identify duplicates.

- Replicate nodes
- Back up to a copy storage pool
- Copy active data to an active data pool
- Move data on a storage pool volume
- Migrate data from disk to sequential media
- Migrate data from sequential media to sequential media
- Back up, archive, or HSM migrate operations that are initiated by clients
- Reclaims volumes in a sequential-access storage pool
- Identify duplicates

### **Volume access preemption**

If a high-priority operation requires access to a specific volume and that volume is in use, the high-priority operation can preempt the lower-priority operation for that volume.

For example, if a restore request requires access to a volume in use by a reclamation operation and a drive is available, the reclamation operation is canceled.

The following high-priority operations can preempt operations for access to a specific volume.

- Back up database operations
- Retrieve, restore, or HSM recall operations that are initiated by clients
- Restore operations by using a remote data mover
- Export operations
- Import operations
- Backup set generation operations

The following operations cannot preempt other operations or be preempted:

- Audit volume
- Restore data from a copy or active-data pool
- Prepare a recovery plan
- Store data by using a remote data mover

The following operations can be preempted, and are listed in order of priority, from highest priority to lowest priority. The server selects the lowest priority operation to preempt, for example, identify duplicates.

- Replicate nodes
- Back up to a copy storage pool
- Copy active data to an active data pool
- Move data on a storage pool volume
- Migrate data from disk to sequential media
- Migrate data from sequential media to sequential media
- Back up, archive, or HSM migrate data that is initiated by client
- Reclaim volumes in a sequential-access storage pool
- Identify duplicates

---

## Changing names in Tivoli Storage Manager

When you change the server name, it can affect communication from the server to backup-archive nodes. When you change the host name for the server, it can affect the connection between the database and the server.

### Setting the server name

At installation, the server name is set to SERVER1 or on Windows, the computer name. After installation, you can use the SET SERVERNAME command to change the server name.

You can issue the QUERY STATUS command to see the name of the server.

To specify the server name, you must have system privileges. For example, to change the server name to WELLS\_DESIGN\_DEPT., enter the following command:  
set servername wells\_design\_dept.

You must set unique names on servers that communicate with each other. See “Setting up communications among servers” on page 686 for details. On a network where clients connect to multiple servers, it is preferable that all servers have unique names.

#### Attention:

- If the server is a source server for a virtual volume operation, changing its name can impact its ability to access and manage the data that it stored on the corresponding target server.
- To prevent problems that are related to volume ownership, do not change the name of a server if it is a library client.

You can change the server name with the SET SERVERNAME command. However, depending on the operating system, you might have the following unfortunate results:

- Passwords might be invalidated. For example, Windows clients use the server name to identify which passwords belong to which servers. Changing the server name after Windows backup-archive clients are connected forces clients to reenter the passwords.
- Device information might be affected.
- Registry information on Windows operating systems might change.

### Changing the host name for a Tivoli Storage Manager server

When you change the server host name, you can avoid errors at server startup by ensuring that the database continues to function correctly.

#### Procedure

Use the following steps to change a host name when the Tivoli Storage Manager server is installed.

1. Back up the Tivoli Storage Manager database.
2. Stop the Tivoli Storage Manager server.
3. Change the startup service of the Tivoli Storage Manager server to manual startup:
  - a. In the Windows Services Management Console, select **TSM Server** service.

- b. Right-click the service and click **Properties**.
  - c. In the **Startup Type** field, select **Manual**.
4. Issue the following commands from the DB2 command prompt window to update the DB2SYSTEM registry variable, turn off extended security, and verify the settings:

```
db2set -g DB2SYSTEM=new_host_name
db2set -g DB2_EXTSECURITY=NO
db2set -all
```

**Tip:** The **DB2\_EXTSECURITY** parameter is reset to YES when you restart the system.

5. Check for the presence of the db2nodes.cfg file. Depending on your version of Windows, the db2nodes.cfg file might be in one of the following directories:
  - Windows 2008 or later:
 

```
C:\ProgramData\IBM\DB2\DB2TSM1\<DB2 Instance name>
```
  - Other versions of Windows:
 

```
C:\Documents and Settings\All Users\Application Data\IBM\DB2\DB2TSM1\<DB2 Instance name>
```

**Tip:** The db2nodes.cfg file is a hidden file. Ensure that you show all files by going to Windows Explorer and selecting **Tools > Folder Options** and specifying to view hidden files.

If the db2nodes.cfg file does not exist on your system, proceed to the next step. If the file does exist, issue the following command to update the host name:

```
db2nchg /n:0 /i:<instance> /h:<new host name>
```

6. Change the Windows host name, as described in the documentation for the Windows system that you are using.
7. Restart the server.
8. Update the security settings by running the following command:
 

```
db2extsec -a new_host_name\DB2ADMNS -u new_host_name\DB2USERS
```
9. Start the Tivoli Storage Manager server.
10. Reset the startup service for Tivoli Storage Manager server to be automatic:
  - a. In the Windows Services Management Console, select **TSM Server** service.
  - b. Right-click the service and click **Properties**.
  - c. In the **Startup Type** field, select **Automatic**.

---

## Add or update server options

If you have system privileges, you can add or update server options in the dsmserv.opt file.

To add or update server options, use the **SETOPT** command to edit the dsmserv.opt file.

For information about editing the server options file, refer to the *Administrator's Reference*.

## Add or update a server option without restarting the server

A system administrator can add or update a limited number of server options without stopping and restarting the server. The added or updated server option is appended to the end of the server options file.

You can update existing server options by issuing the **SETOPT** command. For example, to update the existing server option value for MAXSESSIONS to 20, enter:

```
setopt maxsessions 20
```

These server options can be added or updated:

- COMMTIMEOUT
- DATEFORMAT
- DNSLOOKUP
- EXPINTERVAL
- EXPQUIET
- IDLETIMEOUT
- MAXSESSIONS
- NUMBERFORMAT
- RESTOREINTERVAL
- TIMEFORMAT
- THROUGHPUTDATATHRESHOLD
- THROUGHPUTTIMETHRESHOLD

**Note:** **SETOPT** commands in a macro cannot be rolled back.

---

## Deleting information about volume history

Periodically delete outdated information from the volume history file.

### About this task

The contents of the volume history file are created by using the volume history table in the server database. When a volume is opened, the server might check the table to determine whether the volume is already used. If the table is large, it can take a long time to search. Other sessions or processes, such as backups and other processes that use multiple sequential volumes, can be delayed due to locking.

For example, if you keep backups for seven days, information older than seven days is not needed. If information about database backup volumes or export volumes is deleted, the volumes return to scratch status. For scratch volumes of device type FILE, the files are deleted. When information about storage pools volumes is deleted, the volumes themselves are not affected.

### Procedure

To delete volume history, issue the **DELETE VOLHISTORY** command. For example, to delete volume history that is seven days old or older, issue the following command:

```
delete volhistory type=all todate=today-8
```

When you are deleting information about volume history, keep in mind the following guidelines:

- Ensure that you delete volume history entries such as STGNEW, STGDELETE, and STGREUSE that are older than the oldest database backup that is required for a point-in-time database restore. If necessary, you can delete other types of entries.
- Existing volume history files are not automatically updated with the **DELETE VOLHISTORY** command.
- Do not delete information about sequential volumes until you no longer need that information. For example, do not delete information about the reuse of storage volumes unless you backed up the database after the time that was specified for the delete operation.
- Do not delete the volume history for database backup or export volumes that are stored in automated libraries unless you want to return the volumes to scratch status. When the **DELETE VOLHISTORY** command removes information for such volumes, the volumes automatically return to scratch status. The volumes are then available for reuse by the server and the information that is stored on them can be overwritten.
- To ensure that you have a backup from which to recover, you cannot remove the most current database snapshot entry by deleting volume history. Even if a more current, standard database backup exists, the latest database snapshot is not deleted.
- To display volume history, issue the **QUERY VOLHISTORY** command. For example, to display volume history up to yesterday, issue the following command:  

```
query volhistory enddate=today-1
```

## Results

---

DRM: DRM automatically expires database backup series and deletes the volume history entries.

---



---

## Getting help on commands and error messages

Any administrator can issue the **HELP** command to display information about administrative commands and messages from the server and the administrative command-line client.

### About this task

You can issue the **HELP** command with no operands to display a menu of help selections. You also can issue the **HELP** command with operands that specify help menu numbers, commands, or message numbers.

To display the help menu, enter:

```
help
```

To display help information on the **REMOVE** commands, enter:

```
help remove
```

To display help information on a specific message, such as ANR0992I, enter:

```
help 0992
```

Additional information is also available in the online documentation.

---

## Chapter 19. Automating server operations

You can schedule administrative commands to tune server operations and to start functions that require significant server or system resources during times of low usage. Automating these operations allows the administrator to ensure that server resources are available when needed by clients.

### About this task

An administrator can automate the process of issuing a sequence of commands by storing the commands in a server script. From the command line, the administrator can immediately process the script or schedule the script for processing.

Tivoli Storage Manager includes a central scheduling component that allows the automatic processing of administrative commands during a specific time period when the schedule is activated. Schedules that are started by the scheduler can run in parallel. You can process scheduled commands sequentially by using scripts that contain a sequence of commands with **WAIT=YES**. You can also use a scheduler external to the administrative client to start one or more administrative commands.

Each scheduled administrative command is called an *event*. The server tracks and records each scheduled event in the database. You can delete event records as needed to recover database space.

Scripts can be scheduled. For example:

### Procedure

1. Define a schedule that is named EXPPROC that starts expiration processing every night at 2:00 a.m. For example:

```
define schedule expproc type=administrative -
 cmd='expire inventory' active=yes starttime=02:00
```

This schedule calls for a schedule window that has the following characteristics:

- Begins on the date the schedule is defined (the default) at 2:00 a.m.
  - Lasts for 1 hour (the default)
  - Is repeated every day
  - Takes effect immediately
  - Stays in effect indefinitely (the default)
2. Because the EXPPROC schedule is to run daily, you can verify that the automation is working on the day after you define the schedule. For example:  

```
query event expproc type=administrative begindate=today-1
```

If the schedule ran successfully, the status is *Completed*.



## What to do next

For more information about schedules, see the following topics:

|                                                     |
|-----------------------------------------------------|
| <b>Concepts:</b>                                    |
| “Basic administrative command schedules”            |
| “Schedule parameters” on page 613                   |
| “Copying schedules” on page 616                     |
| “Deleting schedules” on page 617                    |
| “Scheduled event records” on page 617               |
| “Tivoli Storage Manager server scripts” on page 618 |
| “Administrative client macros” on page 627          |

---

## Basic administrative command schedules

You can set up a basic administrative command schedule by using Tivoli Storage Manager defaults.

### Notes:

1. Scheduled administrative command output is directed to the activity log. This output cannot be redirected. For information about the length of time activity log information is retained in the database, see “Using the Tivoli Storage Manager activity log” on page 828.
2. You cannot schedule **MACRO** or **QUERY ACTLOG** commands.

To later update or tailor your schedules, see “Schedule parameters” on page 613.

| Task                                                     | Required Privilege Class |
|----------------------------------------------------------|--------------------------|
| Define, update, copy, or delete administrative schedules | System                   |
| Display information about scheduled operations           | Any administrator        |

## Defining the schedule

You can use the **DEFINE SCHEDULE** command to create a new schedule for processing an administrative command.

### About this task

Include the following parameters when you define a schedule with the **DEFINE SCHEDULE** command:

- Specify the administrative command to be issued (CMD= ).
- Specify whether the schedule is activated (ACTIVE= ).

Issue the following example command:

```
define schedule backup_archivepool type=administrative
cmd='backup stgpool archivepool recoverypool' active=yes
```

To receive the following results:

- The schedule that is created is *BACKUP\_ARCHIVEPOOL*.

- The schedule is to process the administrative command:  
`backup stgpool archivepool recoverypool`  
 This command specifies that primary storage pool ARCHIVEPOOL is backed up to the copy storage pool RECOVERYPOOL.
- The schedule is active.
- Administrative command output is redirected to the activity log.
- The following defaults are in effect:
  - The start date and time defaults to the current date and time.
  - The length of the startup window is 1 hour.
  - The priority for the schedule is 5. If schedules conflict, the schedule with the highest priority (lowest number) is run first.
  - The schedule never expires.

To change the defaults, see “Schedule parameters.”

## Verifying the schedule

You can verify the details of a schedule by using the **QUERY SCHEDULE** command. When you use the **QUERY SCHEDULE** command, you must specify the **TYPE=ADMINISTRATIVE** parameter to view an administrative command schedule.

### About this task

The following figure shows an example of a report that is displayed after you enter:

```
query schedule backup_archivepool type=administrative
```

| * | Schedule Name           | Start Date/Time     | Duration | Period | Day |
|---|-------------------------|---------------------|----------|--------|-----|
| - | BACKUP_ARCHIVE-<br>POOL | 09/04/2002 14:08:11 | 1 H      | 1 D    | Any |

**Note:** The asterisk (\*) in the first column specifies whether the corresponding schedule is expired. If there is an asterisk in this column, the schedule is expired.

You can check when the schedule is projected to run and whether it ran successfully by using the **QUERY EVENT** command. For information about querying events, see “Querying events” on page 617.

---

## Schedule parameters

To control your schedules more precisely, specify values for the schedule parameters instead of accepting the default settings when you define or update schedules.

You can specify the following values when you issue the **DEFINE SCHEDULE** or **UPDATE SCHEDULE** command:

### Schedule name

All schedules must have a unique name, which can be up to 30 characters.

### Schedule style

You can specify either classic or enhanced scheduling. With classic scheduling, you can define the interval between the startup windows for a schedule. With enhanced scheduling, you can choose the days of the week, days of the month, weeks of the month, and months the startup window can begin on.

### Initial start date, initial start time, and start day

You can specify a past date, the current date, or a future date for the initial start date for a schedule with the **STARTDATE** parameter.

You can specify a start time, such as 6 p.m. with the **STARTTIME** parameter.

For classic scheduling, use the **DAYOFWEEK** parameter to specify that the startup window begins on a certain day of the week, over the weekend, during the week, or on any day. If the start date and time specified fall on a day that does not correspond to your value for the day of the week, the start date and time are shifted forward in 24-hour increments until the day of the week is satisfied. If you select a value for the day of the week other than **ANY**, schedules might not process when you expect, depending on the values for **PERIOD** and **PERUNITS**. Issue the **QUERY EVENT** command to view schedule start times to ensure that you achieve the result you want.

For enhanced scheduling, you can use the **DAYOFWEEK** parameter to specify that the startup window begin on one or more days of the week, over the weekend, during the week, or on any day. **MONTH**, **DAYOFMONTH**, and **WEEKOFMONTH** can also determine a start date. When used with the **DAYOFMONTH** parameter, **DAYOFWEEK** must have a value of **ANY**. If **DAYOFWEEK=WEKDAY** or **DAYOFWEEK=WEEKEND**, you must specify a value of either **FIRST** or **LAST** for the parameter **WEEKOFMONTH**.

### Duration of a startup window

You can specify the duration of a startup window, such as 12 hours, with the **DURATION** and **DURUNITS** parameters. The server must start the scheduled service within the specified duration, but does not necessarily complete it within that time. If the schedule needs to be tried again for any reason, the attempt must begin before the startup window elapses or the operation does not restart.

If the schedule does not start during the startup window, the server records this failure as a *missed event* in the database. You can get an exception report from the server to identify schedules that did not run. For more information, see “Querying events” on page 617.

### How often to run the scheduled service

With classic scheduling, you can set the schedule frequency by specifying a period of hours, days, weeks, months, or years with the **PERIOD** and **PERUNITS** parameters. To have weekly backups, for example, set the period to one week with **PERIOD=1** and **PERUNITS=WEEKS**.

With enhanced scheduling specified, you can set your schedule to run on certain months, days of the month, days of the week, and weeks of the month with the **MONTH**, **DAYOFMONTH**, **DAYOFWEEK**, and **WEEKOFMONTH** parameters, respectively. For example, if you want your schedule to run on the first and last day of January and June, specify the months of January and June and specify the first and last days of the month with **MONTH=JANUARY,JUNE** and **DAYOFMONTH=1,-1**. If you want your schedule to run during the last week of November, for example, specify the last week of the month and November with **MONTH=NOVEMBER** and **WEEKOFMONTH=LAST**.

### Expiration date

You can specify an expiration date for a schedule with the **EXPIRATION** parameter if the services it initiates are required for only a specific period. If you set an expiration date, the schedule is not used after that date, but it still exists. You must delete the schedule to remove it from the database.

### Priority

You can assign a priority to schedules with the **PRIORITY** parameter. For example, if you define two schedules and they have the same startup window or windows overlap, the server runs the schedule with the highest priority first. A schedule with a priority of 1 is started before a schedule with a priority of 3.

If two schedules try to use the same resources, the schedule that first initiated the process is the one to continue processing. The second schedule starts but will not successfully complete. Be sure to check the activity log for details.

### Administrative schedule name

If you are defining or updating an administrative command schedule, you must specify the schedule name.

### Type of schedule

If you are updating an administrative command schedule, you must specify **TYPE=ADMINISTRATIVE** on the **UPDATE** command. If you are defining a new administrative command schedule, this parameter is assumed if the **CMD** parameter is specified.

### Command

When you define an administrative command schedule, you must specify the complete command that is processed with the schedule with the **CMD** parameter. These commands are used to tune server operations or to start functions that require significant server or system resources. The following functions are included:

- Migration
- Reclamation
- Export and import
- Database backup

### Whether the schedule is active

Administrative command schedules can be active or inactive when they are defined or updated. Active schedules are processed when the specified command window occurs. Inactive schedules are not processed until they are made active by an **UPDATE SCHEDULE** command with the **ACTIVE** parameter set to **YES**.

## Scheduling commands to run by using classic or enhanced command schedules

Depending on what type of event you want you schedule, and how often, you can schedule commands to run by using classic or enhanced scheduling.

### About this task

#### Classic Scheduling

To schedule the backup of the ARCHIVEPOOL primary storage pool periodically, use classic scheduling. Enter the following command:

```
define schedule backup_archivepool type=administrative
cmd='backup stgpool archivepool recoverypool'
active=yes starttime=20:00 period=2
```

This command specifies that, starting today, the ARCHIVEPOOL primary storage pool is to be backed up to the RECOVERYPOOL copy storage pool every two days at 8 p.m.

To update the BACKUP\_ARCHIVEPOOL schedule, enter:

```
update schedule backup_archivepool type=administrative
starttime=20:00 period=3
```

Starting today, the BACKUP\_ARCHIVEPOOL schedule begins the backup every three days at 10 p.m.

### Enhanced Scheduling

To schedule the backup of the CENTRALPOOL primary storage pool on specific days of the month, use enhanced scheduling. Enter the following command:

```
define schedule backup_centralpool type=administrative
cmd='backup stgpool centralpool auxiliarypool'
active=yes starttime=22:00 schedstyle=enhanced dayofmonth=10,-1
```

This command specifies that the CENTRALPOOL primary storage pool is to be backed up to the AUXILARYPOOL copy storage pool on the 10th and last day of each month at 10 p.m.

To update the BACKUP\_CENTRALPOOL schedule, enter:

```
update schedule backup_centralpool type=administrative
starttime=19:00 dayofmonth=-2
```

Starting today, the BACKUP\_CENTRALPOOL schedule begins the backup on the second-to-last day of the month at 7 p.m.

---

## Copying schedules

You can create a new schedule by copying an existing administrative schedule.

### About this task

When you copy a schedule, Tivoli Storage Manager copies the following information:

- A description of the schedule
- All parameter values from the original schedule

### Procedure

To copy the BACKUP\_ARCHIVEPOOL administrative schedule and name the new schedule BCKSCHED, issue the following command:

```
copy schedule backup_archivepool bcksched type=administrative
```

---

## Deleting schedules

You can delete administrative schedules from the database.

### About this task

You delete administrative schedules from the database by using the **DELETE SCHEDULE** command.

### Procedure

To delete the administrative schedule ENGBKUP, issue the following command:

```
delete schedule engbkup type=administrative
```

---

## Scheduled event records

Each scheduled administrative command operation is called an *event*.

| Task                                       | Required Privilege Class      |
|--------------------------------------------|-------------------------------|
| Display information about events           | Any administrator             |
| Set the retention period for event records | System                        |
| Delete event records                       | System or unrestricted policy |

All scheduled events, including their status, are tracked by the server. An *event record* is created in the server database whenever processing of a scheduled command is created or missed.

## Querying events

To help manage schedules for administrative commands, you can request information about scheduled and completed events. You can request general or exception reporting queries.

### About this task

- To get information about past and projected scheduled processes, use a general query. If the time range you specify includes the future, the query output shows which events are scheduled to occur in the future.
- To get information about scheduled processes that did not complete successfully, use exception reporting.

To minimize the processing time when querying events, minimize the time range.

To query an event for an administrative command schedule, you must specify the **TYPE=ADMINISTRATIVE** parameter. Figure 78 on page 618 shows an example of the results of the following command:

```
query event * type=administrative
```

| Scheduled Start     | Actual Start        | Schedule Name           | Status    |
|---------------------|---------------------|-------------------------|-----------|
| 09/04/2002 14:08:11 | 09/04/2002 14:08:14 | BACKUP_ARCHI-<br>VEPOOL | Completed |

Figure 78. Query results for an administrative schedule

## Removing event records from the database

You can specify how long event records stay in the database before the server deletes them. You can also manually remove event records from the database.

If you issue a query for events, past events might display even if the event records were deleted. Events that are displayed with a status of *Uncertain* indicate that complete information is not available because the event records were deleted. To determine if event records were deleted, check the message that is issued after the DELETE EVENT command is processed.

### Setting the event record retention period

You can specify the retention period for event records in the database. After the retention period passes, the server automatically removes the event records from the database. At installation, the retention period is set to 10 days.

Event records are automatically removed from the database after both of the following conditions are met:

- The specified retention period is passed
- The startup window for the event is elapsed

You can change the retention period from the default of 10 days by using the SET EVENTRETENTION command.

### Deleting event records

Because event records are deleted automatically, you do not have to manually delete them from the database. However, you might want to manually delete event records to increase available database space.

### About this task

Use the DELETE EVENT command manually remove event records. For example, to delete all event records written before 11:59 p.m. on June 30, 2002, enter:

```
delete event type=administrative 06/30/2002 23:59
```

---

## Tivoli Storage Manager server scripts

Tivoli Storage Manager provides for automation of common administrative tasks with server scripts that are stored in the database.

Tivoli Storage Manager provides sample scripts in:

- scripts.smp

The sample scripts have an example order of execution for scheduling administrative commands. If one of the specified commands in the script does not process successfully, the remaining commands are not processed. For more information, see “Using SELECT commands in Tivoli Storage Manager scripts” on page 826.

The administrator can schedule the script for processing by using the administrative command scheduler on the server.

Tivoli Storage Manager scripts support the following capabilities and statements:

- Command parameter substitution.
- SQL SELECT statements that you specify when the script is processed.
- Command execution control, such as PARALLEL and SERIAL processing options.
- Conditional logic flow statements. These logic flow statements include the following statements:
  - The IF clause; this clause determines how processing proceeds based on the current return code value.
  - The EXIT statement; this statement ends script processing.
  - The GOTO and LABEL statement; this statement directs logic flow to continue processing with the line that starts with the label specified.
  - Comment lines.

## Defining a server script

You can define a server script line-by-line, create a file that contains the command lines, or copy an existing script.

### About this task

| Task                   | Required Privilege Class              |
|------------------------|---------------------------------------|
| Define a server script | System, policy, storage, and operator |

You can define a script with the **DEFINE SCRIPT** command. You can initially define the first line of the script with this command. For example:

```
define script qaixc "select node_name from nodes where platform='aix'"
desc='Display AIX clients'
```

This example defines the script as QAIXC. When you run the script, all AIX clients are displayed.

To define more lines, use the **UPDATE SCRIPT** command. For example, you want to add a **QUERY SESSION** command, enter:

```
update script qaixc "query session *"
```

You can specify a **WAIT** parameter with the **DEFINE CLIENTACTION** command. By using this parameter, you can specify that the client action must complete before the next step in the command script or macro is processed. To determine where a problem is within a command in a script, use the **ISSUE MESSAGE** command.

**Restriction:** You cannot redirect the output of a command within a Tivoli Storage Manager script. Instead, run the script and then specify command redirection. For example, to direct the output of **script1** to the c:\temp\test.out directory, run the script and specify command redirection as in the following example:

```
run script1 > c:\temp\test.out
```

For more information, see the following commands:

- **DEFINE CLIENTACTION** ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.srv.ref.doc/r\\_cmd\\_clientaction\\_define.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.srv.ref.doc/r_cmd_clientaction_define.html))



- **ISSUE MESSAGE** ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.srv.ref.doc/r\\_cmd\\_message\\_issue.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.srv.ref.doc/r_cmd_message_issue.html))

For more information about updating server scripts, or updating a command line, see “Updating a script” on page 624.

## Defining a server script by using the contents of another file

You can define a script whose command lines are read in from another file that contains statements for the script to be defined.

### About this task

For example, to define a script whose command lines are read in from the file BKUP12.MAC, issue:

```
define script admin1 file=bkup12.mac
```

The script is defined as ADMIN1, and the contents of the script were read in from the file BKUP12.MAC.

**Note:** The file must be on the server, and be read by the server.

## Running commands in parallel or serially

You have the options of running commands in a script serially, in parallel, or serially and in parallel. You can do so by using the **SERIAL** or **PARALLEL** script commands in the **COMMAND\_LINE** parameter of **DEFINE** and **UPDATE SCRIPT**. Therefore, it is possible to run multiple commands in parallel and wait for them to complete before the next command is run.

### About this task

Running commands serially in a script ensures that any preceding commands are complete before proceeding and ensures that any following commands are run serially. When a script starts, all commands are run serially until a **PARALLEL** command is encountered. Multiple commands that are running in parallel and accessing common resources, such as tape drives, can run serially.

Script return codes remain the same before and after a **PARALLEL** command is run. When a **SERIAL** command is encountered, the script return code is set to the maximum return code from any previous commands that were run in parallel.

When you use server commands that support the **WAIT** parameter after a **PARALLEL** command, the behavior is as follows:

- If you specify (or use the default) **WAIT=NO**, a script does not wait for the completion of the command when a subsequent **SERIAL** command is encountered. The return code from that command reflects processing only up to the point that the command starts a background process. The final return code from the command is not available to your script.
- If you specify **WAIT=YES**, your script waits for the completion of the command when a subsequent **SERIAL** command is encountered. The return code from that command reflects processing for the entire command.

In most cases, you can use **WAIT=YES** on commands that are run in parallel.

**Restriction:** If the Tivoli Storage Manager command starts a background process that does not have the **WAIT** parameter, the command is considered to be complete after the background thread is started. Therefore, the command can run only in parallel.

The following example illustrates how the **PARALLEL** command is used to back up, migrate, and reclaim storage pools.

```
/*run multiple commands in parallel and wait for
them to complete before proceeding*/
PARALLEL
/*back up four storage pools simultaneously*/
BACKUP STGPPOOL PRIMPOOL1 COPYPOOL1 WAIT=YES
BACKUP STGPPOOL PRIMPOOL2 COPYPOOL2 WAIT=YES
BACKUP STGPPOOL PRIMPOOL3 COPYPOOL3 WAIT=YES
BACKUP STGPPOOL PRIMPOOL4 COPYPOOL4 WAIT=YES
/*wait for all previous commands to finish*/
SERIAL
/*after the backups complete, migrate stgpools
simultaneously*/
PARALLEL
MIGRATE STGPPOOL PRIMPOOL1 DURATION=90 WAIT=YES
MIGRATE STGPPOOL PRIMPOOL2 DURATION=90 WAIT=YES
MIGRATE STGPPOOL PRIMPOOL3 DURATION=90 WAIT=YES
MIGRATE STGPPOOL PRIMPOOL4 DURATION=90 WAIT=YES
/*wait for all previous commands to finish*/
SERIAL
/*after migration completes, reclaim storage
pools simultaneously*/
PARALLEL
RECLAIM STGPPOOL PRIMPOOL1 DURATION=120 WAIT=YES
RECLAIM STGPPOOL PRIMPOOL2 DURATION=120 WAIT=YES
RECLAIM STGPPOOL PRIMPOOL3 DURATION=120 WAIT=YES
RECLAIM STGPPOOL PRIMPOOL4 DURATION=120 WAIT=YES
```

## Continuing commands across multiple command lines

You can continue long commands across multiple command lines by specifying the continuation character (-) as the last character for a command that is continued.

### About this task

The following example continues an SQL statement across multiple command lines:

```
/*-----*/
/* Sample continuation example */
SELECT-
* FROM-
NODE WHERE-
PLATFORM='win32'
```

When this command is processed, it runs the following command:

```
select * from nodes where platform='win32'
```

## Including substitution variables in a script

You can include substitution variables in a script. Substitution variables are specified with a \$ character followed by a number that represents the position of the parameter when the script is processed.

### About this task

The following example SQLSAMPLE script specifies substitution variables \$1 and \$2:

```
/*-----*/
/* Sample substitution example */
/* -----*/
SELECT-
$1 FROM-
NODES WHERE-
PLATFORM='$2'
```

When you run the script you must specify two values, one for \$1 and one for \$2. For example:

```
run sqlsample node_name aix
```

The command that is processed when the SQLSAMPLE script is run is the following command:

```
select node_name from nodes where platform='aix'
```

## Including logic flow statements in a script

You can use conditional logic flow statements that are based on return codes that are issued from previous command processing. By using these logic statements, you can process your scripts according to the outcome of certain commands. You can use IF, EXIT, or GOTO (label) statements.

As each command is processed in a script, the return code is saved for possible evaluation before the next command is processed. The return code can be one of three severities: OK, WARNING, or ERROR. Refer to *Administrator's Reference* for a list of valid return codes and severity levels.

### Specifying the IF clause:

You can use the IF clause at the beginning of a command line to determine how processing of the script proceeds based on the current return code value. In the IF clause, you specify a return code symbolic value or severity.

### About this task

The server initially sets the return code at the beginning of the script to RC\_OK. The return code is updated by each processed command. If the current return code from the processed command is equal to any of the return codes or severities in the IF clause, the remainder of the line is processed. If the current return code is not equal to one of the listed values, the line is skipped.

The following script example backs up the BACKUPPOOL storage pool only if there are no sessions currently accessing the server. The backup proceeds only if a return code of RC\_NOTFOUND is received:

```
/* Backup storage pools if clients are not accessing the server */
select * from sessions
/* There are no sessions if rc_notfound is received */
if(rc_notfound) backup stg backuppool copypool
```

The following script example backs up the BACKUPPOOL storage pool if a return code with a severity of warning is encountered:

```
/* Backup storage pools if clients are not accessing the server */
select * from sessions
/* There are no sessions if rc_notfound is received */
if(warning) backup stg backuppool copypool
```

### Specifying the EXIT statement:

Use the EXIT statement to end script processing.

#### About this task

The following example uses the IF clause together with RC\_OK to determine if clients are accessing the server. If a RC\_OK return code is received, it indicates that client sessions are accessing the server. The script proceeds with the exit statement, and the backup does not start.

```
/* Back up storage pools if clients are not accessing the server */
select * from sessions
/* There are sessions if rc_ok is received */
if(rc_ok) exit
backup stg backuppool copypool
```

### Specifying the GOTO statement:

The GOTO statement is used with a label statement. The label statement is the target of the GOTO statement. The GOTO statement directs script processing to the line that contains the label statement to resume processing from that point.

#### About this task

The label statement always has a colon (:) after it and can be blank after the colon. The following example uses the GOTO statement to back up the storage pool only if there are no sessions currently accessing the server. In this example, the return code of RC\_OK indicates that clients are accessing the server. The GOTO statement directs processing to the done: label, which contains the EXIT statement that ends the script processing:

```
/* Back up storage pools if clients are not accessing the server */
select * from sessions
/* There are sessions if rc_ok is received */
if(rc_ok) goto done
backup stg backuppool copypool
done:exit
```

## Managing server scripts

You can update, copy, rename, query, delete, and run server scripts.

| Task                                             | Required Privilege Class              |
|--------------------------------------------------|---------------------------------------|
| Update, copy, rename, query, and delete a script | System, policy, storage, and operator |
| Run a script                                     | System, policy, storage, and operator |

## Updating a script

You can update a script to change a command line or to add a command line to a script.

### Appending a new command:

To append a command line to an existing script issue the UPDATE SCRIPT command without the LINE= parameter. The appended command line is assigned a line number of five greater than the last command line number in the command line sequence. For example, if your script ends with line 010, the appended command line is assigned a line number of 015.

### About this task

The following is an example of the QSTATUS script. The script has lines 001, 005, and 010 as follows:

```
001 /* This is the QSTATUS script */
005 QUERY STATUS
010 QUERY PROCESS
```

To append the QUERY SESSION command at the end of the script, issue the following command:

```
update script qstatus "query session"
```

The QUERY SESSION command is assigned a command line number of 015 and the updated script is as follows:

```
001 /* This is the QSTATUS script */
005 QUERY STATUS
010 QUERY PROCESS
015 QUERY SESSION
```

### Replacing an existing command:

You can change an existing command line by specifying the LINE= parameter.

### About this task

Line number 010 in the QSTATUS script contains a QUERY PROCESS command. To replace the QUERY PROCESS command with the QUERY STGPOOL command, specify the LINE= parameter as follows:

```
update script qstatus "query stgpool" line=10
```

The QSTATUS script is updated to contain the following lines:

```
001 /* This is the QSTATUS script */
005 QUERY STATUS
010 QUERY STGPOOL
015 QUERY SESSION
```

### Adding a command and line number:

You can change an existing script by adding new lines.

#### About this task

To add the SET REGISTRATION OPEN command as the new line 007 in the QSTATUS script, issue the following command:

```
update script qstatus "set registration open" line=7
```

The QSTATUS script is updated to contain the following lines:

```
001 /* This is the QSTATUS script */
005 QUERY STATUS
007 SET REGISTRATION OPEN
010 QUERY STGPPOOL
015 QUERY SESSION
```

### Copying a server script

You can copy an existing script to a new script with a different name.

#### About this task

For example, to copy the QSTATUS script to QUERY1 script, issue the following command:

```
copy script qstatus query1
```

The QUERY1 command script now contains the same command lines as the QSTATUS command script.

### Querying a server script

You can query a script to display information about the script. You can specify wildcard characters to display all scripts with names that match a particular pattern. When you query a script, you can direct the output to a file in a file system that the server can access.

#### About this task

The various formats you can use to query scripts are as follows:

| Format   | Description                                                                                                                                                                                                                                                   |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard | Displays the script name and description. This format is the default.                                                                                                                                                                                         |
| Detailed | Displays commands in the script and their line numbers, date of last update, and update administrator for each command line in the script.                                                                                                                    |
| Lines    | Displays the name of the script, the line numbers of the commands, comment lines, and the commands.                                                                                                                                                           |
| File     | Outputs only the commands that are contained in the script without all other attributes. You can use this format to direct the script to a file so that it can be loaded into another server with a DEFINE script command that specifies the FILE= parameter. |

To query a script in the standard format, issue the following command:

```
query script *
```

The command gives results like the following output:

| Name    | Description                               |
|---------|-------------------------------------------|
| QCOLS   | Display columns for a specified SQL table |
| QSAMPLE | Sample SQL Query                          |

For more information about querying a server script, refer to *Administrator's Reference*.

### Querying a server script to create another server script:

You can create more server scripts by querying a script and specifying the `FORMAT=FILE` and `OUTPUTFILE` parameters. You can use the resulting output as input into another script without having to create a script line by line.

#### About this task

The following is an example of querying the `SRTL2` script and directing the output to `newscript.script`:

```
query script srtl2 format=raw outputfile=newscript.script
```

You can then edit the `newscript.script` with an editor that is available to you on your system. To create a new script by using the edited output from your query, issue:

```
define script srtnew file=newscript.script
```

### Renaming a server script

You can rename a script to a different name.

#### About this task

For example, to rename the `QUERY1` script to `QUERY5`, issue the following command:

```
rename script query1 query5
```

The `QUERY1` script is now named `QUERY5`.

### Deleting a command from a server script

You can delete an individual command line from a script. When you specify a line number, only the corresponding command line is deleted from the script.

#### About this task

For example, to delete the 007 command line from the `QSTATUS` script, issue the following command:

```
delete script qstatus line=7
```

## Deleting a server script

To delete an entire script, issue the DELETE SCRIPT command.

### About this task

For example, to delete the QSTATUS script, issue the following command:

```
delete script qstatus
```

## Running a server script

To process a script, issue the RUN command. You can run a script that contains substitution variables by specifying them along with the RUN command.

### About this task

**Note:** You cannot cancel a script after it starts by using a Tivoli Storage Manager command. To stop a script, an administrator must halt the server.

You can preview the command lines of a script without executing the commands by using the PREVIEW=YES parameter with the RUN command. If the script contains substitution variables, the command lines are displayed with the substituted variables. Previewing the command lines is useful for evaluating a script before you run it.

For example, to process the QAIXC script that was previously defined, issue the following command:

```
run qaixc
```

To process the following script that contains substitution variables:

```
/*-----*/
/* Sample continuation and substitution example */
/* -----*/
SELECT-
$1 FROM-
NODES WHERE-
PLATFORM='$2'
```

Enter:

```
run qaixc node_name aix
```

Where \$1 is node\_name and \$2 is aix.

---

## Administrative client macros

Tivoli Storage Manager supports macros on the administrative client. A macro is a file that contains one or more administrative client commands. You can run a macro from the administrative client only in batch or interactive modes. Macros are stored as a file on the administrative client. Macros are not distributed across servers and cannot be scheduled on the server.

Macros can include the following elements:

- Administrative commands

For more information about administrative commands, see “Writing commands in a macro” on page 628.

- Comments



For more information about comments, see “Writing comments in a macro” on page 629.

- Continuation characters

For more information about continuation characters, see “Including continuation characters in a macro” on page 629.

- Variables

For more information about variables, see “Including substitution variables in a macro” on page 630.

The name for a macro must follow the naming conventions of the administrative client that is running on your operating system. For more information about file naming conventions, refer to the *Administrator's Reference*.

In macros that contain several commands, use the COMMIT and ROLLBACK commands to control command processing within the macro. For more information about using these commands, see “Command processing in a macro” on page 631.

You can include the MACRO command within a macro file to invoke other macros up to 10 levels deep. A macro that is invoked from the Tivoli Storage Manager administrative client command prompt is called a high-level macro. Any macros that are invoked from within the high-level macro are called *nested* macros.

## Writing commands in a macro

You can add commands to a macro.

### About this task

The administrative client ignores any blank lines included in your macro. However, a blank line ends a command that is continued (with a continuation character).

The following is an example of a macro that is called REG.MAC that registers and grants authority to a new administrator:

```
register admin pease mypasswd -
 contact='david pease, x1234'
grant authority pease -
 classes=policy,storage -
 domains=domain1,domain2 -
 stgpools=stgpool1,stgpool2
```

This example uses continuation characters in the macro file. For more information about continuation characters, see “Including continuation characters in a macro” on page 629.

After you create a macro file, you can update the information that it contains and use it again. You can also copy the macro file. After you have a copy of the macro, you can modify and run the copy. Refer to the *Administrator's Reference* for more information on how commands are entered and the general rules for entering administrative commands.

## Writing comments in a macro

You can add comments to your macro file.

### About this task

To write a comment:

- Write a slash and an asterisk (/\*) to indicate the beginning of the comment.
- Write the comment.
- Write an asterisk and a slash (\*/) to indicate the end of the comment.

You can put a comment on a line by itself, or you can put it on a line that contains a command or part of a command.

For example, to use a comment to identify the purpose of a macro, write the following line:

```
/* auth.mac-register new nodes */
```

Or you can write a comment to explain something about a command or part of a command:

```
domain=domain1 /*assign node to domain1 */
```

Comments cannot be nested and cannot span lines. Every line of a comment must contain the comment delimiters.

## Including continuation characters in a macro

You can use continuation characters in a macro file. Continuation characters are useful when you want to run a command that is longer than your screen or window width.

### About this task

**Attention:** Without continuation characters, you can enter up to 256 characters. With continuation characters, you can enter up to 1500 characters. In the MACRO command, these maximums are after any substitution variables are applied (see “Including substitution variables in a macro” on page 630).

To use a continuation character, enter a dash or a back slash at the end of the line that you want to continue. With continuation characters, you can continue the following lines of a macro:

- Continue a command. For example:

```
register admin pease mypasswd -
contact="david, ext1234"
```

- Continue a list of values by entering a dash or a back slash, with no preceding blank spaces, after the last comma of the list that you enter on the first line. Then, enter the remaining items in the list on the next line with no preceding blank spaces. For example:

```
stgpools=stg1,stg2,stg3,-
stg4,stg5,stg6
```

- Continue a string of values that are enclosed in quotation marks by entering the first part of the string in quotation marks, followed by a dash or a back slash at the end of the line. Then, enter the remainder of the string on the next line. Enclose the remainder of the string in the same type of quotation marks. For example:

```
contact="david pease, bldg. 100, room 2b, san jose,"-
"ext. 1234, alternate contact-norm pass,ext 2345"
```

Tivoli Storage Manager concatenates the two strings with no intervening blanks. You must use only this method to continue a quoted string of values across more than one line.

## Including substitution variables in a macro

You can use substitution variables in a macro to supply values for commands when you run the macro. When you use substitution variables, you can use a macro again and again, whenever you need to complete the same task for different objects or with different parameter values.

### About this task

A substitution variable consists of a percent sign (%), followed by a number that indicates the number of the substitution variable. When you run the file with the MACRO command, you must specify values for the variables.

For example, to create a macro that is named AUTH.MAC to register new nodes, write it as follows:

```
/* register new nodes */
register node %1 %2 - /* userid password */
 contact=%3 - /* 'name, phone number' */
 domain=%4 /* policy domain */
```

Then, when you run the macro, you enter the values that you want to pass to the server to process the command.

For example, to register the node that is named DAVID with a password of DAVIDPW, include a name and phone number as contact information, and assign it to the DOMAIN1 policy domain, enter the following command:

```
macro auth.mac david davidpw "david pease, x1234" domain1
```

If your system uses the percent sign as a wildcard character, the administrative client interprets a pattern-matching expression in a macro where the percent sign is immediately followed by a digit as a substitution variable.

You cannot enclose a substitution variable in quotation marks. However, a value you supply as a substitution for the variable can be a quoted string.

## Running a macro

Use the MACRO command when you want to run a macro. You can enter the MACRO command in batch or interactive mode.

### About this task

If the macro does not contain substitution variables (such as the REG.MAC macro described in the “Writing commands in a macro” on page 628), run the macro by entering the MACRO command with the name of the macro file. For example:

```
macro reg.mac
```

If the macro contains substitution variables (such as the AUTH.MAC macro described in “Including substitution variables in a macro”), include the values that you want to supply after the name of the macro. Each value is delimited by a space. For example:

```
macro auth.mac pease mypasswd "david pease, x1234" domain1
```

If you enter fewer values than there are substitution variables in the macro, the administrative client replaces the remaining variables with null strings.

If you want to omit one or more values between values, enter a null string ("" ) for each omitted value. For example, if you omit the contact information in the previous example, you must enter:

```
macro auth.mac pease mypasswd "" domain1
```

## Command processing in a macro

When you issue a MACRO command, the server processes all commands in the macro file in order, including commands that are contained in any nested macros. The server commits all commands in a macro after successfully completing processing for the highest-level macro.

If an error occurs in any command in the macro or in any nested macro, the server stops processing and rolls back any changes that were caused by all previous commands.

If you specify the ITEMCOMMIT option when you enter the DSMADMC command, the server commits each command in a script or a macro individually after successfully completing processing for each command. If an error occurs, the server continues processing and rolls back only the changes caused by the failed command.

You can control precisely when commands are committed with the COMMIT command. If an error occurs while the server is processing the commands in a macro, the server stops processing the macro and rolls back any uncommitted changes. Uncommitted changes are commands that were processed since the last COMMIT. Make sure that your administrative client session is not running with the ITEMCOMMIT option if you want to control command processing with the COMMIT command.

**Note:** Commands that start background processes cannot be rolled back. For a list of commands that can generate background processes, see “Managing server processes” on page 603.

You can test a macro before you implement it by using the ROLLBACK command. You can enter the commands (except the COMMIT command) you want to issue in the macro, and enter ROLLBACK as the last command. Then, you can run the macro to verify that all the commands process successfully. Any changes to the database caused by the commands are rolled back by the ROLLBACK command. Remember to remove the ROLLBACK command before you make the macro available for actual use. Also, make sure that your administrative client session is not running with the ITEMCOMMIT option if you want to control command processing with the ROLLBACK command.

If you have a series of commands that process successfully from the command line, but are unsuccessful when issued within a macro, there are probably dependencies between commands. It is possible that a command issued within a macro cannot be processed successfully until a previous command that is issued within the same macro is committed. Either of the following actions allows successful processing of these commands within a macro:

- Insert a COMMIT command before the command dependent on a previous command. For example, if COMMAND C is dependent upon COMMAND B, you would insert a COMMIT command before COMMAND C.

```
command a
command b
commit
command c/
```

- Start the administrative client session by using the ITEMCOMMIT option. This option causes each command within a macro to be committed before the next command is processed.

---

## Chapter 20. Managing the database and recovery log

The IBM Tivoli Storage Manager database contains information that is needed for server operations and information about client data that has been backed up, archived, and space-managed. The recovery log contains information about database updates that have not yet been committed.

### About this task

The following sections provide detailed concept and task information about the database and recovery log.

|                                      |
|--------------------------------------|
| <b>Concepts:</b>                     |
| “Database and recovery log overview” |

|                                                                |
|----------------------------------------------------------------|
| <b>Tasks:</b>                                                  |
| “Estimating database space requirements” on page 641           |
| “Estimating recovery log space requirements” on page 645       |
| “Monitoring the database and recovery log” on page 636         |
| “Increasing the size of the database” on page 660              |
| “Reducing the size of the database” on page 664                |
| “Increasing the size of the active log” on page 671            |
| “Backing up the server database” on page 894                   |
| “Restoring the database” on page 926                           |
| “Moving the database and recovery log on a server” on page 676 |
| “Adding optional logs after server initialization” on page 673 |
| “Transaction processing” on page 678                           |

---

## Database and recovery log overview

The Tivoli Storage Manager administrative interfaces work with the database and recovery log. The skills of a database administrator are not required to manage them.

Tivoli Storage Manager version 6.3 is installed with the IBM DB2 database application. Users who are experienced DB2 administrators can choose to perform advanced SQL queries and use DB2 tools to monitor the database. However, do not use DB2 tools to change DB2 configuration settings from those settings that are preset by Tivoli Storage Manager. Do not alter the DB2 environment for Tivoli Storage Manager in other ways, such as with other products. The Tivoli Storage Manager Version 6.3 server was built and tested with the data definition language (DDL) and database configuration that Tivoli Storage Manager deploys.

**Attention:** Changes to the DDL or database configuration without using Tivoli Storage Manager interfaces can adversely affect performance, damage or destroy the server database, or cause data to become permanently lost.

Ensure that you do not do any of the following tasks:

- Use database tools or interfaces to change configuration settings that are set by Tivoli Storage Manager at installation that are different from the tools and interfaces that are provided or documented by Tivoli Storage Manager.
- Alter the DB2 environment in other ways. If you use database tools or interfaces that are different from the tools and interfaces that are provided or documented by Tivoli Storage Manager, you must treat the server database as read-only.
- Use other interfaces to change the server database.

## Database: Overview

The Tivoli Storage Manager database contains information about the Tivoli Storage Manager server.

The maximum size of the Tivoli Storage Manager database is 4 TB.

The database can be distributed across up to 128 directories. It is important that the database is placed on fast, reliable disks that are configured for random access I/O. Locating each directory on a different file system provides the best performance because the data is striped across the directories. Enable read cache for the database, and enable write cache if the disk subsystem supports it.

The database cannot be mirrored through Tivoli Storage Manager, but it can be protected by using hardware features, such as Redundant Array of Independent Disks (RAID) 5.

**Attention:** If the database is unusable, the Tivoli Storage Manager server is unavailable. You must backup the database to ensure that data that is managed by the server can be recovered. Encrypt sensitive data by using the Tivoli Storage Manager client or a storage device, unless the storage media is physically secured. Security can be compromised even if data is not recovered. If a database is lost and cannot be recovered, it might be difficult or impossible to recover data that is managed by that server. Fragments of data or complete files might be read from storage pool volumes that are not encrypted. See Part 6, “Protecting the server,” on page 853 for steps that you can take to protect your database.

The database manager manages database volumes, and there is no need to format them. Some advantages of the database manager are:

### Automatic backups

When the server is started for the first time, a full backup begins automatically. When the server is next started, the database manager automatically backs up the database according to the following values set by Tivoli Storage Manager:

- The active log space that is used since the last backup, which triggers a full database backup
- The active log utilization ratio, which triggers an incremental database backup

The database manager automatically backs up the database when the archive log usage is 80% full.

**Automatic statistics collection**

Automatic statistics collection helps to improve database performance by collecting up-to-date table statistics. The database manager determines which statistics must be updated.

**Automatic database reorganization**

Reorganization of table data can be initiated by the server, or by DB2. If server-initiated reorganization is enabled, based on table activity, the server analyzes selected database tables and their indexes to determine when reorganization is required. The database manager runs a reorganization while server operations continue.

**Attention:** If reorganization by DB2 is enabled, DB2 controls the reorganization process. Reorganization by DB2 is not recommended.

**Multiple data streams for database backup and restore**

Using a single data stream to back up databases of multiple terabytes can take many hours. It can also affect the administrator's ability to schedule database backups effectively. The time to recover the server by using a single data stream might not be enough to meet disaster recovery objectives for the server. The Tivoli Storage Manager server provides a multiple data stream capability for backups and restores.

**SQL queries**

The database makes more sophisticated SQL queries on the data possible. To take advantage of these functions, you must use SQL to develop new tools and create SQL statements.

**Database audits**

Database audits are run automatically, as needed, to ensure consistency. As data is added to the server database, the database manager checks data constraints and data types. Online integrity checks can prevent problems for which offline audits had been needed in earlier releases.

**Related concepts:**

"The server database and recovery log" on page 51

**Related tasks:**

"Table and index reorganization schedules" on page 666

## **Connecting the server to the database with TCP/IP**

The default configuration for the Tivoli Storage Manager server is to use interprocess communications (IPC) to communicate with the database manager. With Tivoli Storage Manager V6.3 and later, the server can also connect to the database manager by using TCP/IP.

Using TCP/IP to communicate with DB2 can greatly extend the number of concurrent connections. The TCP/IP connection is part of the default configuration. When the Tivoli Storage Manager V6.3 or later server is started for the first time, it inspects the current configuration of the DB2 instance. It then makes any necessary changes to ensure that both IPC and TCP/IP can be used to communicate with the database manager. Any changes are made only as needed. For example, if the TCP/IP node exists and has the correct configuration, it is not changed. If the node was cataloged but has an incorrect IP address or port, it is deleted and replaced by a node having the correct configuration.



When you catalog the remote database, the Tivoli Storage Manager server generates a unique alias name that is based on the name of the local database. By default, a remote database alias of TSMAL001 is created to go with the default database name of TSMDB1.

**Tip:** Tivoli Storage Manager disables the TCP/IP connections if it cannot find an alias in the range TSMAL001-TSMAL999 that is not already in use.

By default, the Tivoli Storage Manager server uses IPC to establish connections for the first two connection pools, with a maximum of 480 connections for each pool. After the first 960 connections are established, the Tivoli Storage Manager server uses TCP/IP for any additional connections.

You can use the DBMTCPPORT server option to specify the port on which the TCP/IP communication driver for the database manager waits for requests for client sessions. The port number must be reserved for use by the database manager.

If Tivoli Storage Manager cannot connect to the database by using TCP/IP, it issues an error message and halts. You must determine the cause of the problem and correct it before you restart the server. The server verifies that it can connect by using TCP/IP at startup even if it is configured to initially favor IPC connections over TCP/IP connections.

## Monitoring the database and recovery log

Monitor the total space, used space, and free space for database, active and recovery logs, and file systems where the directories are located. By monitoring space, you can identify where you can reclaim database space to reduce database growth and optimize server performance.

### About this task

You can monitor the database and recovery log space whether the server is online or offline.

### Procedure

- When the Tivoli Storage Manager server is online, you can issue the **QUERY DBSPACE** command to view the total space, used space, and free space for the file systems or drives where your database is located. To view the same information when the server is offline, issue the **DSMSERV DISPLAY DBSPACE** command. The following example shows the output of this command:

```

Location: d:\tsm\db001
Total Space (MB): 46,080.00
Used Space (MB): 20,993.12
Free Space (MB): 25,086.88

```

```

Location: e:\tsm\db002
Total Space (MB): 46,080.00
Used Space (MB): 20,992.15
Free Space (MB): 25,087.85

```

```

Location: f:\tsm\db003
Total Space (MB): 46,080.00
Used Space (MB): 20,993.16
Free Space (MB): 25,086.84

```

```

Location: g:\tsm\db004
Total Space (MB): 46,080.00
Used Space (MB): 20,992.51
Free Space (MB): 25,087.49

```

- To view more detailed information about the database when the server is online, issue the **QUERY DB** command. The following example shows the output of this command if you specify **FORMAT=DETAILED**:

```

Database Name: TSMDB1
Total Size of File System (MB): 184,320
Space Used by Database (MB): 83,936
Free Space Available (MB): 100,349
Total Pages: 6,139,995
Usable Pages: 6,139,451
Used Pages: 6,135,323
Free Pages: 4,128
Buffer Pool Hit Ratio: 100.0
Total Buffer Requests: 97,694,823,985
Sort Overflows: 0
Package Cache Hit Ratio: 100.0
Last Database Reorganization: 06/25/2009 01:33:11
Full Device Class Name: LT01_CLASS
Incrementals Since Last Full: 0
Last Complete Backup Date/Time: 06/06/2009 14:01:30

```

- When the Tivoli Storage Manager server is online, issue the **QUERY LOG FORMAT=DETAILED** command to display the total space, used space, and free space for the active log, and the locations of all the logs. To display the same information when the Tivoli Storage Manager server is offline, issue the **DSMSERV DISPLAY LOG** command. The following example shows the output of this command:

```

Total Space(MB): 38,912
Used Space(MB): 401.34
Free Space(MB): 38,358.65
Active Log Directory: h:\tsm\activelog
Archive Log Directory: k:\tsm\archivelog
Mirror Log Directory: i:\tsm\mirrorlog
Archive Failover Log Directory: j:\tsm\archfailoverlog

```

- You can view information about the database on the server console and in the activity log. You can set the level of database information by using the **SET DBREPORTMODE** command. Specify that no diagnostic information is displayed (**NONE**), that all diagnostic information is displayed (**FULL**), or that the only events that are displayed are exceptions that might represent errors (**PARTIAL**). The default is **PARTIAL**.

## Recovery log management

The recovery log is essential when you restart the Tivoli Storage Manager or the database, and is required if you must restore the database.

When you issue a command to make changes, the changes are committed to the database to complete. A committed change is permanent and cannot be rolled back. If a failure occurs, the changes that were made but not committed are rolled back. Then, all committed transactions, which might not have been physically written to disk, are reapplied and committed again.

During the installation process, you specify the directory location, the size of the active log, and the location of the archive logs. You can also specify the directory location of a log mirror if you want the additional protection of mirroring the active log. The amount of space for the archive logs is not limited, which improves the capacity of the server for concurrent operations, when you compare to previous versions.

The space that you designate for the recovery log is managed automatically by the database manager program. Space is used as needed, up to the capacity of the defined log directories. You do not need to create and format volumes for the recovery log.

Ensure that the recovery log has enough space. Monitor the space usage for the recovery log to prevent problems.

**Attention:** To protect your data, locate the database directories and all the log directories on separate physical disks.

**Related concepts:**

“Transaction processing” on page 678

### Recovery log mode

The recovery log mode for the Tivoli Storage Manager is the roll-forward mode. The recovery log stores data that is required to back up a restored database to the most recent committed transaction. You must have the most recent recovery logs to use the roll-forward mode.

Changes to the database are recorded in the recovery log to maintain a consistent database image. You can restore the server to the latest time possible, by using the active and archive log files, which are included in database backups.

To help ensure that the required log information is available for restoring the database, you can specify that the active log is mirrored to another file system location. For the best availability, locate the active log mirror on a different physical device.

### Active log

The active log stores all the transactions that have not yet been committed and always contains the most recent log records.

When all transactions that are part of an active log file complete, that log file is copied from the active log to the archive log. An active log file cannot be deleted until all transactions in the log file are either committed or discontinued. Transactions continue to be written to the active log files while the completed

active log files are copied to the archive log. If a transaction spans all the active log files, and the files are filled before the transaction is committed, the Tivoli Storage Manager server halts.

If the archive log is full and there is no failover archive log, the log files remain in the active log. If the active log then becomes full and there are in-progress transactions, the Tivoli Storage Manager server halts. If there is an archive failover log, it is used only if the archive log fills. It is important to monitor the archive log directory to ensure that there is space in the active log.

The Tivoli Storage Manager database manager can move active log files to the failover archive log. The database manager automatically manages the space that is available to the directories as database space. The database manager determines when database backups are required and automatically initiates them.

The location and size of the active log are set during initial configuration of a new or upgraded server. You can also set these values by specifying the **ACTIVELOGDIRECTORY** and the **ACTIVELOGSIZE** parameters of the **DSMSERV FORMAT** or **DSMSERV LOADFORMAT** utilities. Both the location and size can be changed later. To change the size of the active log, see “Increasing the size of the active log” on page 671. To change the location of the active log directory, see “Moving only the active log, archive log, or archive failover log” on page 677.

If there are performance issues with the active log, you can set the **LOGBUFSZ** server option in the `dsmserv.opt` file to 256 and restart the server.

**Related concepts:**

“The role of the recovery log” on page 52

### **Active log mirror**

Mirroring the active log can protect the database when a hardware failure occurs on the device where the active log is stored.

The active log mirror is an optional log, but creating it is recommended. The log provides another level of protection in addition to placing the active log on hardware that has high-availability features. If you choose to create a log mirror, place the active log directory and the log mirror directory on different physical devices. If you increase the size of the active log, the log mirror size is increased automatically.

Mirroring the log can affect performance, because of the doubled I/O activity that is required to maintain the mirror. The additional space that the log mirror requires is another factor to consider.

You can create the log mirror during initial configuration of a new or upgraded server. If you use the **DSMSERV LOADFORMAT** utility instead of the wizard to configure the server, specify the **MIRRORLOGDIRECTORY** parameter. If the log mirror directory is not created at that time, you can create it later by specifying the **MIRRORLOGDIRECTORY** option in the server options file, `dsmserv.opt`.

**Related concepts:**

“The role of the recovery log” on page 52

## Archive log

Archive log files are included in database backups and are used for rollforward recovery of the database to the current point-in-time.

To provide rollforward recovery of the database to the current point in time, all logs since the last full database backup must be available for the restore operation. These log files are stored in the archive log.

The archive log is not needed during normal processing, but it is typically needed for recovery of the database. Archived log files are saved until they are included in a full database backup. They are automatically deleted after the full database backup cycle is complete. The files must not be deleted manually.

The amount of space for the archive log is unlimited. Monitor both the active and archive logs. If the active log is close to filling, check the archive log. If the archive log is full or close to full, run one or more full database backups.

If the file systems or drives where the archive log directory and the archive failover log directory are located become full, the archived logs are stored in the active log directory. Those archived logs are returned to the archive log directory when the space problem is resolved, or when a full database backup is run.

You set the location of the archive log directory during initial configuration of a new or upgraded server. You can also specify the **ARCHLOGDIRECTORY** parameter of the **DSMSERV FORMAT** or **DSMSERV LOADFORMAT** utility. The location of the log can be changed at a later time.

### Related concepts:

“The role of the recovery log” on page 52

“Active and archive log space” on page 645

### Related tasks:

“Moving only the active log, archive log, or archive failover log” on page 677

## Archive failover log

The archive failover log can prevent problems that occur if the archive log runs out of space. Creating this log is optional, but highly recommended.

If you choose to create an archive failover log, place the archive log directory and the archive failover log directory on different physical drives. You can specify the location of the failover log directory during initial configuration of a new or upgraded server. You can also specify its location with the **ARCHFAILOVERLOGDIRECTORY** parameter of the **DSMSERV FORMAT** or **DSMSERV LOADFORMAT** utility. If it is not created through the utilities, it can be created later by specifying the **ARCHFAILOVERLOGDIRECTORY** option in the server options file, `dsmserv.opt`. See “Adding optional logs after server initialization” on page 673 for details.

For information about the space that is required for the log, see “Archive failover log space” on page 658.

### Related concepts:

“The role of the recovery log” on page 52

---

## Capacity planning

Capacity planning for Tivoli Storage Manager includes managing resources such as the database and recovery log. To maximize resources as part of capacity planning, you must estimate space requirements for the database and the recovery log.

### Procedure

For information about the benefits of deduplication and guidance on how to make effective use of the Tivoli Storage Manager deduplication feature, see *Optimizing Performance*.

## Estimating database space requirements

To estimate space requirements for the database, you can use the maximum number of files that can be in server storage at one time or you can use storage pool capacity.

### About this task

Consider using at least 25 GB for the initial database space. Provision file system space appropriately. A database size of 25 GB is adequate for a test environment or a library-manager-only environment. For a production server supporting client workloads, the database size is expected to be larger. If you use random-access disk (DISK) storage pools, more database and log storage space is needed than for sequential-access storage pools.

The maximum size of the Tivoli Storage Manager database is 4 TB.

For information about sizing the database in a production environment that is based on the number of files and on storage pool size, see the following topics.

### Estimating database space requirements based on the number of files

If you can estimate the maximum number of files that might be in server storage at a time, you can use that number to estimate space requirements for the database.

### About this task

To estimate space requirements that is based on the maximum number of files in server storage, use the following guidelines:

- 600 - 1000 bytes for each stored version of a file, including image backups.

**Restriction:** The guideline does not include space that is used during data deduplication.

- 100 - 200 bytes for each cached file, copy storage pool file, active-data pool file, and deduplicated file.
- Additional space is required for database optimization to support varying data-access patterns and to support server back-end processing of the data. The amount of extra space is equal to 50% of the estimate for the total number of bytes for file objects.

In the following example for a single client, the calculations are based on the maximum values in the preceding guidelines. The examples do not take into account that you might use file aggregation. In general, when you aggregate small

files, it reduces the amount of required database space. File aggregation does not affect space-managed files.

## Procedure

1. Calculate the number of file versions. Add each of the following values to obtain the number of file versions:
  - a. Calculate the number of backed-up files. For example, as many as 500,000 client files might be backed up at a time. In this example, storage policies are set to keep up to three copies of backed up files:  
$$500,000 \text{ files} * 3 \text{ copies} = 1,500,000 \text{ files}$$
  - b. Calculate the number of archive files. For example, as many as 100,000 client files might be archived copies.
  - c. Calculate the number of space-managed files. For example, as many as 200,000 client files might be migrated from client workstations.

Using 1000 bytes per file, the total amount of database space that is required for the files that belong to the client is 1.8 GB:

$$(1,500,000 + 100,000 + 200,000) * 1000 = 1.8 \text{ GB}$$

2. Calculate the number of cached files, copy storage-pool files, active-data pool files, and deduplicated files:
  - a. Calculate the number of cached copies. For example, caching is enabled in a 5 GB disk storage pool. The high migration threshold of the pool is 90% and the low migration threshold of the pool is 70%. Thus, 20% of the disk pool, or 1 GB, is occupied by cached files.  
If the average file size is about 10 KB, approximately 100,000 files are in cache at any one time:  
$$100,000 \text{ files} * 200 \text{ bytes} = 19 \text{ MB}$$
  - b. Calculate the number of copy storage-pool files. All primary storage pools are backed up to the copy storage pool:  
$$(1,500,000 + 100,000 + 200,000) * 200 \text{ bytes} = 343 \text{ MB}$$
  - c. Calculate the number of active storage-pool files. All the active client-backup data in primary storage pools is copied to the active-data storage pool. Assume that 500,000 versions of the 1,500,000 backup files in the primary storage pool are active:  
$$500,000 * 200 \text{ bytes} = 95 \text{ MB}$$
  - d. Calculate the number of deduplicated files. Assume that a deduplicated storage pool contains 50,000 files:  
$$50,000 * 200 \text{ bytes} = 10 \text{ MB}$$

Based on the preceding calculations, about 0.5 GB of extra database space is required for the client's cached files, copy storage-pool files, active-data pool files, and deduplicated files.

3. Calculate the amount of extra space that is required for database optimization. To provide optimal data access and management by the server, extra database space is required. The amount of extra database space is equal to 50% of the total space requirements for file objects.  
$$(1.8 + 0.5) * 50\% = 1.2 \text{ GB}$$
4. Calculate the total amount of database space that is required for the client. The total is approximately 3.5 GB:  
$$1.8 + 0.5 + 1.2 = 3.5 \text{ GB}$$
5. Calculate the total amount of database space that is required for all clients. If the client that was used in the preceding calculations is typical and you have



500 clients, for example, you can use the following calculation to estimate the total amount of database space that is required for all clients:

$$500 * 3.5 = 1.7 \text{ TB}$$

## Results

**Tip:** In the preceding examples, the results are estimates. The actual size of the database might differ from the estimate because of factors such as the number of directories and the length of the path and file names. Periodically monitor your database and adjust its size as necessary.

## What to do next

During normal operations, the Tivoli Storage Manager server might require temporary database space. This space is needed for the following reasons:

- To hold the results of sorting or ordering that are not already being kept and optimized in the database directly. The results are temporarily held in the database for processing.
- To give administrative access to the database through one of the following methods:
  - A DB2 open database connectivity (ODBC) client
  - An Oracle Java database connectivity (JDBC) client
  - Structured Query Language (SQL) to the server from an administrative-client command line

Consider using an extra 50 GB of temporary space for every 500 GB of space for file objects and optimization. See the guidelines in the following table. In the example that is used in the preceding step, a total of 1.7 TB of database space is required for file objects and optimization for 500 clients. Based on that calculation, 200 GB is required for temporary space. The total amount of required database space is 1.9 TB.

| Database size       | Minimum temporary-space requirement |
|---------------------|-------------------------------------|
| < 500 GB            | 50 GB                               |
| ≥ 500 GB and < 1 TB | 100 GB                              |
| ≥ 1 TB and < 1.5 TB | 150 GB                              |
| ≥ 1.5 and < 2 TB    | 200 GB                              |
| ≥ 2 and < 3 TB      | 250 - 300 GB                        |
| ≥ 3 and < 4 TB      | 350 - 400 GB                        |

## Estimating database space requirements based on storage pool capacity

To estimate database space requirements based on storage pool capacity, use a ratio of 1 - 5%. For example, if you require 200 TB of storage pool capacity, the size of your database is expected to be 2 - 10 TB. As a general rule, make your database as large as possible to prevent running out of space. If you run out of database space, server operations and client-store operations can fail.



## Database space required when running database operations

The database manager of the Tivoli Storage Manager server manages and allocates system memory and disk space for the database. The amount of database space that the system requires depends on the amount of system memory that is available and the server workload.

For example, expiration processing can use a large amount of database space. If there is not enough system memory in the database to store the files identified for expiration, some of the data is allocated to temporary disk space. During expiration processing, if a node or file space is selected that is too large to process, the database manager cannot sort the data.

To run database operations, consider adding more database space for the following scenarios:

- The database has a small amount of space and the server operation that requires temporary space uses the remaining free space.
- The file spaces are large, or the file spaces have a policy assigned to it that creates many file versions.
- The Tivoli Storage Manager server must run with limited memory.
- An out of database space error is displayed when you deploy a Tivoli Storage Manager V6 server.

**Attention:** Do not install or upgrade to a different version, release, or fix pack of DB2 software because doing so can damage the database.

## The database manager and temporary space

The Tivoli Storage Manager server database manager manages and allocates system memory and disk space for the database. The amount of database space you require depends on the amount of system memory available and the server workload.

The database manager sorts data in a specific sequence, according to the SQL statement that you issue to request the data. Depending on the workload on the server, and if there is more data than the database manager can manage, the data (that is ordered in sequence) is allocated to temporary disk space. Data is allocated to temporary disk space when there is a large result set. The database manager dynamically manages the memory that is used when data is allocated to temporary disk space.

For example, expiration processing can produce a large result set. If there is not enough system memory on the database to store the result set, some of the data is allocated to temporary disk space. During expiration processing, if a node or file space are selected that are too large to process, the database manager cannot sort the data in memory. The database manager must use temporary space to sort data.

To run database operations, consider adding more database space for the following scenarios:

- The database has a small amount of space and the server operation that requires temporary space uses the remaining free space.
- The file spaces are large, or the file spaces has a policy that is assigned to it, which creates many file versions.
- The Tivoli Storage Manager server must run with limited memory. The database uses the Tivoli Storage Manager server main memory to run database operations. However, if there is insufficient memory available, the Tivoli Storage

Manager server allocates temporary space on disk to the database. For example, if 10G of memory is available and database operations require 12G of memory, the database uses temporary space.

- An out of database space error is displayed when you deploy a Tivoli Storage Manager V6 server. Monitor the server activity log for messages that are related to database space.

**Important:** Do not change the DB2 software that is installed with the Tivoli Storage Manager installation packages and fix packs. Do not install or upgrade to a different version, release, or fix pack, of DB2 software to avoid damage to the database.

## Estimating recovery log space requirements

In Tivoli Storage Manager, the term *recovery log* comprises the active log, the archive log, the active log mirror, and the archive failover log. The amount of space that you require for the recovery log depends on various factors, including, for example, the amount of client activity with the server.

### Active and archive log space

When you estimate space requirements for active and archive logs, include some extra space for contingencies such as occasional heavy workloads and failovers.

In Tivoli Storage Manager servers V6.1 and later, the active log can be a maximum size of 128 GB. The archive log size is limited to the size of the file system that it is installed on.

Use the following general guidelines when you estimate the size of the active log:

- The suggested starting size for the active log is 16 GB.
- Ensure that the active log is at least large enough for the amount of concurrent activity that the server typically handles. As a precaution, try to anticipate the largest amount of work that the server manages at one time. Provision the active log with extra space that can be used if needed. Consider using 20% of extra space.
- Monitor used and available active log space. Adjust the size of the active log as needed, depending upon factors such as client activity and the level of server operations.
- Ensure that the directory that holds the active log is as large as, or larger than, the size of the active log. A directory that is larger than the active log can accommodate failovers, if they occur.
- Ensure that the file system that contains the active log directory has at least 8 GB of free space for temporary log movement requirements.

The suggested starting size for the archive log is 48 GB.

The archive log directory must be large enough to contain the log files that are generated since the previous full backup. For example, if you perform a full backup of the database every day, the archive log directory must be large enough to hold the log files for all the client activity that occurs during 24 hours. To recover space, the server deletes obsolete archive log files after a full backup of the database. If the archive log directory becomes full and a directory for archive failover logs does not exist, log files remain in the active log directory. This condition can cause the active log directory to fill up and stop the server. When the server restarts, some of the existing active-log space is released.

After the server is installed, you can monitor archive log utilization and the space in the archive log directory. If the space in the archive log directory fills up, it can cause the following problems:

- The server is unable to perform full database backups. Investigate and resolve this problem.
- Other applications write to the archive log directory, exhausting the space that is required by the archive log. Do not share archive log space with other applications including other Tivoli Storage Manager servers. Ensure that each server has a separate storage location that is owned and managed by that specific server.

For guidance about the layout and tuning of the active log and archive log, see *Optimizing Performance*.

**Related tasks:**

“Increasing the size of the active log” on page 671

**Example: Estimating active and archive log sizes for basic client-store operations:**

Basic client-store operations include backup, archive, and space management. Log space must be sufficient to handle all store transactions that are in progress at one time.

To determine the sizes of the active and archive logs for basic client-store operations, use the following calculation:

number of clients x files stored during each transaction  
x log space needed for each file

This calculation is used in the example in the following table.

*Table 56. Basic client-store operations*

| Item                                                                                            | Example values | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum number of client nodes that back up, archive, or migrate files concurrently at any time | 300            | The number of client nodes that back up, archive, or migrate files every night.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Files stored during each transaction                                                            | 4096           | The default value of the server option TXNGROUPMAX is 4096.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Log space that is required for each file                                                        | 3053 bytes     | <p>The value of 3053 bytes for each file in a transaction represents the log bytes that are needed when backing up files from a Windows client where the file names are 12 - 120 bytes.</p> <p>This value is based on the results of tests performed under laboratory conditions. The tests consisted of backup-archive clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than 3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.</p> |

Table 56. Basic client-store operations (continued)

| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Example values       | Description                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Active log: Suggested size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 19.5 GB <sup>1</sup> | <p>Use the following calculation to determine the size of the active log. One GB equals 1,073,741,824 bytes.</p> <p>(300 clients x 4096 files stored during each transaction x 3053 bytes for each file) ÷ 1,073,741,824 bytes = 3.5 GB</p> <p>Increase that amount by the suggested starting size of 16 GB:</p> <p>3.5 + 16 = 19.5 GB</p> |
| Archive log: Suggested size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 58.5 GB <sup>1</sup> | <p>Because of the requirement to be able to store archive logs across three server database-backup cycles, multiply the estimate for the active log by 3 to estimate the total archive log requirement.</p> <p>3.5 x 3 = 10.5 GB</p> <p>Increase that amount by the suggested starting size of 48 GB:</p> <p>10.5 + 48 = 58.5 GB</p>       |
| <p><sup>1</sup> The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.</p> <p>Monitor your logs and adjust their size if necessary.</p> |                      |                                                                                                                                                                                                                                                                                                                                            |

**Example: Estimating active and archive log sizes for clients that use multiple sessions:**

If the client option RESOURCEUTILIZATION is set to a value that is greater than the default, the concurrent workload for the server increases.

To determine the sizes of the active and archive logs when clients use multiple sessions, use the following calculation:

number of clients x sessions for each client x files stored  
during each transaction x log space needed for each file

This calculation is used in the example in the following table.

Table 57. Multiple client sessions

| Item                                                                                            | Example values |      | Description                                                                                                                                        |
|-------------------------------------------------------------------------------------------------|----------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum number of client nodes that back up, archive, or migrate files concurrently at any time | 300            | 1000 | The number of client nodes that back up, archive, or migrate files every night.                                                                    |
| Possible sessions for each client                                                               | 3              | 3    | The setting of the client option RESOURCEUTILIZATION is larger than the default. Each client session runs a maximum of three sessions in parallel. |

Table 57. Multiple client sessions (continued)

| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Example values       |                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Files stored during each transaction                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4096                 | 4096                | The default value of the server option TXNGROUPMAX is 4096.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Log space that is required for each file                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 3053                 | 3053                | <p>The value of 3053 bytes for each file in a transaction represents the log bytes needed when backing up files from a Windows client where the file names are 12 - 120 bytes.</p> <p>This value is based on the results of tests performed under laboratory conditions. Tests consisted of clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than 3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.</p>                                                                                                               |
| Active log: Suggested size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 26.5 GB <sup>1</sup> | 51 GB <sup>1</sup>  | <p>The following calculation was used for 300 clients. One GB equals 1,073,741,824 bytes.</p> <p>(300 clients x 3 sessions for each client x 4096 files stored during each transaction x 3053 bytes for each file) ÷ 1,073,741,824 = 10.5 GB</p> <p>Increase that amount by the suggested starting size of 16 GB:</p> <p>10.5 + 16 = 26.5 GB</p> <p>The following calculation was used for 1000 clients. One GB equals 1,073,741,824 bytes.</p> <p>(1000 clients x 3 sessions for each client x 4096 files store during each transaction x 3053 bytes for each file) ÷ 1,073,741,824 = 35 GB</p> <p>Increase that amount by the suggested starting size of 16 GB:</p> <p>35 + 16 = 51 GB</p> |
| Archive log: Suggested size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 79.5 GB <sup>1</sup> | 153 GB <sup>1</sup> | <p>Because of the requirement to be able to store archive logs across three server-database backup cycles, the estimate for the active log is multiplied by 3:</p> <p>10.5 x 3 = 31.5 GB</p> <p>35 x 3 = 105 GB</p> <p>Increase those amounts by the suggested starting size of 48 GB:</p> <p>31.5 + 48 = 79.5 GB</p> <p>105 + 48 = 153 GB</p>                                                                                                                                                                                                                                                                                                                                               |
| <p><sup>1</sup> The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.</p> <p>Monitor your active log and adjust its size if necessary.</p> |                      |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

**Example: Estimating active and archive log sizes for simultaneous write operations:**

If client backup operations use storage pools that are configured for simultaneous write, the amount of log space that is required for each file increases.

The log space that is required for each file increases by about 200 bytes for each copy storage pool that is used for a simultaneous write operation. In the example in the following table, data is stored to two copy storage pools in addition to a primary storage pool. The estimated log size increases by 400 bytes for each file. If you use the suggested value of 3053 bytes of log space for each file, the total number of required bytes is 3453.

This calculation is used in the example in the following table.

*Table 58. Simultaneous write operations*

| Item                                                                                            | Example values     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum number of client nodes that back up, archive, or migrate files concurrently at any time | 300                | The number of client nodes that back up, archive, or migrate files every night.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Files stored during each transaction                                                            | 4096               | The default value of the server option TXNGROUPMAX is 4096.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Log space that is required for each file                                                        | 3453 bytes         | <p>3053 bytes plus 200 bytes for each copy storage pool.</p> <p>The value of 3053 bytes for each file in a transaction represents the log bytes that are needed when backing up files from a Windows client where the file names are 12 - 120 bytes.</p> <p>This value is based on the results of tests performed under laboratory conditions. The tests consisted of backup-archive clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than 3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.</p> |
| Active log: Suggested size                                                                      | 20 GB <sup>1</sup> | <p>Use the following calculation to determine the size of the active log. One GB equals 1,073,741,824 bytes.</p> <p><math>(300 \text{ clients} \times 4096 \text{ files stored during each transaction} \times 3453 \text{ bytes for each file}) \div 1,073,741,824 \text{ bytes} = 4.0 \text{ GB}</math></p> <p>Increase that amount by the suggested starting size of 16 GB:</p> <p><math>4 + 16 = 20 \text{ GB}</math></p>                                                                                                                                                                                                                                           |
| Archive log: Suggested size                                                                     | 60 GB <sup>1</sup> | <p>Because of the requirement to be able to store archive logs across three server database-backup cycles, multiply the estimate for the active log by 3 to estimate the archive log requirement:</p> <p><math>4 \text{ GB} \times 3 = 12 \text{ GB}</math></p> <p>Increase that amount by the suggested starting size of 48 GB:</p> <p><math>12 + 48 = 60 \text{ GB}</math></p>                                                                                                                                                                                                                                                                                        |

Table 58. Simultaneous write operations (continued)

| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Example values | Description |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------|
| <sup>1</sup> The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.<br><br>Monitor your logs and adjust their size if necessary. |                |             |

**Example: Estimating active and archive log sizes for basic client store operations and server operations:**

Migration of data in server storage, identification processes for data deduplication, reclamation, and expiration might run concurrently with client store operations. Administrative tasks such as administrative commands or SQL queries from administrative clients can also run concurrently with client store operations. Server operations and administrative tasks that run concurrently can increase the active log space that is required.

For example, migration of files from the random-access (DISK) storage pool to a sequential-access disk (FILE) storage pool uses approximately 110 bytes of log space for each file that is migrated. For example, suppose that you have 300 backup-archive clients and each one of them backs up 100,000 files every night. The files are initially stored on DISK and then migrated to a FILE storage pool. To estimate the amount of active log space that is required for the data migration, use the following calculation. The number of clients in the calculation represents the maximum number of client nodes that back up, archive, or migrate files concurrently at any time.

300 clients x 100,000 files for each client x 110 bytes = 3.1 GB

Add this value to the estimate for the size of the active log that calculated for basic client store operations.

**Example: Estimating active and archive log sizes under conditions of extreme variation:**

Problems with running out of active log space can occur if you have many transactions that complete quickly and some transactions that take much longer to complete. A typical case occurs when many workstation or file-server backup sessions are active and a few very large database server-backup sessions are active. If this situation applies to your environment, you might need to increase the size of the active log so that the work completes successfully.



### Example: Estimating archive log sizes with full database backups:

The Tivoli Storage Manager server deletes unnecessary files from the archive log only when a full database backup occurs. Consequently, when you estimate the space that is required for the archive log, you must also consider the frequency of full database backups.

For example, if a full database backup occurs once a week, the archive log space must be able to contain the information in the archive log for a full week.

The difference in archive log size for daily and full database backups is shown in the example in the following table.

Table 59. Full database backups

| Item                                                                                            | Example values     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum number of client nodes that back up, archive, or migrate files concurrently at any time | 300                | The number of client nodes that back up, archive, or migrate files every night.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Files stored during each transaction                                                            | 4096               | The default value of the server option TXNGROUPMAX is 4096.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Log space that is required for each file                                                        | 3453 bytes         | <p>3053 bytes for each file plus 200 bytes for each copy storage pool.</p> <p>The value of 3053 bytes for each file in a transaction represents the log bytes needed when backing up files from a Windows client where the file names are 12 - 120 bytes.</p> <p>This value is based on the results of tests performed under laboratory conditions. Tests consisted of clients performing backup operations to a random-access disk (DISK) storage pool. DISK pools result in more log use than sequential-access storage pools. Consider a value larger than 3053 bytes if the data being stored has file names that are longer than 12 - 120 bytes.</p> |
| Active log: Suggested size                                                                      | 20 GB <sup>1</sup> | <p>Use the following calculation to determine the size of the active log. One GB equals 1,073,741,824 bytes.</p> <p><math>(300 \text{ clients} \times 4096 \text{ files per transaction} \times 3453 \text{ bytes per file}) \div 1,073,741,824 \text{ bytes} = 4.0 \text{ GB}</math></p> <p>Increase that amount by the suggested starting size of 16 GB:</p> <p><math>4 + 16 = 20 \text{ GB}</math></p>                                                                                                                                                                                                                                                 |
| Archive log: Suggested size with a full database backup every day                               | 60 GB <sup>1</sup> | <p>Because of the requirement to be able to store archive logs across three backup cycles, multiply the estimate for the active log by 3 to estimate the total archive log requirement:</p> <p><math>4 \text{ GB} \times 3 = 12 \text{ GB}</math></p> <p>Increase that amount by the suggested starting size of 48 GB:</p> <p><math>12 + 48 = 60 \text{ GB}</math></p>                                                                                                                                                                                                                                                                                    |



Table 59. Full database backups (continued)

| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Example values      | Description                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Archive log: Suggested size with a full database every week                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 132 GB <sup>1</sup> | <p>Because of the requirement to be able to store archive logs across three server database-backup cycles, multiply the estimate for the active log by 3 to estimate the total archive log requirement. Multiply the result by the number of days between full database backups:</p> $(4 \text{ GB} \times 3) \times 7 = 84 \text{ GB}$ <p>Increase that amount by the suggested starting size of 48 GB:</p> $84 + 48 = 132 \text{ GB}$ |
| <p><sup>1</sup> The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that does not use deduplication, 16 GB is the suggested minimum size for an active log. The suggested starting size for an archive log in a production environment that does not use deduplication is 48 GB. If you substitute values from your environment and the results are larger than 16 GB and 48 GB, use your results to size the active log and archive log.</p> <p>Monitor your logs and adjust their size if necessary.</p> |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                         |

#### Example: Estimating active and archive log sizes for data deduplication operations:

If you deduplicate data, you must consider its effects on space requirements for active and archive logs.

The following factors affect requirements for active and archive log space:

##### The amount of deduplicated data

The effect of data deduplication on the active log and archive log space depends on the percentage of data that is eligible for deduplication. If the percentage of data that can be deduplicated is relatively high, more log space is required.

##### The size and number of extents

Approximately 1,500 bytes of active log space are required for each extent that is identified by a duplicate-identification process. For example, if 250,000 extents are identified by a duplicate-identification process, the estimated size of the active log is 358 MB:

250,000 extents identified during each process x 1,500 bytes  
for each extent = 358 MB

Consider the following scenario. Three hundred backup-archive clients back up 100,000 files each night. This activity creates a workload of 30,000,000 files. The average number of extents for each file is two. Therefore, the total number of extents is 60,000,000, and the space requirement for the archive log is 84 GB:

60,000,000 extents x 1,500 bytes for each extent = 84 GB

A duplicate-identification process operates on aggregates of files. An aggregate consists of files that are stored in a given transaction, as specified by the TXNGROUPMAX server option. Suppose that the TXNGROUPMAX server option is set to the default of 4096. If the average number of extents for each file is two, the total number of extents in each aggregate is 8192, and the space required for the active log is 12 MB:

8192 extents in each aggregate x 1500 bytes for each extent =  
12 MB

### The timing and number of the duplicate-identification processes

The timing and number of duplicate-identification processes also affects the size of the active log. Using the 12 MB active-log size that was calculated in the preceding example, the concurrent load on the active log is 120 MB if 10 duplicate-identification processes are running in parallel:

12 MB for each process x 10 processes = 120 MB

### File size

Large files that are processed for duplicate identification can also affect the size of the active log. For example, suppose that a backup-archive client backs up an 80 GB, file-system image. This object can have a high number of duplicate extents if, for example, the files included in the file system image were backed up incrementally. For example, assume that a file system image has 1.2 million duplicate extents. The 1.2 million extents in this large file represent a single transaction for a duplicate-identification process. The total space in the active log that is required for this single object is 1.7 GB:

1,200,000 extents x 1,500 bytes for each extent = 1.7 GB

If other, smaller duplicate-identification processes occur at the same time as the duplicate-identification process for a single large object, the active log might not have enough space. For example, suppose that a storage pool is enabled for deduplication. The storage pool has a mixture of data, including many relatively small files that range from 10 KB to several hundred KB. The storage pool also has few large objects that have a high percentage of duplicate extents.

To take into account not only space requirements but also the timing and duration of concurrent transactions, increase the estimated size of the active log by a factor of two. For example, suppose that your calculations for space requirements are 25 GB (23.3 GB + 1.7 GB for deduplication of a large object). If deduplication processes are running concurrently, the suggested size of the active log is 50 GB. The suggested size of the archive log is 150 GB.

The examples in the following tables show calculations for active and archive logs. The example in the first table uses an average size of 700 KB for extents. The example in the second table uses an average size of 256 KB. As the examples show, the average deduplicate-extent size of 256 KB indicates a larger estimated size for the active log. To minimize or prevent operational problems for the server, use 256 KB to estimate the size of the active log in your production environment.

Table 60. Average duplicate-extent size of 700 KB

| Item                                         | Example values |        | Description                                                                                                                                                                                                                 |
|----------------------------------------------|----------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size of largest single object to deduplicate | 800 GB         | 4 TB   | The granularity of processing for deduplication is at the file level. Therefore, the largest single file to deduplicate represents the largest transaction and a correspondingly large load on the active and archive logs. |
| Average size of extents                      | 700 KB         | 700 KB | The deduplication algorithms use a variable block method. Not all deduplicated extents for a given file are the same size, so this calculation assumes an average size for extents.                                         |

Table 60. Average duplicate-extent size of 700 KB (continued)

| Item                                                                                                                                        | Example values      |                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Extents for a given file                                                                                                                    | 1,198,372 bits      | 6,135,667 bits        | <p>Using the average extent size (700 KB), these calculations represent the total number of extents for a given object.</p> <p>The following calculation was used for an 800 GB object:<br/> <math>(800 \text{ GB} \div 700 \text{ KB}) = 1,198,372 \text{ bits}</math></p> <p>The following calculation was used for a 4 TB object: <math>(4 \text{ TB} \div 700 \text{ KB}) = 6,135,667 \text{ bits}</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Active log: Suggested size that is required for the deduplication of a single large object during a single duplicate-identification process | 1.7 GB              | 8.6 GB                | The estimated active log space that are needed for this transaction.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Active log: Suggested total size                                                                                                            | 66 GB <sup>1</sup>  | 79.8 GB <sup>1</sup>  | <p>After considering other aspects of the workload on the server in addition to deduplication, multiply the existing estimate by a factor of two. In these examples, the active log space required to deduplicate a single large object is considered along with previous estimates for the required active log size.</p> <p>The following calculation was used for multiple transactions and an 800 GB object:</p> $(23.3 \text{ GB} + 1.7 \text{ GB}) \times 2 = 50 \text{ GB}$ <p>Increase that amount by the suggested starting size of 16 GB:</p> $50 + 16 = 66 \text{ GB}$ <p>The following calculation was used for multiple transactions and a 4 TB object:</p> $(23.3 \text{ GB} + 8.6 \text{ GB}) \times 2 = 63.8 \text{ GB}$ <p>Increase that amount by the suggested starting size of 16 GB:</p> $63.8 + 16 = 79.8 \text{ GB}$ |
| Archive log: Suggested size                                                                                                                 | 198 GB <sup>1</sup> | 239.4 GB <sup>1</sup> | <p>Multiply the estimated size of the active log by a factor of 3.</p> <p>The following calculation was used for multiple transactions and an 800 GB object:</p> $50 \text{ GB} \times 3 = 150 \text{ GB}$ <p>Increase that amount by the suggested starting size of 48 GB:</p> $150 + 48 = 198 \text{ GB}$ <p>The following calculation was used for multiple transactions and a 4 TB object:</p> $63.8 \text{ GB} \times 3 = 191.4 \text{ GB}$ <p>Increase that amount by the suggested starting size of 48 GB:</p> $191.4 + 48 = 239.4 \text{ GB}$                                                                                                                                                                                                                                                                                      |

Table 60. Average duplicate-extent size of 700 KB (continued)

| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Example values | Description |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------|
| <p><sup>1</sup> The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that uses deduplication, 32 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that uses deduplication is 96 GB. If you substitute values from your environment and the results are larger than 32 GB and 96 GB, use your results to size the active log and archive log.</p> <p>Monitor your logs and adjust their size if necessary.</p> |                |             |

Table 61. Average duplicate-extent size of 256 KB

| Item                                                                                                                                        | Example values |                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size of largest single object to deduplicate                                                                                                | 800 GB         | 4 TB            | The granularity of processing for deduplication is at the file level. Therefore, the largest single file to deduplicate represents the largest transaction and a correspondingly large load on the active and archive logs.                                                                                                                                                                                                        |
| Average size of extents                                                                                                                     | 256 KB         | 256 KB          | The deduplication algorithms use a variable block method. Not all deduplicated extents for a given file are the same size, so this calculation assumes an average extent size.                                                                                                                                                                                                                                                     |
| Extents for a given file                                                                                                                    | 3,276,800 bits | 16,777,216 bits | <p>Using the average extent size, these calculations represent the total number of extents for a given object.</p> <p>The following calculation was used for multiple transactions and an 800 GB object:</p> $(800 \text{ GB} \div 256 \text{ KB}) = 3,276,800 \text{ bits}$ <p>The following calculation was used for multiple transactions and a 4 TB object:</p> $(4 \text{ TB} \div 256 \text{ KB}) = 16,777,216 \text{ bits}$ |
| Active log: Suggested size that is required for the deduplication of a single large object during a single duplicate-identification process | 4.5 GB         | 23.4 GB         | The estimated size of the active log space that is required for this transaction.                                                                                                                                                                                                                                                                                                                                                  |

Table 61. Average duplicate-extent size of 256 KB (continued)

| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Example values        |                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Active log: Suggested total size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 71.6 GB <sup>1</sup>  | 109.4 GB <sup>1</sup> | <p>After considering other aspects of the workload on the server in addition to deduplication, multiply the existing estimate by a factor of 2. In these examples, the active log space required to deduplicate a single large object is considered along with previous estimates for the required active log size.</p> <p>The following calculation was used for multiple transactions and an 800 GB object:</p> $(23.3 \text{ GB} + 4.5 \text{ GB}) \times 2 = 55.6 \text{ GB}$ <p>Increase that amount by the suggested starting size of 16 GB:</p> $55.6 + 16 = 71.6 \text{ GB}$ <p>The following calculation was used for multiple transactions and a 4 TB object:</p> $(23.3 \text{ GB} + 23.4 \text{ GB}) \times 2 = 93.4 \text{ GB}$ <p>Increase that amount by the suggested starting size of 16 GB:</p> $93.4 + 16 = 109.4 \text{ GB}$ |
| Archive log: Suggested size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 214.8 GB <sup>1</sup> | 328.2 GB <sup>1</sup> | <p>The estimated size of the active log multiplied by a factor of 3.</p> <p>The following calculation was used for an 800 GB object:</p> $55.6 \text{ GB} \times 3 = 166.8 \text{ GB}$ <p>Increase that amount by the suggested starting size of 48 GB:</p> $166.8 + 48 = 214.8 \text{ GB}$ <p>The following calculation was used for a 4 TB object:</p> $93.4 \text{ GB} \times 3 = 280.2 \text{ GB}$ <p>Increase that amount by the suggested starting size of 48 GB:</p> $280.2 + 48 = 328.2 \text{ GB}$                                                                                                                                                                                                                                                                                                                                      |
| <p><sup>1</sup> The example values in this table are used only to illustrate how the sizes for active logs and archive logs are calculated. In a production environment that uses deduplication, 32 GB is the suggested minimum size for an active log. The suggested minimum size for an archive log in a production environment that uses deduplication is 96 GB. If you substitute values from your environment and the results are larger than 32 GB and 96 GB, use your results to size the active log and archive log.</p> <p>Monitor your logs and adjust their size if necessary.</p> |                       |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## Archive log space for online database reorganization

Tivoli Storage Manager manages table and index reorganization. The Tivoli Storage Manager server requires additional archive log space if an online table must be reorganized.

The Tivoli Storage Manager logs reorganization activity. No information is lost if there is a database error that requires crash recovery.

The space required for an online table reorganization is determined by the following factors:

- The number of rows to be reorganized
- The number of indexes
- The size of the index keys
- The current organization of the table

Typically, every row in a table is moved twice during an online table reorganization. For each index, each table row must update the index key to reflect the new location. After all accesses to the old location are complete, the index key is updated again to remove references to the old location. When the row is moved back, updates to the index key are performed again. This activity is logged to make online table reorganization fully recoverable. There is a minimum of two data log records (each including the row data) and four index log records (each including the key data) for each row (assuming one index).

Clustering indexes are prone to filling up the index pages, causing index splits and merges that must also be logged. A number of the tables implemented by the server have more than one index. A table that has four indexes would require 16 index log records for each row that is moved for the reorganization.

The server monitors characteristics of the database, the active log, and the archive log to determine if a database backup is needed. For example, during an online table reorganization, if the file system for the archive log space begins to fill up, the server triggers a database backup. When a database backup is started, any online table reorganization in progress is paused so that the database backup can operate without contending for resources with the reorganization.

## Active log mirror space

The active log can be mirrored so that the mirrored copy can be used if the active log files cannot be read. There can be only one active log mirror.

Creating a log mirror is a suggested option. If you increase the size of the active log, the log mirror size is increased automatically. Mirroring the log can affect performance because of the doubled I/O activity that is required to maintain the mirror. The additional space that the log mirror requires is another factor to consider when deciding whether to create a log mirror.

If the mirror log directory becomes full, the server issues error messages to the activity log and to the `db2diag.log`. Server activity continues.

## Archive failover log space

The archive failover log is used by the server if the archive log directory runs out of space.

Specifying an archive failover log directory is optional, but it can prevent problems that occur if the archive log runs out of space. If both the archive log directory and the drive or file system where the archive failover log directory is located become full, the data remains in the active log directory. This condition can cause the active log to fill up, which causes the server to halt. If you use an archive failover log directory, place the archive log directory and the archive failover log directory on different physical drives.

**Important:** Maintain adequate space for the archive log directory, and consider using an archive failover log directory. For example, suppose the drive or file system where the archive log directory is located becomes full and the archive failover log directory does not exist or is full. If this situation occurs, the log files that are ready to be moved to the archive log remain in the active log directory. If the active log becomes full, the server stops.

By monitoring the usage of the archive failover log, you can determine whether additional space is needed for the archive log. The goal is to minimize the need to use the archive failover log by ensuring that the archive log has adequate space.

The locations of the archive log and the archive failover log are set during initial configuration. If you use the **DSMSERV LOADFORMAT** utility instead of the wizard to configure the server, you specify the **ARCHLOGDIRECTORY** parameter for the archive log directory. In addition, you specify the **ARCHFAILOVERLOGDIRECTORY** parameter for the archive failover log directory. If the archive failover log is not created at initial configuration, you can create it by specifying the **ARCHFAILOVERLOGDIRECTORY** option in the server options file.

## Disk space requirements for the server database and recovery log

The drives or file systems on which you locate the database and log directories are important to the proper operation of your IBM Tivoli Storage Manager server. Placing each database and recovery log directory on a separate disk provides the best performance and the best disaster protection.

For the optimal database performance, choose the fastest and most reliable disks that are configured for random access I/O, such as Redundant Array of Independent Disks (RAID) hardware. The internal disks included by default in most servers and consumer grade Parallel Advanced Technology Attachment (PATA) disks and Serial Advanced Technology Attachment (SATA) disks are too slow.

To maintain database integrity, ensure that the storage hardware can withstand failures such as power outages and controller failure. You can improve database performance by using hardware that provides a fast, nonvolatile write cache for both the database and logs. Put the database directories on fault tolerant storage with high-availability features.

It is best to use multiple directories for the database, with four to eight directories for a large Tivoli Storage Manager database. Locate each database directory on a disk volume that uses separate physical disks from other database directories. The Tivoli Storage Manager server database I/O workload is spread over all



directories, thus increasing the read and write I/O performance. Having many small capacity physical disks is better than having a few large capacity physical disks with the same rotation speed.

Locate the active log, mirror log, and archive log directories also on high-speed, reliable disks. The failover archive log can be on slower disks, assuming that the archive log is sufficiently large and that the failover log is used infrequently.

The access pattern for the active log is always sequential. Physical placement on the disk is important. It is best to isolate the active log from the database and from the disk storage pools. If they cannot be isolated, then place the active log with storage pools and not with the database.

Enable read cache for the database and recovery log, and enable write cache if the disk subsystems support it.

**Restriction:** You cannot use raw logical volumes for the database. To reuse space on the disk where raw logical volumes were located for an earlier version of the server, create file systems on the disk first.

## Monitoring space utilization for the database and recovery logs

To determine the amount of used and available active log space, you issue the **QUERY LOG** command. To monitor space utilization in the database and recovery logs, you can also check the activity log for messages.

### Active log

If the amount of available active log space is too low, the following messages are displayed in the activity log:

#### **ANR4531I: IC\_AUTOBACKUP\_LOG\_USED\_SINCE\_LAST\_BACKUP\_TRIGGER**

This message is displayed when the active log space exceeds the maximum specified size. The Tivoli Storage Manager server starts a full database backup.

To change the maximum log size, halt the server. Open the `dsmserv.opt` file, and specify a new value for the `ACTIVELOGSIZE` option. When you are finished, restart the server.

#### **ANR0297I: IC\_BACKUP\_NEEDED\_LOG\_USED\_SINCE\_LAST\_BACKUP**

This message is displayed when the active log space exceeds the maximum specified size. You must back up the database manually.

To change the maximum log size, halt the server. Open the `dsmserv.opt` file, and specify a new value for the `ACTIVELOGSIZE` option. When you are finished, restart the server.

#### **ANR4529I: IC\_AUTOBACKUP\_LOG\_UTILIZATION\_TRIGGER**

The ratio of used active-log space to available active-log space exceeds the log utilization threshold. If at least one full database backup has occurred, the Tivoli Storage Manager server starts an incremental database backup. Otherwise, the server starts a full database backup.

#### **ANR0295I: IC\_BACKUP\_NEEDED\_LOG\_UTILIZATION**

The ratio of used active-log space to available active-log space exceeds the log utilization threshold. You must back up the database manually.



## Archive log

If the amount of available archive log space is too low, the following message is displayed in the activity log:

### **ANR0299I: IC\_BACKUP\_NEEDED\_ARCHLOG\_USED**

The ratio of used archive-log space to available archive-log space exceeds the log utilization threshold. The Tivoli Storage Manager server starts a full automatic database backup.

## Database

If the amount of space available for database activities is too low, the following messages are displayed in the activity log:

### **ANR2992W: IC\_LOG\_FILE\_SYSTEM\_UTILIZATION\_WARNING\_2**

The used database space exceeds the threshold for database space utilization. To increase the space for the database, use the **EXTEND DBSPACE** command, the **EXTEND DBSPACE** command, or the DSMSEV FORMAT utility with the **DBDIR** parameter.

### **ANR1546W: FILESYSTEM\_DBPATH\_LESS\_1GB**

The available space in the directory where the server database files are located is less than 1 GB.

When a Tivoli Storage Manager server is created with the DSMSEV FORMAT utility or with the configuration wizard, a server database and recovery log are also created. In addition, files are created to hold database information used by the database manager. The path specified in this message indicates the location of the database information used by the database manager. If space is unavailable in the path, the server can no longer function.

You must add space to the file system or make space available on the file system or disk.

---

## Increasing the size of the database

You can increase the size of the Tivoli Storage Manager database by creating directories and adding them to the database.

### About this task

The Tivoli Storage Manager server can use all of the space that is available to the drives or file systems where the database directories are located. To ensure that database space is always available, monitor the space in use by the server and the file systems where the directories are located.

The maximum size of the Tivoli Storage Manager database is 4 TB.

Use the **QUERY DBSPACE** command to display the number of free pages in the table space and the free space that is available to the database. If the number of free pages is low and there is plenty of free space available, the database allocates more space. However, if free space in drives or file systems is low, it might not be possible to expand the database.

You must format the database with Tivoli Storage Manager V6.2 server or later. If you are using a Tivoli Storage Manager V6.1 server or earlier, you must manually

upgrade table spaces to the DB2 9.7 version of table spaces. The instructions for manually upgrading the table spaces Tivoli Storage Manager V6.1 server and earlier is different for each version level. Contact IBM Software Support for the instructions for your version of Tivoli Storage Manager.

If you want to increase space for the database, you can create new directories and add them by using the **EXTEND DBSPACE** command. You can also use the **DSMSERV EXTEND DBSPACE** utility when the server is offline. When you issue these commands with the default parameter values, data is redistributed across the new database directories and storage space in the old directories is reclaimed. This action makes the new directories available for use immediately and parallel I/O performance is improved.

To redistribute data to new directories, the storage paths must be able to host the directories and data. Make sure that sufficient disk space is available for the operation. New directories must be empty.

For example, assume that your table space has four directories over two existing storage paths (two directories per path), and you add another storage path to the database. When data is redistributed for the table space, two new directories of the same size as the existing directories are created on the new storage path. If your table space has a size of approximately 100 GB, then you need 50 GB of free space on the new storage path for redistribution to be successful. After redistribution is complete and space is reclaimed, the total used space is still the same amount of 100 GB, until you begin adding more data.

The following image shows the example table space before and after data is redistributed.

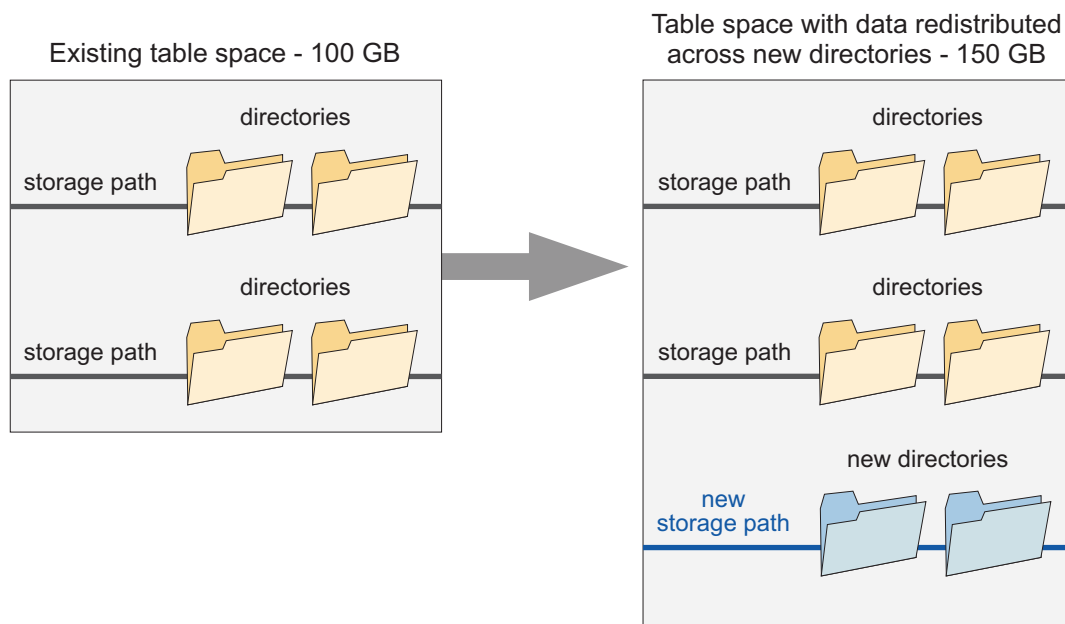


Figure 79. Redistributing data for table spaces

The process of redistributing data and reclaiming space uses considerable resources. Ensure that you plan ahead when you want to add space to the database. For planning requirements, review the **EXTEND DBSPACE** command.

If you do not want to redistribute data at the same time that you add directories, you can set the **RECLAIMSTORAGE** parameter in the **EXTEND DBSPACE** command to No. You can perform the tasks to redistribute data and reclaim space after the database size is increased, but the steps must be done manually.

## Procedure

To add space to the database, complete the following steps:

1. Create one or more directories for the database on separate drives or file systems.  
Review best practices for creating database directories in the *Optimizing Performance* guide.
2. Issue the **EXTEND DBSPACE** command to add the directory or directories to the database. The directories must be accessible to the user ID of the database manager. By default, data is redistributed across all database directories and space is reclaimed.

**Remember:** The time that is needed to complete redistribution of data and reclaiming of space is variable, depending on the size of your database. Make sure that you plan adequately.

3. Halt and restart the server to fully use the new directories.

## Example

**AIX, HP-UX, Linux, and Solaris:** For example, to add two directories to the storage space for the database and then redistribute data and reclaim space, issue the following command:

```
extend dbspace /tsmdb005,/tsmdb006
```

For example, to add two directories to the storage space for the database and then redistribute data and reclaim space, issue the following command:

```
extend dbspace /tsmdb005,/tsmdb006
```

To increase the size of the database without redistributing data and reclaiming space, issue the following command:

```
extend dbspace /tsmdb005,/tsmdb006 reclaim=no
```

**Windows:** For example, to add a directory and a drive to the storage space for the database and then redistribute data and reclaim space, issue the following command:

```
extend dbspace h:\tsmdb005,I:
```

To increase the size of the database without redistributing data and reclaiming space, issue the following command:

```
extend dbspace h:\tsmdb005,I: reclaim=no
```

## Manually redistributing data and reclaiming space after you add directories to the database

If you add directories to the Tivoli Storage Manager database with the **EXTEND DBSPACE** command and choose not to redistribute data and reclaim space at the same time, you can complete these tasks later by using DB2 commands.

### Before you begin

**Restriction:** The redistribution process, also known as rebalancing, only works with DB2 version 9.7 or later table spaces, which are created when you format a new Tivoli Storage Manager version 6.2 or later server. If you upgraded or restored your Tivoli Storage Manager server from version 6.1, and you want to rebalance your table spaces, contact IBM Software Support for instructions.

Redistribution uses considerable resources. Review the following guidelines before you start the procedure:

- Run the process when the server is not handling a heavy workload.
- To redistribute data to new directories, the storage paths must be able to host the directories and data. Make sure that sufficient disk space is available for the operation.
- The time that is required to redistribute data and reclaim space might vary. File system layout, the ratio of new paths to existing storage paths, server hardware, and concurrent operations are all factors in determining the time requirement. Start the process with one small and one medium-sized table space and then try a larger table space. Use your results as a reference to estimate the time that is needed to process remaining table spaces.
- Do not interrupt the process. If you try to stop it, for example, by halting the process that is completing the work, you must stop and restart the DB2 server. When the server is restarted, it will go into crash recovery mode, which takes several minutes, after which the process resumes.

### Procedure

Complete the following steps to redistribute data and then reclaim space for each table space. For the best performance, rebalance a table space and then reduce the size for that table space. While the size for the first table space is being reduced, you can start rebalancing on the second table space, and so on.

1. Open the DB2 command line processor and issue the following command:  

```
db2 connect to tsmdb1
```
2. List DB2 table spaces by issuing the following command. To display details about each table space, including the total size of a table space and how many bytes are used in each file system where the table space is located, include show detail.  

```
db2 list tablespaces show detail
```

You only need to redistribute data on Database Managed Space (DMS) table spaces. The following example output shows where the table space type is identified:

Tablespaces for Current Database

|               |                                               |
|---------------|-----------------------------------------------|
| Tablespace ID | = 0                                           |
| Name          | = SYSCATSPACE                                 |
| Type          | = Database managed space <---DMS table space. |

Contents = All permanent data. Regular table space.  
State = 0x0000  
Detailed explanation:  
Normal

3. Use the list that you obtained in Step 2 on page 663 to identify each DMS table space. For each DMS table space, issue the following command to start redistribution of data for the first DMS space:

```
db2 alter tablespace tablespace_name rebalance
```

4. Monitor the data redistribution progress by issuing the following command:

```
db2list utilities show detail
```

If the rebalance process is running, the command output shows Type = REBALANCE, and also indicates how many extents are moved and how many remain to be moved.

The following example output shows where these details are displayed:

```
ID = 6219
Type = REBALANCE <--- Data is being redistributed.
Database Name = AX4
Partition Number = 0
Description = Tablespace ID: 37
Start Time = 04/27/2009 21:37:37.932471
State = Executing
Invocation Type = User
Throttling:
Priority = Unthrottled
Progress Monitoring:
Estimated Percentage Complete = 15
Total Work = 22366 extents <--- Total extents to be moved.
Completed Work = 3318 extents <--- Total extents moved.
Start Time = 04/27/2009 21:37
```

The value in the Completed Work field should increase as the redistribution progresses. The db2diag log also records status about the process, including start and complete time and what percentage of the process is complete at a certain time.

5. After the redistribution process is completed, reduce the size for each table space. During and after the operation, table spaces have a much larger total size because directories are added. Issue the following command:

```
db2 alter tablespace tablespace_name reduce max
```

---

## Reducing the size of the database

If a significant amount of data was deleted from the database, consider reducing the database size. Generally, you must reorganize the large tables in the database offline before you can reduce the database size.

### About this task

For more information about reorganizing tables, see the *Optimizing Performance Guide*.

## Reducing the size of the database for V7.1 servers

If you formatted a server with a Tivoli Storage Manager Version 7.1 server or later, you must reduce the size of the database differently from other servers. This also applies if you upgraded from a Tivoli Storage Manager V5 server directly to a V7.1 server or later.

### Before you begin

In DB2 10.5, you use the DB2 9.7 table spaces. The data for large tables is placed into a separate table space for each table. The indices for each table are in a separate table space. Table 62 identifies the assignments for each table.

Table 62. DB2 tables, table spaces, and indices

| Table name             | DB2 table space name for data | DB2 table space name for indices |
|------------------------|-------------------------------|----------------------------------|
| ARCHIVE_OBJECTS        | ARCHOBJDATASPACE              | ARCHOBJIDXSPACE                  |
| BACKUP_OBJECTS         | BACKOBJDATASPACE              | BACKOBJIDXSPACE                  |
| BF_AGGREGATED_BITFILES | BFABFDATASPACE                | BFABFIDXSPACE                    |
| BF_BITFILE_EXTENTS     | BFBFEXTDATASPACE              | BFBFEXTIDXSPACE                  |

**Tip:** Consider running offline table reorganization on the large tables in the DB2 database before you reduce the size of the database.

### Procedure

If you installed a Tivoli Storage Manager V7.1 server or later, or upgraded a V5 server directly to V7.1, complete the following task:

If you reorganized any of the four tables offline, issue the **DB2 ALTER TABLESPACE REDUCE MAX** command on both table spaces that are associated with that table. For example, if you reorganized the BF\_AGGREGATED\_BITFILES table offline, issue the following commands:

```
db2 connect to tsmdb1
db2 set schema tsmdb1
db2 ALTER TABLESPACE BFABFDATASPACE REDUCE MAX
db2 ALTER TABLESPACE BFABFIDXSPACE REDUCE MAX
```

**Restriction:** The commands can increase I/O activity, and might affect server performance. To minimize performance problems, wait until one command is completed before you issue the next command.

## Reducing the size of the database for all other servers

Databases that are created with Tivoli Storage Manager Version 6.2 servers and later, have DB2 9.7 table spaces with reclaimable space enabled.

### About this task

Databases that are created with Tivoli Storage Manager Version 6.1 servers use DB2 9.5 table spaces that do not have the reclaimable space attribute. If you upgrade a Version 6.1 server to a later version of Tivoli Storage Manager server, the database uses DB2 9.5 tablespaces.

## Procedure

1. To determine whether the database table space is DB2 9.7, issue the following commands from a DB2 command-line window:

```
db2 connect to tsmbd1
db2 set schema tsmbd1
db2 "select reclaimable_space_enabled from table(mon_get_tablespace('','-1'))
where tbsp_id in (2,4,5,6)"
```

For DB2 9.7 table spaces, the values in the RECLAIMABLE\_SPACE\_ENABLED column are 1. For DB2 9.5 table spaces, the values are 0.

**Restriction:** If you have DB2 9.5 table spaces, you cannot release storage to the operating system.

In the following output, the value in each row of the RECLAIMABLE\_SPACE\_ENABLED column is 1. This indicates that the server is using DB2 9.7 table spaces.

```
RECLAIMABLE_SPACE_ENABLED

1
1
1
1
```

2. To reduce the size of a database that has DB2 9.7 table spaces, issue the following commands from a DB2 command-line window:

```
db2 connect to tsmbd1
db2 set schema tsmbd1
db2 ALTER TABLESPACE USERSPACE1 REDUCE MAX
db2 ALTER TABLESPACE IDXSPACE1 REDUCE MAX
db2 ALTER TABLESPACE LARGESPACE1 REDUCE MAX
db2 ALTER TABLESPACE LARGEIDXSPACE1 REDUCE MAX
```

**Restriction:** The commands can increase I/O activity, and might affect server performance. To minimize performance problems, wait until one command is completed before you issue the next command.

---

## Table and index reorganization schedules

Tables and indexes are reorganized by default by Tivoli Storage Manager. If automatic reorganization is affecting server performance, you can manually schedule reorganization.

### About this task

Unexpected database growth, unexpected active and archive log space requirements, and reduced server performance can occur over time if tables or the indexes that are associated with tables are not reorganized. Reorganization of table data can be initiated by the Tivoli Storage Manager server or by DB2. For best results, use automatic reorganization of the Tivoli Storage Manager server. The server analyzes selected database tables and indexes that are based on table activity, and determines when reorganization is required. The database manager runs a reorganization while server operations continue. If reorganization by DB2 is enabled, DB2 controls the reorganization process. Reorganization by DB2 is not recommended because it can cause performance degradation.

Server-initiated table reorganization is enabled by default. If you are deduplicating data, consider enabling server-initiated index reorganization. However, table and index reorganization requires locks on the database that might interfere with server



operations. Reorganization also requires significant processor, active log, and archive log resources. If reorganization is causing performance problems, you can manually schedule table and index reorganizations.

The best time to start a reorganization is when server activity is low and when access to the database is optimal. Schedule table reorganization for databases on servers that are not running deduplication. Schedule table and index reorganization on servers that are running deduplication.

**Important:** Ensure that the system on which the Tivoli Storage Manager server is running has sufficient memory and processor resources. To assess how busy the system is over time, use operating system tools to assess the load on the system. You can also review the `db2diag.log` file and the server activity log. If the system does not have sufficient resources, reorganization processing might be incomplete, or it might degrade or destabilize the system.

If the F1 or F2 flag is indicated 20 days after the reorganization, the table is reorganized again. If the F5 flag is indicated on any index for a table and it is 20 days since the last index reorganization, the indexes for that table are reorganized.

## Restrictions to table and index reorganization

If you manually schedule a table or index reorganization, be aware of the restrictions that can affect performance.

### Table reorganization

Under certain conditions, table reorganization can pause if reorganization activity exceeds the time specified by the `REORGURATION` server option. Table reorganization can also pause to make active log space available. If table reorganization is paused for either reason, reorganization starts again if the interval is not exceeded. Otherwise, reorganization remains paused until the following day at the next scheduled reorganization.

Do not schedule database backups during a table reorganization interval. Database backup takes precedence over table reorganization:

- If a database backup is running, table reorganization cannot start until the database backup completes. After the database backup completes, table reorganization can start if the start time is within the interval specified by the `REORGURATION` server option.
- If a running table reorganization is paused, the server checks to determine whether a database backup is required. If a backup is required, it starts automatically.

### Index reorganization

If a database backup is running, index reorganization cannot start until the database backup completes. After the database backup completes, index reorganization can start if the start time is within the interval specified by the `REORGURATION` server option.

Unlike table reorganization, index reorganization cannot be paused. If an index reorganization is running, the server cannot start a full database backup. If an index is large, reorganization can take a long time to complete and can generate a



large amount of data in the active log and the archive log. To reduce the possibility of having to manually start a full database backup, take one or more of the following steps:

- Consider allocating relatively large amounts of archive log space that the server can use during index reorganization.
- To ensure that running index reorganizations complete, do not schedule a full database backup for least an hour after the interval during which an index reorganization can start.
- Ensure that the value of the REORGDURATION server option limits when index reorganizations can start.

Continue to monitor database and log space usage during index reorganization. If the server starts to run out of archive log space, begin a full database backup.

## Scheduling table or index reorganization

To schedule table or index reorganization, you specify the earliest time and an interval after that time during which reorganization can start.

### Before you begin

If you stop the Tivoli Storage Manager server during reorganization, an index reorganization stops but a table reorganization that is in progress continues. Table reorganization is an asynchronous activity from the server.

### Procedure

To schedule table or index reorganization, complete the following steps:

1. Enable table or index reorganization by issuing the **SETOPT** command and setting one or both of the following server options to yes:
  - **ALLOWREORGTABLE**
  - **ALLOWREORGINDEX**
2. Specify the time that the server can start table or index reorganization by setting the **REORGBEGINTIME** server option. Specify the time by using a 24-hour format. The best time to start a reorganization is when server activity is low and when access to the database is optimal. Schedule table reorganization for databases on servers that are not running data deduplication. Schedule table and index reorganization on servers that are running data deduplication.
3. Specify the interval during which table or index reorganization must start by setting the **REORGDURATION** server option. Specify the time as a number of hours.

### Results

The following table describes when reorganization is enabled, depending on the server option that you specify:

Table 63. Reorganization results for server options

| If you specify... | Result...                                     |
|-------------------|-----------------------------------------------|
| REORGBEGINTIME    | Reorganization is enabled for the entire day. |

Table 63. Reorganization results for server options (continued)

| If you specify...    | Result...                                                                                   |
|----------------------|---------------------------------------------------------------------------------------------|
| <b>REORGDURATION</b> | The reorganization interval starts at 6.00 a.m. and runs for the specified number of hours. |

If your system experiences performance problems, modify the values of the **REORGBEGINTIME** option and the **REORGDURATION** option. When you modify the values, you ensure that table or index reorganization is not running during periods of peak server activity.

## What to do next

You might need to reorganize indexes and tables offline to maintain server stability and improve database performance. Use the **DISABLEREORGTABLE**, **DISABLEREORGINDEX**, and **DISABLEREORGCLEANUPINDEX** options to exclude specific tables from online reorganization. You specify these options in the `dsmserv.opt` file.

## Reorganizing tables offline

You might need to disable table reorganization and reorganize tables offline to maintain server stability and to complete daily server activities.

### Before you begin

The following table lists the tables in the database, the page size of the tables, and the buffer pools that are required to reorganize the tables. You use the buffer pool and the page size when you create a temporary table space during reorganization.

Table 64. Database table names and associated page sizes and buffer pools

| Table name             | Page size | Buffer pool  |
|------------------------|-----------|--------------|
| AF_BITFILES            | 16 K      | IBMDEFAULTBP |
| AS_VOLUME_STATUS       | 16 K      | IBMDEFAULTBP |
| BF_AGGREGATED_BITFILES | 16 K      | IBMDEFAULTBP |
| BF_BITFILE_EXTENTS     | 16 K      | IBMDEFAULTBP |
| BF_DEREFERENCED_CHUNKS | 16 K      | IBMDEFAULTBP |
| BF_QUEUED_CHUNKS       | 16 K      | IBMDEFAULTBP |
| GROUP_LEADERS          | 16 K      | IBMDEFAULTBP |
| BACKUP_OBJECTS         | 32 K      | LARGEUFPOOL1 |
| ARCHIVE_OBJECTS        | 32 K      | LARGEUFPOOL1 |

### About this task

Schedule offline reorganization for tables where there is an unacceptable level of database growth or degradation in server performance.

If you disable reorganization, monitor the database usage and the file systems that the database uses to ensure that you do not run out of space. For best results, monitor the database usage weekly. You can exclude reorganization of specific tables to increase the speed of reorganization. The Tivoli Storage Manager server

issues a message for tables that must be reorganized when reorganization for a specific table is disabled.

## Procedure

To reorganize a table offline, complete the following steps:

1. When the server is running, determine the amount of temporary space that is required to organize a table. The temporary space that is required is twice the value of the table size. To determine the table size, issue the following commands:

```
db2 connect to tsmdb1
db2 set schema tsmdb1
db2 "call sysproc.reorgchk_tb_stats('T','tsmdb1.tablename')"
db2 "select tsize from session.tb_stats"
```

2. Create a temporary table space to use during the reorganization. Issue the following commands:

```
db2 "CREATE SYSTEM TEMPORARY
TABLESPACE REORG PAGESIZE pagesize
MANAGED BY SYSTEM USING ('path') BUFFERPOOL bufferpool
DROPPED TABLE RECOVERY OFF"
```

The path that the database instance user owns indicates a directory. The directory is at least twice the value of the tsize table size, and is on the fastest reliable available disk.

3. Complete a full database backup that includes the volume history.
4. Stop the server.
5. Issue the following commands from a DB2 command window:

```
db2 force application all
db2stop
db2start
db2 connect to tsmdb1
db2 update db cfg for tsmdb1 using auto_tbl_maint off
db2 "reorg table tsmdb1.tablename allow no access use reorg"
db2 "drop tablespace reorg"
db2 update db cfg for tsmdb1 using auto_tbl_maint on
```

If the commands take too long to run, stop the reorganization and restore the database by using the database backup and volume history.

6. Start the server.
7. From the DB2 command window, issue the following commands:

**Tip:** Each command is entered on one line, but is displayed here on multiple lines to make it easier to read.

```
db2 connect to tsmdb1
db2 "runstats on table tsmdb1.tablename with distribution
and sampled detailed indexes all"
```

Ensure that the **RUNSTATS** command completes processing.

## Locating space to reorganize indexes and tables offline

Before running offline reorganization for indexes and tables, ensure that you have enough temporary free space to run offline reorganization.

### About this task

If your database backups are stored in FILE device classes, you must determine whether there is enough space for offline reorganization. If you do not have enough space, delete database backups that are not required.

### Procedure

1. To determine the oldest database backups to delete, issue the **QUERY VOLHISTORY** command and specify the **TYPE=DBB** parameter.
2. To delete database backups, issue the **DELETE VOLHISTORY** command and specify the **TYPE=DBB** and **TODATE** parameters. For example, to delete database backups that are 5 days or older, issue the following command:  

```
delete volhistory type=dbb todate=today-5
```

**Remember:** If you store database backups in multiple device class, ensure that you do not delete database backups that you want to keep.

### What to do next

Review the database backup file system with the most free space to determine whether there is enough space to start the reorganization.

---

## Managing logs for the database

You can increase and decrease the size of the active log, compress the archive log, add extra logs, and specify log file location to manage database space.

### Increasing the size of the active log

If the active log is running out of space, the current transaction is rolled back, and the server issues an error message and halts. You cannot restart the server until the active log size is increased.

### Procedure

To increase the size of the active log while the server is halted, complete the following steps:

1. Issue the **DSMSERV DISPLAY LOG** offline utility to display the size of the active log.
2. Ensure that the location for the active log has enough space for the increased log size. If a log mirror exists, its location must also have enough space for the increased log size.
3. Halt the server.
4. In the `dsmserv.opt` file, update the **ACTIVELOGSIZE** option to the new maximum size of the active log, in megabytes. For example, to change the active log to its maximum size of 128 GB, enter the following server option:  

```
activelogsize 131072
```
5. If you plan to use a new active log directory, update the directory name specified in the **ACTIVELOGDIRECTORY** server option. The new directory must be empty and must be accessible to the user ID of the database manager.

6. Restart the server.

## Results

Log files of 512 MB are automatically defined until the size specified in the `ACTIVELOGSIZE` option is reached. If a log mirror exists, log files are also defined automatically.

## Reducing the size of the active log

You can reduce the size of the active log during the startup of the Tivoli Storage Manager server.

### Procedure

If you have too much active log space, you can reduce the size of the active log by completing the following steps:

1. Stop the Tivoli Storage Manager server.
2. In the `dsmserv.opt` file, change the `ACTIVELOGSIZE` option to the new size of the active log, in megabytes. For example, to reduce the active log by 8 GB, enter the following server option:  
`dsmserv activelogsiz 8000`
3. Restart the server.

### What to do next

When you reduce the size of the active log, you must restart the Tivoli Storage Manager server twice. The first restart changes the DB2 parameters. The second restart removes the log files that are no longer required on the disk.

## Compressing archive logs

You can enable or disable compression of archive logs on the Tivoli Storage Manager server. By compressing the archive logs, you reduce the amount of space that is required for storage. You also reduce the frequency with which you must run a full database backup to clear the archive log.

### Before you begin

Before you configure compression of archive logs, you must consider the benefits. The results that you achieve might differ, depending on your hardware and software environment, and the size of the archive log files.

The following table shows the results that were obtained in lab tests.

*Table 65. Archive log compression results during lab tests*

|                | Pre-compression<br>Archive Log Average<br>Size | Post-compression<br>Archive Log Average<br>Size | Archive Log Storage<br>Space Reduction |
|----------------|------------------------------------------------|-------------------------------------------------|----------------------------------------|
| Linux system   | 299,799.98 MB                                  | 129,344.99 MB                                   | 57.00%                                 |
| Windows System | 223,542.11 MB                                  | 85,185.21 MB                                    | 62.00%                                 |

## Procedure

1. Enable dynamic compression of the archive log by issuing the following command:  
`SETOPT ARCHLOGCOMPRESS Yes`
2. Verify that compression is enabled by issuing the **QUERY OPTION ARCHLOGCOMPRESS** command.

**Restriction:** Use caution when you enable the ARCHLOGCOMPRESS server option on systems with sustained high volume usage and heavy workloads. Enabling this option in this system environment can cause delays in archiving log files from the active log file system to the archive log file system. This delay can cause the active log file system to run out of space. Be sure to monitor the available space in the active log file system after archive log compression is enabled. If the active log directory file system usage nears out of space conditions, the ARCHLOGCOMPRESS server option must be disabled. You can use the **SETOPT** command to disable archive log compression immediately without halting the server.

## Adding optional logs after server initialization

You can specify an archive failover log and a mirror log if they were not created during server initialization.

### Procedure

Complete the following steps to add one or both of the logs.

1. Create the directories for the logs. The directories must be accessible to the user ID of the database manager.
2. Halt the server.
3. Add the log server option or options to the server options file, `dsmserv.opt`. For example:  
`archfailoverlogdirectory h:\tsm\archfailoverlog`  
`mirrorlogdirectory n:\tsm\mirrorlog`
4. Save the server options file.
5. Halt and restart the server.

## Specifying alternative locations for database log files

A database backup includes a database image and associated recovery-log files. During a database restore operation, the recovery-log files are temporarily stored in a subdirectory called `RstDbLog`. Log files that are created during day-to-day operations and that cannot be stored in the active log directory or in the archive log directory can be temporarily stored in a subdirectory called `failarch`.

### Procedure

To specify alternative locations for the database log files, complete the following steps:

1. To specify the location of subdirectories `RstDbLog` and `failarch`, use the **ARCHFAILOVERLOGDIRECTORY** server option. The Tivoli Storage Manager server creates the `RstDbLog` and `failarch` subdirectories in the directory that is specified by the server option.

**Restriction:** If you do not specify the location of the subdirectories, the Tivoli Storage Manager server automatically creates the two subdirectories under the archive log directory

If the archive log directory becomes full, it can limit the amount of space that is available for archived log files. If you must use the archive log directory, you can increase its size to accommodate both the RstDbLog and failarch directories.

2. Use a file system that is different from the file system that is specified by the **ACTIVELOGDIRECTORY** and **ARCHLOGDIRECTORY** parameters.

**Tip:** If you do not set the **ARCHFAILOVERLOGDIRECTORY** option, the Tivoli Storage Manager server creates the RstDbLog and failarch subdirectories automatically in the directory that is specified for the **ARCHLOGDIRECTORY** parameter on the **DSMSERV FORMAT** or **DSMSERV LOADFORMAT** command. You must specify the **ARCHLOGDIRECTORY** parameter for these commands.

3. For a database restore operation, you can specify the location of the RstDbLog subdirectory, but not the failarch subdirectory, by using the **RECOVERYDIR** parameter on the **DSMSERV RESTORE DB** command. Consider allocating a relatively large amount of temporary disk space for the restore operation. Because database restore operations occur relatively infrequently, the RstDbLog subdirectory can contain many logs from backup volumes that are stored in preparation for pending roll-forward-restore processing.

### Specifying an alternative location with the **ARCHFAILOVERLOGDIRECTORY** server option or parameter

If you specify the **ARCHFAILOVERLOGDIRECTORY** server option or the **ARCHFAILOVERLOGDIRECTORY** parameter in the **DSMSERV FORMAT** or **DSMSERV LOADFORMAT** command, the server creates the RstDbLog and failarch subdirectories in the archive failover-log directory.

### About this task

The server also updates the DB2 parameter **OVERFLOWLOGPATH** that points to the RstDbLog subdirectory and the DB2 parameter **FAILARCHPATH**, that points to the failarch subdirectory. For details about these parameters, see the DB2 product information at [http://www.ibm.com/support/knowledgecenter/SSEPGG\\_10.5.0](http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0).

For example, suppose that you specify archlogfailover as the value of the **ARCHFAILOVERLOGDIRECTORY** parameter on the **DSMSERV FORMAT** command:

```
dsmserv format
 dbdir=a:\db001
 activelogdirectory=b:\activelog
 archlogdirectory=c:\archlog
 archfailoverlogdirectory=d:\archlogfailover
```

The server creates the subdirectories RstDbLog and failarch in the parent directory archlogfailover. The server also updates the following DB2 parameters:

```
OVERFLOWLOGPATH=d:\archlogfailover\RstDbLog
FAILARCHPATH=d:\archlogfailover\failarch
```

The server also updates the value of the **ARCHFAILOVERLOGDIRECTORY** option in the server options file, dsmserv.opt:

```
ARCHFAILOVERLOGDIRECTORY d:\archlogfailover
```

## Specifying an alternative location with the ARCHLOGDIRECTORY server option or parameter

If you do not set the **ARCHFAILOVERLOGDIRECTORY** parameter or server option, the server automatically creates the subdirectories **RstDbLog** and **failarch** in the directory that is specified for the **ARCHLOGDIRECTORY** parameter. In addition, the server updates the DB2 parameters **OVERFLOWLOGPATH** and **FAILARCHPATH** to point to those subdirectories.

### About this task

For details about these parameters, see the DB2 product information at [http://www.ibm.com/support/knowledgecenter/SSEPGG\\_10.5.0](http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0).

For example, suppose that you specify a value of **archlog** for the **ARCHLOGDIRECTORY** parameter in a **DSMSERV FORMAT** command. You do not specify the **ARCHFAILOVERLOGDIRECTORY** parameter:

```
dsmserv format
 dbdir=a:\db001
 activelogdirectory=b:\activelog
 archlogdirectory=c:\archlog
```

The Tivoli Storage Manager server creates the subdirectories **RstDbLog** and **failarch** under the **archlog** parent directory. The server also updates the following DB2 parameters:

```
OVERFLOWLOGPATH=c:\archlog\RstDbLog
FAILARCHPATH=c:\archlog\failarch
```

The server also updates the value of the **ARCHLOGDIRECTORY** option in the server options file, **dsmserv.opt**:

```
ARCHLOGDIRECTORY c:\archlog
```

## Specifying the location of RstDbLog using the RECOVERYDIR parameter

For a database restore operation, you can specify a temporary location for the **RstDbLog** subdirectory by using the **RECOVERYDIR** parameter on the **DSMSERV RESTORE DB** command. The Tivoli Storage Manager server creates the **RstDbLog** subdirectory in the directory that is specified by that parameter. The server does not create the **failarch** subdirectory.

### About this task

The server also updates the DB2 parameter, **OVERFLOWLOGPATH**, that points to **RstDbLog**. For details about this parameter, see the DB2 product information at [http://www.ibm.com/support/knowledgecenter/SSEPGG\\_10.5.0](http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0).

**Restriction:** The location specified by the **RECOVERYDIR** parameter takes precedence over the location specified by the **ARCHFAILOVERLOGDIRECTORY** or **ARCHLOGDIRECTORY** server option or parameter.

For example, for a point-in-time database restore, you can issue the following command:

```
dsmserv restore db
 todate=5/12/2011
 totime=14:45
 recoverydir=e:\recovery
```



The server creates the RstDbLog subdirectory in the parent recovery directory. The server also updates the **OVERFLOWLOGPATH** parameter:

```
OVERFLOWLOGPATH=e:\recovery\RstDbLog
```

After the database is restored, the RstDbLog subdirectory reverts to its location as specified by the server option ARCHFAILOVERLOGDIRECTORY or ARCHLOGDIRECTORY in the server options file, dsmserv.opt.

---

## Moving the database and recovery log on a server

You can move the database and logs to different locations on the server.

### About this task

You might want to move the database and logs to take advantage of a larger or faster disk. You have the following options:

- “Moving both the database and recovery log”
- “Moving only the database” on page 677
- “Moving only the active log, archive log, or archive failover log” on page 677

For information about moving a Tivoli Storage Manager server to another machine, see “Moving the Tivoli Storage Manager server to another system” on page 602.

## Moving both the database and recovery log

You can move the database, active log, and archive logs that are on the same file system to various directories on different file systems for better protection.

### Procedure

1. Back up the database by issuing the following command:  

```
backup db type=full devclass=files
```
2. Halt the server.
3. Create directories for the database, active logs, and archive logs. The directories must be accessible to the user ID of the database manager. For example:  

```
mkdir l:\tsm\db005
mkdir m:\tsm\db006
mkdir n:\tsm\db007
mkdir o:\tsm\db008
mkdir p:\tsm\activelog
mkdir q:\tsm\archivelog
```
4. Create a file that lists the locations of the database directories. This file is used if the database must be restored. Enter each location on a separate line. For example, these are the contents of the dbdirs.txt file:  

```
l:\tsm\db005
m:\tsm\db006
n:\tsm\db007
o:\tsm\db008
```
5. Remove the database instance by issuing the following command:  

```
dsmserv removedb TSMDB1
```
6. Issue the **DSMSERV RESTORE DB** utility to move the database and create the new active log. For example:  

```
dsmserv restore db todate=today on=dbdirs.txt
activelogdir=p:\tsm\activelog
```
7. Restart the server.

8. Move the archive logs from the old directory to the new directory. Ensure that you preserve any subdirectory structure. Use and verify a recursive copy directory command:

```
xcopy /s k:\tsm\archivelog* q:\tsm\archivelog
```

## Moving only the database

You can move only the database to new directories.

### Procedure

To move the database from one location on the server to another location, follow this procedure:

1. Back up the database by issuing the following command:  

```
backup db type=full devclass=files
```
2. Halt the server.
3. Create directories for the database. The directories must be accessible to the user ID of the database manager. For example:  

```
mkdir l:\tsm\db005
mkdir m:\tsm\db006
mkdir n:\tsm\db007
mkdir o:\tsm\db008
```
4. Create a file that lists the locations of the database directories. This file will be used if the database must be restored. Enter each location on a separate line. For example, here are the contents of the dbdirs.txt file:  

```
l:\tsm\db005
m:\tsm\db006
n:\tsm\db007
o:\tsm\db008
```
5. Remove the database instance by issuing the following command:  

```
dsmserv removedb TSMDB1
```
6. Issue the **DSMSERV RESTORE DB** utility to move the database to the new directories. For example:  

```
dsmserv restore db todate=today on=dbdir.file
```
7. Start the server.

## Moving only the active log, archive log, or archive failover log

You can move only the active log, archive log, or archive failover log from one directory to another. You can move the logs as part of performance tuning, replacing a hard disk drive, or changing to a file system with more space.

### Procedure

1. Stop the server.
2. Create a directory by using the following commands for the log that you want to move.

Table 66. Commands for new directories

| Log name             | Command                                      |
|----------------------|----------------------------------------------|
| Active log           | <pre>mkdir p:\tsm\active log</pre>           |
| Archive log          | <pre>mkdir q:\tsm\archivelog</pre>           |
| Archive failover log | <pre>mkdir e:\tsmsserver1\archfaillog2</pre> |

3. Update the `dsmserv.opt` option file for the new directory by using one of the following commands.

*Table 67. Server option example to update the `dsmserv.opt` option file*

| Log name             | Server option example                                             |
|----------------------|-------------------------------------------------------------------|
| Active log           | <code>activelogdirectory p:\tsm\activelog</code>                  |
| Archive log          | <code>archlogdirectory q:\tsm\archivelog</code>                   |
| Archive failover log | <code>archfailoverlogdirectory e:\tsmsserver1\archfaillog2</code> |

4. Restart the server.
5. Move or copy the logs from the old directory to the new directory.

*Table 68. Commands to move or copy the logs*

| Log name             | Command                                                                                                                                                                                |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Active log           | No action is necessary. The active logs are automatically moved by the database manager from the old directory to the new directory.                                                   |
| Archive log          | Preserve the subdirectory structure. Use and verify a recursive copy directory command. For example:<br><code>xcopy /s k:\tsm\archivelog\* q:\tsm\archivelog</code>                    |
| Archive failover log | Preserve the subdirectory structure. Use and verify a recursive copy directory command. For example:<br><code>xcopy /s c:\tsmsserver1\archfaillog\* f:\tsmsserver1\archfaillog2</code> |

6. Optional: Remove the old directory by using the `rmdir` command.

---

## Transaction processing

A *transaction* is the unit of work exchanged between the client and server.

The log records for a given transaction are moved into stable storage when the transaction is committed. The database information that is stored on disk remains consistent because the server ensures that the recovery log records, which represent the updates to these database pages, are written to disk.

During restart-recovery, the server uses the active and archive log information to maintain the consistency of the server by redoing and, if necessary, undoing ongoing transactions from the time that the server was halted. The transaction is then committed to the database.

Transaction commit is a function of all the log records for that transaction being written to the recovery log. This function ensures that the necessary redo and undo information is available to replay these transaction changes against the database information.

## Files moved as a group between client and server

The client program can move multiple files or directories between the client and server before it commits the data to server storage.

A transaction that contains multiple files or directories is called a *transaction group*. Using the TXNGROUPMAX server option, you can specify the number of files or directories that are contained within a transaction group. You can use the TXNGROUPMAX option to increase performance when Tivoli Storage Manager writes to tape. This performance increase can be considerable when you transfer multiple small files.

If you increase the value of TXNGROUPMAX by a large amount, monitor the effects on the recovery log. A larger value for the TXNGROUPMAX option can have the following impact:

- Affect the performance of client backup, archive, restore, and retrieve operations.
- Increase utilization of the recovery log, as well as increase the length of time for a transaction to commit.

Also consider the number of concurrent sessions to be run. It might be possible to run with a higher TXNGROUPMAX value with a few clients running. However, if there are hundreds of clients running concurrently, you might need to reduce the TXNGROUPMAX to help manage the recovery log usage and support this number of concurrent clients. If the performance effects are severe, they might affect server operations. See “Monitoring the database and recovery log” on page 636 for more information.

The following examples show how the TXNGROUPMAX option can affect performance throughput for operations to tape and the recovery log.

- The TXNGROUPMAX option is set to 20. The MAXSESSIONS option, which specifies the maximum number of concurrent client/server sessions, is set to 5. Five concurrent sessions are processing, and each file in the transaction requires 10 logged database operations. This would be a concurrent load of:

$$20 \times 10 \times 5 = 1000$$

This represents 1000 log records in the recovery log. Each time a transaction commits the data, the server can free 200 log records.

- The TXNGROUPMAX option is set to 2000. The MAXSESSIONS option is set to 5. Five concurrent sessions are processing, and each file in the transaction requires 10 logged database operations, resulting in a concurrent load of:

$$2000 \times 10 \times 5 = 100\ 000$$

This represents 100 000 log records in the recovery log. Each time a transaction commits the data, the server can free 20 000 log records.

**Remember:** Over time and as transactions end, the recovery log can release the space that is used by the oldest transactions. These transactions complete, and the log space usage increases.

Based on the previous two examples, five concurrent transactions with a TXNGROUPMAX setting of 2000 consume much more space in the recovery log. This increase in log space usage also increases the risk of running out of recovery log space.

The following table shows a comparison of the examples of the preceding TXNGROUPMAX settings. This example becomes more significant if a given log record takes 100 bytes.

*Table 69. Example of log bytes that are consumed by five concurrent sessions*

| TXNGROUPMAX Setting | Number of Log Bytes Consumed |
|---------------------|------------------------------|
| TXNGROUPMAX=20      | 100,000                      |
| TXNGROUPMAX=2000    | 10,000,000                   |

You can use several server options to tune server performance and reduce the risk of running out of recovery log space:

- Use the THROUGHPUTTIMETHRESHOLD and THROUGHPUTDATATHRESHOLD options with the TXNGROUPMAX option to prevent a slower performing node from holding a transaction open for extended periods.
- Increase the size of the recovery log when you increase the TXNGROUPMAX setting.

Evaluate the performance and characteristics of each node before increasing the TXNGROUPMAX setting. Nodes that have only a few larger objects to transfer do not benefit as much as nodes that have multiple, smaller objects to transfer. For example, a file server benefits more from a higher TXNGROUPMAX setting than does a database server that has one or two large objects. Other node operations can consume the recovery log at a faster rate. Be careful when increasing the TXNGROUPMAX settings for nodes that often perform high log-usage operations. The raw or physical performance of the disk drives that are holding the database and recovery log can become an issue with an increased TXNGROUPMAX setting. The drives must handle higher transfer rates to handle the increased load on the recovery log and database.

You can set the TXNGROUPMAX option as a global server option value, or you can set it for a single node. For optimal performance, specify a lower TXNGROUPMAX value (between 4 and 512). Select higher values for individual nodes that can benefit from the increased transaction size.

Refer to the **REGISTER NODE** command and the server options in the *Administrator's Reference*.

---

## Chapter 21. Managing a network of Tivoli Storage Manager servers

You might have several Tivoli Storage Manager servers in your network, at the same, or different locations. Tivoli Storage Manager provides functions to help you configure, manage, and monitor the servers that are connected to a network.

### About this task

An administrator who is working at one Tivoli Storage Manager server can work with Tivoli Storage Manager servers at other locations around the world.

See the following topics:

|                                                                                                   |
|---------------------------------------------------------------------------------------------------|
| <b>Concepts:</b>                                                                                  |
| “Concepts for managing server networks”                                                           |
| “Enterprise configuration” on page 682                                                            |
| <b>Tasks:</b>                                                                                     |
| “Setting up communications among servers” on page 686                                             |
| “Setting up communications for enterprise configuration and enterprise event logging” on page 686 |
| “Setting up communications for command routing with multiple source servers” on page 691          |
| “Completing tasks on multiple servers” on page 719                                                |
| “Storing data on another server as virtual volumes” on page 726                                   |

---

### Concepts for managing server networks

In a network of Tivoli Storage Manager servers, a server can play several different roles. For example, a server can send volumes to be archived on another server and also receive routed commands from a different server.

To manage a network of servers, you can use the following Tivoli Storage Manager capabilities:

- Configure and manage multiple servers with enterprise configuration.  
Distribute a consistent configuration for Tivoli Storage Manager servers through a configuration manager to managed servers. By having consistent configurations, you can simplify the management of many servers and clients.
- Perform tasks on multiple servers by using command routing, enterprise logon, and enterprise console.
- Send server and client events to another server for logging.
- Monitor many servers and clients from a single server.
- Store data on another server by using virtual volumes.

In the descriptions for working with a network of servers, when a server sends data, that server is sometimes referred to as a *source server*, and when a server receives data, it is sometimes referred to as a *target server*. In other words, one

Tivoli Storage Manager server might be both a source and a target server. At the same time, any Tivoli Storage Manager server can still provide backup, archive, and space management services to clients.

For details, see “Licensing Tivoli Storage Manager” on page 587.

## Enterprise configuration

The Tivoli Storage Manager enterprise configuration functions make it easier to consistently set up and manage a network of Tivoli Storage Manager servers. You can set up configurations on one server and distribute the configurations to other servers. You can change configurations and have the changes distributed automatically.

Figure 80 on page 683 illustrates a simple configuration. To use enterprise configuration, select the Tivoli Storage Manager server that is to act as the *configuration manager*. You might want to dedicate a new server for this purpose. At the configuration manager, define the details of the server configurations that you want to distribute. For example:

- Set up backup and archive policies and client option sets
- Designate one or more administrators to have access to the servers, and control their authority levels
- Define the servers that you want the configuration manager to manage or communicate with, and you set up communications among the servers

In one or more *profiles*, point to the definitions of the configuration information that you want to use to manage other servers.

On each server that is to receive the configuration information, identify the server as a *managed server* by defining a *subscription* to one or more profiles that are owned by the configuration manager. All the definitions that are associated with the profiles are then copied into the managed server's database. Things that are defined to the managed server in this way are managed objects that cannot be changed by the managed server. From then on, the managed server gets any changes to the managed objects from the configuration manager through the profiles. Managed servers receive changes to configuration information at time intervals set by the servers, or by command.

For details, see “Setting up enterprise configurations” on page 695.

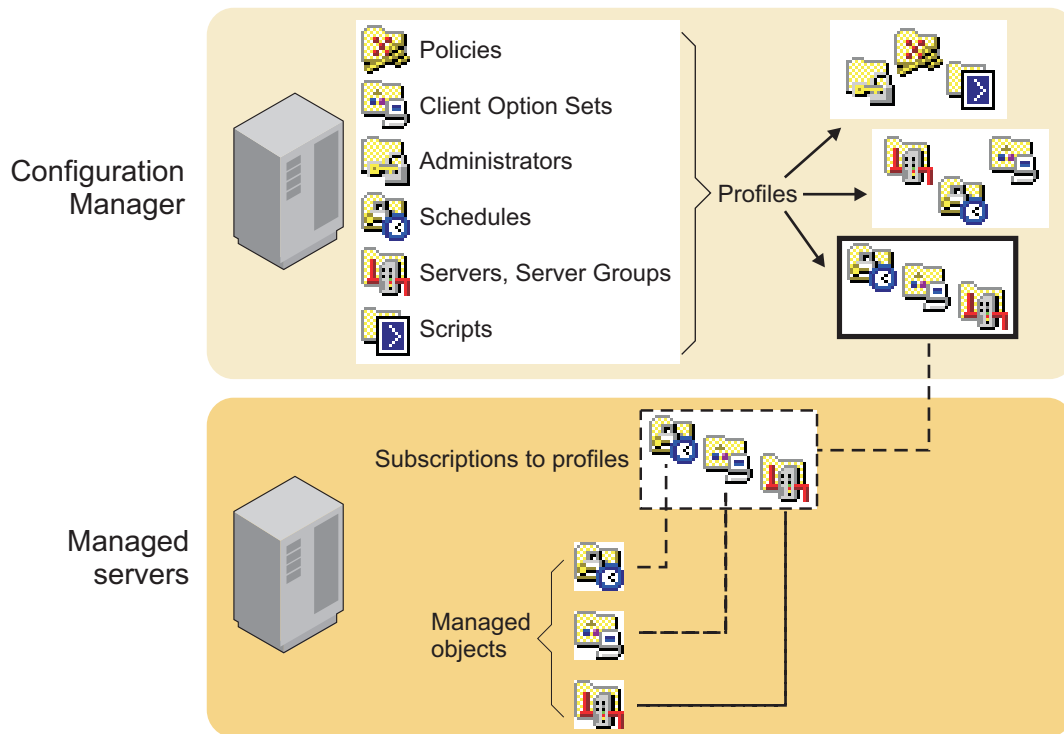


Figure 80. Enterprise configuration

## Command routing

Use the command-line interface to route commands to other servers.

The other servers must be defined to the server to which you are connected. You must also be registered on the other servers as an administrator with the administrative authority that is required for the command. To make routing commands easier, you can define a server group that has servers as members. Commands that you route to a server group are sent to all servers in the group.

For details, see “Setting up server groups” on page 722 and “Routing commands” on page 720.

## Central monitoring for the Tivoli Storage Manager server

Tivoli Storage Manager provides you with several ways to centrally monitor the activities of a server network.

The following methods are ways in which you can centrally monitor activities:

- Enterprise event logging, in which events are sent from one or more of servers to be logged at an event server.

For a description of the function, see “Enterprise event logging: logging events to another server” on page 845. For information about communications setup, see “Setting up communications for enterprise configuration and enterprise event logging” on page 686.

- Use the Operations Center to view server status and alerts. For more information, see Chapter 17, “Managing the storage environment from the Operations Center,” on page 577.
- Allowing designated administrators to log in to any of the servers in the network with a single user ID and password.



See “Managing multiple servers from a web-based interface” on page 719.

- Routing query commands to one or more of the servers in the network.

For a description of the function, see “Routing commands to one or more servers” on page 720. For information about communications setup, see “Setting up communications for enterprise configuration and enterprise event logging” on page 686.

## Data storage on another server

Tivoli Storage Manager lets one server store data in and retrieve data from the storage pool of another server. This data, which is stored as *virtual volumes*, can include database and storage pool backups, disaster recovery plan files, and data that is directly backed up, archived, or space managed from client nodes.

The data can also be a recovery plan file that is created by using disaster recovery manager (DRM). The source server is a client of the target server, and the data for the source server is managed only by the source server. In other words, the source server controls the expiration and deletion of the files that comprise the virtual volumes on the target server.

To use virtual volumes to store database and storage pool backups and recovery plan files, you must have the disaster recovery manager function. For details, see “Licensing Tivoli Storage Manager” on page 587.

For information about using virtual volumes with DRM, see Chapter 30, “Disaster recovery manager,” on page 1033.

## Examples: management of multiple Tivoli Storage Manager servers

The functions for managing multiple servers can be applied in many ways.

Here are two scenarios to give you some ideas about how you can use the functions:

- Setting up and managing Tivoli Storage Manager servers primarily from one location. For example, an administrator at one location controls and monitors servers at several locations.
- Setting up a group of Tivoli Storage Manager servers from one location, and then managing the servers from any of the servers. For example, several administrators are responsible for maintaining a group of servers. One administrator defines the configuration information on one server for distributing to servers in the network. Administrators on the individual servers in the network manage and monitor the servers.

### Example: management of multiple servers from one location

By using enterprise management, you can set up and manage the servers in your network from one location, the enterprise console.

For example, suppose that you are an administrator who is responsible for Tivoli Storage Manager servers at your own location, plus servers at branch office locations. Servers at each location have similar storage resources and client requirements. You can set up the environment as follows:

- Set up an existing or new Tivoli Storage Manager server as a configuration manager.

- Set up communications so that a configuration manager can send commands to its managed servers.
- Define the configuration that you want to distribute by defining policy domains, schedules, and other configuration information. Associate the configuration information with profiles.
- Have the managed servers subscribe to profiles.
- Activate policies and set up storage pools as needed on the managed servers.
- Set up enterprise monitoring by setting up one server as an event server. The event server can be the same server as the configuration manager or a different server.

After you complete the setup, you can manage many servers as if there was just one. You can perform any of the following tasks:

- Have administrators that can manage the group of servers from anywhere in the network by using the enterprise console, an interface available through a web browser.
- Have consistent policies, schedules, and client option sets on all servers.
- Changes configurations and have the changes distributed automatically to all servers. Allow local administrators to monitor and tune their own servers.
- Perform tasks on any server or all servers by using command routing from the enterprise console.
- Back up the databases of the managed servers on the automated tape library that is attached to the server that is the configuration manager. You use virtual volumes to accomplish this task.
- Log on to individual servers from the enterprise console without having to reenter your password, if your administrator ID and password are the same on each server.

### **Example: management of multiple servers from any server**

By using enterprise management, you can manage the servers in your network from many locations.

For example, suppose that you are an administrator responsible for servers that are in different departments on a college campus. The servers have some requirements in common, but also have many unique client requirements. You can set up the environment as follows:

- Set up an existing or new Tivoli Storage Manager server as a configuration manager.
- Set up communications so that commands can be sent from any server to any other server.
- Define any configuration that you want to distribute by defining policy domains, schedules, and other configuration information, on the configuration manager. Associate the configuration information with profiles.
- Have the managed servers subscribe to profiles as needed.
- Activate policies and set up storage pools as needed on the managed servers.
- Set up enterprise monitoring by setting up one server as an event server. The event server can be the same server as the configuration manager or a different server.

After you set up your environment, you can manage the servers from any server. You can do any of the following tasks:

- Use enterprise console to monitor all the servers in your network.

- Perform tasks on any or all servers by using the enterprise console and command routing.
- Manage the group of servers from anywhere in the network. Allow local administrators to monitor and tune their own servers.

---

## Enterprise-administration planning

To take full advantage of the functions of enterprise administration, decide on the servers you want to include in the enterprise network, the server from which you want to manage the network, and other important issues.

Consider the following items when you are planning for Enterprise Administration:

- The servers that you want to include in the enterprise network. The servers must have unique names.
- The server or servers from which you want to manage the network. Servers can have multiple roles. For example, one server can act as a server for backup-archive clients, as the configuration manager, and as the event server. You can also set up separate servers to fill each of these roles.
- Whether you want administrators to be able to route commands to other servers. If you want administrators to route commands, decide on the servers from which and to which commands are routed.
- The administrator activities that you want to be centrally managed.
- The authority level of the administrators and the servers to which they can have access.

---

## Setting up communications among servers

You can set up communications for enterprise configuration, enterprise event logging, and command routing. When you set up communications among servers for any purpose, ensure that servers have unique names.

### About this task

Communication setup for server-to-server virtual volumes is described in “Setting up source and target servers for virtual volumes” on page 728. For more information about the SET SERVERNAME command, see “Setting the server name” on page 607.

## Setting up communications for enterprise configuration and enterprise event logging

The communication setup for enterprise configuration and enterprise event logging, which is through TCP/IPv4 or IPv6, is identical.

### About this task

The examples that are shown here apply to both functions. If you are set up for one, you are set up for the other. However, be aware that the configuration manager and event server are not defined by setting up communications. You must identify a server as a configuration manager (SET CONFIGMANAGER command) or an event server (DEFINE EVENTSERVER command). Furthermore, a configuration manager and an event server can be the same server or different servers.

### Enterprise configuration

Each managed server must be defined to the configuration manager, and the configuration manager must be defined to each managed server.

### Enterprise event logging

Each server that is sending events to an event server must be defined to the event server, and the event server must be defined to each source server.

The following examples of setting up communications might be used to create these configurations:

- A server that is named HEADQUARTERS as a configuration manager and two servers, MUNICH and STRASBOURG, as managed servers.
- HEADQUARTERS as an event server and MUNICH and STRASBOURG as source servers.

For a pair of servers to communicate with each other, each server must be defined to the other. For example, if a configuration manager manages three managed servers, there are three server pairs. You can issue separate definitions from each server in each pair, or you can “cross define” a pair in a single operation. Cross definition can be useful in large or complex networks. The following scenarios and accompanying figures illustrate the two methods.

**Using separate definitions** – Follow this sequence:

### Procedure

1. **On MUNICH:** Specify the server name and password of MUNICH.  
**On STRASBOURG:** Specify the server name and password of STRASBOURG.  
**On HEADQUARTERS:** Specify the server name and password of HEADQUARTERS.
2. **On HEADQUARTERS:** Define MUNICH (whose password is BERYL and whose address is 9.115.2.223:1919) and STRASBOURG (whose password is FLUORITE and whose address is 9.115.2.178:1715).  
**On MUNICH and STRASBOURG:** Define HEADQUARTERS (whose password is AMETHYST and whose address is 9.115.4.177:1823).

### Results

Figure 81 on page 688 shows the servers and the commands that are issued on each:

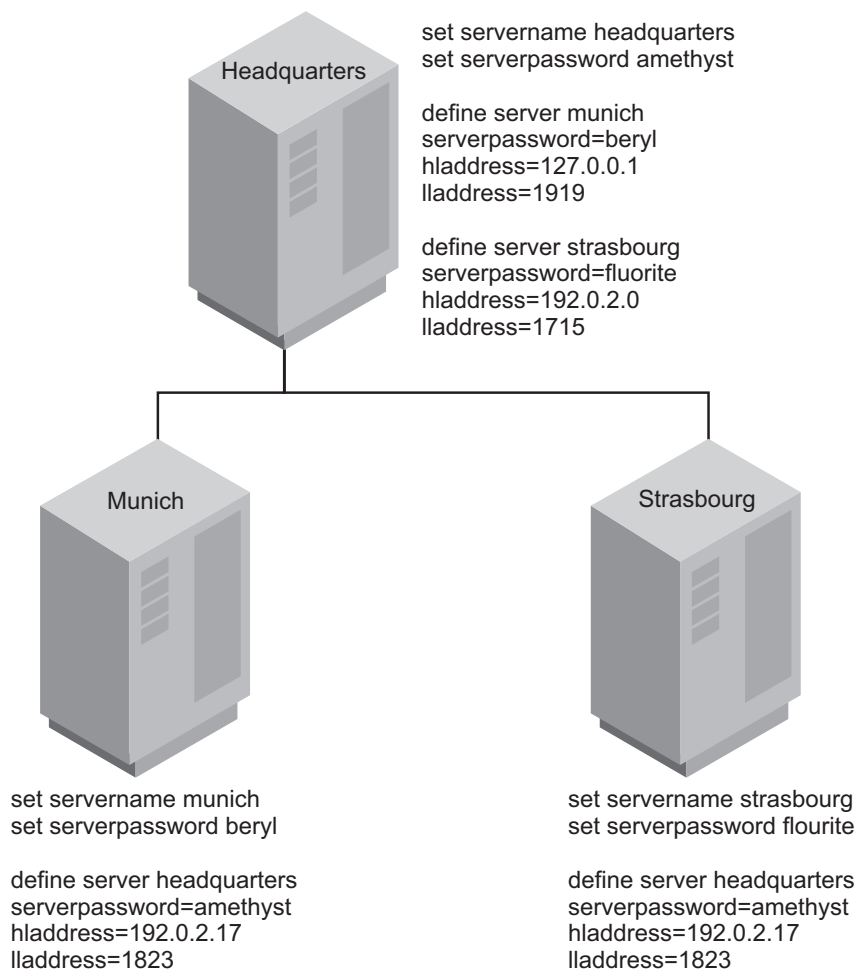


Figure 81. Communication configuration with separate server definitions

**Using Cross Definitions – Follow this sequence:**

1. **On MUNICH:** Specify the server name, password, and high and low-level addresses of MUNICH. Specify that cross define is permitted.  
**On STRASBOURG:** Specify the server name, password, and high and low-level addresses of STRASBOURG. Specify that cross define is permitted.  
**On HEADQUARTERS:** Specify the server name, password, and high and low-level addresses of HEADQUARTERS.
2. **On HEADQUARTERS:** Define MUNICH and STRASBOURG, specifying that cross define should be done.

Figure 82 on page 689 shows the servers and the commands that are issued on each:

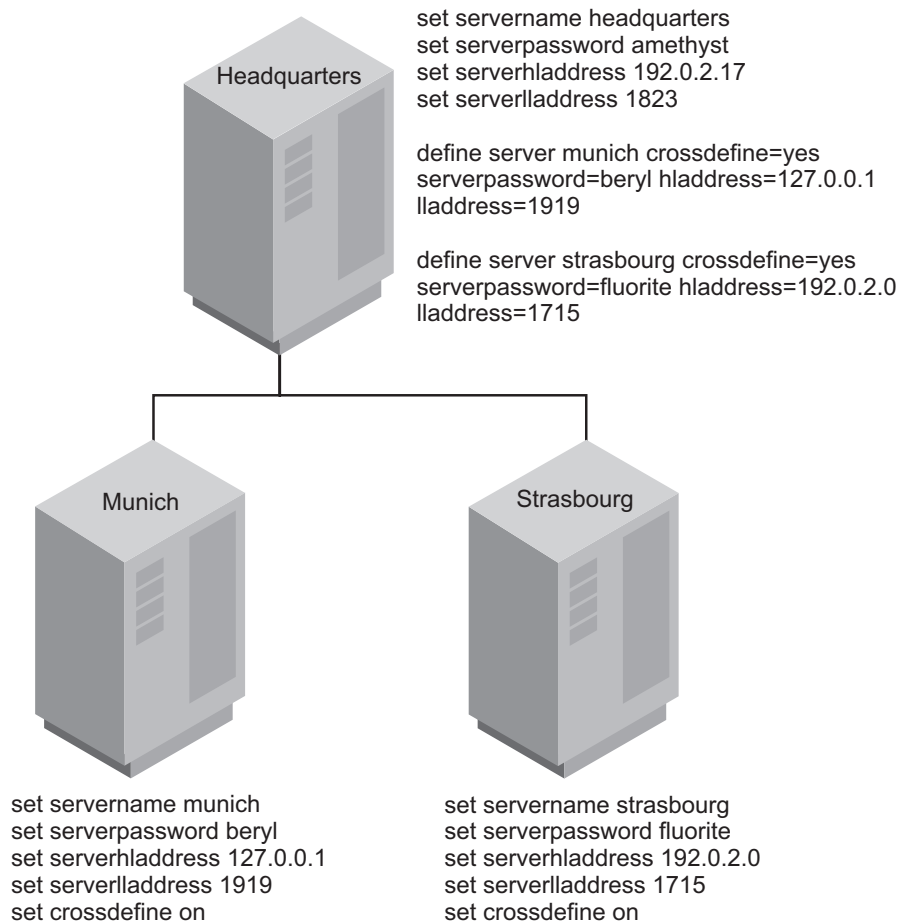


Figure 82. Communication configuration with cross definition

**Note:** Issuing the SET SERVERNAME command can affect scheduled backups until a password is reentered. Windows clients use the server name to identify which passwords belong to which servers. Changing the server name after the clients are connected forces the clients to reenter the passwords. On a network where clients connect to multiple servers, it is recommended that all of the servers have unique names.

### Communication security

Security for this communication configuration is enforced through the exchange of passwords (which are encrypted) and, in the case of enterprise configuration only, verification keys.

Communication among servers, which is through TCP/IP, requires that the servers verify server passwords (and verification keys). For example, assume that HEADQUARTERS begins a session with MUNICH:

1. HEADQUARTERS, the source server, identifies itself by sending its name to MUNICH.
2. The two servers exchange verification keys (enterprise configuration only).
3. HEADQUARTERS sends its password to MUNICH, which verifies it against the password that is stored in its database.
4. If MUNICH verifies the password, it sends its password to HEADQUARTERS, which, in turn, verifies the password.

**Note:** If another server named MUNICH tries to contact HEADQUARTERS for enterprise configuration, the attempt fails. It fails because the verification key does not match. If MUNICH was moved or restored, you can issue the UPDATE SERVER command with the FORCERESYNC parameter to override the condition.

## Setting up communications for command routing

When you are setting up communications for command routing, you must define the target servers to the source servers, and the same administrator must be registered on all servers. Using enterprise configuration, you can easily distribute the administrator information to all the servers.

### About this task

**Note:** You must be registered as an administrator with the same name and password on the source server and all target servers. The privilege classes do not need to be the same on all servers. However, to successfully route a command to another server, an administrator must have the minimum required privilege class for that command on the server from which the command is being issued.

For command routing in which one server is always the sender, you would define only the target servers to the source server. If commands can be routed from any server to any other server, each server must be defined to all the others.

### Setting up communications for command routing with one source server

The process of setting up communications for command routing can, at times, be a challenge.

### About this task

The example that is provided shows you how you can set up communications for administrator HQ on the server HEADQUARTERS who routes commands to the servers MUNICH and STRASBOURG. Administrator HQ has the password SECRET and has system privilege class.

### Procedure

The procedure for setting up communications for command routing with one source server is shown in the following steps.

- On HEADQUARTERS, register administrator HQ and specify the server names and addresses of MUNICH and STRASBOURG.

```
register admin hq secret
grant authority hq classes=system
```

```
define server munich serverpassword=beryl hladdress=9.115.2.223 lladdress=1919
define server strasbourg serverpassword=fluorite hladdress=9.115.2.178
lladdress=1715
```

**Note:** Command routing uses the ID and password of the Administrator. It does not use the password or server password that is set in the server definition.

- On MUNICH and STRASBOURG, register administrator HQ with the specific privilege class on each server.

```
register admin hq secret
grant authority hq classes=system
```

**Note:** If your server network is using enterprise configuration, you can automate the preceding operations. You can distribute the administrator and server lists to MUNICH and STRASBOURG. In addition, all server definitions and server groups are distributed by default to a managed server when it first subscribes to any profile on a configuration manager. Therefore, it receives all the server definitions that exist on the configuration manager, thus enabling command routing among the servers.

## **Setting up communications for command routing with multiple source servers**

When you are setting up communications for command routing, you must define all the servers to each other.

### **About this task**

The examples that are provided show you how to set up communications if the administrator, HQ, can route commands from any of the three servers to any of the other servers. You can separately define each server to each of the other servers, or you can “cross define” the servers. In cross definition, defining MUNICH to HEADQUARTERS also results in automatically defining HEADQUARTERS to MUNICH.

### **Creating separate definitions:**

When you are setting up communications for command routing, you can define each server to each of the other servers.

### **Procedure**

To create separate definitions, complete the following steps:

1. On MUNICH, specify the server name and password of MUNICH. Register administrator HQ and grant HQ system authority.  
On STRASBOURG, specify the server name and password of STRASBOURG. Register administrator HQ and grant HQ system authority.  
On HEADQUARTERS, specify the server name and password of HEADQUARTERS. Register administrator HQ and grant HQ system authority.
2. On HEADQUARTERS, define MUNICH (whose password is BERYL and whose address is 9.115.2.223:1919) and STRASBOURG (whose password is FLUORITE and whose address is 9.115.2.178:1715).  
On MUNICH, define HEADQUARTERS (whose password is AMETHYST and whose address is 9.115.4.177:1823) and STRASBOURG.  
On STRASBOURG, define HEADQUARTERS and MUNICH.

### **Results**

Figure 83 on page 692 shows the servers and the commands that are issued on each.



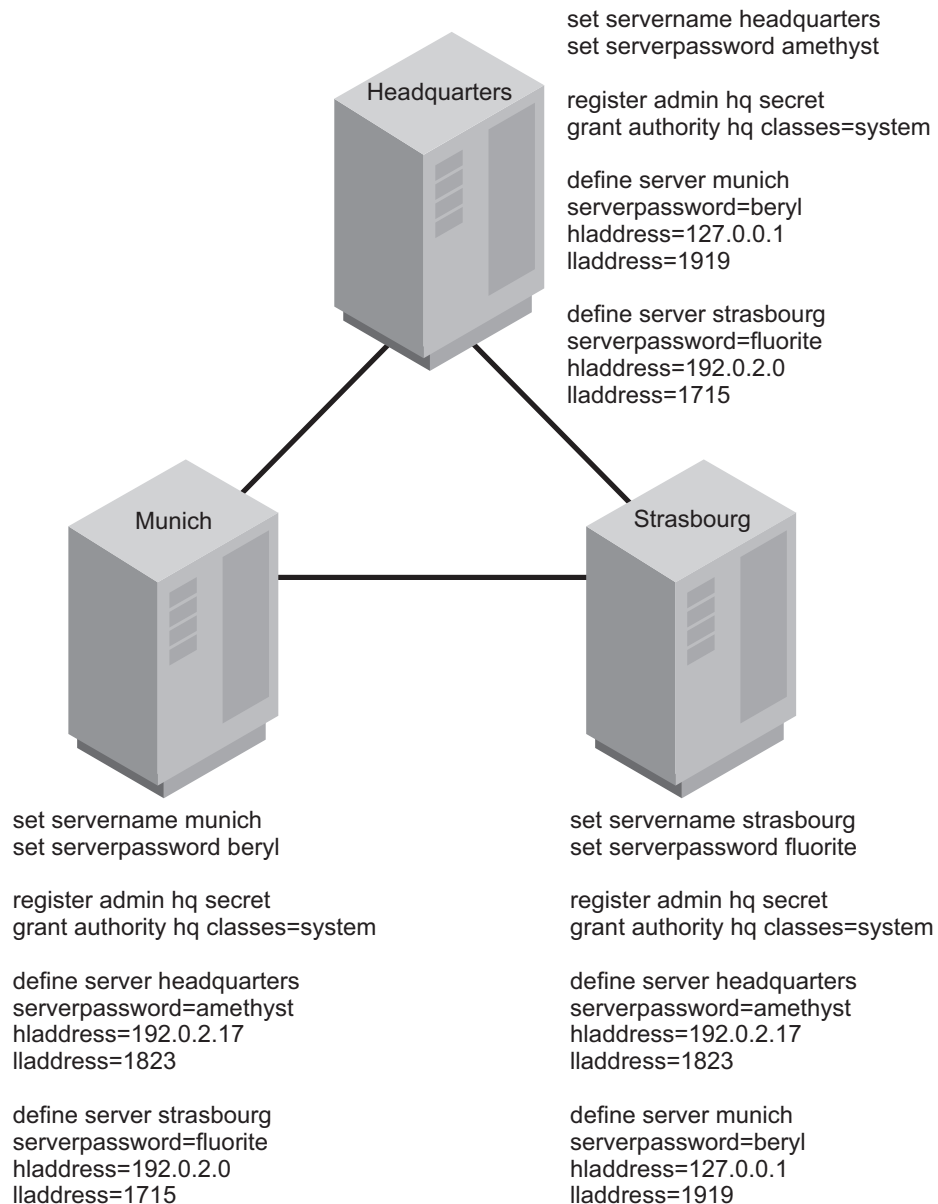


Figure 83. Communication configuration with separate server definitions

### Creating cross definitions:

When you are setting up communications for command routing, you can cross-define the other servers.

### Procedure

To create cross definitions, complete the following steps:

1. On MUNICH, specify the server name, password, and high and low-level addresses of MUNICH. Specify that cross define is permitted. Register administrator HQ and grant HQ system authority.  
On STRASBOURG, specify the server name, password, and high and low-level addresses of STRASBOURG. Specify that cross define is permitted. Register administrator HQ and grant HQ system authority.

On HEADQUARTERS, specify the server name, password, and high and low-level addresses of HEADQUARTERS. Register administrator HQ and grant HQ system authority.

2. On HEADQUARTERS, define MUNICH and STRASBOURG, specifying that cross define is to be completed.
3. On MUNICH, define STRASBOURG, specifying that cross define is to be completed.

## Results

**Note:** If your server network is using enterprise configuration, you can automate the preceding operations. You can distribute the administrator lists and server lists to MUNICH and STRASBOURG. In addition, all server definitions and server groups are distributed by default to a managed server when it first subscribes to any profile on a configuration manager. Therefore, it receives all the server definitions that exist on the configuration manager, thus enabling command routing among the servers.

Figure 84 on page 694 shows the servers and the commands that are issued on each.

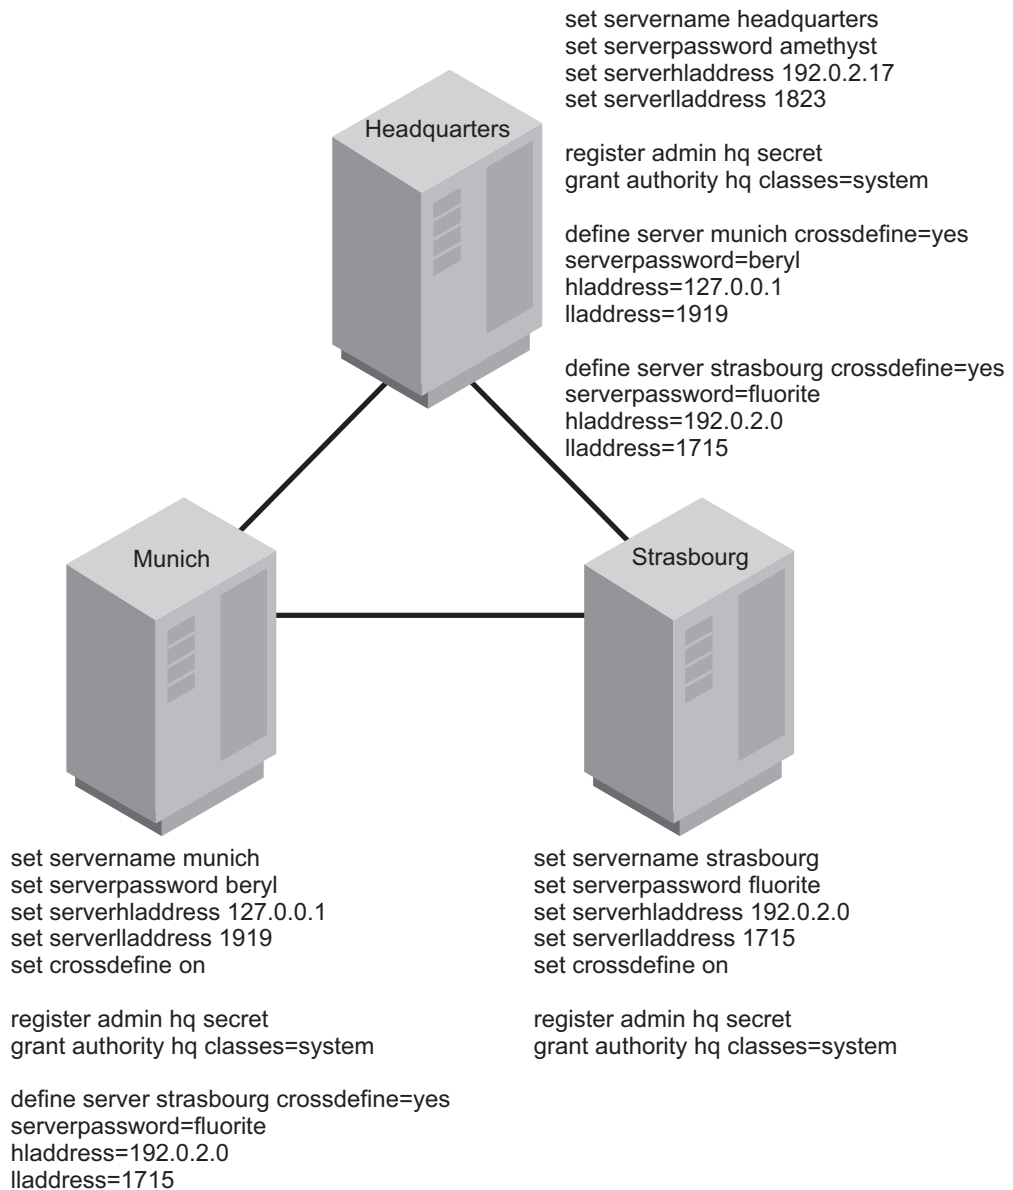


Figure 84. Communication configuration with cross definitions

## Updating and deleting servers

You can update and delete server definitions for server-to-server virtual volumes, enterprise configuration, and enterprise event logging.

### About this task

You can update a server definition by issuing the UPDATE SERVER command.

- For server-to-server virtual volumes:
  - If you update the node name, you must also update the password.
  - If you update the password but not the node name, the node name defaults to the server name specified by the SET SERVERNAME command.
- For enterprise configuration and enterprise event logging: If you update the server password, it must match the password that is specified by the SET SERVERPASSWORD command at the target server.

- For enterprise configuration: When a server is first defined at a managed server, that definition cannot be replaced by a server definition from a configuration manager. This restriction prevents the definition at the managed server from being inadvertently replaced. Such a replacement might disrupt functions that require communication among servers, for example command routing or virtual volumes.

To allow replacement, update the definition at the managed server by issuing the UPDATE SERVER command with the ALLOWREPLACE=YES parameter. When a configuration manager distributes a server definition, the definition always includes the ALLOWREPLACE=YES parameter.

You can delete a server definition by issuing the DELETE SERVER command. For example, to delete the server that is named NEWYORK, enter the following command:

```
delete server newyork
```

The deleted server is also deleted from any server groups of which it is a member.

You cannot delete a server if any of the following conditions are true:

- The server is defined as an event server.  
You must first issue the DELETE EVENTSERVER command.
- The server is a target server for virtual volumes.  
A target server is named in a DEFINE DEVCLASS (DEVTYPE=SERVER) command. You must first change the server name in the device class or delete the device class.
- The server is named in a device class definition whose device type is SERVER.
- The server has paths that are defined to a file drive.
- The server has an open connection to or from another server.  
You can find an open connection to a server by issuing the QUERY SESSION command.

See “Setting up server groups” on page 722 for information about server groups.

---

## Setting up enterprise configurations

With profiles, you can designate the configuration information that is distributed to managed servers. Then, you can set up other servers as managed servers. The managed servers receive configuration information through subscriptions to profiles on the configuration manager.

### About this task

Each managed server stores the distributed information as managed objects in its database. Managed servers receive periodic updates of the configuration information from the configuration manager, or an administrator can trigger an update by command.

If you use an LDAP directory server to authenticate passwords, any target servers must be configured for LDAP passwords. Data that is replicated from a node that authenticates with an LDAP directory server is inaccessible if the target server is not properly configured. If your target server is not configured, replicated data from an LDAP node can still go there. But the target server must be configured to use LDAP in order for you to access the data.

You can distribute the following configuration information from a configuration manager to managed servers:

- Administrators, including authorities for them
- Policy objects, including policy domains, and the policy sets, management classes, copy groups, and client schedules that are associated with them.
- Administrative command schedules
- Tivoli Storage Manager server scripts
- Client option sets
- Server definitions
- Server groups

“Enterprise configuration scenario” gives you an overview of the steps to take for one possible implementation of enterprise configuration. Sections that follow give more details on each step. For details on the attributes that are distributed with these objects, see “Associating configuration information with a profile” on page 701. After you set up server communication as described in “Setting up communications for enterprise configuration and enterprise event logging” on page 686, you set up the configuration manager and its profiles.

## Enterprise configuration scenario

To illustrate how you might use the enterprise configuration functions, suppose that your enterprise has offices around the world, with one or more Tivoli Storage Manager servers at each location. To make managing these servers easier, you want to control the configuration of all Tivoli Storage Manager servers from one Tivoli Storage Manager server in the headquarters office.

### About this task

Figure 85 shows the hierarchy that you want to set up.

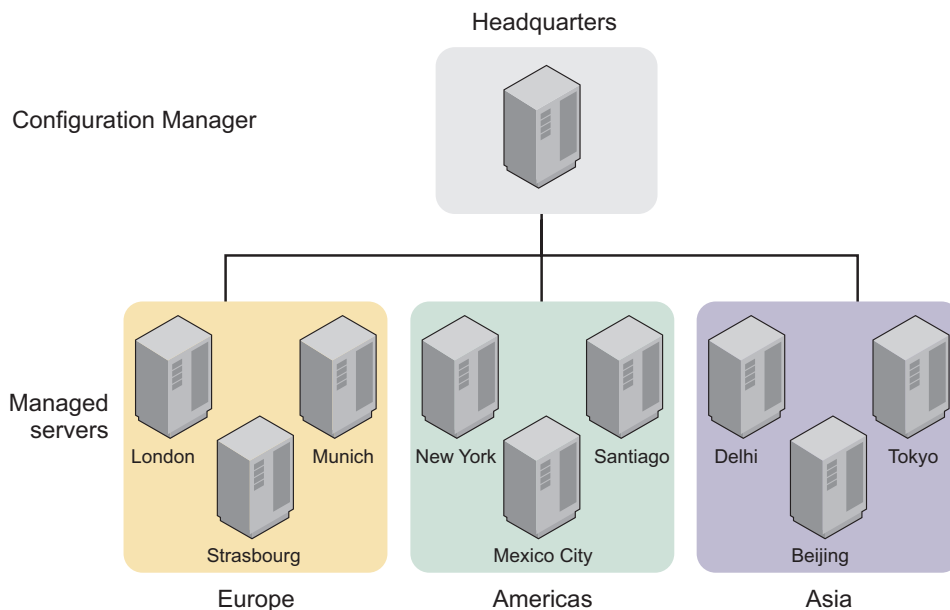


Figure 85. A scenario for implementing enterprise configuration

You want to set up a configuration manager named HEADQUARTERS. Managed servers have the names of cities where they are located. You have three groups of

managed servers, one in the Americas, one in Europe, and one in Asia. Each of the servers supports backup and archive services for client machines in that office. For client backup operations, you want to use the default policy that stores backups on disk. Each server has an automated tape library that is configured to work with Tivoli Storage Manager. You want to use the tape library at each location for client archive operations and for Tivoli Storage Manager server database backups. You want to be able to monitor activities on all servers. You also want to designate some other users as administrators who can work with these servers.

The following sections give you an overview of the steps to take to complete this setup.

## Setting up a configuration manager

You are required to issue specific commands to set up one Tivoli Storage Manager server as a configuration manager.

### About this task

Figure 86 illustrates the commands that you must issue to set up one Tivoli Storage Manager server as a configuration manager. The following procedure gives you an overview of the steps that are required to set up a server as a configuration manager.

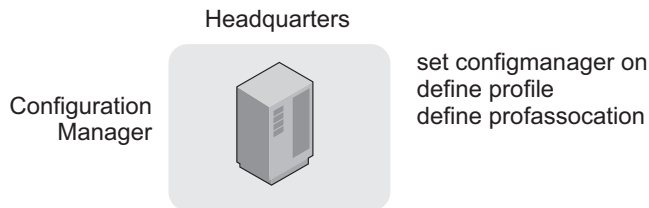


Figure 86. Setting up a configuration manager

### Procedure

1. Decide whether to use the existing Tivoli Storage Manager server in the headquarters office as the configuration manager or to install a new Tivoli Storage Manager server on a system.
2. Set up the communications among the servers.
3. Identify the server as a configuration manager.

Use the following command:

```
set configmanager on
```

This command automatically creates a profile that is named `DEFAULT_PROFILE`. The default profile includes all the server and server group definitions on the configuration manager. As you define new servers and server groups, they are also associated with the default profile.

4. Create the configuration to distribute.

The tasks that might be involved include the following tasks:

- Register administrators and grant authorities to the administrators that you want to be able to work with all the servers.
- Define policy objects and client schedules
- Define administrative schedules
- Define Tivoli Storage Manager server scripts
- Define client option sets

- Define servers
- Define server groups

**Example 1:** You need a shorthand way to send commands to different groups of managed servers. You can define server groups. For example, you can define a server group that is named AMERICAS for the servers in the offices in North America and South America.

**Example 2:** You want each managed server to back up its database and storage pools regularly. You can set up Tivoli Storage Manager server scripts and schedules to automatically run these scripts everyday. You can do the following tasks:

- Verify or define server scripts that perform these operations.
- Verify or define administrative command schedules that run these scripts.

**Example 3:** You want clients to back up data to the default disk storage pool, BACKUPPOOL, on each server. But you want clients to archive data directly to the tape library attached to each server. You can do the following tasks:

- In the policy domain that you point to in the profile, update the archive copy group so that TAPEPOOL is the name of the destination storage pool.
- On each server that is to be a managed server, ensure that you have a tape storage pool named TAPEPOOL.

**Note:** You must set up the storage pool itself (and associated device class) on each managed server, either locally or by using command routing. If a managed server already has a storage pool that is associated with the automated tape library, you can rename the pool to TAPEPOOL.

**Example 4:** You want to ensure that client data is consistently backed up and managed on all servers. You want all clients to be able to store three backup versions of their files. You can do the following tasks:

- Verify or define client schedules in the policy domain so that clients are backed up on a consistent schedule.
- In the policy domain that you point to in the profile, update the backup copy group so that three versions of backups are allowed.
- Define client option sets so that basic settings are consistent for clients as they are added.

## 5. Define one or more profiles.

For example, you can define one profile that is named ALLOFFICES that points to all the configuration information (policy domain, administrators, scripts). You can also define profiles for each type of information, so that you have one profile that points to policy domains, and another profile that points to administrators, for example.

See “Setting up communications among servers” on page 686 for details. For more information, see “Creating the default profile on a configuration manager” on page 700. See “Defining a server group and members of a server group” on page 723 for details. For details, see “Creating and changing configuration profiles” on page 701.

## Setting up a managed server

Setting up the managed server can be done by an administrator who is working at a central location, or by administrators who are working at the servers that will be managed servers.

### About this task

Figure 87 shows the specific commands that are needed to set up one Tivoli Storage Manager server as a managed server. The following procedure gives you an overview of the steps that are required to set up a server as a managed server.

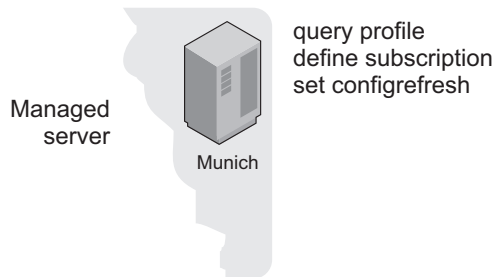


Figure 87. Setting up a managed server

A server becomes a managed server when that server first subscribes to a profile on a configuration manager.

### Procedure

1. Query the server to look for potential conflicts.

Look for definitions of objects on the managed server that have the same name as objects defined on the configuration manager. With some exceptions, these objects are overwritten when the managed server first subscribes to the profile on the configuration manager.

If the managed server is a new server and you did not define anything, the only objects you are the defaults (for example, the STANDARD policy domain).

2. Subscribe to one or more profiles.

A managed server can subscribe to profiles on only one configuration manager.

If you receive an error message during the configuration refresh, such as a local object that cannot be replaced, resolve the conflict, and refresh the configuration again. You can either wait for the automatic refresh period to be reached, or kick off a refresh by issuing the SET CONFIGREFRESH command, setting or resetting the interval.

3. If the profile included policy domain information, activate a policy set in the policy domain, add or move clients to the domain, and associate any needed schedules with the clients.

You might receive warning messages about storage pools that do not exist, but that are needed for the active policy set. Define any storage pools that are needed by the active policy set, or rename existing storage pools.

4. If the profile included administrative schedules, make the schedules active.

Administrative schedules are not active when they are distributed by a configuration manager. The schedules do not run on the managed server until you make them active on the managed server. See "Schedule parameters" on page 613.



5. Set how often the managed server contacts the configuration manager to update the configuration information that is associated with the profiles. The initial setting for refreshing the configuration information is 60 minutes. For more information, see the following topics:
  - “Associating configuration information with a profile” on page 701
  - “Defining storage pools” on page 257
  - “Getting information about profiles” on page 708
  - “Refreshing configuration information” on page 715
  - “Renaming storage pools” on page 422
  - “Subscribing to a profile” on page 711

## Creating the default profile on a configuration manager

To set up one Tivoli Storage Manager server as the source for configuration information for other servers, identify the server as a configuration manager. A configuration manager can be an existing Tivoli Storage Manager server that already provides services to clients, or can be a server that is dedicated to just providing configuration information to other Tivoli Storage Manager servers.

### About this task

| Task                                       | Required Privilege Class |
|--------------------------------------------|--------------------------|
| Set up a server as a configuration manager | System                   |

Issue the following command:

```
set configmanager on
```

When a server becomes a configuration manager, the server automatically creates a default profile named `DEFAULT_PROFILE`. The default profile contains any definitions of servers and server groups that exist on the configuration manager. You can change or delete the profile that is named `DEFAULT_PROFILE`.

When a managed server first subscribes to a profile on a configuration manager, the configuration manager automatically also subscribes the managed server to the profile named `DEFAULT_PROFILE`, if it exists. The information that is distributed through this profile gets refreshed in the same way as other profiles. This behavior helps ensure that all servers have a consistent set of server and server group definitions for all servers in the network.

If you do not change the `DEFAULT_PROFILE`, whenever a managed server subscribed to the `DEFAULT_PROFILE` profile refreshes configuration information, the managed server receives definitions for all servers and server groups that exist on the configuration manager at the time of the refresh. As servers and server groups are added, deleted, or changed on the configuration manager, the changed definitions are distributed to subscribing managed servers.

If the configuration manager is on a V6.3.3 or later server, password authentication methods can cause conflicts between the configuration manager and the managed servers. Administrator IDs with LDAP-authenticated passwords on a V6.3.3 or later server cannot be accessed on a managed server that is on a pre-V6.3.3 server.

## Creating and changing configuration profiles

You create configuration profiles on a configuration manager, which distributes the information that is associated with the profiles to any managed server that subscribes to those profiles.

### Procedure

Create a configuration profile by completing the following steps:

1. Defining the profile.
2. Associating the configuration information with the profile.

### Results

After you define the profile and its associations, a managed server can subscribe to the profile and obtain the configuration information.

After you define a profile and associate information with the profile, you can change the information later. While you change profiles, you can lock the profiles to prevent managed servers from refreshing their configuration information. To distribute the changed information that is associated with a profile, you can unlock the profile, and either wait for each managed server to refresh its configuration to get the changed information or notify each managed server to refresh its configuration. The following sections provide information on each of these tasks.

### Defining the profile

When you define the profile, you select the name and can include a description.

#### About this task

| Task            | Required Privilege Class |
|-----------------|--------------------------|
| Define profiles | System                   |

For example, to define a profile that is named ALLOFFICES, issue the following command:

```
define profile alloffices
 description='Configuration to be used by all offices'
```

### Associating configuration information with a profile

After you define a profile, you associate the configuration information that you want to distribute through that profile.

#### About this task

| Task                        | Required Privilege Class |
|-----------------------------|--------------------------|
| Define profile associations | System                   |

You can associate the following configuration information with a profile:

- Tivoli Storage Manager administrators, including their authorities.
- Policy domains.
- Servers definitions.
- Server groups.
- Administrative command schedules.

- Tivoli Storage Manager server scripts.
- Client option sets.

Before you can associate specific configuration information with a profile, the definitions must exist on the configuration manager. For example, to associate a policy domain that is named ENGDOMAIN with a profile, you must first define the ENGDOMAIN policy domain on the configuration manager.

Suppose you want the ALLOFFICES profile to distribute policy information from the STANDARD and ENGDOMAIN policy domains on the configuration manager. Enter the following command:

```
define profassociation alloffices domains=standard,engdomain
```

You can make the association more dynamic by specifying the special character, \* (asterisk), by itself. When you specify the \*, you can associate all existing objects with a profile without specifically naming them. If you later add more objects of the same type, the new objects are automatically distributed through the profile. For example, suppose that you want the ADMINISTRATORS profile to distribute all administrators that are registered to the configuration manager. Enter the following commands on the configuration manager:

```
define profile administrators
 description='Profile to distribute administrators IDs'

define profassociation administrators admins=*
```

Whenever a managed server that is subscribed to the ADMINISTRATORS profile refreshes configuration information, it receives definitions for all administrators that exist on the configuration manager at the time of the refresh. As administrators are added, deleted, or changed on the configuration manager, the changed definitions are distributed to subscribing managed servers.

For more information, see the following topics:

- “Configuring information for administrative command schedules” on page 705
- “Configuring information for policy domains” on page 703
- “Configuring information for servers and server groups” on page 704
- “Configuration information for Tivoli Storage Manager administrators”
- “Tivoli Storage Manager server scripts” on page 618
- “Managing client option sets” on page 475

## **Configuration information for Tivoli Storage Manager administrators**

Be careful if you are distributing definitions of administrators that have the same name as administrators already defined to managed servers. The configuration refresh overwrites the administrator definition and authority that are defined on the managed server.

If the authority level of an administrator is less on the configuration manager than it was on the managed server, you might have problems with access to the managed server after you distribute the administrator definition.

The configuration manager does not distribute information about whether an administrator is locked (preventing access to the server).

The administrator with the name `SERVER_CONSOLE` is never distributed from the configuration manager to a managed server.

For administrator definitions that have node authority, the configuration manager distributes only information such as password and contact information. Node authority for the managed administrator can be controlled on the managed server by using the `GRANT AUTHORITY` and `REVOKE AUTHORITY` commands and specifying the `CLASS=NODE` parameter.

## Configuring information for policy domains

When you point to a policy domain in a profile, the configuration information that is later sent to the managed servers includes the policy domain itself and all policy sets with their associated management classes, copy groups, and client schedules in the domain.

### About this task

A configuration manager does not distribute the following information:

- An active policy set and any of its associated management classes, copy groups, and client schedules. On each managed server, you must activate a policy set in each managed policy domain.
- Associations between clients and schedules. To have clients in a managed policy domain run client schedules, you must associate the clients with the schedules on the managed server.
- Client actions, which are schedules that are created by using the `DEFINE CLIENTACTION` command. On each managed server, you can define and delete client actions, even if the corresponding domain is a managed object.
- Definitions for any storage pools that are identified as destinations in the policy. Definitions of storage pools and device classes are not distributed by a configuration manager.

Policy domains can refer to storage pool names in the management classes, backup copy groups, and archive copy groups. As you set up the configuration information, consider whether managed servers already have or can set up or rename storage pools with these names.

A subscribing managed server might already have a policy domain with the same name as the domain associated with the profile. The configuration refresh overwrites the domain that is defined on the managed server unless client nodes are already assigned to the domain. After the domain becomes a managed object on the managed server, you can associate clients with the managed domain. Future configuration refreshes can then update the managed domain.

If nodes are assigned to a domain with the same name as a domain that is being distributed, the domain is not replaced. This safeguard prevents inadvertent replacement of policy that might lead to loss of data. To replace an existing policy domain with a managed domain of the same name, complete the following steps on the managed server:

### Procedure

1. Copy the domain.
2. Move all clients that are assigned to the original domain to the copied domain.
3. Trigger a configuration refresh.
4. Activate the appropriate policy set in the new, managed policy domain.
5. Move all clients back to the original domain, which is now managed.

## Configuring information for servers and server groups

The DEFAULT\_PROFILE that is automatically created on a configuration manager already points to all servers and server groups that are defined to that server. If you leave the DEFAULT\_PROFILE intact, you do not need to include servers or server groups in any other profile.

### About this task

Any servers and server groups that you define later are associated automatically with the default profile and the configuration manager distributes the definitions at the next refresh. For a server definition, the following attributes are distributed:

- Communication method
- TCP/IP address (high-level address), Version 4 or Version 6
- Port number (low-level address)
- Server password
- Server URL
- The description

When server definitions are distributed, the attribute for allowing replacement is always set to YES. You can set other attributes, such as the server's node name, on the managed server by updating the server definition.

A managed server might already have a server that is defined with the same name as a server associated with the profile. The configuration refresh does not overwrite the local definition unless the managed server allows replacement of that definition. On a managed server, you allow a server definition to be replaced by updating the local definition. For example:

```
update server santiago allowreplace=yes
```

This safeguard prevents disruption of existing functions that require communication among servers (such as virtual volumes).

Table 70 summarizes what happens when servers or server groups that are being distributed have the same names as servers or server groups on the managed server.

*Table 70. Results of configuration refresh with duplicate object names*

| Local definition (on managed server) | Object with duplicate name to be distributed | Result of configuration refresh                                                                                                                                                 |
|--------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Server                               | Server                                       | The local server definition is replaced by the distributed server definition only if an administrator for the managed server updated the local definition to allow replacement. |
| Server                               | Server group                                 | The local server definition remains. The server group definition is not distributed.                                                                                            |
| Server group                         | Server                                       | The local server group is deleted. The server definition is distributed.                                                                                                        |
| Server group                         | Server group                                 | The local server group definition is replaced by the distributed server group definition.                                                                                       |

## Configuring information for administrative command schedules

When the configuration manager distributes administrative schedules, the schedules are not active on the managed server. An administrator on the managed server must activate any managed schedules to have them run on the managed server.

### About this task

A configuration refresh does not replace or remove any local schedules that are active on a managed server. However, a refresh can update an active schedule that is already managed by a configuration manager.

## Changing a profile

You can change a profile and its associated configuration information.

### About this task

| Task                        | Required Privilege Class |
|-----------------------------|--------------------------|
| Define profile associations | System                   |
| Update profiles             | System                   |

For example, if you want to add a policy domain that is named FILESERVERS to objects already associated with the ALLOFFICES profile, enter the following command:

```
define profassociation alloffices domains=fileservers
```

You can also delete associated configuration information, which results in removal of configuration from the managed server. Use the DELETE PROFASSOCIATION command.

On a configuration manager, you cannot directly change the names of administrators, scripts, and server groups that are associated with a profile. To change the name of an administrator, script, or server group that is associated with a profile, delete the object then define it again with a new name and associate it with the profile again. During the next configuration refresh, each managed server makes the corresponding changes in their databases.

You can change the description of the profile. Enter the following command:

```
update profile alloffices
description='Configuration for all offices with file servers'
```

See “Removing configuration information from managed servers” on page 706 for details.

## Preventing access to a profile while you are changing it

If you are changing a profile, you might want to prevent any subscribing managed server from refreshing its configuration information until you are done. You can lock the profile to prevent access to the profile by a managed server.

### About this task

Locking prevents a managed server from getting information that is incomplete because you are still changing a profile.

| Task                     | Required Privilege Class |
|--------------------------|--------------------------|
| Lock and unlock profiles | System                   |

For example, to lock the ALLOFFICES profile for 2 hours (120 minutes), enter the following command:

```
lock profile alloffices 120
```

You can let the lock expire after 2 hours, or unlock the profile with the following command:

```
unlock profile alloffices
```

### Distributing changed configuration information

To distribute the changed profile, wait for each managed server to refresh its configuration to get the changed information, or notify each managed server from the configuration manager. Managed servers refresh profile information on a configuration refresh period.

#### About this task

| Task                                                                           | Required Privilege Class |
|--------------------------------------------------------------------------------|--------------------------|
| Notify servers that subscribe to profiles to refresh configuration information | System                   |

From the configuration manager, to notify all servers that are subscribers to the ALLOFFICES profile, enter the following command:

```
notify subscribers profile=alloffices
```

The managed servers then refresh their configuration information, even if the time period for refreshing the configuration is not elapsed.

See “Refreshing configuration information” on page 715 for how to set this period.

### Removing configuration information from managed servers

To remove configuration information from managed servers, you can delete the association of the object with the profile, or delete the object itself from the configuration manager.

#### About this task

| Task                        | Required Privilege Class |
|-----------------------------|--------------------------|
| Delete profile associations | System                   |

**Note:** To remove all configuration information that is defined in the database of a managed server as a result of a profile subscription, you must delete the subscription by using the option to discard all managed objects.

On the configuration manager, you can delete the association of objects with a profile. For example, you might want to remove some of the administrators that are associated with the ADMINISTRATORS profile. With an earlier command, you included all administrators that are defined on the configuration manager (by specifying ADMININS=\*). To change the administrators included in the profile you



must first delete the association of all administrators, then associate just the administrators that you want to include.

### Procedure

1. Before you change profile associations, you might want to prevent any servers from refreshing their configuration until you are done. Enter the following command:  
`lock profile administrators`
2. Now change the profile associations by entering the following commands:  
`delete profassociation administrators admins=*`  
`define profassociation administrators`  
`admins=admin1,admin2,admin3,admin4`
3. Unlock the profile:  
`unlock profile administrators`
4. You might want to notify any managed server that subscribes to the profile so that servers refresh their configuration information:  
`notify subscribers profile=administrators`

### Results

When you delete the association of an object with a profile, the configuration manager no longer distributes that object through the profile. Any managed server that subscribes to the profile deletes the object from its database when it next contacts the configuration manager to refresh configuration information. However, a managed server does not delete the following objects:

- An object that is associated with another profile to which the server subscribes.
- A policy domain that has client nodes that are still assigned to it. To delete the domain, you must assign the affected client nodes to another policy domain on the managed server.
- An administrator that currently has a session open with the server.
- An administrator that is the last administrator with system authority on the managed server.

Also, the managed server does not change the authority of an administrator unless after the change there is still an administrator with the system privilege class on the managed server.

You can avoid both problems by ensuring that there is locally defined at least one administrator with system privilege on each managed server.

- An administrative schedule that is active. To remove an active schedule, you must first make the schedule inactive on the managed server.
- A server definition for a server that currently has an open connection from the managed server.
- A server definition that is specified in the definition of a device class that is a SERVER device type.
- A server definition that is the definition for the event server for the managed server.

If you no longer need an object on the configuration manager itself or on any managed server, you can delete the object itself. Deleting the object itself from the configuration manager is similar in effect to deleting the association of that object



with the profile. The configuration manager no longer distributes that object, and a managed server attempts to delete the object from its database when it refreshes configuration information.

See “Deleting subscriptions” on page 714.

## Deleting profiles

You can delete a profile from a configuration manager. Before you delete a profile, ensure that no managed server still has a subscription to the profile. If the profile still has some subscribers, delete the subscriptions on each managed server first.

### About this task

| Task            | Required Privilege Class |
|-----------------|--------------------------|
| Delete profiles | System                   |

When you delete subscriptions, consider whether you want the managed objects to be deleted on the managed server at the same time. For example, to delete the subscription to profile ALLOFFICES from managed server SANTIAGO without deleting the managed objects, log on to the SANTIAGO server and enter the following command:

```
delete subscription alloffices
```

Then, on the configuration manager, enter the following command:

```
delete profile alloffices
```

**Note:** You can use command routing to issue the DELETE SUBSCRIPTION command for all managed servers.

If you try to delete a profile, that still has subscriptions, the command fails unless you force the operation:

```
delete profile alloffices force=yes
```

If you do force the operation, managed servers that still subscribe to the deleted profile later contact the configuration manager to try to get updates to the deleted profile. The managed servers continue to try to get updates until their subscriptions to the profile are deleted. A message is issued on the managed server to alert the administrator of this condition.

See “Deleting subscriptions” on page 714 for more details about deleting subscriptions on a managed server.

## Getting information about profiles

You can get information about configuration profiles defined on any configuration manager if that server is defined to the server with which you are working.

### About this task

| Task                               | Required Privilege Class |
|------------------------------------|--------------------------|
| Request information about profiles | Any administrator        |

For example, from a configuration manager, you can display information about profiles that are defined on that server or on another configuration manager. From

a managed server, you can display information about any profiles on the configuration manager to which the server subscribes. You can also get profile information from any other configuration manager defined to the managed server, even though the managed server does not subscribe to any of the profiles.

For example, to get information about all profiles on the HEADQUARTERS configuration manager when logged on to another server, enter the following command:

```
query profile server=headquarters
```

The following shows what the results might look like:

| Configuration manager | Profile name    | Locked? |
|-----------------------|-----------------|---------|
| -----                 | -----           | -----   |
| HEADQUARTERS          | ADMINISTRATORS  | No      |
| HEADQUARTERS          | DEFAULT_PROFILE | No      |
| HEADQUARTERS          | ENGINEERING     | No      |
| HEADQUARTERS          | MARKETING       | No      |

You might need to get detailed information about profiles and the objects associated with them, especially before you subscribe to a profile. You can get the names of the objects associated with a profile by entering the following command:

```
query profile server=headquarters format=detailed
```

The following shows what the results might look like:

```

Configuration manager: HEADQUARTERS
 Profile name: ADMINISTRATORS
 Locked?: No
 Description:
 Server administrators: ADMIN1 ADMIN2 ADMIN3 ADMIN4
 Policy domains:
Administrative command schedules: ** all objects **
 Server Command Scripts:
 Client Option Sets:
 Servers:
 Server Groups:

Configuration manager: HEADQUARTERS
 Profile name: DEFAULT_PROFILE
 Locked?: No
 Description:
 Server administrators:
 Policy domains:
Administrative command schedules:
 Server Command Scripts:
 Client Option Sets:
 Servers: ** all objects **
 Server Groups: ** all objects **

Configuration manager: HEADQUARTERS
 Profile name: ENGINEERING
 Locked?: No
 Description:
 Server administrators:
 Policy domains: ENGDOMAIN
Administrative command schedules:
 Server Command Scripts: QUERYALL
 Client Option Sets: DESIGNER PROGRAMMER
 Servers:
 Server Groups:

Configuration manager: HEADQUARTERS
 Profile name: MARKETING
 Locked?: Yes
 Description:
 Server administrators:
 Policy domains: MARKETDOM
Administrative command schedules:
 Server Command Scripts: QUERYALL
 Client Option Sets: BASIC
 Servers:
 Server Groups:

```

If the server from which you issue the query is already a managed server (subscribed to one or more profiles on the configuration manager that is being queried), by default the query returns profile information as it is known to the managed server. Therefore, the information is accurate as of the last configuration refresh done by the managed server. You might want to ensure that you see the latest version of profiles as they currently exist on the configuration manager. Enter the following command:

```
query profile uselocal=no format=detailed
```

To get more than the names of the objects associated with a profile, you can do one of the following actions:

- If command routing is set up between servers, you can route query commands from the server to the configuration manager. For example, to get details on the ENGDOMAIN policy domain on the HEADQUARTERS server, enter this command:  
headquarters: query domain engdomain format=detailed

You can also route commands from the configuration manager to another server to get details about definitions that exist.

- If command routing is not set up, log on to the configuration manager and enter the query commands to get the information you need.

## Subscribing to a profile

After an administrator at a configuration manager creates profiles and associates objects with them, managed servers can subscribe to one or more of the profiles.

### About this task

| Task                                       | Required Privilege Class |
|--------------------------------------------|--------------------------|
| Define subscriptions to profiles           | System                   |
| Set the period for configuration refreshes | System                   |

#### Note:

- Unless otherwise noted, the commands that are described would be run on a managed server:
- An administrator at the managed server can issue the commands.
- You can log in from the enterprise console and issue them.
- If command routing is set up, you can route them from the server that you are logged in to.

After a managed server subscribes to a profile, the configuration manager sends the object definitions that are associated with the profile to the managed server where they are automatically stored in the database. Object definitions created this way in the database of a managed server are called managed objects. With a few exceptions, you cannot change managed objects on the managed server. The exceptions are that you can change:

- The active status of a schedule
- The lock status of an administrator
- Which policy set is active in a policy domain
- The default management class of a policy set
- The attributes of a server definition that are related to the use of virtual volumes (node name, password, and delete grace period)

When a managed server subscribes to a profile, be aware that if you defined any object with the same name and type as an object associated with the profile that you are subscribing to, those objects are overwritten. You can check for such occurrences by querying the profile before you subscribe to it.

When a managed server first subscribes to a profile on a configuration manager, it also automatically subscribes to `DEFAULT_PROFILE`, if a profile with this name is defined on the configuration manager. Unless `DEFAULT_PROFILE` is modified on the configuration manager, it contains all the server definitions and server groups that are defined on the configuration manager. In this way, all the servers in your network receive a consistent set of server and server group definitions.

**Note:** Although a managed server can subscribe to more than one profile on a configuration manager, it cannot subscribe to profiles on more than one configuration manager at a time.

Changes can be made to a profile after a managed server subscribes to it. An administrator on the configuration manager can notify your server of a change by issuing the NOTIFY SUBSCRIBERS command. The configuration manager contacts each managed server that has a subscription to one of the specified profiles. When a managed server is contacted, it begins refresh processing to get the configuration updates from the configuration manager.

## Subscription scenario

The scenario that is documented is a typical one, where a server subscribes to a profile on a configuration manager, in this case HEADQUARTERS.

### About this task

In this scenario, an administrator for the HEADQUARTERS server defined three profiles, ADMINISTRATORS, ENGINEERING, and MARKETING, each with its own set of associations. In addition, DEFAULT\_PROFILE was automatically defined and contains only the server and server group definitions that are defined on the HEADQUARTERS server. An administrator for HEADQUARTERS gave you the names of the profiles to use. To subscribe to the ADMINISTRATORS and ENGINEERING profiles and keep them current, complete the following steps:

### Procedure

1. Display the names of the objects in the profiles on HEADQUARTERS.

You might want to complete this step to see if the object names on the profiles are used on your server for any objects of the same type. Issue this command:

```
query profile * server=headquarters format=detailed
```

You might want to get detailed information on some of the objects by issuing specific query commands on either your server or the configuration manager.

**Note:** If any object name matches and you subscribe to a profile that contains an object with the matching name, the object on your server is replaced, with the following exceptions:

- A policy domain is not replaced if the domain has client nodes that are assigned to it.
- An administrator with system authority is not replaced by an administrator with a lesser authority level if the replacement would leave the server without a system administrator.
- The definition of a server is not replaced unless the server definition on the managed server allows replacement.
- A server with the same name as a server group is not replaced.
- A locally defined, active administrative schedule is not replaced

2. Subscribe to the ADMINISTRATORS and ENGINEERING profiles.

After the initial subscription, you do not have to specify the server name on the DEFINE SUBSCRIPTION commands. If at least one profile subscription exists, any additional subscriptions are automatically directed to the same configuration manager. Issue these commands:

```
define subscription administrators server=headquarters
```

```
define subscription engineering
```

The object definitions in these profiles are now stored on your database. In addition to ADMINISTRATORS and ENGINEERING, the server is also

subscribed by default to DEFAULT\_PROFILE. Because of these subscriptions, all the server and server group definitions on HEADQUARTERS are now also stored in your database.

3. Set the time interval for obtaining refreshed configuration information from the configuration manager.

If you do not complete this step, your server checks for updates to the profiles at startup and every 60 minutes following. Set up your server to check HEADQUARTERS for updates once a day (every 1440 minutes). If there is an update, HEADQUARTERS sends it to the managed server automatically when the server checks for updates.

```
set configrefresh 1440
```

## Results

**Note:** You can initiate a configuration refresh from a managed server at any time. To initiate a refresh, reissue the SET CONFIGREFRESH with any value greater than 0. The simplest approach is to use the current setting:

```
set configrefresh 1440
```

## Querying subscriptions

You might want to view the profiles to which a server is subscribed. You might also want to view the last time that the configuration associated with that profile was successfully refreshed on your server.

## About this task

| Task                                    | Required Privilege Class |
|-----------------------------------------|--------------------------|
| Request information about subscriptions | Any administrator        |
| Request information about profiles      | Any administrator        |

The QUERY SUBSCRIPTION command gives you this information. You can name a specific profile or use a wildcard character to display all or a subset of profiles to which the server is subscribed. For example, the following command displays ADMINISTRATORS and any other profiles that begin with the string “ADMIN”:

```
query subscription admin*
```

Here is a sample of the output:

| Configuration manager | Profile name   | Last update date/time |
|-----------------------|----------------|-----------------------|
| -----                 | -----          | -----                 |
| HEADQUARTERS          | ADMINISTRATORS | 06/04/2002 17:51:49   |
| HEADQUARTERS          | ADMINS_1       | 06/04/2002 17:51:49   |
| HEADQUARTERS          | ADMINS_2       | 06/04/2002 17:51:49   |

To see what objects the ADMINISTRATORS profile contains, use the following command:

```
query profile administrators uselocal=no format=detailed
```

Output similar to the following output is returned:

```
Configuration manager: HEADQUARTERS
Profile name: ADMINISTRATORS
Locked?: No
Description:
Server administrators: ADMIN1 ADMIN2 ADMIN3 ADMIN4
Policy domains:
Administrative command schedules: ** all objects **
Server Command Scripts:
Client Option Sets:
Servers:
Server Groups:
```

Managed objects are stored in the database of a managed server as a result of subscriptions to profiles on a configuration manager. Any object that was created or updated in the database of the managed server as a result of a subscription has the string `$$CONFIG_MANAGER$$` in place of the name of the administrator who last changed the object. For example, if the policy domain named `ENGDOMAIN` is a managed object and you enter this command on the managed server:

```
query domain engdomain format=detailed
```

Output similar to the following output is returned:

```
Policy Domain Name: ENGDOMAIN
Activated Policy Set:
Activation Date/Time:
Days Since Activation:
Activated Default Mgmt Class:
Number of Registered Nodes: 0
Description: Policy for design and software engineers
Backup Retention (Grace Period): 30
Archive Retention (Grace Period): 365
Last Update by (administrator): $$CONFIG_MANAGER$$
Last Update Date/Time: 06/04/2002 17:51:49
Managing profile: ENGINEERING
```

The field `Managing profile` shows the profile to which the managed server subscribes to get the definition of this object.

## Deleting subscriptions

If you decide that a server no longer needs to subscribe to a profile, you can delete the subscription.

### About this task

| Task                             | Required Privilege Class |
|----------------------------------|--------------------------|
| Delete subscriptions to profiles | System                   |

When you delete a subscription to a profile, you can choose to discard the objects that came with the profile or keep them in your database. For example, to delete your subscription to `PROFILEC`, but keep the objects that came with that profile, issue the following command:

```
delete subscription profilec discardobjects=no
```

After the subscription is deleted on the managed server, the managed server issues a configuration refresh request to inform the configuration manager that the subscription is deleted. The configuration manager updates its database with the new information.

When you choose to delete objects when you delete the subscription, the server might not be able to delete some objects. For example, the server cannot delete a managed policy domain if the domain still has client nodes that are registered to it. The server skips objects that it cannot delete, but does not delete the subscription itself. If you take no action after an unsuccessful subscription deletion, at the next configuration refresh the configuration manager will again send all the objects that are associated with the subscription. To successfully delete the subscription, do one of the following actions:

- Fix the reason that the objects were skipped. For example, reassign clients in the managed policy domain to another policy domain. After you handle the skipped objects, delete the subscription again.
- Delete the subscription again, except this time do not discard the managed objects. The server can then successfully delete the subscription. However, the objects that were created because of the subscription remain.

---

## Refreshing configuration information

On a configuration manager, an administrator can change configuration information that is associated with a profile. How quickly the changes get distributed to a subscribing managed server depends on the configuration refresh period set on the managed server and whether the administrator on the configuration manager sent a notification.

### About this task

| Task                                                                           | Required Privilege Class              |
|--------------------------------------------------------------------------------|---------------------------------------|
| Set the period for configuration refreshes                                     | System (on the managed server)        |
| Notify servers that subscribe to profiles to refresh configuration information | System (on the configuration manager) |

By default, a managed server refreshes its configuration information every 60 minutes. To cause an immediate refresh, change this period. For example, to immediately refresh the configuration and change the frequency of future refreshes to once a day, enter the following command for the managed server:

```
set configrefresh 1440
```

By issuing this command with a value greater than zero, you cause the managed server to immediately start the refresh process.

At the configuration manager, you can cause managed servers to refresh their configuration information by notifying the servers. For example, to notify subscribers to all profiles, enter the following command:

```
notify subscribers profile=*
```

The managed servers then start to refresh configuration information to which they are subscribed through profiles.

A managed server automatically refreshes configuration information when it is restarted.



## Managing problems with configuration refresh

To monitor for any problems during a configuration refresh, watch the server console or activity log of the managed server. One problem that might occur is that the refresh process can skip objects. For example, a policy domain of the same name as an existing policy domain on the managed server is not distributed if the policy domain has client nodes that are assigned to it.

### About this task

The configuration manager sends the objects that it can distribute to the managed server. The configuration manager skips (does not send) objects that conflict with local objects. If the configuration manager cannot send all objects that are associated with the profile, the managed server does not record the configuration refresh as complete. The objects that the configuration manager successfully sent remain as local instead of managed objects in the database of the managed server. The local objects that remain as a result of an unsuccessful configuration refresh become managed objects at the next successful configuration refresh of the same profile subscription.

See “Associating configuration information with a profile” on page 701 for details on when objects cannot be distributed.

---

## Returning managed objects to local control

You might want to return one or more managed objects (objects that are distributed by a configuration manager through profiles) to local control on the managed servers. You can accomplish this task from the configuration manager or from the managed servers.

### About this task

To complete this task from the configuration manager, you do not delete the association of the object from the profile because that would cause the object to be deleted from subscribing managed servers. To ensure that the object remains in the databases of the managed servers as a locally managed object, you can copy the current profile, make the deletion, and change the subscriptions of the managed servers to the new profile.

For example, servers are currently subscribed to the ENGINEERING profile. The ENGDOMAIN policy domain is associated with this profile. You want to return control of the ENGDOMAIN policy domain to the managed servers.

### Procedure

1. Copy the ENGINEERING profile to a new profile, ENGINEERING\_B:  
`copy profile engineering engineering_b`
2. Delete the association of the ENGDOMAIN policy domain from ENGINEERING\_B:  
`delete profassociation engineering_b domains=engdomain`
3. Use command routing to delete subscriptions to the ENGINEERING profile:  
`americas,europa,asia: delete subscription engineering  
discardobjects=no`
4. Delete the ENGINEERING profile:  
`delete profile engineering`

5. Use command routing to define subscriptions to the new ENGINEERING\_B profile:

```
americas,europe,asia: define subscription engineering_b
```

## Results

To return objects to local control when you are working on a managed server, you can delete the subscription to one or more profiles. When you delete a subscription, you can choose whether to delete the objects that are associated with the profile. To return objects to local control, you do not delete the objects. For example, use the following command on a managed server:

```
delete subscription engineering discardobjects=no
```

---

## Setting up administrators for the servers

Include any administrators, in your profiles, to whom you want to give access to all servers in the network. These administrators must then maintain their passwords on the configuration manager.

### About this task

To ensure passwords stay valid for the expected period on all servers, set the password expiration period to the same time on all servers. One way to accomplish this task is to route a SET PASSEXP command from one server to all of the others.

Ensure that you have at least one administrator that is defined locally on each managed server with system authority. Ensuring that an administrator with system authority is defined locally avoids an error on configuration refresh when all administrators for a server would be removed as a result of a change to a profile on the configuration manager.

---

## Managing problems with synchronization of profiles

In rare situations when a managed server contacts a configuration manager to refresh configuration information, the configuration manager might determine that the profile information on the two servers is not synchronized

### About this task

It might appear that the configuration information is more recent on the managed server than on the configuration manager. This situation might occur for the following reasons:

- The database on the configuration manager was restored to an earlier time and now has configuration information from profiles that appear to be older than what the managed server obtained.
- On the configuration manager, an administrator deleted a profile, forcing the deletion even though one or more managed servers were still subscribed to the profile. The administrator redefined the profile (giving it the same name) before the managed server refreshed its configuration information.

If the configuration manager still has a record of the managed server's subscription to the profile, the configuration manager does not send its profile information at the next request for refreshed configuration information. The configuration manager informs the managed server that the profiles are not synchronized. The

managed server then issues a message that indicates this condition so that an administrator can take appropriate action. The administrator can complete the following steps:

### Procedure

1. If the configuration manager's database was restored to an earlier point in time, the administrator might want to query the profile and associated objects on the managed server and then manually update the configuration manager with that information.
2. Use the `DELETE SUBSCRIPTION` command on the managed server to delete subscriptions to the profile that is not synchronized. You can also delete definitions of the associated objects, then define the subscription again.

### Results

It is possible that the configuration manager might not have a record of the managed server's subscription. In this case, no action is necessary. When the managed server requests a refresh of configuration information, the configuration manager sends current profile information and the managed server updates its database with that information.

---

## Switching a managed server to a different configuration manager

You might want to switch a managed server from one configuration manager to another to organize your policy needs.

### Procedure

Complete the following steps to switch a managed server.

1. Query profiles on the server that is the new configuration manager to compare with current profiles to which the managed server subscribes.
2. On the managed server, delete all subscriptions to profiles on the current configuration manager. Remember to delete the subscription to the profile named `DEFAULT_PROFILE`. Consider whether to discard the managed objects in the database when you delete the subscriptions.

Verify that all subscriptions are deleted by querying subscriptions.

3. Change server communications as needed. Define the server that is the new configuration manager. You can delete the server that was formerly the configuration manager.
4. On the managed server, define subscriptions to profiles on the new configuration manager.

---

## Deleting subscribers from a configuration manager

Under normal circumstances, you do not have to delete subscribers from a configuration manager. You must delete a subscription only to a profile on the managed server (by using the `DELETE SUBSCRIPTION` command).

### About this task

When you issue the `DELETE SUBSCRIPTION` command, the managed server automatically notifies the configuration manager of the deletion by refreshing its configuration information. As part of the refresh process, the configuration manager is informed of the profiles to which the managed server subscribes and to

which it does not subscribe. If the configuration manager cannot be contacted immediately for a refresh, the configuration manager will find out that the subscription was deleted the next time that the managed server refreshes configuration information.

Deleting subscribers from a configuration manager is only necessary as a way to clean up in certain unusual situations. For example, you might need to delete subscribers if a managed server goes away completely or deletes its last subscription without being able to notify the configuration manager. You then use the `DELETE SUBSCRIBER` command to delete all subscriptions for that subscriber (the managed server) from the configuration manager's database.

---

## Renaming a managed server

You might want to rename a managed server to align your policy configuration.

### Procedure

To rename a managed server, complete the following steps:

1. Change the name of the managed server by using command routing or by logging on to the managed server. Use the enterprise console or use the **SET SERVERNAME** command.
2. Change the communication setup.
  - a. On the configuration manager, delete the server definition with the old name.
  - b. On the configuration manager, define the server with its new name.
3. On the managed server, refresh the configuration information. You can wait for the configuration refresh period to pass, or you can reset the refresh period to cause an immediate refresh.

### Results

For more information about the **SET SERVERNAME** command, see “Setting the server name” on page 607.

---

## Completing tasks on multiple servers

To easily complete tasks with multiple servers, Tivoli Storage Manager provides you with the Operations Center, command routing, and server group definitions that you can use to simplify command routing.

### Managing multiple servers from a web-based interface

Tivoli Storage Manager provides a web-based interface for managing and monitoring multiple Tivoli Storage Manager servers.

#### About this task

From the Operations Center, you can manage multiple Tivoli Storage Manager servers, issue commands to those servers, and access web clients.

## Routing commands

Command routing enables an administrator to send commands for processing to one or more servers at the same time. The output is collected and displayed at the server that issued the routed commands.

### About this task

If you set up your servers as described in “Setting up communications for command routing” on page 690, you can route Tivoli Storage Manager administrative commands to one or more servers. A system administrator can configure and monitor many different servers from a central server by using command routing.

You can route commands to one server, multiple servers, servers that are defined to a named group, or a combination of these servers. A routed command cannot be further routed to other servers; only one level of routing is allowed.

Each server that you identify as the target of a routed command must first be defined with the **DEFINE SERVER** command. If a server is not defined, that server is skipped and the command routing proceeds to the next server in the route list.

Tivoli Storage Manager does not run a routed command on the server from which you issue the command unless you also specify that server. To be able to specify the server on a routed command, you must define the server just as you did any other server.

Commands cannot be routed from the SERVER\_CONSOLE ID.

Routed commands run independently on each server to which you send them. The success or failure of the command on one server does not affect the outcome on any of the other servers to which the command was sent.

For more information on command routing and return codes that are generated by command processing, refer to *Administrator's Reference*.

### Routing commands to one or more servers

You can route commands to one or more servers, and to server groups. To successfully route commands to other servers, you must have the correct administrative authority on all servers that receive the command for processing.

### About this task

The return codes for command routing can be one of three severities: 0, ERROR, or WARNING. See *Administrator's Reference* for a list of valid return codes and severity levels.

### Routing commands to single servers:

To route a command to a single server, enter the defined server's name, a colon, and then the command to be processed.

#### About this task

For example, to route a **QUERY STGPPOOL** command to the server that is named ADMIN1, enter:

```
admin1: query stgpool
```

The colon after the server name indicates the end of the routing information. The server routing information is also called the *server prefix*. Another way to indicate that the server routing information is to use parentheses around the server name, as follows:

```
(admin1) query stgpool
```

**Note:** When you are writing scripts, you must use the parentheses for server routing information.

To route a command to more than one server, separate the server names with a comma. For example, to route a **QUERY OCCUPANCY** command to three servers that are named ADMIN1, GEO2, and TRADE5 enter:

```
admin1,geo2,trade5: query occupancy
```

Or

```
(admin1,geo2,trade5) query occupancy
```

The command **QUERY OCCUPANCY** is routed to servers ADMIN1, GEO2, and TRADE5. If a server was not defined with the DEFINE SERVER command, that server is skipped and the command routing proceeds to the next server in the route list.

The routed command output of each server is displayed in its entirety at the server that initiated command routing. In the previous example, output for ADMIN1 would be displayed, followed by the output of GEO2, and then the output of TRADE5.

Processing of a command on one server does not depend upon completion of the command processing on any other servers in the route list. For example, if GEO2 server does not successfully complete the command, the TRADE5 server continues processing the command independently.

### Routing commands to server groups:

A server group is a named group of servers. After you set up the groups, you can route commands to the groups.

#### About this task

To route a **QUERY STGPPOOL** command to the server group WEST\_COMPLEX, enter:

```
west_complex: query stgpool
```

Or

```
(west_complex) query stgpool
```

The QUERY STGPOOL command is sent for processing to servers BLD12 and BLD13, which are members of group WEST\_COMPLEX.

To route a QUERY STGPOOL command to two server groups WEST\_COMPLEX and NORTH\_COMPLEX, enter:

```
west_complex,north_complex: query stgpool
```

Or

```
(west_complex,north_complex) query stgpool
```

The QUERY STGPOOL command is sent for processing to servers BLD12 and BLD13, which are members of group WEST\_COMPLEX, and servers NE12 and NW13, which are members of group NORTH\_COMPLEX.

See “Setting up server groups” for how to set up a server group.

### **Routing commands to single servers and server groups:**

You can route commands to multiple single servers and to server groups at the same time.

### **About this task**

For example, to route the QUERY DB command to servers HQSRV, REGSRV, and groups WEST\_COMPLEX and NORTH\_COMPLEX, enter:

```
hqsrv,regsrv,west_complex,north_complex: query db
```

Or

```
(hqsrv,regsrv,west_complex,north_complex) query db
```

The QUERY DB command is sent for processing to servers HQSRV, REGSRV, to BLD12 and BLD13 (both members of WEST\_COMPLEX), and to NE12 and NW12 (both members of NORTH\_COMPLEX).

Duplicate references to servers are removed in processing. For example, if you route a command to server BLD12 and to server group WEST\_COMPLEX (which includes BLD12), the command is sent only once to server BLD12.

## **Setting up server groups**

You can make command routing more efficient by creating one or more server groups and adding servers to them. You can then route commands to server groups in addition to, or in place of, routing commands to single servers.

### **Procedure**

To use server groups, you must complete the following tasks:

1. Define the server groups.
2. Add the servers as members of the appropriate group.

## Results

After you have the server groups set up, you can manage the groups and group members.

### Defining a server group and members of a server group

You can define groups of servers to which you can then route commands. The commands are routed to all servers in the group.

#### About this task

| Task                         | Required Privilege Class |
|------------------------------|--------------------------|
| Define a server group        | System                   |
| Define a server group member | System                   |

## Procedure

To route commands to a server group, you must complete the following steps:

1. Define the server with the **DEFINE SERVER** command if it is not already defined.
2. Define a new server group with the **DEFINE SERVERGROUP** command. Server group names must be unique because both groups and server names are allowed for the routing information.
3. Define servers as members of a server group with the **DEFINE GRPMEMBER** command.

## Results

The following example shows how to create a server group that is called WEST\_COMPLEX, and define servers BLD12 and BLD13 as members of the WEST\_COMPLEX group:

```
define servergroup west_complex
define grpmember west_complex bld12,bld13
```

(See “Setting up communications for command routing” on page 690.)

### Managing server groups

You can query, copy, rename, update, and delete server groups as necessary.

#### About this task

| Task                              | Required Privilege Class |
|-----------------------------------|--------------------------|
| Query a server group              | System                   |
| Copy a server group               | System                   |
| Rename a server group             | System                   |
| Update a server group description | System                   |
| Delete a server group             | System                   |



### Querying a server group:

You can obtain information about server groups by issuing the **QUERY SERVERGROUP** command.

#### Procedure

To query the WEST\_COMPLEX server group, issue the following command:

```
query servergroup west_complex
```

#### Results

The following sample output shows the results of the **QUERY SERVERGROUP** command.

| Server Group | Members      | Description | Managing profile |
|--------------|--------------|-------------|------------------|
| WEST_COMPLEX | BLD12, BLD13 |             |                  |

### Copying a server group:

You can copy a server group by issuing the **COPY SERVERGROUP** command.

#### Procedure

To copy the entire server group contents of WEST\_COMPLEX to the NEWWEST server group, issue the following command:

```
copy servergroup west_complex newwest
```

#### Results

This command creates the new group. If the new group exists, the command fails.

### Renaming a server group:

You can rename a server group by issuing the **RENAME SERVERGROUP** command.

#### Procedure

Rename a server group by using the **RENAME SERVERGROUP** command. For example, to rename an existing server group NORTH\_COMPLEX to NORTH, issue the following command:

```
rename servergroup north_complex north
```

### Updating a server group description:

You can update a server group by issuing the **UPDATE SERVERGROUP** command.

#### Procedure

Update a server group by issuing the **UPDATE SERVERGROUP** command. For example, to update the NORTH server group to modify its description, issue the following command:

```
update servergroup north description="Northern marketing region"
```

### Deleting a server group:

You can delete a server group by issuing the **DELETE SERVERGROUP** command.

#### Procedure

To delete the WEST\_COMPLEX server group from the Tivoli Storage Manager server, issue the following command:

```
delete servergroup west_complex
```

#### Results

This command removes all members from the server group. The server definition for each group member is not affected. If the deleted server group is a member of other server groups, the deleted group is removed from the other groups.

### Managing group members

You can move and delete group members from a previously defined group.

#### About this task

| Task                                 | Required Privilege Class |
|--------------------------------------|--------------------------|
| Move a group member to another group | System                   |
| Delete a group member                |                          |

### Moving a group member to another group:

You can move group members to another group by issuing the **MOVE GRPMEMBER** command.

#### Procedure

To move group member TRADE5 from the NEWWEST group to the NORTH\_COMPLEX group, issue the following command:

```
move grpmember trade5 newwest north_complex
```

### Deleting a group member from a group:

You can delete group members from a group by issuing the **DELETE GROUPMEMBER** command.

#### Procedure

To delete group member BLD12 from the NEWWEST server group, issue the following command:

```
delete grpmember newwest bld12
```

#### Results

When you delete a server, the deleted server is removed from any server groups of which it was a member.

## Querying server availability

You can test a connection from your local server to a specified server by issuing the **PING SERVER** command.

### Procedure

To query server availability, issue the **PING SERVER** command. For example, to ping the server GEO2, issue the following command:

```
ping server geo2
```

The **PING SERVER** command uses the user ID and password of the administrative ID that issued the command. If the administrator is not defined on the server that is being pinged, the ping fails even if the server is running.

---

## Storing data on another server as virtual volumes

You can store the results of database backups and other items on another server as a virtual volume.

### About this task

Tivoli Storage Manager allows a server (a *source server*) to store these items on another server (a *target server*):

- Database backups
- Export operations
- Storage pool operations
- DRM **PREPARE** command

The data is stored as *virtual volumes*, which look like sequential media volumes on the source server, but are stored as archive files on a target server. The following list includes the virtual volumes that can store data.

- Database backups
- Storage pool backups
- Data that is backed up, archived, or space managed from client nodes
- Client data that is migrated from storage pools on the source server
- Any data that can be moved by EXPORT and IMPORT commands
- DRM plan files

The source server is a client of the target server, and the data for the source server is managed only by the source server. In other words, the source server controls the expiration and deletion of the files that comprise the virtual volumes on the target server. You cannot use virtual volumes when the source server and the target server are on the same Tivoli Storage Manager server.

At the target server, the virtual volumes from the source server are seen as archive data. The source server is registered as a client node (of TYPE=SERVER) at the target server and is assigned to a policy domain. The archive copy group of the default management class of that domain specifies the storage pool for the data from the source server.

**Note:** If the default management class does not include an archive copy group, data cannot be stored on the target server.

You can benefit from the use of virtual volumes in the following ways:

- Smaller Tivoli Storage Manager source servers can use the storage pools and tape devices of larger Tivoli Storage Manager servers.
- For incremental database backups, virtual volumes can decrease wasted space on volumes and under-utilization of high-end tape drives.
- The source server can use the target server as an electronic vault for recovery from a disaster.

Be aware of the following conditions when you use virtual volumes:

- When you copy or move data from a deduplicated storage pool to a non-deduplicated storage pool that uses virtual volumes, the data is reconstructed. However, after the data movement or copy operation, the amount of data that is reported as moved or copied is the amount of deduplicated data. For example, if a storage pool contains 20 GB of deduplicated data that represents 50 GB of total file data. If the data is moved or copied, the server reports that 20 GB was moved or copied, even though 50 GB of data was sent.
- If you use virtual volumes for database backups, you might have the following situation: SERVER\_A backs up its database to SERVER\_B, and SERVER\_B backs up its database to SERVER\_A. If databases are backed up in that manner, if both servers are at the same location, and if a disaster occurs that location, you might have no backups with which to restore your databases.
- You cannot use a Centera storage pool as the target for virtual volumes.
- Under certain circumstances, inconsistencies might arise among virtual volume definitions on the source server and the archive files on the target server. You can use the RECONCILE VOLUMES command to reconcile these inconsistencies.
- To enable data validation between a source and target server, issuing both the **DEFINE SERVER** and **REGISTER NODE** commands. For more information, see “Validating node data” on page 525 and *Administrator's Reference*.
- Storage space limitations on the target server affect the amount of data that you can store on that server.

**Note:** When you issue a **DEFINE SERVER** command, the source server sends a verification code to the target server. When the source server begins a session with the target server, it also sends the verification code. If the code matches what was previously stored on the target, the session is opened in read/write mode. If the verification code is lost at the source server (for example, after a database restore), you can reset the code by issuing the **UPDATE SERVER** command with the **FORCESYNC** parameter set to YES.

For details, see “Reconciling virtual volumes and archive files” on page 733.

**Related concepts:**

“Performance limitations for virtual volume operations” on page 729

**Related tasks:**

“Setting up source and target servers for virtual volumes” on page 728

## Setting up source and target servers for virtual volumes

In the source and target relationship, the source server is defined as a client node of the target server. To set up this relationship, a number of steps must be performed at the two servers.

### About this task

In the following example (illustrated in Figure 88 on page 729), the source server is named TUCSON and the target server is named MADERA.

- **At Tucson site:**

1. Define the target server:
  - MADERA has a TCP/IP address of 127.0.0.1:1845
  - Assign the password CALCITE to MADERA.
  - Set the value for the **DELgraceperiod** parameter in the **DEFINE SERVER** command to a specific value if you want to keep files for an extra number of days before they expire on the target server. For example, if you set the value to 7 days, the files are kept for an extra 7 days before they expire.
  - Assign TUCSON as the node name by which the source server TUCSON is known by the target server. If no node name is assigned, the server name of the source server is used. To see the server name, you can issue the QUERY STATUS command.
2. Define a device class for the data to be sent to the target server. The device type for this device class must be SERVER, and the definition must include the name of the target server.

- **At Madera site:**

Register the source server as a client node. The target server can use an existing policy domain and storage pool for the data from the source server. However, you can define a separate management policy and storage pool for the source server. Doing so can provide more control over storage pool resources.

1. Use the REGISTER NODE command to define the source server as a node of TYPE=SERVER. The policy domain to which the node is assigned determines where the data from the source server is stored. Data from the source server is stored in the storage pool that is specified in the archive copy group of the default management class of that domain.
2. You can set up a separate policy and storage pool for the source server.
  - a. Define a storage pool named SOURCEPOOL:

```
define stgpool sourcepool autotapeclass maxscratch=20
```
  - b. Copy an existing policy domain STANDARD to a new domain named SOURCEDOMAIN:

```
copy domain standard sourcedomain
```
  - c. Assign SOURCEPOOL as the archive copy group destination in the default management class of SOURCEDOMAIN:

```
update copygroup sourcedomain standard standard type=archive
destination=sourcepool
```
3. After you issue these commands, ensure that you assign the source server to the new policy domain (UPDATE NODE) and activate the policy.

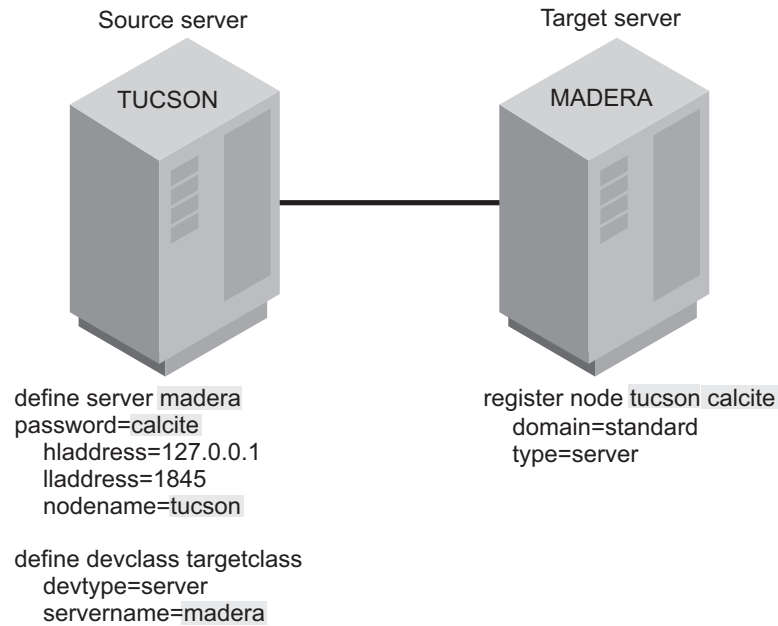


Figure 88. Communication configuration for virtual volumes

#### Related tasks:

“Changing policy” on page 486

## Performance limitations for virtual volume operations

Server-to-server virtual volume performance can vary depending on your environment and other variables, and might not be optimal for all data recovery needs.

Factors that can affect volume performance when you are using virtual volumes include the following factors:

- Distance between locations
- Network infrastructure and bandwidth between locations
- Network configuration
- Data size and distribution
- Data read and write patterns

Given this performance variability, you must test environments that are representative of the final production configuration. In your testing, include throughput evaluations for both data-write operations (storing data from the source server to the target server), and for data-read operations (reading data from the target server to the source server, such as restoring data for a client).

Use the server-to-server virtual volumes feature to share a single tape library with multiple servers. Although other situations can use this feature, such as cross-server or off-site vaulting, this feature is not optimized for long distances. For best results, use server-to-server virtual volumes for situations where the two servers (source and target) are not communicating over long distances. For example:

- The source server and target server reside within the same building.
- The source server and target server reside in different buildings but are typically covering short geographic distances such as a mile or a couple miles.

- The source server and target server reside in the same metropolitan area and are in separate buildings 10 - 50 miles apart.

Although network technologies allow for server-to-server communications that cover greater distances than discussed here, be careful when you implement a server-to-server virtual volume configuration. Network latency and other factors can significantly affect performance for long-distance implementations and might not meet recovery-time or recovery-point objectives. In these situations, consider using other technologies such as Virtual Tape Library replication, Metro Mirror, or other storage hardware approaches where tuning and bandwidth management are available to mitigate the distances that are involved.

Avoid moving large amounts of data between the servers, which might slow down communications significantly, depending on the network bandwidth and availability.

Specify, in the device class definition (DEVTYPE=SERVER) how often, and how long a time period you want the source server to attempt to contact the target server. Keep in mind that frequent attempts to contact the target server over an extended period can affect your communications.

To minimize mount wait times, set the total mount limit for all server definitions that specify the target server to a value that does not exceed the mount total limit at the target server. For example, a source server has two device classes, each specifying a mount limit of 2. A target server has only two tape drives. In this case, the source server mount requests might exceed the target server tape drives.

Performance can also vary by operation. For example, in some network configurations data store operations perform better than data read operations depending on how the TCPWINDOWSIZE option is specified. Test all data read operations to verify that adequate data read retrieval rates can be achieved.

## Performing operations at the source server

You can perform certain operations at the source server that cause data to be stored in a storage pool at the target server.

### About this task

The following operations that are performed at the source server cause data to be stored in a storage pool at the target server:

- Database backups
- Storage pool backups
- Client data backup, archive, or migration
- Data migration from one storage pool to another
- Export of server information
- DRM prepare

The following sections describe how to perform these operations. In the examples, the following conditions are assumed:

- The source and target servers are set up for virtual volumes.
- An operational TCP/IP connection, Version 4 or Version 6, exists between both servers.
- Both servers are running.

## Backing up the database

You can back up the database of a source server to a target server.

### About this task

For example, to perform an incremental backup of the source server and send the volumes to the target server, issue the following command:

```
backup db type=incremental devclass=targetclass
```

If your server uses DRM, expiration processing can delete volumes that contain expired database backups and recovery plan files. One or more database backup volumes can be deleted from the volume history during expiration processing if the following conditions are true:

- The volume has a device type of SERVER
- The volume is not part of the most recent database backup series
- The last volume of the database backup series exceeds the expiration value that is specified with the SET DRMDBBACKUPEXPIREDAYS command

For more information, see “Moving copy storage pool and active-data pool volumes onsite” on page 1090.

## Backing up a storage pool

You can back up a storage pool of a source server to a target server.

### About this task

For example, a primary storage pool that is named TAPEPOOL is on the source server. You can define a copy storage pool that is named TARGETCOPYPOOL, also on the source server. TARGETCOPYPOOL must have an associated device class whose device type is SERVER. When you back up TAPEPOOL to TARGETCOPYPOOL, the backup is sent to the target server. To define the copy storage pool and back up the primary storage pool, issue the following commands:

```
define stgpool targetcopypool targetclass pooltype=copy
 maxscratch=20
backup stgpool tapepool targetcopypool
```

## Storing client data on a target server

You can configure your Tivoli Storage Manager system so that when client nodes registered to the source server back up, archive, or migrate their data, that data is sent to the target server. When clients restore, retrieve, or recall their data, the source server gets the data from the target server.

### About this task

To configure your system, ensure that the management policy for those nodes specifies a storage pool that has a device class whose device type is SERVER. For example, the following command defines the storage pool named TARGETPOOL.

```
define stgpool targetpool targetclass maxscratch=20
 reclaim=100
```

**Note:** Reclamation of a storage pool automatically begins when the percentage of reclaimable space, which is specified by the RECLAIM parameter, is reached. Reclamation of a target storage pool can involve the movement of a great deal of data from the target server to the source server and back to the target. If this



operation occurs automatically during peak operating periods, it might slow network performance significantly. If you set the value to 100, reclamation does not occur automatically.

For details about storage pool reclamation and how to begin it manually, see “Reclaiming space in sequential-access storage pools” on page 382.

## **Migrate data from a source server storage pool to a target server storage pool**

You can set up your storage pool hierarchy so that client data is migrated from a storage pool on the source server to the target server.

### **About this task**

For example, storage pool TAPEPOOL is on the source server. The TAPEPOOL definition specifies NEXTSTGPOOL=TARGETPOOL. TARGETPOOL is defined on the source server as a storage pool of device type SERVER. When data is migrated from TAPEPOOL, it is sent to the target server.

```
define stgpool tapepool tapeclass nextstgpool=targetpool
maxscratch=20
```

## **Exporting server information to a target server**

You can use any of the Tivoli Storage Manager EXPORT commands to export data from one Tivoli Storage Manager source server to sequential media on a target Tivoli Storage Manager server. You must specify a device class with a device type specified as SERVER.

### **About this task**

For example, to copy server information directly to a target server, issue the following command:

```
export server devclass=targetclass
```

### **Importing server information from a target server:**

If data was exported from a source server to a target server, you can import that data from the target server to a third server. The server that imports the data uses the node ID and password of the source server to open a session with the target server. That session is in read-only mode because the third server does not have the proper verification code.

### **About this task**

For example, to import server information from a target server, issue the following command:

```
import server devclass=targetclass
```

## Reconciling virtual volumes and archive files

When you restore the database on the source or target server, you can reconcile the virtual volumes on the source server and the archive files on the target server. Reconciliation can also be used if you have any other reason to suspect inconsistencies.

### About this task

To complete reconciliation, issue the RECONCILE VOLUMES command and specify a device class with the device type of SERVER. In the following example, TARGETCLASS is a server device class:

```
reconcile volumes targetclass fix=yes
```

The reconciliation action is determined by the FIX parameter as shown in Table 71.

Table 71. FIX parameter reconciliation

| FIX= | At the Source Server | At the Target Server                           | Action                                                                                                                                                                                                                                                                                                |
|------|----------------------|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NO   | Volumes exist        | No files exist                                 | Report error                                                                                                                                                                                                                                                                                          |
|      |                      | Files exist but are marked for deletion        |                                                                                                                                                                                                                                                                                                       |
|      |                      | Active files exist but attributes do not match |                                                                                                                                                                                                                                                                                                       |
|      | Volumes do not exist | Active files exist                             | Report error                                                                                                                                                                                                                                                                                          |
|      |                      | Files exist but are marked for deletion        | None                                                                                                                                                                                                                                                                                                  |
| YES  | Volumes exist        | No files exist                                 | Report error<br><br>For storage pool volumes:<br>Mark volumes as unavailable                                                                                                                                                                                                                          |
|      |                      | Files exist but marked for deletion            | Report error<br><br>For storage pool volumes: If attributes match, mark files on the target server as active again, mark volumes on the source server as unavailable, and recommend that an AUDIT VOLUME be done to further verify the data. If attributes do not match, mark volumes as unavailable. |
|      |                      | Active files exist but attributes do not match | Report error<br><br>For storage pool volumes:<br>Mark volumes as unavailable and recommend that an AUDIT VOLUME be done to further verify the data.                                                                                                                                                   |
|      | Volumes do not exist | Active files exist                             | Mark files for deletion on the target server.                                                                                                                                                                                                                                                         |
|      |                      | Files exist but marked for deletion            | None                                                                                                                                                                                                                                                                                                  |
|      |                      |                                                |                                                                                                                                                                                                                                                                                                       |



---

## Chapter 22. Exporting and importing data

Tivoli Storage Manager provides an export and import facility. By using this facility, you can copy all or part of a server (export) so that data can be transferred to another server (import).

There are two methods for exporting and importing data:

- Export directly to another server on the network. This method results in an immediate import process without the need for compatible sequential device types between the two servers.
- Export to sequential media. Later, you can use the media to import the information to another server that has a compatible device type.

| Task                                                   | Required Privilege Class |
|--------------------------------------------------------|--------------------------|
| Export and import operations                           | System                   |
| Display information about export and import operations | Any administrator        |

For more information about the export and import tasks, see the following sections:

|                                                                              |
|------------------------------------------------------------------------------|
| Concepts:                                                                    |
| “Reviewing data that can be exported and imported”                           |
| Tasks for Exporting Directly to Another Server:                              |
| “Exporting data directly to another server” on page 738                      |
| “Preparing to export to another server for immediate import” on page 742     |
| “Monitoring the server-to-server export process” on page 744                 |
| Tasks for Exporting to Sequential Media:                                     |
| “Exporting and importing data by using sequential media volumes” on page 747 |
| “Exporting tasks” on page 749                                                |
| “Importing data from sequential media volumes” on page 752                   |

---

### Reviewing data that can be exported and imported

Administrators can export or import server control information and file data from server storage.

See the following lists for definitions of these kinds of data:

- Server control information, which includes the following information:
  - Administrator definitions
  - Client node definitions
  - Policy and scheduling definitions
- File data from server storage, which includes file space definitions and authorization rules. You can request that file data is exported in any of the following groupings of files:

- Active and inactive versions of backed up files, archive copies of files, and space-managed files
- Active versions of backed up files, archive copies of files, and space-managed files
- Active and inactive versions of backed up files
- Active versions of backed up files
- Archive copies of files
- Space-managed files

## Exporting restrictions

The export function does have some limitations and restrictions. One restriction is that you can export information from an earlier version and release of Tivoli Storage Manager to a later version and release, but not from a later version and release to an earlier version and release.

For example, you can export from a V6.1 server to a V6.2 server, but you cannot export from V6.2 server to V6.1 server.

The following list shows the restrictions for exporting data:

- Export between servers that are at the same version and release but different fix packs might be possible. However, functional changes that are made in some fix packs might prevent a successful export operation. For example, you cannot export from a V6.1.3 server to a V6.1.2 server, or from a V6.1.2 server to a V6.1.1 or earlier server.
- Data can be exported from a server with retention protection enabled. The data is not protected by retention when it is imported to another server.
- You cannot export nodes of type NAS (network-attached storage). Export processing excludes these nodes.
- Exporting data to a Centera device class or importing data from a Centera device class is not supported. However, files that are stored in Centera storage pools can be exported and files that must be imported can be stored on a Centera storage device.
- The **EXPORT NODE** and **EXPORT SERVER** commands do not export data from a shred pool unless you explicitly permit it by setting the **ALLOWSHREDDABLE** parameter to YES. If this value is specified, and the exported data includes data from shred pools, that data cannot be shredded. The server does not issue a warning if the export operation includes data from shred pools.

### Related concepts:

“Securing sensitive client data” on page 529

## Deciding what information to export

Your decision on what information to export depends upon why you are exporting that information.

See the following possible causes for exporting information:

- To balance the workload across servers. For example, when many client nodes access the same server, users contend for communication paths, server resources, and tape mounts during a restore or retrieve operation.

To relieve a server of some work load and improve its performance, you can take one or all of the following actions:

- Move a group of client nodes to a target server

- Move policy definitions that are associated with these client nodes
- Move administrator definitions for administrators who manage these client nodes

To copy information to a second server (the target server), use the **EXPORT NODE**, **EXPORT POLICY**, and **EXPORT ADMIN** commands.

When you complete the import, you can delete file spaces, client nodes, policy objects, scheduling objects and administrators from the source server. This action reduces contention for server resources.

- To copy data for installing a new server, use the **EXPORT SERVER** command.

**Important:**

1. Because results might be unpredictable, ensure that expiration, migration, backup, or archive processes are not running when the **EXPORT NODE** command is issued.
2. The **EXPORT NODE** and **EXPORT SERVER** commands do not export data from shred pools unless you explicitly permit it by setting the **ALLOWSHREDDABLE** parameter to YES. If this value is specified, and the exported data includes data from shred pools, but that data can no longer be shredded.

**Related concepts:**

“Securing sensitive client data” on page 529

## Deciding when to export

When you issue an **EXPORT** command, the operation runs as a background process. Because the operation runs as a background process, you can continue performing administrative tasks. In addition, users can continue to back up, archive, migrate, restore, retrieve, or recall files.

If you choose to run an export operation during normal working hours, be aware that administrators can change server definitions and users can modify files that are in server storage.

When you export to sequential media, administrators or users might modify data shortly after it is exported. For this reason, the information that is copied to tape might not be consistent with data stored on the source server. If you want to export an exact point-in-time copy of server control information, you can prevent administrative and other client nodes from accessing the server.

When you export directly to another server, administrators or users can modify data shortly after it is exported. You can decide to merge file spaces, use incremental export, or prevent administrative and other client nodes from accessing the server.

**Related concepts:**

“Preventing administrative clients from accessing the server” on page 738

**Related tasks:**

“Preventing client nodes from accessing the server” on page 738

**Related reference:**

“Options to consider before you export data” on page 739

## Preventing administrative clients from accessing the server

Administrators can change administrator, policy, or client node definitions during an export process. To prevent administrators from modifying these definitions, you can lock out administrator access to the server and cancel any administrative sessions before you issue an **EXPORT** command.

After the export process is complete, unlock administrator access.

### Related tasks:

“Canceling an IBM Tivoli Storage Manager session” on page 477

“Locking and unlocking administrator IDs from the server” on page 876

## Preventing client nodes from accessing the server

If client node information is exported while that client is backing up, archiving, or migrating files, the latest file copies for the client might not be exported to tape.

### About this task

To prevent users from accessing the server during export operations, cancel existing client sessions.

### Procedure

After you cancel the client sessions, you can complete one of the following steps:

1. Disable server access to prevent client nodes from accessing the server.

This option is useful when you export all client node information from the source server and want to prevent all client nodes from accessing the server.

2. Lock out particular client nodes from server access.

This option is useful when you export a subset of client node information from the source server and want to prevent particular client nodes from accessing the server until the export operation is complete.

### What to do next

After the export operation is complete, allow client nodes to access the server again by:

- Enabling the server
- Unlocking client nodes

---

## Exporting data directly to another server

You can export all server control information or a subset of that same information.

Specify one or more of the following export commands:

- **EXPORT ADMIN**
- **EXPORT NODE**
- **EXPORT POLICY**
- **EXPORT SERVER**

When you export data to a target server, you must specify the server name that receives the data as an import operation.

## Options to consider before you export data

There are several options to consider before you export, such as whether to merge file spaces, to have an incremental export, whether to replace definitions, which source of active client backup data to export, and the possibility of restarting your export operation.

### Merging file spaces before you export

You can merge imported client backup, archive, and space-managed files into existing file spaces and automatically skip duplicate files that might exist in the target file space on the server. Optionally, you can have new file spaces created.

If you do not want to merge file spaces, see the topic on how duplicate file spaces are managed.

By choosing to merge file spaces, you can restart a canceled import operation because files that were previously imported can be skipped in the subsequent import operation. This option is available when you issue an **EXPORT SERVER** or **EXPORT NODE** command.

When you merge file spaces, the server performs versioning of the imported objects by using the policy that is bound to the files. An import operation might leave the target file space with more versions than policy permits. Files are versioned to maintain the policy intent for the files, especially when incremental export (by using the **FROMDATE** and **FROMTIME** parameters) is used to maintain duplicate client file copies on two or more servers.

The following definitions show how the server merges imported files, based on the type of object, when you specify **MERGEFILESACES=YES**.

#### Archive Objects

If an archive object for the imported node that has the same TCP/IP address, TCP/IP port, name, insert date, and description is found to exist on the target server, the imported object is skipped. Otherwise, the archive object is imported.

#### Backup Objects

If a backup object for the imported node has the same TCP/IP address, TCP/IP port, insert date, and description as the imported backup object, the imported object is skipped. When backup objects are merged into existing file spaces, versioning is done according to policy just as it occurs when backup objects are sent from the client during a backup operation. Setting their insert dates to zero marks excessive file versions for expiration.

Otherwise, the server completes the following tasks:

- If the imported backup object has a more recent insert date than an active version of an object on the target server with the same node, file space, TCP/IP address, and TCP/IP port, then the imported backup object becomes the new active copy, and the active copy on the target server is made inactive. Tivoli Storage Manager expires this inactive version according to the number of versions that are allowed in policy.
- If the imported backup object has an earlier (less recent) insert date than an active copy of an object on the target server with the same node, file space, TCP/IP address, TCP/IP port, then the imported backup object is inserted as an inactive version.



- If there are no active versions of an object with the same node, file space, TCP/IP address, and TCP/IP port on the target server, and the imported object has the same node, file space, TCP/IP address, and TCP/IP port as the versions, then:
  - An imported active object with a later insert date than the most recent inactive copy becomes the active version of the file.
  - An imported active object with an earlier insert date than the most recent inactive copy is imported as an inactive version of the file
- Any imported inactive objects are imported as other inactive versions of the object.

### Space Managed Objects

If the imported node's space-managed object has an external object ID that is already on the target server, then the imported object is skipped. Otherwise, the space-managed object is imported.

The number of objects that are imported and skipped is displayed with the final statistics for the import operation.

#### Related concepts:

“Managing duplicate file spaces” on page 760

#### Related tasks:

“Querying the activity log for export or import information” on page 766

### Incremental export

The system administrator can limit the file data that is exported to objects that were stored on the server on or after the date and time specified.

You can use the **FROMDATE** and **FROMTIME** parameters to export data based on the date and time the file was originally stored in the server. The **FROMDATE** and **FROMTIME** parameters apply only to client user file data; these parameters have no effect on other exported information such as policy. If clients continue to back up to the originating server while their data is moving to a new server, you can move the backup data that was stored on the originating server after the export operation was initiated. This option is available when you issue an **EXPORT SERVER** or **EXPORT NODE** command.

You can use the **TODATE** and **TOTIME** parameters to further limit the time you specify for your export operation.

### Replace definitions before you export

You can specify whether definitions (not file data) are replaced on the target server. If duplicate definitions exist on the target server, they can be replaced with the imported definitions.

Alternatively, you can have the server skip duplicate definitions. This option is available when you issue any of the **EXPORT** commands.

#### Related concepts:

“Determining whether to replace existing definitions” on page 754

## Sources of active client backup data

When you export active versions of client backup data, the server searches for active file versions in an active-data storage pool that is associated with a FILE device class, if such a pool exists.

### Related concepts:

“Selection for active file versions” on page 426

## Restartable export operations

You can restart a suspended server-to-server export operation if you define the FILEDATA value as anything other than NONE when you issue an **EXPORT NODE** or **EXPORT SERVER** command. An export might be suspended during the export operation if a failure occurs.

The resumed export continues at a point where the suspension took place. Therefore, data that was already exported is not exported again and only the data that was not sent is included in the restarted export. Issue the **QUERY EXPORT** command to view all running and suspended restartable export operations, the **RESTART EXPORT** command to restart an export operation, or the **SUSPEND EXPORT** to suspend a running server-to-server **EXPORT NODE** or **EXPORT SERVER** process. Suspended server-to-server export operations are not affected by a server restart.

**Note:** Do not issue the **CANCEL PROCESS** command if you want to restart the operation later. **CANCEL PROCESS** ends the export process and deletes all saved status.

An export operation cannot be suspended before it completes writing definitions to the target server. The export operation might be restarted from the point at which the operation fails or suspends if the export operation fails after it wrote the file space definitions to the target server.

If an export operation fails before identifying all eligible files, when the export operation is restarted it continues to identify eligible files and might export files that were backed up while the operation was suspended.

A restarted export operation exports only the data that was identified. During a suspension, some files or nodes that are identified for export might be deleted or might expire. To ensure that all data is exported, restart the export operation at the earliest time and restrict operations on the selected data.

A restartable server-to-server export operation goes through (in order) the following three phases:

1. Creating definitions on target server
2. Identifying and exporting eligible files
3. File list complete. Exporting eligible files

At any time, a restartable export operation is in one of the following states:

### Running - Not Suspendable

This state directly corresponds to phase 1 of a restartable export, “Creating definitions on target server.”

### Running

The operation is running as an active process and is either in phase 2: “Identifying and exporting eligible files” or phase 3: “File list complete. Exporting eligible files.”

### **Running - Suspend in Progress**

The operation is being suspended as a result of a **SUSPEND EXPORT** command. The export operation is fully suspended when all of the data from the export operation is saved. An export operation in this state can be in either phase 2 on page 741: "Identifying and exporting eligible files" or phase 3 on page 741: "File list complete. Exporting eligible files."

### **Suspended**

The operation is not currently running. It might still be in either phase 2 on page 741 or phase 3 on page 741.

An export operation that fails while it is in phase 1 on page 741 cannot be restarted, and you must respecify the export command. The new export operation starts and all definitions are retransmitted. Before you issue the export command, check the state of the target server to make sure that the definitions are properly imported during the new operation. If the original export command specified **MERGEFILESPPACES=NO**, delete any filespace definitions that are imported on the target server before the failure to ensure that filespace definitions are correctly imported during the new operation. If the original export command specified **REPLACEDEFS=NO** and you want to export any changes in the definitions that are made since the original operation failed, delete all definitions on the target that were imported before the failure.

When a server-to-server export operation restarts, the data continues to be imported onto the target server into the same file spaces that were selected in the original export process, regardless of the value of the **MERGEFILESPPACES** parameter. For server-to-server export operations, data is transmitted in transactions to ensure that the source server can restart at the correct location in the data if the process fails. The target server's **TXNGROUPMAX** and **MOVESIZETHRESH** values are used to control the amount of data within each export transaction.

**Attention:** Ensure that the target server's Tivoli Storage Manager level is newer or the same as the source server's level. If you suspend export operations and upgrade the source server's database, the target server might stop the export operation if the new source server's Tivoli Storage Manager level is incompatible with the target server's level.

## **Preparing to export to another server for immediate import**

When you export data to another server on the network, the export results in an immediate import on the target server. You can export data to a Tivoli Storage Manager server of the same or different operating system as the originating server.

### **About this task**

A server-to-server export operation completes the following steps:

1. Opens a session with the target server.
2. Authenticates with the administrator's user ID and password.
3. Starts the equivalent of an **IMPORT SERVER** process.

Before you export data to another server on the network, complete the following tasks:

## Procedure

1. Install Tivoli Storage Manager on the target server. This installation includes defining disk space for the database and recovery log, and defining initial server storage. For more information, refer to *Installation Guide*.
2. Consider setting up enterprise configuration for the target server so you can distribute consistent backup and archive policies to the target server.
3. Issue the **DEFINE SERVER** command to define the name of the target server or the originating server.
4. Ensure that the administrator that issues the export command is defined with the same administrator name and password on the target server, and has System authority on the target server.

### Related tasks:

Chapter 21, “Managing a network of Tivoli Storage Manager servers,” on page 681

“Setting up communications among servers” on page 686

## Previewing results of an export operation for immediate import

When you export data to another server, you can use the **PREVIEWIMPORT** option to determine how much data is transferred without moving any data. When **PREVIEWIMPORT=NO**, the export operation is performed, and the data is immediately imported to the target server. This option is available when you issue any **EXPORT** command.

### About this task

Issue each **EXPORT** command with **PREVIEWIMPORT=YES** to determine which objects and how much data is copied to the target server. Use this information to determine how much storage pool space is required on the target server. For each operation, the server sends the messages to the activity log.

The server also sends the messages to the Server console.

## Procedure

To determine how much space is required to export all server data, issue the following command:

```
export server filedata=all previewimport=yes
```

After you issue the **EXPORT SERVER** command, a message similar to the following message is issued when the server starts a background process:

EXPORT SERVER started as Process 4

You can view the preview results by querying the activity log.  
You can also view the results on the Server console.

### Related tasks:

“Requesting information about an export or import process” on page 764

“Canceling server processes” on page 604

## Directing import messages to an output file

The information that is generated by the validation process can help you define a storage hierarchy that supports the storage destinations that are currently defined in the import data.

### About this task

You can direct import messages to an output file to capture any error messages that are detected during the import process. Do this task by starting an administrative client session in console mode before you issue the import command.

### Procedure

To direct messages to an output file named IMPSERV.OUT, issue the following command:

```
> dsmadm -consolemode -outfile=impserv.out
```

## Monitoring the server-to-server export process

You can view information on the server console about an import or export process or you can view the information from an administrative client that is running in console mode.

Be watchful of mount messages because the server might request mounts of volumes that are not in the library. Check-in of volumes might be required.

If you want to view the status of any server-to-server exports that can be suspended, issue the **QUERY EXPORT** command. The **QUERY EXPORT** command lists all running or suspended operations.

If a process completes, you can query the activity log for status information from an administrative client that is running in batch or interactive mode.

You can also query the activity log for status information from the server console.

The process first builds a list of what is to be exported. The process can therefore be running for some time before any data is transferred. The connection between the servers might timeout. You might need to adjust the **COMMTIMEOUT** and **IDLETIMEOUT** server options on one or both servers.

If a process completes, you can query the activity log for status information from the server console or from an administrative client that is running in batch or interactive mode. The process first builds a list of what is to be exported. The process can therefore be running for some time before any data is transferred. The connection between the servers might timeout. You might need to adjust the **COMMTIMEOUT** and **IDLETIMEOUT** server options on one or both servers.

## Exporting administrator information to another server

When you issue the **EXPORT ADMIN** command, the server exports administrator definitions.

### About this task

Each administrator definition includes the following information:

- Administrator name, password, and contact information
- Any administrative privilege classes that the administrator has
- Whether the administrator ID is locked from server access

You can specify a list of administrator names, or you can export all administrator names.

You can preview the result on the server console or by querying the activity log.

### Procedure

Issue the following command to export all the administrator definitions to the target server defined as OTHERSERVER.

```
export admin * toserver=otherserver previewimport=yes
```

By issuing this command, you can preview the export without exporting the data for immediate import.

## Exporting client node information to another server

When you issue the **EXPORT NODE** command, the server exports client node definitions.

### About this task

Each client node definition includes the following information:

- User ID, password, and contact information
- Name of the policy domain to which the client is assigned
- File compression status
- Whether the user has the authority to delete backed up or archived files from server storage
- Whether the client node ID is locked from server access

You can also specify whether to export file data. File data includes file space definitions and authorization rules. You can request that file data is exported in any of the following groupings of files:

- Active and inactive versions of backed up files, archive copies of files, and space-managed files
- Active versions of backed up files, archive copies of files, and space-managed files
- Active and inactive versions of backed up files
- Active versions of backed up files
- Archive copies of files
- Space-managed files

## Procedure

To export client node information and all client files for NODE1 directly to SERVERB, issue the following example command:

```
export node node1 filedata=all toserver=serverb
```

## Results

**Important:** When you specify a list of node names or node patterns, the server does not report the node names or patterns that do not match any entries in the database. Check the summary statistics in the activity log to verify that the server exported all intended nodes.

## Exporting policy information to another server

When you issue the **EXPORT POLICY** command, the server exports information for each specified policy domain.

### About this task

The following items are exported:

- Policy domain definitions
- Policy set definitions, including the active policy set
- Management class definitions, including the default management class
- Backup copy group and archive copy group definitions
- Schedule definitions
- Associations between client nodes and schedules

## Procedure

To export policy information directly to SERVERB, issue the following example command:

```
export policy replacedefs=yes toserver=serverb
```

## Exporting server data to another server

When you issue the **EXPORT SERVER** command, the server exports all server control information. You can also export file data information with the **EXPORT SERVER** command.

## Procedure

To export server data to another server on the network and merge the file spaces with any existing file spaces on the target server, issue the following command. This command replaces definitions on the target server. The exported data begins with any data inserted in the originating server beginning on 10/25/2007.

```
export server toserver=serv23 fromdate=10/25/2007 filedata=all
mergefilespaces=yes dates=relative
```

---

## Exporting and importing data by using sequential media volumes

Before you export or import data, you can use the **EXPORT** or **IMPORT** command with the **PREVIEW** parameter to verify what data is moved and prepare sequential media for exporting and importing data.

### Previewing data export or import

You can specify **PREVIEW=YES** on the **EXPORT** and **IMPORT** commands to generate a report that shows how much data would be transferred without moving any data. When **PREVIEW=NO**, the data is exported or imported.

#### Procedure

1. To determine how much data and which objects are moved, issue both **EXPORT** or **IMPORT** commands with **PREVIEW=YES**.

The server sends export or import messages to the activity log and to the following place:

- Server console

**Export** Reports the types of objects, number of objects, and number of bytes that would be copied to sequential media volumes. Use this information to determine how many sequential media volumes you need.

#### Import

Reports the number and types of objects that are found on the sequential media volumes that meet your import specifications. Also reports information about any detected problems, such as corrupted data. Use this information to determine which data to move to the server and to determine if you have enough storage pool space that is allocated on the server.

2. To determine how much space is required to export all server data, issue the following command:

```
export server filedata=all preview=yes
```

After you issue the **EXPORT SERVER** command, the server starts a background process and issues a message similar to the following output:

EXPORT SERVER started as Process 4

You can view the preview results by querying the activity log or the following place:

- Server console

You can request information about the background process. If necessary, you can cancel an export or import process.

#### Related tasks:

“Requesting information about an export or import process” on page 764

“Canceling server processes” on page 604



## Planning for sequential media used to export data

To export data, you must specify a device class that supports sequential media and identify the volumes to store the exported data.

### Procedure

1. Select a device class.

You can query the source and target servers to select a device class on each server that supports the same device type. If you cannot find a device class on each server that supports a matching device type, define a new device class that is available to both servers.

#### Tips:

- a. If the mount limit for the device class is exceeded when you request an export (that is, if all the drives are busy), the server automatically cancels lesser priority operations, such as reclamation, to make a mount point available for the export process.
  - b. You can export data to a storage pool on another server by specifying a device class whose device type is SERVER.
2. Estimate the number of removable media volumes that you must label.  
To estimate the number of removable media volumes that you must label, divide the number of bytes to be moved by the estimated capacity of a volume in the storage pool.

You can estimate the following forms of removable media volumes:

- The number of removable media volumes that are required to store the exported data

For example, you have LTO Generation 1 tapes with an estimated capacity of 100 GB. If the preview shows that you must transfer 150 GB of data, then label at least two tape volumes before you export the data.

3. Use scratch media. You can use scratch media to ensure that you have sufficient space to store all the exported data. If you use scratch media, record the label names and the order in which they were mounted.

Or, you can use the **USEDVOLUMELIST** parameter on the **EXPORT** command to create a file that contains a list of volumes that were used.

4. Label the removable media volumes.

During an import process, you must specify the order in which volumes are to be mounted.

This order must match the order in which the following media were mounted during the export process:

- volumes

To ensure that the volumes are mounted in the correct order, label them with information that identifies the order in which they are mounted during the import process. For example, label them as DSM001, DSM002, DSM003.

When you export data, record the date and time for each labeled volume. Store this information in a safe location because you need the information when you import the data. Alternatively, if you used the **USEDVOLUMELIST** parameter on the export command, save the generated output file. This file can be used on the import command volumes parameter.

For more information about exporting data, see **EXPORT SERVER** in the *Administrative's Reference*.

#### Related tasks:

“Storing data on another server as virtual volumes” on page 726

“Defining device classes” on page 194

## Exporting tasks

You can export all server control information or a subset of server control information.

Specify one or more of the following export commands:

- **EXPORT ADMIN**
- **EXPORT NODE**
- **EXPORT POLICY**
- **EXPORT SERVER**

When you export data, you must specify the device class to which export data is written. You must also list the volumes in the order in which they are to be mounted when the data is imported.

You can specify the **USEDVOLUMELIST** parameter to indicate the name of a file where a list of volumes that are used in a successful export operation is stored. If the specified file is created without errors, it can be used as input to the **IMPORT** command on the **VOLUMENAMES=FILE:filename** parameter. This file contains comment lines with the date and time the export was done, and the command that was issued to create the export.

**Note:** An export operation does not overwrite an existing file. If you perform an export operation and then try the same operation again with the same volume name, the file is skipped, and a scratch file is allocated. To use the same volume name, delete the volume entry from the volume history file.

### Related tasks:

“Planning for sequential media used to export data” on page 748

## Exporting administrator information

When you issue the **EXPORT ADMIN** command, the server exports administrator definitions.

### About this task

Each administrator definition includes the following information:

- Administrator name, password, and contact information
- Any administrative privilege classes the administrator has
- Whether the administrator ID is locked from server access

You can specify a list of administrator names, or you can export all administrator names.

### Procedure

Issue the following command to export definitions for the DAVEHIL and PENNER administrator IDs to the DSM001 tape volume, which the TAPECLASS device class supports, and to not allow any scratch media to be used during this export process:

```
export admin davehil,penner devclass=tapeclass
volumenames=dsm001 scratch=no
```

## Exporting client node information

When you issue the **EXPORT NODE** command, the server exports client node definitions.

### About this task

Each client node definition includes the following information:

- User ID, password, and contact information
- Name of the policy domain to which the client is assigned
- File compression status
- Whether the user has the authority to delete backed up or archived files from server storage
- Whether the client node ID is locked from server access

You can also specify whether to export file data. File data includes file space definitions and authorization rules. You can request that file data is exported in any of the following groupings of files:

- Active and inactive versions of backed up files, archive copies of files, and space-managed files
- Active versions of backed up files, archive copies of files, and space-managed files
- Active and inactive versions of backed up files
- Active versions of backed up files
- Archive copies of files
- Space-managed files

When you export active versions of client backup data, the server searches for active file versions in an active-data pool that is associated with a FILE device class, if such a pool exists. This process minimizes the number of mounts that are required during the export process.

If you do not specify that you want to export file data, then the server exports only client node definitions.

For example, suppose that you want to complete the following steps:

- Export definitions for client nodes and file spaces in the ENGPOLDOM policy domain
- Export any active backup versions of files that belong to these client nodes
- Export this information to scratch volumes in the TAPECLASS device class

### Procedure

To issue this command, enter:

```
export node filespace=* domains=engpoldom
filedata=backupactive devclass=tapeclass
```

In this example, the server exports:

- Definitions of client nodes that are assigned to ENGPOLDOM
- File space definitions and backup authorizations for each client node in ENGPOLDOM
- Active versions of backed up files that belong to the client nodes assigned to ENGPOLDOM

### Related concepts:

“Selection for active file versions” on page 426

## Exporting policy information

You must issue the **EXPORT POLICY** command to export policy information.

### About this task

When you issue the **EXPORT POLICY** command, the server exports the following information for each specified policy domain:

- Policy domain definitions
- Policy set definitions, including the active policy set
- Management class definitions, including the default management class
- Backup copy group and archive copy group definitions
- Schedule definitions
- Associations between client nodes and schedules

For example, suppose that you want to export policy and scheduling definitions from the policy domain named **ENGOLDOM**. You want to use tape volumes **DSM001** and **DSM002**, which belong to the **TAPECLASS** device class, but allow the server to use scratch tape volumes if necessary.

### Procedure

To issue this command, enter:

```
export policy engoldom
devclass=tapeclass volumenames=dsm001,dsm002
```

## Exporting server data

When you issue the **EXPORT SERVER** command, the server exports all server control information. You can also export file data information with the **EXPORT SERVER** command.

### About this task

For example, you want to export server data to four defined tape cartridges, which the **TAPECLASS** device class supports. You want the server to use scratch volumes if the four volumes are not enough, and so you use the default of **SCRATCH=YES**.

### Procedure

To issue this command, enter:

```
export server devclass=tapeclass
volumenames=dsm001,dsm002,dsm003,dsm004 filedata=all
```

During the export process, the server exports definition information before it exports file data information. This order ensures that definition information is stored on the first tape volumes. During the import process, if your goal is to copy only control information to the target server, only a minimum number of tapes must be mounted.

In the preceding example, the server exports:

- Administrator definitions
- Client node definitions
- Policy domain, policy set, management class, and copy group definitions

- Schedule definitions and client node associations
- File space definitions
- File space authorization rules

**Important:** If you are using wildcard characters when you are retrieving or restoring data, file space authorization rules might prohibit data from being included. Wildcard characters might be ignored if your client access rules also use wildcard characters when the **SET ACCESS** command is issued. See the Backup-Archive Clients Installation and User's Guide for your platform.

- Backed up, archived, and space-managed files

When you are exporting active versions of client backup data, the server searches for active file versions in an active-data storage pool that is associated with a FILE device class, if such a pool exists.

**Related concepts:**

“Selection for active file versions” on page 426

## Importing data from sequential media volumes

After you understand how to import server control information and file data information, you can import any subset of data to the target server.

### Procedure

Before you import data to a new target server, you must complete the following steps:

1. Install Tivoli Storage Manager for the target server. This step includes defining disk space for the database and recovery log.

For information on installing Tivoli Storage Manager, see *Installation Guide*.

2. Define server storage for the target server.

Because each server operating system handles devices differently, server storage definitions are not exported. Therefore, you must define initial server storage for the target server. The target server must at least be able to use a drive that is compatible with the export media. This task can include defining libraries, drives, device classes, storage pools, and volumes. See the *Administrator's Guide* that applies to the target server.

### Results

After Tivoli Storage Manager is installed and set up on the target server, a system administrator can import all server control information or a subset of server control information by specifying one or more of the following import commands:

- **IMPORT ADMIN**
- **IMPORT NODE**
- **IMPORT POLICY**
- **IMPORT SERVER**

The entire process of importing all server control information and file data from tape volumes to a new target server includes the following steps:

- Previewing information before you import data
- Importing definitions
- Tailoring server storage definitions on the target server
- Importing file data

## Options to consider before you import data

Before you import data from sequential media you might consider whether to merge file spaces, replace existing definitions, or use a relative date when you import file data.

### Merge file spaces:

You can merge imported client backup, archive, and space-managed files into existing file spaces, and automatically skip duplicate files that might exist in the target file space on the server. Optionally, you can have new file spaces created.

If you do not want to merge file spaces, look into how duplicate file spaces are managed. By choosing to merge file spaces, you can restart a canceled import operation since files that were previously imported can be skipped in the subsequent import operation.

When you merge file spaces, the server performs versioning of the imported objects by using the policy that is bound to the files. An import operation might leave the target file space with more versions than policy permits. Files are versioned to maintain the policy intent for the files, especially when incremental export (by using the **FROMDATE** and **FROMTIME** parameters) is used to maintain duplicate client file copies on two or more servers.

The following definitions show how the server merges imported files, based on the type of object, when you specify **MERGEFILESACES=YES**.

### Archive Objects

If an archive object for the imported node that has the same TCP/IP address, TCP/IP port, insert date, and description is found to exist on the target server, the imported object is skipped. Otherwise, the archive object is imported.

### Backup Objects

If a backup object for the imported node has the same TCP/IP address, TCP/IP port, insert date, and description as the imported backup object, the imported object is skipped. When backup objects are merged into existing file spaces, versioning is done according to policy just as it occurs when backup objects are sent from the client during a backup operation. Setting their insert dates to zero marks excessive file versions for expiration.

Otherwise, the server completes the following tasks:

- If the imported backup object has a more recent insert date than an active version of an object on the target server with the same node, file space, TCP/IP address, and TCP/IP port, then the imported backup object becomes the new active copy. The active copy on the target server is made inactive. Tivoli Storage Manager expires this inactive version according to the number of versions that are allowed in policy.
- If the imported backup object has an earlier (less recent) insert date than an active copy of an object on the target server with the same node, file space, TCP/IP address, and TCP/IP port, then the imported backup object is inserted as an inactive version.
- If there are no active versions of an object with the same node, file space, TCP/IP address, TCP/IP port on the target server, and the imported object has the same node, TCP/IP address, TCP/IP port as the versions, then:

- An imported active object with a later insert date than the most recent inactive copy becomes the active version of the file.
- An imported active object with an earlier insert date than the most recent inactive copy is imported as an inactive version of the file
- Any imported inactive objects are imported as other inactive versions of the object.

### **Space Managed Objects**

If the imported node's space-managed object has an external file ID that is already on the target server, then the imported object is skipped. Otherwise, the space-managed object is imported.

The number of objects that are imported and skipped is displayed with the final statistics for the import operation.

#### **Related concepts:**

“Managing duplicate file spaces” on page 760

#### **Related tasks:**

“Querying the activity log for export or import information” on page 766

### **Determining whether to replace existing definitions:**

By using the **REPLACEDEFS** parameter with the **IMPORT** command, you can specify whether to replace existing definitions on the target server when Tivoli Storage Manager encounters an object with the same name during the import process.

For example, if a definition exists for the ENGPOLDOM policy domain on the target server before you import policy definitions, then you must specify **REPLACEDEFS=YES** to replace the existing definition with the data from the export tape.

Definitions that can be replaced include administrator, client node, policy, or schedule definitions. The default is to not replace existing definitions on the target server.

### **Deciding whether to use a relative date when you are importing file data:**

When you import file data, you can keep the original creation date for backup versions and archive copies, or you can specify that the server use an adjusted date.

If you want to keep the original dates set for backup versions and archive copies, use **DATES=ABSOLUTE**, which is the default. If you use the absolute value, any files whose retention period is passed will be expired shortly after they are imported to the target server.

When you specify a relative date, the dates of the file versions are adjusted to the date of import on the target server. This adjustment is helpful when you export from a server that is in a different time zone than the target server.

## Previewing information before you import data

Before you import any data to the target server, preview each **IMPORT** command to determine what data you want to import to the target server. You can import all or a subset of export data from tapes.

### About this task

When you set **PREVIEW=YES**, tape operators must mount export tape volumes so that the target server can calculate the statistics for the preview.

### Procedure

Issue the following design to preview information for the **IMPORT SERVER** command:

```
import server devclass=tapeclass preview=yes
volumenames=dsm001,dsm002,dsm003,dsm004
```

Figure 89 on page 756 shows an example of the messages that are sent to the activity log and the following place:

Server console



```

ANR0402I Session 3 started for administrator SERVER_CONSOLE (Server).
ANR1363I Import volume DSM001 opened (sequence number 1).
ANR0610I IMPORT SERVER started by SERVER_CONSOLE as process 2.
ANR0612I IMPORT SERVER: Reading EXPORT SERVER data from server SERV1
exported 05/07/1996 12:39:48.
ANR0639I IMPORT SERVER: Processing domain ENGPOLDOM.
ANR0640I IMPORT SERVER: Processing policy set ACTIVE in policy domain
ENGPOLDOM.
ANR0640I IMPORT SERVER: Processing policy set STANDARD in policy domain
ENGPOLDOM.
ANR0641I IMPORT SERVER: Processing management class STANDARD in domain
ENGPOLDOM, set ACTIVE.
ANR0641I IMPORT SERVER: Processing management class MCENG in domain
ENGPOLDOM, set STANDARD.
ANR0641I IMPORT SERVER: Processing management class STANDARD in domain
ENGPOLDOM, set STANDARD.
ANR0643I IMPORT SERVER: Processing archive copy group in domain
ENGPOLDOM, set ACTIVE, management class STANDARD.
ANR0643I IMPORT SERVER: Processing archive copy group in domain ENGPOLDOM,
set STANDARD, management class MCENG.
ANR0643I IMPORT SERVER: Processing archive copy group in domain ENGPOLDOM,
set STANDARD, management class STANDARD.
ANR0642I IMPORT SERVER: Processing backup copy group in domain ENGPOLDOM,
set ACTIVE, management class STANDARD.
ANR0642I IMPORT SERVER: Processing backup copy group in domain ENGPOLDOM,
set STANDARD, management class MCENG.
ANR0642I IMPORT SERVER: Processing backup copy group in domain ENGPOLDOM,
set STANDARD, management class STANDARD.
ANR0638I IMPORT SERVER: Processing administrator DAVEHIL.
ANR0638I IMPORT SERVER: Processing administrator PENNER.
ANR0635I IMPORT SERVER: Processing node TOMC.
ANR0636I IMPORT SERVER: Processing file space OS2 for node TOMC as file
space OS1.
ANR0636I IMPORT SERVER: Processing file space DRIVED for node TOMC as file
space DRIVE1.
ANR0636I IMPORT SERVER: Processing file space OS2VDISK for node TOMC as file
space OS2VDIS1.
ANR1365I Import volume DSM001 closed (end reached).
ANR1363I Import volume DSM002 opened (sequence number 2).
ANR1365I Import volume DSM002 closed (end reached).
ANR1363I Import volume DSM003 opened (sequence number 3).
ANR1365I Import volume DSM003 closed (end reached).
ANR1363I Import volume DSM004 opened (sequence number 4).
ANR1365I Import volume DSM004 closed (end reached).
ANR0617I IMPORT SERVER: Processing completed successfully.
ANR0620I IMPORT SERVER: Copied 1 domain(s).
ANR0621I IMPORT SERVER: Copied 2 policy set(s).
ANR0622I IMPORT SERVER: Copied 2 management class(es).
ANR0623I IMPORT SERVER: Copied 6 copy group(s).
ANR0625I IMPORT SERVER: Copied 2 administrator(s).
ANR0626I IMPORT SERVER: Copied 1 node definition(s).
ANR0627I IMPORT SERVER: Copied 3 file space(s), 0 archive file(s) and 462
backup file(s).
ANR0629I IMPORT SERVER: Copied 8856358 bytes of data.
ANR0611I IMPORT SERVER started by SERVER_CONSOLE as process 2 has ended.

```

*Figure 89. Sample report created by issuing preview for an import server command*

Use the value reported for the total number of bytes copied to estimate the storage pool space for imported file data.

For example, Figure 89 shows that 8 856 358 bytes of data would be imported. Ensure that you have at least 8 856 358 bytes of available space in the backup storage pools that are defined to the server. You can issue the **QUERY STGPPOOL** and **QUERY VOLUME** commands to determine how much space is available in the server storage hierarchy. In addition, the preview report shows that 0 archive files and 462 backup files would be imported. Because backup data is being imported, ensure that you have sufficient space in the backup storage pools that are used to store this backup data.

#### **Related tasks:**

“Tailoring server storage definitions on the target server” on page 759

“Previewing data export or import” on page 747

**Related reference:**

“Monitoring export and import processes” on page 763

## Importing definitions

When you preview information before you import data, you must import server control information. This information includes administrator definitions, client node definitions, policy domain, policy set, management class, and copy group definitions, schedule definitions, and client node associations.

### Before you begin

Read the following topics:

- “Determining whether to replace existing definitions” on page 754
- “Determining how the server imports active policy sets”

### Procedure

1. Start an administrative client session in console mode to capture import messages to an output file.
2. Import the server control information from specified tape volumes.

**Related tasks:**

“Directing import messages to an output file” on page 758

“Importing server control information” on page 758

### Determining how the server imports active policy sets:

When the server imports policy definitions, several objects are imported to the target server.

The following items are imported:

- Policy domain definitions
- Policy set definitions, including the ACTIVE policy set
- Management class definitions
- Backup copy group definitions
- Archive copy group definitions
- Schedule definitions that are defined for each policy domain
- Client node associations, if the client node definition exists on the target server

If the server encounters a policy set named ACTIVE on the tape volume during the import process, it uses a temporary policy set named \$\$ACTIVE\$\$ to import the active policy set.

If `replacedefs=yes`, a copy of the active policy set named \$\$ACTIVE\$\$ is made on the target server. The \$\$ACTIVE\$\$ policy set is updated with the definitions from the ACTIVE policy set in the export of the source. The new active policy set at the target server contains all the management classes from the ACTIVE policy set from the export server and from the ACTIVE policy set that exists on the importing server.

After \$\$ACTIVE\$\$ is imported to the target server, the server activates this policy set. During the activation process, the server validates the policy set by examining

the management class and copy group definitions. If any of the following conditions occur, warning messages are issued by the server during validation:

- The storage destinations that are specified in the backup and archive copy groups do not refer to defined storage pools.
- The default management class does not contain a backup or archive copy group.
- The current ACTIVE policy set contains management class names that are not defined in the policy set to be activated.
- The current ACTIVE policy set contains copy group names that are not defined in the policy set to be activated.

After each **\$\$ACTIVE\$\$** policy set is activated, the server deletes that **\$\$ACTIVE\$\$** policy set from the target server. To view information about active policy on the target server, you can use the following commands:

- **QUERY COPYGROUP**
- **QUERY DOMAIN**
- **QUERY MGMTCLASS**
- **QUERY POLICYSET**

Results from issuing the **QUERY DOMAIN** command show the activated policy set as **\$\$ACTIVE\$\$**. The **\$\$ACTIVE\$\$** name shows you that the policy set that is activated for this domain is the policy set that was active at the time the export was performed.

### **Directing import messages to an output file:**

The information that is generated by the validation process can help you define a storage hierarchy that supports the storage destinations that are currently defined in the import data.

### **About this task**

You can direct import messages to an output file to capture any error messages that are detected during the import process. Complete this task by starting an administrative client session in console mode before you issue the import command.

### **Procedure**

To direct messages to an output file named **IMPSEV.OUT**, issue the following command:

```
> dsmadm -consolemode -outfile=impserv.out
```

### **Importing server control information:**

After you complete the prerequisite steps, you might be ready to import the server control information.

### **About this task**

Based on the information that is generated during the preview operation, you know that all definition information is stored on the first tape volume named **DSM001**. Specify that this tape volume can be read by a device that belongs to the **TAPECLASS** device class.

## Procedure

Issue the following command:

```
import server filedata=none devclass=tapeclass volumenames=dsm001
```

You can issue the command from an administrative client session or from the following source:

server console

## Tailoring server storage definitions on the target server

If you previously imported definition information, you can use the reports that are generated by the import process to help you tailor storage for the target server.

## Procedure

To tailor server storage definitions on the target server, complete the following steps:

1. Identify any storage destinations that are specified in copy groups and management classes that do not match defined storage pools:
  - If the policy definitions you imported included an ACTIVE policy set, that policy set is validated and activated on the target server. Error messages that are generated during validation include whether any management classes or copy groups refer to storage pools that do not exist on the target server. If you directed console messages to an output file, you have a copy of these messages in a file.
  - Query management class and copy group definitions to compare the storage destinations that are specified with the names of existing storage pools on the target server.

To request detailed reports for all management classes, backup copy groups, and archive copy groups in the ACTIVE policy set, enter these commands:

```
query mgmtclass * active * format=detailed
query copygroup * active * standard type=backup format=detailed
query copygroup * active * standard type=archive format=detailed
```
2. If storage destinations for management classes and copy groups in the ACTIVE policy set refer to storage pools that are not defined, complete one of the following tasks:
  - Define storage pools that match the storage destination names for the management classes and copy groups.
  - Change the storage destinations for the management classes and copy groups. Complete the following steps:
    - a. Copy the ACTIVE policy set to another policy set
    - b. Modify the storage destinations of management classes and copy groups in that policy set, as needed
    - c. Activate the new policy set

## Results

Depending on the amount of client file data that you expect to import, you might want to examine the storage hierarchy to ensure that sufficient storage space is available. Storage pools that are specified as storage destinations by management classes and copy groups might fill up with data. For example, you might need to define extra storage pools to which data can migrate from the initial storage destinations.

**Related tasks:**

“Directing import messages to an output file” on page 758

“Defining storage pools” on page 257

**Importing file data information**

After you define the appropriate storage hierarchy on the target server, you can import file data from the tape volumes. File data includes file space definitions and authorization rules.

You can request that file data is imported in any of the following groupings:

- Active and inactive versions of backed up files, archive copies of files, and space-managed files
- Active versions of backed up files, archive copies of files, and space-managed files
- Active and inactive versions of backed up files
- Active versions of backed up files
- Archive copies of files
- Space-managed files

Data being imported is not stored in active-data pools. Use the **COPY ACTIVATEDATA** command to store newly imported data into an active-data pool.

Before you import file data information, understand how the server handles duplicate file space names.

Before you import file data information, decide whether to keep the original creation date for backup versions and archive copies or to import file data by using an adjusted date.

**Managing duplicate file spaces:**

When the server imports file data information, it imports any file spaces that belong to each specified client node. If a file space definition exists on the target server for the node, the server does not replace the existing file space name.

If the server encounters duplicate file space names when it imports file data information, it creates a new file space name for the imported definition. It creates the new name by replacing the final character or characters with a number. A message that shows the old and new file space names is written to the system log and to the activity log. A message that shows the old and new file space names is written to the activity log and to the following place:

- server console

For example, if the C\_DRIVE and D\_DRIVE file space names are on the target server for node FRED and on the tape volume for FRED, then the server imports the C\_DRIVE file space as C\_DRIV1 file space and the D\_DRIVE file space as D\_DRIV1 file space, both assigned to node FRED.

### Deciding whether to use a relative date when you are importing file data:

When you import file data, you can keep the original creation date for backup versions and archive copies, or you can specify that the server use an adjusted date.

Because tape volumes that contain exported data might not be used for some time, the original dates that are defined for backup versions and archive copies might be old enough that files are expired immediately when the data is imported to the target server.

To prevent backup versions and archive copies from being expired immediately, specify `DATES=RELATIVE` on the **IMPORT NODE** or **IMPORT SERVER** commands to adjust for the elapsed time since the files were exported to tape.

For example, assume that data that is exported to tape includes an archive copy that was archived five days before the export operation. If the tape volume is on the shelf for six months before the data is imported to the target server, the server resets the archival date to five days before the import operation.

If you want to keep the original dates set for backup versions and archive copies, use `DATES=ABSOLUTE`, which is the default. If you use the absolute value, any files whose retention period is passed will be expired shortly after they are imported to the target server.

### Issuing an import server or import node command:

You can import file data, either by issuing the **IMPORT SERVER** or **IMPORT NODE** command. When you issue either of these commands, you can specify which type of files are imported for all client nodes that are specified and found on the export tapes.

#### About this task

You can specify any of the following values to import file data:

**All** Specifies that all active and inactive versions of backed up files, archive copies of files, and space-managed files for specified client nodes are imported to the target server.

**None** Specifies that no files are imported to the target server; only client node definitions are imported.

#### Archive

Specifies that only archive copies of files are imported to the target server.

#### Backup

Specifies that only backup copies of files, whether active or inactive, are imported to the target server.

#### Backupactive

Specifies that only active versions of backed up files are imported to the target server.

#### Allactive

Specifies that only active versions of backed up files, archive copies of files, and space-managed files are imported to the target server.

## Spacemanaged

Specifies that only files that were migrated from a user's local file system (space-managed files) are imported.

For example, suppose you want to import all backup versions of files, archive copies of files, and space-managed files to the target server. You do not want to replace any existing server control information during this import operation.

## Procedure

Specify the four tape volumes that were identified during the preview operation. These tape volumes can be read by any device in the TAPECLASS device class. To issue this command, enter:

```
import server filedata=all replacedefs=no
devclass=tapeclass volumenames=dsm001,dsm002,dsm003,dsm004
```

You can limit the import to nodes that were assigned to specific policy domains on the source server. For example, suppose that you exported from the source server the data for all nodes in all domains. To import to the target server the data only for nodes that were in the ENGDOM on the source server, enter this command:

```
import node filedata=all domains=engdom devclass=tapeclass
volumenames=dsm001,dsm002,dsm003,dsm004
```

If the ENGDOM policy domain exists on the target server, the imported nodes are assigned to that domain. If ENGDOM does not exist on the target server, the imported nodes are assigned to the STANDARD policy domain.

If you do not specify a domain on the **IMPORT NODE** command, the imported node is assigned to the STANDARD policy domain.

## Importing subsets of information

You can use an **IMPORT** command to copy a subset of the information from export tapes to the target server. For example, if a tape was created with **EXPORT SERVER**, you can import only node information from the tape by using **IMPORT NODE**.

Although you can issue any import command from the server, data cannot be imported to the server if it was not exported to tape. For example, if a tape is created with the **EXPORT POLICY** command, an **IMPORT NODE** command does not find any data on the tape because node information is not a subset of policy information.

See Table 72 for the commands that you can use to import a subset of exported information to a target server.

*Table 72. Importing a subset of information from tapes*

| If tapes were created with this export command: | You can issue this import command:                                                        | You cannot issue this import command:       |
|-------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>EXPORT SERVER</b>                            | <b>IMPORT SERVER</b><br><b>IMPORT ADMIN</b><br><b>IMPORT NODE</b><br><b>IMPORT POLICY</b> | Not applicable.                             |
| <b>EXPORT NODE</b>                              | <b>IMPORT NODE</b><br><b>IMPORT SERVER</b>                                                | <b>IMPORT ADMIN</b><br><b>IMPORT POLICY</b> |
| <b>EXPORT ADMIN</b>                             | <b>IMPORT ADMIN</b><br><b>IMPORT SERVER</b>                                               | <b>IMPORT NODE</b><br><b>IMPORT POLICY</b>  |



Table 72. Importing a subset of information from tapes (continued)

| If tapes were created with this export command: | You can issue this import command:           | You cannot issue this import command:     |
|-------------------------------------------------|----------------------------------------------|-------------------------------------------|
| <b>EXPORT POLICY</b>                            | <b>IMPORT POLICY</b><br><b>IMPORT SERVER</b> | <b>IMPORT ADMIN</b><br><b>IMPORT NODE</b> |

## Recovering from errors during the import process

During import processing, the server might encounter invalid data due to corruption during storage on tape or in the database before the export operation.

If invalid data is encountered during an import operation, the server uses the default value for the new object's definition. If the object exists, the existing parameter is not changed.

During import and export operations, the server reports on the affected objects to the activity log and also to the following destination:

server console

You can query these objects when the import process is complete to see if they reflect information that is acceptable.

Each time that you run the **IMPORT NODE** or **IMPORT SERVER** command with the **FILEDATA** parameter equal to a value other than **NONE**, Tivoli Storage Manager creates a new file space and imports data to it. This process ensures that the current import does not overwrite data from a previous import.

A file space definition might exist on the target server for the node. If so, an administrator with system privilege can issue the **DELETE FILESPACE** command to remove file spaces that are corrupted or no longer needed. For more information on the **DELETE FILESPACE** command, refer to the *Administrator's Reference*.

### Related concepts:

"Managing duplicate file spaces" on page 760

### Renaming a file space:

An imported file space can have the same name as a file space that exists on a client node. In this case, the server does not overlay the existing file space, and the imported file space is given a new system generated file space name.

This new name might match file space names that were never backed up and are unknown to the server. In this case, you can use the **RENAME FILESPACE** command to rename the imported file space to the naming convention used for the client node.

## Monitoring export and import processes

From the server, you can monitor export or import processes while they are running or after they complete.

You can use the following two ways to monitor export or import processes:

- You can view information about a process that is running on the server console or from an administrative client that is running in console mode.
- After a process completes, you can query the activity log for status information from an administrative client that is running in batch or interactive mode.



Watch for mount messages because the server might request mounts of volumes that are not in the library. The process first builds a list of what is to be exported. The process can therefore be running for some time before any data is transferred.

Check-in of volumes might be required.

### **Requesting information about an export or import process**

After you issue an **EXPORT** or **IMPORT** command, the server starts a background process, assigns a process ID to the operation, and displays the process ID when the operation starts.

#### **About this task**

You can query an export or import process by specifying the process ID number.

#### **Procedure**

Specify the process ID number on the **QUERY PROCESS** command. For example, to request information about the **EXPORT SERVER** operation, which started as process 4, enter:

```
query process 4
```

If you issue a preview version of an **EXPORT** or **IMPORT** command and then query the process, the server reports the types of objects to be copied, the number of objects to be copied, and the number of bytes to be copied.

When you export or import data and then query the process, the server displays the number and types of objects that are copied so far, and the total number of bytes that were transferred. The server also displays information on any media mount requests that might be outstanding for the process.

#### **Related tasks:**

“Requesting information about server processes” on page 821

### **Viewing information from the server console**

When you issue an **EXPORT** or **IMPORT** command, either from the server console or from an administrative client, information is displayed on the server console.

Figure 90 on page 765 shows an example of the information that is displayed after you issue an **EXPORT SERVER** command.

```

ANR0610I EXPORT SERVER started by SERVER_CONSOLE as process 1.
ANR0639I EXPORT SERVER: Processing domain ENGPOLDOM.
ANR0640I EXPORT SERVER: Processing policy set ACTIVE in policy domain
ENGPOLDOM.
ANR0640I EXPORT SERVER: Processing policy set STANDARD in policy domain
ENGPOLDOM.
ANR0641I EXPORT SERVER: Processing management class STANDARD in domain
ENGPOLDOM, set ACTIVE.
ANR0641I EXPORT SERVER: Processing management class STANDARD in domain
ENGPOLDOM, set STANDARD.
ANR0643I EXPORT SERVER: Processing archive copy group in domain
ENGPOLDOM, set STANDARD, management class ACTIVE.
ANR0643I EXPORT SERVER: Processing archive copy group in domain
ENGPOLDOM, set STANDARD, management class STANDARD.
ANR0643I EXPORT SERVER: Processing backup copy group in domain
ENGPOLDOM, set STANDARD, management class ACTIVE.
ANR0643I EXPORT SERVER: Processing backup copy group in domain
ENGPOLDOM, set STANDARD, management class STANDARD.
ANR0604I EXPORT SERVER: No schedules were found in policy domain * for
exporting.
ANR0635I EXPORT SERVER: Processing node TOMC.
ANR0605I EXPORT SERVER: No schedule associations were found in
policy domain * for exporting.
ANR0637I EXPORT SERVER: Processing file space DRIVED for node TOMC.
ANR0637I EXPORT SERVER: Processing file space OS2 for node TOMC.
ANR0637I EXPORT SERVER: Processing file space OS2VDISK for node TOMC.
ANR0617I EXPORT SERVER: Processing completed successfully.
ANR0620I EXPORT SERVER: Copied 1 domain(s).
ANR0621I EXPORT SERVER: Copied 2 policy set(s).
ANR0622I EXPORT SERVER: Copied 2 management class(es).
ANR0623I EXPORT SERVER: Copied 4 copy group(s).
ANR0626I EXPORT SERVER: Copied 1 node definition(s).
ANR0627I EXPORT SERVER: Copied 3 file space(s), 16 archive file(s)
and 0 backup file(s).
ANR0629I EXPORT SERVER: Copied 3045632 bytes of data.
ANR0611I EXPORT SERVER started by SERVER_CONSOLE as process 1 has ended.

```

Figure 90. Sample export server output

## Viewing information from an administrative client

You can use the console mode from an administrative client to monitor export or import operations or to capture processing messages to an output file.

### Procedure

1. To start an administrative session in console mode, issue the following command:

```
> dsmadm -consolemode
```

While the system is running in console mode, you cannot enter any administrative commands from the client session. You can, however, start another administrative client session for entering commands (for example, **QUERY PROCESS**) if you are using a multitasking workstation, such as AIX.

2. If you want the server to write all terminal output to a file, specify the **OUTFILE** option with a destination. For example, to write output to the **SAVE.OUT** file, enter:

```
> dsmadm -consolemode -outfile=save.out
```

For information about using the **CONSOLE** mode option and ending an administrative session in console mode, see the *Administrator's Reference*.

## Querying the activity log for export or import information

After an export or import process completes, you can query the activity log for status information and possible error messages.

### About this task

To minimize processing time when querying the activity log for export or import information, restrict the search by specifying **EXPORT** or **IMPORT** in the **SEARCH** parameter of the **QUERY ACTLOG** command.

### Procedure

To determine how much data will be moved after you issue the preview version of the **EXPORT SERVER** command, query the activity log by issuing the following command:

```
query actlog search=export
```

### Results

Figure 91 on page 767 displays a sample activity log report.

| Date/Time           | Message                                                                                                             |
|---------------------|---------------------------------------------------------------------------------------------------------------------|
| 07/03/2002 10:50:28 | ANR0610I EXPORT SERVER started by ADMIN as process 1.                                                               |
| 07/03/2002 10:50:28 | ANR0639I EXPORT SERVER: Processing domain ENGPOLDOM.                                                                |
| 07/03/2002 10:50:28 | ANR0640I EXPORT SERVER: Processing policy set ACTIVE in policy domain ENGPOLDOM.                                    |
| 07/03/2002 10:50:28 | ANR0640I EXPORT SERVER: Processing policy set STANDARD in policy domain ENGPOLDOM.                                  |
| 07/03/2002 10:50:29 | ANR0641I EXPORT SERVER: Processing management class STANDARD in domain ENGPOLDOM, set ACTIVE.                       |
| 07/03/2002 10:50:29 | ANR0641I EXPORT SERVER: Processing management class STANDARD in domain ENGPOLDOM, set STANDARD.                     |
| 07/03/2002 10:50:29 | ANR0643I EXPORT SERVER: Processing archive copy group in domain ENGPOLDOM, set STANDARD, management class ACTIVE.   |
| 07/03/2002 10:50:29 | ANR0643I EXPORT SERVER: Processing archive copy group in domain ENGPOLDOM, set STANDARD, management class STANDARD. |
| 07/03/2002 10:50:29 | ANR0642I EXPORT SERVER: Processing backup copy group in domain ENGPOLDOM, set STANDARD, management class ACTIVE.    |
| 07/03/2002 10:50:29 | ANR0642I EXPORT SERVER: Processing backup copy group in domain ENGPOLDOM, set STANDARD, management class STANDARD.  |
| 07/03/2002 10:50:29 | ANR0604I EXPORT SERVER: No schedules were found in policy domain * for exporting.                                   |
| 07/03/2002 10:50:29 | ANR0635I EXPORT SERVER: Processing node TOMC.                                                                       |
| 07/03/2002 10:50:29 | ANR0605I EXPORT SERVER: No schedule associations were found in policy domain * for exporting.                       |
| 07/03/2002 10:50:29 | ANR0637I EXPORT SERVER: Processing file space DRIVED for node TOMC.                                                 |
| 07/03/2002 10:50:29 | ANR0637I EXPORT SERVER: Processing file space OS2 for node TOMC.                                                    |
| 07/03/2002 10:50:29 | ANR0637I EXPORT SERVER: Processing file space OS2VDISK for node TOMC.                                               |
| 07/03/2002 10:50:32 | ANR0617I EXPORT SERVER: Processing completed successfully.                                                          |
| 07/03/2002 10:50:32 | ANR0620I EXPORT SERVER: Copied 1 domain(s).                                                                         |
| 07/03/2002 10:50:32 | ANR0621I EXPORT SERVER: Copied 2 policy set(s).                                                                     |
| 07/03/2002 10:50:32 | ANR0622I EXPORT SERVER: Copied 2 management class(es).                                                              |
| 07/03/2002 10:50:32 | ANR0623I EXPORT SERVER: Copied 4 copy group(s).                                                                     |
| 07/03/2002 10:50:32 | ANR0626I EXPORT SERVER: Copied 1 node definition(s).                                                                |
| 07/03/2002 10:50:32 | ANR0627I EXPORT SERVER: Copied 3 file space(s), 16 export file(s) and 0 backup file(s).                             |
| 07/03/2002 10:50:32 | ANR0629I EXPORT SERVER: Copied 3045632 bytes of data.                                                               |
| 07/03/2002 10:50:32 | ANR0611I EXPORT SERVER started by ADMIN as process 1 has ended.                                                     |

Figure 91. Sample activity log report on exported data

## Exporting and importing data from virtual volumes

You can perform all the EXPORT and IMPORT operations to virtual volumes that are described in the sequential media topics.

Data that is stored as virtual volumes appear to be sequential storage pool volumes on the source server, but are stored as archive files on another server. Those archive files can be in random or sequential access storage pools. The **EXPORT** and **IMPORT** commands are identical to those commands previously shown except that the device class specified in the commands must have a device type of SERVER.

### Related tasks:

“Storing data on another server as virtual volumes” on page 726

“Exporting and importing data by using sequential media volumes” on page 747



---

## Part 5. Monitoring operations

To ensure that all clients are protected as expected, you must monitor server and client operations and maintenance processes.



## Chapter 23. Daily monitoring from the Operations Center

From the Operations Center, you can complete daily monitoring tasks to ensure that the Tivoli Storage Manager system is functioning properly.

Figure 92 shows the Overview page of the Operations Center. Table 73 describes the daily monitoring tasks that correspond to the numbered areas in the figure.



Figure 92. Overview page of the Operations Center

Table 73. Daily monitoring tasks

| Area of Overview page | Daily monitoring task                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1</b> TSM Clients  | Determine whether any clients are at risk of being unprotected due to failed or missed backups.<br><br>Click the TSM Clients area to view details.                                     |
| <b>2</b> Alerts       | Determine whether any client-related or server-related errors require attention.<br><br>Click the Alerts area to view details. Activity log messages are available on the Alerts page. |
| <b>3</b> Activity     | Verify that the amount of data that was recently sent to and from the Tivoli Storage Manager servers is within the expected range.                                                     |



Table 73. Daily monitoring tasks (continued)

| Area of Overview page    | Daily monitoring task                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>4</b> TSM Servers     | <p>Verify that the Tivoli Storage Manager servers that are managed by the Operations Center are available to provide data protection services to clients.</p> <p>Click the TSM Servers area to view details and to navigate to more details for a specific server, for example:</p> <ol style="list-style-type: none"> <li>1. On the Servers page, select a server, and click <b>Details</b>.</li> <li>2. See the Summary, Active Tasks, and Completed Tasks tabs.</li> </ol> <p><b>Tips:</b></p> <ul style="list-style-type: none"> <li>• In the Active Tasks view, you can view or cancel the sessions that are in progress. You can also view activity log messages.</li> <li>• In the Completed Tasks view, you can view the sessions and processes that succeeded or failed. You can also view activity log messages.</li> <li>• From the Summary and Completed Tasks tabs, you can view information about the following processes: <ul style="list-style-type: none"> <li>– Database backups</li> <li>– Scheduled server maintenance processes such as reclamation, storage pool backups, and storage pool migrations</li> </ul> </li> </ul> |
| <b>5</b> Inventory       | <p>If problems are indicated for the server database and associated logs, click <b>Inventory</b> to view details, for example:</p> <ul style="list-style-type: none"> <li>• Check the amount of used and free space for the database, the active log, and the archive log.</li> <li>• Verify that database backups are running as expected.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>6</b> Storage Pools   | <p>If problems are indicated for primary or copy storage pools, click <b>Storage Pools</b> to view details.</p> <p>For example, verify that the storage pools have enough free space.</p> <p><b>Tip:</b> If deduplication is enabled, see the Completed Tasks view for the respective server to ensure that processes are completing successfully.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>7</b> Storage Devices | <p>If problems are indicated for devices, click <b>Storage Devices</b> to view details. Check for the following problems that can affect the status:</p> <ul style="list-style-type: none"> <li>• For DISK device classes, volumes might be offline or have a read-only access state.</li> <li>• For tape or shared FILE device classes, libraries, paths, or drives might be offline.</li> <li>• For FILE device classes that are not shared, directories might be offline. Also, adequate free space might not be available for allocating scratch volumes.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>8</b> Command Line    | <p>From the Operations Center command line, you can issue commands to manage Tivoli Storage Manager servers that are configured as hub or spoke servers.</p> <p>For example, to verify the status and settings for the disaster recovery manager (DRM), issue the <b>QUERY DRMSTATUS</b> command.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

---

## Chapter 24. Reporting and monitoring with Tivoli Monitoring for Tivoli Storage Manager

Tivoli Monitoring for Tivoli Storage Manager brings together multiple components to provide Tivoli Storage Manager data collection, real-time monitoring of that data, and historical reports.

IBM Tivoli Monitoring acts as a monitoring application that provides workspaces for you to monitor real-time information. You can monitor the Tivoli Storage Manager server status, database size, agent status, client node status, scheduled events, server IDs, and so on, using the monitoring workspaces.

Tivoli Monitoring for Tivoli Storage Manager also provides reports that are based on the historical data retrieved. You can use the existing historical reports that are provided, or you can create your own custom reports.

Tivoli Monitoring for Tivoli Storage Manager consists of the following components:

### **IBM DB2**

Stores historical data that is obtained from Tivoli Storage Manager servers that are monitored by IBM Tivoli Monitoring.

### **IBM Tivoli Monitoring**

Consists of a number of components that accumulate and monitor historical data for reporting:

- Tivoli Enterprise Portal server
- Tivoli Data Warehouse
- Tivoli Enterprise Monitoring server
- Summarization Pruning agent
- Warehouse Proxy agent
- Tivoli Monitoring for Tivoli Storage Manager agent

The Tivoli Monitoring for Tivoli Storage Manager agent queries and formats data to be presented to you in the following ways:

- As workspaces from the Tivoli Enterprise Portal
- As reports that use the Tivoli Data Warehouse and the reporting portion of Tivoli Monitoring for Tivoli Storage Manager

The agent is installed on the Tivoli Storage Manager server or the IBM Tivoli Monitoring server, and is a multi-instance data collection agent.

The Tivoli Monitoring for Tivoli Storage Manager agent communicates with the Tivoli Monitoring for Tivoli Storage Manager server to retrieve data from its database and return this data to the Tivoli Monitoring server.

Tivoli Monitoring for Tivoli Storage Manager reports on the Tivoli Storage Manager server activities from data that is collected using the Tivoli Storage Manager monitoring agent. The monitoring feature uses the Tivoli Enterprise Portal to view the status of the Tivoli Storage Manager server.

Figure 93 depicts the real-time monitoring and historical reporting components that comprise the Tivoli Monitoring for Tivoli Storage Manager system.

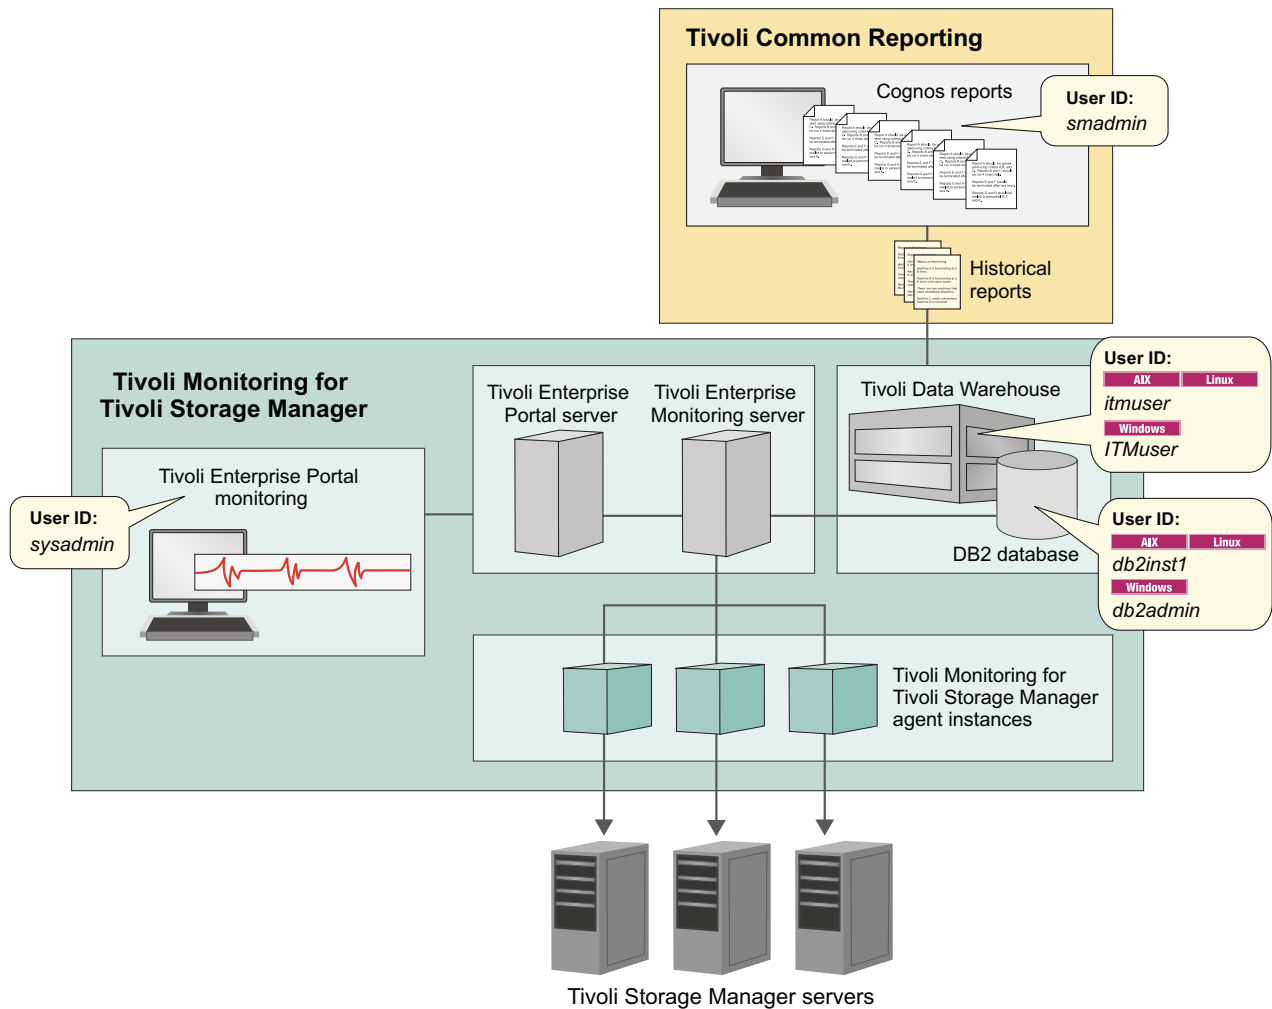


Figure 93. Tivoli Monitoring for Tivoli Storage Manager components

## Types of information to monitor with Tivoli Enterprise Portal workspaces

You can monitor your Tivoli Storage Manager server in real time by using the workspaces that are provided in the Tivoli Enterprise Portal. Client and server activities are monitored by the monitoring agent, and are displayed in workspace views.

When you open the Tivoli Enterprise Portal and go to the Tivoli Storage Manager view, a dashboard workspace displays commonly viewed information in a single location.

The dashboard workspace can be customized to suit your monitoring needs, but the default settings display the following information:

- Storage space that is used for each node that is defined on the server
- Storage pool summary details

- Unsuccessful client and server schedules, including all missed or failed schedules
- Client node activity for all nodes on the server
- Activity log errors, including all severe error messages

These workspaces are provided as part of the Tivoli Enterprise Portal:

Activity log  
 Activity summary  
 Agent log  
 Availability  
 Client node storage  
 Client missed files  
 Client node status  
 Database  
 Drives  
 Libraries  
 Node activity  
 Occupancy  
 PVU details  
 Replication details  
 Replication status  
 Schedule  
 Sessions  
 Storage pool  
 Server  
 Storage device  
 Tape usage  
 Tape volume

**Tip:** The data in these reports can be sorted by clicking the column that you want to sort by. To display subworkspaces, select the main workspace, right-click, select **Workspace**, and click the subworkspace that you want to view.

Table 74 lists the attribute groups, their workspaces, and descriptions.

*Table 74. Tivoli Enterprise Portal workspaces and subworkspaces*

| Attribute group name | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Activity log         | This workspace provides information about activity log messages that are based on the parameters selected. The data can be used to generate aggregated reports that are grouped by server, and subgrouped by client. By default, only error messages are displayed. To display warning and informational messages, you can update the agent environment file to update the KSK_QUERYWARN and KSK_QUERYINF environment variables. For more information about the environment variables, see “IBM Tivoli Monitoring reporting queries” on page 794. |
| Activity summary     | This workspace provides summarized activity log information about virtual environments.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Agent log            | This workspace provides trace file information that is produced by the agent without having to enable tracing. It provides messages information such as login successes and failures, and agent processes.                                                                                                                                                                                                                                                                                                                                        |

Table 74. Tivoli Enterprise Portal workspaces and subworkspaces (continued)

| Attribute group name | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Availability         | This workspace provides the status and the performance of the agent that is running for each of the different workspaces that are listed under the Tivoli Storage Manager agent. It can help to identify problems with the gathering of historical data.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Client node storage  | <p>The main workspace displays information about client node storage, disk, and tape usage data. This data can help you identify the clients that are using the most resources on the server. Disk and tape usage information is displayed in graph format.</p> <p>The subworkspaces display data in a tabular format and a graph format. To display the subworkspaces, select the <b>Client Node Storage</b> workspace, right-click and select <b>Workspace</b>, and click the subworkspace that you want to view.</p> <p>Additional subworkspaces include:</p> <ul style="list-style-type: none"> <li>• File space usage</li> <li>• Tape usage</li> <li>• Total storage space used</li> <li>• Storage pool media</li> </ul>                                           |
| Client missed files  | This workspace provides the status of missing files that are reported during client backups. It displays the client node name, the name of the server, the missing file name, and the full path to the missing file. This can help to identify clients with many missing files.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Client node status   | This workspace provides the date of the last successful backup, successful backup dates, with warnings, and dates of any failed backups, for client node name. You can click the chain-link icon for more details about each node. Click the green, back arrow to return to the main workspace view.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Database             | <p>This workspace provides information about the status of database backups, including the last full backup and the last incremental backup. This information can be used to determine when all of the allocated database space is used. If all the allocated space is used, expansion operations must be taken to ensure the database continues to operate.</p> <p>As a Tivoli Storage Manager server processes client requests for backup-archive operations, the Tivoli Storage Manager database is updated with current and historical types of data.</p> <p>Total capacity and total space used data is displayed in a bar chart format, and database details such as percentage of space used, and total space that is used is displayed in a tabular format.</p> |
| Drives               | <p>This workspace provides status about the drives, including drive name, library name, device type, drive status such as loaded or empty, the volume name, and whether the drive is online.</p> <p>Additional subworkspace:</p> <ul style="list-style-type: none"> <li>• Drives drill down</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Libraries            | This workspace provides status about libraries, such as the library name, type, if it is shared or not, LAN-free, auto label, number of available scratch volumes, whether the path is online, and the serial number.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

Table 74. Tivoli Enterprise Portal workspaces and subworkspaces (continued)

| Attribute group name               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Node activity                      | <p>This workspace provides activity metrics for a specific node over a 24-hour period, for example, activity metrics include the amount of data that is backed up, the number of objects that are inspected, and the number of processed objects.</p> <p>The subworkspaces display data in a tabular format and a graph format. To display the subworkspaces, select the <b>Node Activity</b> workspace, right-click and select <b>Workspace</b>, and click the subworkspace that you want to view.</p> <p>Additional subworkspaces include:</p> <ul style="list-style-type: none"> <li>• Client activity backup</li> <li>• Client activity restore</li> <li>• Client activity archive</li> <li>• Client activity retrieve</li> <li>• NAS activity</li> <li>• Server activity DB backup</li> <li>• Server activity file expiration</li> </ul> |
| Occupancy                          | <p>This workspace provides tabular and graphical information about where back up and archive data is stored on the server and how much data is stored. For example, number of files, physical MB, logical MB, by node name. Click the chain-link icon to display more details. Bar graph details depict the space that is used, in MB, that is used by the storage pool and the number of files that are used by the storage pool.</p> <p>The subworkspace displays data in a tabular format and a graph format. To display the subworkspaces, select the <b>Occupancy</b> workspace, right-click and select <b>Workspace</b>, and click the subworkspace that you want to view.</p> <p>Additional subworkspace:</p> <ul style="list-style-type: none"> <li>• Drives drill down</li> </ul>                                                    |
| Processor Value Unit (PVU) details | <p>This workspace provides PVU details by product, and PVU details by node. It includes information such as node name, product, license name, last used date, try buy, release, and level. If the Tivoli Storage Manager server is not a V6.3 server or later, the workspace is blank.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Replication details                | <p>This workspace provides byte by byte replication details. It describes all of the replication details such as node name, file space ID, version, start and end times, status, complete status, incomplete reason, estimated percentage of completion, estimated time remaining, and estimated time to completion.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Replication status                 | <p>This workspace provides the replication status for a node without all of the details that the replication details workspace provides. It displays node name, server, file space type, name and ID, target server, and the number of files on the source and target server.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Schedule                           | <p>This workspace provides details about client and server schedules. You can group the data by node name, schedule name, or status to identify any potential problems. It displays information such as schedule name, node name, server name, scheduled start, actual start, and the status of the schedule, which can be success, missed, or failed, including any error or warning text.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Sessions                           | <p>This workspace provides a view of all the client sessions that are running on the specified server. This workspace is useful for determining which clients are connected to the Tivoli Storage Manager server and how much data was sent or received. The workspace also shows tape mount information that indicates library and tape usage.</p> <p><b>Tip:</b> By default, historical data collection is not enabled by this workspace, and you use the workspace as a monitoring tool. You can modify the historical collection settings to enable the data to be stored, but this type of data can cause the WAREHOUS database to increase in size over time.</p>                                                                                                                                                                       |

Table 74. Tivoli Enterprise Portal workspaces and subworkspaces (continued)

| Attribute group name | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Storage pool         | This workspace provides you with detailed information about your storage pools. Tivoli Storage Manager can contain multiple storage pools. These storage pools define the methods and resources that are used to store the data that is backed up or archived to the Tivoli Storage Manager server. The data that is displayed in this workspace includes storage pool names, server name, device classes, total space, utilized space, total volumes used, percentage of space used, disk space used, and data deduplication savings. It also displays a graph with the total space, total usage, and total volumes used.                                                                                                                                                                                                                                                                                                                                                                                       |
| Server               | <p>This workspace provides the operational status of the Tivoli Storage Manager server. These operations are measured in megabytes per operation. After the operational status is reported, the values are reset to zero. The numbers that are reported for each operation are not cumulative over time. You can view the following activities or status:</p> <ul style="list-style-type: none"> <li>• Length of time it takes activities to complete.</li> <li>• Any problems that occur after activities complete.</li> <li>• The status of server-only activities.</li> </ul> <p>The data that is displayed includes information such as server name, disk storage pool space, tape usage count, current database size, information for client operations from a previous day, object count reclamation by byte and duration, migration by byte and duration, and backup by byte and duration.</p> <p>Bar graphs are also provided to display server operation duration and server operation byte counts.</p> |
| Storage device       | This workspace provides you with the read and write error status of the storage devices. This status helps you identify possible problems with any of your storage devices. Bar chart graphs also display read and write error count.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Tape usage           | This workspace provides you with tape usage data for each client.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Tape volume          | This workspace provides the status of all tape storage devices. This information can help you identify any storage devices that are near full capacity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Monitoring operations daily with Tivoli Monitoring for Tivoli Storage Manager

You can use Tivoli Monitoring for Tivoli Storage Manager to monitor many daily operations to ensure that your system is running in good condition.

### About this task

You can use the workspaces that are available in the Tivoli Enterprise Portal to view real-time data. By default, the data is collected every hour. You can set the schedule by using the KSK\_PREFETCH\_MINUTES environment variable.

**Restriction:** All of the data-collection queries to the Tivoli Storage Manager, for each attribute group, are run sequentially. The next query cannot start until the previous query is complete. For larger Tivoli Storage Manager server instances, the queries might take considerable time. Therefore, the regularly scheduled data collection might be delayed.

All of these steps are completed from the Tivoli Enterprise Portal. For additional information about logging on to the Tivoli Enterprise Portal, see *Monitoring Tivoli Storage Manager real time*.

## Procedure

1. Start the Tivoli Enterprise Portal, log on with your sysadmin ID and password, and go to Tivoli Storage Manager.
2. Many of the items that you can check daily are displayed in the dashboard view when it opens. The dashboard displays a grouping of commonly viewed items in a single view. Examine items and look for any values that might indicate a potential problem:

### Node storage space used

Check this graph for disk, storage, and tape space used.

### Storage Pool

Click the chain link icon to drill down for additional details.

### Unsuccessful server schedules

Review this table for any missed or failed server schedules. Click the chain link icon for additional details.

### Unsuccessful client schedules

Review this table for any missed or failed client schedules. Click the chain link icon for additional details.

### Drive Status

Review this table to ensure that all drives are online.

### Activity log errors

Review this table to check for error, warning, and severe messages.  
Click the chain link icon for additional details.

3. In the navigator pane, select the **Database** workspace. Examine the **Percent Space Used** value to ensure that the database file system has enough available space. You can also check the **Backup Status** field to ensure that the database backups completed successfully.
4. Go to the **Storage Pool** workspace and review the total space used, to ensure that there is enough space available to manage the anticipated workload.
5. Go to the **Activity Log** workspace and review the information in the table for any error messages that might indicate a problem that must be resolved.
6. Go to the **Drives** workspace and check to ensure that all drives are online.
7. Go to the **Libraries** workspace and check to ensure that the path to the library is online. Click the chain-link icon for additional details.
8. Go to the **Tape Volume** workspace to view status and identify devices that are near full.
9. Go to the **Server** or **Activity Log** workspace to review operational status such as what activities are taking too much time to complete, status of activities, messages about the activities, and other details that help to identify potential problems.



---

## Monitoring Tivoli Storage Manager real-time data

You can open the monitoring workspaces to monitor a server through the Tivoli Enterprise Portal. View these workspaces when you want to monitor areas of your Tivoli Storage Manager server in real time.

### Procedure

To view the Tivoli Storage Manager monitoring workspaces, complete the following steps:

1. Log in to Tivoli Enterprise Portal with the sysadmin user ID and password by using one of the following methods:
  - a. Start the Tivoli Enterprise Monitoring Services console:
  - b. Double-click the Tivoli Enterprise Portal icon on your desktop. IBM Tivoli Monitoring creates a shortcut on your desktop to open Tivoli Enterprise Portal.

**Tip:** If you do not have a shortcut on your desktop, you can click **Start > Programs > IBM Tivoli Monitoring > Manage Tivoli Monitoring Services** and select Tivoli Enterprise Portal under **Service/Application**.

- c. Open a web browser and enter the address of the server where the Tivoli Enterprise Portal server is installed, similar to the following example:  
`http://hostname:1920///cnp/kdh/lib/cnp.html`  
where *hostname* is the server name and `1920///cnp/kdh/lib/cnp.html` is the port and location of the Java Tivoli Enterprise Portal Web Client.

**Tip:** Always use this port number and location.

2. In the Logon window, specify the user ID in the **Logon ID** field, and the password in the **Password** field. These were defined when you installed Tivoli Monitoring for Tivoli Storage Manager. Click **OK**.
  3. In the **Navigator** pane, expand the node for your operating system and click the name of your system.
  4. Click the **Tivoli Storage Manager** attribute group.
  5. Select the workspace that you want to view.

**Tip:** Some of these attribute groups have sub-workspaces that you can view when you right-click the main attribute group. See the section on the overview of the monitoring workspaces to learn more details about using the workspaces.

### Related reference:

"Types of information to monitor with Tivoli Enterprise Portal workspaces" on page 774

---

## Viewing historical data and running reports

You can view client and server historical data, and run reports against that data from within Tivoli Common Reporting.

### Before you begin

After you complete the installation and created and configured your Tivoli Monitoring for Tivoli Storage Manager agent instance, you can view reports from Tivoli Common Reporting.

### About this task

To run the available Tivoli Storage Manager client and server reports, complete the following steps:

### Procedure

1. Open a supported web browser and enter the following address:  
`https://hostname:port/ibm/console`, where *port* is the port number that is specified when you installed Tivoli Common Reporting. The default port is 16311. If you are using a remote system, you can access Tivoli Common Reporting by entering the IP address or fully qualified host name of the remote system. If there is a firewall, you must authenticate to the remote system.
  - a. The IBM Dashboard Application Services Hub window opens. Specify the user ID and password for the service management administrator ID that was defined when you installed Jazz for Service Management. The default user ID is `smadmin`.
  - b. Click **Go** to log in.

**Tip:** Create a desktop shortcut, or bookmark in your browser for quick access to the portal in the future.

2. In the navigation bar, click the icon for **Reporting** and click **Common Reporting**.
3. In the **Work with reports** pane, click the **Public Folders** tab.
4. Click **IBM Tivoli Storage Manager Cognos Reports** to access the packaged reports.

### Results

The report name and descriptions are displayed in the **Reports** pane. Double-click the report to open the parameter selections page, or use the icons at the top of the reports listing. You can view reports in HTML, PDF, Excel, and CSV formats.

---

## Cognos Business Intelligence

IBM Cognos 8 Business Intelligence is an integrated business intelligence suite that is provided as part of Tivoli Common Reporting. You can use Cognos to view and create business reports, analyze data, and monitor events and metrics.

### About this task

Items added from the package to your report are called report items. Report items display as columns in list reports, and as rows and columns in cross-tab reports. In charts, report items display as data markers and axis labels.

You can expand the scope of an existing report by inserting additional report items, or you can focus on specific data by removing unnecessary report items.

If you frequently use items from different query subjects or dimensions in the same reports, ask your modeler to organize these items into a folder or model query subject and then to republish the relevant package. For example, if you use the product code item in sales reports, the modeler can create a folder that contains the product code item and the sales items you want.

You can also add calculations to a report.

IBM Cognos Business Intelligence includes many components that you can use, but only the basic report tasks are documented here. For additional information about Cognos, visit the Cognos IBM Knowledge Center at: [http://www.ibm.com/support/knowledgecenter/SSEP7J\\_8.4.0/com.ibm.swg.im.cognos.wig\\_cr.8.4.0.doc/wig\\_cr\\_id262gtstd\\_c8\\_bi.html%23gtstd\\_c8\\_bil](http://www.ibm.com/support/knowledgecenter/SSEP7J_8.4.0/com.ibm.swg.im.cognos.wig_cr.8.4.0.doc/wig_cr_id262gtstd_c8_bi.html%23gtstd_c8_bil).

## Cognos status and trend reports

The Cognos reports include status and trending data about your Tivoli Storage Manager server and clients.

These Cognos reports are available in HTML, PDF, Microsoft Excel, XML, and CSV (delimited text) formats. There are limitations when you produce reports in Microsoft Excel formats, such as timestamps not displaying. For a complete list of all limitations search for Limitations when producing reports in Microsoft Excel format at [http://www.ibm.com/support/knowledgecenter/SSEP7J\\_10.2.0](http://www.ibm.com/support/knowledgecenter/SSEP7J_10.2.0).

You can customize the data that is displayed in your reports by specifying the parameter values that you want to include or exclude. After you run the report, the parameter values that you specified are displayed.

**Important:** When you modify existing reports in Report Studio, be sure to save the new report with a different name. Customized, or modified reports are not supported by our technical support staff.

This list specifies the client reports that you can generate. The report descriptions are described in Table 77 on page 784.

Table 75. Cognos status and trending reports

| Status reports                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Trending reports                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Client activity status</li> <li>Client backup currency</li> <li>Client backup status</li> <li>Client schedule status</li> <li>Client storage pool usage summary</li> <li>Client storage summary and details</li> <li>Current client occupancy summary</li> <li>Current storage pool summary</li> <li>Highest storage space usage</li> <li>Node replication details</li> <li>Node replication summary</li> <li>Server activity log details</li> <li>Server schedule status</li> <li>Storage pool deduplication savings</li> <li>VE activity status</li> <li>VE backup type summary</li> <li>VE current occupancy summary</li> <li>Yesterday's missed and failed client schedules</li> </ul> | <ul style="list-style-type: none"> <li>Client activity success rate</li> <li>Client schedule success rate</li> <li>Client storage usage trends</li> <li>Disk utilization trends</li> <li>Node replication growth</li> <li>Server database growth trends</li> <li>Server storage growth trends</li> <li>Server throughput trends</li> </ul> |

Table 76. Report parameters

| Parameter     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Activity type | <p>Use this parameter to select the following client activities:</p> <ul style="list-style-type: none"> <li>• Archive</li> <li>• Backup</li> <li>• Restore</li> <li>• Retrieve</li> </ul> <p>Depending on the report you select, the following options might be available:</p> <ul style="list-style-type: none"> <li>• HSM-Migrate</li> <li>• Recall</li> <li>• NAS Backup</li> <li>• NAS Backup to TSM Storage</li> <li>• NAS Restore</li> <li>• NAS SnapMirror Backup</li> <li>• NAS SnapMirror Restore</li> </ul> |

Table 76. Report parameters (continued)

| Parameter                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Date range                   | Use this parameter to specify one the following date ranges to display. The default is All. <ul style="list-style-type: none"> <li>• All</li> <li>• Date range (below)</li> <li>• Today</li> <li>• Yesterday</li> <li>• The last 7 days</li> <li>• The last 30 days</li> <li>• The last 90 days</li> <li>• The last 365 days</li> <li>• The current week</li> <li>• The current month</li> <li>• The current year to date</li> <li>• The last week</li> <li>• The last month</li> <li>• The last year</li> </ul> |
| Servers                      | Use this parameter to specify single or multiple servers.                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Client node name             | Use this parameter to specify a client for the server to report on. This parameter can also accept wildcard characters by using the percent symbol (%). The default selects all the client nodes.                                                                                                                                                                                                                                                                                                                |
| Summarization type           | Use this parameter to select how to group or summarize the data. You can specify daily, hourly, weekly, monthly, quarterly, or yearly. The default is monthly.                                                                                                                                                                                                                                                                                                                                                   |
| Number of clients to display | Use this parameter to specify the number of clients that you want to display in the report.                                                                                                                                                                                                                                                                                                                                                                                                                      |

Table 77. Cognos status and trend reports

| Report name            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Report folder  |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Client activity status | This report provides details about client node activity (backup, archive, restore, or retrieve) over a specified time period. The report has the following properties: <ul style="list-style-type: none"> <li>• The report displays information about the success or failure of the activity.</li> <li>• It includes the number of examined objects, number of failed objects, total bytes transferred, and more.</li> <li>• Data is displayed in a tabular table format.</li> <li>• Failed activities are highlighted in red.</li> </ul> | Status reports |

Table 77. Cognos status and trend reports (continued)

| Report name                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Report folder    |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Client activity success rate | <p>This report displays the daily success rates of every client activity, for every server that is selected, as a trend over a specified time period. For each day in the range that is specified, the graph displays the success rate. The report has the following properties:</p> <ul style="list-style-type: none"> <li>You can specify a target success rate and compare it to the actual and average success rates.</li> <li>The report shows any client activity, including manually initiated activities such as unscheduled backups.</li> <li>This report shows only activities that occurred and does not contain information such as missed schedules.</li> <li>Data is displayed in a line graph and in tabular table format.</li> <li>In the table, any value below your target success rate is highlighted in red.</li> </ul> | Trending reports |
| Client backup currency       | <p>This report displays the client nodes that have not backed up within a specified number of days. The report is useful to determine which client nodes have not backed up as expected. The report has the following properties:</p> <ul style="list-style-type: none"> <li>Ability to choose the minimum number of days since the last backup.</li> <li>Ability to include client nodes that never had a successful backup.</li> <li>Data is displayed in a tabular table format.</li> </ul> <p><b>Tip:</b> For performance reasons, run the report in the background as it is a long running task.</p>                                                                                                                                                                                                                                   | Status reports   |
| Client backup status         | <p>This report displays information about selected client nodes. The report is useful to see the days since the last backup and when the last failed backup occurred. The report has the following properties:</p> <ul style="list-style-type: none"> <li>Ability to search clients by using a wildcard.</li> <li>Ability to select nodes based on the contact information for the client node.</li> <li>Data is displayed in a tabular table format.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                            | Status reports   |
| Client schedule success rate | <p>This report displays the success rates of client schedules as a trend over a specified time period. The report has the following properties:</p> <ul style="list-style-type: none"> <li>You can specify a target success rate and compare it to the actual and average success rates.</li> <li>The report does not show unscheduled activities such as a manually initiated backup.</li> <li>Data is displayed in a line graph and in tabular table format.</li> <li>In the table, any value below your target success rate is highlighted in red.</li> </ul>                                                                                                                                                                                                                                                                            | Trending reports |

Table 77. Cognos status and trend reports (continued)

| Report name                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Report folder  |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Client schedule status             | <p>This report provides details about the results of client schedules over a specified time period. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details include the node name, schedule name, completion status such as failed, missed, severed, the scheduled date, and any error or warning messages.</li> <li>• Data is displayed in a tabular table format.</li> <li>• Failed schedules are highlighted in red and missed schedules are highlighted in yellow.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                          | Status reports |
| Client storage pool usage summary  | <p>This report displays the amount of storage pool space a client node is using on the server. For each selected client node, the report displays the total space that is used on the server and the total space that is used per storage pool that the node is assigned to. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Ability to select specific servers.</li> <li>• Ability to select specific client nodes by using the <b>Search and select</b> widget. For advanced searching, expand the <b>Options</b> list. The result of the search shows up in the <b>Results</b> list. Client nodes added to the <b>Choices</b> list are used when the report is run.</li> <li>• Details include physical MB, logical MB, and reporting MB.</li> <li>• Data is displayed in a tabular table format.</li> </ul> <p><b>Tip:</b> For performance reasons, run the report in the background as it is a long running task.</p> | Status reports |
| Client storage summary and details | <p>This report provides details about how much storage space client nodes are currently using. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details are grouped by server and domain.</li> <li>• Ability to sort on multiple columns in ascending or descending order.</li> <li>• Details for the client nodes include storage space that is used by each type of storage. These storage space types include disk and file storage, server storage, and tape storage, where server storage is the virtual volumes that are used by the client node.</li> <li>• Data is displayed in a tabular table format, with totals at the end of table for every Tivoli Storage Manager server.</li> </ul>                                                                                                                                                                                                                         | Status reports |

Table 77. Cognos status and trend reports (continued)

| Report name                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Report folder    |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Client storage usage trends      | <p>This report provides details about the storage usage of a client node over a specified time period. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Data can be summarized daily, weekly, monthly, quarterly, and yearly.</li> <li>• Details for the client nodes include storage space that is used by each type of storage. These storage space types include disk and file storage, server storage, and tape storage, where server storage is the virtual volumes that are used by the client node.</li> <li>• Report shows one client for one server at a time.</li> <li>• Data is displayed in a line chart format, and a tabular table.</li> </ul>                                   | Trending reports |
| Current client occupancy summary | <p>This report provides details about servers, client nodes, and associated storage pools to show how much space your nodes are using. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details are grouped by node name and storage pool name. Details include file space name, file space ID, occupancy date, MB, physical MB, logical MB, and number of files.</li> <li>• Data is displayed in a tabular table format.</li> <li>• Node names are links that provide more details when clicked.</li> </ul>                                                                                                                                                                                   | Status reports   |
| Current storage pool summary     | <p>This report displays the space that is used on the server within each storage pool. The report also displays data deduplication savings to help with evaluating the effectiveness of data deduplication. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details include total space, space used, file space used, disk space used, data deduplication space saved, and % of data deduplication saved.</li> <li>• Data is displayed in a tabular table format.</li> </ul>                                                                                                                                                                                                                  | Status reports   |
| Disk utilization trends          | <p>This report displays the disk space that is used by each disk storage pool over time. Only storage pools with a device class of type DISK are displayed. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details are grouped by server and storage pool name. Details include the space that is used in percentage and in MB.</li> <li>• Data is displayed in a line chart format, and a tabular table.</li> <li>• You can specify a maximum space utilization threshold. Storage pools with values greater than the threshold are highlighted in red.</li> <li>• You can specify a minimum disk utilization filter. Data points below the minimum threshold are not displayed.</li> </ul> | Trending reports |



Table 77. Cognos status and trend reports (continued)

| Report name                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Report folder    |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Highest storage space usage   | <p>This report provides details about which nodes are using the most storage space. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details for the client nodes include storage space that is used by each type of storage. These storage space types include disk and file storage, server storage, and tape storage, where server storage is the virtual volumes that are used by the client node.</li> <li>• Data is displayed in a tabular table format, with totals at the end.</li> <li>• Client node names are links that provide more details when clicked.</li> </ul> | Status reports   |
| Node replication details      | This report provides node replication details, for a specified server or node, for the specific date range.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Status reports   |
| Node replication growth       | <p>This report displays two line charts:</p> <ul style="list-style-type: none"> <li>• Total number of files that are replicated</li> <li>• Total amount of file space, in megabytes, that is replicated</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                    | Trending reports |
| Node replication summary      | This report provides details of the node replication for the specific date range for the specified servers and nodes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Status reports   |
| Server activity log details   | This report provides a table with the activity log information for a specific time period. Some of the parameters include message code, search string, and severity, where message code is a 4-digit number. For example, in message number ANE49611, the message code is 4961.                                                                                                                                                                                                                                                                                                                                       | Status reports   |
| Server database growth trends | <p>This report provides details about database growth over a specified time period. The report is displayed so you can see the total capacity versus the total space used. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Data can be summarized daily, weekly, monthly, quarterly, and yearly.</li> <li>• Details include total capacity and total space used.</li> <li>• Data is displayed in a bar chart format and a tabular table.</li> </ul>                                                                                                                             | Trending reports |
| Server schedule status        | <p>This report provides details about the success and failure of server schedules. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details are grouped by server name and include the schedule name, the schedule start date and time, and the operation status.</li> <li>• Data is displayed in a tabular table format.</li> <li>• Failed schedules are highlighted in red.</li> </ul>                                                                                                                                                                                         | Status reports   |

Table 77. Cognos status and trend reports (continued)

| Report name                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Report folder    |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Server storage growth trends       | <p>This report provides details about server growth over a specified time period. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Data can be summarized daily, weekly, monthly, quarterly, and yearly.</li> <li>• Details include date, disk, and file storage in megabytes, and tape usage counts.</li> <li>• Data is displayed in a line chart and tabular table format.</li> </ul>                                                                                                                                                                                                                                                                                                       | Trending reports |
| Server throughput trends           | <p>This report provides a line chart of the server activities. The operation bytes reported, client, migration, database backup, storage pool backup, expiration, and reclamation bytes, are calculated for the operation only, then the values reset to zero. The bytes reported for each operation is not cumulative over time.</p>                                                                                                                                                                                                                                                                                                                                                                                              | Trending reports |
| Storage pool deduplication savings | <p>This report provides details about the storage pools that contain deduplicated data. For each storage pool, the following information is displayed:</p> <ul style="list-style-type: none"> <li>• The space that is saved by data deduplication</li> <li>• The percentage of space that was saved by data deduplication</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                               | Status reports   |
| VE activity status                 | <p>This report provides details about virtual machine guest activity (backup, archive, restore, or retrieve) over a specified time period. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• The report displays information about the success or failure of each activity for data center nodes.</li> <li>• It includes the data center node name, virtual machine name, number of objects that failed, total kilobytes that is transferred, and more.</li> <li>• Data is displayed in a tabular table format.</li> <li>• Failed activities are highlighted in red.</li> </ul> <p><b>Important:</b> Run this report on Tivoli Storage Manager servers that are at version 6.3.3 or later.</p> | Status reports   |
| VE backup type summary             | <p>This report shows the number of incremental and full backups for each selected client node. The report is useful to determine which client node backups might be having problems when the backups are always full instead of incremental. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• It includes the data center node name, virtual machine name, the number of full backups, and the number of incremental backups, over the specified amount of time.</li> <li>• Data is displayed in a tabular table format.</li> </ul> <p><b>Important:</b> Run this report on Tivoli Storage Manager servers that are at version 6.3.3 or later.</p>                                            | Status reports   |

Table 77. Cognos status and trend reports (continued)

| Report name                                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Report folder  |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| VE current occupancy summary                   | <p>This report provides current details about the storage occupancy that a VE guest operating system is using on the Tivoli Storage Manager server. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Details are grouped by data center node and virtual machine name. Details include file space information, reporting MB, physical MB, logical MB, and number of files.</li> <li>• Data is displayed in a tabular table format.</li> <li>• Data center node names are links that provide more details when clicked by linking to the VE Node Activity Status report to get current information about the activity of the VE on the Tivoli Storage Manager server.</li> </ul> <p><b>Important:</b> Run this report on Tivoli Storage Manager servers that are at version 6.3.3 or later.</p> | Status reports |
| Yesterday's missed and failed client schedules | <p>This report provides details about client schedule completion status from the day before the report is run. The report has the following properties:</p> <ul style="list-style-type: none"> <li>• Data is displayed in a tabular table format.</li> <li>• Failed schedules are highlighted in red.</li> <li>• Missed schedules are highlighted in yellow.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Status reports |

## Create custom Cognos reports

You can use Report Studio to create your own customized Cognos reports.

Report Studio is a product for creating Cognos reports that analyze corporate data according to specific information needs. In Report Studio, you can accomplish the following tasks:

- Create a Cognos report by developing a query to fetch data from the WAREHOUS database.
- Modify an existing Cognos report to change the appearance.
- View data from a Cognos report to test your new query.

For details on creating customized reports, see <https://www.ibm.com/developerworks/community/wikis/home?lang=en#!/wiki/Tivoli%20Storage%20Manager/page/Creating%20Customized%20Reports>.

## Scheduling Cognos reports to be emailed

You can email a report manually, or you can schedule a query to run and automatically send the report by email.

### Procedure

Choose the method by which you want to email the report:

- Manually email a report
  1. Log on to the IBM Dashboard Application Services Hub with the service management administrator ID and password. The default user name is smadmin.

2. Click the **Reporting** icon in the navigation menu and click **Common Reporting**.
  3. Go to the report that you intend to email. For example, under **IBM Tivoli Storage Manager Cognos Reports**, click **Status Reports** or **Trending Reports** to display a list of reports.
  4. Click a report to run it.
  5. From the **Keep this Version** drop-down list, click **Email report**.
  6. Complete the form and click **OK**.
- Automatically schedule a report to run and email to recipients
    1. Log on to the IBM Dashboard Application Services Hub with the service management administrator ID and password. The default user name is smadmin.
    2. Click the **Reporting** icon in the navigation menu and click **Common Reporting**.
    3. Go to the report that you intend to email. For example, under **IBM Tivoli Storage Manager Cognos Reports**, click **Status Reports** or **Trending Reports** to display a list of reports.
    4. In the list of reports, click the calendar icon that is located to the right of the report that you want to schedule.
    5. Type in the start dates, end dates, times, the days you want the report to run, and so on.
    6. In the **Options** section, select the **Override the default values** check box to display further options.
    7. Select the report format that you want.
    8. Click the **Send a link to the report by email** check box, and click **Edit the options**.
    9. Complete the form and click **OK** to complete the email process.
    10. Click **OK** again to complete the scheduling process.

For more information, see the Cognos IBM Knowledge Center at [http://www.ibm.com/support/knowledgecenter/SSEP7J\\_8.4.0/com.ibm.swg.im.cognos.wig\\_cr.8.4.0.doc/wig\\_cr\\_id262gtstd\\_c8\\_bi.html%23gtstd\\_c8\\_bil](http://www.ibm.com/support/knowledgecenter/SSEP7J_8.4.0/com.ibm.swg.im.cognos.wig_cr.8.4.0.doc/wig_cr_id262gtstd_c8_bi.html%23gtstd_c8_bil).

## Sharing Cognos Reports

Cognos reports can be distributed to other organizations by importing the reports into any supported Tivoli Common Reporting instance.

### About this task

To share Cognos reports, you can export them from one Tivoli Common Reporting instance and import them into another.

## Exporting a Cognos report

You can share custom Cognos reports by exporting them to an XML file. The file can then be imported into another Tivoli Common Reporting instance.

### Before you begin

After you create a custom Cognos report, the report can be shared and used by other Tivoli Common Reporting instances. Tivoli Common Reporting can be a stand-alone instance or a component that is installed in the IBM Dashboard Application Services Hub. To share a report, you must export it to an XML format and then you can import it in to another Tivoli Common Reporting instance.

### Procedure

To export a Cognos report, complete the following steps:

1. Log on to the Dashboard Application Services Hub with the service management administrator ID and password.
2. Click the **Reporting** icon in the side navigation menu and click **Common Reporting**.
3. Click **IBM Tivoli Storage Manager Cognos Reports** and find the Cognos report that you want to export.
4. Select the report by checking the box to the left of the report name.
5. In the **Actions** column, click **Open with report studio** icon. Report Studio opens in a new web browser.
6. In Report Studio, click **Tools > Copy Report to Clipboard**. Manually select and copy the XML code, if prompted.
7. Open a text editor and paste the XML code.
8. Save the file as an XML file, for example, `reportName.xml`, and then exit Report Studio.

### What to do next

You are now ready to import the report into any other Tivoli Common Reporting instance. For more information, see “Importing a Cognos report.”

## Importing a Cognos report

You can import custom Cognos reports by using the XML file that was created from exporting the report.

### Before you begin

After you export Cognos reports, you can distribute them to be used by other teams and organizations.

### About this task

You can import Cognos reports in to any supported Tivoli Common Reporting instance. Tivoli Common Reporting can be a stand-alone instance or a component that is available in the IBM Dashboard Application Services Hub. To complete the task of importing Cognos reports, complete the following steps:

### Procedure

1. In a text editor, open the report file that you want to import and copy the XML code to the clipboard.

2. Log on to the Dashboard Application Services Hub with the service management administrator user ID and password.
3. Click the **Reporting** icon in the side navigation menu and click **Common Reporting**.
4. Click **Launch > Report Studio**. Report Studio is opened in a new web browser.
5. In the Select a package (Navigate) window, select the **IBM Tivoli Storage Manager Cognos Reports** package. If you open Report Studio from inside a package, the window is not displayed.
6. In Report Studio, click **Tools > Open Report from Clipboard**.  
**Attention:** An error is displayed if the XML code is not copied to the clipboard. You might be prompted to paste the XML code into a window before the report is opened and displayed.
7. Click **File > Save**. You can create a directory for the report to be saved in or you can choose an existing directory.
8. Save the report with a name that describes the report. This name is used as the display name for your report in Tivoli Common Reporting.
9. Exit Report Studio.

### What to do next

When you refresh the web browser window, the Cognos report that you imported is available.

---

## Modifying the IBM Tivoli Monitoring environment file to customize agent data collection

You can modify the IBM Tivoli Monitoring environment file to customize the data that the agent collects from the Tivoli Storage Manager server.

### Before you begin

When you create a Tivoli Storage Manager monitoring agent instance in the Tivoli Enterprise Monitoring server application, a new environment file is created. You can modify this file to change the behavior of the monitoring agent.

There are many variables that can be configured, but ensure that you do not degrade performance of the Tivoli Storage Manager server by setting variables incorrectly.

The environment file is named `KSKENV_xxx`, where `xxx` is the instance name of the monitoring agent that you created. This file is in the IBM Tivoli Monitoring installation directory. For example, `C:\Program Files\Tivoli\TSM\reporting\ITM\TMAITM6`.

## IBM Tivoli Monitoring reporting queries

An environment file is created for each agent instance. You can modify the environment variables to customize the data that is collected from the Tivoli Storage Manager server where the agent instance is installed.

You can use any text editor to edit the environment file. The following list describes the possible values that the variables can be set to:

- Valid values are 0 and 1.
- A value of 0 disables the query.
- A value of 1 enables the query.
- An invalid value disables the query.

You can modify the environment variables in the following list:

***KSK\_ACTLOG*, Default Value = 1**

Queries the Tivoli Storage Manager activity log entries.

***KSK\_APITRACE*, Default Value = 0**

If an error condition occurs and trace information is needed by support, this variable value set to 1 creates a trace file for the Tivoli Storage Manager Administrator's API. This file can grow in size and only should be used if instructed by support personnel.

***KSK\_CMF\_ON*, Default Value = 1**

Queries the Tivoli Storage Manager server for the client missed files data.

***KSK\_CNS\_ON*, Default Value = 1**

Queries the Tivoli Storage Manager server for the client node status data.

***KSK\_CNSTG\_ON*, Default Value = 1**

Queries the Tivoli Storage Manager server for the client node storage data.

***KSK\_DB\_ON*, Default Value = 1**

Queries the Tivoli Storage Manager server for the database data.

***KSK\_DRV\_ON*, Default Value = 1**

Queries the Tivoli Storage Manager server drive table for tape drives that are associated with this server.

***KSK\_HEARTBEAT\_ON*, Default Value = 1**

Queries the Tivoli Storage Manager server periodically to determine whether the logon from the monitoring agent was successful. This information is placed in the Agent Log workspace for you to determine the status of the Tivoli Storage Manager server. The status can help you identify if the Tivoli Storage Manager server is not started.

***KSK\_HEARTBEAT\_MINUTES*, Default Value = 10**

Specifies how often to check for logon queries from the monitoring agent to the Tivoli Storage Manager server.

***KSK\_LIB\_ON*, Default Value = 1**

Queries the Tivoli Storage Manager server for tape library devices that are associated with this server.

***KSK\_LOGTOQUERY*, Default Value = There is no default value**

Specify activity log message numbers to be mined without attention to the message severity. For example, use 4987 instead of ANE4987E. Separate numerical values with a comma (.). The maximum number of messages you can specify is 40.

**KSK\_LOGNOTTOQUERY, Default Value = There is no default value**

Specify activity log message numbers that you want to exclude from any results. For example, use 4987 instead of ANE4987E. Separate numerical values with a comma (.). The maximum number of messages you can specify is 40.

**KSK\_NODEA\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for the node activity data.

**KSK\_OCC\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for occupancy data.

**KSK\_REPLSTAT\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for replication status data.

**KSK\_REPLDETAIL\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for replication details data.

**KSK\_PVU\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for PVU details.

**KSK\_QUERYERR, Default Value = 1**

Queries the Tivoli Storage Manager server for all error entries in the activity log.

**KSK\_QUERYINF, Default Value = 0**

Queries the Tivoli Storage Manager server for all informational entries in the activity log.

**KSK\_QUERYWARN, Default Value = 0**

Queries the Tivoli Storage Manager server for all warning entries in the activity log.

**KSK\_QUERYSEV, Default Value = 1**

Queries the Tivoli Storage Manager server for all severe entries in the activity log.

**KSK\_SCHED\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for the schedule data.

**KSK\_SERVER\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for server-specific data such as operations byte counts, operation duration, and total storage size.

**KSK\_STGDEV\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for the storage device data.

**KSK\_SUMM\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for the activity summary data.

**KSK\_TAPEUSG\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for the tape usage data.

**KSK\_TAPEVOL\_ON, Default Value = 1**

Queries the Tivoli Storage Manager server for the tape volume data.

**KSK\_TRACE, Default Value = 0**

Specify a value of 1 to allow the agent to create a log file that indicates the attempts to query both the Tivoli Storage Manager server and the DERBY pre-fetch data cache.

Trace files are stored in the *installation\_directory\itm\TMAITM6\logs* directory.

Trace files are named: *instance\_nameport\_numberdate\_time.txt*.



For example: pompeii2150020110620101220000.txt, where instance name = pompeii2, port number = 1500, and date = June 20, 2011 at 10:12 in the morning.

There are other variables included in this environment file that can affect the performance of the server. For more information about the environment variables, see Tuning Tivoli Monitoring for Tivoli Storage Manager ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.perf.doc/t\\_srv\\_tuning\\_monitoring.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.perf.doc/t_srv_tuning_monitoring.html)).

You can monitor the size of the logs directory and control it by configuring the RAS trace parameters. For more information about the RAS trace parameters, search for "Setting RAS trace parameters" at [http://www.ibm.com/support/knowledgecenter/SSTFXA\\_6.3.0.2](http://www.ibm.com/support/knowledgecenter/SSTFXA_6.3.0.2).

---

## Backing up and restoring Tivoli Monitoring for Tivoli Storage Manager

You can back up and restore your system, which includes the data that was collected by Tivoli Monitoring for Tivoli Storage Manager, the WAREHOUS database, any customized Cognos reports, and any configuration settings that might be needed.

### About this task

After Tivoli Monitoring for Tivoli Storage Manager is installed and the agent instance is created and configured, the agent begins collecting data. The data that is collected is not written directly to the database, but is first stored as temporary files on the host system where the agent is running. Over time, the data gets moved to the DB2 database named WAREHOUS, where it is permanently stored and used to create reports by the Tivoli Common Reporting function.

If you modified your configuration, or customized any reports, you might need to back up and restore those modified configurations.

If a system failure occurs that affects your data and configuration modifications, you must first reinstall and configure Tivoli Monitoring for Tivoli Storage Manager, then restore the backed-up data and configurations.

These are the tasks that you must complete to back up your system, ensure that your backups are successful, and then to restore your system.

### Procedure

- Backing up the system includes the following tasks:
  - Installing the Tivoli Storage Manager client
  - Backing up the IBM Tivoli Monitoring server
  - Configuring the system to back up the WAREHOUS database, and performing backups
  - Validating the success of the backups
  - Exporting any customized Tivoli Enterprise Portal workspaces and queries to the file system and backing them up using the Tivoli Storage Manager client
  - Backing up any customized configuration files for the storage agent by using the Tivoli Storage Manager client
  - Exporting any customized reports to the file system and backup by using Tivoli Storage Manager client

- Restoring the system includes the following tasks:
  - Reinstalling and configuring Tivoli Monitoring for Tivoli Storage Manager
  - Restoring the WAREHOUS database from backups
  - Restoring the IBM Tivoli Monitoring and Tivoli Enterprise Monitoring server data from backups
  - Importing any customized agent configuration files
  - Importing any customized Cognos reports

**Related tasks:**

“Backing up Tivoli Monitoring for Tivoli Storage Manager”

“Restoring Tivoli Monitoring for Tivoli Storage Manager” on page 810

## Backing up Tivoli Monitoring for Tivoli Storage Manager

It is a best practice to back up your Tivoli Monitoring for Tivoli Storage Manager system, which includes the data that was collected by Tivoli Monitoring for Tivoli Storage Manager, the WAREHOUS database, any customized Cognos reports, and any configuration settings that might be needed.

### About this task

The following scenario outlines the tasks that must be completed to back up your system, and verify that your backups are successful.

### Procedure

1. Install the Tivoli Storage Manager client (both 32-bit and 64-bit run times). For more information, see Installing the Tivoli Storage Manager backup-archive clients ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itm.client.doc/c\\_inst.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itm.client.doc/c_inst.html)).
2. Back up the IBM Tivoli Monitoring and Tivoli Enterprise Monitoring server data by using Tivoli Storage Manager client: “Backing up IBM Tivoli Monitoring, Tivoli Enterprise Portal server, and agent configuration settings” on page 806
3. Configure the system to back up the WAREHOUS database, and then start a backup:
  - To backup the V6.3 WAREHOUS database, see “Backing up the DB2 WAREHOUS database V6.3” on page 798.
  - To backup the V7.1 WAREHOUS database, see “Backing up the DB2 WAREHOUS database V7.1” on page 801.
4. Validate the success of your backups: “Verifying and deleting backups of Tivoli Monitoring for Tivoli Storage Manager” on page 804
5. Optional: Export any customized Tivoli Enterprise Portal workspaces and queries to the file system and back them up using the Tivoli Storage Manager client: “Exporting Tivoli Enterprise Portal workspaces and queries” on page 807
6. Optional: Export any customized situations: “Exporting IBM Tivoli Monitoring situations” on page 807
7. Optional: Export IBM Tivoli Monitoring historical settings: “Exporting IBM Tivoli Monitoring historical settings” on page 808
8. Back up any customized configuration files for the storage agent by using the Tivoli Storage Manager client: “Backing up IBM Tivoli Monitoring, Tivoli Enterprise Portal server, and agent configuration settings” on page 806

9. Optional: Export any customized Cognos reports to the file system and back them up by using the Tivoli Storage Manager client: "Exporting Cognos reports" on page 809

**Related tasks:**

"Backing up the WAREHOUS database V7.1 on Windows systems" on page 801

## Backing up the DB2 WAREHOUS database V6.3

You can back up the V6.3 WAREHOUS database to prepare for an upgrade or migration to a new system.

### Backing up the DB2 WAREHOUS database V6.3 on Windows systems:

Back up the DB2 WAREHOUS database to ensure that you can perform a restore if a failure occurs.

#### About this task

You can back up the historical data that is gathered by Tivoli Monitoring for Tivoli Storage Manager and stored in the WAREHOUS database. You can also use the Tivoli Storage Manager server as the backup repository and back up the database to other media such as a hard disk drive. Learn more from the IBM DB2 Database Knowledge Center at: [http://www.ibm.com/support/knowledgecenter/SSEPGG\\_10.5.0/com.ibm.db2.luw.admin.ha.doc/doc/c0052073.html](http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0/com.ibm.db2.luw.admin.ha.doc/doc/c0052073.html).

#### Procedure

1. To back up your database to a Tivoli Storage Manager server, install the Tivoli Storage Manager backup-archive client on the same system where IBM Tivoli Monitoring is installed. Complete the steps in Installing the Tivoli Storage Manager backup-archive clients ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.client.doc/c\\_inst.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.client.doc/c_inst.html)).
2. From the Tivoli Storage Manager server, create a management class for the DB2 WAREHOUS backups and log files.

**Tip:**

- a. You can use the **DEFINE MGMTCLASS** command to create a new management class.
  - b. The management class in these examples is called WAREHOUS\_BACKUPS.
  - c. Issue the **ACTIVATE POLICYSET** command after you define the management class.
3. In the backup and archive copy groups of the management class you created, apply these settings:

**Tip:** You can use the **DEFINE COPYGROUP** or **UPDATE COPYGROUP** commands.

- a. Apply these settings to the backup copy group:  
verexists=1  
verdeleted=0  
retextra=0  
retonly=0
  - b. Apply this setting to the archive copy group:  
retver=nolimit
4. Register a node for the DB2 backup client, and note the node name and password for later use.

```
register node node_name password domain=domain_name backdelete=yes
```

5. As Administrator, log in to the system where IBM Tivoli Monitoring is installed and create a file called dsm.opt in the client installation directory, which by default is:

For the 32-bit api: c:\Program Files\Common Files\Tivoli\TSM\api\  
For the 64-bit api: c:\Program Files\Common Files\Tivoli\TSM\api64\  
Add the following statements to the file:

```
servername myserver
```

```
tcpport 1500
tcpserveraddress myaddress.mycompany.com
passwordaccess generate
nodename mynode
tcpclientaddress 11.22.33.44
```

```
*This is the include list that binds the mgmtclass to backup and logs files
INCLUDE \...*
INCLUDE \WAREHOUS\...* WAREHOUS_BACKUPS
INCLUDE \WAREHOUS\...*.LOG WAREHOUS_BACKUPS
```

where *myserver* is the name of the Tivoli Storage Manager server.

6. From the **System Properties > Advanced** tab, select **Environment Variables**, and specify these system environment variables that are required by the Tivoli Storage Manager client:

**Note:** For the 64-bit api, ensure that you use api64 instead of api in the path for the variables.

```
DSMI_DIR set to c:\Program Files\Common Files\Tivoli\TSM\api\
DSMI_CONFIG set to c:\Program Files\Common Files\Tivoli\TSM\api\dsm.opt
DSMI_LOG set to c:\Program Files\Common Files\Tivoli\TSM\api\

```

**Notes:**

- a. The DSMI\_DIR variable must point to the API client installation directory.
  - b. The DSMI\_CONFIG must be set to the location of dsm.opt file created in Step 5.
  - c. The DSMI\_LOG is the logging directory.
7. Restart your system to apply these settings.
  8. You must stop all IBM Tivoli Monitoring agents before you can complete the configuration process and begin the first backup. Select **Start > Programs > IBM Tivoli Monitoring > Manage Tivoli Monitoring Services**, and stop the agents and services in this order:
    - a. Tivoli Storage Manager agents
    - b. Summarization and Pruning agent
    - c. Warehouse Proxy agent
    - d. Tivoli Enterprise Portal server
    - e. Tivoli Enterprise Monitoring server
  9. To open a DB2 command prompt, select **Start > Programs > IBM DB2 > DB2COPY1 > Command line tools > Command Window**.
  10. Determine whether there are any active application connections by issuing this command:

```
db2 list applications for db warehous
```
  11. If there are active connections, stop them by issuing the following command:

```
db2 force applications all
```

12. To complete the configuration of the Tivoli Storage Manager client, restart DB2:  
`db2stop`  
`db2start`
13. Set the Tivoli Storage Manager password with this command:  
`c:\IBM\DB2\adsm\dsmapiw.exe`  
 When the system prompts you for the old and new passwords, specify the password that you used when you registered the node on the Tivoli Storage Manager server in Step 4 on page 798.
14. Configure DB2 to roll forward by issuing the following command:  
`db2 update db cfg for WAREHOUS using logarchmeth1 tsm`
15. Confirm that the password was correctly set by issuing the following command:  
`db2adutl query`  
 If the command returns a message that states that no DB2 objects are found, you successfully set the password.
16. Optional: You can check the activity log on the Tivoli Storage Manager server to confirm that the node successfully authenticated when you ran the `db2adutl` command.
17. Configure the database to use the management class you created in Step 2 on page 798.  
`db2 update db cfg for WAREHOUS using tsm_MGMTCLASS WAREHOUS_BACKUPS`
18. Set TRACKMOD to ON by issuing this command:  
`db2 update db cfg for WAREHOUS using TRACKMOD ON`
  - a. If you see the SQL1363W message displayed in response to these commands, one or more of the parameters submitted for modification were not dynamically changed, so issue this command:  
`db2 force applications all`
  - b. Ensure that the settings for LOGARCHMETH1, TSM\_MGMTCLASS, and TRACKMOD have been updated by issuing this command:  
`db2 get db cfg for warehous`
19. Perform a full offline backup of the database:  
`db2 backup db WAREHOUS use tsm`
20. Restart IBM Tivoli Monitoring for Tivoli Storage Manager services using the **Manage Tivoli Monitoring Services** console. Start all of the agents and services in this order:
  - a. Tivoli Storage Manager agents
  - b. Summarization and Pruning agent
  - c. Warehouse Proxy agent
  - d. Tivoli Enterprise Portal server
  - e. Tivoli Enterprise Monitoring server

**Tip:** All backups, incremental and full, can now be performed online without stopping and restarting these services.
21. The first online backup must be a full backup, followed by as many incremental backups as needed:  
`db2 backup db WAREHOUS online use tsm`
22. Start the non-cumulative incremental backups by issuing the following command:  
`db2 backup db warehous online incremental delta use tsm`

**Tip:** Specify the keyword `delta` to ensure that the incremental backups are not cumulative. This reduces the size of the backups and the amount of time each backup takes to run. If you want your incremental backups to be cumulative, do not specify the keyword `delta`. This increases the size of the backups, but reduces the number of incremental backups that are required to perform a restore. If your backups do not take much time or storage space, you might choose to only perform full backups, which would only require a single backup to restore.

23. After you complete a full set of incremental backups, perform a full backup:  
`db2 backup db warehous online use tsm`

## Backing up the DB2 WAREHOUS database V7.1

You can back up the V7.1 WAREHOUS database to prepare for an upgrade or migration to a new system.

### Backing up the WAREHOUS database V7.1 on Windows systems:

Back up the WAREHOUS database to ensure that you can perform a restore if a failure occurs.

#### About this task

You can back up the historical data that is gathered by Tivoli Monitoring for Tivoli Storage Manager and stored in the WAREHOUS database. You can also use the Tivoli Storage Manager server as the backup repository and back up the database to other media such as a hard disk drive. Learn more from the IBM DB2 Database Knowledge Center at: [http://www.ibm.com/support/knowledgecenter/SSEPGG\\_10.5.0/com.ibm.db2.luw.admin.ha.doc/doc/c0052073.html](http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0/com.ibm.db2.luw.admin.ha.doc/doc/c0052073.html).

#### Procedure

1. To back up your database to a Tivoli Storage Manager server, install the Tivoli Storage Manager backup-archive client on the same system where IBM Tivoli Monitoring is installed. Complete the steps in Installing the Tivoli Storage Manager backup-archive clients ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.client.doc/c\\_inst.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.client.doc/c_inst.html)).
2. From the Tivoli Storage Manager server, create a management class for the DB2 WAREHOUS backups and log files.

#### Tip:

- a. You can use the **DEFINE MGMTCLASS** command to create a new management class.
  - b. The management class in these examples is called `WAREHOUS_BACKUPS`.
  - c. Issue the **ACTIVATE POLICYSET** command after you define the management class.
3. In the backup and archive copy groups of the management class you created, apply these settings:

**Tip:** You can use the **DEFINE COPYGROUP** or **UPDATE COPYGROUP** commands.

- a. Apply these settings to the backup copy group:

```
verexists=1
verdeleted=0
retextra=0
retonly=0
```

- b. Apply this setting to the archive copy group:

retver=nolimit

4. Register a node for the DB2 backup client, and note the node name and password for later use.

register node *node\_name* password domain=*domain\_name* backdelete=yes

5. As Administrator, log in to the system where IBM Tivoli Monitoring is installed and create a file that is called dsm.opt in the client installation directory, which by default is: c:\Program Files\Common Files\Tivoli\TSM\api64\ directory, with this information in it:

Add the following statements to the file:

servername *myserver*

tcpport 1500

tcpserveraddress *myaddress.mycompany.com*

passwordaccess generate

nodename *mynode*

tcpclientaddress 11.22.33.44

\*This is the include list that binds the mgmtclass to backup and logs files

INCLUDE \...\\*

INCLUDE \WAREHOUS\...\\* WAREHOUS\_BACKUPS

INCLUDE \WAREHOUS\...\\*.LOG WAREHOUS\_BACKUPS

where *myserver* is the name of the Tivoli Storage Manager server.

6. From the **System Properties > Advanced** tab, select **Environment Variables**, and specify these system environment variables that are required by the Tivoli Storage Manager client:

For 32-bit systems:

DSMI\_DIR set to c:\Program Files\Common Files\Tivoli\TSM\api\

DSMI\_CONFIG set to c:\Program Files\Common Files\Tivoli\TSM\api\dsm.opt

DSMI\_LOG set to c:\Program Files\Common Files\Tivoli\TSM\api\

For 64-bit systems:

DSMI\_DIR set to c:\Program Files\Common Files\Tivoli\TSM\api64\

DSMI\_CONFIG set to c:\Program Files\Common Files\Tivoli\TSM\api64\dsm.opt

DSMI\_LOG set to c:\Program Files\Common Files\Tivoli\TSM\api64\

#### Tip:

- a. The DSMI\_DIR variable must point to the API client installation directory.
- b. The DSMI\_CONFIG must be set to the location of dsm.opt.
- c. The DSMI\_LOG is the logging directory.
7. Restart your system to apply these settings.
8. You must stop all IBM Tivoli Monitoring agents before you can complete the configuration process and begin the first backup. Click **Start > Programs > IBM Tivoli Monitoring > Manage Tivoli Monitoring Services**, and stop the agents and services in this order:
  - a. Tivoli Storage Manager agents
  - b. Summarization and Pruning agent
  - c. Warehouse Proxy agent
  - d. Tivoli Enterprise Portal server
  - e. Tivoli Enterprise Monitoring server
9. Open a DB2 command prompt by clicking **Start > Programs > IBM DB2 > DB2COPY1 > Command line tools > Command Window**.



10. Determine whether there are any active application connections by issuing this command:  
`db2 list applications for db warehous`
11. If there are active connections, stop them by issuing the following command:  
`db2 force applications all`
12. To complete the configuration of the Tivoli Storage Manager client, restart DB2:  
`db2stop`  
`db2start`
13. Set the Tivoli Storage Manager password by issuing the following command:  
`c:\IBM\DB2\adsm\dsmapiw.exe`  
 When the system prompts you for the old and new passwords, specify the password that you used when you registered the node on the Tivoli Storage Manager server in Step 4 on page 802.
14. Confirm that the password was correctly set by issuing the following command:  
`db2adutl query`  
 If the command returns a message that states that no DB2 objects are found, you successfully set the password.
15. Optional: You can check the activity log on the Tivoli Storage Manager server to confirm that the node successfully authenticated when you ran the `db2adutl` command.
16. Configure DB2 to roll forward by issuing the following command:  
`db2 update db cfg for WAREHOUS using logarchmeth1 tsm`
17. Configure the database to use the management class you created in Step 2 on page 801:  
`db2 update db cfg for WAREHOUS using tsm_MGMTCLASS WAREHOUS_BACKUPS`
18. Set TRACKMOD to ON by issuing the following command:  
`db2 update db cfg for WAREHOUS using TRACKMOD ON`
  - a. If you see the SQL1363W message that is displayed in response to these commands, one or more of the parameters that are submitted for modification were not dynamically changed. Issue this command:  
`db2 force applications all`
  - b. Ensure that the settings for LOGARCHMETH1, TSM\_MGMTCLASS, and TRACKMOD have been updated by issuing the following command:  
`db2 get db cfg for warehous`
19. Perform a full offline backup of the database:  
`db2 backup db WAREHOUS use tsm`
20. Restart IBM Tivoli Monitoring for Tivoli Storage Manager services by using the **Manage Tivoli Monitoring Services** console. Start all of the agents and services in this order:
  - a. Tivoli Storage Manager agents
  - b. Summarization and Pruning agent
  - c. Warehouse Proxy agent
  - d. Tivoli Enterprise Portal server
  - e. Tivoli Enterprise Monitoring server

**Tip:** All backups, incremental and full, can now be performed online without stopping and restarting these services.



21. The first online backup must be a full backup, followed by as many incremental backups as needed:

```
db2 backup db WAREHOUS online use tsm
```

22. Start the non-cumulative incremental backups by issuing the following command:

```
db2 backup db warehous online incremental delta use tsm
```

**Tip:** Specify the keyword `delta` to ensure that the incremental backups are not cumulative. This reduces the size of the backups and the amount of time each backup takes to run. If you want your incremental backups to be cumulative, do not specify the keyword `delta`. This increases the size of the backups, but reduces the number of incremental backups that are required to perform a restore. If your backups do not take much time or storage space, you might choose to only perform full backups, which would only require a single backup to restore.

23. After you complete a full set of incremental backups, perform a full backup:

```
db2 backup db warehous online use tsm
```

### What to do next

After you complete a successful backup of the WAREHOUS database, you can schedule your backups to run on a regular schedule.

#### Related tasks:

“Verifying and deleting backups of Tivoli Monitoring for Tivoli Storage Manager”

“Restoring backups of Tivoli Monitoring for Tivoli Storage Manager” on page 813

## Verifying and deleting backups of Tivoli Monitoring for Tivoli Storage Manager

You must verify that the data was successfully backed up before you need to restore data in an emergency.

### Procedure

1. Open a DB2 command window by clicking **Start > Programs > IBM DB2 > DB2COPY1 > Command line tools > Command Window**.
2. Display a list of all available backup files by issuing the following command:

```
db2adutl query
```

This example output displays full backups, incremental backups, and archive logs, which are required for rollforward recovery. There can be hundreds of files in the log archives, but only three are shown in this example.

Query for database WAREHOUS

Retrieving FULL DATABASE BACKUP information.

|                        |                          |                        |             |
|------------------------|--------------------------|------------------------|-------------|
| 1 Time: 20100806173226 | Oldest log: S0000241.LOG | DB Partition Number: 0 | Sessions: 2 |
| 2 Time: 20100804200421 | Oldest log: S0000000.LOG | DB Partition Number: 0 | Sessions: 1 |

Retrieving INCREMENTAL DATABASE BACKUP information.

No INCREMENTAL DATABASE BACKUP images found for WAREHOUS

Retrieving DELTA DATABASE BACKUP information.

|                        |                          |                        |             |
|------------------------|--------------------------|------------------------|-------------|
| 1 Time: 20100812114757 | Oldest log: S0001091.LOG | DB Partition Number: 0 | Sessions: 2 |
| 2 Time: 20100811173845 | Oldest log: S0000989.LOG | DB Partition Number: 0 | Sessions: 2 |
| 3 Time: 20100810102924 | Oldest log: S0000804.LOG | DB Partition Number: 0 | Sessions: 2 |
| 4 Time: 20100809095246 | Oldest log: S0000650.LOG | DB Partition Number: 0 | Sessions: 2 |

Retrieving TABLESPACE BACKUP information.  
No TABLESPACE BACKUP images found for WAREHOUS

Retrieving INCREMENTAL TABLESPACE BACKUP information.  
No INCREMENTAL TABLESPACE BACKUP images found for WAREHOUS

Retrieving DELTA TABLESPACE BACKUP information.  
No DELTA TABLESPACE BACKUP images found for WAREHOUS

Retrieving LOAD COPY information.  
No LOAD COPY images found for WAREHOUS

Retrieving LOG ARCHIVE information.  
Log file: S0000000.LOG, Chain Num: 0, DB Partition Number: 0, Taken at: 2010-08-04-21.21.38  
Log file: S0000001.LOG, Chain Num: 0, DB Partition Number: 0, Taken at: 2010-08-04-21.21.38  
Log file: S0000002.LOG, Chain Num: 0, DB Partition Number: 0, Taken at: 2010-08-04-21.21.38

3. To verify a specified backup, issue this command:  
`db2adutl verify full taken at 20100804200421 db warehous`
4. Manually delete any unwanted backup and archive files by using the `db2adutl` utility. For a complete restore you must retain the most recent full backup, and all incremental backups that were taken since the last successful full backup.  
To retain only the most recent full backup, issue the following command:  
`db2adutl delete full nonincremental keep 1 db warehous`
5. To retain the most recent six incremental backups, issue the following command:  
`db2adutl delete full delta keep 6 db warehous`

**Tip:** The `db2adutl` utility uses the keyword `delta` to mean a non-cumulative, incremental backup. If you perform cumulative incremental backups, you can issue the following command to retain the most recent backup:  
`db2adutl delete full incremental keep 1 db warehous`

The `db2adutl` utility uses the keyword `incremental` to mean a cumulative, incremental backup.

6. Delete the log file archives that have dates earlier than any of the backups you retained:  
`db2adutl delete logs between S0000000.LOG and S0000240.LOG db warehous`

**Tip:** The keyword `between` is inclusive, meaning both `S0000000.LOG` and `S0000240.LOG`, and everything between them will be removed. You can use `WITHOUT PROMPTING` to avoid having to respond to every delete.

**Related tasks:**

“Backing up IBM Tivoli Monitoring, Tivoli Enterprise Portal server, and agent configuration settings” on page 806

## Backing up IBM Tivoli Monitoring, Tivoli Enterprise Portal server, and agent configuration settings

The Tivoli Storage Manager monitoring agent collects data from the server, stores it in a database cache, before it is stored in the WAREHOUS database. The database cache, WAREHOUS database, and the agent configuration file, must be backed up to ensure that all data is protected in a system failure.

### About this task

You can back up the entire contents of the repository directories, and the agent configuration file, by using an application such as the Tivoli Storage Manager client. The monitoring agent must be stopped during the backup process. Failing to stop the agent might cause file-in-use errors, and an internally inconsistent snapshot of the data. The agent can be restarted after the backup is complete.

### Procedure

To back up the IBM Tivoli Monitoring and Tivoli Enterprise Portal server configuration settings, complete these steps:

1. Back up the DERBY database cache that is stored in a directory named DERBY. This directory is created by the monitoring agent on the system where the agent runs. If there are multiple monitoring agents that are installed on one system, they all use this directory. The default directory is:

`C:\Program Files\Tivoli\TSM\reporting\ITM\TMAITM6\DERBY`

**Tip:** If the monitoring agent is started from a command shell, the DERBY directory is created in the directory where the agent is started.

2. Back up the collection of binary files that are created by the monitoring agent. The system where these files are located depends on the collection location that is specified in the historical settings for the Tivoli Enterprise Portal server. For more information about accessing these settings, see configuration steps.

- TEMA binary files are kept on the monitoring agent system in the following directory:

`installation_directory\ITM\TMAITM6\logs\History\KSK\agent_instance_name`

- TEMS binary files are kept on the IBM Tivoli Monitoring server system in the following directory:

`installation_directory\itm\CMSagent_instance_name`

3. The monitoring agent configuration files must be backed up if they have been modified. The agent configuration files are on the system where the agent is installed, for example:

`installation_directory\itm\tmaitm6\kskenvagent_instance_name`

where *installation\_directory* is the installation directory. The default is `C:\Program Files\Tivoli\TSM\reporting`.

### Related tasks:

“Exporting Tivoli Enterprise Portal workspaces and queries” on page 807

## Exporting Tivoli Enterprise Portal workspaces and queries

If you modified the Tivoli Enterprise Portal workspaces, or added workspaces after installation, you can export them to an .xml file, which can be backed up and used to perform a restore if necessary.

### Procedure

To export and import the workspaces and queries, complete the following steps:

1. Log in to the Tivoli Enterprise Portal client with the sysadmin user ID to modify the authority that is necessary to export and import the workspaces and queries.
2. From the main menu click **Edit > Administer Users**.
3. Select the **SYSADMIN** user ID, and in the Authorities pane, select **Workspace Administration**.
4. Select the **Workspace Administration Mode** check box, and click **OK**.

**Tip:** Ensure that the **Workspace Administration Mode** and **Workspace Author Mode** check boxes are selected.

5. Export the workspaces to a file. From a shell or command window, issue the following commands:

```
cd C:\Program Files\Tivoli\TSM\reporting\itm\BIN
tacmd exportworkspaces -t sk -x workspaces_output_filename -u sysadmin
-p sysadmin_password -f
```

**Tip:** The tacmd file is in the bin directory where you installed IBM Tivoli Monitoring.

The default directory is C:\Program Files\Tivoli\TSM\reporting\itm\BIN\tacmd.exe

6. Export the queries to a file by issuing the following **tacmd** command:

```
./tacmd exportqueries -t sk -x queries_output_filename -u sysadmin
-p sysadmin_password -f
```

### What to do next

After you export the queries to the two .xml output files, you can back them up by using a backup utility such as the Tivoli Storage Manager client.

#### Related tasks:

“Exporting Cognos reports” on page 809

## Exporting IBM Tivoli Monitoring situations

If you modified or created IBM Tivoli Monitoring situations after installation, you can export them to a file, which can be backed up and used to perform a restore.

### Procedure

1. From a command line, go to the following directory:

```
installation_dir\ITM\bin
```

where *installation\_dir* is the Tivoli Monitoring for Tivoli Storage Manager installation directory. The default is:

```
C:\Program Files\Tivoli\TSM\reporting
```

2. Log on using the sysadmin user ID by issuing the following command:

```
tacmd.exe login -s hostname -u sysadmin -p pswd
```

where *hostname* is the name of the system.

3. Export the IBM Tivoli Monitoring situations if you created your own. Issue the following command:

```
tacmd.exe bulkExportSit -t sk -d -f -p my_sitation_dir
```

where *my\_sitation\_dir* is the path to the directory where you want to save the exported situations. The situations are exported to the Bulk\SITUATION directory in the path that you specified in the command.

**Restriction:** The directory must not exist in the Tivoli Monitoring for Tivoli Storage Manager installation directory.

## Exporting IBM Tivoli Monitoring historical settings

If you customized the IBM Tivoli Monitoring historical settings after installation, you can export them to a file, which can be backed up and restored.

### Procedure

1. From a command line, go to the following directory:

```
installation_dir\ITM\bin
```

where *installation\_dir* is the Tivoli Monitoring for Tivoli Storage Manager installation directory. The default is:

```
C:\Program Files\Tivoli\TSM\reporting
```

2. Log on using the sysadmin user ID by issuing the following command:

```
tacmd.exe login -s hostname -u sysadmin -p pswd
```

where *hostname* is the name of the system.

3. Export the historical data to record the settings:

Issue the following commands from a command prompt. Ensure that you update the *pswd*, *INSTALL\_DIR*, and *hostname* variables.

```
SET admin=sysadmin
SET pswd=sysadmin_password
SET hostname=your_hostname
SET INSTALL_DIR=C:\IBM\ITM
SET type="Tivoli Storage Manager"

cd %INSTALL_DIR%\bin
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK ACTIVITY LOG"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK ACTIVITY SUMMARY"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK CLIENT MISSED FILES"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK CLIENT NODE STATUS"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK CLIENT NODE STORAGE"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK NODE ACTIVITY"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK REPLDETAILS"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK REPLSTATUS"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK SCHEDULE"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK STORAGE DEVICE"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK STORAGE POOL"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
```

```
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK TAPE USAGE"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
tacmd.exe histViewAttributeGroup -t "%type%" -o "KSK TAPE VOLUME"
-s %hostname% -u %admin% -w %pswd% >> \temp_dir\collection_settings.txt
```

4. Verify that the historical data was successfully exported by reviewing the `collections_settings.txt` file. For each workspace, you might see text similar to the following example:

```
KUIHVA001I Validating user credentials...
Attribute Group Name : KSK ACTIVITY LOG
Status : Configured
Collections : KSK_KSKACTVLOG
Summarization :
Yearly : On
Quarterly : On
Monthly : On
Weekly : On
Daily : On
Hourly : On
Pruning :
Yearly : 7 Years
Quarterly : 2 Years
Monthly : 2 Years
Weekly : 6 Months
Daily : 2 Months
Hourly : 14 Days
Detailed Data : 3 Months
Available TEMS : TEMS_TCR
```

## Exporting Cognos reports

If you customized the installed report designs, or added your own queries or report designs, export the Cognos reports to a file that can be backed up. You can then import this file to restore your custom reports in the event of a system failure or upgrade.

### Procedure

1. From a command line, go to the following directory:

```
installation_dir\ITM\bin
```

where *installation\_dir* is the Tivoli Monitoring for Tivoli Storage Manager installation directory. The default is:

```
C:\Program Files\Tivoli\TSM\reporting
```

2. Log on using the sysadmin user ID by issuing the following command:

```
tacmd.exe login -s hostname -u sysadmin -p pswd
```

where *hostname* is the name of the system.

3. Optional: Export the Cognos reports, if you customized any reports or created your own:

- a. Create the `upgradeData.zip` file by issuing the following command:

```
TCR_install_dir\profiles\TIPProfile\upgrade\bin\preupgrade.bat
TCR_install_dir --username username --password password --productId TCR
```

where

- *username* and *password* is the user name and password for the tipadmin user ID
- *TCR\_install\_dir* is the Tivoli Common Reporting installation directory. The default directory is:

```
C:\IBM\tivoli\tipv2
```

The compressed file is created in the following location:

*TCR\_install\_dir\profiles\TIPProfile\upgrade\data\upgradeData.zip.*

- b. Move the upgradeData.zip file out of the Administration Center installation directory so that the file is not deleted when you uninstall the Administration Center.

### What to do next

After you export your reports to a file, ensure that they are backed up and restored. Validate that you can back up and restore the data.

## Restoring Tivoli Monitoring for Tivoli Storage Manager

You can restore your Tivoli Monitoring for Tivoli Storage Manager system, which includes the data that was collected by Tivoli Monitoring for Tivoli Storage Manager, the WAREHOUS database, any customized Cognos reports, and any configuration settings setting that might be needed.

### About this task

This scenario outlines the tasks that are required to restore your Tivoli Monitoring for Tivoli Storage Manager system by using your backups.

### Procedure

1. Install and configure the Tivoli Storage Manager backup-archive client:  
“Configuring the Tivoli Storage Manager client on Windows systems” on page 811
2. Reinstall and configure Tivoli Monitoring for Tivoli Storage Manager. Complete the steps in Installing Tivoli Monitoring for Tivoli Storage Manager ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.srv.install.doc/t\\_rpt\\_inst\\_intro.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.srv.install.doc/t_rpt_inst_intro.html)).
3. Restore your WAREHOUS database from backup: “Restoring backups of Tivoli Monitoring for Tivoli Storage Manager” on page 813
4. Restore your IBM Tivoli Monitoring, Tivoli Enterprise Portal server, and agent configuration files from backup: “Restoring IBM Tivoli Monitoring, Tivoli Enterprise Portal server, and agent configuration settings” on page 815
5. Optional: Import any customized situations: “Importing IBM Tivoli Monitoring situations” on page 816
6. Optional: Import any customized Cognos reports: “Importing Cognos reports” on page 817

### Related tasks:

“Restoring backups of Tivoli Monitoring for Tivoli Storage Manager” on page 813



## Configuring the Tivoli Storage Manager client on Windows systems

Configure the Tivoli Storage Manager backup-archive client to restore the WAREHOUS database.

### Procedure

To configure the Tivoli Storage Manager backup-archive client, complete the following steps:

1. Install the Tivoli Storage Manager backup-archive client on the same system where IBM Tivoli Monitoring is installed. Complete the steps in Installing the Tivoli Storage Manager backup-archive clients ([http://www.ibm.com/support/knowledgecenter/SSGSG7\\_7.1.1/com.ibm.itsm.client.doc/c\\_inst.html](http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.client.doc/c_inst.html)).
2. As Administrator, log in to the system where IBM Tivoli Monitoring is installed and create a file that is called dsm.opt in the client installation directory, which by default is: c:\Program Files\Common Files\Tivoli\TSM\api64\ directory, with this information in it:

Add the following statements to the file:

```
servername myserver
```

```
tcpport 1500
```

```
tcpserveraddress myaddress.mycompany.com
```

```
passwordaccess generate
```

```
nodename mynode
```

```
tcpclientaddress 11.22.33.44
```

```
*This is the include list that binds the mgmtclass to backup and logs files
```

```
INCLUDE \...*
```

```
INCLUDE \WAREHOUS\...* WAREHOUS_BACKUPS
```

```
INCLUDE \WAREHOUS\...*.LOG WAREHOUS_BACKUPS
```

where *myserver* is the name of the Tivoli Storage Manager server.

3. From the **System Properties > Advanced** tab, select **Environment Variables**, and specify these system environment variables that are required by the Tivoli Storage Manager client:

For 32-bit systems:

```
DSMI_DIR set to c:\Program Files\Common Files\Tivoli\TSM\api\
```

```
DSMI_CONFIG set to c:\Program Files\Common Files\Tivoli\TSM\api\dsm.opt
```

```
DSMI_LOG set to c:\Program Files\Common Files\Tivoli\TSM\api\
```

For 64-bit systems:

```
DSMI_DIR set to c:\Program Files\Common Files\Tivoli\TSM\api64\
```

```
DSMI_CONFIG set to c:\Program Files\Common Files\Tivoli\TSM\api64\dsm.opt
```

```
DSMI_LOG set to c:\Program Files\Common Files\Tivoli\TSM\api64\
```

#### Tip:

- a. The DSMI\_DIR variable must point to the API client installation directory.
  - b. The DSMI\_CONFIG must be set to the location of dsm.opt.
  - c. The DSMI\_LOG is the logging directory.
4. Restart your system to apply these settings.
  5. You must stop all IBM Tivoli Monitoring agents before you can complete the configuration process and begin the first backup. Click **Start > Programs > IBM Tivoli Monitoring > Manage Tivoli Monitoring Services**, and stop the agents and services in this order:
    - a. Tivoli Storage Manager agents



- b. Summarization and Pruning agent
  - c. Warehouse Proxy agent
  - d. Tivoli Enterprise Portal server
  - e. Tivoli Enterprise Monitoring server
6. Open a DB2 command prompt by clicking **Start > Programs > IBM DB2 > DB2COPY1 > Command line tools > Command Window**.
  7. Determine whether there are any active application connections by issuing this command:  
`db2 list applications for db warehous`
  8. If there are active connections, stop them by issuing the following command:  
`db2 force applications all`
  9. To complete the configuration of the Tivoli Storage Manager client, restart DB2:  
`db2stop`  
`db2start`
  10. Set the Tivoli Storage Manager password by issuing the following command:  
`c:\IBM\DB2\adsm\dsmapiw.exe`  
 When the system prompts you for the old and new passwords, specify the password for the node.
  11. Confirm that the password was correctly set by issuing the following command:  
`db2adutl query`  
 If the command returns a message that states that no DB2 objects are found, you successfully set the password.
  12. Optional: You can check the activity log on the Tivoli Storage Manager server to confirm that the node successfully authenticated when you ran the `db2adutl` command.
  13. Configure DB2 to roll forward by issuing the following command:  
`db2 update db cfg for WAREHOUS using logarchmeth1 tsm`
  14. Configure the database to use the management class that you used when you performed the backup:  
`db2 update db cfg for WAREHOUS using tsm_MGMTCLASS WAREHOUS_BACKUPS`
  15. Set TRACKMOD to ON by issuing the following command:  
`db2 update db cfg for WAREHOUS using TRACKMOD ON`
    - a. If you see the SQL1363W message that is displayed in response to these commands, one or more of the parameters that are submitted for modification were not dynamically changed. Issue this command:  
`db2 force applications all`
    - b. Ensure that the settings for LOGARCHMETH1, TSM\_MGMTCLASS, and TRACKMOD have been updated by issuing the following command:  
`db2 get db cfg for warehous`

## Restoring backups of Tivoli Monitoring for Tivoli Storage Manager

You can restore Tivoli Monitoring for Tivoli Storage Manager from a backup if a failure occurs.

### About this task

This procedure assumes that the system where Tivoli Monitoring for Tivoli Storage Manager was installed has been lost. Before you can perform a restore from backups, you must reinstall and configure Tivoli Monitoring for Tivoli Storage Manager and the Tivoli Storage Manager client.

### Procedure

1. To restore the WAREHOUS database, you must first stop all Tivoli Monitoring for Tivoli Storage Manager agents and services. From the Manage Tivoli Monitoring Services console, which is also referred to as CandleManage, stop these agents and services in this order:
  - a. Tivoli Storage Manager agents
  - b. Summarization and Pruning agent
  - c. Warehouse Proxy agent
  - d. Tivoli Enterprise Portal server
  - e. Tivoli Enterprise Monitoring server
2. To open a DB2 command window, click **Start > Programs > IBM DB2 > DB2COPY1 > Command line tools > Command Window**.
3. Determine whether there are any existing application connections by issuing this command:  
`db2 list applications for db warehous`
4. Stop the active connections by issuing the following command:  
`db2 force applications all`
5. Configure the credentials that the API uses to connect to the Tivoli Storage Manager server by issuing the following command:  
`c:\IBM\DB2\adsm\dsmapiw.exe`
6. To obtain a list of all available full and incremental backups, issue the following command:  
`db2adutl query full db warehous`

The output lists the available full, delta, and incremental backups:

Query for database WAREHOUS

Retrieving FULL DATABASE BACKUP information.

1 Time: 20100806173226 Oldest log: S0000241.LOG DB Partition Number: 0 Sessions: 2  
2 Time: 20100804200421 Oldest log: S0000000.LOG DB Partition Number: 0 Sessions: 1

Retrieving INCREMENTAL DATABASE BACKUP information.

No INCREMENTAL DATABASE BACKUP images found for WAREHOUS

Retrieving DELTA DATABASE BACKUP information.

1 Time: 20100812114757 Oldest log: S0001091.LOG DB Partition Number: 0 Sessions: 2  
2 Time: 20100811173845 Oldest log: S0000989.LOG DB Partition Number: 0 Sessions: 2  
3 Time: 20100810102924 Oldest log: S0000804.LOG DB Partition Number: 0 Sessions: 2  
4 Time: 20100809095246 Oldest log: S0000650.LOG DB Partition Number: 0 Sessions: 2

Retrieving TABLESPACE BACKUP information.

No TABLESPACE BACKUP images found for WAREHOUS

Retrieving INCREMENTAL TABLESPACE BACKUP information.

No INCREMENTAL TABLESPACE BACKUP images found for WAREHOUS

Retrieving DELTA TABLESPACE BACKUP information.

No DELTA TABLESPACE BACKUP images found for WAREHOUS

Retrieving LOAD COPY information.

No LOAD COPY images found for WAREHOUS

7. To perform a restore, you must issue a restore command for each backup that is involved in the restore. DB2 requires configuration information that is contained in your most recent backup, therefore you must restore it first before you proceed to restore the entire series.

For example, if you perform daily backups with #7 being the most recent backup and #1 being the oldest backup, restore backup #7 first, followed by backup #1, #2, #3, #4, #5, #6, and then #7 again.

*Table 78. Backup scenario: restore order for backups*

| Backup # | Day                    | Type of backup | Restore order |
|----------|------------------------|----------------|---------------|
| 7        | Sunday, December 31    | Incremental    | 1st           |
| 1        | Monday, December 25    | Full           | 2nd           |
| 2        | Tuesday, December 26   | Incremental    | 3rd           |
| 3        | Wednesday, December 27 | Incremental    | 4th           |
| 4        | Thursday, December 28  | Incremental    | 5th           |
| 5        | Friday, December 29    | Incremental    | 6th           |
| 6        | Saturday, December 30  | Incremental    | 7th           |
| 7        | Sunday, December 31    | Incremental    | 8th           |

For example, this backup scenario would be issued as a series of commands similar to these:

```
db2 restore database warehous incremental use tsm taken at 20101231110157
db2 restore database warehous incremental use tsm taken at 20101225110426
db2 restore database warehous incremental use tsm taken at 20101226110346
db2 restore database warehous incremental use tsm taken at 20101227110224
db2 restore database warehous incremental use tsm taken at 20101228110145
db2 restore database warehous incremental use tsm taken at 20101229110234
db2 restore database warehous incremental use tsm taken at 20101230110157
db2 restore database warehous incremental use tsm taken at 20101231110257
```

If this warning message is displayed, respond yes to continue.

```
SQL2539W Warning! Restoring to an existing database that is the same as
the backup image database. The database files will be deleted.
Do you want to continue ? (y/n)
```

8. If the most recent backup completed was a full backup, you can restore only that backup without having to restore the whole series of incremental backups, for example:

```
db2 restore database warehous use tsm taken at
20101229110234
```

9. Because the backups were configured for rollforward recovery, you must complete the restore process with the rollforward command:

```
db2 rollforward database warehous to end of logs and complete
```

## What to do next

After you complete this restore procedure, perform a full, offline backup before you start the IBM Tivoli Monitoring services and agents.

### Related tasks:

“Backing up the WAREHOUS database V7.1 on Windows systems” on page 801

## Restoring IBM Tivoli Monitoring, Tivoli Enterprise Portal server, and agent configuration settings

After you backed up the entire contents of the repository directories and the agent configuration files by using an application such as Tivoli Storage Manager client, you can restore them to the original location.

## Procedure

To restore the IBM Tivoli Monitoring and Tivoli Enterprise Portal repository directories and the agent configuration files, complete the following steps:

1. Restore the DERBY database that you backed up to the directory that was created by the monitoring agent on the system where the agent runs. If there are multiple monitoring agents that are installed on one system, they all use this directory. The default directory is:

```
C:\Program Files\Tivoli\TSM\reporting\ITM\TMAITM6\DERBY
```

**Tip:** If the monitoring agent is started from a command shell, the DERBY directory is created in the current directory from where it is started.

2. Restore the collection of binary files that were created by the monitoring agent to their directories. The system where these files are located depends on the collection location that is specified in the historical settings for the Tivoli Enterprise Portal server.
  - TEMA binary files are restored to the monitoring agent system in the following directory:

*installation\_directory\ITM\TMAITM6\logs\History\KSK\agent\_instance\_name*

- TEMS binary files are restored to the IBM Tivoli Monitoring system in the following directory:

*installation\_directory\itm\CMS\agent\_instance\_name*

3. The monitoring agent configuration files must also be restored if they were modified. Restore the agent configuration files to their location on the system where the agent is installed, for example:

*installation\_directory\itm\tmaitm6\kskenvagent\_instance\_name*

where *installation\_directory* is the installation directory. The default is C:\Program Files\Tivoli\TSM\reporting.

## Importing Tivoli Enterprise Portal workspaces and queries

If you exported the Tivoli Enterprise Portal workspaces and queries, you can import them to IBM Tivoli Monitoring.

### Procedure

To import the workspaces and queries, complete the following steps:

1. Log in to the Tivoli Enterprise Portal client with the sysadmin user ID to modify the authority that is necessary to export and import the workspaces and queries.
2. From the main menu click **Edit > Administer Users**.
3. Select the **SYSADMIN** user ID, and in the Authorities pane, select **Workspace Administration**.
4. Select the **Workspace Administration Mode** check box, and click **OK**.

**Tip:** Ensure that the **Workspace Administration Mode** and **Workspace Author Mode** check boxes are selected.

5. Import the workspaces and queries by issuing the following commands:

```
cd C:\Program Files\Tivoli\TSM\reporting\itm\BIN
tacmd.exe importworkspaces -x workspaces_output_filename -u sysadmin -p
sysadmin_password -f
tacmd.exe importqueries -x queries_output_filename -u sysadmin -p
sysadmin_password -f
```

**Tip:** The tacmd file is in the bin directory where you installed IBM Tivoli Monitoring.

The default directory is C:\Program Files\Tivoli\TSM\reporting\itm\BIN\  
tacmd.exe

## Importing IBM Tivoli Monitoring situations

If you exported situations, you can import them in to IBM Tivoli Monitoring.

### Procedure

1. From a command line, go to the following directory:

*installation\_dir\ITM\bin*

where *installation\_dir* is the Tivoli Monitoring for Tivoli Storage Manager installation directory. The default is:

C:\Program Files\Tivoli\TSM\reporting

2. Log on using the sysadmin user ID by issuing the following command:

```
tacmd.exe login -s hostname -u sysadmin -p pswd
```

where *hostname* is the name of the system.

3. Import the IBM Tivoli Monitoring situations that you exported. Issue the following command:

```
tacmd.exe bulkImportSit -p my_situations_dir
```

where *my\_situations\_dir* is the path to the directory where you exported the situations.

4. Assign the situations to managed systems where the situations will run and then start the situations:
  - a. Start Tivoli Enterprise Portal.
  - b. Click **Edit > Situation Editor**
  - c. For each situation, select it, click the **Distribution** tab, assign it to a managed system, and then right-click the situation and click **Start**.
  - d. If the imported situation was associated with a navigator item, recreate the association.

## Importing Cognos reports

If you have an exported or backed up .zip package file, this file can be used to restore your customized Cognos reports if the system experienced a failure.

### Procedure

To import a Cognos.zip package file that was restored from backup, complete the following steps:

1. Log in to the Tivoli Integrated Portal.
2. Expand the **Reporting** item in the navigation tree and select **Common Reporting** to open the reporting workspace.
3. Copy the restored Cognos .zip package file into the appropriate directory:  
\\IBM\\tivoli\\tip\\products\\tcr\\Cognos\\c8\\deployment
4. Click **Launch > Administration**. This switches to a tabbed workspace.
5. Select the **Configuration** tab, and select **Content Administration** in the box.
6. Click the **New Import** icon on the Administration toolbar.
7. Start the New Import wizard.
8. Click **Refresh** in the upper-right corner until you see the final status of the export.

#### Related tasks:

“Exporting Cognos reports” on page 809



---

## Chapter 25. Command-based monitoring methods

You can use commands to monitor operations.

For example, you can issue commands to obtain information about settings, status, client sessions, server processes, the Tivoli Storage Manager database, and activity log messages. You can also obtain information about accounting records, which show the server resources that are used during a client session.

You can also issue commands to log server and client messages as events, which can be used to monitor the server.

---

### Using IBM Tivoli Storage Manager queries to display information

IBM Tivoli Storage Manager provides QUERY commands to display formatted information about definitions, settings, processes, and status.

#### About this task

For some commands, you can display the information in either a standard or detailed format. The standard format presents less information than the detailed format, and is useful in displaying an overview of many objects. For displaying more information about a particular object, use the detailed format when supported by a given command.

For information about creating customized queries of the database, see “Using SQL to query the IBM Tivoli Storage Manager database” on page 823.

### Requesting information about IBM Tivoli Storage Manager definitions

During Tivoli Storage Manager system setup, an administrator can define many objects, for example, storage management policies, storage pools, and device classes. Tivoli Storage Manager provides queries that display information about these objects.

#### About this task

Most of these definition queries let you request standard format or detailed format. Standard format limits the information and usually displays it as one line per object. Use the standard format when you want to query many objects, for example, all registered client nodes. Detailed format displays the default and specific definition parameters. Use the detailed format when you want to see all the information about a limited number of objects.

Here is an example of the standard output for the QUERY NODE command:



| Node Name | Platform | Policy Domain Name | Days Since Last Access | Days Since Password Set | Locked? |
|-----------|----------|--------------------|------------------------|-------------------------|---------|
| CLIENT1   | AIX      | STANDARD           | 6                      | 6                       | No      |
| GEORGE    | Linux86  | STANDARD           | 1                      | 1                       | No      |
| JANET     | HPUX     | STANDARD           | 1                      | 1                       | No      |
| JOE2      | Mac      | STANDARD           | <1                     | <1                      | No      |
| TOMC      | WinNT    | STANDARD           | 1                      | 1                       | No      |

Here is an example of the detailed output for the QUERY NODE command:

```

Node Name: JOE
Platform: WinNT
Client OS Level: 5.00
Client Version: Version 5, Release 1, Level 5.0
Policy Domain Name: STANDARD
Last Access Date/Time: 05/19/2002 18:55:46
Days Since Last Access: 6
Password Set Date/Time: 05/19/2002 18:26:43
Days Since Password Set: 6
Invalid Sign-on Count: 0
Locked?: No
Contact:
Compression: Client's Choice
Archive Delete Allowed?: Yes
Backup Delete Allowed?: No
Registration Date/Time: 03/19/2002 18:26:43
Registering Administrator: SERVER_CONSOLE
Last Communication Method Used: Tcp/Ip
Bytes Received Last Session: 108,731
Bytes Sent Last Session: 698
Duration of Last Session (sec): 0.00
Pct. Idle Wait Last Session: 0.00
Pct. Comm. Wait Last Session: 0.00
Pct. Media Wait Last Session: 0.00
Optionset:
URL: http://client.host.name:1581
Node Type: Client
Password Expiration Period: 60
Keep Mount Point?: No
Maximum Mount Points Allowed: 1
Auto Filespace Rename: No
Validate Protocol: No
TCP/IP Name: JOE
TCP/IP Address: 9.11.153.39
Globally Unique ID: 11.9c.54.e0.8a.b5.11.d6.b3.c3.00.06.29.45.c1.5b
Transaction Group Max: 0
Session Initiation: ClientOrServer
HLADDRESS:
LLADDRESS:

```

## Requesting information about client sessions

When administrators or users access Tivoli Storage Manager, an administrative or client node session is established with the server. The server assigns each client session a unique session number.

### About this task

You can use the QUERY SESSION command to request information about client sessions. Figure 94 on page 821 shows a sample client session report.

| Sess<br>Number | Comm.<br>Method | Sess<br>State | Wait<br>Time | Bytes<br>Sent | Bytes<br>Recvd | Sess<br>Type | Platform | Client Name |
|----------------|-----------------|---------------|--------------|---------------|----------------|--------------|----------|-------------|
| 3              | Tcp/Ip          | IdleW         | 9 S          | 7.8 K         | 706            | Admin        | WinNT    | TOMC        |
| 5              | Tcp/Ip          | IdleW         | 0 S          | 1.2 K         | 222            | Admin        | AIX      | GUEST       |
| 6              | Tcp/Ip          | Run           | 0 S          | 117           | 130            | Admin        | Mac2     | MARIE       |

Figure 94. Information about client sessions

Check the *wait time* to determine the length of time (seconds, minutes, hours) the server has been in the current state. The *session state* reports status of the session and can be one of the following:

**Start** Connecting with a client session.

**Run** Running a client request.

**End** Ending a client session.

#### RecvW

Waiting to receive an expected message from the client while a database transaction is in progress. A session in this state is subject to the COMMTIMEOUT limit.

#### SendW

Waiting for acknowledgment that the client has received a message sent by the server.

#### MediaW

Waiting for removable media to become available.

**IdleW** Waiting for communication from the client, and a database transaction is *not* in progress. A session in this state is subject to the IDLETIMEOUT limit.

For example, Tivoli Storage Manager cancels the client session if the IDLETIMEOUT option is set to 30 minutes, and a user does not initiate any operations within those 30 minutes. The client session is automatically reconnected to the server when it starts to send data again.

## Requesting information about server processes

When a command runs in the foreground (synchronous command execution), you are unable to issue any other commands until the process completes. When a command runs in the background (asynchronous command execution), you can issue other commands while the process completes.

### About this task

Most commands run in the foreground, but others generate background processes. In some cases, you can specify that a process run in the foreground. Tivoli Storage Manager issues messages that provide information about the start and end of processes. In addition, you can request information about active background processes. If you know the process ID number, you can use the number to limit the search. However, if you do not know the process ID, you can display information about all background processes by issuing the QUERY PROCESS command.

Figure 95 on page 822 shows a server background process report after a DELETE FILESPACE command was issued. The report displays a process ID number, a description, and a completion status for each background process.

| Process Number | Process Description | Status                                                             |
|----------------|---------------------|--------------------------------------------------------------------|
| 2              | DELETE FILESPACE    | Deleting filespace DRIVE_D for node CLIENT1:<br>172 files deleted. |

Figure 95. Information about background processes

## Requesting information about server settings

Any administrator can request general server information, most of which is defined by SET commands, by issuing the QUERY STATUS command.

### About this task

The displayed text includes a variety of information, such as:

- The server name and TCP/IP settings
- Server password and authentication settings
- Client node settings
- Activity log settings and status
- License audits and compliance status
- Client/server session limits
- Central scheduler settings and status
- Recovery log and backup trigger modes
- Refresh settings and status
- Table of contents retention period
- Machine globally unique ID at last startup
- Archive retention protection status
- Data encryption strength

This list is not all-inclusive. For a detailed explanation of the QUERY STATUS command, see the *Administrator's Reference*.

## Querying server options

Use the QUERY OPTION command to display information about one or more server options.

### About this task

| Task                 | Required Privilege Class |
|----------------------|--------------------------|
| Query server options | Any administrator        |

You can issue the QUERY OPTION command with no operands to display general information about all defined server options. You also can issue it with a specific option name or pattern-matching expression to display information on one or more server options. You can set options by editing the server options file.

Options can also be set through the IBM Tivoli Storage Manager Console.

See the QUERY OPTION command in the *Administrator's Reference* for more information.

---

## Using SQL to query the IBM Tivoli Storage Manager database

You can use a standard SQL SELECT statement to get information from the database.

### About this task

IBM Tivoli Storage Manager Versions 6.1 and later use the DB2 open database connectivity (ODBC) driver to query the database and display the results.

DB2 provides its own ODBC driver which can also be used to access the Tivoli Storage Manager server DB2 database. For more information on the DB2 native ODBC driver, refer to DB2 documentation at: [http://www.ibm.com/support/knowledgecenter/SSEPGG\\_10.5.0](http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0). Search on *Introduction to DB2 CLI and ODBC*

## Using SELECT commands

SELECT commands allow you to create and format customized queries of the IBM Tivoli Storage Manager database.

### About this task

For SELECT statement syntax and guidelines, refer to DB2 documentation: [http://www.ibm.com/support/knowledgecenter/SSEPGG\\_10.5.0](http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0). Search on the term *Select-statement*.

You can issue the SELECT command from the command line of an administrative client. You cannot issue this command from the server console.

### Learning what information is available: system catalog tables

System catalog tables provide information about information that is available in the database.

### About this task

To help you find what information is available in the database, Tivoli Storage Manager provides three system catalog tables:

#### **SYSCAT.TABLES**

Contains information about all tables that can be queried with the SELECT command.

#### **SYSCAT.COLUMNS**

Describes the columns in each table.

#### **SYSCAT.ENUMTYPES**

Defines the valid values for each enumerated type and the order of the values for each type.

You can issue the SELECT command to query these tables and determine the location of the information that you want. For example, to get a list of all tables available for querying in the database *TSMDB1* enter the following command:

```
select tabname from syscat.tables where tabschema='TSMDB1' and type='V'
```

The results are:

```

TABNAME: ACTLOG
TABNAME: AF_VOL_SEGMENTS
TABNAME: ARCHDESC_NAMEVIEW
TABNAME: ARCHIVES
TABNAME: ARCHIVE_NAMEVIEW
TABNAME: AR_COPYGROUPS
TABNAME: ASSOCIATIONS
TABNAME: AS_VOLUME_ASSIGNMENT
TABNAME: BACKUPS
TABNAME: BACKUPSETS
TABNAME: BACKUP_NAMEVIEW
TABNAME: BU_COPYGROUPS
TABNAME: CLIENT_ADMINISTRATORS
TABNAME: CONTENTS
TABNAME: DB
TABNAME: DEVCLASSES
TABNAME: DF_VOL_CONTENTS
TABNAME: DRIVES
TABNAME: DRMSTATUS
TABNAME: EVENTS
TABNAME: FILESPACEVIEW
TABNAME: GROUPEMEMBER
TABNAME: LIBRARIES

```

You can also issue the `SELECT` command to query columns. For example, to get a list of columns for querying in the database `TSMDB1` and the table name `ACTLOG`, enter the following command:

```
select colname from syscat.columns where tabschema='TSMDB1' and tabname='ACTLOG'
```

The results are:

```

COLNAME: DATE_TIME
COLNAME: DOMAINNAME
COLNAME: MESSAGE
COLNAME: MSGNO
COLNAME: NODENAME
COLNAME: ORIGINATOR
COLNAME: OWNERNAME
COLNAME: PROCESS
COLNAME: SCHEDNAME
COLNAME: SERVERNAME
COLNAME: SESSID
COLNAME: SESSION
COLNAME: SEVERITY

```

## Customizing queries using the `SELECT` command

With the `SELECT` command, you can customize a wide variety of queries.

### About this task

This section shows two examples.

For many more examples of the command, see the *Administrator's Reference*.

**Example 1:** Find the number of nodes by type of operating system by issuing the following command:

```
select platform_name,count(*) as "Number of Nodes" from nodes
group by platform_name
```

This command gives results like the following:

| PLATFORM_NAME | Number of Nodes |
|---------------|-----------------|
| OS/2          | 45              |
| AIX           | 90              |
| Windows       | 35              |

**Example 2:** For all active client sessions, determine how long they have been connected and their effective throughput in bytes per second:

```
select session_id as "Session", client_name as "Client", state as "State",
 current_timestamp-start_time as "Elapsed Time",
 (cast(bytes_sent as decimal(18,0)) /
 cast(second(current_timestamp-start_time) as decimal(18,0)))
 as "Bytes sent/second",
 (cast(bytes_received as decimal(18,0)) /
 cast(second(current_timestamp-start_time) as decimal(18,0)))
 as "Bytes received/second"
from sessions
```

This command gives results like the following:

```
Session: 24
Client: ALBERT
State: Run
Elapsed Time: 4445.000000
Bytes sent/second: 564321.9302768451
Bytes received/second: 0.0026748857944

Session: 26
Client: MILTON
State: Run
Elapsed Time: 373.000000
Bytes sent/second: 1638.5284210992221
Bytes received/second: 675821.6888561849
```

**Tip:** When issuing **SELECT \* FROM DB** statements, the output column **PHYSICAL\_VOLUMES** is included for legacy compatibility purposes only. The number of physical volumes listed represents the DBSPACE locations defined to the server.

For example:

```

DATABASE_NAME: mgsA62
TOT_FILE_SYSTEM_MB: 511872
USED_DB_SPACE_MB: 448
FREE_SPACE_MB: 452802
PAGE_SIZE: 16384
TOTAL_PAGES: 32772
USABLE_PAGES: 32636
USED_PAGES: 24952
FREE_PAGES: 768
BUFF_HIT_RATIO: 99.7
TOTAL_BUFF_REQ: 385557
SORT_OVERFLOW: 0
LOCK_ESCALATION: 0
PKG_HIT_RATIO: 99.8
LAST_REORG:
FULL_DEV_CLASS:
NUM_BACKUP_INCR: 0
LAST_BACKUP_DATE:
PHYSICAL_VOLUMES: 1

```

## Using SELECT commands in Tivoli Storage Manager scripts

A Tivoli Storage Manager script is one or more commands that are stored as an object in the database. You can define a script that contains one or more SELECT commands.

### About this task

A script can be run from an administrative client or the server console. You can also include it in an administrative command schedule to run automatically. See “Tivoli Storage Manager server scripts” on page 618 for details.

Tivoli Storage Manager is shipped with a file that contains a number of sample scripts. The file, `scripts.smp`, is in the server directory. To create and store the scripts as objects in your server's database, issue the `DSMSERV RUNFILE` command during installation:

```
> dsmserv runfile scripts.smp
```

You can also run the file as a macro from an administrative command line client:

```
macro scripts.smp
```

The sample scripts file contains Tivoli Storage Manager commands. These commands first delete any scripts with the same names as those to be defined, then define the scripts. The majority of the samples create SELECT commands, but others do such things as back up storage pools. You can also copy and change the sample scripts file to create your own scripts.

Here are a few examples from the sample scripts file:

```

def script q_inactive_days '/* -----*/'
upd script q_inactive_days '/* Script Name: Q_INACTIVE */'
upd script q_inactive_days '/* Description: Display nodes that have not */'
upd script q_inactive_days '/* accessed Tivoli Storage Manager for a */'
upd script q_inactive_days '/* specified number of days */'
upd script q_inactive_days '/* Parameter 1: days */'
upd script q_inactive_days '/* Example: run q_inactive_days 5 */'
upd script q_inactive_days '/* -----*/'
upd script q_inactive_days "select node_name,lastacc_time from nodes where -"
upd script q_inactive_days " cast((current_timestamp-lastacc_time)days as -"
upd script q_inactive_days " decimal) >= $1 "

```

```

/* Display messages in the activity log of severity X or Y */

def script q_msg_sev desc='Show msgs in the activity log of severity X or Y'
upd script q_msg_sev '/* -----*/'
upd script q_msg_sev '/* Script Name: Q_MSG_SEV */'
upd script q_msg_sev '/* Description: Display messages in the */'
upd script q_msg_sev '/* activity log that have either */'
upd script q_msg_sev '/* of two specified severities. */'
upd script q_msg_sev '/* Parameter 1: severity 1 */'
upd script q_msg_sev '/* Parameter 2: severity 2 */'
upd script q_msg_sev '/* where severity is I, W, E, S, or D */'
upd script q_msg_sev '/* Example: run q_msg_sev S E */'
upd script q_msg_sev '/* -----*/'
upd script q_msg_sev "select date_time,msgno,message from actlog -"
upd script q_msg_sev " where severity=upper('$1') or severity=upper('$2')"
```

## Querying the SQL activity summary table

You can query the SQL activity summary table to view statistics about client operations and server processes.

### About this task

Some of the client operations that are recorded to the table are BACKUP, RESTORE, ARCHIVE, and RETRIEVE. Server processes include MIGRATION, RECLAMATION, and EXPIRATION.

To list column names and their descriptions from the activity summary table, enter the following command:

```
select colname,remarks from columns where tabname='summary'
```

Here are a few example queries of the activity summary table.

- To display all events that start at 00:00 a.m. of the current day until the present time, enter:

```
select * from summary
```

The result might look like the following output:

```

START_TIME: 2008-10-10 10:48:52.000000
END_TIME: 2008-10-10 10:48:56.000000
ACTIVITY: BACKUP
NUMBER: 10
ENTITY: NODE1
COMMMETH: Tcp/Ip
ADDRESS: ibm-164391ac47a.tucson.ibm.com:2515
SCHEDULE_NAME:
EXAMINED: 3
AFFECTED: 3
FAILED: 0
BYTES: 36631067
IDLE: 0
MEDIW: 0
PROCESSES: 2
SUCCESSFUL: YES
VOLUME_NAME:
DRIVE_NAME:
LIBRARY_NAME:
LAST_USE:
COMM_WAIT: 2
NUM_OFFSITE_VOLS:
```

ANS8002I Highest return code was 0.



- To display all events that start at or after 00:00 a.m. on October 10, 2008 until the present time, enter:

```
select * from summary where start_time>='2008-10-10 00:00:00'
```

You can determine how long to keep information in the summary table. For example, to keep the information for five days, enter the following command:

```
set summaryretention 5
```

If you do not want to keep any information in the table, specify a value of 0.

Tivoli Storage Manager does not create records in the SQL activity summary table for successful scheduled backups of 0 bytes unless there is a failure. Records are created in the summary table for successful scheduled backups only if data is backed up.

## Creating output for use by another application

You can redirect the output of SELECT commands for use in another program (for example, a spreadsheet or database program). The use of command output redirection and one of the delimited output format options lets you create queries whose output can be further processed in other applications.

### About this task

For example, based on the output of a SELECT command, a spreadsheet program could produce graphs of average file sizes and file counts summarized by type of client platform. When using another program for data formatting, the output to be used should be written in a format that is easily processed. Two standard formats for tabular data files are *comma-separated values* (CSV) and *tab-separated values* (TSV). Most modern applications that can import tabular data can read one or both of these formats.

Use the administrative client command line options -COMMADELIMITED or -TABDELIMITED to select one of these formats for tabular query output. All tabular output created during the administrative session will be formatted into either comma-separated or tab-separated values.

For details about using command line options and redirecting command output, see the *Administrator's Reference*.

---

## Using the Tivoli Storage Manager activity log

The activity log contains messages that are normally sent to the server console during server operation. The only exceptions are responses to commands entered at the console, such as responses to QUERY commands.

### About this task

| Task                                      | Required Privilege Class |
|-------------------------------------------|--------------------------|
| Request information from the activity log | Any administrator        |
| Set the activity log retention period     | System                   |
| Set the activity log size limit           | System                   |

Examples of messages sent to the activity log include:

- When client sessions start or end
- When migration starts and ends
- When backup versions expire
- What data is exported to tape
- When expiration processing is performed
- What export or import processing is performed

You can also query the activity log for client session information. For example, issue the following command to search the activity log for any messages that were issued in relation to session 4:

```
query actlog search="(SESSION:4)"
```

This command displays the output of the query:

```
EXAMPLE 2 (Client SESSION that performs a backup)
09/23/2003 10:26:38 ANR0406I Session 4 started for node FRED (WinNT) (Tcp/Ip
colind(2463)). (SESSION: 4)
09/23/2003 10:26:40 ANR8493I FILE volume C:\CODE\522\00000000.BFS mounted in
drive OUTFILE4 (FILE) in library OUTFILE. (SESSION: 4)
09/23/2003 10:26:40 ANR8340I FILE volume C:\CODE\522\00000000.BFS mounted.
(SESSION: 4)
09/23/2003 10:26:40 ANR8468I FILE volume C:\CODE\522\00000000.BFS dismounted
from drive OUTFILE4 (FILE) in library OUTFILE. (SESSION:4)
09/23/2003 10:26:40 ANR0403I Session 4 ended for node FRED (WinNT).
(SESSION: 4)
```

Any error messages sent to the server console are also stored in the activity log.

Use the following sections to adjust the size of the activity log, set an activity log retention period, and request information about the activity log.

## Requesting information from the activity log

You can request information stored in the activity log.

### About this task

To minimize processing time when querying the activity log, you can:

- Specify a time period in which messages have been generated. The default for the QUERY ACTLOG command shows all activities that have occurred in the previous hour.
- Specify the message number of a specific message or set of messages.
- Specify a string expression to search for specific text in messages.
- Specify the QUERY ACTLOG command from the command line for large queries instead of using the graphical user interface.
- Specify whether the originator is the server or client. If it is the client, you can specify the node, owner, schedule, domain, or session number. If you are doing client event logging to the activity log and are only interested in server events, then specifying the server as the originator will greatly reduce the size of the results.

For example, to review messages generated on May 30 between 8 a.m. and 5 p.m., enter:

```
query actlog begindate=05/30/2002 enddate=05/30/2002
beginntime=08:00 endtime=17:00
```

To request information about messages related to the expiration of files from the server storage inventory, enter:

```
query actlog msgno=0813
```

Refer to *Messages* for message numbers.

You can also request information only about messages logged by one or all clients. For example, to search the activity log for messages from the client for node JEE:

```
query actlog originator=client node=jee
```

## Setting a retention period for the activity log

You can use the SET ACTLOGRETENTION command to specify how long activity log information is kept in the database.

### About this task

Activity log management is retention-based when the optional parameter MGMTSTYLE is set to its default value, DATE. The server automatically deletes messages from the activity log once the number of days that are specified pass. At installation, activity log management is retention-based, and the retention period is set to 30 days. To change the retention period to 10 days, for example, enter:

```
set actlogretention 10
```

To disable activity log retention, set the SET ACTLOGRETENTION command to zero. To display the current retention period and size of the activity log, query the server status.

**Note:** With retention-based management, you lose some control over the amount of space that the activity log occupies. For more information on size-based activity log management, see “Setting a size limit for the activity log.”

## Setting a size limit for the activity log

You can use size-based activity log management as an alternative to retention-based management. This allows greater control over the amount of space that the activity log occupies.

### About this task

The server will periodically remove the oldest activity log records until the activity log size no longer exceeds the configured maximum size allowed. To manage the activity log by size, the parameter MGMTSTYLE must be set to the value SIZE. To change the maximum size of the activity log to 12 MB, for example, enter:

```
set actlogretention 12 mgmtstyle=size
```

To disable activity log retention, set the SET ACTLOGRETENTION command to zero. To display the current and maximum size of the activity log, query the server status.

**Note:** With size-based management, you lose some control over the length of time that activity log messages are kept. For more information on retention-based activity log management, see “Setting a retention period for the activity log.”

---

## Monitoring Tivoli Storage Manager accounting records

Tivoli Storage Manager accounting records show the server resources that are used during a session. This information lets you track resources that are used by a client node session.

### About this task

| Task                             | Required Privilege Class |
|----------------------------------|--------------------------|
| Set accounting records on or off | System                   |

At installation, accounting defaults to OFF. You can turn accounting on by using the SET ACCOUNTING command. When accounting is set to ON, the server creates a session resource usage accounting record whenever a client node session ends.

Accounting records are stored in a file named `dsmacnt.log`, which is located in the server directory.

The accounting file contains text records that can be viewed directly or can be read into a spreadsheet program. The file remains opened while the server is running and accounting is set to ON. The file continues to grow until you delete it or prune old records from it. To close the file for pruning, either temporarily set accounting off or stop the server.

There are 31 fields, which are delimited by commas (.). Each record ends with a new-line character. Each record contains the following information:

| Field | Contents                                                                                             |
|-------|------------------------------------------------------------------------------------------------------|
| 1     | Product version                                                                                      |
| 2     | Product sublevel                                                                                     |
| 3     | Product name, 'ADSM',                                                                                |
| 4     | Date of accounting (mm/dd/yyyy)                                                                      |
| 5     | Time of accounting (hh:mm:ss)                                                                        |
| 6     | Node name of Tivoli Storage Manager client                                                           |
| 7     | Client owner name (UNIX)                                                                             |
| 8     | Client Platform                                                                                      |
| 9     | Authentication method used                                                                           |
| 10    | Communication method used for the session                                                            |
| 11    | Normal server termination indicator (Normal=X'01', Abnormal=X'00')                                   |
| 12    | Number of archive store transactions requested during the session                                    |
| 13    | Amount of archived files, in kilobytes, sent by the client to the server                             |
| 14    | Number of archive retrieve transactions requested during the session                                 |
| 15    | Amount of space, in kilobytes, retrieved by archived objects                                         |
| 16    | Number of backup store transactions requested during the session                                     |
| 17    | Amount of backup files, in kilobytes, sent by the client to the server                               |
| 18    | Number of backup retrieve transactions requested during the session                                  |
| 19    | Amount of space, in kilobytes, retrieved by backed up objects                                        |
| 20    | Amount of data, in kilobytes, communicated between the client node and the server during the session |
| 21    | Duration of the session, in seconds                                                                  |
| 22    | Amount of idle wait time during the session, in seconds                                              |
| 23    | Amount of communications wait time during the session, in seconds                                    |
| 24    | Amount of media wait time during the session, in seconds                                             |

| Field | Contents                                                                                                                                                                                                                                                                |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 25    | Client session type. A value of 1 or 4 indicates a general client session. A value of 5 indicates a client session that is running a schedule. Values other than 1, 4, or 5 are reserved for the Tivoli Storage Manager server's internal use, and you can ignore them. |
| 26    | Number of space-managed store transactions requested during the session                                                                                                                                                                                                 |
| 27    | Amount of space-managed data, in kilobytes, sent by the client to the server                                                                                                                                                                                            |
| 28    | Number of space-managed retrieve transactions requested during the session                                                                                                                                                                                              |
| 29    | Amount of space, in kilobytes, retrieved by space-managed objects                                                                                                                                                                                                       |
| 30    | Product release                                                                                                                                                                                                                                                         |
| 31    | Product level                                                                                                                                                                                                                                                           |

The following shows a sample record:

```
3,8,ADSM,08/03/2000,16:26:37,node1,,AIX,1,Tcp/Ip,0,254,1713,0,0,47,1476,0,0,3316,
960,27,5,1,4,0,0,0,0,7,2
```

## Logging IBM Tivoli Storage Manager events to receivers

The server and client messages provide a record of Tivoli Storage Manager activity that you can use to monitor the server. You can log server messages and most client messages as *events* to one or more repositories called *receivers*.

### About this task

You can log the events to any combination of the following receivers:

#### Tivoli Storage Manager server console and activity log

See “Logging events to the IBM Tivoli Storage Manager server console and activity log” on page 834.

#### File and user exits

See “Logging events to a file exit and a user exit” on page 835.

#### Tivoli event console

See “Logging events to the Tivoli Enterprise Console” on page 836.

#### Event server receiver (Enterprise Event Logging)

Routes the events to an event server. See “Enterprise event logging: logging events to another server” on page 845.

#### Simple Network Management Protocol (SNMP)

See “Logging events to an SNMP manager” on page 840.

#### The Windows Event Log

See “Logging events to the Windows event log” on page 845.

In addition, you can filter the types of events to be enabled for logging. For example, you might enable only severe messages to the event server receiver and one or more specific messages, by number, to another receiver. Figure 96 on page 833 shows a possible configuration in which both server and client messages are filtered by the event rules and logged to a set of specified receivers.

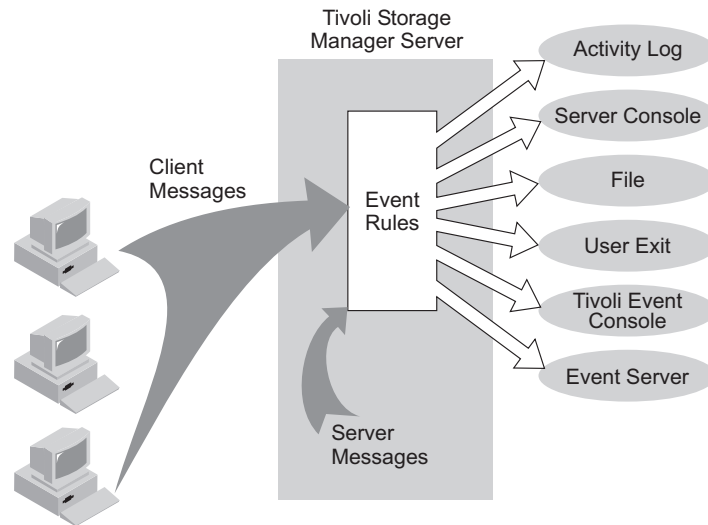


Figure 96. Event logging overview

| Task                       | Required Privilege Class |
|----------------------------|--------------------------|
| Enable or disable events   | System                   |
| Begin or end event logging |                          |

You can control event logging through the following actions:

1. Enable or disable logging for one or more event types and for one or more receivers. See “Enabling and disabling events.”
2. Begin or end logging to one or more receivers. See “Beginning and ending event logging” on page 834.

## Enabling and disabling events

You can enable and disable events using the **ENABLE EVENTS** and **DISABLE EVENTS** commands.

### About this task

When you enable or disable events, you can specify the following:

- A message number or an event severity (ALL, INFO, WARNING, ERROR, or SEVERE).
- Events for one or more client nodes (NODENAME) or for one or more servers (SERVERNAME).

To enable or disable events, issue the **ENABLE EVENTS** and **DISABLE EVENTS** commands. For example,

- To enable event logging to a user exit for all error and severe server messages, enter:  
enable events userexit error,severe
- To enable event logging to a user exit for severe client messages for all client nodes, enter:  
enable events userexit severe nodename=\*
- To disable event logging to a user exit for error server messages, enter:

```
disable events userexit error
```

If you specify a receiver that is not supported on any platform, or if you specify an invalid event or name, Tivoli Storage Manager issues an error message. However, any valid receivers, events, or names that you specified are still enabled. Certain events, such as messages that are issued during server startup and shutdown, automatically go to the console. They do not go to other receivers, even if they are enabled.

**Note:** Server messages in the SEVERE category and message ANR9999 can provide valuable diagnostic information if there is a serious problem. For this reason, you should not disable these messages. Use the **SET CONTEXTMESSAGING ON** command to get additional information that could help determine the cause of ANR9999D messages. The IBM Tivoli Storage Manager polls the server components for information that includes process name, thread name, session ID, transaction data, locks that are held, and database tables that are in use.

## Beginning and ending event logging

The BEGIN EVENTLOGGING and END EVENTLOGGING commands can be used to log events when event logging is not automatically started during server startup.

### About this task

At server startup, event logging begins automatically to the server console and activity log and for any receivers that are started based on entries in the server options file. A receiver for which event logging has begun is an *active receiver*.

To begin logging events to receivers for which event logging is not started automatically, issue the BEGIN EVENTLOGGING command. You can also use this command after you have disabled event logging to one or more receivers. To end event logging for an active receiver issue the END EVENTLOGGING command.

For example,

- To begin logging events to the event server, enter:  

```
begin eventlogging eventserver
```
- To end logging events to the event server, enter:  

```
end eventlogging eventserver
```

## Logging events to the IBM Tivoli Storage Manager server console and activity log

Logging events to the server console and activity log begins automatically at server startup.

### About this task

Enabling client events to the activity log will increase the database utilization. You can set a retention period or size limit for the log records by using the SET ACTLOGRETENTION command (see “Setting a retention period for the activity log” on page 830 and “Setting a size limit for the activity log” on page 830). At server installation, activity log management is retention-based, and this value is set to one day. If you increase the retention period or the size limit, utilization is further increased. For more information about the activity log, see “Using the Tivoli Storage Manager activity log” on page 828.

You can disable server and client events to the server console and client events to the activity log. However, you cannot disable server events to the activity log. Also, certain messages, such as those issued during server startup and shutdown and responses to administrative commands, will still be displayed at the console even if disabled.

To enable all error and severe client events to the console and activity log, you can issue the `ENABLE EVENTS` command. See the Administrator's Reference for more information.

## Logging events to a file exit and a user exit

A file exit is a file that receives all the information related to its enabled events. You can log events to a file exit and a user exit.

### About this task

Be aware that this file can rapidly grow in size depending on the events enabled for it. There are two versions of the file exit: binary and text. The binary file exit stores each logged event as a record, while the text file exit stores each logged event as a fixed-sized, readable line. For more information about the text file exit, see “Readable text file exit (FILETEXTEXIT) format” on page 851.

A user exit is an external interface in the form of an executable, user-written program. Tivoli Storage Manager supports DLL user exits.

See “Adding a file exit or user exit option.”

### Adding a file exit or user exit option

File and user exits receive event data in the same data block structure. Setting up logging for these receivers is similar.

### Procedure

1. Add an option for the exit to the server options file:
  - **For a file exit:** Add either the `FILEEXIT` option (for a binary file exit) or `FILETEXTEXIT` (for a text file exit) option.
    - a. Specify whether event logging to the file exit receiver begins automatically at server startup. The parameters are `YES` and `NO`. If you do not specify `YES`, you must begin event logging manually by issuing the `BEGIN EVENTLOGGING` command.
    - b. Specify the file where each logged event is to be stored.
    - c. Specify how files will be stored if the file being stored already exists. `REPLACE` will overwrite the existing file, `APPEND` will append data to the existing file, and `PRESERVE` will not overwrite the existing file.

For example,

```
fileexit yes \tsm\server\data replace

filetextexit yes \tsm\server\data replace
```
  - **For a user exit:** Add the `USEREXIT` option.
    - Specify whether event logging to the user exit receiver begins automatically at server startup. The parameters for this option are `YES` and `NO`. If you do not specify `YES`, you must begin event logging manually by issuing the `BEGIN EVENTLOGGING` command.
    - Specify a DLL name that contains the user-exit function.



- Specify the name of the user-exit function in the DLL.
- Specify the name of the user-exit function in the service program.

For example,

```
userexit yes dllname.dll dllmodulename
```

2. Enable events for the receiver. You must specify the name of the user exit in the USEREXIT server option and the name of the file in the FILEEXIT server option. Here are two examples:

```
enable events file error
```

```
enable events userexit error,severe
```

You can also enable events to one or more client nodes or servers by specifying the NODENAME OR SERVERNAME parameter. See “Enabling and disabling events” on page 833 for more information.

3. If you did not specify YES in the server option, begin event logging. For example, to begin event logging for a user-defined exit, enter:

```
begin eventlogging userexit
```

See “Beginning and ending event logging” on page 834 for more information.

## Logging events to the Tivoli Enterprise Console

Tivoli Storage Manager includes the Tivoli receiver, a Tivoli Enterprise Console adapter for sending events to the Tivoli Enterprise Console. You can specify the events to be logged based on their source.

### About this task

Application clients, Data Protection for IBM ESS for DB2, and Data Protection for IBM ESS for Oracle must have enhanced Tivoli Enterprise Console support enabled in order to route the events to the Tivoli Enterprise Console. Because of the number of messages, you should *not* enable all messages from a node to be logged to the Tivoli Enterprise Console.

The valid event names are:

| Event Name               | Source                                                                                            |
|--------------------------|---------------------------------------------------------------------------------------------------|
| TSM_SERVER_EVENT         | Tivoli Storage Manager server                                                                     |
| TSM_CLIENT_EVENT         | Tivoli Storage Manager clients                                                                    |
| TSM_APPL_EVENT           | Tivoli Storage Manager application program interface                                              |
| TSM_TDP_DOMINO_EVENT     | Data Protection for Lotus Domino                                                                  |
| TSM_TDP_EXCHANGE_EVENT   | Data Protection for Microsoft Exchange Server                                                     |
| TSM_TDP_INFORMIX_EVENT   | Data Protection for Informix®                                                                     |
| TSM_TDP_ORACLE_EVENT     | Data Protection for Oracle                                                                        |
| TSM_TDP_SQL_EVENT        | Data Protection for Microsoft SQL Server                                                          |
| TSM_TDP_SAP_R3_EVENT     | Data Protection for mySAP.com Technology and Data Protection for IBM ESS for mySAP.com Technology |
| TSM_TDP_ESS_DB2_EVENT    | Data Protection for IBM ESS for DB2                                                               |
| TSM_TDP_ESS_ORACLE_EVENT | Data Protection for IBM ESS for Oracle                                                            |

## Controlling the format of events

The server options UNIQUETECEVENTS and UNIQUETDPTECEVENTS are available to control the format of events sent from the Tivoli Storage Manager server to the Tivoli Enterprise Console.

### About this task

Enabling either of these options not only changes the event class format, but also generates a unique event class for individual Tivoli Storage Manager messages for the client, the server, application clients, Data Protection for IBM ESS for DB2, Data Protection for IBM ESS for Oracle, and Data Protection for IBM ESS for R/3.

| Option Name        | Function                                                                                                                   |
|--------------------|----------------------------------------------------------------------------------------------------------------------------|
| UNIQUETECEVENTS    | Changes the event class format and generates a unique event class for client, server, and some Data Protection messages    |
| UNIQUETDPTECEVENTS | Changes the event class format and generates a unique event class for all client, server, and all Data Protection messages |

Setting UNIQUETDPTECEVENTS to YES will dynamically set UNIQUETECEVENTS to YES. However, the Tivoli Storage Manager will not update the server options file to reflect this change.

Depending on your particular environment, enabling one or both of these options can facilitate rule-evaluation performance on the Tivoli Enterprise Console server. Enabling one or both of these options can also incur a performance penalty during event reception on the Tivoli Enterprise Console server. Test the options in your own environment. It is possible that you might not benefit from enabling either of these two options.

If the UNIQUETECEVENTS option is enabled, unique events have the following event class format:

```
TSM_SERVER_ANR####
TSM_CLIENT_ANE####
TSM_APPL_ANE####
TSM_TDP_DOMINO_ACD####
TSM_TDP_EXCHANGE_ACN####
TSM_TDP_ORACLE_ANS####
TSM_TDP_INFORMIX_ANS####
TSM_TDP_SQL_ACO####
```

where ##### represents the message number.

If the UNIQUETDPTECEVENTS option is enabled, the messages logged to the Tivoli Storage Manager server for Data Protection for IBM ESS for DB2, Data Protection for IBM ESS for Oracle, and Data Protection for R/3 will have unique events with the following formats:

```
TSM_TDP_ESS_DB2_EEP####TSM_TDP_ESS_ORACLE_EEO####
TSM_TDP_SAP_R3_BKI#### (includes messages for Data Protection for IBM ESS for R/3)
```

where ##### represents the message number. For exact details of the event class format, look at the appropriate baroc file.

Application clients can issue unique events in the following ranges. All events follow the IBM 3.4 naming convention, which uses a three-character prefix followed by four digits.

| Application client                            | Event range        |
|-----------------------------------------------|--------------------|
| Data Protection for Microsoft Exchange Server | ACN3500 to ACN3649 |
| Data Protection for Lotus Domino              | ACD5200 to ACD5299 |
| Data Protection for Microsoft SQL Server      | ACO3000 to ACO3999 |
| Data Protection for Oracle                    | ANS0500 to ANS0599 |
| Data Protection for Informix                  | ANS0600 to ANS0699 |

If UNIQUEDPTECEVENTS is enabled, Data Protection for IBM ESS for DB2, Data Protection for IBM ESS for Oracle, and Data Protection for R/3 can issue unique events in the following ranges:

| Application client                                              | Event range        |
|-----------------------------------------------------------------|--------------------|
| Data Protection for IBM ESS for DB2                             | EEP0000 to EEP9999 |
| Data Protection for IBM ESS for Oracle                          | EEO0000 to EEO9999 |
| Data Protection for R/3 and Data Protection for IBM ESS for R/3 | BKI0000 to BKI9999 |

As noted, enabling UNIQUEDPTECEVENTS also enables UNIQUETECEVENTS. This means that all recognized Data Protection messages will be sent as unique events from the Tivoli Storage Manager server.

Based upon the setting of the option or options on the Tivoli Storage Manager server, the Tivoli Enterprise Console administrator must create a rule base using one of the following baroc files:

| UNIQUEDPTECEVENTS Setting | UNIQUETECEVENTS Setting                                  | Baroc File     |
|---------------------------|----------------------------------------------------------|----------------|
| NO                        | NO                                                       | ibmtsm.baroc   |
| NO                        | YES                                                      | itsmuniq.baroc |
| YES                       | Defaults to YES because UNIQUEDPTECEVENTS is set to YES. | itsmdpex.baroc |

Each successive baroc file accepts the events of the previous baroc file. For example, itsmuniq.baroc accepts all events in ibmtsm.baroc, and itsmdpex.baroc accepts all events contained in itsmuniq.baroc.

## Encoding events to UTF-8

Tivoli Storage Manager supports the following option to encode a Tivoli Enterprise Console event into UTF-8 before sending it to the Tivoli Enterprise Console server. Some Tivoli Enterprise Console patches (for example, Patch 0004 for Tivoli Enterprise Console Version 3.6 Modification 2) require UTF-8 encoded events for some locales.

### About this task

| Option Name  | Function                                             |
|--------------|------------------------------------------------------|
| TECUTF8EVENT | Encodes a Tivoli Enterprise Console event into UTF-8 |

To determine whether this option is enabled, issue the QUERY OPTION command.

## Setting up a Tivoli Enterprise Console as a receiver

You can set up a Tivoli Enterprise Console as a receiver for event logging.

### About this task

To set up Tivoli as a receiver for event logging, complete the following procedure:

#### Procedure

1. Define the Tivoli Storage Manager event classes to the Tivoli Enterprise Console with the baroc file for your operating system:

ibmtsm.baroc

This file is distributed with the server.

**Note:** Please refer to Tivoli Enterprise Console documentation for instructions on removing an existing baroc file, if needed, and installing a new baroc file.

Before the events are displayed on a Tivoli Enterprise Console, you must import the baroc file into an existing rule base or create a new rule base and activate it. To do this, complete the following steps:

- a. From the Tivoli desktop, click on the **Rule Base** icon to display the pop-up menu.
- b. Select **Import**, then specify the location of the baroc file.
- c. Select the **Compile** pop-up menu.
- d. Select the **Load** pop-up menu and **Load, but activate only when server restarts** from the resulting dialog.
- e. Shut down the event server and restart it.

To create a new rule base, complete the following steps:

- a. Click on the **Event Server** icon from the Tivoli desktop. The **Event Server Rules Bases** window will open.
- b. Select **Rule Base** from the **Create** menu.
- c. Optionally, copy the contents of an existing rule base into the new rule base by selecting the **Copy** pop-up menu from the rule base to be copied.
- d. Click on the **RuleBase** icon to display the pop-up menu.
- e. Select **Import** and specify the location of the baroc file.
- f. Select the **Compile** pop-up menu.

- g. Select the **Load** pop-up menu and **Load, but activate only when server restarts** from the resulting dialog.
- h. Shut down the event server and restart it.
2. To define an event source and an event group:
  - a. From the Tivoli desktop, select **Source** from the **EventServer** pop-up menu. Define a new source whose name is Tivoli Storage Manager from the resulting dialog.
  - b. From the Tivoli desktop, select **Event Groups** from the **EventServer** pop-up menu. From the resulting dialog, define a new event group for Tivoli Storage Manager and a filter that includes event classes IBMTSMSEVER\_EVENT and IBMTSMCLIENT\_EVENT.
  - c. Select the **Assign Event Group** pop-up menu item from the **Event Console** icon and assign the new event group to the event console.
  - d. Double-click on the **Event Console** icon to start the configured event console.
3. Enable events for logging to the Tivoli receiver. See “Enabling and disabling events” on page 833 for more information.
4. In the server options file, specify the location of the host on which the Tivoli server is running. For example, to specify a Tivoli server at the IP address 9.114.22.345:1555, enter the following:
 

```
techost 9.114.22.345
tecport 1555
```
5. Begin event logging for the Tivoli receiver. You do this in one of two ways:
  - To begin event logging automatically at server start up, specify the following server option:
 

```
tecbeginneventlogging yes
```

Or
  - Enter the following command:
 

```
begin eventlogging tivoli
```

See “Beginning and ending event logging” on page 834 for more information.

## Logging events to an SNMP manager

IBM Tivoli Storage Manager supports the simple network management protocol (SNMP) together with event logging.

### About this task

You can do the following:

- Set up an SNMP heartbeat monitor to regularly check that the Tivoli Storage Manager server is running.
- Send messages known as *traps* to an SNMP manager, such as NetView® or Tivoli Enterprise Console.
- Run Tivoli Storage Manager scripts and retrieve output and return codes. See “Tivoli Storage Manager server scripts” on page 618 for details.

Tivoli Storage Manager also implements an SNMP subagent that can be configured to report exception conditions and provide support for a management information base (MIB). The management information base (MIB), which is shipped with Tivoli Storage Manager, defines the variables that will run server scripts and return the server scripts' results. You must register SNMPADMIN, the administrative client

the server runs these scripts under. Although a password is not required for the subagent to communicate with the server and run scripts, a password should be defined for SNMPADMIN to prevent access to the server from unauthorized users. An SNMP password (community name) is required, however, to access the SNMP agent, which forwards the request to the subagent.

**Note:** Because the SNMP environment has weak security, you should consider not granting SNMPADMIN any administrative authority. This restricts SNMPADMIN to issuing only Tivoli Storage Manager queries.

SNMP SET requests are accepted for the name and input variables associated with the script names stored in the MIB by the SNMP subagent. This allows a script to be processed by running a GET request for the *ibmAdsm1ReturnValue* and *ibmAdsm2ReturnValue* variables. A GETNEXT request will not cause the script to run. Instead, the results of the previous script processed will be retrieved. When an entire table row is retrieved, the GETNEXT request is used. When an individual variable is retrieved, the GET request is used.

Here is a typical Tivoli Storage Manager configuration with SNMP:

### Procedure

1. Systems A, B, C: A Tivoli Storage Manager server communicates with a local subagent.
2. System D: A DPI-enabled SNMP agent is installed. This is required for communication between the Tivoli Storage Manager SNMP subagent, *dsmsnmp*, and the SNMP Manager you are using. A DPI-enabled SNMP agent is available as part of the AIX operating system.
3. System E: An SNMP manager, such as NetView, is installed.
4. The subagents on systems A, B, and C communicate with the agent on system D.
5. The agent on system D forwards SNMP traps to NetView on system E.

### Results

To run an arbitrary command from an SNMP management application, for example, NetView, follow these steps:

1. Choose the name and parameters for a Tivoli Storage Manager script.
2. Use the application to communicate with the SNMP agent. This agent changes the Tivoli Storage Manager MIB variable for one of the two script names that the Tivoli Storage Manager subagent maintains. The SNMP agent also sets the parameter variables for one of the two scripts.
3. Use the application to retrieve the variable *ibmAdsmReturnValue1.x* or *ibmAdsmReturnValue2.x*, where *x* is the index of the server that is registered with the subagent.

To set the variables associated with the script, the nodes on which the subagent and the agent are run must have read-write authority to the MIB variables. This is done through the SNMP configuration process on the system that the SNMP agent runs on.

An SNMP agent is needed for communication between an SNMP manager and its managed systems. The SNMP agent is realized through the **snmpd daemon**. The Distributed Protocol Interface (DPI) Version 2 is an extension of this SNMP agent.

SNMP managers can use the MIB that is shipped with Tivoli Storage Manager to manage the server. Therefore, an SNMP agent supporting DPI Version 2 must be used to communicate with the Tivoli Storage Manager subagent. This SNMP agent is not included with Tivoli Storage Manager. A supported DPI agent ships with AIX. The Tivoli Storage Manager subagent is included with Tivoli Storage Manager and, before server startup, must be started as a separate process communicating with the DPI-enabled SNMP agent.

The SNMP manager system can reside on the same system as the Tivoli Storage Manager server, but typically would be on another system connected through SNMP. The SNMP management tool can be any application, such as NetView or Tivoli Enterprise Console, which can manage information through SNMP MIB monitoring and traps. The Tivoli Storage Manager server system runs the processes needed to send Tivoli Storage Manager event information to an SNMP management system. The processes are:

- SNMP agent (snmpd)
- Tivoli Storage Manager SNMP subagent (dsmsnmp)
- Tivoli Storage Manager server (dsmserv)

Cross-system support for communication between the subagent and agent is supported, and in some cases required. Figure 97 illustrates a typical Tivoli Storage Manager implementation:

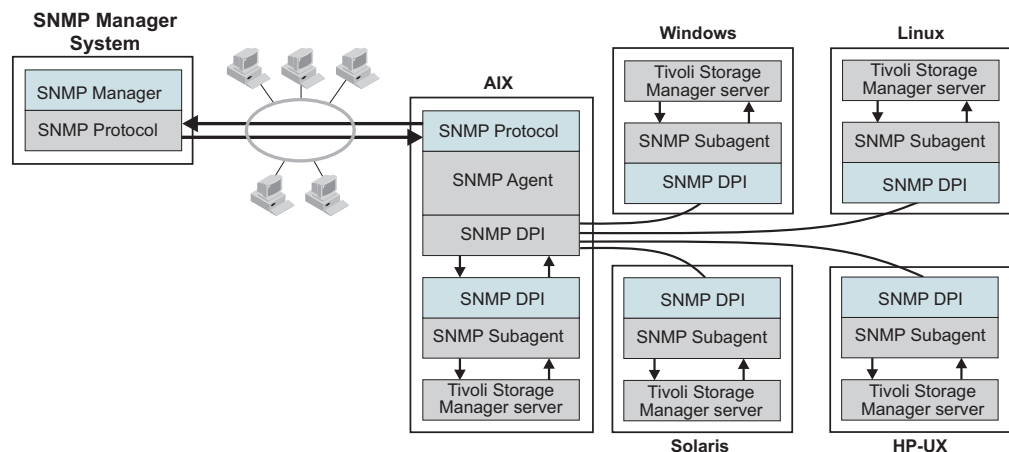


Figure 97. Tivoli Storage Manager SNMP Implementation

Figure 98 on page 843 shows how the communication for SNMP works in a Tivoli Storage Manager system:

- The SNMP manager and agent communicate with each other through the SNMP protocol. The SNMP manager passes all requests for variables to the agent.
- The agent then passes the request to the subagent and sends the answer back to the manager. The agent responds to the manager's requests and informs the manager about events by sending traps.
- The agent communicates with both the manager and subagent. It sends queries to the subagent and receives traps that inform the SNMP manager about events taking place on the application monitored through the subagent. The SNMP agent and subagent communicate through the Distributed Protocol Interface (DPI). Communication takes place over a stream connection, which typically is a TCP connection but could be another stream-connected transport mechanism.

- The subagent answers MIB queries of the agent and informs the agent about events by sending traps. The subagent can also create and delete objects or subtrees in the agent's MIB. This allows the subagent to define to the agent all the information needed to monitor the managed application.

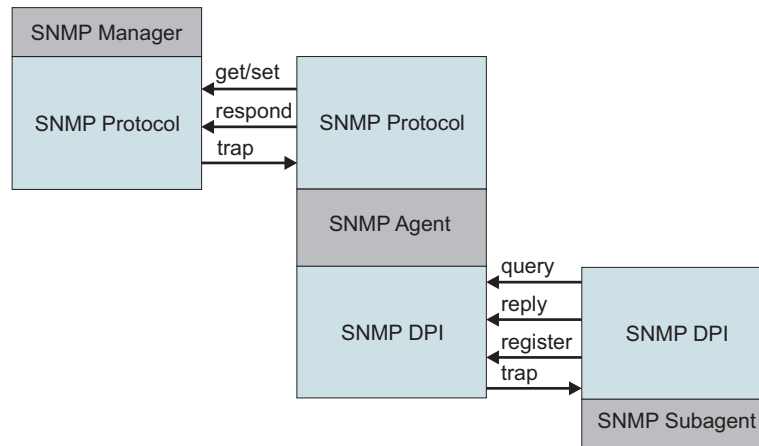


Figure 98. Manager-Agent-Subagent communication

**Note:**

1. You can start *dsmsnmp* and the server in any order. However, starting *dsmsnmp* first is more efficient in that it avoids retries.
2. The MIB file name is *adsmserve.mib*. The file name is located in the directory in which the server is installed.
3. Merge the contents of the *adsmserve.mib* file into the */etc/mib.defs* file.

## Configuring IBM Tivoli Storage Manager SNMP

You can configure SNMP by completing the following procedure.

### About this task

The IBM Tivoli Storage Manager SNMP set up procedure is illustrated by Figure 99 on page 844:





```
begin eventlogging snmp
enable event snmp all
```

6. Define the Tivoli Storage Manager SNMP MIB values for the SNMP manager to help format and display the Tivoli Storage Manager SNMP MIB variables and messages. The *adsmserve.mib* file ships with the Tivoli Storage Manager server and must be loaded by the SNMP manager. This file is in the installation directory of the server. For example, when you run NetView for Windows as an SNMP manager, the *adsmserve.mib* file is copied to the `\netview_path\SNMP_MIB` directory and then loaded through the following command:

```
[C:\>] loadmib -load adsmserve.mib
```

## Logging events to the Windows event log

The Windows event log lets you display enabled events in the Windows Application Log in the Windows Event Viewer.

### About this task

The information displayed includes:

- The date and time that the Windows Event Log received the event
- The category of the event
- The event number
- The user security identifier
- The name of the computer that logged the event

To enable severe and error events for logging on the Event Log, you can issue the `ENABLE EVENTS` command. For example:

```
enable events nteventlog severe,error
```

## Enterprise event logging: logging events to another server

One or more servers can send server events and events from their own clients to another server for logging.

### About this task

The sending server receives the enabled events and routes them to a designated event server. This is done by a receiver that IBM Tivoli Storage Manager provides. At the event server, an administrator can enable one or more receivers for the events being routed from other servers. Figure 101 on page 846 shows the relationship of a sending Tivoli Storage Manager server and a Tivoli Storage Manager event server.

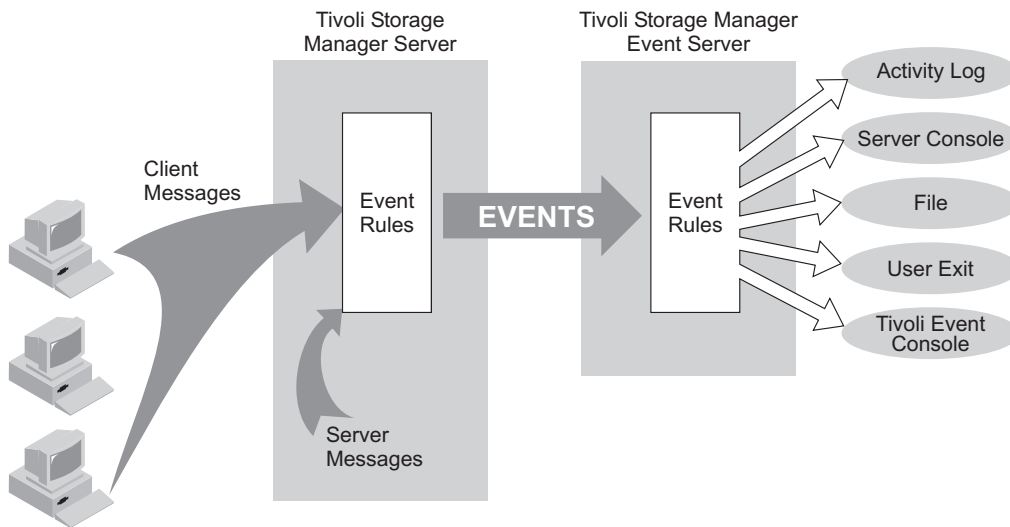


Figure 101. Server-to-server event logging

The following scenario is a simple example of how enterprise event logging can work.

**The administrator at each sending server does the following:**

1. Defines the server that will be the event server. For details about communication set up, see "Setting up communications for enterprise configuration and enterprise event logging" on page 686.  

```
define server server_b password=cholla hladdress=9.115.3.45 lladdress=1505
```
2. Identifies the server just defined as the event server:  

```
define eventserver server_b
```
3. Enables the logging of severe, error, and warning server messages from the sending server and severe and error messages from all clients to the event server receiver by issuing the following commands:  

```
enable events eventserver severe,error,warning
enable events eventserver severe,error nodename=*
```
4. Begins event logging by issuing the following command:  

```
begin eventlogging eventserver
```

**The administrator at the event server does the following:**

5. Enables the logging of severe and error messages to a file named events that are sent to it from the sending servers. The administrator defines the file with the following option in the server options file:  

```
fileexit yes events append
```

Then the administrator enables the events by issuing the ENABLE EVENTS command for each sending server. For example, for SERVER\_A the administrator would enter:

```
enable events file severe,error servername=server_a
```

**Note:** By default, logging of events from another server is enabled to the event server activity log. However, unlike events originating from a local server, events originating from another server can be disabled for the activity log at an event server.

One or more servers can send events to an event server. An administrator at the event server enables the logging of specific events from specific servers. In the previous example, SERVER\_A routes severe, error, and warning messages to SERVER\_B. SERVER\_B, however, logs only the severe and error messages. If a third server sends events to SERVER\_B, logging is enabled only if an ENABLE EVENTS command includes the third server. Furthermore, the SERVER\_B determines the receiver to which the events are logged.

**Attention:** It is important that you do not set up server-to-server event logging in a loop. In such a situation, an event would continue logging indefinitely, tying up network and memory resources. Tivoli Storage Manager will detect such a situation and issue a message. Here are a few configurations to avoid:

- SERVER\_A logs to SERVER\_B, and SERVER\_B logs to SERVER\_A.
- SERVER\_A logs to SERVER\_B; SERVER\_B logs to SERVER\_C; SERVER\_C logs to SERVER\_A.

## Querying event logging

You can use the QUERY ENABLED command to display a list of server or client events that are enabled or disabled by a specified receiver.

### About this task

Because the lists of enabled and disabled events could be very long, Tivoli Storage Manager displays the shorter of the two lists.

For example, assume that 1000 events for client node HSTANFORD were enabled for logging to the user exit and that later two events were disabled. To query the enabled events for HSTANFORD, you can enter:

```
query enabled userexit nodename=hstanford
```

The output would specify the *number* of enabled events and the *message names* of disabled events:

```
998 events are enabled for node HSTANFORD for the USEREXIT receiver.
The following events are DISABLED for the node HSTANFORD for the USEREXIT
receiver:
ANE4000, ANE49999
```

The QUERY EVENTRULES command displays the history of events that are enabled or disabled by a specific receiver for the server or for a client node.

```
query enabled userexit nodename=hstanford
```

## User exit and file exit receivers

The data structure of the user exit receivers applies to the file exit receivers. To use one of these exits with Tivoli Storage Manager, you must specify the corresponding server option (FILEEXIT, FILETEXTEXIT, or USEREXIT) in the server options file.

The samples for the C, H, and make files are shipped with the server code in the \win32app\ibm\adsm directory.

You can also use Tivoli Storage Manager commands to control event logging. For details, see “Logging IBM Tivoli Storage Manager events to receivers” on page 832 and *Administrator’s Reference*.

## Sample user-exit declarations

USEREXITSAMPLE.H contains declarations for a user-exit program.

Figure 102. Sample user exit declarations

```
/******
 * Name: USEREXITSAMPLE.H
 * Description: Declarations for a user exit
 * Environment: WINDOWS NT
******/

#ifndef _H_USEREXITSAMPLE
#define _H_USEREXITSAMPLE

#include <stdio.h>
#include <sys/types.h>

/***** Do not modify below this line *****/

#define BASE_YEAR 1900

typedef short int16;
typedef int int32;

#ifndef uchar
typedef unsigned char uchar;
#endif
/* DateTime Structure Definitions - TSM representation of a timestamp */

typedef struct
{
 uchar year; /* Years since BASE_YEAR (0-255) */
 uchar mon; /* Month (1 - 12) */
 uchar day; /* Day (1 - 31) */
 uchar hour; /* Hour (0 - 23) */
 uchar min; /* Minutes (0 - 59) */
 uchar sec; /* Seconds (0 - 59) */
} DateTime;
/******
 * Some field size definitions (in bytes) *
******/

#define MAX_SERVERNAME_LENGTH 64
#define MAX_NODE_LENGTH 64
#define MAX_COMMNAME_LENGTH 16
#define MAX_OWNER_LENGTH 64
#define MAX_HL_ADDRESS 64
#define MAX_LL_ADDRESS 32
#define MAX_SCHED_LENGTH 30
#define MAX_DOMAIN_LENGTH 30
#define MAX_MSGTEXT_LENGTH 1600

/******
 * Event Types (in eEventRecvData.eventType) *
******/

#define TSM_SERVER_EVENT 0x03 /* Server Events */
#define TSM_CLIENT_EVENT 0x05 /* Client Events */

/******
 * Application Types (in eEventRecvData.applType) *
******/

#define TSM_APPL_BACKARCH 1 /* Backup or Archive client */
```

```

#define TSM_APPL_HSM 2 /* Space manage client */
#define TSM_APPL_API 3 /* API client */
#define TSM_APPL_SERVER 4 /* Server (ie. server to server) */

/*****
 * Event Severity Codes (in elEventRecvData.sevCode) *
 *****/

#define TSM_SEV_INFO 0x02 /* Informational message. */
#define TSM_SEV_WARNING 0x03 /* Warning message. */
#define TSM_SEV_ERROR 0x04 /* Error message. */
#define TSM_SEV_SEVERE 0x05 /* Severe error message. */
#define TSM_SEV_DIAGNOSTIC 0x06 /* Diagnostic message. */
#define TSM_SEV_TEXT 0x07 /* Text message. */

/*****
 * Data Structure of Event that is passed to the User-Exit. *
 * The same structure is used for a file receiver *
 *****/

typedef struct evRdata
{
 int32 eventNum; /* the event number. */
 int16 sevCode; /* event severity. */
 int16 applType; /* application type (hsm, api, etc) */
 int32 sessId; /* session number */
 int32 version; /* Version of this structure (1) */
 int32 eventType; /* event type */
 /* (TSM_CLIENT_EVENT, TSM_SERVER_EVENT) */
 DateTime timeStamp; /* timestamp for event data. */
 uchar serverName[MAX_SERVERNAME_LENGTH+1]; /* server name */
 uchar nodeName[MAX_NODE_LENGTH+1]; /* Node name for session */
 uchar commMethod[MAX_COMMNAME_LENGTH+1]; /* communication method */
 uchar ownerName[MAX_OWNER_LENGTH+1]; /* owner */
 uchar hlAddress[MAX_HL_ADDRESS+1]; /* high-level address */
 uchar llAddress[MAX_LL_ADDRESS+1]; /* low-level address */
 uchar schedName[MAX_SCHED_LENGTH+1]; /* sched name if applicable */
 uchar domainName[MAX_DOMAIN_LENGTH+1]; /* omain name for node */
 uchar event[MAX_MSGTEXT_LENGTH]; /* event text */
} elEventRecvData;

/*****
 * Size of the Event data structure *
 *****/

#define ELEVENTRECVDATA_SIZE sizeof(elEventRecvData)

/*****
 * User Exit EventNumber for Exiting *
 *****/

#define USEREXIT_END_EVENTNUM 1822 /* Only user-exit receiver to exit */
#define END_ALL_RECEIVER_EVENTNUM 1823 /* All receivers told to exit */

/*****
 *** Do not modify above this line. ***
 *****/

/***** Additional Declarations *****/

#endif

```

## Sample user exit program

USEREXITSAMPLE.C is a sample user-exit program invoked by the Tivoli Storage Manager server.

Figure 103. Sample user exit program

```

/*****
 * Name: USEREXITSAMPLE.C
 * Description: Example user-exit program that is invoked by
 * the TSM V3 Server
 * Environment: ****
 * ** This is a platform-specific source file **
 * ** versioned for: "WINDOWS NT" **
 * ****
 *****/

#include <stdio.h>
#include <stdlib.h>
#include <sys/types.h>
#include <io.h>
#include <windows.h>
#include "USEREXITSAMPLE.H"

/*****
 *** Do not modify below this line. ***
 *****/

#define DllExport __declspec(dllexport)

/*****
 *** DLL MAIN ***
 *****/

BOOL WINAPI
 DllMain(HMODULE hMod, DWORD fdwReason, LPVOID lpvReserved)
{
 return(TRUE);
} // End of WINAPI

/*****
 * Procedure: adsmV3UserExit
 * If the user-exit is specified on the server, a valid and
 * appropriate event will cause an elEventRecvData structure
 * (see USEREXITSAMPLE.H) to be passed to a procedure named
 * adsmV3UserExit that returns a void.
 *
 * This procedure can be named differently:
 * -----
 * The procedure name must match the function name specified in
 * the server options file (4th arg). The DLL name generated from
 * this module must also match in the server options file
 * (3rd arg).
 * INPUT : A (void *) to the elEventRecvData structure
 * RETURNS: Nothing
 *****/

DllExport void adsmV3UserExit(void *anEvent)
{
 /* Typecast the event data passed */
 elEventRecvData *eventData = (elEventRecvData *)anEvent;

 /*****
 *** Do not modify above this line. ***
 *****/

```

```

fprintf(stderr,"NT UserExit: Got event

if((eventData->eventNum == USEREXIT_END_EVENTNUM) ||
 (eventData->eventNum == END_ALL_RECEIVER_EVENTNUM))
{
 /* Server says to end this user-exit. Perform any cleanup, *
 * but do NOT exit() !!! */
 return;
}

/* Field Access: eventData->.... */
/* Your code here ... */

/* Be aware that certain function calls are process-wide and can cause
 * synchronization of all threads running under the TSM Server process!
 * Among these is the system() function call. Use of this call can
 * cause the server process to hang and otherwise affect performance.
 * Also avoid any functions that are not thread-safe. Consult your
 * system's programming reference material for more information.
 */

return; /* For picky compilers */
} /* End of adsmV3UserExit() */

```

## Readable text file exit (FILETEXTEXIT) format

If you specify the readable text file exit (FILETEXTEXIT), each logged event is written to a fixed-size, readable line.

The following table presents the format of the output. Fields are separated by blank spaces.

*Table 79. Readable text file exit (FILETEXTEXIT) format*

| Column                 | Description                                  |
|------------------------|----------------------------------------------|
| 0001-0006              | Event number (with leading zeros)            |
| 0008-0010              | Severity code number                         |
| 0012-0013              | Application type number                      |
| 0015-0023              | Session ID number                            |
| 0025-0027              | Event structure version number               |
| 0029-0031              | Event type number                            |
| 0033-0046              | Date/Time (YYYYMMDDHHmmSS)                   |
| 0048-0111              | Server name (right padded with spaces)       |
| 0113-0176 <sup>1</sup> | Node name                                    |
| 0178-0193 <sup>1</sup> | Communications method name                   |
| 0195-0258 <sup>1</sup> | Owner name                                   |
| 0260-0323 <sup>1</sup> | High-level internet address (n.n.n.n)        |
| 0325-0356 <sup>1</sup> | Port number from high-level internet address |
| 0358-0387 <sup>1</sup> | Schedule name                                |
| 0389-0418 <sup>1</sup> | Domain name                                  |
| 0420-2019              | Event text                                   |
| 2020-2499              | Unused spaces                                |
| 2500                   | New line character                           |



*Table 79. Readable text file exit (FILETEXTEXIT) format (continued)*

| Column                                                                                                                                                                           | Description |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| <sup>1</sup> Columns 113 - 418 contain data only for events that originate in a client or in another Tivoli Storage Manager server. Otherwise, columns 113 - 418 contain blanks. |             |

---

## Part 6. Protecting the server

Disasters, by their very nature, cannot be predicted, in either their intensity, timing, or long-term effects. The ability to recover from a disaster, if one occurs, is essential. To protect your system infrastructure and data and to recover from a disaster, use the tools and procedures that Tivoli Storage Manager provides.



---

## Chapter 26. Managing Tivoli Storage Manager security

Administrators have specific activities to manage Tivoli Storage Manager security.

The security of your data is the most important aspect of managing data. You can control access to the server and client nodes, encrypt data transmission, and protect administrator and node passwords through authentication processes. The two methods of authentication are LOCAL and LDAP. The LOCAL password authentication takes place on the Tivoli Storage Manager server, and those passwords are not case-sensitive.

LDAP password authentication takes place on the LDAP directory server, and the passwords are case-sensitive. When you use LDAP authentication, the password is sent to the server by the client. By default, Secure Sockets Layer (SSL) is required when LDAP authentication is used to avoid exposing the password. SSL is used when you authenticate the server to the client and secures all communication between the client and server. You can choose not to use SSL with LDAP authentication if other security measures are in place to protect the password. One example of an alternative security measure is a virtual private network (VPN) connection.

### **Related concepts:**

“Managing Tivoli Storage Manager administrator IDs” on page 870

“Managing passwords and logon procedures” on page 876

“Securing the server console” on page 869

“Securing sensitive client data” on page 529

### **Related reference:**

“Managing access to the server and clients” on page 870

“Administrative authority and privilege classes” on page 857

---

## Securing communications

You can add more protection for your data and passwords by using Secure Sockets Layer (SSL).

SSL is the standard technology for creating encrypted sessions between servers and clients. SSL provides a secure channel for servers and clients to communicate over open communication paths. With SSL, the identity of the server is verified by using digital certificates.

To ensure better system performance, use SSL only for sessions when it is needed. Consider adding more processor resources on the Tivoli Storage Manager server to manage the increased requirements.

If you authenticate passwords with an LDAP directory server, Transport Layer Security (TLS) protects passwords between the Tivoli Storage Manager server and the LDAP server. TLS, a form of SSL, is required for all LDAP password communications. See “Configuring SSL or TLS for LDAP directory servers” on page 865.

## Secure Sockets Layer and Transport Layer Security communication

You can use the Secure Sockets Layer (SSL) or the Transport Layer Security (TLS) protocol to provide transport layer security for a secure connection between Tivoli Storage Manager servers, clients, and storage agents. If you send data between the server, client, and storage agent, use SSL or TLS to encrypt the data.

**Tip:** Any Tivoli Storage Manager documentation that indicates "SSL" or to "select SSL" applies to TLS.

SSL is provided by the Global Security Kit (GSKit) that is installed with the Tivoli Storage Manager server that the server, client, and storage agent use. The Operations Center and Reporting agent do not use GSKit.

**Restriction:** Do not use the SSL or TLS protocols for communications with a DB2 database instance that is used by a Tivoli Storage Manager server.

Each Tivoli Storage Manager server, client, or storage agent that enables SSL must use a trusted self-signed certificate or obtain a unique certificate that is signed by a certificate authority (CA). You can use your own certificates or purchase certificates from a CA. Either certificate can be installed and added to the key database on the Tivoli Storage Manager server, client, or storage agent. The certificate is verified by the SSL client or server that requests or initiates the SSL communication.

SSL is set up independently on the Tivoli Storage Manager server, client, and storage agent.

The Tivoli Storage Manager server, client, or storage agent can serve as SSL clients during communication. An SSL client is the component that initiates communication and verifies the certificate for an SSL server. For example, if a Tivoli Storage Manager client initiates the SSL communication with a Tivoli Storage Manager server, the Tivoli Storage Manager client is the SSL client and the server is the SSL server.

For more information about the components that can be an SSL client or SSL server, see Table 80.

*Table 80. SSL clients and servers in a Tivoli Storage Manager environment*

| SSL client                       | SSL server                       | Description                                                                                                                                                                                                                                                                                                       |
|----------------------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Client                           | Server                           | The Tivoli Storage Manager client initiates a communication request with the Tivoli Storage Manager server. The client verifies the certificate. The server provides the certificate.                                                                                                                             |
| Server (such as a source server) | Server (such as a target server) | <p>The Tivoli Storage Manager source server initiates a communication request with the Tivoli Storage Manager target server. The source server acts as an SSL client and verifies the certificate that the target server provides.</p> <p>This type of communication is common during replication processing.</p> |

Table 80. SSL clients and servers in a Tivoli Storage Manager environment (continued)

| SSL client                     | SSL server  | Description                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Client through a storage agent | Server      | <p>The client uses the Tivoli Storage Manager storage agent to verify the certificate that the Tivoli Storage Manager server provides.</p> <p>When the storage agent communicates with the server by using the SSL communication protocol, the storage agent acts as an SSL client and verifies the certificate that the server provides.</p> <p>The storage agent can be the SSL client and the SSL provider at the same time.</p> |
| Server                         | LDAP server | The Tivoli Storage Manager server initiates a communication request with the LDAP server. The Tivoli Storage Manager server acts as the SSL client and verifies the certificate that the LDAP server provides.                                                                                                                                                                                                                      |
| Operations Center              | Server      | The Operations Center initiates a communication request with the Tivoli Storage Manager server. The Operations Center acts as the SSL client and verifies the certificate that the Tivoli Storage Manager server provides.                                                                                                                                                                                                          |
| Reporting                      | Server      | The Reporting agent initiates a communication request with the Tivoli Storage Manager server. The Reporting feature acts as the SSL client and verifies the certificate that the Tivoli Storage Manager server provides.                                                                                                                                                                                                            |

## Administrative authority and privilege classes

After administrators are registered, they can complete a limited set of tasks. By default, administrators can request command-line help and issue queries.

To perform other tasks, administrators must be granted authority by being assigned one or more administrative privilege classes. Privilege classes determine the authority level for an administrator. Figure 104 on page 858 illustrates the privilege classes. An administrator with system privilege class can complete any task with the server. Administrators with policy, storage, operator, or node privileges can complete subsets of tasks.

**Important:** Two server options give you extra control over the ability of administrators to complete tasks.

- Use the QUERYAUTH server option to select the privilege class that an administrator must have to issue **QUERY** and **SELECT** commands. By default, no privilege class is required. You can change the requirement to one of the privilege classes, including system.
- Use the REQSYSAUTHOUTFILE server option to specify that system authority is required for commands that cause the server to write to an external file (for example, **BACKUP DB**). By default, system authority is required for such commands.

See the *Administrator's Reference* for details on server options.

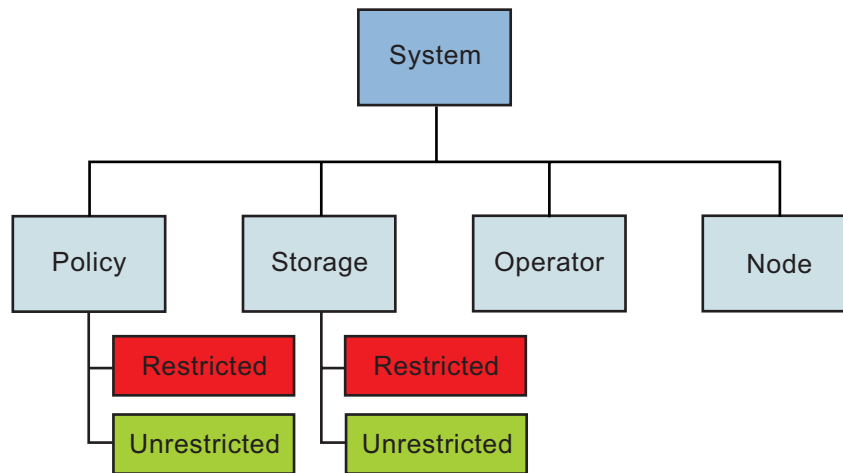


Figure 104. Administrative privilege classes

Table 81 summarizes the privilege classes, and gives examples of how to set privilege classes.

Table 81. Authority and privilege classes

| Privilege Class                                                | Capabilities                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System<br>grant authority rocko classes=system                 | Perform any administrative task with the server. <ul style="list-style-type: none"> <li>• System-wide responsibilities</li> <li>• Manage the enterprise</li> <li>• Manage IBM Tivoli Storage Manager security</li> </ul>                                                   |
| Unrestricted Policy<br>grant authority smith classes=policy    | Manage the backup and archive services for nodes that are assigned to any policy domain. <ul style="list-style-type: none"> <li>• Manage nodes</li> <li>• Manage policy</li> <li>• Manage schedules</li> </ul>                                                             |
| Restricted Policy<br>grant authority jones domains=engpoldom   | Same capabilities as unrestricted policy except authority is limited to specific policy domains.                                                                                                                                                                           |
| Unrestricted Storage<br>grant authority coyote classes=storage | Manage server storage, but not definition or deletion of storage pools. <ul style="list-style-type: none"> <li>• Manage the database and recovery log</li> <li>• Manage IBM Tivoli Storage Manager devices</li> <li>• Manage IBM Tivoli Storage Manager storage</li> </ul> |
| Restricted Storage<br>grant authority holland stgpools=tape*   | Manage server storage, but limited to specific storage pools. <ul style="list-style-type: none"> <li>• Manage IBM Tivoli Storage Manager devices</li> <li>• Manage IBM Tivoli Storage Manager storage</li> </ul>                                                           |

Table 81. Authority and privilege classes (continued)

| Privilege Class                                              | Capabilities                                                                                                                                                                                                                                              |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operator<br>grant authority bill classes=operator            | Control the immediate operation of the server and the availability of storage media. <ul style="list-style-type: none"> <li>• Manage the IBM Tivoli Storage Manager server</li> <li>• Manage client sessions</li> <li>• Manage tape operations</li> </ul> |
| Node<br>grant authority help1<br>classes=node node=labclient | Access a web backup-archive client to complete backup and restore operations.                                                                                                                                                                             |

#### Related concepts:

“Overview of remote access to web backup-archive clients” on page 455

“Managing Tivoli Storage Manager administrator IDs” on page 870

## Setting up Secure Sockets Layer and Transport Layer Security

You can set up Secure Sockets Layer (SSL) and Transport Layer Security (TLS) on the Tivoli Storage Manager server, backup-archive client, and storage agent to ensure that data is encrypted during communication. You can use an SSL certificate to verify an SSL communication request between the server, client, and storage agent.

### Before you begin

You can restrict SSL communication to use TLS 1.2 and prevent the use of previous TLS protocol levels, which are less secure.

To use TLS 1.2, you must specify the SSLTLS12 YES server option in the server options file and the storage agent options file, if necessary. If you want to ensure that a minimum TLS protocol level of 1.2 is enforced, set the SSLDISABLELEGACYtls server option to YES. For successful TLS communication, the target server or storage agent must also be configured to use TLS 1.2. If you use self-signed certificates, the default label in the key database must be set to “TSM Server SelfSigned SHA key”.

### Procedure

To configure Tivoli Storage Manager servers and clients for SSL or TLS, complete the following steps:

1. Specify the TCP/IP port on which the server waits for client communications that are enabled for SSL or TLS. You can use the **SSLTCPADMINPORT** option or **SSLTCPPOINT** option, or both, to specify TLS port numbers. The options are stored in the dsmserv.opt file.
2. Create the key database file if it does not exist. Complete the following steps to create the key database file for the server, client, and storage agent:
  - For Tivoli Storage Manager V6.3.3 and later servers, the cert256.arm file and other files that are related to SSL or TLS are created when the server is first started. Tivoli Storage Manager automatically creates the server key database file, cert.kdb. If a password exists for the server database, it is reused for the cert.kdb key database. After you create the database, the key database access password is generated and stored.



- To create the key database file for the storage agent, issue the **DSMSTA SETSTORAGESERVER** command and specify the **SSL=YES** and **STAKEYDBPW=password** parameters.
- To create the key database file, `dsmcert.kdb`, for the client, issue the following command in the `bin` directory on the client:
 

```
gsk8capicmd_64 -keydb -create -populate
-db dsmcert.kdb -pw password -stash
```

3. Use one of the following certificates for SSL or TLS communication:

#### Self-signed certificate

You must import a `.arm` file for the server, backup-archive client, and storage agent according to the default label that is used for the server self-signed certificate. The following table shows you which file to import:

Table 82. Determining the `.arm` file to use.

| Default label in the key database | Import this file for clients | Import this file for server-server communication | Import this file for storage agent-server communication |
|-----------------------------------|------------------------------|--------------------------------------------------|---------------------------------------------------------|
| "TSM Server SelfSigned Key"       | <code>cert.arm</code>        | <code>cert256.arm</code>                         | <code>cert256.arm</code>                                |
| "TSM Server SelfSigned SHA Key"   | <code>cert256.arm</code>     | <code>cert256.arm</code>                         | <code>cert256.arm</code>                                |

**Important:** To use TLS 1.2, the default label must be "TSM Server SelfSigned SHA key". You must specify the **SSLTLS12 YES** server option in the server options file and the storage agent options file, if necessary.

#### CA-signed certificate

You must obtain a unique certificate that is signed by a CA or use a trusted self-signed certificate for each server that enables SSL or TLS. Backup-archive clients use the `cert.kdb` or `cert256.arm` files to import the self-signed certificates, which the server automatically generates.

4. Manually transfer the appropriate Tivoli Storage Manager server `.arm` file to the client computers. If you transfer the `cert256.arm` file, you must first change the default certificate in the `cert.kdb` key ring database file to the "TSM Server SelfSigned SHA Key" label. To change the default certificate, issue the following command from the server instance directory:

```
gsk8capicmd_64 -cert -setdefault -db cert.kdb
-stashed -label "TSM Server SelfSigned SHA Key"
```

5. Using a backup-archive client user ID, specify the **ssl yes** and **tcpport** options in the client options file:

- `dsm.opt`

The server is normally set up for SSL or TLS connections on a different port. If you use an SSL or TLS connection, two ports are open on the server. One port accepts regular non-SSL or non-TLS client connections and the other port accepts SSL or TLS connections only.

6. If you want to use a certificate that is issued by a certificate authority (CA), you do not need to complete steps 4 and 5. Install the CA root certificate on all clients. If you specified the `-populate` parameter in the command when you created the key database file, a set of default root certificates are preinstalled.

## Specifying communication ports

The Tivoli Storage Manager server can be configured to listen on four TCP/IP ports: two for regular protocols and two for the Transport Layer Security (TLS) protocols.

If you authenticate passwords with an LDAP directory server, the connection between the LDAP directory server and the Tivoli Storage Manager server must be protected. The connection between a Tivoli Storage Manager server and an LDAP directory server defaults to port 389. You do not have to use this port number and can define the port by setting the **LDAPURL** option.

For IPv4 or IPv6, the **COMMMETHOD** server option must specify either TCP/IP or V6TCP/IP. The server options for TLS communications are **SSLTCP**, **SSLTCPADMINPORT**, **SSLTLS12**, and **SSLDISABLELEGACYTLS**. The server can listen on separate ports for the following communications:

- Backup-archive clients that use the regular protocol
- Administrator IDs that use the regular protocol
- Backup-archive clients that use the TLS protocol
- Administrator IDs that use the TLS protocol

Use the **TCPADMINPORT** and **SSLTCPADMINPORT** options to separate administrative client traffic from regular client traffic that uses the **TCP** and **SSLTCP** options. If the **TCPADMINPORT** and **SSLTCPADMINPORT** options are not used, administrative traffic and regular traffic both flow on client ports.

You can use the following components with TLS:

- Command-line client
- Administrative command-line client
- Backup-archive client graphical user interface (GUI)
- Client API

If the **ADMINONCLIENTPORT** option is set to NO, TLS administrative client sessions require that you specify the **SSLTCPADMINPORT** option with a port number other than the one specified by the **SSLTCP** option. The **SSLTCP** and **SSLTCPADMINPORT** options do not affect the **TCP** or **TCPADMINPORT** options and their interaction with the **ADMINONCLIENTPORT** option. To enable TLS 1.2, specify the **SSLTLS12** or **SSLDISABLELEGACYTLS** option. For server and storage agent communication, if **SSLDISABLELEGACYTLS** is specified, TLS sessions must connect at a minimum level of TLS 1.2 or they are rejected.

The backup-archive client user decides which protocol to use and which port to specify in the `dsmserv.opt` file for the **SSLTCPADMINPORT** option. If the backup-archive client requires TLS authentication but the server is not in TLS mode, the session fails.

### Related concepts:

“Managing passwords and logon procedures” on page 876

### Related tasks:

“Configuring Tivoli Directory Server for TLS on the iKeyman GUI” on page 866

“Configuring Tivoli Directory Server for TLS on the command line” on page 867

### Related reference:

“Configuring Windows Active Directory for TLS/SSL” on page 868

## Adding a certificate to the key database

To use Transport Layer Security (TLS), the certificate must be installed on the server, and for some root certificates, they must be installed on the client. Each server that enables TLS must obtain a unique certificate that is signed by a certificate authority (CA) or use a trusted self-signed certificate.

You can use your own certificates or purchase certificates from a CA. Either can be installed and added to the key database. If you include the **-stashpw** parameter on a GSKit **gsk8capicmd\_64** command, the password that you define is saved for later use. The server and the storage agent create the key databases by using the stash facility.

The key database is created when you start the Tivoli Storage Manager server. If the certificate is signed by a trusted CA, obtain the certificate, install it in the key database, and restart the server. Because the certificate is provided by a trusted authority, the certificate is accepted by Tivoli Storage Manager and communication between server and client can start.

For example, to add a certificate to the key database for the client, issue the following command:

```
gsk8capicmd_64 -cert -add -label "TSM061" -format ascii
-file cert256.arm -db dsmcert.kdb -pw password
```

The cert256.arm file is generated by the server for distribution to the backup-archive clients, and for use in server-server communication and storage agent-server communication. The cert.arm file might also be generated by the V6.3 server, but is not designed for passwords that authenticate with an LDAP server.

If a certificate expires, the certificate is rejected when you attempt SSL communication. You must obtain a new certificate and add it to the key database for the server and the storage agent. The self-signed certificates for the server are created with an expiration time of 10 years. After 10 years, the certificates must be re-created and redistributed. You can re-create a self-signed certificate by deleting the cert.arm and cert256.arm files and by deleting the self-signed certificates from the key database. When you restart the server or the storage agent, new certificates and .arm files are created.

To show the certificates that are available to use for SSL or TLS communication, issue the following command from the client directory:

```
gsk8capicmd_64 -cert -list -db dsmcert.kdb -stashed
```

### Related concepts:

"Managing passwords and logon procedures" on page 876

### Adding a CA-signed TLS certificate:

You can use a Transport Layer Security (TLS) certificate if the client trusts the certificate authority (CA). Trust is established when you add a signed certificate to the server key database and use a root certificate for the CA in the client key database.

### About this task

The Global Security Kit (GSKit) is included in the Tivoli Storage Manager server installation. The backup-archive client and server communicate with TLS through services that are provided by GSKit.

## Procedure

Complete the following steps to add a certificate to the key database by using GSKit:

1. Obtain a signed, server key database certificate from your CA.
2. To receive the signed certificate and make it the default for communicating with clients, issue the following command:

```
gsk8capicmd_64 -cert -receive -db cert.kdb
-pw password -stash -file cert_signed.arm -default_cert yes
```

The server key database file name is cert.kdb.

**Important:** If your client operating system is 32-bit, replace gsk8capicmd\_64 with gsk8capicmd in all GSKit commands.

3. Restart the server.
4. Transfer the root certificate (ca.arm) to the client directory.
5. To add the root certificate to the client key database, issue the gsk8capicmd\_64 -cert -add command. For example:

```
gsk8capicmd_64 -cert -add -db dsmcert.kdb
-pw password -label "my CA"
-file ca.arm -format ascii
```

**Tip:** For this example, the client key database name is dsmcert.kdb.

6. To verify that the client can successfully connect, issue the dsmc query session command.

## Replacing certificates in the key database file

You can replace certificates in the key database file if you use older certificates that have shorter keys. Certificates have 2048 keys, but some older certificates have fewer keys, which makes them less secure.

## Procedure

To replace certificates in the key database, complete the following instructions:

- For self-signed certificates, complete the following steps:
  1. Stop the Tivoli Storage Manager server and the storage agent.
  2. Delete the certificates in the key database by issuing the following command:

**Tip:** Each command is entered on one line, but is displayed here on multiple lines to make it easier to read.

```
gsk8capicmd -cert -delete -file cert.kdb
-stashed -label "TSM Server SelfSigned Key"
gsk8capicmd -cert -delete -file cert.kdb
-stashed -label "TSM Server SelfSigned SHA Key"
```

3. Delete the cert.kdb file for the server and the storage agent.
4. Delete the cert256.arm and cert.arm files for the server and the storage agent by changing to the server instance and issuing the following command:

```
del cert.arm cert256.arm
```

5. Issue the following command on the storage agent:

```
run dsmsta setstorageserver SSL
```

6. Restart the server. When the server restarts, the server creates a key database and a new password, if there are none available. Old key databases and passwords are invalid.
  7. Import the cert256.arm file for the client.
  8. Delete the existing certificates for the storage agent and the server.
  9. Import the new certificates for the server and the storage agent.
- For third-party certificates, complete the following steps:
    1. Delete the existing certificates for the storage agent and the server.
    2. Import the new certificates for the server and the storage agent.

## Configuring a storage agent and server to use SSL

You can set up a storage agent and the Tivoli Storage Manager server to use the SSL communication method. SSL is set up independently on both the storage agent and the Tivoli Storage Manager server.

### Procedure

To set up the storage agent to use SSL communication with the Tivoli Storage Manager server and client, complete the following steps:

1. On the storage agent, issue the **DSMSTA SETSTORAGESERVER** command to initialize the storage agent and add communication information to the device configuration file and the storage agent options file dsmsta.opt:

**Hint:** The following command is entered on one line, but is displayed here on multiple lines to make it easier to read.

```
dsmsta setstorageserver myname=sta
mypa=sta_password
myhla=ip_address
servername=server_name
serverpa=server_password
hla=ip_address
lla=ssl_port
STAKEYDBPW=password
ssl=yes
```

#### Requirement:

- When you set the **SSL=YES** and **STAKEYDBPW=password** parameters, a key database file is set up in the storage agent options file, dsmsta.opt. All passwords are obfuscated in dsmsta.opt.
  - To enable SSL communication, ensure that the Tivoli Storage Manager **LLA** parameter specifies the server **SSLTCPADMIN** port. If the **SSLTCPADMIN** is not specified, use the **SSLTCP** port instead. Set the **SSL** parameter to YES.
2. Import the Tivoli Storage Manager server certificate, cert256.arm, to the key database file for the storage agent. Ensure that the required SSL certificates are in the key database file that belongs to each storage agent that uses SSL communication. To import the SSL certificate, switch to the storage agent directory and issue the following command:
 

```
gsk8capicmd_64 -cert -add -label server_example_name
-db cert.kdb -stashed -file cert256.arm -format ascii
```
  3. Specify the **SSLTCP** and the **SSLTCPADMIN** options in the dsmsta.opt options file.
  4. Create the key database certificate and default certificates by starting the storage agent.

**Tip:** To provide the new password to the storage agent, you must change the key database password and then issue the **DSMSTA SETSTORAGESERVER** command.

- a. Open a command window and change the password by issuing the following command:

```
gsk8capicmd_64 -keydb -changePW -db cert.kdb -pw oldpw -newpw newpw
```

- b. Rerun the **DSMSTA SETSTORAGESERVER** command and specify the **STAKEYDBPW=newpassword** parameter.

5. On the Tivoli Storage Manager server, issue the following command:

```
define server sta
hla=ip_address
lla=ssl_port
serverpa=password
ssl=yes
```

6. Stop the storage agent.

7. Stop the Tivoli Storage Manager server.

8. Import the cert256.arm certificate from the storage agent to the key database file for the Tivoli Storage Manager server. Ensure that the required SSL certificates are in the key database file that belongs to each server that uses SSL communication before you restart the server. To import the SSL certificate from the storage agent, issue the following command:

```
gsk8capicmd_64 -cert -add -label server_example_name
-db cert.kdb -stashed -file cert256.arm -format ascii
```

9. Stop and restart the Tivoli Storage Manager server.

10. Restart the storage agent.

## Results

When the Tivoli Storage Manager server and storage agent initiate communication, SSL certificate information is displayed to indicate that SSL is in use.

### Related reference:

“Adding a certificate to the key database” on page 862

## Configuring SSL or TLS for LDAP directory servers

Before you can authenticate passwords by using an LDAP directory server, you must configure Secure Sockets Layer (SSL) or Transport Layer Security (TLS) to use the directory server. You must use a trusted certificate that is verified during SSL or TLS communication.

TLS is provided by the Global Security Kit (GSKit) that is installed with the Tivoli Storage Manager server.

If you use an LDAP directory server to authenticate passwords, you can use the SSL or TLS protocol to secure connections between the Tivoli Storage Manager server and the LDAP server. When you configure the Tivoli Storage Manager server to work with an LDAP directory server, you must consider the directory server to use before you configure SSL or TLS.

The LDAP directory server must supply a trusted certificate to the Tivoli Storage Manager server. If the Tivoli Storage Manager server determines that the certificate is valid, an SSL or TLS connection is established. If not, the connection fails. The root certificate that is used with the LDAP Directory server certificate must be added to the key database file for the Tivoli Storage Manager server. If the root certificate is not added, the LDAP Directory server certificate cannot be used.

The directory servers that are available are IBM Tivoli Directory Server V6.2 or 6.3 or Windows Active Directory 2003 or 2008. You can configure Tivoli Directory Server with the graphical user interface or with the command-line interface.

### Configuring Tivoli Directory Server for TLS on the iKeyman GUI:

Configuring IBM Tivoli Directory Server is one of the preliminary tasks you must do before you can authenticate passwords with an LDAP directory server. The Tivoli Directory Server can use a self-signed certificate to secure the communication between server and backup-archive client, and the LDAP directory server.

#### About this task

You can use the iKeyman graphical user interface (GUI) to set up Tivoli Directory Server. If the Tivoli Storage Manager server already has a trusted certificate from your LDAP server, you do not have to complete the steps that are documented here. If the LDAP directory server already has a signed certificate, you do not have to complete these steps.

#### Procedure

To configure Tivoli Directory Server for Transport Layer Security (TLS) by using the iKeyman GUI, complete the following steps:

1. Install and configure Java Runtime Environment 1.4.1 or later before you install Tivoli Directory Server.
2. Ensure that you have GSKit version 8 installed. See Instructions to install, uninstall, and upgrade GSKit 8 (<http://www.ibm.com/support/%0Adocview.wss?uid=swg21577384>)
3. Set the JAVA\_HOME environmental variable to point to the Java subdirectory of the Tivoli Directory Server installation directory. The installation directory is /opt/IBM/ldap/Vx.x, where x.x is the version number.
4. Ensure that the local\_policy.jar and US\_export\_policy.jar files are in the \$JAVA\_HOME/jre/lib/security directory.
5. Verify whether the Content Management system (CMS) provider is registered. Open the \$JAVA\_HOME/jre/lib/security/java.security file to see whether the entry exists. If the entry does not exist, open the java.security file and add the following entry:

```
security.provider.X=com.ibm.security.cmskeystore.CMSProvider
```

where X is the next number in the order. For example:

```
security.provider.1=com.ibm.jsse.IBMJSSEProvider
security.provider.2=com.ibm.egypt.provider.IBMJCE
security.provider.3=com.ibm.security.cmskeystore.CMSProvider
```

6. Create the key database file in the Tivoli Directory Server installation directory as Tivoli Directory Server instance user. Complete the following steps:
  - a. Open a command line and enter ikeyman to start the Java utility.
  - b. Click **Key Database File > New** for a new key database file or click **Open** if the key database file exists.
  - c. Specify the key database type (CMS) and the key database file name, with its location. For example, *server\_file.kdb*. Click **OK**.
  - d. Supply the password for the key database file when you are prompted.
  - e. Select the **Stash a password to a file** check box and click **OK**.



7. Click **Create > New Self-Signed Certificate**.
8. Extract the certificate.
  - a. On the server where Tivoli Directory Server is, open the *server\_file.kdb* file.
  - b. Click **Personal Certificates > Extract Certificate**.
  - c. Enter the file name and location.
  - d. Save the certificate to a text-based (ASCII) file.
9. Click **Server administration > Manage security properties > Key database**. Specify the key database path and file name. If you defined a password stash file, it is assumed to have the same file specification, with an extension of .sth. See step 6e on page 866.
10. Specify the key password. If you are not using a stashed password, specify the password for the key database file.
11. Specify the key label, which indicates the part of the key database that is to be used.
12. Copy the certificate file (ldapcert.arm) to the Tivoli Storage Manager server key database.

### Configuring Tivoli Directory Server for TLS on the command line:

You must configure IBM Tivoli Directory Server before you can authenticate passwords with an LDAP directory server. The Tivoli Directory Server can use a self-signed certificate to secure the communication between server and backup-archive client, and the LDAP directory server.

### About this task

If the Tivoli Storage Manager server already has a trusted certificate from your LDAP server, you do not have to complete the steps that are documented here. If the LDAP directory server already has a signed certificate, you do not have to complete these steps.

### Procedure

To configure Tivoli Directory Server for Transport Layer Security (TLS), complete the following steps:

1. Using the Tivoli Directory Server instance user name, create the key database by issuing the following command:
 

```
gsk8capicmd_64 -keydb -create -db "directory/filename.kdb"
-pw "pa$$w0rd" -stashpw -populate
```
2. Create a self-signed certificate or get one from a certificate authority (CA). To create a self-signed certificate, issue the following command:
 

```
gsk8capicmd_64 -cert -create -db "directory/filename.kdb" -stashed -label
"LDAP_directory_server" -dn "cn=ldapserver.company.com"
-san_dnsname ldapserver.company.com -size 2048
-sigalg SHA256WithRSA -expire 3650
```
3. Extract the certificate to a file by issuing the following command:
 

```
gsk8capicmd_64 -cert -extract -db "directory/filename.kdb" -stashed -label
"LDAP_directory_server" -target ldapcert.arm -format ascii
```
4. Copy the certificate file (ldapcert.arm) to the Tivoli Storage Manager server.
5. To add the certificate to the Tivoli Storage Manager server key database, issue the following command from the Tivoli Storage Manager server. You must issue the command from the instance user ID from the instance directory.



```
gsk8capicmd_64 -cert -add -db "cert.kdb" -stashed -label
"LDAP_directory_server" -format ascii -file ldapcert.arm
```

6. Configure the key database file to work with Tivoli Directory Server. To set the key database for TLS, issue the following command:

```
idsldapmodify -D <adminDN> -w <adminPW> -i <filename>
```

where *filename* contains the following entry:

```
dn: cn=SSL,cn=Configuration
changetype: modify
replace: ibm-slapdSSLKeyDatabase
ibm-slapdSSLKeyDatabase: <databasename>
-
replace: ibm-slapdSSLKeyDatabasePW
ibm-slapdSSLKeyDatabasePW: <password>
-
replace: ibm-slapdSslKeyRingFilePW
ibm-slapdSslKeyRingFilePW: <password>
```

7. Enable TLS on the LDAP directory server so that the Tivoli Storage Manager server can run the “start TLS extended” operation. This operation secures LDAP communication. Do not enable client authentication with TLS, because the Tivoli Storage Manager server does not support certificate authentication as an LDAP client.

**Tip:** The Tivoli Storage Manager server authenticates with the “LDAP simple password authentication” method.

8. Restart Tivoli Directory Server and Tivoli Storage Manager server.

### Configuring Windows Active Directory for TLS/SSL:

You must configure Windows Active Directory before the Tivoli Storage Manager server can authenticate passwords.

To set up the Windows Active Directory server, complete the following steps:

1. Turn off automatic root certificate updates to Windows Update if your Windows Active Directory server does not have access to the internet.
2. Synchronize the system times of the Tivoli Storage Manager server and the Windows Active Directory system. You can use a Network Time Protocol (NTP) server. For more information about synchronizing the system times, see your operating system documentation. You can also see the Microsoft website for information about synchronizing Active Directory <http://technet.microsoft.com/en-us/library/cc786897>.
3. Set up Transport Layer Security (TLS) for LDAP server connections. Go to the Microsoft website <http://www.microsoft.com> and search for *LDAP* and *SSL*.
  - a. Obtain a signed certificate. Active Directory requires that a signed certificate is in the Windows certificate store to enable TLS. You can obtain a signed certificate from the following sources:
    - A third-party certificate authority (CA)
    - Install the Certificate Services role on a system that is joined to the Active Directory domain and configure an enterprise root CA

**Important:** Do not install the Certificate Services role on the Active Directory server. Some Active Directory Domain configurations are not suited to accept an installed Certificate Services role. For example, when there are multiple Active Directory servers in a domain.

- b. Add the signed certificate to the Windows certificate store on the Windows Active Directory server.
4. Determine whether the Tivoli Storage Manager server trusts the CA. As the instance owner from the instance directory, issue the following command:  

```
gsk8capicmd_64 -cert -list -db cert.kdb -stashed
gsk8capicmd_64 -cert -details -label "My CA" -db cert.kdb -stashed
```
5. If the CA is not trusted, export the CA certificate from the certificate server. You can select either Distinguished Encoding Rules (DER) binary or Base64-encoded ASCII.

**Tip:** To determine whether the file is DER binary or ASCII, open the certificate in a text editor. If you can read the characters, then the file is ASCII. Ensure that you have the root certificate and that the subject on the certificate matches the CA name. The “Issued by” and “Issued to/subject” for the root certificate must be the same. Export the CA certificate by using one of the following methods:

- Export the CA certificate from the “Certificates (Local Computer)” Microsoft Management Console (MMC) snap-in.
  - Copy the certificate from C:\Windows\system32\certsrv\CertEnroll\\*.crt into the server key database. The file is in DER binary format.
  - Download the CA certificate file from the Certificate Services web interface <http://<certificate server hostname>/certsrv/>, if it is enabled through the Certificate Enrollment Web Services.
6. Copy the certificate to the Tivoli Storage Manager server.
  7. Add the certificate to the Tivoli Storage Manager server key database. Issue the following command from the Tivoli Storage Manager server as the instance user from the instance directory:  

```
gsk8capicmd_64 -cert -add -db "cert.kdb" -stashed
-label "My CA" -format ascii -file myca.cer
```

**Tip:** The Tivoli Storage Manager server authenticates with the “LDAP simple password authentication” method.

**Related tasks:**

“Setting up Secure Sockets Layer and Transport Layer Security” on page 859

---

## Securing the server console

At installation, the server console is defined with a special user ID, which is named SERVER\_CONSOLE. This name is reserved and cannot be used by another administrator.

An administrator with system privilege can revoke or grant new privileges to the SERVER\_CONSOLE user ID. However, an administrator cannot update, lock, rename, or remove the SERVER\_CONSOLE user ID. The SERVER\_CONSOLE user ID does not have a password.

Therefore, you cannot use the user ID from an administrative client unless you set authentication to off.

## Managing access to the server and clients

An administrator can control access to the server and clients through a number of methods.

Table 83 describes the typical tasks for managing access to the server and clients.

*Table 83. Managing access*

| Task                                                                                                                              | Details                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Allow a new administrator to access the server                                                                                    | <ol style="list-style-type: none"><li>1. "Registering administrator IDs" on page 871</li><li>2. "Granting authority to administrators" on page 872</li></ol>                                                                                                                                                               |
| Modify authority for registered administrators                                                                                    | "Managing Tivoli Storage Manager administrator IDs"                                                                                                                                                                                                                                                                        |
| Give a user authority to access a client remotely                                                                                 | "Managing client access authority levels" on page 456                                                                                                                                                                                                                                                                      |
| Give an administrator authority to create a backup set for a client node                                                          | "Generating client backup sets on the server" on page 534                                                                                                                                                                                                                                                                  |
| Prevent administrators from accessing the server                                                                                  | "Locking and unlocking administrator IDs from the server" on page 876                                                                                                                                                                                                                                                      |
| Prevent new sessions with the server, but allow current sessions to complete                                                      | "Disabling or enabling access to the server" on page 479                                                                                                                                                                                                                                                                   |
| Prevent clients from accessing the server                                                                                         | "Locking and unlocking client nodes" on page 449                                                                                                                                                                                                                                                                           |
| Change whether passwords are required to access Tivoli Storage Manager                                                            | "Disabling the default password authentication" on page 888                                                                                                                                                                                                                                                                |
| Change requirements for passwords                                                                                                 | <ul style="list-style-type: none"><li>• "Modifying the default password expiration period for passwords that are managed by the Tivoli Storage Manager server" on page 885</li><li>• "Setting a limit for invalid password attempts" on page 886</li><li>• "Setting a minimum length for a password" on page 888</li></ul> |
| Prevent clients from initiating sessions within a firewall                                                                        | "Server-initiated sessions" on page 447                                                                                                                                                                                                                                                                                    |
| <b>Tip:</b> For information on connecting with Tivoli Storage Manager across a firewall, refer to the <i>Installation Guide</i> . |                                                                                                                                                                                                                                                                                                                            |

## Managing Tivoli Storage Manager administrator IDs

The administrator can register other administrator IDs, grant levels of authority to them, rename IDs, remove IDs, and lock and unlock them from the server.

A privilege class is a level of authority that is granted to an administrator. The privilege class determines the administrative tasks that the administrator can complete.

| Task                         | Required Privilege Class |
|------------------------------|--------------------------|
| Registering an administrator | System                   |

| Task                                                | Required Privilege Class |
|-----------------------------------------------------|--------------------------|
| Granting administrative authority                   | System                   |
| Modifying administrative authority                  | System                   |
| Updating information about other administrators     | System                   |
| Updating information about yourself                 | Any administrator        |
| Displaying information about administrators         | Any administrator        |
| Renaming an administrator user ID                   | System                   |
| Removing administrators                             | System                   |
| Locking or unlocking administrators from the server | System                   |

#### Related reference:

“Administrative authority and privilege classes” on page 857

## Registering administrator IDs

An administrator can register other administrator IDs and set their authentication method by using the **REGISTER ADMIN** command.

### About this task

If you want to register an administrator ID and have that ID authenticate with an LDAP directory server, ensure that all LDAP configuration steps are completed. When you use **AUTHENTICATION=LDAP** in a **REGISTER ADMIN** command, the *LDAPURL* setting must be specified in the *dsmserv.opt* file and you must define the **LDAPUSER** and **LDAPPASSWORD** options. If you do not specify an authentication method, the default (LOCAL) is used.

### Registering an administrator

**Example 1: Register an administrator with a user ID of DAVEHIL, the password *birds*, and a password expiration period of 120 days.**

The authentication method defaults to LOCAL.

```
register admin davehil birds passexp=120 contact='backup team'
```

**Example 2: Register an administrator with a user ID of PAULJONES, the password *Ne^Pa\$\$w0rd*, and the authentication method of LDAP.**

```
register admin pauljones Ne^Pa$$w0rd authentication=ldap
```

The expiration period, length of password, and other characteristics of LDAP-authenticated passwords can be configured on the LDAP server. But most Tivoli Storage Manager password-related commands also work for passwords that authenticate to an LDAP server. For more information about password policies, see “Setting the policy for an LDAP-authenticated password” on page 881.

## Querying the server for information about administrators

Any administrator can query the server to show administrator information. You can restrict the query to all administrators authorized with a specific privilege class.

### Procedure

To query the system for a detailed report on administrator ID DAVEHIL, issue the following example **QUERY ADMIN** command:

```
query admin davehil format=detailed
```

The results are shown in the following detailed report:

```
Administrator Name: DAVEHIL
Last Access Date/Time: 2002.09.04 17.10.52
Days Since Last Access: <1
Password Set Date/Time: 2002.09.04 17.10.52
Days Since Password Set: 26
Invalid Sign-on Count: 0
Locked?: No
Contact:
System Privilege: Yes
Policy Privilege: **Included with system privilege**
Storage Privilege: **Included with system privilege**
Operator Privilege: **Included with system privilege**
Client Access Privilege: **Included with system privilege**
Client Owner Privilege: **Included with system privilege**
Registration Date/Time: 05/09/2002 23:54:20
Registering Administrator: SERVER_CONSOLE
Managing profile:
Password Expiration Period: 90 Day (s)
Authentication: Local
```

*Figure 105. A detailed administrator report*

### Example: Query administrator IDs that authenticate with an LDAP directory server

```
query admin authentication=ldap
```

Only administrator IDs that authenticate to the LDAP directory server are listed in the report.

## Granting authority to administrators

You can grant authority by issuing the **GRANT AUTHORITY** command.

### Procedure

To grant restricted policy privilege to administrator JONES for the domain ENGPOLDOM, issue the following example command:

```
grant authority jones domains=engpoldom
```

## Extending authority for administrators

You can grant and extend authority by issuing the **GRANT AUTHORITY** command. If an ID already has some level of authority, granting more authority adds to any existing privilege classes; it does not override those classes.

### About this task

For example, JONES has restricted policy privilege for policy domain ENGPOLDOM.

### Procedure

1. To extend JONES' authority to policy domain MKTPOLDOM and add operator privilege, issue the following example command:  

```
grant authority jones domains=mktpoldom classes=operator
```
2. As another example, assume that three tape storage pools exist: TAPEPOOL1, TAPEPOOL2, and TAPEPOOL3. To grant restricted storage privilege for these storage pools to administrator HOLLAND, you can issue the following command:  

```
grant authority holland stgpools=tape*
```
3. If the storage pools existed when the authority was granted, HOLLAND is restricted to managing storage pools with names that begin with TAPE. HOLLAND is not authorized to manage any storage pools that are defined after authority is granted. To add a storage pool, TAPEPOOL4, to HOLLAND's authority, issue the following command:  

```
grant authority holland stgpools=tapepool4
```

## Reducing authority for administrators

You can revoke part of an administrator's authority by issuing the **REVOKE AUTHORITY** command.

### About this task

For example, rather than revoking all of the privilege classes for administrator JONES, you want to revoke only the operator authority and the policy authority to policy domain MKTPOLDOM.

### Procedure

Issue the following command to revoke only the operator authority and the policy authority to policy domain MKTPOLDOM:

```
revoke authority jones classes=operator domains=mktpoldom
```

JONES still has policy privilege to the ENGPOLDOM policy domain.

## Reducing privilege classes

You can reduce an administrator's authority by revoking one or more privilege classes and granting one or more other classes.

### Procedure

For example, administrator HOGAN has system authority. To reduce authority for HOGAN to the operator privilege class, complete the following steps:

1. Revoke the system privilege class by issuing the following command:  
`revoke authority hogan classes=system`
2. Grant operator privilege class by issuing the following command:  
`grant authority hogan classes=operator`

## Revoking authority for administrators

You can revoke an administrator's authority by issuing the **REVOKE AUTHORITY** command. To revoke all administrative privilege classes, do not specify any privilege classes, policy domains, or storage pools.

For example, to revoke both the storage and operator privilege classes from administrator JONES, issue the following command:

```
revoke authority jones
```

## Updating information about other administrators

An administrator can reset another administrator's password by issuing the **UPDATE ADMIN** command. The administrator must have system privileges.

### Procedure

**Tip:** If you authenticate a password with an LDAP directory server, the letters and characters that comprise the password are case-sensitive.

To update the information for an administrator, issue the **UPDATE ADMIN** command. For example, administrator DAVEHIL changes their password to ganymede by issuing the following command:

```
update admin davehil ganymede
```

**Note:** The SERVER\_CONSOLE administrator's ID and contact information cannot be updated.

## Renaming an administrator ID

You can rename an administrator ID if it needs to be identified by a new ID. You can also assign an existing administrator ID to another person by issuing the **RENAME** command. You cannot rename an administrator ID to one that exists on the system.

### About this task

For example, if administrator HOLLAND leaves your organization, you can assign administrative privilege classes to another user by completing the following steps:

### Procedure

1. Assign HOLLAND's user ID to WAYNESMITH by issuing the **RENAME ADMIN** command:  
`rename admin holland waynesmith`

By renaming the administrator's ID, you remove HOLLAND as a registered administrator from the server. In addition, you register WAYNESMITH as an administrator with the password, contact information, and administrative privilege classes that are previously assigned to HOLLAND.

2. Change the password to prevent the previous administrator from accessing the server by entering:

```
update admin waynesmith new_password contact="development"
```

**Remember:** If you rename an administrator ID that authenticates with an LDAP directory server, administrators on other servers that share a namespace are not renamed. You must issue a **RENAME** command for each administrator ID. When you rename an administrator ID with **SYNCLDAPDELETE=YES**, the original name is removed from the LDAP directory server and replaced with the new name. Administrators, with the original name, on other servers can no longer authenticate with the LDAP directory server. Those administrators must register with the LDAP directory server or get renamed to the new name.

## Results

**Note:** The administrator SERVER\_CONSOLE cannot be renamed.

**Related concepts:**

"Securing the server console" on page 869

## Removing administrator IDs

You can remove administrator IDs from the server so that they no longer have access to administrative functions. You must have system privileges to remove an administrator.

## Procedure

To remove registered administrator ID SMITH, issue the following example command:

```
remove admin smith
```

**Important:**

1. You cannot remove the last system administrator from the system.
2. You cannot remove the administrator SERVER\_CONSOLE.

## Results

**Remember:** You can remove an administrator ID that authenticates to the Tivoli Storage Manager server, and remove the corresponding administrator namespace on the LDAP directory server. If other Tivoli Storage Manager servers are not using entries on the LDAP directory server, you do not have to keep corresponding LDAP entries on the LDAP server.

## Removing administrator ID pauljones from the Tivoli Storage Manager server and the LDAP directory server

Administrator ID pauljones authenticates with an LDAP directory server and the person who owns that ID is leaving the company. You must find and remove all occurrences of the administrator ID, pauljones, on the server.

```
remove admin pauljones syncldapdelete=yes
```



In this example, the **SYNCLDAPDELETE** parameter deletes administrator pauljones from the LDAP server. If administrator pauljones is on other Tivoli Storage Manager servers, you must run the same command on each one. Do not delete entries on the LDAP directory server if they are still needed by another Tivoli Storage Manager server. Issue SYNCLDAPDELETE=NO if other Tivoli Storage Manager servers use the administrator namespace.

**Related concepts:**

“Securing the server console” on page 869

## **Locking and unlocking administrator IDs from the server**

You can issue the **LOCK ADMIN** command to lock out other administrator IDs and temporarily prevent them from accessing Tivoli Storage Manager.

### **About this task**

You can also lock or unlock administrator IDs according to the form of authentication that they use. When you specify **AUTHENTICATION=LOCAL** in the command, all administrator IDs that authenticate with the Tivoli Storage Manager server are affected. When you specify **AUTHENTICATION=LDAP** in the command, all administrator IDs that authenticate with an LDAP directory server are affected.

In the example, administrator ID MARYSMITH, takes a leave of absence from your business.

### **Procedure**

1. Lock MARYSMITH out by entering the following example command:  
`lock admin marysmith`
2. When MARYSMITH returns, any system administrator can unlock the administrator ID by issuing the following command:  
`unlock admin marysmith`  
MARYSMITH can now access the server to complete administrative tasks. You cannot lock or unlock the **SERVER\_CONSOLE** ID from the server.

### **Example: Lock all administrator IDs that authenticate locally**

```
lock admin * authentication=local
```

**Related concepts:**

“Securing the server console” on page 869

---

## **Managing passwords and logon procedures**

Tivoli Storage Manager requires the server to identify authorized administrator IDs and nodes by using a password. You can authenticate administrator and node passwords with a Lightweight Directory Access Protocol (LDAP) directory server.

**Restriction:** Backup-archive clients must be at V6.4 or later to authenticate passwords with an LDAP directory server. Storage agents that authenticate node IDs with an LDAP directory server must use a secure connection, such as Transport Layer Security (TLS) or a virtual private network.

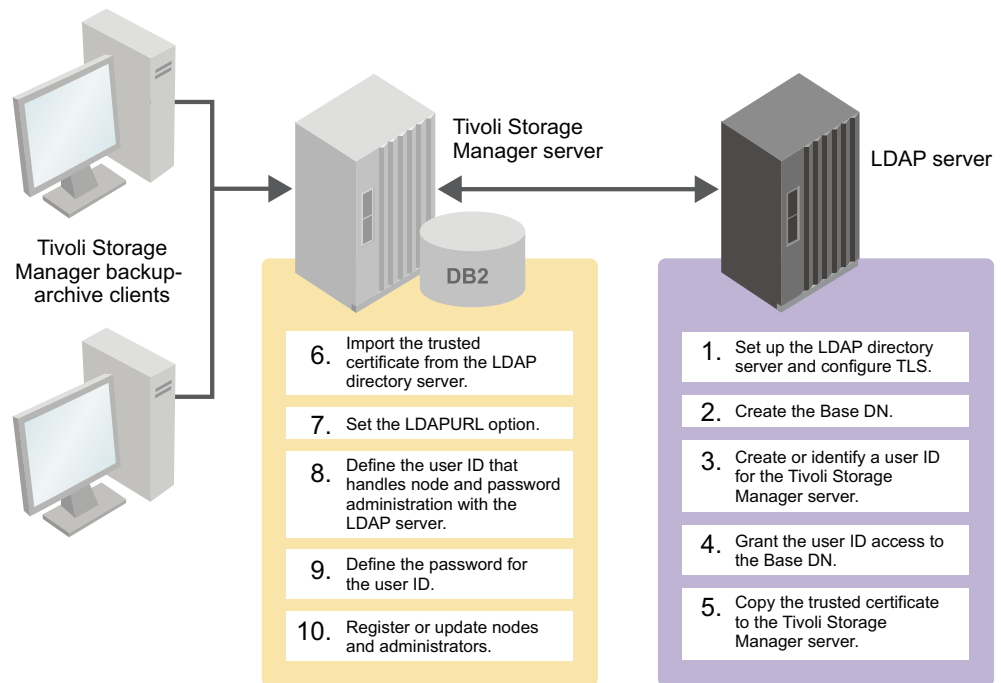


Figure 106. Configuring the server to authenticate passwords with an LDAP directory server

The first step in authenticating passwords with an LDAP directory server is to complete the configuration tasks on the Tivoli Storage Manager server and the LDAP directory server. The following table shows you which steps are accomplished on the two servers:

Table 84. The steps that are required to authenticate passwords with an LDAP directory server, and where the steps are configured

| Steps to authenticate passwords with an LDAP directory server                                                                                                                                                                                                                                                                                               | Where to complete the steps   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| 1. Set up an LDAP directory server                                                                                                                                                                                                                                                                                                                          | LDAP server                   |
| 2. Create the Base DN (distinguished name)                                                                                                                                                                                                                                                                                                                  | LDAP server                   |
| 3. Create a user ID or identify an existing user ID that the Tivoli Storage Manager server can use                                                                                                                                                                                                                                                          | LDAP server                   |
| 4. Grant the user ID access to the Base DN                                                                                                                                                                                                                                                                                                                  | LDAP server                   |
| 5. Copy the trusted certificate from the LDAP directory server to the Tivoli Storage Manager server                                                                                                                                                                                                                                                         | LDAP server                   |
| 6. Import the trusted certificate from the LDAP directory server to the Tivoli Storage Manager server. If you already have a certificate on the LDAP directory server, you do not have to generate a new certificate. You can use the existing certificate to secure communication between the LDAP directory server and the Tivoli Storage Manager server. | Tivoli Storage Manager server |

Table 84. The steps that are required to authenticate passwords with an LDAP directory server, and where the steps are configured (continued)

| Steps to authenticate passwords with an LDAP directory server                                                                                                                                         | Where to complete the steps   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| 7. From the Tivoli Storage Manager server, update the dsmserv.opt file with the <b>LDAPURL</b> option. See the <i>Administrator's Reference</i> for more information about the <b>LDAPURL</b> option. | Tivoli Storage Manager server |
| 8. Define the user ID that administers node and administrator passwords with the LDAP directory server                                                                                                | Tivoli Storage Manager server |
| 9. Define the password for the user ID that administers node and administrator passwords. See the <i>Administrator's Reference</i> for more information about the <b>SET LDAPPASSWORD</b> command.    | Tivoli Storage Manager server |
| 10. Update or register node and administrator IDs to authenticate with an LDAP directory server. See the <i>Administrator's Reference</i> for more information about commands.                        | Tivoli Storage Manager server |

The LDAP directory server interprets letters differently from the Tivoli Storage Manager server. The LDAP directory server distinguishes the case that is used, either uppercase or lowercase. For example, the LDAP directory server can distinguish between *secretword* and *SeCretwOrd*. The Tivoli Storage Manager server interprets all letters for LOCAL passwords as uppercase.

The following terms are used to describe the LDAP directory server environment:

#### Distinguished name (DN)

A unique name in an LDAP directory. The DN can consist of the following information:

- The user ID (uid)
- The organizational unit (ou)
- The organization (o)
- The country (c)
- The common name (cn)
- The domain component (dc)

**Restriction:** You must use ou, cn, and dc with Windows Activity Directory.

The following example DN can be used on an LDAP directory server:

```
uid=jackspratt,ou=users,o=ibm.com,c=us
uid=cbukowski,ou=marketing,o=ibm.com,c=us
uid=abbysmith,ou=sales,o=ibm.com,c=us
```

In this example, the value of user ID is jackspratt. The organizational unit (users), organization (ibm.com), and country (us) comprise the DN.

The following example DN can be used on a Windows Active Directory server and other LDAP directory servers:

```
cn=Jack Spratt,cn=users,dc=storage,dc=us,dc=ibm,dc=com
```

In this example, the value of the first cn is for a user ID with a common name of Jack Spratt. The DN consists of the common names and the domain names.

**Bind** To authenticate with a directory server by using credentials such as a password.

**Bind DN**

The distinguished name that is used to authenticate with the LDAP server. The distinguished name is also the DN of the user ID that is defined in the Tivoli Storage Manager **SET LDAPUSER** command. For example, if the following **SET LDAPUSER** command is used:

```
set ldapuser "cn=Jack Spratt,cn=users,dc=storage,dc=us,dc=ibm,dc=com"
```

then uid=jackspratt,ou=media,cn=security is the bind DN for the LDAP directory server.

**Bind DN password**

The password that is associated with the bind DN.

## Configuring a directory server for password authentication

Before you can authenticate passwords with the LDAP server, you must configure the LDAP server to communicate with the Tivoli Storage Manager server.

### Before you begin

You must know the user ID that was specified in the **SET LDAPUSER** command. For information about the Tivoli Directory access control lists, go to the Tivoli Directory server product information([http://www.ibm.com/support/knowledgecenter/SSVJJU\\_6.3.0/com.ibm.IBMDS.doc/welcome.htm](http://www.ibm.com/support/knowledgecenter/SSVJJU_6.3.0/com.ibm.IBMDS.doc/welcome.htm)).

**Note:** Windows Active Directory users who change passwords when the “Enforce password history” policy is enabled can authenticate with the previous password for 1 hour. For more information, see the Microsoft site(<http://support.microsoft.com/?id=906305>).

### Procedure

Complete the following steps to set up the LDAP directory server so that it can authenticate passwords:

1. Ensure that you have a directory server that is installed on the LDAP server. Use one of the following directory servers:
  - IBM Tivoli Directory Server V6.2 or 6.3
  - Windows Active Directory version 2003 or 2008

**Requirement:** If you use Tivoli Directory Server V6.2, you must update Global Security Kit (GSKit) to V7.0.4.50 or later. For more information, see SSL errors after upgrading to ITDS 6.3 client(<http://www.ibm.com/support/docview.wss?uid=swg21469388>).

2. Create the base distinguished name (Base DN) on the LDAP directory server for the Tivoli Storage Manager namespace. The Base DN is the part of the LDAP directory structure from which Tivoli Storage Manager operates, specified in the **LDAPURL** option. A Base DN can be similar to the following example:

```
cn=Jack Spratt,cn=users,dc=storage,dc=us,dc=ibm,dc=com
```

For instructions about creating a Base DN, go to the IBM Security Tivoli Directory Server online documentation and search for DN. For Windows Active Directory, go to the Microsoft website.

3. Set the **LDAPURL** server option to specify the location of the directory server:

```
ldapurl
ldap://server2.storage.us.ibm.com/ou=tsm,dc=storage,dc=us,dc=ibm,dc=com
```

4. Edit the access controls on the LDAP directory server. For the user ID that is specified in the **SET LDAPUSER** command, grant access to the Base DN. This ID cannot be a part of the Base DN. You can grant access to the Base DN to more than one user ID. If you have too many user IDs with full permission over the Base DN, the security of the LDAP server can be easily compromised. To grant access rights to user ID jackspratt on an LDAP directory server, issue a command similar to the following one. In this example, jackspratt represents the user ID, users represents the organizational unit, ibm.com represents the organization, and us represents the country:

```
set ldapuser "uid=jackspratt,ou=users,o=ibm.com,c=us"
```

To set access rights for user ID Jack Spratt on a Windows Active Directory server, issue the following command. In this example, Jack Spratt and users represent the component name and us, ibm, and com represent the domain component:

```
set ldapuser "cn=Jack Spratt,cn=users,dc=us,dc=ibm,dc=com"
```

**Remember:** You specify the user ID when you issue the **SET LDAPUSER** and **SET LDAPPASSWORD** commands. The Tivoli Storage Manager server authenticates to the LDAP directory server by using the user ID.

5. Set up the directory server. See “Configuring SSL or TLS for LDAP directory servers” on page 865.

## What to do next

To verify that the LDAP directory server is properly set up, complete the following steps on the Tivoli Storage Manager server:

1. Test the forward-DNS and reverse-DNS lookup of the LDAP directory server.
2. Test the network connection with the LDAP directory server.
3. Use an LDAP utility test to connect to the LDAP server and search without Secure Sockets Layer (SSL) or Transport Layer Security (TLS).
4. Use an LDAP utility test to connect to the LDAP server and search with SSL/TLS.

### Related tasks:

“Configuring Tivoli Directory Server for TLS on the iKeyman GUI” on page 866

“Configuring Tivoli Directory Server for TLS on the command line” on page 867

### Related reference:

“Configuring Windows Active Directory for TLS/SSL” on page 868

## Setting the policy for an LDAP-authenticated password

Passwords that you authenticate with a Lightweight Directory Access Protocol (LDAP) server can be managed by the Tivoli Storage Manager server and the LDAP directory server.

You establish policies for passwords that are authenticated by each server.

**Restriction:** You can issue Tivoli Storage Manager server commands to manage your password policies. If you set a password policy on both the LDAP server and Tivoli Storage Manager server, the settings might conflict. The result might be that you are not able to access a node or log on with an administrator ID. For information on the maximum invalid attempts policy, see the table in “Setting a limit for invalid password attempts” on page 886.

In addition to setting a policy for case sensitivity, you can configure the LDAP-authenticated password policy to set the following options:

### Password history

The password history is the number of times that you must define a new password before you can reuse a password.

### Minimum age

The minimum age is the length of time before you can change the password.

### Maximum age

The maximum age is the length of time before you must change the password.

### A combination of characters

You can determine the number of special characters, numbers, and alphabetical characters for your passwords. For example, some products set up a password policy to enforce the following rules:

- The password cannot contain the user account name or parts of the user full name that exceed three consecutive characters
- The password must be at least 8 characters in length
- The password must contain characters from two of the following four categories:
  - English uppercase characters (A through Z)
  - English lowercase characters (a through z)
  - Base 10 digits (0 - 9)
  - Non-alphabetic characters (for example, !, \$, #, %)

Use any of the following characters when you create a password:

```
a b c d e f g h i j k l m n o p q r s t u v w x y z
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
0 1 2 3 4 5 6 7 8 9
~ ! @ # $ % ^ & * _ - + = ` | () { } [] : ; < > , . ? /
```

**Important:** If you issue a **REGISTER NODE** or **REGISTER ADMIN** command, place special characters within quotation marks. For example:

```
register admin JohnDoe "pa$$w0rd<new>" authentication=ldap
```

The LDAP server that you use determines the complexity that you can have for passwords outside of Tivoli Storage Manager.

## Configuring the Tivoli Storage Manager server to authenticate passwords with an LDAP directory server

You can authenticate passwords with an LDAP directory server only after you configure the Tivoli Storage Manager server.

### Procedure

Complete the following steps on the Tivoli Storage Manager server to authenticate passwords with an LDAP directory server:

1. Import the key database file from the LDAP directory server. You can use any method to copy the file from the LDAP directory server to the Tivoli Storage Manager server.
2. Open the `dsmsrv.opt` file and specify the LDAP directory server with the **LDAPURL** option. Specify the LDAP directory server URL and the base distinguished name (Base DN) on the **LDAPURL** option.

**Tip:** The following options are entered on one line, but are displayed here on multiple lines for readability.

For example, in the `dsmsrv.opt` file, specify the following values:

```
ldapurl
ldap://server1.storage.us.ibm.com/ou=tsm,
dc=storage,dc=us,dc=ibm,dc=com
```

The default port is 389. If you want to use a different port number, specify it as part of the **LDAPURL** option. For example, specify a port of 222 with the following **LDAPURL** option:

```
ldapurl
ldap://server1.storage.us.ibm.com:222/ou=tsm,
dc=storage,dc=us,dc=ibm,dc=com
```

3. Restart the Tivoli Storage Manager server.
4. Issue the **SET LDAPUSER** command to specify the ID of the user who can administer Tivoli Storage Manager operations on the LDAP directory server. This user ID must have full administrative authority over the Base DN and be able to add, delete, and modify all Base DN entries. For example, issue the following **SET LDAPUSER** command for LDAP Directory Servers:

```
set ldapuser "uid=jackspratt,ou=users,o=ibm.com,c=us"
```

For example, issue the following **SET LDAPUSER** command for Windows Active Directory servers and other directory servers:

```
set ldapuser "cn=Jack Spratt,cn=users,dc=storage,dc=us,dc=ibm,dc=com"
```

5. Issue the **SET LDAPPASSWORD** command to define the password for the user ID that is defined in the **LDAPUSER** option. For example, issue the following **SET LDAPPASSWORD** command:

```
set ldappassword "boX=T^p$"
```



## Registering nodes and administrator IDs to authenticate passwords with an LDAP directory server

After you configure the LDAP directory server and the Tivoli Storage Manager server, you can register nodes and administrator IDs to manage the Tivoli Storage Manager server.

### About this task

If the user ID and password are verified to be correct, communication lines are opened and the node or administrator ID can run Tivoli Storage Manager applications.

### Procedure

Complete the following step to register either a node or an administrator ID to authenticate with an LDAP directory server:

1. Issue the **REGISTER NODE** or the **REGISTER ADMIN** command from the command-line interface and specify an authentication method. The authentication methods that are available are LDAP or LOCAL.

**LDAP** The administrator ID or node authenticates their password with an LDAP directory server.

#### LOCAL

The administrator ID or node authenticates their password with the Tivoli Storage Manager server.

For example:

```
register admin admin1 "c0m=ple#Pa$$w0rd?s" authentication=ldap
register node node1 "n0de^Passw0rd%s" authentication=ldap
```

After you issue the commands, the passwords for administrator ID *admin1* and the node ID *node1* can be authenticated with an LDAP directory server.

**Tip:** A node and its password or an administrator ID and its password each occupy one inetOrgPerson object on the LDAP directory server. For information about inetOrgPerson objects, see Definition of the inetOrgPerson LDAP Object Class (<http://www.ietf.org/rfc/rfc2798.txt>).

To know which authentication method is in use, issue the **QUERY NODE FORMAT=DETAILED** or **QUERY ADMIN FORMAT=DETAILED** command.

2. Optional: To register all new nodes and administrator IDs with a default authentication method, issue the **SET DEFAULTAUTHENTICATION** command. Any **REGISTER NODE** or **REGISTER ADMIN** commands that are issued after you issue the **SET DEFAULTAUTHENTICATION** command create nodes and administrators with the default authentication method. You can set the authentication methods to LDAP or LOCAL.

For information about the **SET DEFAULTAUTHENTICATION** command, see the *Administrator's Reference*.



## Updating nodes and administrator IDs to authenticate passwords with a directory server

Node and administrator ID passwords can be authenticated with an LDAP directory server or with Tivoli Storage Manager. You can use either authentication method.

### About this task

When you authenticate nodes and administrator IDs with an LDAP directory server, you ensure more protection for your passwords. Communication lines between the LDAP directory server and Tivoli Storage Manager are protected with Transport Layer Security (TLS).

You can change a password authentication method after you configure the LDAP directory server and the Tivoli Storage Manager server. However, you cannot update the authentication method for your own user ID unless you have system authority. If necessary, another administrator must change the authentication method.

### Procedure

To change a node or administrator password authentication method, complete the following steps:

1. From the Tivoli Storage Manager server, issue the **UPDATE NODE** or **UPDATE ADMIN** command. You do not have to include a password in the command. If you do not include a password, you are asked for a new password at the next login. You must then enter a password with a combination of uppercase, lowercase, and numbers or valid characters. For example:

```
update admin harry authentication=ldap
```

The following example **UPDATE NODE** command has a password that is made up of characters that are supported by the Tivoli Storage Manager server:

```
update node node1 n0de^87^n0de authentication=ldap
```

**Tip:** A shared LDAP server might have a password that is on the LDAP directory server. In that case, the user is not prompted to enter a new password.

2. Optional: Issue the **QUERY NODE FORMAT=DETAILED** or the **QUERY ADMIN FORMAT=DETAILED** command to view the results. If you must change the authentication method for several nodes or administrator IDs, you can use a wildcard character (\*). For example:

```
update node * authentication=ldap
```

In the preceding example, the authentication method for all nodes is changed to "LDAP pending."

### What to do next

All nodes and administrator IDs require new passwords after you run the **UPDATE** command. Before the node and administrative IDs are given a password, they are in the LDAP pending state. The node and administrator IDs are updated to use LDAP authentication, but you must first give them a password.

## Determining which nodes and administrator IDs are configured to authenticate with an LDAP server

You might have a mixture of nodes or administrator IDs that can and cannot authenticate with an LDAP directory server. After you update nodes and administrator IDs to authenticate with an LDAP directory server, you can see which nodes or administrator IDs are using them.

Tivoli Storage Manager backup-archive clients must be at version 6.4 or later to authenticate passwords with an LDAP directory server. If all of the backup-archive clients are not upgraded to version 6.4 or later, you cannot authenticate all nodes with an LDAP directory server. To determine which nodes or administrator IDs are configured to authenticate with an LDAP directory server, you can use the **QUERY NODE** or **QUERY ADMIN** command.

### Example: Determine which nodes are configured to authenticate with an LDAP server

Find the nodes that are authenticated with the LDAP directory server:

```
query node authentication=ldap
```

### Example: Determine which administrator IDs are configured to authenticate with the Tivoli Storage Manager server

Find the administrator IDs that do not authenticate their passwords with an LDAP directory server:

```
query admin authentication=local
```

### Example: Determine the password authentication method for one node

You can query individual nodes or administrator IDs to determine whether they authenticate with an LDAP directory server. To determine the password authentication method for node tivnode\_12 issue the following command:

```
query node tivnode_12 format=detailed
```

## Modifying the default password expiration period for passwords that are managed by the Tivoli Storage Manager server

By default, the Tivoli Storage Manager server sets a password expiration of 90 days. The expiration period begins when an administrator ID or client node is first registered to the server. If a user's password is not changed within this period, the user must change the password the next time they access the server.

### About this task

Issue the **SET PASSEXP** command to set the password expiration period for selected administrator IDs or client nodes. You must specify the administrator ID or node name with the **ADMIN** or **NODE** parameter in the **SET PASSEXP** command. If you set the expiration period only for selected users, the expiration period can be 0 - 9999 days. A value of 0 means that user's password never expires.

**Restriction:** The **SET PASSEXP** command does not affect administrator IDs and nodes if their passwords are authenticated with an LDAP directory server.

The password expiration period for passwords that are authenticated with an LDAP directory server must be defined on the LDAP server.

## Procedure

Issue the following command to set the expiration period of client node node\_tsm12 to 120 days:

```
set passexp 120 node=node_tsm12
```

After you explicitly set password expiration for an administrator ID, it is not modified if you later set a password expiration for all users. You can use the **RESET PASSEXP** command to reset the password expiration period to the common expiration period. Use the **QUERY STATUS** command to display the common password expiration period.

### Related concepts:

“Setting the policy for an LDAP-authenticated password” on page 881

## Setting a limit for invalid password attempts

By default, Tivoli Storage Manager does not check the number of times a user attempts to logon with an invalid password. You can set a limit on consecutive invalid password attempts for all client nodes. When the limit is exceeded, the server locks the node.

### About this task

If you authenticate passwords with an LDAP directory server, determine on which server the invalid attempts are to be configured. Invalid password attempts can be configured on an LDAP directory server, outside of the Tivoli Storage Manager server. But the consequence of setting the number of invalid attempts on the LDAP directory server might pose some problems. For example, when the **REGISTER NODE** command is issued, the default behavior is to name the node administrator the same name as the node. The LDAP server does not recognize the difference between the node “NODE\_Q” and the administrator “NODE\_Q”. The node and the administrator can authenticate to the LDAP server if they have the same password. If the node and administrator have different passwords, the authentication fails for either the node or administrator. If the node or the administrator fail to log on consistently, their IDs are locked. You can avoid this situation by issuing the **REGISTER NODE** command with **USERID=userid** or **USERID=NONE**.

Consider the maximum invalid attempts policy:

Table 85. The consequences of setting the maximum invalid attempts on both the Tivoli Storage Manager server and the LDAP server for a node and admin that share a name

| Authentication method                          | Tivoli Storage Manager password setting<br>(A maximum of 3 invalid attempts)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | LDAP directory server setting<br>(A maximum of 3 invalid attempts)                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| With an LDAP directory server (LDAP)           | The password that is provided during authentication is attempted for both the node and administrator that share a name. The policy does not affect the node or administrators that are authenticating to the Tivoli Storage Manager server, even when their passwords are different. The Tivoli Storage Manager server recognizes that the node and administrator share a name and authenticates both simultaneously. If the passwords are not the same and the correct node password is provided on 3 attempts, the administrator's incorrect password is ignored. No invalid login attempts are recorded. | The password that is provided during authentication is attempted for both the node and administrator that share a name. If the node and administrator have different passwords, the authentication on the LDAP server fails for either the node or administrator. If the correct node password is provided on 3 consecutive attempts, the administrator authentication fails on those same 3 attempts. The administrator ID gets locked out after the third attempt. |
| With the Tivoli Storage Manager server (LOCAL) | Has 3 attempts to get the correct password.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Not applicable.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

On the Tivoli Storage Manager server, issue the **SET INVALIDPWLIMIT** command to limit the invalid password attempts for the Tivoli Storage Manager namespace.

### Procedure

To set a system-wide limit of three consecutive invalid password attempts, issue the following example command:

```
set invalidpwlimit 3
```

The default value at installation is 0. A value of 0 means that invalid password attempts are not checked. You can set the value 0 - 9999 attempts.

If you initially set a limit of 4 and then reduce the limit, some clients might fail verification during the next logon attempt.

After a client node is locked, only an administrator with storage authority can unlock the node.

An administrator can also force a client to change their password on the next logon by specifying the **FORCEPWRESET=YES** parameter on the **UPDATE NODE** or **UPDATE ADMIN** command. For more information, see the *Administrator's Reference*.

### Related tasks:

“Locking and unlocking client nodes” on page 449

“Locking and unlocking administrator IDs from the server” on page 876

## Setting a minimum length for a password

By default, Tivoli Storage Manager does not check the length of a password. The administrator can specify a minimum password length that is required for Tivoli Storage Manager passwords.

### About this task

This feature affects all node and administrator passwords, whether the password authenticates with the Tivoli Storage Manager server or the LDAP directory server.

You can configure the parameters of your LDAP-authenticated passwords on the LDAP directory server. The settings that you configure might conflict with the Tivoli Storage Manager server settings.

### Procedure

To set the minimum password length to 8 characters, issue the following example command:

```
set minpwlength 8
```

The default value at installation is 0. A value of 0 means that the password length is not checked. You can set the length value 0 - 64.

## Disabling the default password authentication

By default, the server automatically sets password authentication to "on." With password authentication set to on, all users must enter a password when you access the server.

### About this task

You can disable password authentication only for passwords that authenticate with the Tivoli Storage Manager server (LOCAL).

### Procedure

To allow administrators and client nodes to access the Tivoli Storage Manager server without entering a password, issue the following command:

```
set authentication off
```

**Remember:** Setting password authentication to "off" reduces data security.

## Scenarios for authenticating passwords

The following example scenarios are for authenticating passwords with an LDAP directory server.

### Scenario 1: Register one node to authenticate its password with an LDAP directory server

The Tivoli Storage Manager server administrator has a new node that must authenticate its password with an LDAP directory server. The first action is to create the "cn=tsmdata" entry and Base DN on the LDAP directory server. The server administrator can then set up the **LDAPURL** option that is based on the Base DN. Here is an example entry for the **LDAPURL** option:

#### **dsm serv.opt**

```
ldapurl ldap://server.storage.us.ibm.com/
ou=tsm,dc=storage,dc=us,dc=ibm,dc=com
```

After you set the **LDAPURL** option, restart the server. Complete the following steps to configure the server:

1. Issue the query option `ldapurl` command to validate that you entered all of the values correctly.
2. Issue the set `ldapuser uid=jackspratt,ou=users,o=ibm,c=us` command to configure the **LDAPUSER** on LDAP directory servers.  
For Windows Active Directory and other directory servers, issue `set ldapuser "cn=Jack Spratt,cn=users,dc=us,dc=ibm,dc=com"`.
3. Issue the `SET LDAPPASSWORD adsm4Data` command to define the password.
4. For this scenario, the node that must be added is **NODE1**. Issue the following command:

```
register node c0mplexPassw0rd NODE1 authentication=ldap
```

### **Scenario 2: Update a node to authenticate with an LDAP directory server**

A single node (**UPDNODE1**) that currently authenticates with the Tivoli Storage Manager server is now required to authenticate with an LDAP directory server. For **UPDNODE1**, use the **AUTHENTICATION** parameter in the **UPDATE NODE** command. For example:

```
update node updnodel newC0mplexPW$ authentication=ldap
```

If you do not want to specify a password now, you can run the command without it. At the next logon, either you enter a new password or the password is generated automatically. If the `passwordaccess=generate` option is set, a new password is generated for you.

### **Scenario 3: Update all nodes to authenticate their password with an LDAP directory server**

If you want to update all your nodes to authenticate with an LDAP directory server, you can use a wildcard. Issue the following command to have all the nodes authenticate with an LDAP directory server:

```
update node * authentication=ldap
```

### **Scenario 4: Determine the authentication method of a node**

If you have nodes that authenticate with the Tivoli Storage Manager server and nodes that authenticate with an LDAP directory server, you can determine where nodes are authenticating. Issue the following command to determine which nodes authenticate with an LDAP directory server:

```
query node authentication=ldap
```

Issue the following command to determine which nodes authenticate with the Tivoli Storage Manager server:

```
query node authentication=local
```

## Scenario 5: Locking nodes that authenticate with the Tivoli Storage Manager server

You can issue a **LOCK NODE** command to lock all nodes that authenticate with the Tivoli Storage Manager server. These nodes might be rarely used, and you might not know by which password authentication method they are supposed to be managed. When you lock the nodes, the node owners must consult with you. At that point, you can find out whether they want to use the LDAP directory server or stay with the Tivoli Storage Manager server. You can issue the **LOCK NODE** or **UNLOCK NODE** commands with a wildcard to lock or unlock all nodes in that group. To lock all nodes that authenticate with the Tivoli Storage Manager server, issue the following command:

```
lock node * authentication=local
```

## Scenario 6: Setting up a default authentication method

After you configure everything, you can design it so that every new node and administrator authenticate with an LDAP directory server. After you issue the **SET DEFAULTAUTH** command, you do not have to designate the authentication method for any **REGISTER NODE** or **REGISTER ADMIN** commands. Issue the following command to set the default authentication method to LDAP:

```
set defaultauth=ldap
```

Any **REGISTER NODE** or **REGISTER ADMIN** command that is issued after this **SET DEFAULTAUTH** command inherits the authentication method (LDAP). If you want to register a node that authenticates with the Tivoli Storage Manager server, include **AUTHENTICATION=LOCAL** in the **REGISTER NODE** command.

## Enabling unified logon with backup-archive clients

The Tivoli Storage Manager unified logon feature allows the Tivoli Storage Manager server to use the Windows user account database when you authenticate a backup-archive client logon.

With this feature, a user can log on to a Windows computer and access the backup-archive client without entering another password. When unified logon is enabled, the server continues to use its normal authentication methods for protocols other than Named Pipes.

The procedure described here assumes that the Tivoli Storage Manager server and all the Tivoli Storage Manager client computers are in the same Windows domain. A Windows domain is a way of allowing the Windows Domain Controller to manage the user accounts for all members of the domain. The Tivoli Storage Manager unified logon procedure takes advantage of the convenience of allowing the Windows domain to manage user accounts.

**Tip:** The Tivoli Storage Manager server can run successfully on the Windows server or workstation operating system and does not have to reside on the Windows Domain Controller computer.

To enable unified logon, you must have the following system requirements:

- The backup-archive client must be installed on a supported Windows operating system.
- The Tivoli Storage Manager server must enable the Named Pipes protocol.
- The backup-archive client must use the Named Pipes communications method.



The unified logon feature applies only to node and administrator passwords that authenticate to the Tivoli Storage Manager server. Passwords that are stored and authenticate to an LDAP directory server are not affected by this feature. Authentication must be **LOCAL** (Tivoli Storage Manager server) for unified logon to apply.

## Enabling unified logon

Unified logon allows the Tivoli Storage Manager server to use the Windows user account database. With this feature, a user can log on to a Windows computer and access the backup-archive client without entering another password.

## About this task

Unified logon affects node and administrator passwords that authenticate to the Tivoli Storage Manager server. Passwords that authenticate to an LDAP directory server are not affected.

## Procedure

Perform the following steps to enable unified logon:

1. From the Windows Domain Controller, perform the following steps to authorize Tivoli Storage Manager users by creating a Windows global group and adding users:
  - a. Open the **User Manager for Domains** from **Administrative Tools**.
  - b. Click **User > New Global Group**.
  - c. For Group Name enter, for example, ADSMSERVER.
  - d. Add users to the ADSMSERVER group by selecting **Add**.
  - e. Click **OK** to add the group.
  - f. Reboot the server workstation to enable the groups.
2. To stop the server, issue the following command from the Tivoli Storage Manager command prompt:  
`halt`
3. Perform the following steps to configure Tivoli Storage Manager server service to use the administrator account:
  - a. Right-click on the server you want to work with, and select **Properties**. On Windows: **Start > Control Panel > Administrative Tools > Services**.
  - b. From the **Startup Type** section, select **Automatic**.
  - c. From the **Log On As** section, select **This Account** and change LocalSystem to DOMAIN\Administrator.
  - d. Enter the password of the Windows Domain administrator account.
  - e. Click **OK** to continue.
4. The preceding procedure is the same as entering the following lines in the server options file (dsmserv.opt):  
`adsmgroupname tmsserver  
commethod namedpipe  
namedpipename \\.\pipe\server1  
securepipes yes`
  - a. Click the **Named Pipes** tab and perform the following steps:
5. Perform the following steps to restart the Tivoli Storage Manager server:
  - a. From the left pane, expand the Tivoli Storage Manager server.
  - b. Expand Reports.



- c. Click **Service Information**.
  - d. From the right pane, select the server and click **Start**. The status for the server changes to **Running**.
6. Ensure that the backup-archive clients that you added to the Tivoli Storage Manager server group are registered Tivoli Storage Manager client nodes.

**Important:** The node password that is assigned during node registration is ignored by the authentication process when unified logon is enabled. Instead, the Windows domain password is used.

- 7. From each client workstation, all users must ensure that they are members of either the Administrators group or the Backup Operators group on their workstations.
- 8. Reboot the client workstation to enable the group.
- 9. Edit the client options file (dsm.opt) to set up the backup-archive client to use unified logon. Ensure that the following options are active (the asterisk is deleted). For example:

```
commethod namedpipe
namedpipename \\server_name\pipe\server1
nodename username
passwordaccess generate
```

**Tip:**

- a. In the example, server\_name is the NetBIOS name of the computer where the Tivoli Storage Manager server is running.
- b. In the example, nodename can be substituted with the name of the workstation where the Tivoli Storage Manager server is installed.
- c. The username must be the same as the Windows account name that the user is logged in as.

```
commethod namedpipe
namedpipename \\server_name\pipe\server1
nodename username
passwordaccess generate
```

**Tip:**

- a. In the example, server\_name is the NetBIOS name of the computer where the Tivoli Storage Manager server is running.
  - b. In the example, nodename can be substituted with the name of the workstation where the Tivoli Storage Manager server is installed.
  - c. The username must be the same as the Windows account name that the user is logged in as.
10. To verify that unified logon is enabled, start the backup-archive client. You can also complete a backup and restore.

**Related tasks:**

“Registering nodes with the server” on page 434

---

## Chapter 27. Protecting and recovering the server infrastructure and client data

The Tivoli Storage Manager infrastructure consists of the database and the setup files that are required to recover the database and client data. The setup files include, for example, the active log and the archive log. Client data includes data that is backed up, archived, and migrated to primary storage pools.

### About this task

Clustering is a high-availability solution that minimizes or eliminates many potential sources of downtime.

Database backups, infrastructure setup files, and copies of client data can be stored offsite, as shown in Figure 107.

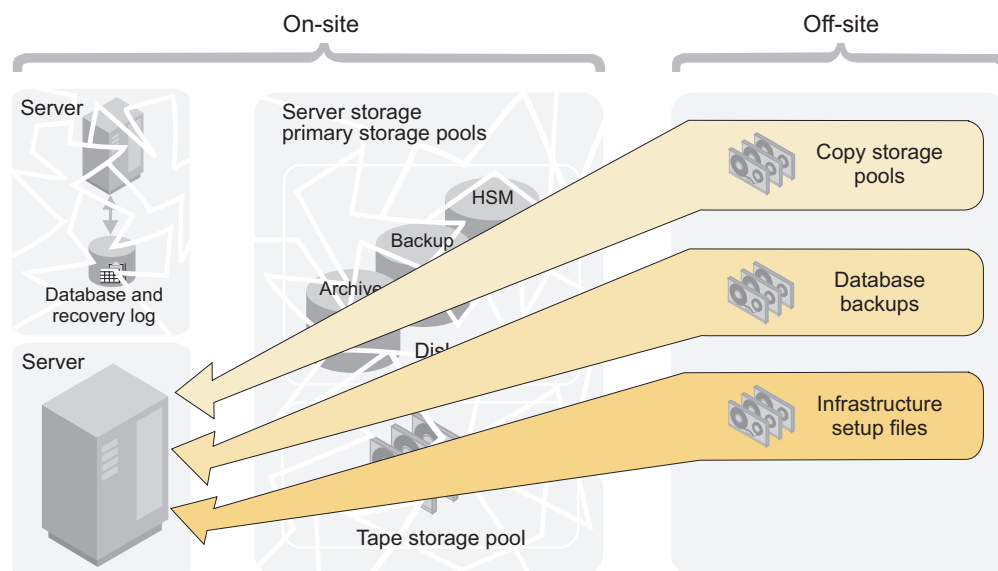


Figure 107. Recovery from a disaster

**DRM:** The disaster recovery manager (DRM ) can automate some disaster recovery tasks. A note like this one identifies those tasks.

### Related concepts:

Chapter 29, “Configuring clustered environments,” on page 1019

“Storage pool hierarchies” on page 27

---

## Protecting the database and infrastructure setup files

To restore a damaged or lost database you must have a database backup. You must also have copies of the files that are required to recover the database and client data. Database backup media and setup files can be stored offsite for protection.

**Restriction:** Database mirroring is not possible with Tivoli Storage Manager. However, you can mirror the database by using operating system or file system capabilities. You can also use device redundancy such as RAID capabilities in the storage that is used for the server database.

---

**DRM:** To store database backup media and setup files offsite, you can use disaster recovery manager.

---

### Related tasks:

Chapter 30, “Disaster recovery manager,” on page 1033

## Backing up the server database

When the Tivoli Storage Manager server is first started, a full backup starts automatically. After the initial full backup, the database is backed up automatically by the database manager. To ensure that the database can be restored to an acceptable point-in-time, you can schedule daily backups or backup the database manually.

### About this task

Automatic backups by the database manager are based on the following values that are set by Tivoli Storage Manager:

- The active log space that was used since the last backup, which triggers a full database backup
- The active log utilization ratio, which triggers an incremental database backup

You can back up the database to tape, FILE, or to remote virtual volumes.

To set up regular database backups, complete the following tasks:

- “Step 1: Defining device classes for database backups” on page 895
- “Step 2: Specifying virtual address space for database manager processes” on page 895
- “Configuring concurrent multistreaming” on page 896
- “Step 4: Configuring compression for a database backup” on page 899
- “Step 5: Running database backups” on page 900

### Related concepts:

“Active log” on page 638

“Database: Overview” on page 634

### Related tasks:

“Storing data on another server as virtual volumes” on page 726

“Increasing the size of the active log” on page 671

## Step 1: Defining device classes for database backups

You can use existing device classes for database backups or you can define new ones. You can also specify device classes for incremental backups that are different from the device classes for full backups. For example, you might want to write full backups to tape and incremental backups to disk.

### About this task

Reserve the device class that you want to use for backups so that the server does not attempt to back up the database if a device is not available. If a database backup shares a device class with a lower priority operation, such as reclamation, and all the devices are in use, the lower priority operation is automatically canceled. The canceled operation frees a device for the database backup.

**Restriction:** Tivoli Storage Manager does not support database backup (loading and unloading) to a CENTERA device.

### Procedure

To specify the device class to be used for database backups, issue the **SET DBRECOVERY** command. For example, to specify a device class that is named DBBACK, issue the following command:

```
set dbrecovery dbback
```

#### Tips:

- When you issue the **SET DBRECOVERY** command, you can specify the number of concurrent data streams to use for the backup. To specify the number of concurrent data streams, use the **NUMSTREAMS** parameter. You can also specify whether volumes that are created during backup processing are compressed by using the **COMPRESS** parameter.
- To change the device class, reissue the **SET DBRECOVERY** command.
- If you issue the **BACKUP DB** command with the **TYPE=FULL** parameter, and the device class is not the one that is specified in the **SET DBRECOVERY** command, a warning message is issued. However, the backup operation continues and is not affected.
- Device class definitions are saved in the device configuration files.

#### Related concepts:

“Configuring concurrent multistreaming” on page 896

#### Related tasks:

“Protecting the device configuration file” on page 904

## Step 2: Specifying virtual address space for database manager processes

Specify the percentage of the virtual address space that is dedicated to database manager processes.

### About this task

By default, the percentage of the virtual address space that is dedicated to all database manager processes is set to 70 - 80 percent of system random-access memory.

## Procedure

To change this setting, specify the DBMEMPERCENT server option. Ensure that the value that you specify provides adequate memory for applications other than the Tivoli Storage Manager are running on the system.

### Configuring concurrent multistreaming

Multiple, concurrent data streams reduce the time that is required to back up or restore the database. You can specify the number of data streams that the Tivoli Storage Manager server uses for backup and restore operations.

For example, if you assign four drives to database backup processing, Tivoli Storage Manager attempts to write to all four drives concurrently. For restore operations, the server uses the information that is in the volume history file to determine the number of data streams that were used during the backup operation. The server attempts to use the same number of data streams during the restore operation. For example, if the backup operation used four data streams, the server attempts the restore operation by using four data streams.

The following table summarizes server actions for different drive-availability scenarios. An *available drive* is a drive that is online and that is ready for use by the server.

| Operation | If the number of available drives exceeds the specified number of streams, the server uses                                                                                                                      | If the number of available drives equals the specified number of streams, the server uses           | If the number of available drives is less than the specified number of streams, the server uses |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Backup    | The number of drives that is equal to the specified number of streams.                                                                                                                                          | The number of drives that is equal to the specified number of streams.                              | All available drives.                                                                           |
| Restore   | The number of drives that is equal to the number of streams that were used in the backup operation. A restore process never uses more drives than the number of streams that were used to back up the database. | The number of drives that is equal to the number of streams that were used in the backup operation. | All available drives. At least one drive is required for restore processing                     |

Suppose that you specify four data streams for database backup operations. To indicate the maximum number of volumes that can be simultaneously mounted, you specify 4 as the value of the **MOUNTLIMIT** parameter in the device class definition. If only three drives are available at the time of the backup operation, the operation runs by using three drives. A message is issued that indicates that fewer drives are being used for the backup operation than the number requested. If all four drives for the device class are online, but one drive is in use by another operation, the backup operation has a higher priority and preempts use of the drive. If you specify four data streams, but the value of the **MOUNTLIMIT** parameter is 2, only two streams are used.

**Important:** Although multiple, concurrent data streams can reduce the time that is required for a backup operation, the amount of time that you can save depends on the size of the database. In general, the benefit of using multiple, concurrent data streams for database backup and restore operations is limited if the database is less than 100 GB.

Another potential disadvantage is that more volumes are required for multistream processing than for single-stream processing. For example, if the backup of an 850 GB database requires a single linear tape open (LTO) volume, switching to four data streams requires four volumes. Furthermore, those volumes might be partially filled, especially if you use high-capacity volumes and device compression. For example, if the backup of an 850 GB database uses only 30% of a tape volume after compression, then four-stream processing results in larger amounts of wasted space.

### **Planning for concurrent multistreaming during database backup and restore operations:**

The decision to use multiple, concurrent data streams for database backup and restore operations depends on the size of the database, the cost of media, and performance impacts.

### **Before you begin**

When you decide whether to use data-streaming, consider the following issues to determine whether the benefits of concurrent data-streaming are sufficient. If the disadvantages of multiple, concurrent data-streaming exceed the benefits, continue to use single-stream processing.

- What is the size of your database? In general, the amount of time that you save by using multiple, concurrent data streams decreases as the size of the database decreases. The amount of time that you save decreases because of the extra time that is caused by extra tape mounts. If your database is less than 100 GB, the amount of time that you save might be relatively small.

In many environments with databases larger than 100 GB, two database-backup streams can provide superior performance. However, depending on your environment, more streams might not provide enough I/O throughput relative to the size of your database, the devices that you use, and the I/O capability of your environment. Use three or four database-backup streams only for environments in which the following conditions apply:

- The Tivoli Storage Manager database is on high-performing disk subsystems.
- The database is spread across several different RAID arrays that use multiple database directories.
- How many drives are available for the device class to be used for database backup?
- Are there server operations other than database backup operations that are competing for drives?
- If drives are preempted by a database backup operation, what is the effect on server operations?
- What is the cost of the tape volumes that you use for database backup operations? For example, suppose that the backup of an 850 GB database requires a single high-capacity LTO volume. If you specify four streams, the same backup operation requires four volumes.

## Specifying multiple data streams for database backup operations:

You can specify multiple data streams for automatic or manual database-backup operations. For database restore operations, the server attempts to use the same number of data streams that you specified for the backup operation.

### Procedure

To specify multiple data streams, complete one of the following steps:

- For automatic database-backup operations, issue the **SET DBRECOVERY** command and specify a value for the **NUMSTREAMS** parameter. For example, if you have a device class DBBACK, issue the following command to specify two data streams:  

```
set dbrecovery dbback numstreams=2
```
- For manual database-backup operations, issue the **BACKUP DB** command and specify a value for the **NUMSTREAMS** parameter. The value of the **NUMSTREAMS** parameter that you specify with the **BACKUP DB** command overrides the value for the **NUMSTREAMS** parameter that you specify with the **SET DBRECOVERY** command. For example, if you have a device class DBBACK, issue the following command to specify three data streams:  

```
backup db dbback numstreams=3
```

### Example

#### Tips:

- To change the number of data streams for automatic database backup operations, reissue the **SET DBRECOVERY** command and specify a different value for the **NUMSTREAMS** parameter. For example, reissue the **SET DBRECOVERY** command if you add more drives to the target library or if drives are not available because of maintenance or device failure. The new value that is specified by the **NUMSTREAMS** parameter is used for the next backup operation.
- To display the number of data streams that are to be used for a database backup operation, issue the **QUERY DB** command.
- During a database backup operation, the number of sessions that is displayed in the output of the **QUERY SESSION** command or the **SELECT** command is equal to or less than the number of specified data streams. For example, if you specified four data streams, but only three drives are online, 3 sessions are displayed in the output. If you issue the **QUERY DRIVE** command, the number of drives in use is also 3.
- If you reduce the number of data streams after a database backup operation, this information will not be available to the server when the database is restored. To specify fewer data streams for the restore operation, take one or both of the following actions in the device configuration file:
  - Reduce the number of online and usable drive definitions by removing **DEFINE DRIVE** commands.
  - Update the value of the **MOUNTLIMIT** parameter of the **DEFINE DEVCLASS** command.
  - During database backup operations, stop other Tivoli Storage Manager database activities. Other database activities compete for database I/O and affect throughput during database backup operations that use multiple streams.

## Step 4: Configuring compression for a database backup

You can use the **COMPRESS** parameter on the **BACKUP DB** or **SET DBRECOVERY** commands to choose which Tivoli Storage Manager database backups are compressed.

### Before you begin

Before you configure compression for a database backup, you must consider the benefits. The results that you achieve might differ, depending on your hardware and software environment, and the size of the server database.

The following table shows the results that were obtained in lab tests.

Table 86. Database compression results during lab tests

|                                  | AIX system    | Linux system  | Linux system    | Windows System | Windows System  |
|----------------------------------|---------------|---------------|-----------------|----------------|-----------------|
| Size of server database          | 9,330 MB      | 11,200 MB     | 1,356,706 MB    | 26,528 MB      | 1,573,978 MB    |
| Random access memory             | 32 GB         | 16 GB         | 48 GB           | 16 GB          | 64 GB           |
| Processor Usage: Compression off | 11.70%        | 9.20%         | 26.75%          | 8.60%          | Not Collected   |
| Processor Usage: Compression on  | 89.60%        | 57.10%        | 8.94%           | 20.70%         | Not Collected   |
| Backup duration: Compression off | 12:39 minutes | 03:16 minutes | 0:56:46 minutes | 04:43 minutes  | 1:24:36 minutes |
| Backup duration: Compression on  | 06:15 minutes | 02:19 minutes | 4:09:30 minutes | 06:54 minutes  | 6:48:17 minutes |

### About this task

By compressing volumes that are created during database backups, you reduce the amount of space that is required for your database backups.

### Procedure

To configure compression, specify the **COMPRESS** parameter with the **BACKUP DB** or **SET DBRECOVERY** commands. For example,

```
backup db devclass=file type=incremental compress=yes
```

If you specify the **COMPRESS** parameter on the **BACKUP DB** command, it overrides any value that is set in the **SET DBRECOVERY** command. Otherwise, the value that is set in the **SET DBRECOVERY** command is used.

### Restrictions:



- Use caution when you specify the **COMPRESS** parameter. Using compression during database backups can reduce the size of the backup files. However, compression can increase the time that is required to complete database backup processing.
- Do not back up compressed data to tape. If your system environment stores database backups on tape, set the **COMPRESS** parameter to No in the **SET DBRECOVERY** and **BACKUP DB** commands.

## Step 5: Running database backups

Database backups can be full, incremental, or snapshot. An incremental backup includes all the changes since the last full backup. You can schedule the backups to occur automatically, or you can back up the database manually. A snapshot database backup is a full database backup that does not interrupt the current full and incremental backup series.

### About this task

Ensure that you can recover the database to its most current state or to a specific point-in-time by making both full and incremental database backups:

- To restore the database to its most current state, you need the last full backup, the last incremental backup after that full backup, and the active and archive log files.

**Restriction:** You cannot use snapshot database backups to restore a database to its most current state.

- To restore a database to a point-in-time, you need the last full backup before the point-in-time and the last incremental backup after the last full backup before the point-in-time.

You can also use snapshot database backups to restore a database to a point-in-time.

Tivoli Storage Manager can make full and incremental database backups to tape while the server is running and available to clients. However, when you decide what backups to do and when to do them, consider the following properties of backups:

- Full backups take longer than incremental backups.
- Full backups have shorter recovery times than incremental backups because you must load only one set of volumes to restore the entire database.
- Full backups are required for the first backup and after you extend the database size.
- Only full backups prune archive log space in the archive log directory. If the available active and archive log space gets low, full database backups occur automatically. To help prevent space problems, schedule regular full backups frequently.

**Tips:** To protect the database, use the following guidelines:

- Store the database backup media an off-site location for protection.
- Back up the database immediately after you back up the storage pools.
- Turn off migration and reclamation while you back up the database.
- Do not issue the **MOVE DATA** command while you back up the database.

### Backing up the database manually:

To back up the database manually, issue the **BACKUP DB** command from an administrative client or from the server console.

#### About this task

For a full database backup, specify **TYPE=FULL**. For an incremental database backup, specify **TYPE=INCREMENTAL**. For example, to run a full database backup by using a device class LTOTAPE, three volumes, and three concurrent data streams, issue the following command:

```
backup db devclass=ltotape type=full volumenames=vol1,vol2,vol3
numstreams=3
```

### Scheduling database backups:

Database backups require devices, media, and time. Consider scheduling backups at specific times of the day and after major storage operations.

#### About this task

Consider scheduling database backups after the following types of operations:

- Regular client backup or archive operations
- Storage pool migration and reclamation
- Storage pool backups
- **MOVE DATA** or **DELETE VOLUME** command operations

For example, you might back up your storage pools daily and then immediately back up the database.

#### Procedure

To schedule database backups, use the **DEFINE SCHEDULE** command. For a full database backup, specify **TYPE=FULL**. For an incremental database backup, specify **TYPE=INCREMENTAL**. For example, to set up a schedule to run a full backup to device class FILE every day at 1:00 a.m., enter the following command:

```
define schedule daily_backup type=administrative
cmd="backup db deviceclass=file type=full" starttime=01:00
```

### Running snapshot database backups:

A snapshot database backup is a full database backup that does not interrupt the full and incremental backup series. You can use snapshot database backups in addition to full and incremental backups.

#### Procedure

To make a snapshot database backup, issue the **BACKUP DB** command. For example, to make a snapshot database backup to the TAPECLASS device class, enter the following command:

```
backup db type=dbsnapshot devclass=tapeclass
```

New volume history entries are created for the snapshot database volumes.

**Restriction:** To prevent the accidental loss of what might only way to recover the server, you cannot delete the most current snapshot database by using the **DELETE VOLHISTORY** command.

**Related concepts:**

“Volume history file and volume reuse” on page 84

**Related tasks:**

“Protecting the volume history file” on page 903

## Protecting infrastructure setup files

Infrastructure setup files are prerequisites for recovering the Tivoli Storage Manager database and client data. In most cases, these files cannot be re-created, so you must ensure that copies are up-to-date and easily accessible.

### Protecting the active, archive, and archive failover logs

The active log, which records transactions that are in progress on the server, is necessary to restore the database to its most current state. The archive log contains copies of closed log files that were in the active log. The archive log is not needed for normal processing, but it is typically needed for recovery of the database.

#### About this task

For protection against database and log media failures, place the active log and the archive log in different file systems. In addition, mirror both logs. Mirroring simultaneously writes data to two independent disks. For example, suppose that a sudden power outage causes a partial page write. The active log is corrupted and is not readable. Without mirroring, recovery operations cannot complete when the server is restarted. However, if the active log is mirrored and a partial write is detected, the log mirror can be used to construct valid images of the missing data.

To protect the active log, the archive log, and the archive failover log, take the following steps:

#### Procedure

- To specify the active log mirror, use the **MIRRORLOGDIRECTORY** parameter on the **DSMSERV FORMAT** command. Mirror the active log in a file system that exists on a different disk drive than the primary active log.

**Tip:** To specify the active log mirror, you can also use the **MIRRORLOGDIRECTORY** server option.

- You cannot mirror the archive log through Tivoli Storage Manager. However, you can protect the archive log by using operating system or hardware features, such as the features that are provided by RAID 5. Mirror the archive log directory by using file system or disk-drive subsystem-level facilities. Ensure that the mirrored log is in a file system on a different physical hardware.
- The archive failover log, also called a secondary archive log, is the directory that the server uses to store archive log files if the archive log directory is full. Specifying an archive failover log directory can prevent problems that occur if the archive log runs out of space. Use of an archive failover log is optional, but it provides an extra level of protection.

Store the archive log and the archive failover log on different physical drives. To mirror the archive failover log, use operating system or hardware mirroring.

## What to do next

### Tips:

- Consider mirroring the active log and the archive log if retention protection is enabled. If a database restore is needed, you can restore the database to the current point in time with no data loss.
- You can dynamically start or stop mirroring while Tivoli Storage Manager is running.
- Despite its benefits, mirroring does not protect against a disaster or a hardware failure that affects multiple drives or causes the loss of the entire system. In addition, mirroring doubles the amount of disk space that is required for logs. Mirroring also results in decreased performance.

### Related concepts:

“Active log” on page 638

“Archive log” on page 640

“Archive failover log” on page 640

## Protecting the volume history file

To restore the database, the server needs the information that is in a volume history file. You can specify duplicate volume history files. When the server updates volume information in the database, it also updates each file.

### About this task

The following volume history is stored in the Tivoli Storage Manager database and updated in the volume history files:

- Sequential-access storage-pool volumes that were added, reused through reclamation or move data operations, or deleted during delete volume or reclamation operations
- Full and incremental database-backup volumes
- Export volumes for administrator, node, policy, and server data
- Snapshot database-backup volumes
- Backup set volumes

### Procedure

To specify the file path and name for a volume history file, use the `VOLUMEHISTORY` server option. To specify more than one path and name, use multiple `VOLUMEHISTORY` entries. Tivoli Storage Manager stores duplicate volume histories in all the files that are specified with `VOLUMEHISTORY` options. To find the volume-history information during a database restore operation, the server tries to open volume history files in the order in which the `VOLUMEHISTORY` entries occur in the server options file. If the server cannot read a file, the server tries to open the next volume history file.

Ensure that volume history is protected by taking one or more of the following steps:

- Store at least one copy of the volume history file offsite or on a disk separate from the database.
- Store a printout of the file offsite.
- Store a copy of the file offsite with your database backups and device configuration file.
- Store a remote copy of the file, for example, on an NFS-mounted file system.

**Tip:** To manually update the volume history file, you can use the **BACKUP VOLHISTORY** command. Ensure that updates are complete by following these guidelines:

- If you must halt the server, wait a few minutes after you issue the **BACKUP VOLHISTORY** command.
- Specify multiple **VOLUMEHISTORY** options in the server options file.
- Review the volume history files to verify that the files were updated.

**DRM:** DRM saves a copy of the volume history file in its disaster recovery plan file.

**Related tasks:**

“Deleting information about volume history” on page 609

## Protecting the device configuration file

The device configuration file contains information that is required to read backup data and restore the database. You can specify duplicate device configuration files. When the server updates device configuration information in the database, it also updates each file. A device configuration file cannot be re-created.

### About this task

The following device configuration information is stored in the Tivoli Storage Manager database and updated in the device configuration files:

- Devices class definitions
- Library definitions
- Drive definitions
- Path definitions
- Server definitions
- The database manager backup node ID

The device information must match the devices that are configured on the system where the restore operation can be completed. You might have to edit those commands in an existing file so that they match.

### Procedure

To specify the file path and name for a device configuration file, use the **DEVCONFIG** server option. To specify more than one path and name, use multiple **DEVCONIG** entries. Tivoli Storage Manager stores duplicate device configuration information in all the files that are specified with **DEVCONFIG** options.

To find the device-configuration information during a database restore operation, the server tries to open device configuration files in the order in which the **DEVCONFIG** entries occur in the server options file. If the server cannot read a file, the server tries to open the next device configuration file.

To ensure the availability of device configuration information, take one or more of the following steps:

- Store at least one copy of the device configuration file offsite or on a disk separate from the database.
- Store a printout of the file offsite.
- Store a copy of the file offsite with your database backups and volume history file.
- Store a remote copy of the file, for example, on an NFS-mounted file system.

**Tips:**

- To manually update the device configuration file, use the **BACKUP DEVCONFIG** command. Ensure that updates are complete by following these guidelines:
  - If you must halt the server, wait a few minutes after you issue the **BACKUP DEVCONFIG** command.
  - Specify multiple DEVCONFIG options in the server options file.
  - Review the device configuration files to verify that the files were updated.
  - If you are using automated tape libraries, volume location information is saved in the device configuration file. The file is updated whenever **CHECKIN LIBVOLUME**, **CHECKOUT LIBVOLUME**, and **AUDIT LIBRARY** commands are issued, and the information is saved as comments (*/\*....\*/*). This information is used during restore or load operations to locate a volume in an automated library.

If a disaster occurs, you might have to restore Tivoli Storage Manager with devices that are not included in the device configuration file.

**What to do next**

**DRM:** DRM automatically saves a copy of the device configuration file in its disaster recovery plan file.

**Related tasks:**

“Updating the device configuration file” on page 931

**Protecting the server options file**

To restore the database, you need a copy of the server options file. The server options file includes the file paths of the active log, the archive log, the active log mirror, and the archive failover log. This information is required to restore the database.

**About this task**

To ensure the availability of server options file, take one or more of the following steps:

- Store at least one copy of the server options file offsite or on a disk separate from the database.
- Store a printout of the file offsite.
- Store a copy of the file offsite with your database backups and device configuration file.
- Store a remote copy of the file, for example, on an NFS-mounted file system.

**DRM:** DRM automatically saves a copy of the server options file in its disaster recovery plan file.

**Protecting information about the database and recovery logs**

To restore the database, you need detailed information about the database and recovery log. The *recovery log* includes the active log, the active log mirror, the archive log, and the archive failover log. The recovery log contains records of changes to the database.

**About this task**

You can determine the following information from the recovery log:

- The directory where the recovery log is located
- The amount of disk space required

If you lose the recovery log, you lose the changes that were made since the last database backup.

**Tip:** DRM helps you save database and recovery log information.

## Procedure

Complete both of the following steps:

- To obtain detailed information about the database, issue the following commands:  

```
query db format=detailed
query dbspace
```
- To obtain information about the recovery log, issue the following command:  

```
query log format=detailed
```

## Protecting the Secure Sockets Layer digital certificate file

As part of the process of setting up IBM Tivoli Storage Manager to use Secure Sockets Layer (SSL) for client/server authentication, a digital certificate file, `cert.kdb`, is created.

The `cert.kdb` file includes the server's public key, which allows the client to encrypt data. The digital certificate file cannot be stored in the server database because the Global Security Kit (GSKit) requires a separate file in a certain format. The `cert256.arm` file is generated by the V6.3 server for distribution to the V6.3 clients.

Keep backup copies of the `cert.kdb` and `cert256.arm` file in a secure location. If both of the original files and any copies are lost or corrupted, you can generate a new certificate file.

**Attention:** If client data object encryption is in use and the encryption key is not available, data cannot be restored or retrieved under any circumstance. When you use **ENABLECLIENTENCRYPTKEY** for encryption, the encryption key is stored on the server database. For objects that use this method, the server database must exist and have the proper values for the objects for a proper restore operation. Ensure that you back up the server database frequently to prevent data loss.

For more information about encryption keys, see *IBM Tivoli Storage Manager Using the Application Programming Interface*.

## Protect the disaster recovery plan

The disaster recovery plan file contains the information that is required to recover a Tivoli Storage Manager server to the point in time that is represented by the last database backup operation that is completed before the plan is created.

You can use server-to-server communications to store copies of the recovery plan on a remote target server, in addition to traditional disk-based files. Storing recovery plan files on a target server provides the following advantages:

- A central repository for recovery plan files
- Automatic expiration of plan files
- Query capabilities for displaying information about plan files and their contents
- Fast retrieval of a recovery plan file if a disaster occurs

You can also store the recovery plan locally, on CD, or in print.

**DRM:** DRM can query the server and generate a detailed recovery plan for your installation.

**Related tasks:**

“Storing the disaster recovery plan locally” on page 1080

“Storing the disaster recovery plan on a target server” on page 1081

**Related reference:**

“The disaster recovery plan file” on page 1043

---

## Client data protection

If storage pools and volumes are not backed up, client data can be permanently lost.

### Protecting the data that is in primary storage pools

To protect client data, back up your primary storage pools to copy storage pools. For fast client restores, copy active client backup data that is in primary storage pools to active-data pools.

#### About this task

A typical Tivoli Storage Manager configuration includes a primary disk pool and primary tape pool for data backup. Copy storage pools contain active and inactive versions of data that is backed up from primary storage pools. Figure 108 shows a configuration with an onsite FILE-type active-data pool and an offsite copy storage pool.

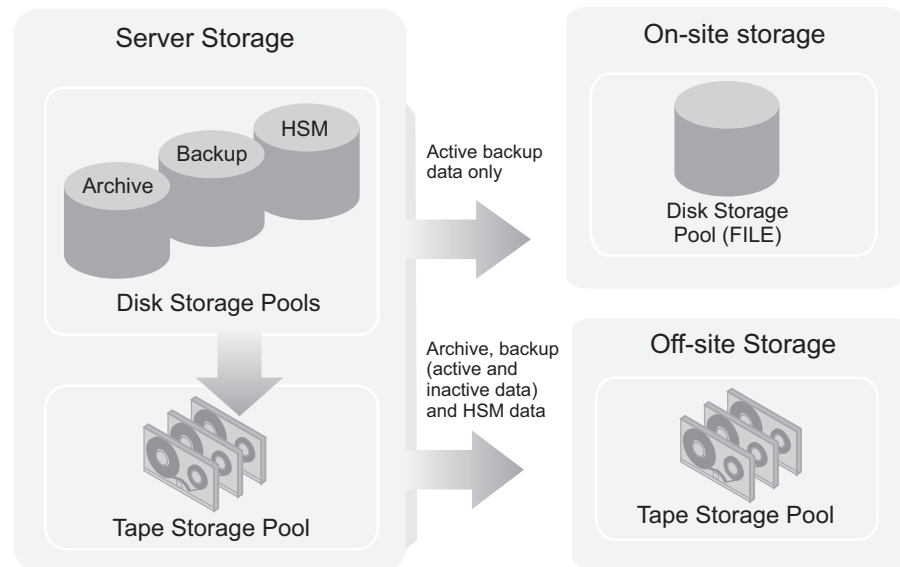


Figure 108. Copy storage pools and active-data pools

**Related concepts:**

“Active-data pools” on page 26

“Copy storage pools” on page 25

“Primary storage pools” on page 25

“Storage pool hierarchies” on page 27



## Backing up primary storage pools

To protect client data, back up your primary storage pools to copy storage pools. Copy active client backup data in primary storage pools to active-data pools for fast client restores.

### About this task

**Tip:** Backing up storage pools requires an extra 200 bytes of space in the database for each file copy. As more files are added to the copy storage pools and active-data pools, reevaluate your database size requirements.

Each of the commands in the following examples uses four parallel processes to complete an incremental backup of the primary storage pool to the copy storage pool or a copy to the active-data pool. Set the **MAXPROCESS** parameter in the **BACKUP STGPPOOL** command to the number of mount points or drives that can be dedicated to this operation.

### Procedure

- To back up data in a primary storage pool to a copy storage pool, use the **BACKUP STGPPOOL** command. For example, to back up a primary storage pool that is named ARCHIVEPOOL to a copy storage pool named DISASTER-RECOVERY, issue the following command:

```
backup stgpool archivepool disaster-recovery maxprocess=4
```

The only files that are backed up to the DISASTER-RECOVERY pool are files for which a copy does not exist in the copy storage pool. The data format of the copy storage pool and the primary storage pool can be NATIVE, NONBLOCK, or the NDMP formats NETAPPDUMP, CELERRADUMP, or NDMPDUMP. The server copies data from the primary storage pool only to a copy storage pool that has the same format.

**Restriction:** A **BACKUP STGPPOOL** command does not back up a shred storage pool to a copy storage pool unless you explicitly set the **SHREDTONOSHRED** parameter to YES. If this value is not specified, the server issues an error message and does not allow the backup. If this value is specified, the server does not issue a warning when the **BACKUP STGPPOOL** command for the shred pool is run.

**Tip:** To further minimize the potential loss of data, you can mark the backup volumes in the copy storage pool as OFFSITE and move them to an offsite location. In this way, the backup volumes are preserved and are not reused or mounted until they are brought onsite. Ensure that you mark the volumes as OFFSITE before you back up the database. Complete the following tasks to avoid marking volumes as offsite or physically move volumes:

- Specify a device class of SERVER in your database backup.
- Back up a primary storage pool to a copy storage pool or associated with a device class of SERVER.
- To copy active data, use the **COPY ACTIVE DATA** command. For example, to copy active data from a primary storage pool that is named BACKUPPOOL to an active-data pool named CLIENT-RESTORE, issue the following command:  

```
copy activedata backuppool client-restore maxprocess=4
```

The primary storage pool must have a data format of NATIVE or NONBLOCK. You cannot use copies from primary storage pools with any of the NDMP

formats. The only files that are copied to the CLIENT-RESTORE pool are active backup files for which a copy does not exist in the active-data pool.

## Results

Because backups and active-data copies are made incrementally, you can cancel the processes. If you reissue the **BACKUP STGPPOOL** or **COPY ACTIVE DATA** command, the backup or active-data copy continues from the point at which the process was canceled.

### Restrictions:

- If a backup is to be made to a copy storage pool and the file exists with the same insertion date, no action is taken. Similarly, if a copy is to be made to an active-data pool and the file exists with the same insertion data, no action is taken.
- When a disk storage pool is backed up, cached files (copies of files that remain on disk after they are migrated to the next storage pool) are not backed up.
- Files in a copy storage pool or an active-data pool do not migrate to another storage pool.
- After a file is backed up to a copy storage pool or a copy is made to an active-data pool, the file might be deleted from the primary storage pool. When an incremental backup of the primary storage pool occurs, the file is then deleted from the copy storage pool. Inactive files in active-data pools are deleted during the process of reclamation. If an aggregate that is copied to an active-data pool contains some inactive files, the aggregate is reconstructed into a new aggregate without the inactive files.

### Related concepts:

“Active-data pools” on page 26

“Copy storage pools” on page 25

“Primary storage pools” on page 25

“Securing sensitive client data” on page 529

### Related tasks:

“Backing up the data in a storage hierarchy” on page 279

Chapter 19, “Automating server operations,” on page 611

### Example: Scheduling a backup with one copy storage pool:

Create a schedule for backing up two primary storage pools to the same copy storage pool.

### About this task

Assume that you have two primary storage pools: one random access storage pool (DISKPOOL) and one tape storage pool (TAPEPOOL, with device class TAPECLASS). Files that are stored in DISKPOOL are migrated to TAPEPOOL. You want to back up the files in both primary storage pools to a copy storage pool.

### Procedure

To schedule daily incremental backups of the primary storage pools, do the following steps:

1. Define a copy storage pool that is called COPYPOOL, with the same device class as TAPEPOOL, by issuing the following command:

```
define stgpool copypool tapeclass pooltype=copy maxscratch=50
```

**Note:**

- a. Because scratch volumes are allowed in this copy storage pool, you do not need to define volumes for the pool.
  - b. All storage volumes in COPYPOOL are located onsite.
2. Perform the initial backup of the primary storage pools by issuing the following commands:  
    `backup stgpool diskpool copypool maxprocess=2`  
    `backup stgpool tapepool copypool maxprocess=2`
  3. Define schedules to automatically run the commands for backing up the primary storage pools. Use the commands that you issued in step 2 to define schedules.

**Results**

**Tips:**

- To minimize tape mounts, you can take one or both of the following steps:
  - Back up the disk storage pool first, then the tape storage pool.
  - If you schedule storage pool backups and migrations and have enough disk storage, back up or copy as many files as possible from the disk storage pool to copy storage pools and active-data pools. After the backup and copy operations are complete, migrate the files from the disk storage pools to primary tape storage pools.
- If you have active-data pools, you can schedule the **COPY ACTIVE DATA** command to copy the active data that is in primary storage pools to the active-data pools.

**Related concepts:**

“Active-data pools” on page 26

“Copy storage pools” on page 25

“Primary storage pools” on page 25

“Securing sensitive client data” on page 529

**Related tasks:**

“Backing up the data in a storage hierarchy” on page 279

Chapter 19, “Automating server operations,” on page 611

**Protecting data in a Centera storage pool:**

Completing a storage pool backup for data that is stored in a Centera storage pool is not supported. To ensure the safety of the data, therefore, use the replication feature of the Centera storage device.

**About this task**

With this feature, you can copy data to a replication Centera storage device at a different location. If the data in the primary Centera storage pool becomes unavailable, you can access the replication Centera storage device by specifying its IP address. Use the **HLADDRESS** parameter on the **UPDATE DEVCLASS** command to specify the IP address for the device class pointed to by the Centera storage pool. After the primary Centera storage device is re-established, you can issue the **UPDATE DEVCLASS** command again and change the value of the **HLADDRESS** parameter to point back to the primary Centera storage device. You must restart the server each time you update the **HLADDRESS** parameter on the **UPDATE DEVCLASS** command.

#### Related concepts:

“Files on sequential volumes (CENTERA)” on page 65

### Simultaneous-write operations to copy storage pools and active-data storage pools

You can set up a primary storage pool so that when a client backs up, archives, or migrates a file, the file is written to the primary storage pool. The primary storage pool is also simultaneously stored into each copy storage pool that is specified for the primary storage pool.

#### About this task

You can also enable the simultaneous-write function so that active client backup data is written to active-data pools at the same time it is written to the primary storage pool. The active-data pools must be specified in the definition of the primary storage pool. The clients whose active data must be saved must be members of a policy domain that specifies the active-data pool as the destination for active backup data.

The simultaneous-write function is not intended to replace regular backups of storage pools. If you use the function to simultaneously write to copy storage pools and active-data pools, ensure that the copy of each primary storage pool and of the active-data in each primary storage pool is complete by regularly issuing the **BACKUP STGPPOOL** command.

#### Related tasks:

“Writing data simultaneously to primary, copy, and active-data pools” on page 346

### Delaying reuse of volumes for recovery purposes

When you define or update a sequential access storage pool, you can use the **REUSEDELAY** parameter. This parameter specifies the number of days that must elapse before a volume can be reused or returned to scratch status after all files are expired, deleted, or moved from the volume.

#### About this task

When you delay reuse of such volumes and they no longer contain any files, they enter the pending state. Volumes remain in the pending state for the time that is specified with the **REUSEDELAY** parameter for the storage pool to which the volume belongs.

Delaying reuse of volumes can be helpful under certain conditions for disaster recovery. When files are expired, deleted, or moved from a volume, they are not erased from the volumes: The database references to these files are removed. Thus the file data might still exist on sequential volumes if the volumes are not immediately reused.

A disaster might force you to restore the database by using a database backup that is not the most recent backup. In this case, some files might not be recoverable because the server cannot find them on current volumes. However, the files might exist on volumes that are in pending state.

## Procedure

You might be able to use the volumes in pending state to recover data by doing the following steps:

1. Restore the database to a point-in-time before file expiration.
2. Use a primary, copy-storage, or active-data pool volume that is not rewritten and that contains the expired file at the time of database backup.

## Results

If you back up your primary storage pools, set the **REUSEDELAY** parameter for the primary storage pools to 0 to efficiently reuse primary scratch volumes. For your copy storage pools and active-data pools, delay the reuse of volumes while you keep your oldest database backup.

### Related tasks:

“Scenario: Protecting the database and storage pools” on page 923

### Related reference:

“Running expiration processing to delete expired files” on page 514

## Auditing storage pool volumes

If there are inconsistencies between the information in the database about files in a storage pool volume and the files themselves, you might not be able to access the files.

### About this task

The following table outlines the privilege class that you require to audit storage pool volumes for data integrity.

| Task                                                          | Required Privilege Class                         |
|---------------------------------------------------------------|--------------------------------------------------|
| Audit volumes in storage pools over which they have authority | Restricted storage privilege                     |
| Audit a volume in any storage pool                            | System privilege, unrestricted storage privilege |

To ensure that all files are accessible on volumes in a storage pool, audit any volumes that you suspect might have problems by using the **AUDIT VOLUME** command. You have the option of auditing multiple volumes by using a time range criteria, or auditing all volumes in a storage pool.

Audit a volume when the following conditions are true:

- The volume is damaged
- The volume was accessed for a long time, for example, six months
- A read or write error occurs when you access the volume
- The database was restored to an earlier point-in-time, and the volume is either a disk volume or a volume that was identified as being reused or deleted since the database backup

If a storage pool has data validation that is enabled, run an audit for the volumes in the storage pool to have the server validate the data.

**Note:** If Tivoli Storage Manager detects a damaged file on a Centera volume, then a command is sent to Centera to delete the file. If Centera is unable to delete the file because the retention period for the file is not expired, then the volume that contains the file must not be deleted.

To display the results of a volume audit after it completes, use the **QUERY ACTLOG** command.

**Related tasks:**

“Requesting information from the activity log” on page 829

## **Storage pool volume audit**

When you audit a volume, a background process is started, and the results of the audit are stored in the activity log.

During the auditing process, the server performs the following actions:

- Sends informational messages about processing to the server console.
- Prevents new files from being written to the volume.
- Generates a cyclic redundancy check, if data validation is enabled for the storage pool.

You can specify whether you want the server to correct the database if inconsistencies are detected. Tivoli Storage Manager corrects the database by deleting database records that refer to files on the volume that cannot be accessed. The default is to report inconsistencies that are found (files that cannot be accessed), but to not correct the errors.

If files with read errors are detected, their handling depends on the following conditions:

- The type of storage pool to which the volume is assigned
- The **FIX** parameter on the **AUDIT VOLUME** command
- The location of file copies (whether a copy of the file exists in a copy storage pool)

### **Errors in an audit of a primary storage pool volume:**

When a volume in a primary storage pool is audited, the setting of the **FIX** parameter determines how errors are handled.

The **FIX** parameter on an **AUDIT VOLUME** command can have the following effects:

#### **FIX=NO**

The server reports, but does not delete, any database records that refer to files found with logical inconsistencies. If the **AUDIT VOLUME** command detects a read error in a file, the file is marked as damaged in the database. You can do one of the following actions:

- If a backup copy of the file is stored in a copy storage pool, you can restore the file by using the **RESTORE VOLUME** or **RESTORE STGPPOOL** command.
- If the file is a cached copy, you can delete references to the file on this volume by using the **AUDIT VOLUME** command again. Specify **FIX=YES**.

If the **AUDIT VOLUME** command does not detect a read error in a damaged file, the file state is reset, and the file can be used. For example, if a dirty tape head caused some files to be marked damaged, you can clean the head and then audit the volume to make the files accessible again.

**FIX=YES**

Any inconsistencies are fixed as they are detected.

If the **AUDIT VOLUME** command detects a read error in a file:

- If the file is not a cached copy and a backup copy is stored in a copy storage pool, the file is marked as damaged in the database. The file can then be restored by using the **RESTORE VOLUME** or **RESTORE STGPPOOL** command.
- If the file is not a cached copy and a backup copy is not stored in a copy storage pool, all database records that refer to the file are deleted.
- If the file is a cached copy, the database records that refer to the cached file are deleted. The primary file is stored on another volume.

If the **AUDIT VOLUME** command does not detect a read error in a damaged file, the file state is reset, and the file can be used. For example, if a dirty tape head caused some files to be marked damaged, you can clean the head and then audit the volume to make the files accessible again.

**Errors in an audit of copy storage pool volumes:**

When a volume in a copy storage pool is audited, the setting of the **FIX** parameter determines how errors are handled.

The **FIX** parameter on an **AUDIT VOLUME** command can have the following effects:

**FIX=NO**

The server reports the error and marks the file copy as damaged in the database.

**FIX=YES**

The server deletes references to the file on the audited volume from the database.

**Errors in an audit of active-data storage pool volumes:**

When a volume in an active-data storage pool is audited, the setting of the **FIX** parameter determines how errors are handled.

The **FIX** parameter on an **AUDIT VOLUME** command can have the following effects:

**FIX=NO**

The server reports the error and marks the file copy as *damaged* in the database.

**FIX=YES**

The server deletes references to the file on the audited volume from the database. The physical file is deleted from the active-data pool.

When you audit a volume in an active-data pool, the server skips inactive files in aggregates that were removed by reclamation. These files are not reported as skipped or marked as damaged.



## Data validation during audit volume processing

Data validation for storage pools allows the server to validate that data sent to a device during a write operation matches what the server later reads.

### About this task

Data validation is helpful if you introduce new hardware devices. The validation assures that the data is not corrupted as it moves through the hardware, and then is written to the volume in the storage pool. You can use the **DEFINE STGPPOOL** or **UPDATE STGPPOOL** commands to enable data validation for storage pools.

When you enable data validation for an existing storage pool, the server validates data that is written from that time forward. The server does not validate existing data, which was written to the storage pool before data validation was enabled.

When data validation is enabled for storage pools, the server generates a cyclic redundancy check (CRC) value and stores it with the data when it is written to the storage pool. The server validates the data when it audits the volume, by generating a cyclic redundancy check and comparing this value with the CRC value stored with the data. If the CRC values do not match, then the server processes the volume in the same manner as a standard audit volume operation. This process can depend on the following conditions:

- The type of storage pool to which the volume is assigned
- The **FIX** parameter of the **AUDIT VOLUME** command
- The location of file copies (whether a copy of the file exists in a copy storage pool or an active-data pool)

Check the activity log for details about the audit operation.

The server removes the CRC values before it returns the data to the client node.

#### Related reference:

“Errors in an audit of active-data storage pool volumes” on page 914

“Errors in an audit of copy storage pool volumes” on page 914

“Errors in an audit of a primary storage pool volume” on page 913

### Choosing when to enable data validation:

Data validation is available for nodes and storage pools. The forms of validation are independent of each other.

### About this task

Figure 109 on page 916 shows data validation:

- During a client session with the server **2**
- During a client session with the storage agent **1** (the storage agent reads the **VALIDATEPROTOCOL** setting for the client from the Tivoli Storage Manager server)
- During a storage agent session with the server **3**
- When a server (including a storage agent) sends data to the storage pool **4** or **5**

You can enable data validation for one or more nodes, storage agents, or storage pools. Figure 109 on page 916 illustrates data transfer that is eligible for data validation within a Tivoli Storage Manager environment. Your environment might



contain some or all of these objects.

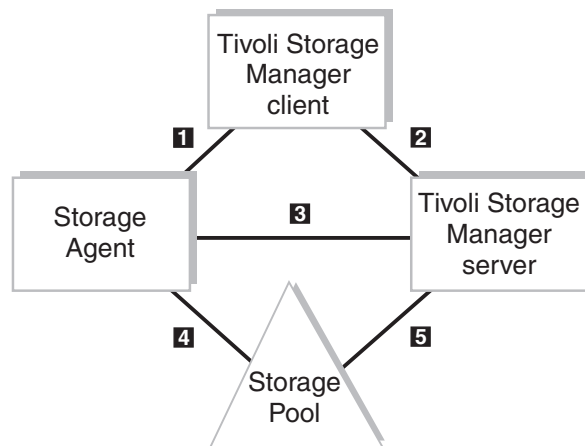


Figure 109. Data transfer eligible for data validation

Table 87 provides information that relates to Figure 109. This information explains the type of data that is transferred and the appropriate command to issue.

Table 87. Setting data validation.

| Numbers in Figure 109 | Where to Set Data Validation                                                | Type of Data Transferred | Command                                | Command Parameter Setting                         |
|-----------------------|-----------------------------------------------------------------------------|--------------------------|----------------------------------------|---------------------------------------------------|
| <b>1</b>              | Node definition                                                             | File data and metadata   | See Note                               | See Note                                          |
| <b>2</b>              | Node definition                                                             | File data and metadata   | <b>REGISTER NODE UPDATE NODE</b>       | VALIDATEPROTOCOL=ALL or VALIDATEPROTOCOL=DATAONLY |
| <b>3</b>              | Server definition (storage agent only)                                      | Metadata                 | <b>DEFINE SERVER UPDATE SERVER</b>     | VALIDATEPROTOCOL=ALL                              |
| <b>4</b>              | Storage pool definition that is issued on the Tivoli Storage Manager server | File Data                | <b>DEFINE STGPPOOL UPDATE STGPPOOL</b> | CRCDATA=YES <sup>1</sup>                          |
| <b>5</b>              | Storage pool definition that is issued on the Tivoli Storage Manager server | File Data                | <b>DEFINE STGPPOOL UPDATE STGPPOOL</b> | CRCDATA=YES <sup>1</sup>                          |

<sup>1</sup> This parameter is not available for primary sequential access storage pools that use the following data formats: NETAPPDUMP, CELERRADUMP, NDMPDUMP.

**Note:** The storage agent reads the **VALIDATEPROTOCOL** setting for the client from the Tivoli Storage Manager server.

Figure 110 is similar to the previous figure, however note that the section encompassing **1**, **2**, and **3** is shaded. All three of these data validations are related to the **VALIDATEPROTOCOL** parameter. What is significant about this validation is that it is active only during the client session. After validation, the client and server discard the CRC values that are generated in the current session. This is in contrast to storage pool validation, **4** and **5**, which is always active when the storage pool **CRCDATA** setting is YES.

The validation of data transfer between the storage pool and the storage agent **4** is managed by the storage pool **CRCDATA** setting defined by the Tivoli Storage Manager server. Even though the flow of data is between the storage agent and the storage pool, data validation is determined by the storage pool definition. Therefore, if you always want to validate your storage pool data, set your primary storage pool **CRCDATA** setting to YES.

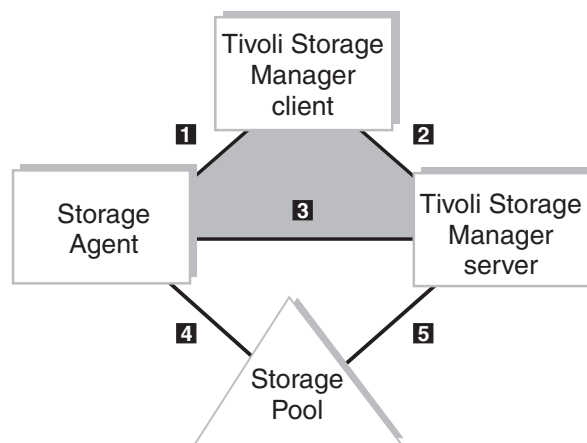


Figure 110. Protocol data validation versus storage pool data validation

If the network is unstable, you might decide to enable only data validation for nodes. Tivoli Storage Manager generates a cyclic redundancy check when the data is sent over the network to the server. Certain nodes might have more critical data than others and might require the assurance of data validation. When you identify the nodes that require data validation, you can choose to validate only the user's data or all the data validated. Tivoli Storage Manager validates both the file data and the file metadata when you choose to validate all data.

When you enable data validation for a server-to-server exchange or between a storage agent and server, the server must validate all data. You can enable data validation by using the **DEFINE SERVER** or **UPDATE SERVER** command. For server-to-server exchange, you can use virtual volumes. For data that is exchanged between a storage agent and the server, refer to the *Storage Agent User's Guide* for the storage agent's operating system.

If the network is fairly stable but your site is perhaps using new hardware devices, you might decide to enable only data validation for storage pools. When the server sends data to the storage pool, the server generates cyclic redundancy checking, and stores the CRC value with the data. The server validates the CRC value when the server audits the volume. Later, you might decide that data validation for storage pools is no longer required after the devices prove to be stable.

#### Related tasks:

"Storing data on another server as virtual volumes" on page 726

“Auditing storage pool volumes” on page 912

**Related reference:**

“Validating node data during a client session” on page 526

**Performance for data validation:**

Data validation affects performance because the server requires more processor power to calculate and compare CRC values.

Consider the impact on performance when you decide whether data validation is necessary for storage pools. This method of validation is independent of validating data during a client session with the server. When you choose to validate storage pool data, there is no performance impact on the client.

If you enable CRC for storage pools on devices that later prove to be stable, you can increase performance by updating the storage pool definition to disable data validation.

**Validating storage pool data:**

Use the **AUDIT VOLUME** command to specify an audit for data that is written to volumes within a range of days, or to run an audit for a storage pool.

**About this task**

You can manage when the validation of data in storage pools occurs by scheduling the audit volume operation. You can choose a method suitable to your environment, for example:

- Select volumes at random to audit. A random selection does not require significant resources or cause much contention for server resources but can provide assurance that the data is valid.
- Schedule a daily audit of all volumes that are written in the last day. This method validates data that is written to a storage pool daily.
- Audit volumes in storage pools only for client nodes that are considered to be critical users.

**Auditing a disk storage pool volume**

When you audit a disk storage pool volume, you can specify that only summary messages are sent to the activity log and server console.

**About this task**

To display the results of a volume audit after it completes, you can issue the **QUERY ACTLOG** command.

**Procedure**

To specify that only summary messages for d:\tsm\admvol.1 are sent to the activity log and server console, issue the following command:

```
audit volume d:\adsm\admvol.1 quiet=yes
```

The audit volume process is run in the background and the server returns the following message:

ANR2313I Audit Volume (Inspect Only) process started for volume  
D:\TSM\ADMVOL.1 (process ID 4).

To view the status of the audit volume process, issue the following command:  
query process 4

Here is an example of the audit volume process report:

| Process Number | Process Description         | Status                                                                                                                          |
|----------------|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| 4              | Audit Volume (Inspect Only) | Volume D:\ADSM\ADMVOL.1 (Storage Pool BACKUPPOOL), Files Processed: 680, Irretrievable Files Found: 0, Partial Files Skipped: 0 |

### Auditing multiple volumes in a sequential access storage pool

When you audit a sequential storage volume that contains files that span multiple volumes, the server selects all associated volumes.

The server then begins the audit process with the first volume on which the first file is stored. For example, Figure 111 shows five volumes that are defined to ENGBACK2. In this example, File A spans VOL1 and VOL2, and File D spans VOL2, VOL3, VOL4, and VOL5.

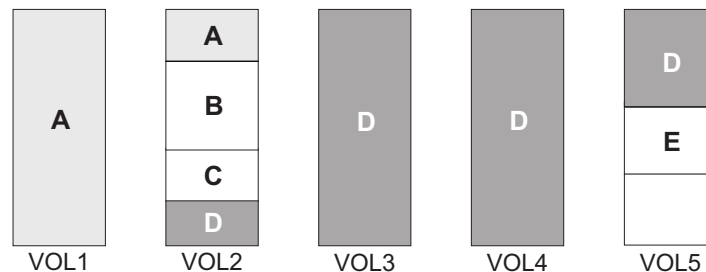


Figure 111. Tape volumes with files a, b, c, d, and e

If you request that the server audit volume VOL3, the server first accesses volume VOL2, because File D begins at VOL2. When volume VOL2 is accessed, the server only audits File D. It does not audit the other files on this volume.

Because File D spans multiple volumes, the server accesses volumes VOL2, VOL3, VOL4, and VOL5 to ensure that there are no inconsistencies between the database and the storage pool volumes.

For volumes that require manual mount and dismount operations, the audit process can require significant manual intervention.

## Auditing a single volume in a sequential access storage pool

To audit a single volume in a sequential storage pool, request that the server skip any files that span multiple volumes.

### About this task

This option is useful when the volume you want to audit contains part of a file, the rest of which is stored on a different, damaged volume. For example, to audit only volume VOL5 in the example in Figure 111 on page 919 and have the server fix any inconsistencies that are found between the database and the storage volume, enter:

```
audit volume vol5 fix=yes skippartial=yes
```

## Auditing volumes by date written

You can limit the audit to volumes that were written in a certain time range.

### About this task

When you use the parameters **FROMDATE**, **TODATE**, or both, the server limits the audit to only the sequential media volumes that meet the date criteria, and automatically includes all online disk volumes. When you include the **STGPPOOL** parameter, you limit the number of volumes that might include disk volumes.

### Procedure

Issue the **AUDIT VOLUME** command with the **FROMDATE** and **TODATE** parameters. For example, to audit the volumes in storage pool BKPOOL1 for volumes that are written from March 20, 2002 to March 22, 2002.

```
audit volume stgpool=bkppool1 fromdate=03/20/2002 todate=03/22/2002
```

The server audits all volumes that were written to starting at 12:00:01 a.m. on March 20 and ending at 11:59:59 p.m. on March 22, 2002.

## Auditing volumes in a specific storage pool

You can limit the audit to volumes in a specified storage pool.

### About this task

For example, you can audit the volumes in storage pool BKPOOL1 by issuing the following command:

```
audit volume stgpool=bkppool1
```

## Scheduling volume audits

You can schedule periodic volume audits.

### About this task

For example, if critical users store data in storage pool STPOOL3 and you want all volumes in the storage pool audited every two days at 9:00 p.m., issue the following command:

```
define schedule crcstg1 type=administrative
cmd='audit volume stgpool=stgpool3' active=yes starttime=21:00 period=2
```

## Fixing damaged files

If files are marked as damaged, you can take steps to correct them.

### About this task

A data error, which results in an unreadable file, can be caused by such things as a tape deteriorating or being overwritten or by a drive that must be cleaned. If a data error is detected when a client tries to restore, retrieve, or recall a file or during a volume audit, the file is marked as damaged. If the same file is stored in other copy storage pools or active-data pools, the status of those file copies is not changed.

If a client tries to access a damaged file and an undamaged copy is available on an onsite copy storage pool volume or active-data pool volume, the server sends the user the undamaged copy.

If files are marked as damaged, you can complete the following operations on them:

- Restore, retrieve, or recall the files
- Move the files by migration, reclamation, or the **MOVE DATA** command
- Back up during a **BACKUP STGPPOOL** operation if the primary file is damaged
- Restore during a **RESTORE STGPPOOL** or **RESTORE VOLUME** operation if the backup copy in a copy storage pool or active-data pool volume is damaged
- Migrate or reclaim during migration and reclamation

### Ensuring the integrity of files

You can take steps to ensure the data integrity of user files.

### Procedure

To maintain the data integrity of user files, complete the following steps:

1. Detect damaged files before the users do. The **AUDIT VOLUME** command marks a file as damaged if a read error is detected for the file. If an undamaged copy is in an onsite copy storage pool or an active-data pool volume, it is used to provide client access to the file.
2. Reset the damaged status of files if the error that caused the change to damaged status was temporary. You can use the **AUDIT VOLUME** command to correct situations when files are marked damaged due to a temporary hardware problem, such as a dirty tape head. The server resets the damaged status of files if the volume in which the files are stored is audited and no read errors are detected.
3. Correct files that are marked as damaged. If a primary file copy is marked as damaged and a usable copy exists in a copy storage pool or an active-data pool volume, the primary file can be corrected. Use the **RESTORE VOLUME** or **RESTORE STGPPOOL** command to correct the primary file.
4. Regularly run commands to identify files that are marked as damaged:
  - The **RESTORE STGPPOOL** command displays the name of each volume in the restored storage pool that contains one or more damaged primary files. Use this command with the preview option to identify primary volumes with damaged files without completing the restore operation.
  - The **QUERY CONTENT** command with the **DAMAGED** parameter displays damaged files on a specific volume.

**Related tasks:**

“Data validation during audit volume processing” on page 915

“Restoring damaged files from storage pools”

## Restoring damaged files from storage pools

If you use copy storage pools, you can restore damaged client files. You can also check storage pools for damaged files and restore the files.

### About this task

If a client tries to access a file that is stored in TAPEPOOL and a read error occurs, the file in TAPEPOOL is automatically marked as damaged. Future accesses to the file automatically use the copy in COPYPOOL if the copy in TAPEPOOL is marked as damaged.

To restore any damaged files in TAPEPOOL, you can define a schedule that issues the following command periodically:

```
restore stgpool tapepool
```

You can check for and replace any files that develop data-integrity problems in TAPEPOOL or in COPYPOOL. For example, every three months, query the volumes in TAPEPOOL and COPYPOOL by entering the following commands:

```
query volume stgpool=tapepool
```

```
query volume stgpool=copypool
```

Then, issue the following command for each volume in TAPEPOOL and COPYPOOL:

```
audit volume <volname> fix=yes
```

If a read error occurs on a file in TAPEPOOL, that file is marked damaged and an error message is produced. If a read error occurs on file in COPYPOOL, that file is deleted and a message is produced.

Restore damaged primary files by entering:

```
restore stgpool tapepool
```

Finally, create new copies in COPYPOOL by entering:

```
backup stgpool tapepool copypool
```

## Recovering damaged files from a replication server

If you replicate data to a replication server, you can use the replication process to recover damaged files from that server. You can specify that the replication process is followed by an additional process that detects damaged files on the source server and replaces them with undamaged files from the target server.

### Before you begin

Ensure that Tivoli Storage Manager, Version 7.1.1 or later, is installed on the source and target replication servers, and that the node was previously replicated. Damaged files can be recovered only if you ran the node replication process at least once before the damage occurred.

### Procedure

1. Determine whether the system-wide setting for recovering damaged files from a target replication server is turned on. Issue the **QUERY STATUS** command:

query status

Review the output to find one of the following settings:

- Replication Recovery of Damaged Files: On
- Replication Recovery of Damaged Files: Off

**Tip:** When you install the server, the default, system-wide setting for file recovery is ON. After you upgrade the server, the default setting is ON only if no damaged files were detected during the upgrade process. If damaged files were detected, the default setting is OFF.

2. If the setting for recovering damaged files is OFF, turn it on by issuing the **SET REPLRECOVERDAMAGED** command and specifying ON:

```
set replrecoverdamaged on
```

If the **REPLRECOVERDAMAGED** system parameter is set to OFF, and you change the setting to ON, an automatic scan of the Tivoli Storage Manager system is started. You must wait for the process to be completed successfully before you can initiate the recovery of damaged files by using the **REPLICATE NODE** command.

3. Recover damaged files by running the **REPLICATE NODE** command and specifying a value for the **RECOVERDAMAGED** parameter. Take one of the following actions:

- To run the full node replication process and recover damaged files, specify the name of the node or node group, and the **RECOVERDAMAGED** parameter with a value of YES.

For example, to run the full node replication process and recover damaged files for client nodes in the PAYROLL group, issue the following command:

```
replicate node payroll recoverdamaged=yes
```

- To run the node replication process only to recover damaged files, specify the name of the node or node group, and the **RECOVERDAMAGED** parameter with a value of ONLY.

For example, to recover damaged files for client nodes in the PAYROLL group without running the full node replication process, issue the following command:

```
replicate node payroll recoverdamaged=only
```

**Tip:** The value that you specify for the **RECOVERDAMAGED** parameter of the **REPLICATE NODE** command overrides any value that you specify for the **RECOVERDAMAGED** parameter at the node level. For example, you register a node by using the **REGISTER NODE** command and specify NO for the **RECOVERDAMAGED** parameter. Then, you replicate the node by using the **REPLICATE NODE** command and specify YES for the **RECOVERDAMAGED** parameter. In this case, file recovery is enabled.

---

## Scenario: Protecting the database and storage pools

To demonstrate how you might protect the database and storage pools, suppose that your company takes steps to protect against the permanent loss of data that is stored in the database and storage pools. You can modify this procedure to meet your needs.

### About this task

This scenario assumes a storage hierarchy that consists of the following storage pools:



- Default random-access storage pools that are named BACKUPPOOL, ARCHIVEPOOL, and SPACEMGPOOL
- A tape storage pool named TAPEPOOL

To provide extra levels of protection for client data, the scenario also specifies an offsite copy storage pool and an onsite active-data pool.

The standard procedures for the company include the following activities:

- Weekly reclamation of its copy storage pool. Reclamation for the copy storage pools is turned off at other times.

**Note:** In a copy storage pool definition, the **REUSEDELAY** parameter delays volumes from being returned to scratch or being reused. Set the value high enough to ensure that the database can be restored to an earlier point in time and that database references to files in the storage pool are valid. For example, to retain database backups for seven days and, therefore, sets **REUSEDELAY** to 7.

- Nightly back up of its primary storage pools to the copy storage pool. Every night, copy the active client backup data in the primary storage pools to the active-data pool.
- A weekly full backup of the database and incremental backups on the other days.
- Daily shipment of the database backup volumes and copy storage pool volumes to an offsite location.

## Procedure

To protect client data, perform the following actions:

1. Create a copy storage pool named DISASTER-RECOVERY. Only scratch tapes are used, and the maximum number of scratch volumes is set to 100. The copy storage pool is defined by entering:

```
define stgpool disaster-recovery tapeclass pooltype=copy
maxscratch=100
```

2. Create an active-data pool named CLIENT-RESTORE and associates it with a sequential-access disk device class (FILE). Only scratch volumes are used, and the maximum number of scratch volumes is set to 50. The active-data pool is defined by entering:

```
define stgpool client-restore diskclass pooltype=activedata
maxscratch=50
```

3. Perform the first backup of the primary storage pools. The first backup of a primary storage pool is a full backup and, depending on the size of the storage pool, can take a long time.
4. Define schedules for the following daily operations:

- a. Run incremental backups of the primary storage pools each night. Issue the following commands:

```
backup stgpool backuppool disaster-recovery maxprocess=2
copy activedata backuppool client-restore maxprocess=2
backup stgpool archivepool disaster-recovery maxprocess=2
backup stgpool spacemgpool disaster-recovery maxprocess=2
backup stgpool tapepool disaster-recovery maxprocess=2
copy activedata tapepool client-restore maxprocess=2
```

The **BACKUP STGPOOL** commands use multiple, parallel processes to perform an incremental backup of each primary storage pool to the copy storage pool. The **COPY ACTIVE DATA** commands use multiple, parallel processes to

copy the active versions of client backup data to the active-data pool. Only those files for which a copy does not exist in the copy pool or active-data pool are backed up.

Consider turning migration off during the rest of the day. You can add a schedule to migrate from disk to tape. In this way, the backups are done while the files are still on disk.

- b. Change the access mode to offsite for copy storage pool volumes that have read/write or read-only access, are onsite, and are at least partially filled. To change the access mode, issue the following command:

```
update volume * access=offsite location='vault site info'
wherestgpool=disaster-recovery whereaccess=readwrite,readonly
wherestatus=filling,full
```

- c. Back up the database by using the **BACKUP DB** command. For example, issue the following command:

```
backup db type=incremental devclass=tapeclass scratch=yes
```

**Restriction:** Do not run the **MOVE DRMEDIA** and **BACKUP STGPOOL** or **BACKUP DB** commands concurrently. Ensure that the storage pool backup processes are complete before you issue the **MOVE DRMEDIA** command.

- 5. Perform the following operations nightly after the scheduled operations completes:
  - a. Back up the volume history and device configuration files. If they change, back up the server options files and the database and recovery log setup information.
  - b. Move the copy storage pool volumes marked offsite, the database backup volumes, volume history files, device configuration files, server options files, and the database and recovery log setup information to the offsite location.
  - c. Identify offsite volumes that must be returned onsite. For example, issue the following command:

```
query volume stgpool=disaster-recovery access=offsite status=empty
```

These volumes, which became empty through expiration, reclamation, and file space deletion, waited the delay time that is specified by the **REUSEDELAY** parameter. The administrator periodically returns outdated backup database volumes. These volumes are displayed with the **QUERY VOLHISTORY** command and can be released for reuse with the **DELETE VOLHISTORY** command.

- 6. Bring the volumes that are identified in step 5c onsite and update their access to read/write.

---

## Recovering the database and client data

If a disaster occurs, recovering the database and client data are among the first priorities. Depending on your disaster recovery strategy, the recovery site can be your primary data center or a remote data center. Use the disaster recovery plan to organize recovery activities.

### Related tasks:

Chapter 30, “Disaster recovery manager,” on page 1033

## Restoring the database

To restore the database, you must have the database backup volumes. The database backup volumes can be full, incremental, or snapshot.

### About this task

For database restore operations, the Tivoli Storage Manager server reads the information that is in the volume history file to determine the number of data streams to read. The server attempts to match the number of streams that were used during the backup operation. For example, if the backup operation used four streams, the Tivoli Storage Manager server attempts the restore operation by using four streams.

If you reduce the number of data streams after a database backup operation, this information will not be available to the server when the database is restored. To specify fewer data streams for the restore operation, take one or both of the following actions in the device configuration file:

- Reduce the number of online and usable drive definitions by removing **DEFINE DRIVE** commands.
- Update the value of the **MOUNTLIMIT** parameter of the **DEFINE DEVCLASS** command.

#### Related concepts:

“Configuring concurrent multistreaming” on page 896

### Types of server database restores

Point-in-time restores are typically used for situations such as disaster recovery or to remove the effects of errors that can cause inconsistencies in the database. If you want to recover the database to the time when the database was lost, recover the database to its current state.

#### Point-in-time restore

- Removes and re-creates the active log directory and archive log directory that is specified in `dsmserv.opt` file
- Restores the database image from backup volumes to the database directories recorded in a database backup or to new directories
- Restores archive logs from backup volumes to the overflow directory
- Applies logs from the overflow directory up to specified point in time

Database restores that use snapshot backups are a form of point-in-time restore.

#### Most current restore

- Does not remove and re-create the active log directory or archive log directory.
- Restores a database image from the backup volumes to the database directories recorded in a database backup or to new directories.
- Restores archive logs from backup volumes to the overflow directory.
- Applies logs from overflow directory and archive logs from archive log directory.

### Example: Restoring a server database to a point in time:

To restore a database to point in time, you need the latest full backup before the point in time. You also need the latest incremental backup after that last full backup. You can also use snapshot database backups to restore a database to a specific point in time.

### Before you begin

Before you restore the database, have available the following infrastructure setup files:

- Server options file
- Volume history file:

Copy the volume history file pointed to by the server options file. The backup copy must a different name. If the restore fails and you must try it again, you might need the backup copy of the volume history file. After the database is restored, any volume history information pointed to by the server options is lost. This information is required to identify the volumes to be audited.

If your old volume history file shows that any of the copy storage pool volumes that are required to restore your storage pools were reused (STGREUSE) or deleted (STGDELETE), you might not be able to restore all your files. You can avoid this problem by including the **REUSEDELAY** parameter when you define your copy storage pools.

- Device configuration file:

You might need to modify the device configuration file that is based on the hardware available at the recovery site. For example, the recovery site might require a different device class, library, and drive definitions.

- Detailed query output about the database and recovery log

If files were migrated, reclaimed, or moved after a backup, the files might be lost and the space that is occupied by those files might be reused. You can minimize this loss by using the **REUSEDELAY** parameter when you define or update sequential-access storage pools. This parameter delays volumes from being returned to scratch or being reused.

### Procedure

To restore the database to a point-in-time, complete the following steps:

1. If the database or recovery log directories were lost, re-create the directories. For example:

```
mkdir e:\tsm\db001
mkdir f:\tsm\db001
mkdir g:\tsm\db001
mkdir h:\tsm\active\log
mkdir i:\tsm\arch\log
mkdir j:\tsm\arch\fail\log
```

2. Use the **DSMSERV RESTORE DB** utility. For example, to restore the database to a backup series that was created on April 19, 2009, enter:

```
dsmserv restore db todate=04/19/2009
```

The server completes the following actions:

- a. Reads the volume history file to locate the last full backup that occurred on or before the specified date and time.

- b. Using the device configuration file, requests a mount of the first volume. The first volume contains the beginning of the full backup.
  - c. Restores the backup data from the first volume.
  - d. Continues to request mounts and to restore data from the backup volumes that contain the full backup and any incremental backups that occurred on or before the specified date.
3. From the old volume history information that was generated by the **QUERY VOLHISTORY** command, obtain a list of all the volumes that were reused (STGREUSE), added (STGNEW), and deleted (STGDELETE) since the original backup. Use this list to complete the remaining steps in this procedure. It might also be necessary to update the device configurations in the restored database.
4. Issue **AUDIT VOLUME** command and specify the **FIX=YES** parameter to audit all disk volumes, all reused volumes, and all deleted volumes.  
The audit volume process identifies files that are recorded in the database that can no longer be found on a volume. If a copy of the file is in a copy storage pool or an active-data pool, the file on the audited volume is marked as damaged. Otherwise, the file is deleted from the database and is lost.
5. If the audit detects any damaged files, issue the **RESTORE STGPPOOL** command to restore those files after you audit the volumes in the storage pool.
6. Mark as "destroyed" any volumes that cannot be located, and recover those volumes from copy storage pool backups. If no backups are available, delete the volumes from the database by using the **DELETE VOLUME** command with the **DISCARDATA=YES** parameter.
7. Redefine any storage pool volumes that were added since the database backup.

#### What to do next

After a restore, the volume inventories for Tivoli Storage Manager and for your tape management system might be inconsistent. For example, after a database backup, a new volume is added to Tivoli Storage Manager. The tape management system inventory records the volume as belonging to Tivoli Storage Manager. If the database is restored from the backup, Tivoli Storage Manager has no record of the added volume, but the tape management system does. You must synchronize these inventories.

Similarly, the volume inventories for Tivoli Storage Manager and for any automated libraries might also be inconsistent. Issue the **AUDIT LIBRARY** command to synchronize these inventories.

#### Related tasks:

"Updating the device configuration file" on page 931

"Restoring to a point-in-time in a shared library environment" on page 941

"Delaying reuse of volumes for recovery purposes" on page 911

### Example: Restoring a server database to its most current state:

You can use full and incremental backups to restore a database to its most current state. Snapshot database backups are complete database copies of a point in time.

#### About this task

You can restore a database to its most current state if the last backup series that was created for the database is available. A backup series consists of a full backup, the latest incremental backup, and all active and archive logs for database changes since the last backup in the series was run.

**Attention:** Recovering the database to its most current state is not possible if the active or archive logs are lost.

#### Procedure

To restore a database to its most current state, issue the **DSMSERV RESTORE DB** command. For example:

```
dsmserv restore db
```

If the original database and recovery log directories are available, use the **DSMSERV RESTORE DB** utility to restore the database. However, if the database and recovery log directories are lost, re-create them first, and then issue the **DSMSERV RESTORE DB** utility.

### Example: Restoring a library manager database

In this example, a library manager's corrupted database is restored. You can modify the procedure to meet your needs.

#### About this task

In a Tivoli Storage Manager shared library environment, the server that manages and controls the shared library is known as the library manager. The library manager maintains a database of the volumes within the shared library.

#### Procedure

Complete the following steps to restore the corrupted database:

1. Copy the volume history file to a temporary location and rename the file. After the database is restored, any volume history information that is pointed to by the server options is lost. You need this information to identify the volumes to be audited.
2. Put the device configuration file and the server options file in the working directory of the server. You can no longer recreate the device configuration file; you must have a copy of the original.
3. Gather the outputs from your detailed queries about your database and recovery log setup information.
4. Determine whether the original database and recovery log directories exist. If the original database or recovery log directories were lost, re-create them using the operating system **mkdir** command.

**Note:** The directories must have the same name as the original directories.

5. Use the **DSMSERV RESTORE DB** utility to restore the database to the current time.

6. Start the Tivoli Storage Manager server instance.
7. Issue an **AUDIT LIBRARY** command from each library client for each shared library.
8. Create a list from the old volume history information that shows all of the volumes that were reused (STGREUSE), added (STGNEW), and deleted (STGDELETE) since the original backup. Use this list to complete the rest of this procedure.

**Tip:** Use the **QUERY VOLHISTORY** command to generate a list from the old volume history information.

9. Audit all disk volumes, all reused volumes, and any deleted volumes that are located by the **AUDIT VOLUME** command by using the **FIX=YES** parameter.
10. Issue the **RESTORE STGPPOOL** command to restore those files detected as damaged by the audit. Include the **FIX=YES** parameter on the **AUDIT VOLUME** command to delete database entries for files that are not found in the copy storage pool or active-data pool.
11. Mark any volumes that cannot be located as destroyed, and recover those volumes from copy storage pool backups. Recovery from active-data pool volumes is not suggested unless the loss of inactive data is acceptable. If no backups are available, delete the volumes from the database by using the **DELETE VOLUME** command with the **DISCARDATA=YES** parameter.
12. Redefine any storage pool volumes that were added since the database backup.

## Results

**Note:** When a database is loaded or restored, the server-to-server communication verification token is changed. The verification token is an attribute of the database and is not stored in the database itself. Part of the token is the installation date and time for the database. For servers that are defined for server-to-server communications, issue an **UPDATE SERVER** command with **FORCESYNC=YES**.

### Related tasks:

"Restoring to a point-in-time for a library manager server" on page 941

## Example: Restoring a library client database

In this example, a library client's corrupted database might be restored. You can modify this procedure to meet your needs.

### About this task

In a Tivoli Storage Manager shared library environment, the servers that share a library and rely on a library manager to coordinate and manage the library usage are known as library clients. Each library client maintains a database of volume usage and volume history. If the database of the library client becomes corrupted, it might be restored by following these steps:

### Procedure

1. Copy the volume history file to a temporary location and rename the file. After the database is restored, any volume history information that is pointed to by the server options is lost. You need this information to identify the volumes to be audited.
2. Put the device configuration file and the server options file in the working directory of the server. You can no longer re-create the device configuration file; you must have a copy of the original.



3. Gather the outputs from your detailed queries about your database and recovery log setup information.
4. Check to see whether the original database and recovery log directories exist. If the original database or recovery log directories were lost, re-create them using the operating system **mkdir** command.

**Note:** The directories must have the same name as the original directories.

5. Use the **DSMSERV RESTORE DB** utility to restore the database to the current time.
6. Create a list from the old volume history information that shows all of the volumes that were reused (STGREUSE), added (STGNEW), and deleted (STGDELETE) since the original backup. Use this list to complete the rest of this procedure.

**Tip:** Use the **QUERY VOLHISTORY** command to generate a list from the old volume history information.

7. Audit all disk volumes, all reused volumes, and any deleted volumes that are located by the **AUDIT VOLUME** command by using the **FIX=YES** parameter.
8. Issue the **RESTORE STGPPOOL** command to restore those files detected as damaged by the audit. Include the **FIX=YES** parameter on the **AUDIT VOLUME** command to delete database entries for files not found in the copy storage pool.
9. Mark any volumes that cannot be located as destroyed, and recover those volumes from copy storage pool backups. If no backups are available, delete the volumes from the database by using the **DELETE VOLUME** command with the **DISCARDATA=YES** parameter.
10. Issue the **AUDIT LIBRARY** command for all shared libraries on this library client.
11. Redefine any storage pool volumes that were added since the database backup.

## Results

**Note:** When a database is loaded or restored, the server-to-server communication verification token is changed. The verification token is an attribute of the database and is not stored in the database itself. Part of the token is the installation date and time for the database. For servers that are defined for server-to-server communications, issue an **UPDATE SERVER** command with **FORCESYNC=YES**.

### Related tasks:

“Restoring to a point-in-time of a library client server” on page 941

## Updating the device configuration file

If a disaster occurs, you might have to restore Tivoli Storage Manager with devices that are not included in the device configuration file.

### About this task

If this occurs, you must update the device configuration files manually with information about the new devices. The device configuration file is automatically updated when you define, update, or delete device information in the database. This information includes definitions for device classes, libraries, drives, and servers.

Definitions for paths are included when **SRCTYPE** is set to **SERVER**.



Library volume location information is updated in the device configuration file whenever **CHECKIN LIBVOLUME**, **CHECKOUT LIBVOLUME**, and **AUDIT LIBRARY** commands are issued for SCSI libraries.

If an automated tape library is used at the recovery site, volume location information in comments (*/\*...\*/*) in the device configuration file must be modified. First, manually place the physical database backup volumes in the automated library and note the element numbers where you place them. Then, manually edit the device configuration file to identify the locations of the database backup volumes so that the server can find them to restore the database.

For virtual volumes, the device configuration file stores the password (in encrypted form) for connecting to the remote server. If you regressed the server to an earlier point-in-time, this password might not match what the remote server expects. In this case, manually set the password in the device configuration file. Then, ensure that the password on the remote server matches the password in the device configuration file.

**Note:** Set the password in clear text. After the server is operational again, you can issue a **BACKUP DEVCONFIG** command to store the password in encrypted form.

**Related tasks:**

“Recovering with different hardware at the recovery site” on page 1098

“Automated SCSI library at the original site and a manual SCSI library at the recovery site” on page 1099

“Automated SCSI library at the original and recovery sites” on page 1098

## Restoring storage pools and storage pool volumes

When you restore a storage pool, the server determines which files are in that storage pool. Using file copies from a copy storage pool or an active-data pool, server restores the files that were in the storage pool to the same or a different storage pool. As part of the restore operation, inactive file versions are deleted from the server database. Inactive file versions are deleted if the server determines that an inactive file needs to be replaced but cannot find it in the active-data pool.

### About this task

The **RESTORE STGPOOL** command restores specified primary storage pools that have files with the following problems:

- The primary copy of the file contained read errors during a previous operation. Files with read errors are marked as damaged.
- The primary copy of the file on a volume that has an access mode of destroyed.
- The primary file is in a storage pool that is unavailable, and the operation is for restore, retrieve, or recall of files to a user, or export of file data.

**Restrictions:**

- Cached copies of files in a disk storage pool are never restored. References to any cached files were identified with read errors or cached files that are stored on a destroyed volume are removed from the database during restore processing.
- Restoring from an active-data pool might cause some or all inactive files to be deleted from the database if the server determines that an inactive file needs to

be replaced but cannot find it in the active-data pool. Do not consider active-data pools for recovery of a primary pool unless the loss of inactive data is acceptable.

- You cannot restore a storage pool that is defined with a CENTERA device class.
- Restoring from an active-data pool might cause some or all inactive files to be deleted from the database if the server determines that an inactive file needs to be replaced but cannot find it in the active-data pool.

Restore processing copies files from a copy storage pool or an active-data pool onto new primary storage pool volumes. The server then deletes database references to files on the original primary storage pool volumes. A primary storage pool volume becomes empty if all files that were stored on that volume are restored to other volumes. In this case, the server automatically deletes the empty volume from the database.

After the files are restored, the old references to these files in the primary storage pool are deleted from the database. Tivoli Storage Manager locates these files on the volumes to which they were restored, rather than on the volumes on which they were previously stored. If a destroyed volume becomes empty because all files were restored to other locations, the destroyed volume is automatically deleted from the database.

Tivoli Storage Manager uses database information to determine which files to restore for a storage pool. As a result, restore processing does not require that the original volumes be accessed. For example, if a primary storage pool volume is damaged, you can use the **RESTORE VOLUME** command to re-create files that were stored on that volume, even if the volume itself is not readable. However, if you delete the damaged files (**DISCARDATA=YES** on the **DELETE VOLUME** command), the server removes references from the database to the files in the primary storage pool volume. The server also removes references to copies of the files in copy storage pool volumes and active-data pool volumes. You cannot restore those files.

## Procedure

To restore a storage pool, use the **RESTORE STGPOOL** command. To identify volumes that contain damaged primary files, use the **PREVIEW=YES** parameter. During restore processing, a message is issued for every volume in the restored storage pool that contains damaged, noncached files. To identify the specific files that are damaged on these volumes, use the **QUERY CONTENT** command.

## What to do next

**DRM** DRM can help you track your onsite and offsite primary and copy storage pool volumes. DRM can also query the server and generate a current, detailed disaster recovery plan for your installation.

### Related tasks:

“Fixing damaged files” on page 921

## Restoring files to a storage pool with collocation enabled

When you restore files to a primary storage pool that has collocation enabled, the server restores the files by collocation group, by client node, or by client file space.

### About this task

This process preserves the collocation of client files. However, if the copy storage pool or active-data pool being used to restore files does not have collocation enabled, restore processing can be slow.

### Procedure

If you must use a copy storage pool or an active-data pool that is not collocated to restore files to a primary storage pool that is collocated, complete the following steps to improve performance:

1. Restore the files first to a random access storage pool (on disk).
2. Allow or force the files to migrate to the target primary storage pool.  
For the random access pool, set the target storage pool as the next storage pool. Adjust the migration threshold to control when migration occurs to the target storage pool.

#### Related tasks:

“Keeping client files together using collocation” on page 372

## Fixing an incomplete storage pool restoration

If the restoration of storage pool volumes is incomplete, you can get more information about the remaining files on those volumes.

### About this task

The restoration might be incomplete for one or more of the following reasons:

- Either files were never backed up, or the backup copies were marked as damaged.
- A copy storage pool or active-data pool was specified on the **RESTORE STGPOOL** command, but files were backed up to a different copy storage pool or active-data pool. If you suspect this problem, use the **RESTORE STGPOOL** command again without specifying a copy storage pool or active-data pool from which to restore files. You can specify the **PREVIEW** parameter on the second **RESTORE STGPOOL** command, if you do not want to restore files.
- Volumes in the copy storage pool or active-data pool that is needed to complete the restore operation are offsite or unavailable. Check the activity log for messages that occurred during restore processing.
- Backup file copies in copy storage pools or active-data pools were moved or deleted by other processes during restore processing. To prevent this problem, do not issue the following commands for copy storage pool volumes or active-data pool volumes while restore processing is in progress:
  - **MOVE DATA**
  - **DELETE VOLUME** and with the **DISCARDATA** parameter to YES
  - **AUDIT VOLUME** with **FIX** parameter set to YES
  - **MIGRATE STGPOOL**
  - **RECLAIM STGPOOL**

- You can prevent reclamation processing for your copy storage pools and active-data pools by setting the **RECLAIM** parameter to 100 with the **UPDATE STGPPOOL** command.

## Restoring storage pool volumes

Restore processing copies files from a copy storage pool or an active-data pool onto new primary storage pool volumes.

### About this task

Tivoli Storage Manager uses database information to determine which files to restore for a volume. As a result, restore processing does not require that the original volumes be accessed. For example, if a primary storage pool volume is damaged, you can use the **RESTORE VOLUME** command to re-create files that were stored on that volume, even if the volume itself is not readable. However, if you delete the damaged files, the server removes references from the database to the files in the primary storage pool volume and to copies of the files in copy storage pool volumes and active-data pool volumes. You cannot restore those files.

After files are restored, the server deletes database references to files on the original primary storage pool volumes. Tivoli Storage Manager now locates these files on the volumes to which they were restored, rather than on the volume on which they were previously stored. A primary storage pool volume becomes empty if all files that were stored on that volume are restored to other volumes. In this case, the server automatically deletes the empty volume from the database.

### Procedure

To re-create files for one or more volumes that were lost or damaged, use the **RESTORE VOLUME** command. The **RESTORE VOLUME** command changes the access mode of the volumes that are restored to destroyed. When the restoration is complete (when all files on the volume are restored to other locations), the destroyed volume is empty and is then automatically deleted from the database.

### What to do next

#### Attention:

- Cached copies of files in a disk storage pool are never restored. References to any cached files that are on a volume that is being restored are removed from the database during restore processing.
- You can also re-create active versions of client backup files in storage pool volumes by using duplicate copies in active-data pools. However, do not consider active-data pools for recovery of a volume unless the loss of inactive data is acceptable. If the server determines that an inactive file must be replaced but cannot find it in the active-data pool, restoring from an active-data pool might cause some or all inactive files to be deleted from the database.
- You cannot restore volumes in a storage pool that is defined with a **CENTERA** device class.

### Scenario: Recovering a lost or damaged storage pool volume:

In this scenario, an operator inadvertently destroys a tape volume (DSM087) belonging to the TAPEPOOL storage pool. A Tivoli Storage Manager administrator recovers the data that is stored on the destroyed volume by using the offsite copy storage pool.

#### Procedure

The Tivoli Storage Manager administrator completes the following steps:

1. Determine the copy pool volumes that contain the backup copies of the files that were stored on the volume that was destroyed. Issue the following command:

```
restore volume dsm087 preview=yes
```

This command produces a list of offsite volumes that contain the backed up copies of the files that were on tape volume DSM087.

2. Set the access mode of the copy volumes that are identified as **UNAVAILABLE** to prevent reclamation.

**Note:** This precaution prevents the movement of files that are stored on these volumes until volume DSM087 is restored.

3. Bring the identified volumes to the onsite location and set their access mode to **READONLY** to prevent accidental writes. If these offsite volumes are being used in an automated library, the volumes must be checked into the library when they are brought back onsite.

4. Restore the destroyed files. Issue this command:

```
restore volume dsm087
```

This command sets the access mode of DSM087 to **DESTROYED** and attempts to restore all the files that were stored on volume DSM087. The files are not restored to volume DSM087, but to another volume in the TAPEPOOL storage pool. All references to the files on DSM087 are deleted from the database and the volume itself is deleted from the database.

5. Set the access mode of the volumes that are used to restore DSM087 to **OFFSITE** by using the **UPDATE VOLUME** command.
6. Set the access mode of the restored volumes that are now onsite, to **READWRITE**.
7. Return the volumes to the offsite location. If the offsite volumes used for the restoration were checked into an automated library, these volumes must be checked out of the automated library when the restoration process is complete.

#### Fixing an incomplete volume restoration:

When the restoration of a volume might be incomplete, you can get more information about the remaining files on volumes for which restoration was incomplete.

#### About this task

The restoration might be incomplete for one or more of the following reasons:

- Files were either never backed up or the backup copies are marked as damaged.
- A copy storage pool or active-data pool was specified on the **RESTORE VOLUME** command, but files were backed up to a different copy storage pool or a different active-data pool. If you suspect this problem, use the **RESTORE VOLUME** command again without specifying a copy storage pool or active-data pool from

which to restore files. You can specify the **PREVIEW** parameter on the second **RESTORE VOLUME** command, if you do not want to restore files.

- Volumes in the copy storage pool or active-data pool that is needed to complete the restore operation are offsite or unavailable. Check the activity log for messages that occurred during restore processing.
- Backup file copies in copy storage pools or active-data pools were moved or deleted by other processes during restore processing. To prevent this problem, do not issue the following commands for copy storage pool volumes or active-data pool volumes while restore processing is in progress:
  - **MOVE DATA**
  - **DELETE VOLUME** with the **DISCARDDATA** parameter set to YES
  - **AUDIT VOLUME** with the **FIX** parameter set to YES
  - **MIGRATE STGPOOL**
  - **RECLAIM STGPOOL**

You can prevent reclamation processing for your copy storage pools and active-data pools by setting the **RECLAIM** parameter to 100 with the **UPDATE STGPOOL** command.

### Marking volumes as destroyed:

The destroyed volume access mode designates primary volumes for which files are to be restored.

### About this task

This mode permits the restoration of entire volumes. If a volume is designated as destroyed, the server does not mount that volume for either read or write access. You can designate a volume as destroyed with either of two commands:

- The **RESTORE VOLUME** command automatically changes the access mode of the specified volumes to destroyed.
- Issue the **UPDATE VOLUME** command with the **ACCESS** parameter set to **DESTROYED**.

The destroyed designation is important during restore processing, particularly when the **RESTORE STGPOOL** command is used to restore many primary storage pool volumes after a major disaster.

### Procedure

To mark a volume as destroyed, complete the following steps:

1. Designate as destroyed only those volumes that must be restored. If a volume is known to be usable after a disaster, do not set its access mode to destroyed.
2. After you identify the primary volumes to be restored and set their access mode to destroyed, you can add new volumes to the storage pool. The new volumes are used to contain the files as they are restored from the copy storage pool volumes or active-data pool volumes. The new volumes can also be used for new files that users back up, archive, or migrate.
3. The destroyed designation permits tracking the files that must still be restored from copy storage pools or active-data pools. If restore processing ends before completion, you can restart the restore. Only the files that are still on destroyed volumes would need to be restored.

### **Restore and retrieve files by priority:**

When you restore a file that has multiple copies that are stored on different sequential storage pools, the Tivoli Storage Manager server selects the storage pool volume to restore the file from by priority. The server also restores or retrieves files from the client by priority. The priority is based on the status of the volume.

If you did not specify preemption settings for the server, and a mounted volume is in use by another process, restore operations is pending until the other processes complete. The restore operation is pending even when an unmounted volume is available. In Tivoli Storage Manager V7.1, the server prioritizes idle volumes before unmounted volumes to enable a restore operation to complete faster.

The server selects a storage pool to restore or retrieve a file from in the following order:

1. Mounted file volume
2. Unmounted file volume
3. Unmounted VTL volume
4. Idle (mounted, but not in use) volume
5. Unmounted, tape library volume
6. Unmounted, stand-alone tape volume
7. In use, VTL or tape volume
8. Unavailable volume
9. Offsite volume
10. Irrecoverable file volume

For example, there are three copies of a file stored in three storage pool volumes that are called V1, V2, and V3. The storage pool volumes have the following status:

- V1 is idle and is stored in a storage tape pool called P1
- V2 is in use and is stored in a storage tape pool called P2
- V3 is unmounted and is stored in a storage tape pool called P3

The file is restored from the V1 volume in the P1 storage pool because the storage pool volume has a higher priority.

### **Preventing duplication of restored files**

When Tivoli Storage Manager restores data, it might cause some duplication of restored files. Duplication can occur if primary volumes are not available, and Tivoli Storage Manager does not have a complete copy storage pool or active-data pool from which to perform the restore.

#### **About this task**

If duplication occurs, Tivoli Storage Manager uses volumes from multiple copy storage pools or active-data pools to restore the data. This process can result in restoration of duplicate data. To prevent this duplication, keep one complete set of copy storage pools and one complete set of active-data pools available to the server. Alternatively, ensure that only one copy storage pool or one active-data pool has an access of read/write during the restore operation.

Duplication of restored files occurs only when these conditions exist:

- Primary volumes are unavailable or offsite.



- Multiple copy storage pools or active-data pools are available.
- Copy storage pools and active-data pools do not contain all of the files that are in the primary storage pools.

The following example explains this scenario:

The primary storage pool Main contains volumes Main1, Main2, and Main3.

- Main1 contains files File11, File12, File13
- Main2 contains files File14, File15, File16
- Main3 contains files File17, File18, File19

The copy storage pool DuplicateA contains volumes DupA1, DupA2, and DupA3.

- DupA1 contains copies of File11, File12
- DupA2 contains copies of File13, File14
- DupA3 contains copies of File15, File16, File17, File18 (File19 is missing because **BACKUP STGPPOOL** was run on the primary pool before the primary pool contained File 19.)

The copy storage pool DuplicateB contains volumes DupB1 and DupB2.

- DupB1 contains copies of File11, File12
- DupB2 contains copies of File13, File14, File15, File16, File17, File18, File19

If you do not designate copy storage pool DuplicateB as the only copy storage pool to have read/write access for the restore operation, then Tivoli Storage Manager can choose the copy storage pool DuplicateA, and use volumes DupA1, DupA2, and DupA3. Because copy storage pool DuplicateA does not include file File19, Tivoli Storage Manager would then use volume DupB2 from the copy storage pool DuplicateB. The program does not track the restoration of individual files, so File15, File16, File17, and File18 are restored a second time, and duplicate copies are generated when volume DupB2 is processed.

## Restoring and recovering an LDAP server

If you use an LDAP directory server to authenticate passwords, you might need to restore its contents at some time.

There are ways to avoid locking your ID and not being able to log on to the server or rendering data unavailable.

- Give system privilege class to the console administrator ID.
- Make sure that at least one administrator with system privilege class can access the server with LOCAL authentication.
- Do not back up the LDAP directory server to the Tivoli Storage Manager server. An administrator who backs up the Windows Active Directory or the IBM Tivoli Directory Server to the Tivoli Storage Manager server might render them unusable. The Tivoli Storage Manager server requires an external directory for the initial administrator authentication. Backing up the directory server to the Tivoli Storage Manager server locks the administrator ID and renders them unable to log on to the LDAP directory server.



## Recovering an LDAP server with replication or other methods

You must configure the LDAP settings on a target server before you replicate, export, or import nodes and administrators onto it.

You must run the **SET LDAPUSER** and **SET LDAPPASSWORD** commands, and define the **LDAPURL** option on the target server. If it is not configured properly, you can replicate, export, import, or use Enterprise Configuration on the target server. But all nodes and administrators that are transferred from the source to the target with the LDAP server are then changed to use LDAP authentication. Nodes and administrators that changed to LDAP authentication on the target server become inaccessible.

You can configure the target server for LDAP authentication after you replicate or export nodes to it, but the data is unavailable until that occurs. After you configure the LDAP settings at the target server level, the node or administrator entries must be set up on the LDAP server. Either share the LDAP server between the source and the target server, or replicate the source LDAP server to the target server. All applicable nodes and administrators are transferred to the target.

If the transfer is unsuccessful, the LDAP administrator must manually add the node and administrator passwords onto the LDAP server. Or you can issue the **UPDATE NODE** or **UPDATE ADMIN** commands on the Tivoli Storage Manager server.

## Audit the LDAP server

If the Tivoli Storage Manager gets out-of-sync with the LDAP directory server, you might notice some unexpected errors. To put the data in-sync, issue the **AUDIT LDAPDIRECTORY** command.

After you issue the **AUDIT LDAPDIRECTORY FIX=YES** command, the following events occur:

- All nodes and administrators that were removed from the LDAP directory server are listed for you.
- All nodes and administrators that are missing from the LDAP directory server are listed for you. You can correct these missing entries by issuing the **UPDATE NODE** or **UPDATE ADMIN** command.
- A summary is provided to you on how many entries were examined on the LDAP directory server.
- Error messages are issued to you if the Tivoli Storage Manager server cannot connect to the LDAP directory server. The configuration is controlled by the **LDAPURL** option settings.

If you want to see what is out-of-sync without removing any nodes or administrators, issue the **AUDIT LDAPDIRECTORY FIX=NO** command. After you issue this command, you receive reports on the discrepancies between the Tivoli Storage Manager server database and the LDAP directory server.

If multiple Tivoli Storage Manager servers share an LDAP directory server, avoid issuing the **AUDIT LDAPDIRECTORY FIX=YES** command.

---

## Restoring to a point-in-time in a shared library environment

A point-in-time restore for a library manager server or a library client server requires extra steps to ensure the consistency of the volume inventories of the affected servers.

### Restoring to a point-in-time for a library manager server

A point-in-time restore of a library manager server can create inconsistencies between the volume inventories of the library manager and library client servers. Steps must be taken to prevent this problem.

#### About this task

The restore operation removes all library client server transactions that occurred after the point in time from the volume inventory of the library manager server. However, the volume inventory of the library client server still contains those transactions. New transactions can then be written to these volumes, resulting in a loss of client data.

#### Procedure

Complete the following steps after the restore:

1. Halt further transactions on the library manager server: Disable all schedules, migration, and reclamations on the library client and library manager servers.
2. Audit all libraries on all library client servers. The audits reenter those volume transactions that were removed by the restore on the library manager server. Audit the library clients from the oldest to the newest servers. Use the volume history file from the library client and library manager servers to resolve any conflicts.
3. Delete the volumes from the library clients that do not own the volumes.
4. Resume transactions by enabling all schedules, migration, and reclamations on the library client and library manager servers.

### Restoring to a point-in-time of a library client server

A point-in-time restore of a library client server can cause volumes to be removed from the volume inventory of a library client server and later overwritten.

#### About this task

If a library client server acquired scratch volumes after the point-in-time to which the server is restored, these volumes would be set to private in the volume inventories of the library client and library manager servers. After the restore, the volume inventory of the library client server can be regressed to a point-in-time before the volumes were acquired, thus removing them from the inventory. These volumes would still exist in the volume inventory of the library manager server as private volumes owned by the client.

The restored volume inventory of the library client server and the volume inventory of the library manager server would be inconsistent. The volume inventory of the library client server must be synchronized with the volume inventory of the library manager server in order to return those volumes to scratch and enable them to be overwritten. To synchronize the inventories, complete the following steps:

## Procedure

1. Audit the library on the library client server to synchronize the volume inventories of the library client and library manager servers.
2. To resolve any remaining volume ownership concerns, review the volume history and issue the **UPDATE VOLUME** command as needed.

## Example: Recovering to a point-in-time

An administrator restores a library manager server and a library manager client to the point-in-time of the last backup.

### About this task

The processor on which Tivoli Storage Manager is located, the database, and all onsite storage pool volumes are destroyed by fire. You can use either full and incremental backups or snapshot database backups to restore a database to a point-in-time.

**DRM:** DRM can help you complete these steps.

## Procedure

1. Install Tivoli Storage Manager on the replacement processor with the same server options and the same size database and recovery log as on the destroyed system.
2. Move the latest backup and all of the DISASTER-RECOVERY volumes onsite from the offsite location.

**Note:** Do not change the access mode of these volumes until after you complete step 7.

3. If a current, undamaged volume history file exists, save it.
4. Restore the volume history and device configuration files, the server options, and the database and recovery log setup. For example, the recovery site might require different device class, library, and drive definitions.
5. Restore the database from the latest backup level by issuing the **DSMSERV RESTORE DB** utility.
6. Change the access mode of all the existing primary storage pool volumes in the damaged storage pools to **DESTROYED**. For example, issue the following commands:

```
update volume * access=destroyed wherestgpool=backuppools
update volume * access=destroyed wherestgpool=archivepool
update volume * access=destroyed wherestgpool=spacemgpools
update volume * access=destroyed wherestgpool=tapepool
```

7. Issue the **QUERY VOLUME** command to identify any volumes in the DISASTER-RECOVERY storage pool that were onsite at the time of the disaster. Any volumes that were onsite would be destroyed in the disaster and could not be used for restore processing. Delete each of these volumes from the database by using the **DELETE VOLUME** command with the **DISCARDATA** option. Any files that are backed up to these volumes cannot be restored.
8. Change the access mode of the remaining volumes in the DISASTER-RECOVERY pool to **READWRITE**. Issue the following command:  

```
update volume * access=readwrite wherestgpool=disaster-recovery
```

Clients can now access files. If a client tries to access a file that was stored on a destroyed volume, the retrieval request goes to the copy storage pool. In this way, clients can restore their files without waiting for the primary storage pool

to be restored. When you update volumes that are brought from offsite to change their access, you greatly speed recovery time.

9. Define new volumes in the primary storage pool so the files on the damaged volumes can be restored to the new volumes. With the new volumes, clients can also back up, archive, or migrate files to the server. If you use scratch volumes only in the storage pool, you are not required to complete this step.
10. Restore files in the primary storage pool from the copies in the DISASTER-RECOVERY pool. To restore files from DISASTER-RECOVERY pool, issue the following commands:  

```
restore stgpool backuppool maxprocess=2
restore stgpool tapepool maxprocess=2
restore stgpool archivepool maxprocess=2
restore stgpool spacemgpool maxprocess=2
```

These commands use multiple parallel processes to restore files to primary storage pools. After all the files are restored for a destroyed volume, that volume is automatically deleted from the database.

11. To repopulate the active-data pool, copy active versions of backup data from a primary storage pool to an active-data pool. For example, issue the following commands:  

```
copy activedata backuppool client-restore maxprocess=2
copy activedata tapepool client-restore maxprocess=2
```
12. To ensure against another loss of data, immediately back up all storage volumes and the database. Then, resume normal activity, including weekly disaster backups and movement of data to the offsite location.

**Related tasks:**

- “Updating the device configuration file” on page 931
- “Recovering the database and client data” on page 925
- “Fixing an incomplete storage pool restoration” on page 934



---

## Chapter 28. Replication of client node data

*Node replication* is the process of incrementally copying, or *replicating*, data that belongs to backup-archive client nodes. Data is replicated from one Tivoli Storage Manager server to another Tivoli Storage Manager server.

The server from which client node data is replicated is called a *source replication server*. The server to which client node data is replicated is called a *target replication server*. A replication server can function as either a source server, a target server, or both.

Use replication processing to maintain the same level of files on the source and the target servers. When client node data is replicated, only the data that is not on the target server is copied. As part of replication processing, client node data that was deleted from the source server is also deleted from the target server. If Tivoli Storage Manager, Version 7.1.1 or later, is installed on the source and target servers, client node data is marked for deletion during replication processing but it is not deleted until expiration processing runs on the target server.

**Tip:** To ensure that you have available storage, delete client node data by regularly running file expiration processing.

If Tivoli Storage Manager, V7.1.1 or later, is installed on the source and target servers, you can maintain different versions of files on the source and target servers or you can maintain files for more or less time on the target server than they are being maintained on the source server. To do this, you must configure the source and target servers to allow the target server manage replicated files by using the target server policies.

If a disaster occurs and the source server is temporarily unavailable, client nodes can recover their data from the target server. If the source server cannot be recovered, you can convert client nodes to store data on the target server. When there is an outage, the source server can automatically fail over to a target server for data recovery.

If Tivoli Storage Manager, V7.1.1 or later, is installed on the source and target servers, you can use replication processing to recover damaged files. You must replicate the node to the target server before the file damage occurs. Subsequent replication processes detect damaged files on the source server and replace them with undamaged files from the target server.

You can replicate the following types of client node data:

- Active and inactive backup data together, or only active backup data
- Archive data
- Data that was migrated to a source server by Tivoli Storage Manager for Space Management clients

Use node replication for data recovery at a disaster recovery site and to maintain the same level of files on the source and target servers. Node replication is used for the following objectives:

- Controlling network throughput by scheduling node replication at specific times
- Recovering data from large-scale site loss

- Recovering damaged files on the source server

To ensure high server availability, you can use node replication with clustering. In a clustered environment, a client is less likely to fail over to another server. If you replicate data from several source servers to one target server, there is a high dependency on the target server. A clustered environment eases the dependency on the target server.

The following table specifies replication compatibility for Tivoli Storage Manager source and target servers.

*Table 88. Replication compatibility of Tivoli Storage Manager servers*

| Source replication server version | Compatibility with target replication server version |
|-----------------------------------|------------------------------------------------------|
| V6.3.0 - V6.3.2                   | V6.3.0 - V6.3.2                                      |
| V6.3.3                            | V6.3.3 or later                                      |
| V6.3.4 or later                   | V6.3.4 or later                                      |
| V7.1                              | V7.1 or later                                        |
| V7.1.1                            | V7.1 or later                                        |

You can replicate data for client nodes that are V6.3 or earlier. You can also replicate data that was stored on a Tivoli Storage Manager V6.2 or earlier server before you upgraded it to V6.3. You can also replicate data that was stored on a Tivoli Storage Manager V6.2 or earlier server before you upgraded it to V6.3.

For information about implementing a replication configuration, see “Setting up the default replication configuration” on page 975.

**Related concepts:**

“Managing passwords and logon procedures” on page 876

“Clustered environment overview” on page 1019

**Related tasks:**

“Recovering damaged files from a replication server” on page 922

---

## Automatic failover for data recovery overview

Automatic failover for data recovery occurs if the source replication server is unavailable because of a disaster or a system outage.

During normal operations, when the Tivoli Storage Manager Version 7.1 client logs in to a source replication server, it receives connection information for the target failover server. The client node stores the failover connection information in the client options file. During client restore operations, the Tivoli Storage Manager server automatically changes clients to the target replication server and back again. Only one failover server can exist per node at any time. The server information is stored in the options file. The failover server can be modified only if the default replication server is modified and another replication is completed for the node.

To use automatic failover for replicated client nodes, the source replication server, the target replication server, and the client must be at the V7.1 level or later. If any of the servers are at an earlier level, automatic failover is disabled and you must rely on manual failover.

If the client cannot connect to the source replication server, it uses the failover connection information and attempts to log on to the target failover server. The

client logs on to the target replication server and is allowed only to recover data. The client cannot store data during failover processing.

The Tivoli Storage Manager for Space Management and HSM for Windows clients, however, do not automatically fail over to the secondary target server. You must manually edit the `dsm.sys` file to connect to the secondary server. Any secondary server information in the **replservername** stanza and **myreplicationserver** option is ignored by the Tivoli Storage Manager for Space Management and HSM for Windows clients.

When a new client operation is started, the client attempts to connect to the source replication server. The client resumes operations on the source server if the source replication server is available.

When you configure a node for replication by using the **REGISTER NODE** command or the **UPDATE NODE** command, the failover server is not specified.

---

## Source and target node-replication servers

A server from which client node data is replicated is called a *source replication server*. The server to which client node data is replicated is called a *target replication server*.

The client node data on the target replication server is managed by policies that are defined on the source replication server except when the target replication server policies are enabled. You can enable the policies on the target replication server only when you have Tivoli Storage Manager Version 7.1.1 or later installed on source and target replication servers. You cannot replicate nodes from a Tivoli Storage Manager V6.3.3 source replication server to a target replication server that is running on an earlier version of Tivoli Storage Manager.

## Replication server configurations

A source replication server can replicate client node data to only one target replication server at a time. However, a single target replication server can be the target for multiple source replication servers. A client node cannot back up, archive, or migrate data to a server where the node is a target node for replication.

The example configuration in the following figure illustrates the relationships between source and target replication servers in a network.



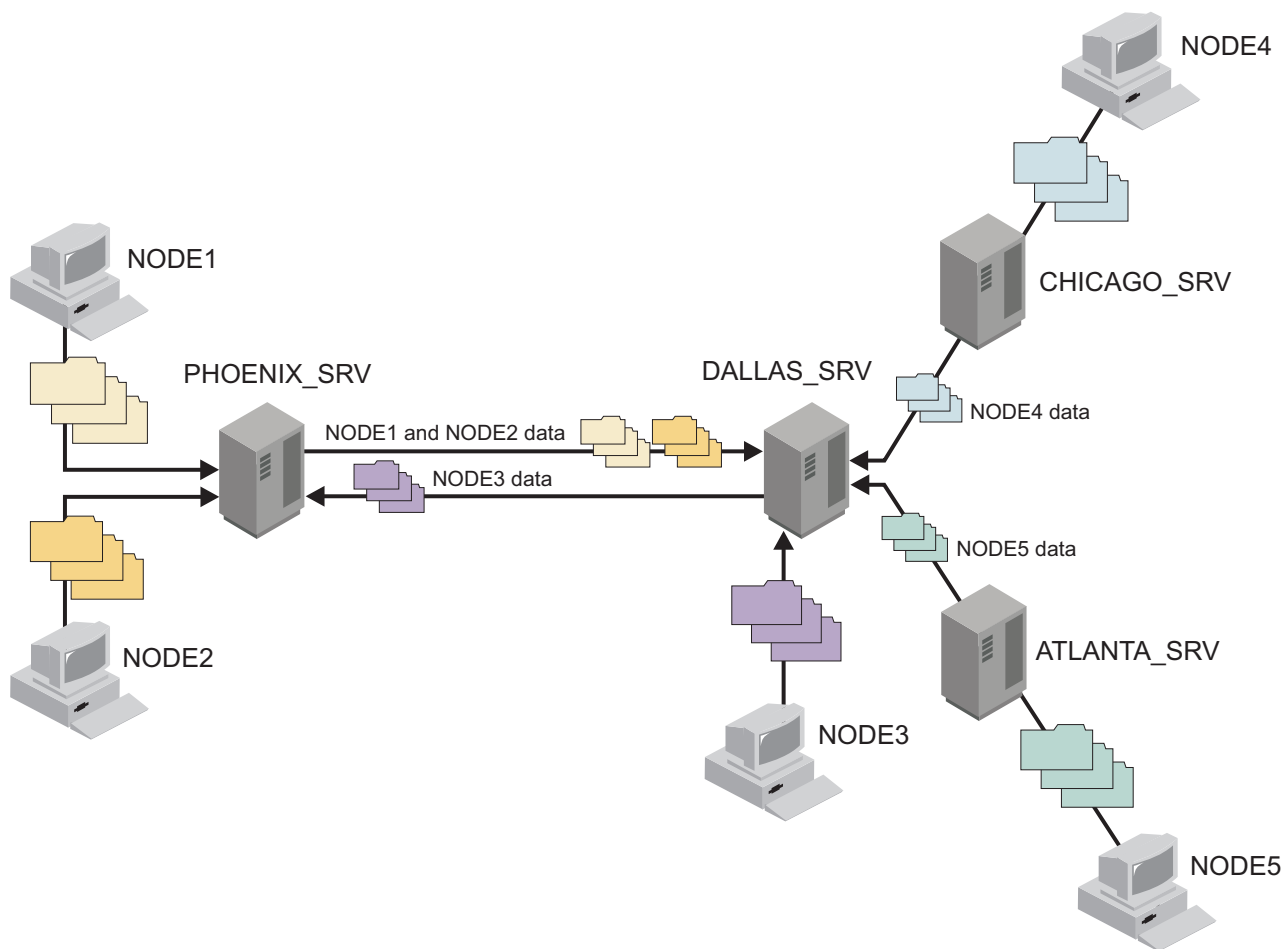


Figure 112. Networked configuration of replication servers

Figure 112 depicts the following data movements:

- PHOENIX\_SRV and DALLAS\_SRV replicate client node data to each other. Each server is both a source and a target for replicated client-node data.
- NODE1 and NODE2 are defined to PHOENIX\_SRV. The nodes are configured for replication. During store operations, NODE1 and NODE2 send their data to PHOENIX\_SRV. The data is then replicated to DALLAS\_SRV.
- NODE3 is defined to DALLAS\_SRV. The node is configured for replication. During store operations, NODE3 sends its data to DALLAS\_SRV. The data is then replicated to PHOENIX\_SRV.
- Data belonging to NODE4 and NODE5 is replicated to DALLAS\_SRV.

Data that is replicated to a target server cannot be replicated again. For example, the data that belongs to NODE4 cannot be replicated to PHOENIX\_SRV from DALLAS\_SRV.

## Policy management for node replication

The management class and storage hierarchy that are used by a client node on a target replication server depend on whether the domain for the node exists on the target replication server.

When a client node is registered during replication processing, the domain for the node is sent to the target replication server. If the domain name is not the same on both the source and target replication servers, the node on the target replication server is placed in the standard domain on the target replication server and bound to the default management class.

To maintain the same number of file versions on the source and the target replication servers, the source replication server manages file expiration and deletion. If a file on the source replication server is marked for deletion, but not yet deleted by the expiration processing, the target replication server deletes the file during the next replication process. Expiration processing on the target replication server is disabled for replicated data. The file on the target replication server is deleted by the source replication server after the file is expired and deleted on the source.

If a client node is removed from replication on the target replication server, the policies on the target replication server are enabled. Data on the target replication server is then managed by the policies that are on the target replication server, and expiration processing can delete expired files.

**Important:** Policies that are defined on replication servers and that are dissimilar can cause undesirable side-effects. As newer versions of backup files are replicated, versions that exceed the value of the **VEREXISTS** parameter for the copy group are marked for immediate deletion. If the node that owns the files is configured for replication, expiration does not delete the files. However, because these files are marked for immediate deletion, they are not available for the client to restore. The files remain in the storage pool until replication deletes them based on the policy on the source replication server.

With Tivoli Storage Manager Version 7.1.1, you can configure the source and target replication servers to allow the target replication server to manage replicated data by using the target server policies. Run expiration processing on the target replication server to delete the expired files appropriately.

### Tips:

- Policies and storage pool hierarchies on the source and target replication servers can be different. You can use deduplicated storage pools on the source replication server, on the target replication server, or both. However, to maintain synchronization of the data on source and target replication servers, configure the management classes on the source and target replication servers to manage data similarly. To coordinate policies, consider using Tivoli Storage Manager enterprise configuration.
- Ensure that sufficient space is available in the storage pool on the target replication server.
- If a replicated file on the target replication server is deleted, it is eligible for replication the next time replication runs for the client node that owns the file.

### Related tasks:

“Enabling the target replication server policies” on page 1010

### Related reference:

“File expiration and expiration processing” on page 486

## Node replication processing

Replication processing involves the interaction between replication rules, states, and modes. Data deduplication and the updating of client node attributes are also factors in node replication processing.

### Replication rules

Replication rules control what data is replicated and the order in which it is replicated.

#### Related reference:

“Change replication rules” on page 971

#### Replication rule definitions:

Replication rules are assigned to data types. Data types include backup data, archive data, and space-managed data that is migrated by Tivoli Storage Manager for Space Management clients.

The Tivoli Storage Manager server has the following predefined set of replication rules. You cannot create replication rules.

#### ALL\_DATA

Replicates backup, archive, or space-managed data. The data is replicated with a normal priority. For example, you can assign the ALL\_DATA rule to backup data and archive data, and assign a different rule to space-managed data.

#### ACTIVE\_DATA

Replicates only active backup data. The data is replicated with a normal priority. You can assign this rule only to the backup data type.

**Attention:** If you specify ACTIVE\_DATA and one or more of the following conditions are true, inactive backup data on the target replication server is deleted, and inactive backup data on the source replication server is not replicated.

- When a Tivoli Storage Manager version earlier than Version 7.1.1 is installed on either the source or target replication servers.
- When you are using the **REPLICATE NODE** command with the **FORCERECONCILE=YES** parameter.
- When you are running the initial replication of a file space after you configure replication, restore the database, or upgrade both the source and target replication servers from a Tivoli Storage Manager version earlier than V7.1.1.

If the previous conditions are not true, all new and changed files since the last replication are replicated, including inactive files, and files are deleted when they expire.

#### ALL\_DATA\_HIGH\_PRIORITY

Replicates backup, archive, or space-managed data. The data is replicated with a high priority. In a replication process that includes both normal-priority and high-priority data, high-priority data is replicated first.

#### ACTIVE\_DATA\_HIGH\_PRIORITY

| This rule is the same as the ACTIVE\_DATA replication rule except data is  
| replicated with a high priority.

#### DEFAULT

Replicates data according to the rule that is assigned to the data type at the next higher level in the *replication-rule hierarchy*. The replication-rule hierarchy comprises file space rules, individual client-node rules, and server rules. Server rules apply collectively to all nodes that are defined to a source replication server and that are configured for replication.

Rules that are assigned to data types in file spaces take precedence over rules that are assigned to data types for individual nodes. Rules that are assigned to data types for individual nodes take precedence over server rules. For example, if the DEFAULT replication rule is assigned to back up data in a file space, the server checks the replication rule for backup data that is assigned to the client node. If the client node rule for backup data is DEFAULT, the server checks the server rule for backup data.

The DEFAULT rule is valid only for data types at the file space level and the client node level. It is not valid for data types at the server level.

For example, suppose that you want to replicate the archive data in all the file spaces that belong to a client node. Replication of the archive data is a high priority. One method to accomplish this task is to specify DATATYPE=ARCHIVE REPLRULE=DEFAULT for each file space. Ensure that the client replication rule for archive data is set to ALL\_DATA\_HIGH\_PRIORITY or to DEFAULT. If the client replication rule is DEFAULT, the server replication rule for archive data must be set to ALL\_DATA\_HIGH\_PRIORITY.

#### NONE

Backup, archive, or space-managed data is not replicated. For example, if you do not want to replicate archive data, assign the NONE rule to the archive data type. If you do not want to replicate the space-managed data in a file space, specify the NONE replication rule for space-managed data.

**Tip:** When you set up the default replication configuration, you do not have to assign or change replication rules. Tivoli Storage Manager automatically assigns the DEFAULT replication rule to all data types in the file spaces and in the client nodes that you configured. The system-wide replication rules are automatically set to ALL\_DATA. You can change file space, client-node, and system-wide rules after you set up the default configuration.

If a file space is added to a client node that is configured for replication, the file space rules for data types are initially set to DEFAULT. If you do not change the file space rules, the client node and server rules determine whether data in the file space is replicated.

### Replication rule attributes:

Replication rules have attributes. You can modify the replication state of a rule.

A replication rule has the following attributes:

#### Rule name

Specifies the name of a replication rule, such as ALL\_DATA, ALL\_DATA\_HIGH\_PRIORITY, and so on.

#### Priority

Specifies the order in which data is replicated. Data can be replicated with normal priority or high priority. In a replication process that includes both normal-priority and high-priority data, high-priority data is replicated first. The replication rules ALL\_DATA and ACTIVE\_DATA are normal priority. The replication rules ALL\_DATA\_HIGH\_PRIORITY and ACTIVE\_DATA\_HIGH\_PRIORITY are high priority.

#### Active-data only?

Specifies that the rule replicates only active backup data. The value of this attribute is YES for the rules ACTIVE\_DATA and ACTIVE\_DATA\_HIGH\_PRIORITY.

**State** Specifies whether a replication rule is enabled or disabled. Before data is replicated, the state of the rule that applies to the data is checked. If the state is enabled, the data is replicated. If the state is disabled, the data is skipped during replication.

You can change the state of a replication rule.

To display the attributes of replication rules, issue the **QUERY REPLRULE** command.

### Replication rule hierarchy:

Replication rules are applied to data types in file spaces and in individual client nodes. Replication rules are also applied collectively at the server level to all client nodes that are defined to the server and that are configured for replication. File space rules take precedence over rules for individual nodes. Rules for individual nodes take precedence over server rules.

In a client node that is configured for replication, each file space has three replication rules. One rule applies to backup data in the file space. The other rules apply to archive data and to space-managed data. The rules for the file space exist regardless of whether the file space has backup, archive, or space-managed data. If a file space does not contain a particular type of data, the rule for the data type in the file space is ignored during replication processing.

Similarly, each client node that is configured for replication has replication rules for backup data, archive data, and space-managed data. Client node rules apply to all the file spaces that belong to a node. Replication rules also exist at the server level that applies collectively to every client node that is configured for replication on a source replication server.

The following figure shows the replication rule hierarchy.

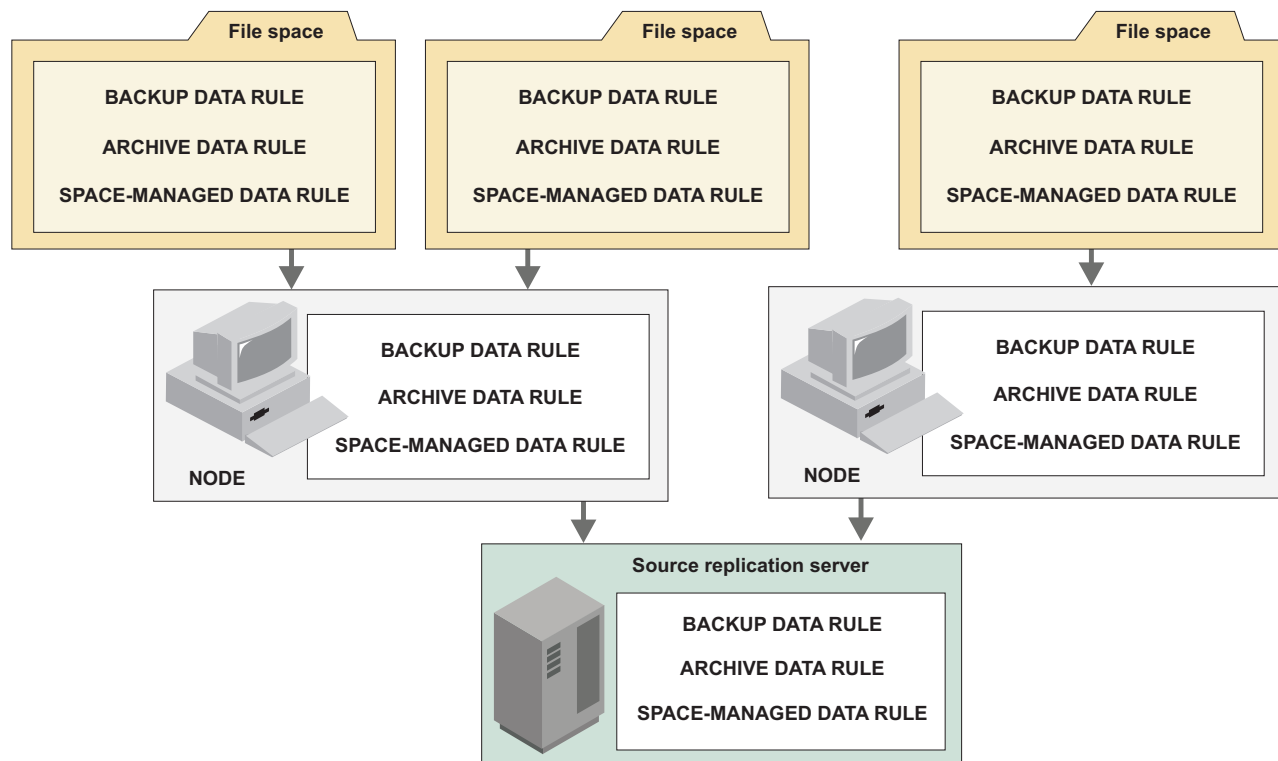


Figure 113. Replication-rule hierarchy

During replication processing, file space rules take precedence over rules for individual nodes. Rules for individual nodes take precedence over server rules. The replication rule that has precedence is called the *controlling replication rule*.

#### Example: Processing replication rules:

In this example, replication rules are assigned to data types in file spaces, client nodes, and the server.

The following figure shows an example replication configuration that comprises two client nodes and three file spaces. This figure shows how Tivoli Storage Manager processes replication rules.

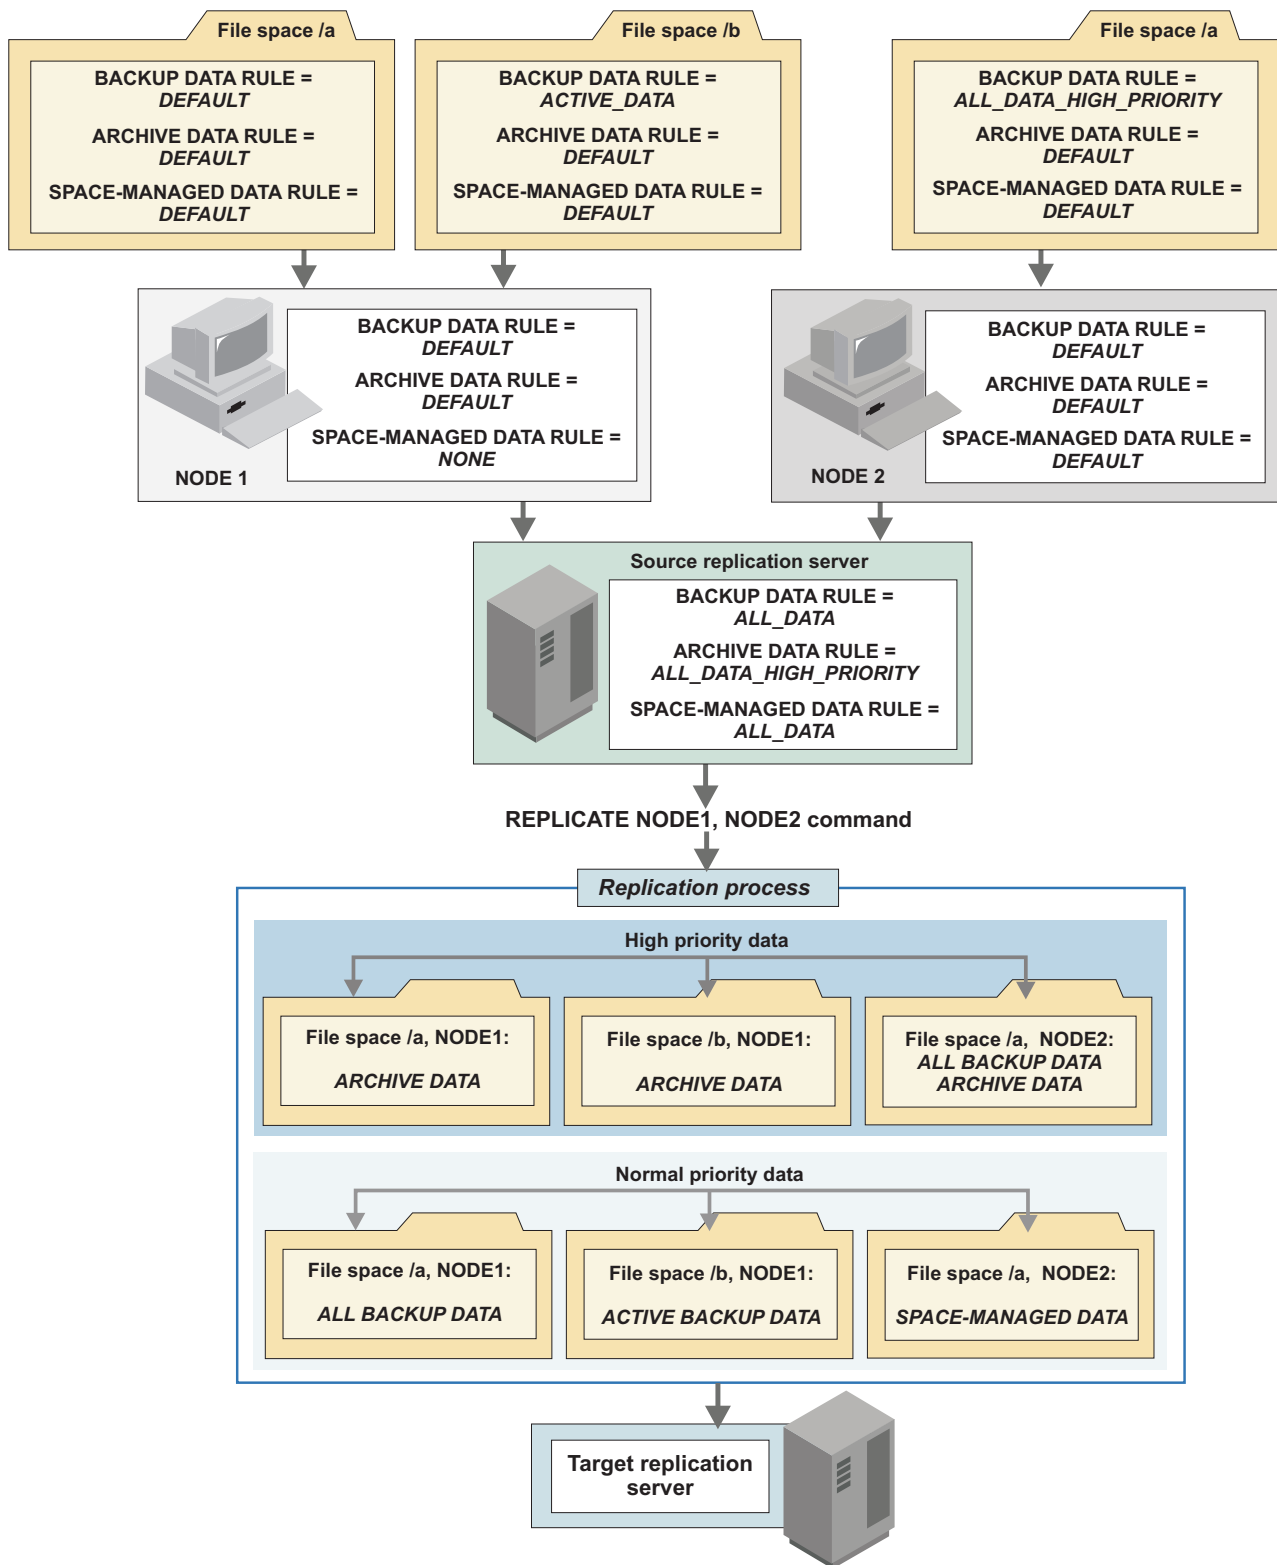


Figure 114. Replication configuration example

When the **REPLICATE NODE** command is issued, a single replication process begins. The source replication server identifies client nodes that are configured for replication and the rules that apply to the file spaces in nodes that are enabled.

For example, the file spaces in NODE1 and NODE2 contain important archive data. Replication of that data is a high priority. The source replication server checks the rules for archive data in file spaces. Because the rules are set to DEFAULT, the source replication server checks the client-node replication rules for archive data. These rules are also set to DEFAULT. As a result, the source replication server checks the server replication rule for archive data. Because it is set to ALL\_DATA\_HIGH\_PRIORITY, archive data in file spaces that belong to NODE1 and NODE2 is replicated before normal-priority data.

The backup data in file space /a that belongs to NODE2 is also high priority. The file space rule for backup data, which is ALL\_DATA\_HIGH\_PRIORITY, takes precedence over the client node rule of DEFAULT and the server rule of ALL\_DATA.

#### Tips:

- Figure 114 on page 954 shows one possible configuration to achieve the specified results. In general, multiple configurations can exist that accomplish the same purpose.

For example, to replicate archive data first, you can assign the ALL\_DATA\_HIGH\_PRIORITY replication rule to the archive data type in each file space that belongs to NODE1 and NODE2.

- Figure 114 on page 954 shows one replication process. To replicate certain client nodes ahead of other client nodes, you can issue multiple **REPLICATE NODE** commands in sequence, either manually or in a maintenance script. Each command can specify a different client node or different file spaces in an individual client node. For example, suppose NODE1 contains a large amount of data and you want to conserve bandwidth. To replicate client node data sequentially, you can specify NODE1 in a single **REPLICATE NODE** command and NODE2 in another **REPLICATE NODE** command.

#### Related concepts:

“Replication rule hierarchy” on page 952

“Replication rule definitions” on page 950

### Replication state

*Replication state* indicates whether replication is enabled or disabled. When you disable replication, replication does not occur until you enable it.

Replication states apply to the following objects:

#### Replication rules

The state of a replication rule can be enabled or disabled. If a replication rule is disabled, data to which the rule is assigned is not replicated.

For example, suppose that you have 500 client nodes that are defined to a source replication server. The replication rule that is assigned to archive data in some file spaces is ALL\_DATA\_HIGH\_PRIORITY. The server rule that is assigned to archive data is also ALL\_DATA\_HIGH\_PRIORITY. If you disable the ALL\_DATA\_HIGH\_PRIORITY rule, archive data in any file space that is assigned that rule is skipped during replication processing.

#### Individual client nodes

When you disable replication for a client node, backup, archive, and space-managed data in file spaces that belong to the client node is skipped during replication processing. Disabling replication for a client node can be useful, for example, if the data that belongs to the node is corrupted or contaminated. After the problem is fixed, you can enable replication.



For replication to occur, the client node must be enabled on the source and the target replication servers.

#### **Data types in file spaces**

You can enable or disable replication of one or more data types in a file space. For example, you can disable replication of backup data in a file space.

Disabling replication of a data type in a file space can be useful if, for example, a file space has large amounts of backup data and archive data. You can enable the replication of backup data and disable replication of archive data. After the backup data is replicated, you can enable replication of archive data.

You cannot disable replication for an entire file space. You can only disable replication for an entire file space by setting the state of each data type to disabled.

During replication, the replication state of a file-space data type is checked only on the source replication server. The replication state of a file space data type on the target replication server is irrelevant.

Figure 115 on page 957 shows the interaction of replication states and replication rules. In the example, NODE1 has a single file space /a that contains archive data. Assume that the replication state of NODE1 on the target replication server is ENABLED and that replication processing for all nodes is enabled.

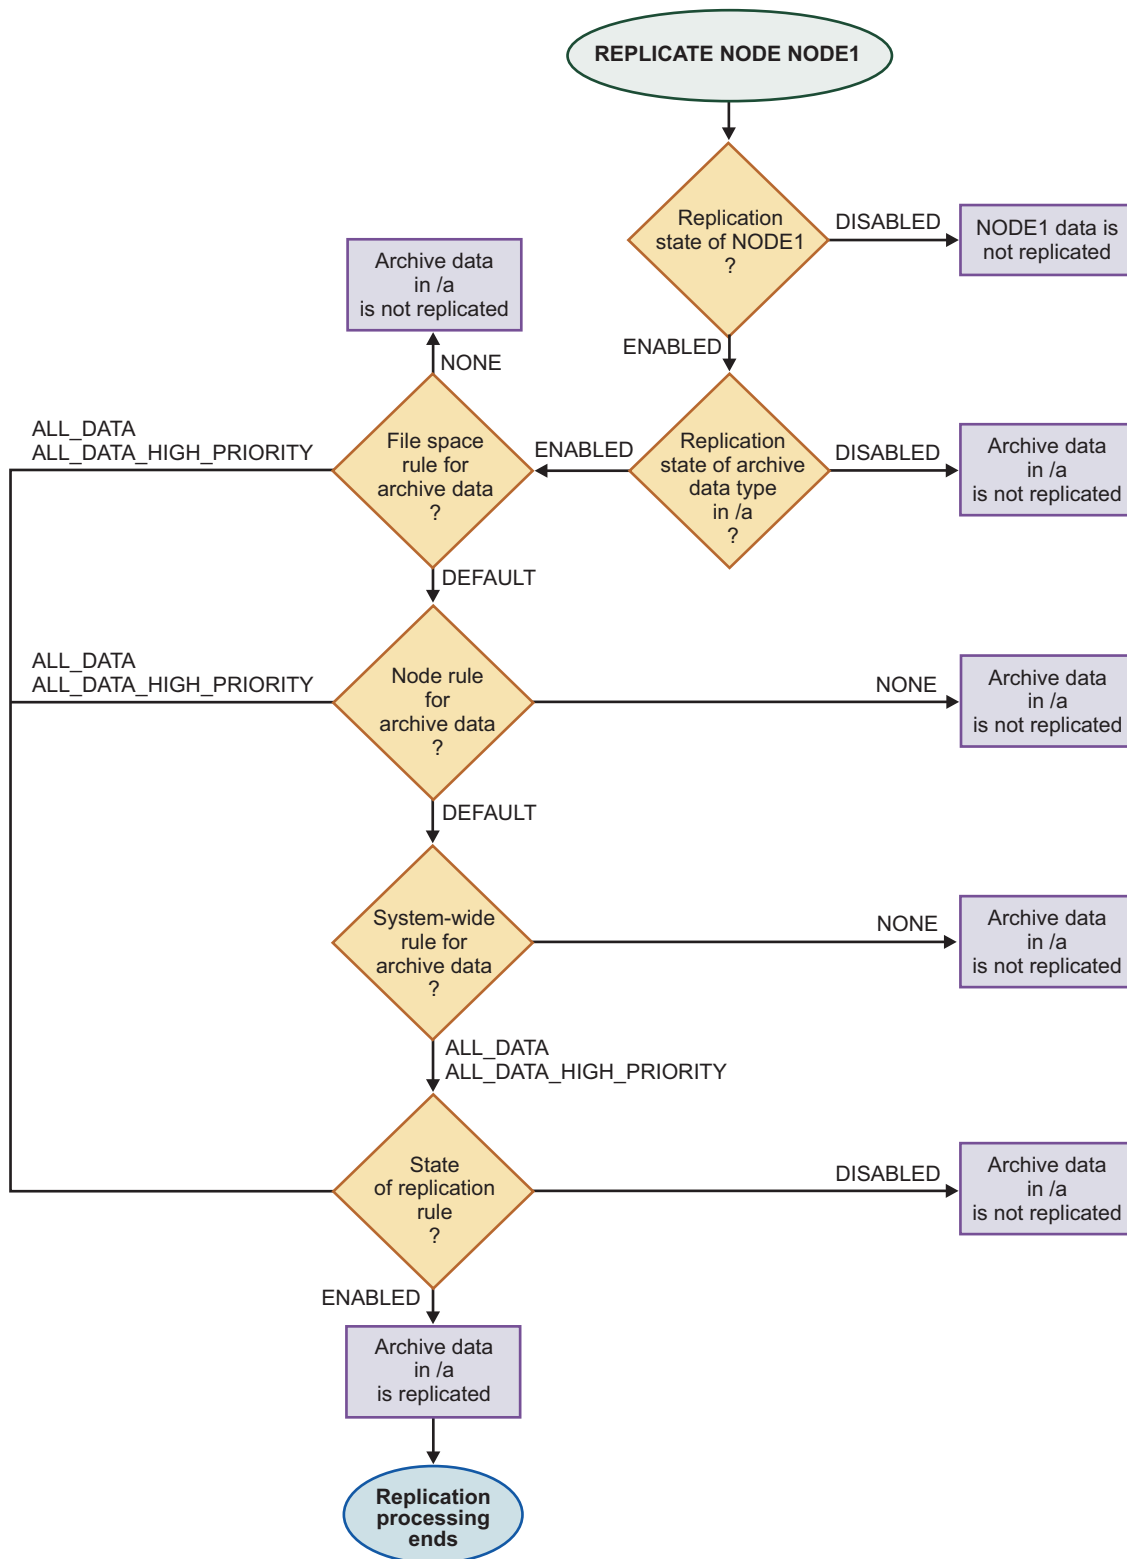


Figure 115. Replication state example

During replication processing, the following replication states are checked:

1. NODE1
2. Archive data type in file space /a

### 3. Replication rule for archive data

To determine the replication state of a file space, issue the **QUERY FILESPACE** command. To determine the replication state of a client node, issue the **QUERY NODE** command, and to determine the replication state of a rule, issue the **QUERY REPLRULE** command.

#### Replication mode

*Replication mode* is part of a client node definition and indicates whether a client node is set up to send or receive replicated data. The replication mode can also indicate whether the data that belongs to a client node is to be synchronized the first time that replication occurs. Data synchronization applies only to client nodes whose data was exported from the source replication server and imported on the target replication server.

The following modes are possible for a client node whose data is not being synchronized:

**SEND** Indicates that the client node is set up to send data to the target replication server. The SEND replication mode applies only to the client node definition on a source replication server.

#### RECEIVE

Indicates that the client node is set up to receive replicated data from the source replication server. The RECEIVE replication mode applies only to the client node definition on a target replication server.

#### NONE

The client node is not configured for replication. To be configured for replication, the client node must be enabled or disabled for replication.

If the data that belongs to a client node was previously exported from a source replication server and imported on a target replication server, the data must be synchronized. Synchronization is also required after a database restore to preserve the client node data that is on the target replication server. When the data that belongs to a client node is synchronized, entries in the databases of the source and target replication servers are updated.

The following special settings for replication mode are required to synchronize data.

**Restriction:** To synchronize data, the date of the imported data on the target replication server must be the original creation date.

#### SYNCSEND

Indicates that data that belongs to the client node on the source replication server is to be synchronized with the client node data on the target replication server. The SYNCSEND mode applies only to the client node definition on a source replication server.

When data synchronization is complete, the replication mode for the node on the source replication server is set to SEND.

#### SYNCRECEIVE

Indicates that data that belongs to the client node on the target replication server is synchronized with the client node data on the source replication server. This SYNCRECEIVE mode applies only to the client node definition on the target replication server.

When data synchronization is complete, the replication mode for the node on the target replication server is set to RECEIVE.

## Replication of deduplicated data

*Data deduplication* is a method for eliminating redundant data that is stored in sequential-access disk (FILE) primary storage pools, copy storage pools, and active-data storage pools. Before the data is replicated, the source replication server determines whether storage pools are set up for data deduplication.

**Restriction:** During replication processing, the simultaneous-write function is disabled on the target replication server when you store data to a primary storage pool that is enabled for data deduplication. Data that is replicated consists of only files or extents of data that do not exist on the target replication server.

The following table shows the results when storage pools on source and target replication servers are enabled for data deduplication. The destination storage pool is specified in the backup or archive copy-group definition of the management class for each file. If the destination storage pool does not have enough space and data is migrated to the next storage pool, the entire file is sent, whether the next storage pool is set up for deduplication.

| If the storage pool on the source replication server is | And the destination storage pool on the target replication server is | The result is                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enabled for data deduplication                          | Enabled for data deduplication                                       | Only extents that are not stored in the destination storage pool on the target replication server are transferred.                                                                                                                                                                                                                                                                       |
| Enabled for data deduplication                          | Not enabled for data deduplication                                   | Files are reassembled by the source replication server and replicated in their entirety to the destination storage pool.                                                                                                                                                                                                                                                                 |
| Not enabled for data deduplication                      | Enabled for data deduplication                                       | The source replication server determines whether any extents were identified for files that were previously stored in deduplicated storage pools. Any files that were never in a deduplicated storage pool are replicated in their entirety. For files that had extents that were previously identified, only extents that do not exist in the destination storage pool are transferred. |
| Not enabled for data deduplication                      | Not enabled for data deduplication                                   | Files are replicated in their entirety to the destination storage pool.                                                                                                                                                                                                                                                                                                                  |

**Tip:** If you have a primary storage pool that is enabled for deduplication on a source replication server, you can estimate a size for a new deduplicated storage pool on the target replication server. Issue the **QUERY STGPPOOL** command for the primary deduplicated storage pool on the source replication server. Obtain the value for the amount of storage space that was saved in the storage pool as a

result of server-side data deduplication. This value is represented by the field `Duplicate Data Not Stored` in the command output. Subtract this value from the estimated capacity of the storage pool.

**Related tasks:**

“Deduplicating data” on page 299

“Writing data simultaneously to primary, copy, and active-data pools” on page 346

## **Client node attributes that are updated during replication**

During node replication, the source replication server updates the client node attributes that are part of the node definition that is on the target replication server.

A Tivoli Storage Manager V7.1 server can replicate any node definition that is set as a proxy agent for a replicating node. The associated replication node definition must be replicated to the target replication server for failover to occur.

The following client node attributes are updated during node replication:

- Aggregation
- Automatic file space rename
- Archive delete authority
- Backup delete authority
- Backup initiation
- Cipher strength
- Client option sets
- Compression option
- Contact
- Data-read path
- Data-write path
- Email address
- File space access rules that are created with the client **SET ACCESS** command
- High-level address
- Low-level address
- Node lock state
- Operating system
- Option set name
- Password
- Password expiration period
- Proxy node
- Role override
- Session initiation
- Transaction group maximum
- URL
- Validate protocol

**Attention:**

- Ensure that all servers in your replication configuration do not create client option set conflicts on target replication servers. When an option set is created, all client nodes that reference that option set use the options that are defined. Client nodes that are replicated from different source replication servers can use the same option set. Only the first option set that is replicated is defined on the target replication server.
- The node password for the client node is updated during replication on the source replication server by one server and on the target replication server by a different server. Because authentication can happen on a Lightweight Directory Access Protocol (LDAP) directory server or the Tivoli Storage Manager server, data can be lost. If dual authentication occurs, the password is not updated during replication.

The following client node attributes are not updated during node replication:

- Domain name (might not exist on target replication server)
- Node conversion type
- Target level for automatic client deployment

---

## Planning for node replication

Use a checklist of planning considerations to streamline implementation. Planning considerations include items such as the types of data that you want to replicate and the replication rules that you want to apply.

### About this task

As you plan, remember that a target replication server must be accessible from a source replication server by using an IP connection. The connection must provide sufficient bandwidth to accommodate the volume of data to be replicated. If the connection is insufficient and becomes a bottleneck for replication, keeping the data on the two servers synchronized can be a problem. Keep in mind that you can use client-side data deduplication with node replication to reduce network bandwidth requirements and storage requirements.

The destination storage pool on a target replication server must have sufficient space to store replicated data.

Include the following steps in your planning process:

### Procedure

- Identify the client nodes and, if necessary, the file spaces that belong to those nodes, that have data to be replicated.
- Identify the types of data that you want to replicate. With Tivoli Storage Manager, you can replicate backup data, archive data, and space-managed data. If you decide to replicate backup data, you must decide whether to replicate only active backup data or to replicate active and inactive backup data. In environments with large amounts of backup data, it might make sense to replicate only active backup data. The type of data that you replicate can vary by node or by file space.
- Determine the order in which data is to be replicated. If you want to replicate some data ahead of other data in a replication process, you can assign a high-priority replication rule to the data that you want to replicate first. A high-priority classification does not increase the speed of replication.

- Set up a default replication configuration. In the default configuration, all backup, archive, and space-managed data is replicated in all file spaces in all replication-enabled client nodes. You can also change the replication rules at the file space, client node, and server levels. In general, you can apply different replication rules at different levels and achieve the same results.
- Identify source and target replication servers. If you have multiple source replication servers, consider whether you want to replicate data to one or more target replication servers. A single target replication server can have multiple source replication servers. However, a source replication server can replicate data to only one target replication server at a time.
- Consider using the enterprise configuration functions of Tivoli Storage Manager to set up, manage, and synchronize policy configurations on the source and the target replication servers. For example, you can change a policy configuration on a source replication server and have the changes that are automatically distributed to the target replication server.
- Consider how you want to replicate data. You can replicate one or more client nodes or defined groups of client nodes in a single process. You can schedule replication processes at different times to control network throughput.
- Decide whether you want to implement replication gradually or at one time. You can start with a simple configuration that comprises a single source replication server and a single target replication server. After you experiment with that configuration, you can build a broader network of replicating servers.
- If you use an LDAP directory server to authenticate passwords, any target replication servers must be configured for LDAP passwords. Data that is replicated from a node that authenticates with an LDAP directory server is inaccessible if the target replication server is not configured. If your target replication server is not configured, replicated data from an LDAP node can still be written to the replication server. However, the target replication server must be configured to use an LDAP directory so that you can access the data.
- Ensure that you allocate extra space for the active log and the archive log during replication processing.
- Remember that the Tivoli Storage Manager for Space Management and HSM for Windows clients do not automatically fail over to a secondary target server. You must manually edit the `dsm.sys` file to connect to the secondary server. Any secondary server information in the **replservername** stanza and **myreplicationserver** option is ignored by the Tivoli Storage Manager for Space Management and HSM for Windows clients.

## Determining server database requirements for node replication

Node replication requires more Tivoli Storage Manager database space to track the files that are replicated.

### About this task

To determine whether the database can manage more space requirements, you must estimate how much more database space that node replication will use.

**Requirement:** Place the database and database logs on separate disks that have a high performance capability. Use a separate disk or mount point for the following options:

- Other applications that use the database and logs
- System tasks, such as system paging

## Procedure

1. Determine number of files for each node and data type that is in use. Issue the **QUERY OCCUPANCY** command for each node and data type that you plan to replicate. For example, you can display information about the file spaces that are assigned to the node named PAYROLL by issuing the following command:  
`query occupancy payroll`
2. Determine how much more database space is required by using the value for the total number of files that are used by all nodes and data types. Use the following formula to calculate the amount of database space that is required:  
*Total\_number\_of\_files\_from\_all\_nodes\_and\_data\_types \* 300* (the number of additional bytes needed for each replicated file)

**Important:** You must increase the available database space when the additional required space approaches or exceeds the size of your database. Ensure that you examine both replication servers and their databases and increase the database size if necessary.

3. Increase the size of the database by the additional database space required and include an additional 10% of the database size.

## Estimating the total amount of data to be replicated

Determine the amount of data that is replicated initially and incrementally daily. Initial replications typically take longer to complete than incremental daily replications.

### Procedure

1. Estimate the initial amount of data to be replicated. Decide which nodes, file spaces, and data types must be replicated. To calculate the total amount of physical space that is occupied for each file space and data type that must be replicated, issue the **QUERY OCCUPANCY** command for each node. For example, you can display information about the file spaces assigned to the node named PAYROLL by issuing the following command:  
`query occupancy payroll`
- Tip:** Tune the performance of replication to the data type. For example, if you do not plan to replicate a data type in a file space, exclude the number of files for that data type.
2. Determine the amount of data that is backed up daily by the client nodes. Complete the following steps to estimate the amount of data that is replicated incrementally daily:
  - a. When client nodes complete a store operation, the client logs completion messages with the server. The completion messages report statistics or information for a client operation that was transferred to the server. Message ANE4961I shows the number of bytes that are transferred during a client operation.
  - b. To determine the average amount of bytes that are backed up daily by a particular node, add the number of bytes that are shown in the ANE4961I messages over several days. Then calculate the average amount of bytes to be replicated for all nodes to determine how much data is replicated daily.



## Estimating network bandwidth required for replication

To ensure that the initial replication is successful, determine whether you have the network bandwidth, processor availability, and the time for replication. Estimating network bandwidth is based on the amount of data that must be replicated.

### Procedure

1. To calculate the required network bandwidth, determine the following information:
  - Total amount of data (TD) to be replicated, in gigabytes. To calculate the total amount of data, see “Estimating the total amount of data to be replicated” on page 963.
  - Length of replication window time (RWT) in hours. The length of the replication window time is the time that you schedule during server maintenance for replication to occur.
  - Data deduplication ratio (DR), if you are using the data deduplication function. Issue the **QUERY STGPOOL** command and use the **FORMAT=DETAIL** value of to determine the data deduplication ratio value. If you are not using the data deduplication function, use 100 as the data deduplication ratio value.
2. Calculate the bandwidth required by using the following formula:  
$$(TD * (100 / DR) * 8192) / (RWT * 3600) = \text{Required\_Network\_Bandwidth}$$
  
(Mbps/second)

### What to do next

If the value for required network bandwidth exceeds the capabilities of your network, you must adjust the values in the formula. Reduce the TD value or increase the replication time, to reduce the value for *Required\_Network\_Bandwidth*. If you cannot adjust the TD or the RWT time values, adjust or replace your existing network to reduce the additional workload.

## Calculating the time that is required for replication

You can estimate how many hours it will take to replicate data. You must know the amount of data you want to replicate and the bytes per hour that the network can process.

### Procedure

1. Determine the time that is required for replication by using the number of bytes you want to replicate and the bytes per hour value. Use the following formula to calculate how many hours it takes to complete replication:  
$$\text{Total\_bytes\_to\_be\_Replicated} / \text{Bytes\_Per\_Hour} = \text{Hours\_to\_Complete\_Replication}.$$
  
To calculate the *Total\_bytes\_to\_be\_Replicated* and the *Bytes\_Per\_Hour* values, complete the steps in “Tuning replication processing” on page 1002.
2. For the initial replication, determine how many hours it takes for the replication to occur over the network during a daily window for replication by using the following calculation:  
$$\text{Days\_to\_Complete\_Replication} = \text{Hours\_to\_Complete\_Replication} / 24$$

**Requirement:** For daily incremental replications, the *Hours\_to\_Complete\_Replication* value must be larger than the amount of time you schedule for replication.

## What to do next

When you determine how long it takes for replication to finish, you can decide which method you use to complete the initial replication. The method that you use for the initial replication is based on the data, time, and bandwidth values that you calculated.

### Related tasks:

“Selecting a method for the initial replication”

## Selecting a method for the initial replication

Based on the test replication results and the total amount of data that you want to replicate, determine a method to use for the initial replication.

### Related tasks:

“Calculating the time that is required for replication” on page 964

“Tuning replication processing” on page 1002

### Method 1: Exporting and importing data by using node replication synchronization

Use this method if you have a large amount of data to replicate and you cannot wait for initial replication to complete. During replication, the data that is exported from the source replication server and imported to the target replication server is synchronized. This data is displayed as if it is replicated.

#### Procedure

1. Export the data from the source replication server for the nodes that you want to replicate. For example, to export client node information and all client files for NODE1 directly to tape drives, issue the following command:

```
export node node1 filedata=all devclass=LTO scratch=yes
```

**Tip:** You can also export client data directly to another server so that it can be immediately imported. For example, to export client node information and all client files for NODE1 directly to SERVERB, issue the following command:

```
export node node1 filedata=all toserver=serverb
```

The data is automatically imported when it is exported to another server.

2. Import the data to the target replication server. For example, to import client node information from tape volumes TAPE01, TAPE02, and TAPE03, issue the following command:

```
import node volumenames=tape01,tape02,tape03 dates=absolute
```

**Requirement:** Ensure that you use the **DATES=ABSOLUTE** parameter on the **IMPORT NODE** command when you import the data to the target replication server. The **ABSOLUTE** value sets the insertion dates for the objects on the target replication server to be the same as the insertion dates on the source replication server. When synchronization occurs, the servers use the insertion dates to identify files that are the same and updates them as replicated files.

3. Configure the nodes on the source and target replication servers. Issue the **UPDATE NODE** command and specify the following parameters:
  - On the source replication server: **REPLMODE=SYNCSEND**
  - On the target replication server: **REPLMODE=SYNCRECEIVE**
4. When replication is started, the nodes are configured for synchronization and no data is transferred to the server. The source and target replication servers

exchange information about the data and add entries to the database so that the data is managed as it is replicated. After the data synchronization is complete, the nodes are automatically configured by the Tivoli Storage Manager server to replicate data daily. When synchronization is complete on the source replication server, the parameter is automatically set to **REPLMODE=SEND**. When synchronization is complete on the target replication server, the parameter is automatically set to **REPLMODE=RECEIVE**.

## Method 2: Replicating subsets of nodes

Use this method to replicate subsets of nodes incrementally, based on specific characteristics of the data of the nodes. You can use any characteristic to create subsets of nodes. You can use this method if you have time to complete initial replication but the network cannot manage replicating all nodes at one time.

### About this task

When you decide how many nodes to add to a group, consider the amount of data that is replicated daily by the nodes.

### Procedure

1. Prioritize the subset of nodes that have critical data. Replicate critical data first, by issuing the **REPLICATE NODE** command.
2. Continue to replicate the high-priority nodes daily while incrementally adding the replication of other subsets of nodes that contain important, but not critical, data.
3. Repeat this process until all subsets of all nodes that must be replicated complete their initial replication.

### Related concepts:

"Node replication processing" on page 950

"Replication rules" on page 950

## Method 3: Replicating active data first

Use this method to set up an initial replication of active data only. By using this method, you are sending less data to be replicated than if you replicate both active and inactive data.

### About this task

The following example procedure is for a node named PAYROLL. The steps set up initial replication for active data only and then setup replication for all data.

### Procedure

1. Configure the replication rules to replicate active data. Issue the **UPDATE NODE** command for active data:  

```
update node payroll bkreplrule=active_data
```
2. Replicate the active data. Issue the **REPLICATE NODE** command to replicate active data:  

```
replicate node payroll
```
3. Configure the replication rules to replicate all data. Issue the **UPDATE NODE** command for all data:  

```
update node payroll bkreplrule=all_data
```
4. Replicate all data. Issue the **REPLICATE NODE** command to replicate all data:  

```
replicate node payroll forcereconcile=yes
```

Results

During the initial replication, only active data is replicated. In step 4 on page 966, any active and inactive files that were not previously replicated are replicated.

Method 4: Replicating all nodes

Use this method if you determine you have time for the initial replication process to complete, and you can configure the nodes and begin or schedule a replication.

Procedure

- 1. Configure all nodes that must be replicated by issuing the **UPDATE NODE** command and specify the **REPLSTATE=ENABLED** parameter.
- 2. Issue the **REPLICATE NODE** command to start replication processing.
- 3. Monitor the progress of the replication by issuing the **QUERY PROCESS** command. Summary information is displayed, which includes the amount of data that is replicated and the process duration.

**Remember:** If you do not have time to complete replication, you can cancel it after it has started, by issuing the **CANCEL REPLICATION** command.

- 4. Use the summary information to determine whether the values of the controlled test match the actual replication values. You calculate the values of the controlled test in "Tuning replication processing" on page 1002. For example, to display information about a replication process 23, issue the following command:

query process 23

The following summary information is displayed:

| Process Number | Process Description | Status                                                                                                                                                                                                                                                                                                                                                            |
|----------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23             | REPLICATE NODE      | Replicating Node(s) IRONMAN.<br>File spaces complete: 0.<br>File spaces examining and replicating: 1.<br>File spaces replicating: 0.<br>File spaces not started: 3.<br>Files current: 11,920.<br>Files replicated: 0 of 0.<br>Files updated: 0 of 0.<br>Files deleted: 0 of 0.<br>Bytes Replicated: 0 of 0.<br>Elapsed Time: 0 Day(s),<br>0 Hour(s), 1 Minute(s). |

Scheduling incremental replication after the initial replication

After you complete the initial replication, schedule subsequent incremental replications frequently. Scheduling replication frequently ensures that the data on the target replication server is maintained at an acceptable recovery point that you specify in your data recovery plan. Daily incremental replications typically do not require as much time to complete as the initial replication.

About this task

If you are unable to complete the replication process in the amount of time that you scheduled, increase the number of data sessions that transfer data to the target replication server. Replication performance improves when more deduplicated data is stored on the target replication server. When more extents are stored on the

target replication server, more duplicates are found for an extent.

## Procedure

If you are replicating data from storage pools that are enabled for data deduplication, run processes in the following order:

1. To identify duplicates, issue the **IDENTIFY DUPLICATES** command. Break files into extents to reduce the amount of data that is sent to the target replication server when replication occurs.
2. To start replication processing, issue the **REPLICATE NODE** command. Only file extents that do not exist on the target replication server are sent during replication, which reduces the required bandwidth and improves performance.
3. To start reclamation processing, issue the **RECLAIM STGPOOL** command. Reclamation removes and links duplicated extents.

---

## Node replication restrictions

Restrictions can affect planning and implementation. For example, Tivoli Storage Manager applies the replication rule for archive data to the data that was migrated by the HSM for Windows client.

If you restore a file from the Tivoli Storage Manager target server, and the file system is managed by Tivoli Storage Manager for Space Management, you must not restore the file as a stub file. You must restore the complete file. Use the `restoremigstate=no` option to restore the complete file. If you restore the file as a stub from the target server, the following consequences can occur:

- You cannot recall the file from the Tivoli Storage Manager source server by using the Tivoli Storage Manager for Space Management client.
- A Tivoli Storage Manager for Space Management reconciliation process that runs against the Tivoli Storage Manager source server expires the file. If the file is expired by a reconciliation process, you can restore the complete file with the `backup-archive` client and the `restoremigstate=no` option.

The following restrictions apply to node replication:

### Store operations to a target replication server

If a client node is configured for replication, you cannot back up, archive, or migrate its data to the server that is the target replication server for the replicated data that belongs to the node.

### Failover to a target replication server

You can use automatic failover only with Tivoli Storage Manager V7.1 servers and clients. Only one failover server for each node can be used. The failover server is always set to the last target server to which the node was replicated. The client can recover data from the target replication server, but it cannot store data during failover processing. Issue the **QUERY SESSION** command to determine whether a client node is in failover mode.

The Tivoli Storage Manager for Space Management and HSM for Windows clients, however, do not automatically fail over to the target server. You must manually edit the `dsm.sys` file to connect to the target server. Any secondary server information in the `replservername` stanza and `myreplicationserver` option is ignored by the Tivoli Storage Manager for Space Management and HSM for Windows clients.

### Client node definition on the target replication server

If you plan to add a node for replication, the client node definition cannot

exist on the target replication server. If the client node definition does exist on the target replication server, you must remove or rename the node before replication can occur.

However, if the data that belongs to a client node was exported from the source replication server and imported on the target replication server, you do not have to delete the client node definition on the target replication server. To replicate, the data must be synchronized between the source and target replication servers. Synchronization occurs during replication.

To synchronize data, the data must be imported with the value of the **DATES** parameter that is set to **ABSOLUTE** on the **IMPORT NODE** command.

### **Import and export operations**

After initial replication, data that belongs to a replicated client node cannot be imported to the target replication server for replication. However, you can export the data that belongs to the client node from the source replication server to other servers. To export, you can use media or server-to-server virtual volumes. Replication rules are not exported.

### **Data migrated by the HSM for Windows client**

The Tivoli Storage Manager for HSM for Windows client provides hierarchical storage management (HSM) for Windows NTFS file systems. When the HSM for Windows client stores data on the Tivoli Storage Manager server, the data is stored as archive data, not as space-managed data.

During replication processing, Tivoli Storage Manager applies the replication rule for archive data to the data that was migrated by the HSM for Windows client. For example, suppose that a backup-archive client has a file space that contains two directories. The data in one directory is archived to the Tivoli Storage Manager server. The data in the other directory is migrated by the HSM for Windows client, but it is stored as archive data. Both sources of data are associated with the same file space on the server.

If you set the file space replication rule for archive data to **ALL\_DATA** and the file-space replication rule for space-managed data to **NONE**, the rule for space-managed data is ignored during replication processing. All the data in the file space is replicated to the target replication server according to the rule for archive data.

### **Objects that cannot be replicated**

The following objects cannot be replicated to a target replication server:

- Replication rules
- Server node definitions
- Network-attached storage data in nonnative storage pools
- Client schedules
- Backup sets

#### **Tips:**

- If you want to convert client nodes for store operations to a target replication server, you can manually duplicate client schedules that are on the source replication server.
- You can generate backup sets on the target replication server for a replicated client node.

**Retention protection**

You cannot configure servers for replication on which archive retention protection is enabled.

**Replication and file groups**

When you are replicating files from one server to another, it is possible that some of the files that are being replicated belong to a group of files that are managed as a single logical entity. If a replication process ends without replicating all the files in a group, client nodes are unable to restore, retrieve, or recall the file group. When replication runs again, the source replication server attempts to replicate the missing files.

**Renaming a node**

If a node is configured for replication, it cannot be renamed.

**Backing up a single client node to two source replication servers**

If you have been backing up, archiving, or migrating a client node to two different servers, do not set up replication of the node from both source replication servers to the same target replication server. Replicating from two source servers might create different versions of the same file on the target server. Replicating from two source servers can cause unpredictable results when you restore, retrieve, or recall the file.

**Password propagation to the target replication server**

When client node data is replicated for the first time, the source server sends the node definition, including the password, to the target replication server. During subsequent replications, if the node password is updated, the source server attempts to send the updated password to the target replication server.

Whether these attempts succeed depends on the node authentication method and on the combination of methods that are used on the source and target replication servers. A conflict occurs if a node password is authenticated on the source server by one server and on the target replication server by a different server. Because authentication can happen on an LDAP (Lightweight Directory Access Protocol) directory server or the Tivoli Storage Manager server, data can be lost. If this kind of dual authentication occurs, the password is not updated during replication.

**Simultaneous-write function**

During replication processing, the simultaneous-write function is disabled on the target replication server when you store data to a primary storage pool that is enabled for data deduplication. Data that is replicated consists of only files or extents of data that do not exist on the target replication server.

**Related tasks:**

“Writing data simultaneously to primary, copy, and active-data pools” on page 346



---

## Task tips for node replication

Task-tip topics identify the commands that you use for tasks that are related to node replication. Task-tip topics also provide links to topics with detailed information about a task.

### Change replication rules

Customize a node replication configuration by changing the rules that apply to individual file spaces, to individual client nodes, and to collectively all client nodes that are configured for replication.

| If you want to change replication rules...                                                                                                                     | Use these commands...                                                          | For more information, see...                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------------------------------------------------------------|
| For individual file spaces. For example, change an ALL_DATA rule for backup data to ACTIVE_DATA.                                                               | <b>UPDATE FILESPACE</b>                                                        | "Changing replication rules for individual file spaces" on page 982  |
| For individual client nodes. For example, change the replication rule that applies to backup data in all of the file spaces that belong to an individual node. | <b>UPDATE NODE</b>                                                             | "Changing replication rules for individual client nodes" on page 983 |
| For all client nodes. For example, change a server replication rule of ALL_DATA to NONE.                                                                       | <b>SET BKREPLRULEDEFAULT, SET ARREPLRULEDEFAULT, and SET SPREPLRULEDEFAULT</b> | "Changing server replication rules" on page 984                      |

### Add and remove client nodes for replication

Add client nodes for replication processing and remove them from replication processing.

| If you want to...                                                                                                                                                                                                                      | Use these commands...                       | For more information, see...                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Add client nodes for replication.                                                                                                                                                                                                      | <b>REGISTER NODE</b> and <b>UPDATE NODE</b> | "Adding client nodes for replication processing" on page 989                                                                                                   |
| Remove client nodes from replication. Removing a node from replication converts a replicating node to a non-replicating node. A non-replicating node can back up, archive, and migrate data directly to the target replication server. | <b>REMOVE REPLNODE</b>                      | "Removing client nodes from replication processing" on page 990 and "Converting client nodes for store operations on a target replication server" on page 1017 |



## Manage replication servers

Manage source and target replication servers. For example, change a target replication server or disable or enable inbound or outbound sessions.

Table 89. Commands for managing replication servers

| If you want to...                                                                                                                                                     | Use these commands...                                                                                 | For more information, see...                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Set up Secure Sockets Layer (SSL) communications between a source and target replication server                                                                       | <b>DEFINE SERVER</b> , <b>UPDATE SERVER</b> , and <b>VALIDATE REPLICATION</b>                         | "Configuring a server for SSL communications" on page 978                  |
| Change a target replication server                                                                                                                                    | <b>SET REPLSERVER</b>                                                                                 | "Selecting a new target replication server" on page 992                    |
| Remove a target replication server                                                                                                                                    | <b>SET REPLSERVER</b> and <b>REMOVE REPLSERVER</b>                                                    | "Removing a replication server" on page 994                                |
| Control the number of node replication sessions                                                                                                                       | <b>REPLICATE NODE</b>                                                                                 | "Controlling throughput for node replication" on page 1001                 |
| Disable or enable inbound or outbound sessions from a source or target replication server                                                                             | <b>DISABLE SESSIONS</b> and <b>ENABLE SESSIONS</b>                                                    | "Disabling and enabling outbound or inbound sessions" on page 1005         |
| Disable or enable outbound replication processing from a source replication server                                                                                    | <b>DISABLE REPLICATION</b> and <b>ENABLE REPLICATION</b>                                              | "Disabling and enabling outbound node replication processing" on page 1007 |
| Disable or enable the recovery of damaged files from a target replication server                                                                                      | <b>SET REPLRECOVERDAMAGED</b> , <b>REPLICATE NODE</b> , <b>REGISTER NODE</b> , and <b>UPDATE NODE</b> | "Recovering damaged files from a replication server" on page 922           |
| Remove a replication configuration                                                                                                                                    | <b>REMOVE REPLNODE</b> and <b>SET REPLSERVER</b>                                                      | "Removing a node replication configuration" on page 1018                   |
| Specify, at a server level, the IP address that the client uses to communicate with the failover server, if it is different from the IP address that replication uses | <b>SET FAILOVERHLADDRESS</b>                                                                          | "Configuring the target replication server" on page 993                    |
| Use the policies that are defined on the target replication server to manage replicated client-node data independently from the source replication server             | <b>VALIDATE REPLPOLICY</b> and <b>SET DISSIMILARPOLICIES</b>                                          | "Enabling the target replication server policies" on page 1010             |

## Validate a configuration and preview results

Before you replicate client node data, you can confirm that your replication rules are set up correctly. You can also preview results. For example, you can display a list of files to be replicated.

Table 90. Commands for validating a replication configuration and previewing results

| If you want to...                                                                                                                                                                                             | Follow these steps...       | For more information, see...                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------|
| Determine whether server, client node, and file-space replication rules are set up correctly before you replicate data. You can also verify the connection between the source and target replication servers. | <b>VALIDATE REPLICATION</b> | "Verifying a node replication setup before processing" on page 995 |
| Preview replication results.                                                                                                                                                                                  | <b>REPLICATE NODE</b>       | "Verifying a node replication setup before processing" on page 995 |
| Display information about the replicating server.                                                                                                                                                             | <b>QUERY REPLSERVER</b>     | "Removing a replication server" on page 994                        |

## Manage replication processing

Manage replication processing. For example, start a replication process or disable a replication rule.

Table 91. Commands for managing replication processing

| If you want to...                                                                                                                                                     | Use these commands...                                                                                 | For more information, see...                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Replicate data. You can replicate data by individual file space, by priority, and by data type.                                                                       | <b>REPLICATE NODE</b> and <b>DEFINE SCHEDULE</b>                                                      | "Replicating data by command" on page 996                                       |
| Temporarily disable replication for a data type in a file space.                                                                                                      | <b>UPDATE FILESPACE</b>                                                                               | "Disabling and enabling replication of data types in a file space" on page 1004 |
| Temporarily disable replication for an individual client node.                                                                                                        | <b>UPDATE NODE</b>                                                                                    | "Disabling and enabling replication for individual client nodes" on page 1005   |
| Temporarily disable replication of data that is assigned a particular replication rule.                                                                               | <b>UPDATE REPLRULE</b>                                                                                | "Disabling and enabling replication rules" on page 1007                         |
| Temporarily disable inbound and outbound server sessions, including replication sessions for all client nodes.                                                        | <b>DISABLE SESSIONS</b> and <b>ENABLE SESSIONS</b>                                                    | "Disabling and enabling outbound or inbound sessions" on page 1005              |
| Temporarily disable outbound replication processing from a source replication server.                                                                                 | <b>DISABLE REPLICATION</b> and <b>ENABLE REPLICATION</b>                                              | "Disabling and enabling outbound node replication processing" on page 1007      |
| Prevent replication of backup, archive, or space-managed data in a file space on a source replication server, and delete the data from the target replication server. | <b>UPDATE FILESPACE</b>                                                                               | "Purging replicated data in a file space" on page 1011                          |
| Recover damaged files from a replication server.                                                                                                                      | <b>SET REPLRECOVERDAMAGED</b> , <b>REPLICATE NODE</b> , <b>REGISTER NODE</b> , and <b>UPDATE NODE</b> | "Recovering damaged files from a replication server" on page 922                |

Table 91. Commands for managing replication processing (continued)

| If you want to...                 | Use these commands...     | For more information, see...                                                                                                                                                                                                                                            |
|-----------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cancel all replication processes. | <b>CANCEL REPLICATION</b> | See CANCEL REPLICATION ( <a href="http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.srv.ref.doc/r_cmd_replication_cancel.html">http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.srv.ref.doc/r_cmd_replication_cancel.html</a> ). |

## Monitor replication processing and verify results

Preview results before replicating data, monitor replication processing, and verify results after replication ends.

Table 92. Commands for monitoring replication processing


| If you want to...                                                                                                                                                           | Use these commands...    | For more information, see...                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------------------------------------------------|
| Specify the number of days to retain replication records in the Tivoli Storage Manager database.                                                                            | <b>SET REPLRETENTION</b> | "Retaining replication records" on page 1016                                                 |
| Display information about the replication settings for a file space.                                                                                                        | <b>QUERY FILESPACE</b>   | "Displaying information about node replication settings" on page 1013                        |
| Display information about the replication settings for a client node.                                                                                                       | <b>QUERY NODE</b>        | "Displaying information about node replication settings" on page 1013                        |
| Display information about replication rules.                                                                                                                                | <b>QUERY REPLRULE</b>    | "Displaying information about node replication settings" on page 1013                        |
| Display records of running and ended replication processes.                                                                                                                 | <b>QUERY REPLICATION</b> | "Displaying information about running and completed node replication processes" on page 1014 |
|                                                                                                                                                                             |                          | "Displaying the activity log of a replication process" on page 1014                          |
|                                                                                                                                                                             |                          | "Displaying summary records of replication processes" on page 1015                           |
| Determine whether replication to the target replication server is keeping pace with the number of files that are eligible for replication on the source replication server. | <b>QUERY REPLNODE</b>    | "Measuring the effectiveness of a replication configuration" on page 1015                    |
| Measure the effects of data deduplication.                                                                                                                                  | <b>QUERY REPLICATION</b> | "Measuring the effects of data deduplication on node replication processing" on page 1015    |

## Setting up the default replication configuration

The default configuration replicates all backup, archive, and space-managed data in all the file spaces in all the replication-enabled nodes.

### About this task

The following figure shows the replication rules that are created in the default configuration. *Backup data* includes both active and inactive backup data.

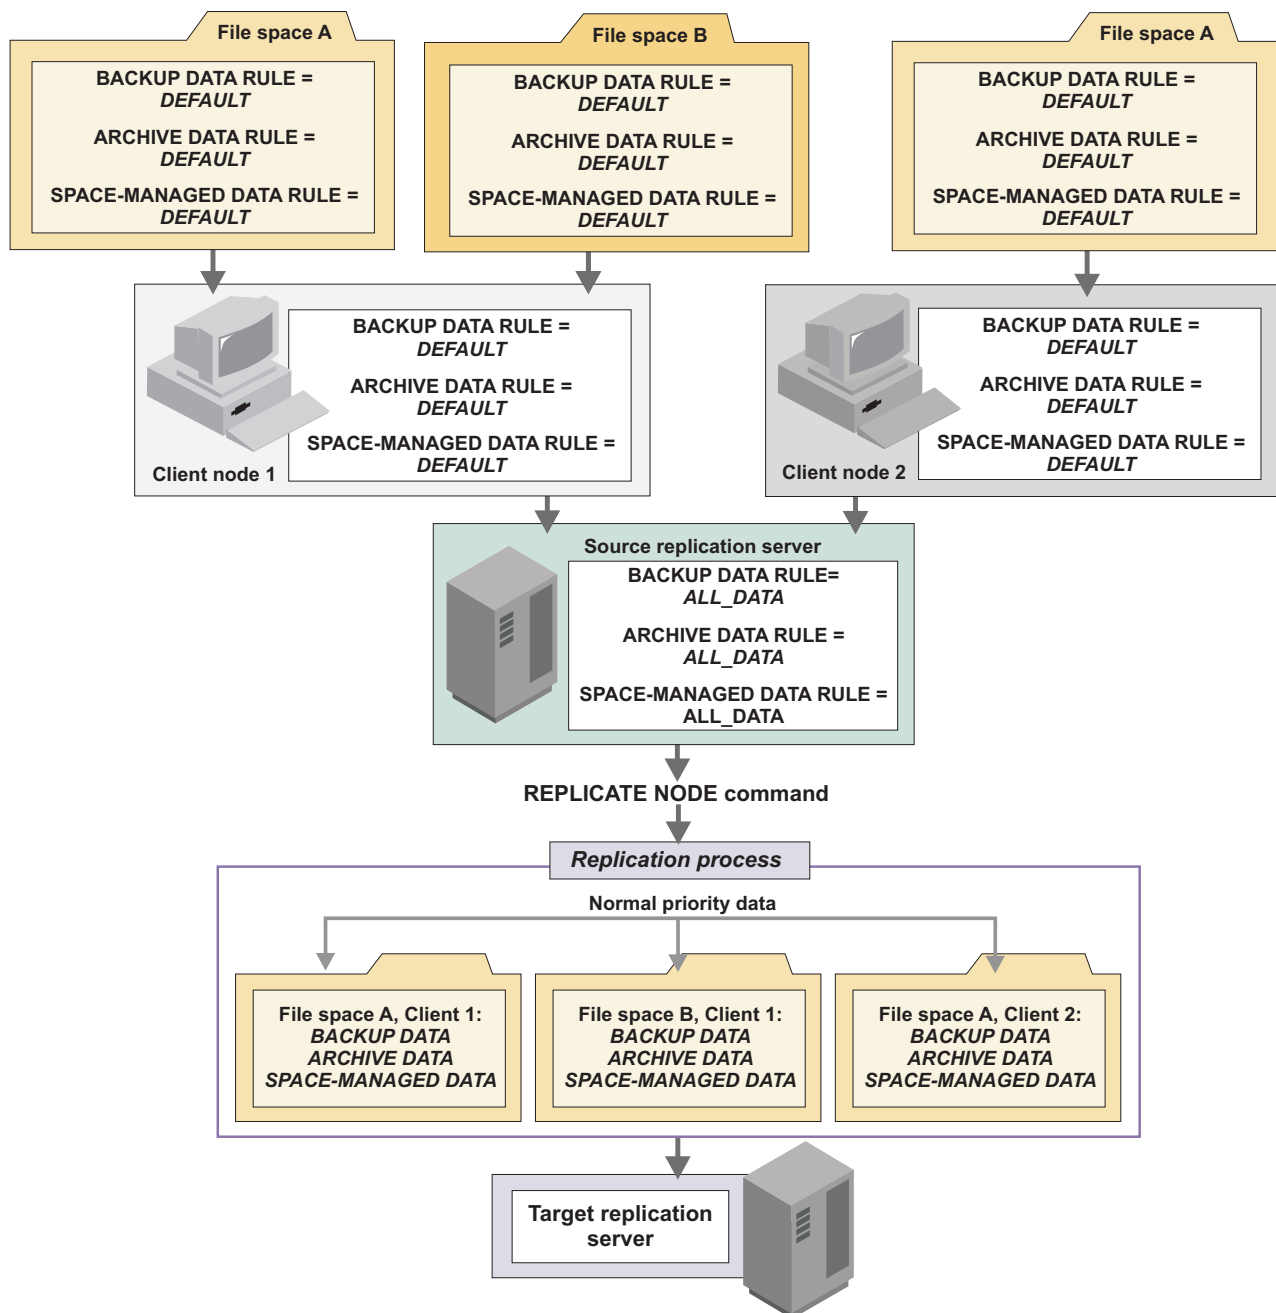

To set up the default replication scenario, complete the following tasks:

“Step 1: Setting up server-to-server communications” on page 976

“Step 2: Specifying a target replication server” on page 979

“Step 3: Configuring client nodes for replication” on page 980

After you complete the default configuration, you can change the replication rules to meet your specific replication requirements.

## Step 1: Setting up server-to-server communications

Define the source and the target replication servers to each other. When you define servers, you can also specify Secure Sockets Layer (SSL) communications.

### About this task

Server definitions are required for the source replication server to communicate with the target replication server and for the target replication server to report status to the source replication server.

Before you begin this procedure, complete the following prerequisites:

- Ensure that the target replication server is accessible from the source replication server with an IP connection.
- Ensure that there is enough network bandwidth to accommodate the volume of data to be replicated. If bandwidth is insufficient and the flow of data is impeded, the ability to keep the two servers synchronized is affected.
- If you plan to use SSL communication, the SSL infrastructure must be in place on the source and target replication servers. Required SSL certificates must be in the key database file that belongs to each server.

**Important:** You can specify only one target replication server for a source replication server. However, you can specify one or more source replication servers for a single target replication server. Source and target replication servers must be V6.3 or later.

The method that you use to set up servers depends on whether the server definitions exist and on whether you are using the cross-define function to automatically define one server to another.

To use TLS 1.2, you must specify the SSLTLS12 YES server option in the server options file. If you want to ensure that a minimum TLS protocol level of 1.2 is enforced, set the SSLDISABLELEGACYtls server option to YES. For successful TLS communication, the target server must also be configured to use TLS 1.2.

### Procedure

To set up server-to-server communications, complete one of the following actions:

- If server definitions do not exist and you want to cross-define servers, complete the following steps:

1. On the target replication server, issue the following commands:

```
set servername target_server_name
set serverpassword target_server_password
set serverhladdress _target_server_ip_address
set serverlladdress target_server_tcp_port
set crossdefine on
```

**Remember:** If you want an SSL connection, the value for the **SET SERVERLLADDRESS** command on the target replication server must be an SSL port. The value of the **SET SERVERNAME** command must match the server name in the server definition.

2. On the source replication server, issue the following commands:

```
set servername source_server_name
set serverpassword source_server_password
set serverhlladdress source_server_ip_address
set serverlladdress source_server_tcp_port
```

**Remember:** If you want an SSL connection, the value for the **SET SERVERLLADDRESS** command on the source replication server must be an SSL port. The value of the **SET SERVERNAME** command must match the server name in the server definition.

3. On the source replication server connect to the target replication server by using the **DEFINE SERVER** command. If you want an SSL connection, specify **SSL=YES**. For example:

```
define server target_server_name hlladdress=target_server_ip_address
lladdress=target_server_tcp_port serverpassword=target_server_password
crossdefine=yes ssl=yes
```

A server definition is created on the source replication server, and the source replication server is connected to the target replication server. A definition for the target replication server is created that points to the source replication server.

- If server definitions do not exist and you are not using the cross-define function, complete the following steps:

1. Issue the following commands on both the source and target replication servers:

```
set servername server_name
set serverpassword server_password
set serverhlladdress ip_address
set serverlladdress tcp_port
```

**Remember:** If you want an SSL connection, the value for the **SET SERVERLLADDRESS** command on the replication servers must be an SSL port. The value of the **SET SERVERNAME** command must match the server name in the server definition.

2. Issue the **DEFINE SERVER** command on each server. Do not specify the **CROSSDEFINE** parameter. If you want an SSL connection, specify **SSL=YES**. For example:

- On the source replication server:

```
define server target_server_name hlladdress=target_server_ip_address
lladdress=target_server_tcp_port serverpassword=target_server_password
ssl=yes
```

- On the target replication server:

```
define server source_server_name hlladdress=source_server_ip_address
lladdress=source_server_tcp_port serverpassword=source_server_password
ssl=yes
```

- If definitions exist for both the source and target replication servers, issue the **UPDATE SERVER** command on each server. Do not specify the **CROSSDEFINE** parameter. You can use the **QUERY STATUS** command to determine the server names. If you want an SSL connection, specify **SSL=YES**. For example:

- On the source replication server:

```
update server target_server_name hll=target_server_ip_address
lladdress=target_server_tcp_port serverpassword=target_server_password
ssl=yes
```

- On the target replication server:

```
update server source_server_name hladdress=source_server_ip_address
lladdress=source_server_tcp_port serverpassword=
source_server_password
ssl=yes
```

#### Related tasks:

“Setting up Secure Sockets Layer and Transport Layer Security” on page 859

## Configuring a server for SSL communications

You can configure source and target replication servers to use Secure Sockets Layer (SSL) instead of TCP/IP.

### Before you begin

A server that uses SSL can obtain a unique certificate that is signed by a certificate authority (CA), or the server can use a self-signed certificate. Before you start the source and target replication servers, install the certificates and add them to the key database files. Required SSL certificates must be in the key database file that belongs to each server. SSL support is active if the server options file contains the SSLTCPPOINT or SSLTCPADMINPOINT option or if a server is defined with **SSL=YES** at startup.

If the client is configured for SSL communication, the client uses the SSL port to communicate with the target server during failover.

Because the certificate is provided by a trusted authority, it is accepted by the server and, therefore, communication between servers can begin. You can query a server-defined password by issuing the **QUERY SSLKEYRINGPW** command. Because the server uses random characters, it is better to update the password by issuing the following command:

```
SET SSLKEYRINGPW newpw UPDATE=Y
```

The server and its database are updated with the new password. After you update the password, shut down the server, add the certificates, and start the server.

### About this task

To determine whether a server uses SSL, issue the **QUERY SERVER** command.

### Procedure

To update a server definition for SSL, issue the **UPDATE SERVER** command. For example, to update the server definition for server PHOENIX\_SRV, issue the following command:

```
update server phoenix_srv ssl=yes
```

### What to do next

**Restriction:** For event servers, library servers, and target replication servers, the name of the source replication server must match the value of the **SET SERVERNAME** command on the target server. Because the source replication server uses the name of the target replication server for SSL communications, the name is not available for the TCP/IP server definition that is required for enterprise events or library sharing.

If you enable SSL communications and are using the following functions, you must create separate source and target definitions that use TCP/IP for the corresponding server-to-server communications:

- Enterprise configuration
- Command routing
- Virtual volumes
- LAN-free

#### Configuring SSL-enabled servers for non-SSL communications:

If you use SSL with node replication, you must create separate server definitions for enterprise configuration, command routing, virtual volumes, and LAN-free communications.

#### About this task

Suppose that you want to use a source replication server to replicate data and to route commands. In the option file of the target replication server, the value of the `TCPPORT` option is 1500. The value of the `SSLTCPPORT` option is 1542.

#### Procedure

To create separate definitions, issue the following commands. For enterprise configuration, command routing, virtual volumes, and LAN-free communications, you can use the server name `NOSSL`. The server definition name must have a value that corresponds to the value of the **SET SERVERNAME** command on the target replication server.

```
define server nossl haddress=1.2.3.4 lladdress=1500 ssl=no
serverpassword=xxxxx
```

You can use the server name `SSL` for node replication:

```
define server ssl haddress=1.2.3.4 lladdress=1542 ssl=yes
serverpassword=xxxxx
```

## Step 2: Specifying a target replication server

For each source replication server, you can specify only a single target replication server. Multiple source replication servers can share the same target replication server.

#### Before you begin

Before you begin this procedure, issue the **PING SERVER** command. The command verifies that the definitions for the source and target replication servers are valid and that the servers are connected.

#### Procedure

To specify a target replication server, issue the **SET REPLSERVER** command on the source replication server. For example, to specify a server named `PHOENIX_SRV` as the target replication server, issue the following command:

```
set replserver phoenix_srv
```



## Results

Issuing the **SET REPLSERVER** command also sets replication rules to **ALL\_DATA**. To display replication rules, you can issue the **QUERY STATUS** command.

### Related concepts:

“Replication server configurations” on page 947

## Step 3: Configuring client nodes for replication

When a node is configured for replication for the first time, it cannot exist on the target replication server unless the data of the node was exported from the source replication server and imported on the target replication server.

### Before you begin

Before you begin this procedure:

- Ensure that the source replication server and target replication server are set up for server-to-server communications and that they can communicate with each other.
- Ensure that a target replication server was specified.
- If the data for a client node was exported from a source replication server and imported to the target replication server, you must synchronize the data. To synchronize data, the data must be imported with the value of the **DATES** parameter on the **IMPORT NODE** command that is set to **ABSOLUTE**. The source replication server uses the file names and the insertion dates that files were imported to identify identical files.

### Restrictions:

- If a client node definition does not exist on the target replication server, do not create it. The definition for the client node on the target replication server is created automatically when the data of the node is replicated the first time.
- If a client node definition exists on both the source and target replication servers, but the data that belongs to the client node was not exported and imported, you must rename or remove the client node on the target replication server before data can be replicated.
- If you previously removed a client node from replication on the source replication server, but not on the target replication server, you do not have to rename or remove the node on the target replication server.

### About this task

To configure a client node for replication, take one of the following actions, depending on whether data of the node was exported from the source replication server and imported on the target replication server:

### Procedure

- If the data of the node was not exported from the source replication server and imported on the target replication server, complete one of the following steps:
  - If the client node is not already registered on a source replication server, issue the **REGISTER NODE** command on the source replication server. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**.

For example, to enable a new client node, **NODE1**, for replication, issue the following command:

```
register node node1 password replstate=enabled
```

- If the client node is already registered on a source replication server, issue the **UPDATE NODE** command on the source replication server. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**.

For example, to enable an existing client node, **NODE1**, for replication, issue the following command:

```
update node node1 replstate=enabled
```

- If the data of the node was exported from the source replication server and imported to the target replication server, complete the following steps:
  1. On the source replication server, issue the **UPDATE NODE** command:
    - a. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**.
    - b. Specify **REPLMODE=SYNCSND**.
  2. On the target replication server, issue the **UPDATE NODE** command and specify **REPLMODE=SYNCRECEIVE**.

Data is synchronized during replication. After the replication process is complete, the **REPLMODE** parameter in the client node definition on the source replication server is set to **SEND**. The **REPLMODE** parameter in the client node definition on the target replication server is set to **RECEIVE**, and the **REPLSTATE** parameter is set to **ENABLED**.

## Results

If you set the replication state of the client node to **DISABLED**, the replication mode is set to **SEND**, but replication does not occur. If you set the replication state of the client node to **ENABLED**, the client node definition is created on the target replication server when replication occurs for the first time. In addition, the replication mode of the client node on the target replication server is set to **RECEIVE**, and the replication state is set to **ENABLED**.

If you add a file space to a client node that is configured for replication, the file space replication rules for data types are automatically set to **DEFAULT**. To change file space replication rules, issue the **UPDATE FILESPACE** command.

To determine the replication mode and the replication state that a client node is in, issue the **QUERY NODE** command.

## What to do next

The default configuration is complete after client nodes are configured for replication. You are now ready to replicate. If you do not change the default replication rules, all backup, archive, and space-managed data in all replication-enabled client nodes is replicated.

### Related concepts:

“Replication mode” on page 958

“Replication state” on page 955

---

## Customizing a node replication configuration

With Tivoli Storage Manager, you can change the replication configuration, including the type and priority of data that is replicated.

### Related tasks:

“Enabling the target replication server policies” on page 1010

## Changing replication rules

You can change replication rules that apply to data types in individual file spaces, to individual client nodes, and collectively to all client nodes that are configured for replication.

### Changing replication rules for individual file spaces

When replication processing begins, the source server first checks the replication rules that apply to data types in file spaces. File space rules take precedence over client node rules and server rules.

#### About this task

Rules for file spaces are either normal priority or high priority. In a replication process that includes both normal-priority and high-priority data, high-priority data is replicated first. If you issue the **REPLICATE NODE** command for two or more clients, all high priority data for all file spaces in the specified nodes is processed before normal priority data.

Before you select a rule, consider the order in which you want the data to be replicated. For example, suppose that a file space contains active backup data and archive data. Replication of the active backup data is a higher priority than the archive data. To prioritize the active backup data, specify **DATATYPE=BACKUP REPLRULE=ACTIVE\_DATA\_HIGH\_PRIORITY**. To prioritize the archive data, issue the **UPDATE FILESPACE** command again, and specify **DATATYPE=ARCHIVE REPLRULE=ALL\_DATA**.

To display the replication rules for a file space, issue the **QUERY FILESPACE** command. Specify **FORMAT=DETAILED**.

To change file-space replication rules, issue one or more of the following commands on the source replication server:

#### Procedure

- To change a replication rule for backup data, issue the **UPDATE FILESPACE** command and specify **DATATYPE=BACKUP**. Specify the **REPLRULE** parameter. For example, to specify the **ACTIVE\_DATA** rule for backup data in file space /a on **NODE1**, issue the following command:  

```
update filesystem node1 /a datatype=backup replrule=active_data
```
- To specify a replication rule for archive data, issue the **UPDATE FILESPACE** command and specify **DATATYPE=ARCHIVE**. Specify the **REPLRULE** parameter. For example, to specify the **ALL\_DATA\_HIGH\_PRIORITY** rule for archive data in file space /a on **NODE1**, issue the following command:  

```
update filesystem node1 /a datatype=archive replrule=all_data_high_priority
```
- To specify a replication rule for space-managed data, issue the **UPDATE FILESPACE** command and specify **DATATYPE=SPACEMANAGED**. Specify the **REPLRULE** parameter. For example, to specify the **NONE** rule for file space /a on **NODE1**, issue the following command:

```
update filesystem node1 /a datatype=spacemanaged replrule=none
```

## Example

In the following example, assume that you have two client nodes, NODE1 and NODE2. The nodes have the following file spaces:

- NODE1: /a, /b, /c
- NODE2: /a, /b, /c, /d, /e

All the file space rules are set to DEFAULT. The backup, archive, and space-managed rules for NODE1 and NODE2 are also set to DEFAULT. The server rules are set to ALL\_DATA. To replicate the backup data in file space /a in NODE1 and file space /c in NODE2 first, before replicating data in the other file spaces, issue the following commands:

```
update filesystem node1 /a datatype=backup replrule=all_data_high_priority
update filesystem node2 /c datatype=backup replrule=all_data_high_priority
```

The data that belongs to the two nodes is replicated in the following order:

1. High Priority: Data in file space /a that belongs to NODE1 and data in file space /c in NODE2
2. Normal priority: Data in file spaces /b and /c that belongs to NODE1 and data in file spaces /a, /b, /d, and /e that belongs to NODE2

## What to do next

**Important:** Data types in new file spaces that are added to a client node after the node is configured for replication are automatically assigned the DEFAULT replication rule.

### Related concepts:

“Replication rules” on page 950

“Replication rule definitions” on page 950

## Changing replication rules for individual client nodes

Client-node replication rules apply to every file space that belongs to a client node. To replicate data according to a client node rule for a data type, the replication rule that applies to the data type in a file space must be set to DEFAULT.

## About this task

Rules for client nodes are either normal priority or high priority. In a replication process that includes both normal-priority and high-priority data, high-priority data is replicated first. If you issue the **REPLICATE NODE** command for two or more clients, all high priority data for all file spaces in the specified nodes is processed before normal priority data.

Before you select a rule, consider the order in which you want the data to be replicated. For example, suppose that a client node contains active backup data and archive data. Replication of the active backup data is a higher priority than replication of the archive data. To prioritize the active backup data, specify the **ACTIVE\_DATA\_HIGH\_PRIORITY** replication rule for backup data. Specify the **ALL\_DATA** rule for archive data.

To display the replication rules that apply to all file spaces that belong to a node, issue the **QUERY NODE** command and specify **FORMAT=DETAILED**.

**Remember:** File spaces are not displayed for client nodes that are registered on the source replication server but that have not completed store operations. File spaces are created only after the client stores data to the source replication server. Replication rules for data types in file spaces are automatically assigned values of DEFAULT.

To change replication rules for a node, issue one or more of the following commands on the source replication server:

### Procedure

- To change a replication rule for backup data, issue the **UPDATE NODE** command and specify the **BKREPLRULEDEFAULT** parameter. For example, to specify the **ACTIVE\_DATA** rule for backup data in **NODE1**, issue the following command:  

```
update node node1 bkreplruledefault=active_data
```
- To change a replication rule for archive data, issue the **UPDATE NODE** command and specify the **ARREPLRULEDEFAULT** parameter. For example, to specify the **ALL\_DATA\_HIGH\_PRIORITY** rule for archive data in **NODE1**, issue the following command:  

```
update node node1 arreplruledefault=all_data_high_priority
```
- To change a replication rule for space-managed data, issue the **UPDATE NODE** command and specify the **SPREPLRULEDEFAULT** parameter. For example, to specify the **NONE** rule for space-managed data in **NODE1**, issue the following command:  

```
update node node1 spreplruledefault=none
```

### Related concepts:

“Replication rules” on page 950

“Replication rule definitions” on page 950

## Changing server replication rules

Server replication rules apply to all client nodes that are defined to a source replication server and that are configured for replication. To replicate data according to a server rule for a data type, the replication rule that applies to the data type in client nodes and file spaces must be set to DEFAULT.

### About this task

Server rules are either normal priority or high priority. In a replication process that includes both normal-priority and high-priority data, high-priority data is replicated first. If you issue the **REPLICATE NODE** command for two or more clients, all high priority data for all file spaces in the specified nodes is processed before normal priority data.

Before you select a rule, consider the order in which you want the data to be replicated. For example, suppose that your client nodes contain active backup data and archive data. Replication of the active backup data is a high priority. To prioritize the active backup data, specify the **ACTIVE\_DATA\_HIGH\_PRIORITY** replication rule. Specify the **ALL\_DATA** rule for archive data.

**Restriction:** The replication rule **DEFAULT** is not a valid server rule.

To change server replication rules, issue one or more of the following commands on the source replication server:

## Procedure

- To change the server replication rule that applies to backup data, issue the **SET BKREPLRULEDEFAULT** command on the source replication server. For example, to specify the ACTIVE\_DATA rule for backup data, issue the following command:  

```
set bkreplruledefault active_data
```
- To change the server replication rule that applies to archive data, issue the **SET ARREPLRULEDEFAULT** command on the source replication server. For example, to specify the ALL\_DATA\_HIGH\_PRIORITY rule for archive data, issue the following command:  

```
set arreplruledefault all_data_high_priority
```
- To change the server replication rule that applies to space-managed data, issue the **SET SPREPLRULEDEFAULT** command on the source replication server. For example, to specify the NONE rule for space-managed data, issue the following command:  

```
set spreplruledefault none
```

### Related concepts:

“Replication rules” on page 950

“Replication rule definitions” on page 950

## Scenario: Customizing the default replication configuration

You set up the default replication configuration for two client nodes, NODE1 and NODE2. You decide that you want to replicate only certain types of data in their file spaces and that you want to replicate some data types before other data types.

### About this task

NODE1 has two file spaces, /a and /b. NODE2 has one file space, /a. File space and client replication rules for backup, archive, and space-managed data are set to DEFAULT. Server replication rules are set to ALL\_DATA. You have the following goals:

- Replicate only the active backup data in file space /a that belongs to NODE1.
- Do not replicate any space-managed data in any of the file spaces that belong to NODE1.
- Replicate the archive data in all file spaces that belong to NODE1 and NODE2. Make the replication of the data a high priority.
- Replicate the active and inactive backup data in file space /a that belongs to NODE2. Make replication of the data a high priority.

To accomplish these goals, replication rules must be set as shown in the following figure:

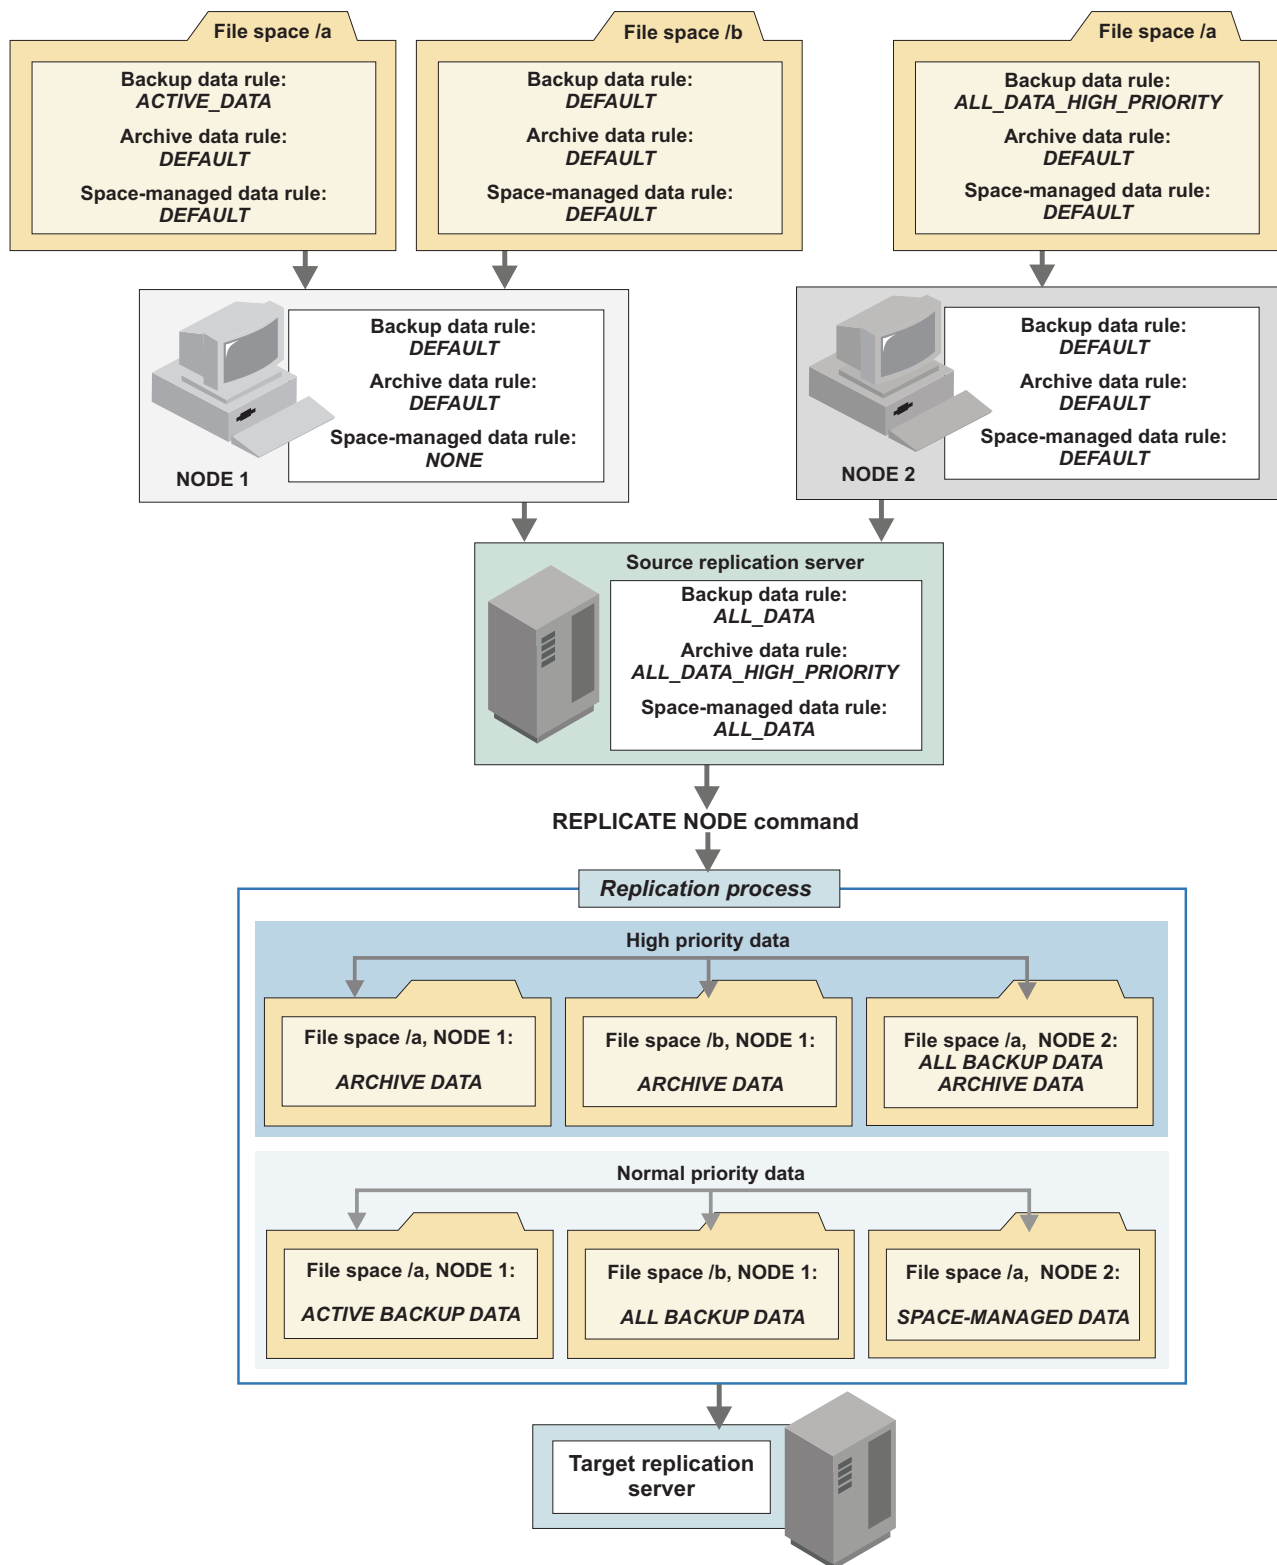


Figure 116. Customized replication configuration

To change to the configuration illustrated in the figure, complete the following steps:

## Procedure

- To change the server replication rule for archive data, issue the **SET ARREPLRULEDEFAULT** command on the source replication server:  

```
set arrepruledefault all_data_high_priority
```
- To change the replication rule for space-managed data for NODE1, issue the **UPDATE NODE** command:  

```
update node node1 spreplruledefault=none
```
- To change the replication rules for backup data for file spaces that belong to NODE1 and NODE2, issue the **UPDATE FILESPACE** command:  

```
update filesystem /a node1 fsreprule=bkreplrule replrule=active_data
update filesystem /a node2 fsreprule=bkreplrule replrule=all_data_high_priority
```

## Results

When the **REPLICATE NODE** command is issued from a command line or in a maintenance script, high-priority data is replicated first. High-priority data includes archive data that belongs to NODE1 and NODE2 and backup data that belongs to NODE2. No preference is given to which node's data is replicated first.

After high-priority data is replicated, normal-priority data is replicated. Normal-priority data includes the active data in file space /a and the backup data in file space /b that belong to NODE1. The backup data and space-managed data that belongs to NODE2 is replicated along with the normal-priority data that belongs to NODE1. No preference is given to which node's data is replicated first.

### Tips:

- In Figure 116 on page 986, all the data in all the file spaces of both client nodes is replicated in one process. However, if the amount of node data is large and you do not have enough bandwidth to replicate data in a single process, you can use one of the following methods:
  - Schedule or manually issue separate **REPLICATE NODE** commands at different times for NODE1 and NODE2.
  - Replicate high-priority and normal-priority data separately at different times by specifying the **PRIORITY** parameter on the **REPLICATE NODE** command.
  - Replicate different data types at different times by specifying the **DATATYPE** parameter on the **REPLICATE NODE** command.
  - Combine replication by priority and by data type by specifying both the **PRIORITY** and **DATATYPE** parameters on the **REPLICATE NODE** command.
- To verify the replication rules that apply to the file spaces in the client nodes, issue the **VALIDATE REPLICATION** command. You can also use this command to verify that the source replication server can communicate with the target replication server. To preview results, issue the **REPLICATE NODE** command and specify **PREVIEW=YES**.

### Related concepts:

“Replication rules” on page 950



## Scenario: Converting to node replication from import and export operations

You are exporting client node data from one or more servers and importing the data to another server for disaster recovery. You want to achieve the same results by replicating data. In this scenario, the server that was exporting data is to be the source replication server. The server where the data was imported is to be the target replication server.

### Before you begin

Client node data that was exported and imported must be synchronized between the source and target replication servers. You set up client nodes to synchronize their data as part of the process of configuring nodes for replication. Data is synchronized the first time that replication occurs. To synchronize data, the data must be imported to the disaster recovery server by using **ABSOLUTE** as the value for the **DATES** parameter on the **IMPORT NODE** command.

### Procedure

To convert from import and export operations to replication operations, complete the following steps:

1. Set up server definitions for the source and target replication servers: "Step 1: Setting up server-to-server communications" on page 976
2. Specify the server to which you are importing data as the target replication server: "Step 2: Specifying a target replication server" on page 979
3. On the source replication server, issue the **UPDATE NODE** command:
  - a. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**. Disabling replication means that replication does not occur until you enable it.
  - b. Specify **REPLMODE=SYNCSEND**.

To update the definitions for all the nodes that are defined to the source replication server, issue the following command.

```
update node * replstate=enabled replmode=syncsend
```

4. On the target replication server, issue the **UPDATE NODE** command and specify **REPLMODE=SYNCRECEIVE** and **REPLSTATE=ENABLED**:

```
update node * replmode=syncreceive replstate=enabled
```
5. If necessary, modify the file-space, client-node, and server replication rules: "Changing replication rules" on page 982.
6. Replicate the data that belongs to your nodes: "Replicating data by command" on page 996

After all data is synchronized, the **REPLMODE** parameter in the client node definition on the source replication server is set to **SEND**. The **REPLMODE** parameter in the client node definition on the target replication server is set to **RECEIVE**.

### What to do next

**Important:** You cannot display information about running replication processes for client nodes that are being converted from import and export operations to replication operations. The conversion process might run for a long time, but it occurs only once for a client node that is being converted.

After you set up a basic replication configuration, you can change file space, client-node, and server replication rules. To replicate data, issue the **REPLICATE NODE** command in an administrative schedule or on a command line.

**Related concepts:**

“Replication mode” on page 958

“Replication state” on page 955

## Adding and removing client nodes for replication

You can add or remove client nodes for replication at any time after you set up a replication configuration.

### Adding client nodes for replication processing

If the data that belongs to a client node was previously exported from the source replication server and imported to the target replication server, you must set up the node to synchronize its data. You set up a client node to synchronize its data as part of the process of adding the node for replication.

#### Before you begin

Before you add a client node for replication, ask the following questions:

- Was the data that belongs to the client node previously exported from the server that is to be the source replication server for replicated data?
- If the data was exported, was it imported on the server that is now the target replication server for replicated data?
- When you imported the data, did you specify **DATES=ABSOLUTE** on the **IMPORT NODE** command?

If you answered "yes" to all of the preceding questions, you must set up to synchronize the data on the source and target replication servers. The following procedure explains how to set up synchronization when you add client nodes for replication. Synchronization occurs during replication.

#### Restrictions:

- If a client node definition does not exist on the target replication server, do not create it. The definition for the client node on the target replication server is created automatically when the data of the node is replicated the first time.
- If a client node definition exists on both the source and target replication servers, but the data that belongs to the client node was not exported and imported, you must rename or remove the client node on the target replication server before data can be replicated.
- If you previously removed a client node from replication on the source replication server, but not on the target replication server, you do not have to rename or remove the node on the target replication server.

#### Procedure

To add a node for replication, complete one of the following actions:

- If the data of the node was not exported from the source replication server and imported on the target replication server, complete one of the following steps:
  - If the client node is not already registered on a source replication server, issue the **REGISTER NODE** command on the source replication server. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**.

For example, to enable a new client node, NODE1, for replication, issue the following command:

```
register node node1 password replstate=enabled
```

- If the client node is already registered on a source replication server, issue the **UPDATE NODE** command on the source replication server. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**.

For example, to enable an existing client node, NODE1, for replication, issue the following command:

```
update node node1 replstate=enabled
```

- If you exported node data from the source replication server and imported the data to the target replication server or if you reconfigured replication for a node after you removed the node from replication on the source replication server, complete the following steps:
  1. On the source replication server, issue the **UPDATE NODE** command:
    - a. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**
    - b. Specify **REPLMODE=SYNCSND**.
  2. On the target replication server, issue the **UPDATE NODE** command:
    - a. Specify **REPLSTATE=ENABLED** or **REPLSTATE=DISABLED**.
    - b. Specify **REPLMODE=SYNCRECEIVE**.

## Results

If you set the replication state of the client node to **DISABLED**, the replication mode is set to **SEND**, but replication does not occur. If you set the replication state of the client node to **ENABLED**, the client node definition is created on the target replication server when replication occurs for the first time. In addition, the replication mode of the client node on the target replication server is set to **RECEIVE**, and the replication state is set to **ENABLED**.

If you add a file space to a client node that is configured for replication, the file space replication rules for data types are automatically set to **DEFAULT**.

## What to do next

After you add client nodes for replication, ensure that they are included in any existing administrative schedules for replication. Alternatively, you can create a schedule for replication that includes the new client nodes.

### Related concepts:

“Replication mode” on page 958

“Replication state” on page 955

## Removing client nodes from replication processing

Removing a client node from replication changes the node to a non-replicated node. If you remove a client node from replication on a target replication server, the client node can back up, archive, or migrate data to the server.

## About this task

Removing a client node from replication deletes only information about replication from the server database. Removing a node from replication does not delete the data that belongs to the node that was replicated.

## Procedure

To completely remove a client node from replication, issue the **REMOVE REPLNODE** command on the source and target replication servers that have the node that is configured for replication. For example, to remove NODE1 and NODE2 from replication, issue the following command:

```
remove replnode node1,node2
```

## What to do next

To verify that the node was removed, issue the **QUERY NODE** command on the source and the target replication servers. For example, to verify that NODE1 and NODE2 were removed, issue the following command:

```
query node node1,node2 format=detailed
```

If the node was removed, the fields Replication State and Replication Mode are blank. If you do not want to keep the node data that is stored on the target replication server, you can delete it using the **DELETE FILESPACE** command for the file spaces that belong to the node. If you do not want to keep the node definition on the target replication server, delete the node definition by issuing the **REMOVE NODE** command.

If you remove a client node from replication, rename the node, or delete the node data, and then remove the node. You can add the node for replication later. All the node data is replicated to the target replication server.

## Resetting the replication mode

If you set the replication mode incorrectly when you configure a client node with data that was exported and imported, you must remove the client node from replication before reconfiguring the node.

## About this task

For example, suppose that you updated the definition of a client node whose data you wanted to replicate. The data that belongs to the node was previously exported from the source replication server and imported to the target replication server. You specified **ENABLED** as the setting of the **REPLSTATE** parameter. However, you did not specify **SYNCSEND** as the replication mode on the source replication server. As a result, the **REPLMODE** parameter was automatically set to **SEND**, and data that belongs to the node was not synchronized or replicated.

## Procedure

To reconfigure the client node for replication, complete the following steps:

1. Issue the **REMOVE REPLNODE** command for the client node. For example, to remove a client node, NODE1, from replication, issue the following command:

```
remove replnode node1
```

Issuing the **REMOVE REPLNODE** command resets the replication state and the replication mode for the client node to **NONE**.

2. Issue the **UPDATE NODE** command with the correct parameters and values. For example, to enable NODE1 for replication and synchronize the data that belongs to the node, complete the following steps:

- a. On the source replication server, issue the following command:

```
update node node1 replstate=enabled replmode=syncsend
```

- b. On the target replication server, issue the following command:
- ```
update node node1 replstate=enabled replmode=syncreceive
```

Results

After synchronization and replication are complete, the **REPLMODE** parameter in the client node definition on the source replication server is set to SEND. The **REPLMODE** parameter in the client node definition on the target replication server is set to RECEIVE.

Related concepts:

“Replication mode” on page 958

“Replication state” on page 955

Managing source and target replication servers

You can change or remove target replication servers. You can also protect communications during node replication operations with Secure Sockets Layer.

Adding a source replication server

To add a source replication server, you follow the same procedure that you followed when you set up the default replication configuration. As part of the procedure, you set up server-to-server communications, specify a target replication server, and configure client nodes for replication.

About this task

You can add a source replication server to an existing configuration. For example, suppose that you have a replication configuration comprising a single source replication server and a single target replication server. You can add another source server that replicates data to the existing target server.

Related concepts:

“Replication server configurations” on page 947

Selecting a new target replication server

After you set up a basic replication configuration, you can change the target replication server.

Before you begin

Before you begin this procedure:

- Ensure that the source and the target replication servers have server definitions for each other. The following properties must be set in the definitions:
 - Server name
 - Server password
 - Server high-level address
 - Server low-level address
- Delete any administrative schedules on the source replication server that specify the target replication server. Create new schedules that specify the new target replication server.

Procedure

To change a target replication server, issue the **SET REPLSERVER** command on the source replication server. Specify the name of the new target replication server. For example, to specify NEW_TGTSRV as the new target replication server, issue the following command:

```
set replserver new_tgtsrv
```

Results

If you change target replication servers during replication processing, replication to the old target replication server continues until the processing ends or is canceled. When replication occurs for the first time with the new target replication server, files are replicated again.

The following example describes what occurs when you change or add target replication servers. Suppose that DRSERVER is the target replication server for PRODSERVER. PRODSERVER has one client, NODE1.

1. Files A, B, and C that belong to NODE1 are replicated to TGTSRV.
2. You change the target replication server to NEW_TGTSRV.
3. NODE1 backs up files D, E, and F to SRCSRV.
4. Replication occurs for NODE 1. Files, A, B, and C, which were replicated to TGTSRV, are replicated to NEW_TGTSRV. New files D, E, and F are also replicated to NEW_TGTSRV.
5. You reset the target replication server to TGTSRV.
6. Replication occurs for NODE1. Files D, E, and F are replicated to TGTSRV.

Files A, B, C, D, E, and F now exist on SRCSRV, TGTSRV, and NEW_TGTSRV.

Related concepts:

“Replication server configurations” on page 947

Configuring the target replication server

You can configure the target replication server for automatic failover for data recovery. It is only necessary to configure for automatic failover if you use separate, dedicated networks for server-to-server communication and client access.

Procedure

1. Determine the default replication server by using **QUERY STATUS** command. For example, issue the following command from the target replication server to determine the default replication server:

```
QUERY STATUS
```
2. Identify the high-level address that is used by the source replication server for replication. For example, issue the following command from the source replication server:

```
QUERY SERVER
```
3. Identify the high-level address that the client uses to connect to the source replication server. For example, issue the following command from the target replication server:

```
QUERY SERVER
```

4. If the source replication server and the client use a different high-level address, issue the **SET FAILOVERHLADDRESS** command on the target replication server. For example, to set the high-level address for the target replication server, issue the following command:

```
SET FAILOVERHLaddress high_level_address
```

Restriction: You can specify only one failover server for each node target replication server. The failover server information is stored in the client options file.

Removing a replication server

If you do not want to replicate data from a source replication server to its target replication server, you can switch or remove a target replication server in a replication process.

About this task

You use the **REMOVE REPLSERVER** command to remove a server from the replication environment. You must issue the command on both the source and the target replication servers. If you use this command on only one of the replication servers, the data is not replicated.

Procedure

1. Identify all nodes that replicated data on the target server that is being removed. On the source replication server, issue the **QUERY REPLNODE** command.
2. On the source replication server, issue the **QUERY REPLSERVER** command to identify the GUID for the target server you want to remove.
3. Take note of the GUID for the source server. You specify the GUID later in the procedure.
4. On the source replication server, issue the **REMOVE REPLSERVER** command, and specify the GUID for the target server. For example, to remove a replication server and all replication state information that is associated with a server, issue the following command:

```
remove replserver 11.9c.54.e0.8a.b5.11.d6.b3.c3.00.06.29.45.c1.5b
```
5. Remove all of the replication state information for data that is replicated from the source server. On the target replication server, issue the **REMOVE REPLSERVER** command, and specify the GUID for the source server.
6. Remove all of the nodes that were replicated from the source server. On the target replication server, issue the **REMOVE REPLNODE** command.

Results

The node definitions on the source server that were replicated to the specified target server are in the replication SEND mode. You can continue to replicate these nodes to other replication servers by using the **SET REPLSERVER** command to modify the default replication server value.

Scenario: Automatic failover

You are replicating client node data from a source replication server to a target server. You want to ensure that client restore operations can automatically fail over to the target replication server, if the source replication server is unavailable.

In the following scenario, replication operations are set up to automatically fail over from the source replication server to the target replication server:

1. A Tivoli Storage Manager V7.1 client connects to a Tivoli Storage Manager V7.1 source replication server. The source replication server provides the connection information for the target replication server to the client.
2. If the source replication server is unavailable, the client uses the connection information for the target replication server and logs on to the target replication server.
3. If you replicated client node data to the target replication server, the client can restore the data. The client cannot store data to the target replication server.

Verifying a node replication setup before processing

Before you start a replication process, you can display the controlling replication rules for data types in the file spaces of client nodes that are configured for replication. You can also verify the connection to the target replication server.

About this task

A *controlling rule* is the rule that the source replication server uses to replicate data in a file space. For example, suppose the replication rule for backup data in file space /a is DEFAULT. If the client-node rule for backup data is ALL_DATA, the controlling rule for the backup data in file space /a is ALL_DATA.

Procedure

To validate a replication configuration, complete one of the following steps:

- To display a list of file spaces and the controlling replication rules that apply to the file spaces, issue the **VALIDATE REPLICATION** command. For example, to display the controlling replication rules that apply to data types in the file spaces for NODE1 and NODE2, issue the following command:

```
validate replication node1,node2
```

All file spaces are displayed regardless of whether the state of the data types in the file spaces is enabled or disabled.

- To display the controlling replication rules and verify the connection with the target replication server, issue the following command:

```
validate replication node1,node2 verifyconnection=yes
```

What to do next

To preview results, complete one of the following steps:

- To display the following information, issue the **REPLICATE NODE** command and specify PREVIEW=YES
 - The names of client nodes to be replicated
 - The number of files to be replicated, deleted, or updated
 - The estimated time to complete the process
 - The tape volumes to be mounted

For example, to display the estimated time to complete the replication process for a defined group of nodes, NODEGRP1, issue the following command:

```
replicate node nodegrp1 preview=yes
```

- To display a list of files to be replicated, issue the **REPLICATE NODE** command and specify **PREVIEW=YES LISTFILES=YES**. For example, to display a list of files to be replicated for NODEGRP1, issue the following command:

```
replicate node nodegrp1 preview=yes listfiles=yes
```

Specifying the **LISTFILES** parameter signifies that the **WAIT** parameter is set to YES and that you cannot issue the **WAIT** parameter from the server console.

Remember: Information is displayed only if the following conditions are true:

- Data types in file spaces are enabled for replication. For example, suppose that a file space contains backup and archive files and that replication of backup data is enabled. Replication of archive data is disabled. In this case, only information about backup files is displayed.
- Client nodes are enabled for replication.
- If the controlling replication rule is a server rule, the server rule must be enabled.

Managing data replication

With Tivoli Storage Manager, you can have various methods to control node replication processing.

Replicating data by command

You can replicate data that belongs to one or more client nodes or the data that belongs to a defined group of client nodes. To replicate data automatically and at a scheduled frequency, define an administrative schedule.

Procedure

You can replicate data in one of the following ways:

- By issuing the **REPLICATE NODE** command on the command line
- By using the **DEFINE SCHEDULE** command to create an administrative schedule, and specify when to start replication processing

To use an administrative schedule, you create it by using the **DEFINE SCHEDULE** command. When you start replication by using an administrative schedule, node replication processing occurs at a specified frequency. Regardless of how you start replication, the command must be issued on the source replication server.

For example, suppose that you have three client nodes, NODE1, NODE2, and NODE3. To replicate data from all nodes daily at 6:00 a.m. in a schedule named REPL_SCHED, issue the following command on the source replication server:

```
define schedule repl_sched type=administrative cmd="replicate node  
node*" active=yes"  
description="replicate clients with name noden" starttime=06:00:00 period=1  
perunits=days
```

Results

High-priority data is replicated before data with a normal priority. To schedule replication processes, you use the **DEFINE SCHEDULE** command.

If the data that belongs to a client node is being replicated, any attempt to replicate the data by issuing another **REPLICATE NODE** command fails. For example, suppose the backup data that belongs to a client node is scheduled for replication at 6:00 a.m. Replication of the archive data is scheduled for 8:00 a.m. Replication of the backup-data must complete before replication of the archive data starts.

Example

If you have many client nodes and are replicating a large amount of data, you can replicate data more efficiently by issuing several **REPLICATE NODE** commands in separate schedules. For example, replicate the data that belongs to the most important client nodes first in a single command. After the data that belongs to those client nodes is replicated, replicate the data that belongs to the other nodes.

Tip: To ensure that replication for first group of client nodes finishes before the replication for the other nodes starts, specify **WAIT=YES** on the first **REPLICATE NODE** command. For example, if you want to replicate the data that belongs to **NODE1** and **NODE2** before the data that belongs to **NODE3** and **NODE4**, issue the following commands:

```
replicate node node1,node2 wait=yes
replicate node node3,node4
```

You can use the **REPLBATCHSIZE** and **REPLSIZETHRESH** server options to increase the speed of a node replication process between two replicating servers. The **REPLBATCHSIZE** option specifies the number of client files that are to be replicated in a batch, within the same server transaction. The **REPLSIZETHRESH** option specifies, in megabytes, a threshold for the amount of data that is replicated as a batch, within the same server transaction.

Replicating data in individual file spaces

You can replicate the data in one or more file spaces that belong to individual client nodes or defined groups of client nodes. Replicating data by file space can be useful if, for example, you must replicate new data in a file space that belongs to a certain client node, and you cannot wait for a scheduled replication.

About this task

Data is replicated for a file space only when the following conditions are true:

- The replication state for data types in file spaces are enabled. For example, if the replication state for archive data in a file space is enabled, archive data in the file space is replicated.
- The controlling rule for the data type in the file space cannot be **NONE**. For example, suppose the replication rule for archive data in a file space is **DEFAULT**. If the file space rules and client node rules for archive data are both **DEFAULT** and the server rule for archive data is **NONE**, archive data in the file space is not replicated.

Procedure

To replicate data by file space, issue the **REPLICATE NODE** command and specify the file space name or file space identifier. For example, to replicate data in file space **/a** in **NODE1**, issue the following command:

```
replicate node node1 /a
```

What to do next

Tip: With the **REPLICATE NODE** command, you can also replicate data by priority and by data type. To achieve greater control over replication processing, you can combine replication by file space, data type, and priority.

To obtain information about the node replication process while it is running, issue the **QUERY PROCESS** command:

```
query process
```

For node replication purposes, each file space contains three logical file spaces:

- One for backup objects
- One for archive objects
- One for space-managed objects

By default, the **QUERY PROCESS** command reports results for each logical file space. Other factors also affect the output of the **QUERY PROCESS** command:

- If a file space has a replication rule that is set to **NONE**, the file space is not included in the count of file spaces that are being processed.
- If you specify data types in the **REPLICATE NODE** command, only those data types are included in the count of file spaces that are being processed, minus any file spaces that are specifically excluded.

Example: Backing up four file spaces with three object types

In this example, **NODE1** has four file spaces with three object types. The **QUERY PROCESS** command generates the following output for node replication:

```
Process  Process Process Status
Number  Description
-----
40  Replicate Node Replicating node(s) NODE1 File spaces
    complete: 11. File spaces identifying
    and replicating: 0. File spaces
    replicating: 1. File spaces not
    started: 0. Files current: 0. Files
    replicated: 747,915 of 913,581. Files
    updated: 0 of 0. Files deleted: 0 of 0.
    Amount replicated: 546 GB of 732 GB.
    Amount transferred: 389 GB. Elapsed time:
    0 Day(s), 4 Hour(s), 59 Minute(s).
```

Because the example includes four file spaces with three object types, 12 logical file spaces are processed for replication. The **QUERY PROCESS** command output shows that 11 logical file spaces completed replication.

Related concepts:

“Node replication processing” on page 950

Replicating data by type

You can replicate one or more data types for individual nodes or defined groups of client nodes. Replicating data by type can be useful if, for example, you have new backup data, and you cannot wait for a scheduled replication.

About this task

Remember: Replication of a data in a file space occurs only if the following conditions are true:

- Replication for data types in file spaces must be enabled. For example, if replication for archive data in a file space is disabled, archive data in the file space is not replicated.
- The controlling rule for the data type in the file space cannot be NONE. For example, suppose the replication rule for archive data in a file space is DEFAULT. If the file space rules and client node rules for archive data are both DEFAULT and the server rule for archive data is NONE, archive data in the file space is not replicated.

To replicate data by type, complete one of the following steps:

Procedure

- To replicate active and inactive backup data, issue the **REPLICATE NODE** command and specify DATATYPE=BACKUP. For example, to replicate the active and inactive backup data that belongs to NODE1, issue the following command:

```
replicate node node1 datatype=backup
```
- To replicate only active backup data, issue the **REPLICATE NODE** command and specify DATATYPE=BACKUPACTIVE. For example, to replicate the active backup data that belongs to NODE1, issue the following command:

```
replicate node node1 datatype=backupactive
```
- To replicate archive data, issue the **REPLICATE NODE** command and specify DATATYPE=ARCHIVE. For example, to replicate the archive data that belongs to NODE1, issue the following command:

```
replicate node node1 datatype=archive
```
- To replicate space-managed data, issue the **REPLICATE NODE** command and specify DATATYPE=SPACEMANAGED. For example, to replicate the space-managed backup data that belongs to NODE1, issue the following command:

```
replicate node node1 datatype=spacemanaged
```
- To replicate multiple data types, separate the data types by commas with no intervening spaces. For example, to replicate active backup data and archive data that belongs to NODE1, issue the following command:

```
replicate node node1 datatype=backupactive,archive
```

Example

If you do not specify a type on the **REPLICATE NODE** command, all data types are replicated.

What to do next

Tip: Using the **REPLICATE NODE** command, you can also replicate data by file space and by priority. To achieve greater control over replication processing, you can combine replication by data type, file space, and priority.

Related concepts:

“Node replication processing” on page 950

Replicating data by priority

You can replicate high-priority data or normal-priority data that belongs to individual client nodes or defined groups of client nodes. Replicating data by priority can be useful if, for example, a client node recently acquired high-priority data, and you cannot wait for a scheduled replication.

About this task

Remember: Replication of data in a file space occurs only if the following conditions are true:

- Replication for data types in file spaces must be enabled. For example, if replication for archive data in a file space is disabled, archive data in the file space is not replicated.
- The controlling rule for the data type in the file space cannot be NONE. For example, suppose the replication rule for archive data in a file space is DEFAULT. If the file-space and client-node rules for archive data are both DEFAULT and the server rule for archive data is NONE, archive data in the file space is not replicated.

To replicate data by priority, complete one of the following steps:

Procedure

- To replicate only high-priority data, issue the **REPLICATE NODE** command and specify **PRIORITY=HIGH**. For example, to replicate the high-priority data that belongs to NODE1, issue the following command:

```
replicate node node1 priority=high
```
- To replicate only normal-priority data, issue the **REPLICATE NODE** command and specify **PRIORITY=NORMAL**. For example, to replicate normal-priority data that belongs to NODE1, issue the following command:

```
replicate node node1 priority=normal
```

Example

If you do not specify a priority on the **REPLICATE NODE** command, normal-priority and high-priority data is replicated.

What to do next

Tip: Using the **REPLICATE NODE** command, you can also replicate data by file space and by data type. To achieve greater control over replication processing, you can combine replication by priority, file space, and data type.

Related concepts:

“Node replication processing” on page 950

Scenario: Combining replication by file space, data type, and priority

You can combine replication by file space, data type, and priority to accomplish unique replication tasks. In this scenario, you replicate normal-priority archive and space-managed data in a file space that is common to two nodes.

About this task

The name of the file space is /a. It is common to NODE1 and NODE2.

Procedure

To replicate the data in the file space, issue the following command:

```
replicate node node1,node2 /a priority=normal datatype=archive,spacemanaged
```

Issuing this command replicates archive and space-managed data that is assigned the replication rule ALL_DATA.

Related concepts:

“Node replication processing” on page 950

Controlling throughput for node replication

Bandwidth can affect the performance of replication processing workload, processor capacity, the time available for replication, and the amount of network.

Managing the number of replication sessions

You can manage the maximum number of sessions that are used for sending data to the target replication server to improve replication performance.

About this task

Use the **MAXSESSIONS** parameter to specify the maximum number of sessions to use. When you calculate the value for the **MAXSESSIONS** parameter, consider the available network bandwidth and the processor capacity of source and target replication servers.

Consider the number of logical and physical drives that can be dedicated to the replication process. You must ensure that there are enough drives available for replication processing because other server processes or client sessions might also be using drives. The number of mount points and drives available for replication operations depends on the following factors:

- Tivoli Storage Manager server activity that is not related to replication
- System activity
- The mount limits of the device classes for the sequential-access storage pools that are involved
- The availability of a physical drive on the source and target replication servers, if the device type is not FILE
- The available network bandwidth and the processor capacity of source and target replication servers

Procedure

Issue the **REPLICATE NODE** command and specify the **MAXSESSIONS** parameter to determine the number of data sessions. For example, to set the maximum number of replication sessions to 6 for **NODE_GROUP1**, issue the following command:

```
replicate node node_group1 maxsessions=6
```

Restriction: The following values apply to the **MAXSESSIONS** parameter:

- The value that is specified by the **MAXSESSIONS** parameter applies only to data sessions. Data sessions are sessions during which data is sent to a target replication server. If you issue a **QUERY SESSION** command, the total number of sessions might exceed the number of data sessions. The difference can occur if you use short control sessions that you use to query and set up replication operations.
- The value of the **MAXSESSIONS** parameter represents the maximum allowable number of sessions. The number of sessions that are used for replication depends on the amount of data to be replicated. If you are replicating only a small amount of data, there is no advantage to increasing the number of sessions.

Tuning replication processing

You can determine how many bytes per hour are replicated over your network at a specific time by tuning the settings that affect replication and by testing replication processing. Based on the replication results and the total amount of node data that you replicate, you can choose which method to use for the initial replication.

About this task

Do not use a storage pool that is enabled for data deduplication to test replication. By using storage pools that are not enabled for data deduplication to test replication processing, you avoid processing extents that can increase the amount of preprocessing time of the replication process. By determining the data transfer and network capability of your replication operation without extent processing, you get a better representation of the capability of your system. Test replication processing with storage pools that are enabled for data deduplication if you want to determine the effect of data deduplication on replication performance alone.

You must calculate the bytes-per-hour value for each source replication server individually. You can determine which method is the most suitable for the server, based on its bytes-per-hour value.

Complete the following steps to determine how much data you can replicate during a specified timeframe so that you can tune replication processing for a server. Repeat these steps to obtain bytes-per-hour value for each server that you want to use for replication processing.

Procedure

1. Complete the following steps to select the appropriate data:
 - a. Select one or more nodes and file spaces that have approximately 500 GB to 1 TB of total data.
 - b. Select data that is typical of the data that you replicate on a routine basis.
 - c. Select nodes that are configured for replication.
2. To display the amount of data in a file space, issue the **QUERY OCCUPANCY** command.

3. Select a timeframe during which replication is running normally.
4. If you plan to use Secure Sockets Layer (SSL) as the communication protocol for replication processing, ensure that SSL is enabled.

Restriction: SSL can slow replication processing.

5. Start the replication process by issuing the **REPLICATE NODE** command.
6. After the replication is completed, review the summary message that is displayed. Use the Amount transferred and Elapsed time values that display in the summary message to determine the number of bytes per hour that can be replicated.

Results

When you determine the bytes-per-hour value for each server, you can determine a method to use for the initial replication.

Related tasks:

“Selecting a method for the initial replication” on page 965

Managing more workload during replication

By testing replication processing, you can determine whether your network can manage more workload.

Procedure

To see how your network manages more workload during replication, complete the following tasks:

1. Increase the value of the **MAXSESSIONS** parameter by 10 on the **REPLICATE NODE** command and run the test again.
2. Increase the number of replication sessions by 10 to transfer more data concurrently during replication. Alternatively, if you determine that 10 replication sessions (the default **MAXSESSIONS** value) cause your network to degrade below acceptable levels, decrease the value of the **MAXSESSIONS** parameter.
3. Repeat the process, and adjust the value of the **MAXSESSIONS** parameter to determine optimal data transfer capability.

Tuning mount points for data deduplication and replication

You can specify the maximum allowable number of data sessions that are used to send data to a target replication server. When you increase the number of data sessions to improve node replication throughput. Use storage pools that are enabled for data deduplication to improve replication performance.

Procedure

1. Determine the number of logical and physical drives that can be dedicated to the replication process. For example, if a library has 10 tape drives and 4 of the drives are used for another task, 6 drives are available for node replication.
2. Specify the number of mount points you require and ensure that there are drives available to complete node replication. For example, to set the number of point points to 6, issue the following **UPDATE DEVCLASS** command and specify the **MOUNTLIMIT** parameter:

```
update devclass device_class_name mountlimit=6
```


3. Specify the number of data sessions that you want by using the **MAXSESSIONS** parameter on the **REPLICATE NODE** command. For example, issue the following **REPLICATE NODE** command and specify the **MAXSESSIONS** parameter:

```
replicate node prodnode maxsessions=6
```

Disabling and enabling node replication

With Tivoli Storage Manager, you can temporarily disable node replication. You can enable node replication at any time.

Disabling and enabling replication of data types in a file space

Disabling replication of a data type in a file space can be useful if, for example, a file space has large amounts of backup data and archive data. You can enable the replication of backup data and disable replication of archive data. After the backup data is replicated, you can enable replication of archive data.

About this task

To determine the replication state of a data type in a file space, issue the **QUERY FILESPACE** command with the **FORMAT** parameter set to **DETAILED**.

Restriction: You cannot disable or enable replication for an entire file space. You can only disable and enable replication of a data type in a file space.

To disable and enable replication of data types in a file space, complete one or more of the following actions:

Procedure

- Backup data:
 - To disable replication, issue the following command:

```
update filespace node_name file_space_name datatype=backup  
replstate=disabled
```
 - To enable replication, issue the following command:

```
update filespace node_name file_space_name datatype=backup  
replstate=enabled
```
- Archive data:
 - To disable replication, issue the following command:

```
update filespace node_name file_space_name datatype=archive  
replstate=disabled
```
 - To enable replication, issue the following command:

```
update filespace node_name file_space_name datatype=archive  
replstate=enabled
```
- Space-managed data:
 - To disable replication, issue the following command:

```
update filespace node_name file_space_name datatype=spacemanaged  
replstate=disabled
```
 - To enable replication, issue the following command:

```
update filespace node_name file_space_name datatype=spacemanaged  
replstate=enabled
```

Related concepts:

“Replication state” on page 955

Disabling and enabling replication for individual client nodes

Disabling replication for a client node causes the server to skip the node during replication processing. Disabling replication for a client node can be useful if, for example, data that belongs to the node is corrupted or contaminated. After the problem is fixed, you can enable replication.

About this task

To determine the replication state of a node, issue the **QUERY NODE** command.

Procedure

- To disable replication for a node, issue the **UPDATE NODE** command and specify **REPLSTATE=DISABLED**. For example, to disable replication for **NODE1**, issue the following command:

```
update node node1 replstate=disabled
```

- To enable replication for a node, issue the **UPDATE NODE** command and specify **REPLSTATE=ENABLED**. For example, to enable replication for **NODE1**, issue the following command:

```
update node node1 replstate=enabled
```

What to do next

Remember: If you disable replication for a client node while data that belongs to the node is being replicated, the replication process is not affected. Replication of the data continues until all the data that belongs to the client node is replicated. However, replication for the client node will be skipped the next time that replication runs.

Related concepts:

“Replication state” on page 955

Disabling and enabling replication for all client nodes

You can disable and enable outbound and inbound sessions, including replication sessions, between servers. If sessions are disabled, you must enable them to restore function.

Disabling and enabling outbound or inbound sessions:

Disabling outbound or inbound sessions can be useful if, for example, you plan a network outage that affects communication between source and target replication servers. Disabling and enabling sessions affects not only node replication operations but also certain other types of operations.

About this task

To display the status and direction of sessions for a particular server, issue the **QUERY STATUS** command.

Remember:

- When you disable sessions for a particular server, you disable the following types of sessions in addition to replication:
 - Server-to-server event logging
 - Enterprise management
 - Server registration

- LAN-free sessions between storage agents and the Tivoli Storage Manager server
- Data storage that uses virtual volumes
- If you disable only outbound sessions on a source replication server, data that belongs to client nodes that store data on the source replication server do not have their data replicated. However, inbound sessions to the target replication server can occur.

If a server is the target for multiple source replication servers and you disable outbound sessions on a single source replication server, the target replication server continues to receive replicated data from the other source replication servers.

To disable and enable replication sessions:

Procedure

- Between a single source replication server and a single target replication server:
 - To disable sessions, issue one of the following commands:
 - On the source replication server:
`disable sessions server target_server_name direction=outbound`
 - On the target replication server:
`disable sessions server source_server_name direction=inbound`
 - To enable sessions:
 - If outbound sessions to the target replication server are disabled on the source replication server, issue the following command on the source replication server:
`enable sessions server target_server_name direction=outbound`
 - If inbound sessions from the source replication server are disabled on the target replication server, issue the following command on the target replication server:
`enable sessions server source_server_name direction=inbound`
- Between multiple source replication servers and a single target replication server:
 - To disable sessions, issue one of the following commands:
 - On the source replication servers:
`disable sessions server * direction=outbound`
 - On the target replication server:
`disable sessions server * direction=inbound`
 - To enable sessions:
 - If outbound sessions to the target replication server are disabled on the source replication servers, issue the following command on the source replication servers:
`enable sessions server * direction=outbound`
 - If inbound sessions to the target replication server are disabled on the source replication servers, issue the following command on the target replication server:
`enable sessions server * direction=inbound`

Disabling and enabling outbound node replication processing:

When you disable outbound node replication processing, you prevent new replication processes from starting on a source replication server. Enabling outbound node replication processing is required after a database restore.

About this task

Restriction: When you restore the Tivoli Storage Manager database, replication is automatically disabled. Disabling replication prevents the server from deleting copies of data on the target replication server that are not referenced by the restored database. After a database restore, you must re-enable replication.

To display the status of replication processing for a particular server, issue the **QUERY STATUS** command.

Issue the following commands on the source replication server to disable and enable replication processing:

Procedure

- To disable replication, issue the **DISABLE REPLICATION** command.
- To enable replication, issue the **ENABLE REPLICATION** command.

Disabling and enabling replication rules

Disabling a replication rule suspends replication of all data to which the rule applies. For example, you can disable replication of active backup data in all client nodes and file spaces that have the replication rule **ACTIVE_DATA**.

About this task

Disabling a replication rule can be useful if, for example, you replicate groups of normal-priority and high-priority client nodes on different schedules. For example, suppose that the data that belongs to some client nodes is assigned the **ALL_DATA_HIGH_PRIORITY** replication rule. The data that belongs to other client nodes is assigned the **ALL_DATA** replication rule. The client nodes are separated into groups, in which some of the nodes in each group have high-priority data and other nodes in the group have normal-priority data.

You schedule replication for each group to take place at different times. However, a problem occurs, and replication processes take longer than expected to complete. As a result, the high-priority data that belongs to client nodes in groups that are scheduled late in the replication cycle is not being replicated.

To replicate the high-priority data as soon as possible, you can disable the **ALL_DATA** rule and rerun replication. When you rerun replication, only the client node data that is assigned the **ALL_DATA_HIGH_PRIORITY** rule is replicated. After high-priority data is replicated and the problem that caused the delay is fixed, you can enable the **ALL_DATA** replication rule and resume scheduled replication processing.

You can disable or enable the **ALL_DATA**, **ACTIVE_DATA**, **ALL_DATA_HIGH_PRIORITY**, and **ACTIVE_DATA_HIGH_PRIORITY** replication rules.

To disable and enable replication rules, complete one of the following steps:

Procedure

- To disable a replication rule, issue the **UPDATE REPLRULE** command and specify STATE=DISABLED. For example, to disable the replication rule ACTIVE_DATA_HIGH_PRIORITY, issue the following command:
update replrule active_data_high_priority state=disabled
- To enable a replication rule, issue the **UPDATE REPLRULE** command and specify STATE=ENABLED. For example, to enable the replication rule ACTIVE_DATA_HIGH_PRIORITY, issue the following command:
update replrule active_data_high_priority state=enabled

Related concepts:

“Replication state” on page 955

“Replication rule definitions” on page 950

Managing replicated client-node data using the target replication server policies

With Tivoli Storage Manager, you can enable the policies that are defined on the target replication server to manage replicated client-node data and file expiration.

How maintaining different file versions on the source and target servers affects disaster recovery

The number of file versions that you maintain on the source and target replication servers can have different impacts on disaster recovery.

The following table includes scenarios for maintaining more, fewer, or the same number of file versions on the source and target servers and the impact these scenarios have on various recovery options.

Table 93. How maintaining different file versions on the source and target servers affects disaster recovery

Disaster recovery scenarios	When you maintain more file versions on the target server than on the source server without copy storage pools:	When you maintain fewer file versions on the target server than on the source server without storage pools:	When you maintain the same number of file versions on the source and target servers without copy storage pools:	When you use copy storage pools:
Recovery when the source server is offline	You have greater point-in-time recovery capabilities from the target server than the source server because the recovery process is initiated from the target server, where more file versions exist.	You have less point-in-time recovery capabilities from the target server than the source server because the recovery process is initiated from the target server, where fewer file versions exist.	There is no difference in your recovery capabilities because the same number of file versions exist on the source and target servers.	A recovery option is not available because you cannot access the copy storage pools when the source server is offline.

Table 93. How maintaining different file versions on the source and target servers affects disaster recovery (continued)

Disaster recovery scenarios	When you maintain more file versions on the target server than on the source server without copy storage pools:	When you maintain fewer file versions on the target server than on the source server without storage pools:	When you maintain the same number of file versions on the source and target servers without copy storage pools:	When you use copy storage pools:
Recovery when the source and target servers are online	You have less point-in-time recovery capabilities from the source server than the target server because the recovery process is initiated from the source server, where fewer file versions exist.	You have greater point-in-time recovery capabilities from the source server than the target server because the recovery process is initiated from the source server, where more file versions exist.	There is no difference in your recovery capabilities because the same number of file versions exist on the source and target servers.	A recovery option is not applicable because, in this case, the recovery process is initiated from the primary storage pool.
Recovery when the source and target servers are online and the primary data is not accessible or is damaged	The recovery process fails because you cannot restore to the target server. When you run the next replication process, the damaged data is restored and the client can successfully recover the data.	The recovery process fails because you cannot restore to the target server. When you run the next replication process, the damaged data is restored and the client can successfully recover the data.	The recovery process fails because you cannot restore to the target server. When you run the next replication process, the damaged data is restored and the client can successfully recover the data.	The recovery process is initiated from the copy storage pools.
Recovery for a storage pool or volume when the volume is destroyed and the data is damaged	The replication process can be used to recover any destroyed volumes or damaged data that was previously replicated.	The replication process can be used to recover any destroyed volumes or damaged data that was previously replicated.	The replication process can be used to recover any destroyed volumes or damaged data that was previously replicated.	The RESTORE STGPPOOL command can be used to recover any destroyed volumes or damaged data.

Maintaining replicated files on the source and target replication servers

You can manage replicated backup and archive files on the target replication server independently from the source replication server.

Before you begin

- Review the scenarios for maintaining more, fewer, or the same number of files on the source and target replication servers.
- Issue the **VALIDATE REPLPOLICY** command to display the differences between the policies on the source and target replication servers.

About this task

You can complete the following tasks:

- Maintain more or fewer versions of replicated backup files on the target replication server than the source replication server.
- Retain replicated archive files for more or less time than they are maintained on the source replication server.

Procedure

Complete the following steps:

- To maintain more or fewer versions of backup files on the target replication server than the source replication server:
 1. Update the backup copy group on the target replication server to specify the number of versions that you want. The specific copy group settings that you can update are **VEREXIST**, **VERDELETED**, **RETEXTTRA**, and **REONLY**.
 2. Enable the policies that are defined on the target replication server by issuing the **SET DISSIMILARPOLICIES** command on the source replication server.

The target replication server maintains the correct number of file versions.

- To retain archive files for more or less time than they are being maintained on the source replication server:
 1. Update the archive copy group on the target replication server to specify the number of days that you want to keep the files. The specific archive copy group settings that you can update are **RETVER** and **RETMIN**.
 2. Enable the policies that are defined on the target replication server by issuing the **SET DISSIMILARPOLICIES** command on the source replication server.

The target replication server maintains the archive files for the correct length of time.

Related tasks:

“Enabling the target replication server policies”

Related reference:

“How maintaining different file versions on the source and target servers affects disaster recovery” on page 1008

Enabling the target replication server policies

To enable the target replication server policies to manage replicated client-node data, issue the **SET DISSIMILARPOLICIES** command.

Procedure

To enable the policies, complete the following steps:

1. Ensure that the policies that are defined on the target replication server are the policies that you want to manage replicated client-node data:
 - a. Compare the target replication server policies with the same policies on the source replication server by issuing the **VALIDATE REPLPOLICY** command on the source replication server.
 - b. Review the output of the command to determine whether there are differences between the policies on the source and target replication servers.
 - c. Modify the policies on the target replication server as needed.

For example, to determine whether there are differences between the policies on the source replication server and the policies on the target replication server, CVTCVS_LXS_SRV2, issue the following command:

```
VALIDATE REPLPOLICY CVTCVS_LXS_SRV2
```

2. Enable the target replication server policies by issuing the **SET DISSIMILARPOLICIES** command on the source replication server. For example, to enable the policies on the target replication server, CVTCVS_LXS_SRV2, issue the following command:

```
SET DISSIMILARPOLICIES CVTCVS_LXS_SRV2 ON
```


What to do next

Replicate the client node data by issuing the **REPLICATE NODE** command. After replication runs, the policies on the target replication server are used to manage the replicated client-node data.

Deleting files before replication

If you are using the policies that are defined on the target replication server to manage replicated client-node data, you cannot delete files until they are replicated to the target replication server. To delete files before they are replicated, use the **UPDATE FILESPACE** or **UPDATE NODE** commands followed by the **DELETE FILESPACE** command.

Procedure

1. To delete files in a file space, complete the following steps:
 - a. Issue the **UPDATE FILESPACE** command and specify the **REPLRULE=NONE** parameter.
 - b. Issue the **DELETE FILESPACE** command.
2. To delete client node files, complete the following steps:
 - a. Issue the **UPDATE NODE** command and specify the **REPLRULE=NONE** parameter.
 - b. Issue the **DELETE FILESPACE** command.

Related reference:

“File expiration and expiration processing” on page 486

Purging replicated data in a file space

You can purge the backup, archive, or space-managed data from a file space on the target replication server and prevent future replication of the data type.

Procedure

To prevent replication of a data type and purge the data from the file space on the target replication server, issue the **UPDATE FILESPACE** command and specify **REPLSTATE=PURGEDATA**. For example, to prevent replication of backup data in file space /a on NODE1 and delete the backup data in file space /a on the target replication server, issue the following command:

```
update filesystem node1 /a datatype=backup replstate=purgedata
```

Data is purged the next time that replication runs for the file space. After the data is purged, the replication rule for the specified data type is set to **DEFAULT**. Replication for the data type is disabled.

Replicating client node data after a database restore

When you restore the Tivoli Storage Manager database on a source replication server, replication is automatically disabled. Before re-enabling replication, you can take steps to preserve the client node data that is on the target replication server.

About this task

Disabling replication prevents the Tivoli Storage Manager server from deleting copies of data on the target replication server that are not referenced by the restored database. Before re-enabling replication, determine whether copies of data that are on the target replication server are needed. If they are, complete the steps that are described in the following example. In the example, the name of the

source replication server is PRODSRV. DRSRV is the name of the target replication server. NODE1 is a client node with replicated data on PRODSRV and DRSRV.

Restriction: You cannot use Secure Sockets Layer (SSL) for database restore operations.

Procedure

1. Remove NODE1 from replication on PRODSRV and DRSRV by issuing the **REMOVE REPLNODE** command:

```
remove replnode node1
```
2. Update NODE1 definitions PRODSRV and DRSRV. When replication occurs, DRSRV sends the data to PRODSRV that was lost because of the database restore.
 - a. On DRSRV, issue the **UPDATE NODE** command and specify the replication mode SYNCSEND:

```
update node node1 replstate=enabled replmode=syncsend
```
 - b. On PRODSRV, issue the **UPDATE NODE** command and specify the replication mode SYNCRECEIVE:

```
update node node1 replstate=enabled replmode=syncreceive
```
3. On DRSRV, set the replication rules to match the rules on PRODSRV. For example, if only archive data was being replicated from PRODSRV to DRSRV, set the rules on DRSRV to replicate only archive data from DRSRV to PRODSRV. Backup and space-managed data are not replicated to PRODSRV. To set rules, you can issue the following commands:
 - **UPDATE FILESPACE**
 - **UPDATE NODE**
 - **SET ARREPLRULEDEFAULT**
 - **SET BKREPLRULEDEFAULT**
 - **SET SPREPLRULE**
4. On DRSRV, issue the **SET REPLSERVER** command to set PRODSRV as the target replication server:

```
set replserver prodsrv
```
5. On DRSRV, issue the **REPLICATE NODE** command to replicate data that is stored on NODE1:

```
replicate node node1
```

Replication processing changes the replication state of NODE1 to SEND on DRSRV and to RECEIVE on PRODSRV.

6. Remove NODE1 from replication on PRODSRV and DRSRV by issuing the **REMOVE REPLNODE** command:

```
remove replnode node1
```
7. Update NODE1 definitions:
 - a. On DRSRV, issue the **UPDATE NODE** command and specify the replication mode SYNCRECEIVE:

```
update node node1 replstate=enabled replmode=syncreceive
```
 - b. On PRODSRV, issue the **UPDATE NODE** command and specify the replication mode SYNCSEND:

```
update node node1 replstate=enabled replmode=syncsend
```
8. On PRODSRV, enable replication by issuing the **ENABLE REPLICATION** command:

```
enable replication
```

9. On PRODSRV, issue the **REPLICATE NODE** command to replicate data that is stored on NODE1:

```
replicate node node1
```

Replication processing changes the replication state of NODE1 to SEND on PRODSRV and to RECEIVE on DRSRV.

Results

The original replication configuration is restored. PRODSRV has all the data that was lost because of the database restore.

What to do next

Remember: In step 4 on page 1012, you set the PRODSRV as the target replication server for DRSRV. If in your original configuration you were replicating data from DRSRV to another server, you must reset the target replication server on DRSRV. For example, if you were replicating data from DRSRV to BKUPDRSRV, issue the following command on DRSRV:

```
set replserver bkupdrsrv
```

Monitoring node replication processing and verifying results

Tivoli Storage Manager provides various methods for monitoring node replication processes and verifying results.

Displaying information about node replication settings

You can display information about replication settings for file spaces and client nodes. You can also display information about replication rules.

About this task

Table 94. Commands for displaying information about node replication settings.

The following table outlines the commands you use to display information about node replication settings

If you want to...	Use these commands...
Display the replication rules and the replication state of data types for file spaces.	QUERY FILESPACE
Display information about the replication state, mode, and rules for client nodes.	QUERY NODE
Display information about replication rules, including the state.	QUERY REPLRULE

Displaying information about running and completed node replication processes

A replication record is created when a replication process is started. The record is retained in the database of the source replication server.

Procedure

To display records about running and completed node-replication processes for a node or a file space that belongs to a node, issue the **QUERY REPLICATION** command.

Important: You cannot display information about running replication processes for client nodes that are being converted from import and export operations to replication operations. The data synchronization process might run for a long time, but it occurs only once for a client node that is being converted.

The default record-retention period for completed processes is 30 days. To display the retention period, issue the **QUERY STATUS** command and check the value in the Replication Record Retention Period field.

The record for a running process is updated only after a group of files is processed and committed. A *file group* consists of 2,000 files or 2 GB of data, whichever is smaller. For example, if a single file is 450 GB, the record is not updated for a relatively long time. If you notice that the number of files that are not yet replicated for a running process is not decreasing fast enough, network bandwidth or time might be insufficient to replicate the amount of data. Take one of the following actions:

- Provide more time for replication.
- Decrease the amount of data to replicate.
- Create more parallel data-transmission sessions between the source and target replication servers by increasing the value of the **MAXSESSIONS** parameter. Increase the value of the **MAXSESSIONS** parameter only if network bandwidth and processor resources for the source and target replication servers are sufficient.

Tip: To display summary of information about a running replication process, including file spaces and bytes replicated, issue the **QUERY PROCESS** command.

Displaying the activity log of a replication process

To display messages that are associated with a node replication process, review the source replication server activity log.

Procedure

The server activity log contains messages with the following information:

- The nodes that were enabled or disabled for replication
- The number of files that were eligible to be replicated compared to the number of those files that were already stored on the target replication server
- The number of files that were successfully replicated and the number of files that were missed
- The number of files on the target replication server that were deleted

Displaying summary records of replication processes

Summary records are created for each node that is processed by a **REPLICATE NODE** command. Summary records also document the entire replication operation at the process level.

Procedure

To view summary records, issue the following command:

```
select * from summary
```

Measuring the effectiveness of a replication configuration

A replication configuration is optimal if the number of replicated files that are stored on a target replication server is equal to the number of files that are stored on the source replication server. If there are fewer files on the target server, start replication processing.

Procedure

To display the number of files that are stored on source and target replication servers, issue the **QUERY REPLNODE** command. You can issue the command on a source or a target replication server.

Results

The information in the output for **QUERY REPLNODE** includes files that are stored at the time the command is issued. If a replication process is running, the information does not include files that are waiting to be transferred. Information is reported by data type. For example, you can determine the number of backup files that belong to a client node that are stored on the source and the target replication servers.

The number of replication-eligible files on the source replication server might be much larger than the number of replicated files on the target replication server, or getting larger over time. If so, one or more of the following problems might be the reason:

- Replication processes are being canceled prematurely.
- The number of sessions for transferring data is insufficient.
- The target replication server might be busy with operations not related to replication, and replication processing is not being given sufficient processor cycles.

To help diagnose problems with replication processing, issue the **QUERY REPLICATION** command.

Measuring the effects of data deduplication on node replication processing

The destination storage pool on the target replication server might be enabled for data deduplication. If it is, the source replication server sends only extents that are not in the storage pool.

Procedure

To display information about the effects of data deduplication on replication processing, issue the **QUERY REPLICATION** command and specify **FORMAT=DETAILED**.

Results

In the output, check the values in the fields that represent bytes replicated and bytes transferred for each data type:

- Replicated bytes are bytes that were replicated to the target replication server. If a file was stored in a deduplicated storage pool, the number of bytes in the stored file might be less than the number of bytes in the original file. This value in this field represents the number of physical bytes in the original file.
- Transferred bytes represent the number of bytes that were sent to the target replication server. For files stored in a deduplicated storage pool, the value in this field includes the number of bytes in the original file before duplicate extents were removed. If duplicate extents were already on the target replication server, the number of bytes in the original file is more than the number of bytes transferred.

Related concepts:

“Replication of deduplicated data” on page 959

“Active log mirror” on page 639

Related tasks:

Part 6, “Protecting the server,” on page 853

Retaining replication records

To maintain adequate information about replication processes, you can adjust the length of time that the source replication server retains replication records in its database.

About this task

A replication record is created when a replication process is started. By default, replication records are retained for 30 calendar days. A calendar day comprises 24-hours, from midnight to midnight. For example, suppose that the retention period is two calendar days. If a replication process completes at 11:00 p.m. on day n , a record of that process is retained for 25 hours until midnight on day $n+1$.

To display the retention period for replication records, issue the **QUERY STATUS** command on the source replication server.

Procedure

To set the retention period for replication records, issue the **SET REPLRETENTION** command.

Example

Replication records that exceed the retention period are deleted from the database by Tivoli Storage Manager during automatic inventory-expiration processing. As a result, the amount of time that retention records are retained can exceed the specified retention period

If a replication process runs longer than the retention period, the record of the process is not deleted until the process ends, the retention period passes, and expiration runs.

What to do next

To display the contents of replication records, issue the **QUERY REPLICATION** command and specify **FORMAT=DETAILED**.

Recovering and storing client data after a disaster

If a source replication server is unavailable, client nodes can restore, retrieve, and recall data from the target replication server. If a source replication server is unavailable and client store operations are necessary, the nodes can back up, archive, and migrate data to the server.

Procedure

To manually restore, retrieve, or recall data from a target replication server, update the client options file to point to the target replication server. Changes to node replication settings are not required.

Converting client nodes for store operations on a target replication server

If a source replication server is unavailable, you can convert client nodes to be non-replicating nodes. Non-replicating client nodes can back up, archive, or migrate data to a target replication server.

About this task

Important: Before you convert client nodes to be non-replicating nodes, carefully consider the consequences. For example, suppose that you remove multiple client nodes from replication on source replication server **SRCSRV** and back up, archive, and migrate the node data to target replication server **TGTSRV**. Later, you decide to resume backup, archive, and migration operations to **SRCSRV** and to replicate to **TGTSRV**. The client node data on the two servers must be synchronized. The synchronization process can be lengthy and resource-intensive.

To convert a client node for storage operations on a target replication server, complete the following steps:

Procedure

1. On the target replication server, issue the **REMOVE REPLNODE** command. For example, to modify the definition of **NODE1** so that it is a non-replicating node, issue the following command:

```
remove replnode node1
```
2. To back up, archive, or migrate data, update the client options file to point to the target replication server.

What to do next

If any schedules were defined on the source replication server, you can redefine them on the target replication server. Client node data on the target replication server is now managed by policies on the target replication server. For example, file expiration and deletion are managed by the target replication server.

Removing a node replication configuration

If you do not want to replicate data, you can remove a node replication configuration.

Before you begin

Delete any administrative schedules on source replication servers that issue the **REPLICATE NODE** command for the client nodes that are included in the configuration.

Procedure

1. Remove all nodes that are configured for replication by issuing the **REMOVE REPLNODE** command on all source and target replication servers that have the nodes that are configured for replication. For example, to remove `NODE_GROUP1` from replication, issue the following command:

```
remove replnode node_group1
```
2. Remove the target replication server by issuing the **SET REPLSERVER** command on the source replication server. Do not specify the name of the target replication server. For example, to remove target replication server `TGTSRV`, issue the following command:

```
set replserver
```

What to do next

To verify that the target replication server was removed, issue the **QUERY STATUS** command on the source replication server. If the target replication server was removed, the field Target Replication Server is blank.

Tip: If you do not want to keep replicated node data on the target replication server, you can delete the replicated data.

Chapter 29. Configuring clustered environments

You can configure a Tivoli Storage Manager server for clustering on AIX, Linux, or Windows systems.

You can use a clustered environment for the following operating systems:

- IBM PowerHA[®] SystemMirror for AIX
- IBM Tivoli System Automation for Multiplatforms for AIX and Linux
- Microsoft Failover Cluster for Windows

You can use other cluster products with Tivoli Storage Manager, however, documentation is not available and support is limited. For the latest information about support for clustered environments, see <http://www.ibm.com/support/docview.wss?uid=swg21609772>.

Before you use another cluster product, verify that DB2 supports the required file systems. For more information about the level of DB2 that you are using, see the DB2 product documentation at http://www.ibm.com/support/knowledgecenter/SSEPGG_10.5.0, and search for recommended file systems.

For more information about upgrading the server in a clustered environment, see the *Installation Guide*.

Clustered environment overview

Clusters consist of many components such as Tivoli Storage Manager servers, hardware, and software. You can use clustering to join two or more servers or nodes by using a shared disk system.

This configuration provides the nodes with the ability to share data, which allows higher server availability and minimized downtime. For example:

- You can configure, monitor, and control applications and hardware components that are deployed on a cluster.
- You can use an administrative cluster interface and Tivoli Storage Manager to designate cluster arrangements and define a failover pattern. The server is part of the cluster that provides an extra level of security by ensuring that no transactions are missed because a server failed. The failover pattern that you establish prevents future failures.
- You can apply clustering to the node replication process. In this way, server availability is higher than it would be if node replication is used as a process on its own. Server availability is higher because a client is less likely to fail over to another server in a clustered environment. If you replicate data from several source replication servers to one target replication server, there is a high dependency on the target replication server. A clustered environment eases the dependency on the target replication server.

Components in a server cluster are known as *cluster objects*. Cluster objects are associated with a set of properties that have data values that describe the identity and behavior of an object in the cluster. Cluster objects can include the following components:

- Nodes

- Storage
- Services and applications
- Networks

You manage cluster objects by manipulating their properties, typically through a cluster management application.

Related concepts:

Chapter 28, “Replication of client node data,” on page 945

Cluster nodes

Nodes in a cluster all have similar characteristics, which allows them to work together.

Cluster nodes include the following similarities:

- Every node has access to all cluster configuration data.
- Every node communicates with the other nodes in the cluster through one or more physically independent networks (sometimes referred to as *interconnects*). Network adapters, referred to in server clusters as *network interfaces*, attach nodes to networks.
- Every node in the cluster is aware when another system joins or leaves the cluster.
- Every node in the cluster is aware of the resources that are running locally and the resources that are running the other cluster nodes.
- All nodes in the cluster are grouped under the cluster name, which is used to access and manage the cluster.

Configuring a Windows clustered environment

You can configure a Tivoli Storage Manager server for Windows in a Microsoft failover cluster environment. On Windows, cluster environments consist of components such as Tivoli Storage Manager servers, hardware, and software. When these components are connected to the same disk system, downtime is minimized.

Microsoft software helps configure, monitor, and control applications and hardware components that are deployed on a Windows cluster. The administrator uses the Microsoft Cluster Administrator interface and Tivoli Storage Manager to designate cluster arrangements and define the failover pattern.

Tivoli Storage Manager supports tape failover for a cluster environment by using a Fibre or SCSI connection. Although Microsoft failover clusters do not support the failover of tape devices, the failover configuration can be monitored through the Microsoft Cluster Administrator interface after it is set up through Tivoli Storage Manager.

Microsoft Failover Cluster environment overview

With a Microsoft Failover Cluster Manager, you can place Tivoli Storage Manager server cluster resources into a cluster group. The Tivoli Storage Manager cluster group has a network name, an IP address, one or more physical disks, a DB2 server, and a Tivoli Storage Manager server service.

The Tivoli Storage Manager instance network name is independent of the name of the physical node on which the Tivoli Storage Manager cluster group runs. Clients connect to a Tivoli Storage Manager server by using the Tivoli Storage Manager instance network name, rather than the Windows node name. The Tivoli Storage Manager instance network name maps to a primary or backup node. The mapping depends on which node owns the Tivoli Storage Manager cluster group. Any client that uses Windows Internet Name Service (WINS) or directory services to locate servers can automatically track the Tivoli Storage Manager clustered server as it moves between nodes. You can automatically track the Tivoli Storage Manager clustered server without modifying or reconfiguring the client.

Each Tivoli Storage Manager cluster group has its own disk as part of a cluster resource group. Tivoli Storage Manager cluster groups cannot share data between the cluster groups. Each Tivoli Storage Manager server that is configured in a Tivoli Storage Manager cluster group has its database, active logs, recovery logs, and set of storage pool volumes on a separate disk. This disk is owned by the Tivoli Storage Manager cluster group where the server is configured.

Note: Microsoft Failover Cluster Manager supports an IP address only as a resource. Hence, any Tivoli Storage Manager server that runs on a cluster must limit its supported communication method to just TCP/IP. Any client that does not use TCP/IP as a communication method is not able to reach the Tivoli Storage Manager cluster group if it fails over to the other cluster node.

The following example demonstrates the way that a Microsoft Failover Cluster Manager for a Tivoli Storage Manager cluster server works.

Assume that a clustered Tivoli Storage Manager server that is named JUPITER is running on Node Z and a clustered Tivoli Storage Manager server that is named SATURN is running on Node X. Clients connect to the Tivoli Storage Manager server JUPITER and the Tivoli Storage Manager server SATURN without knowing which node hosts their server.

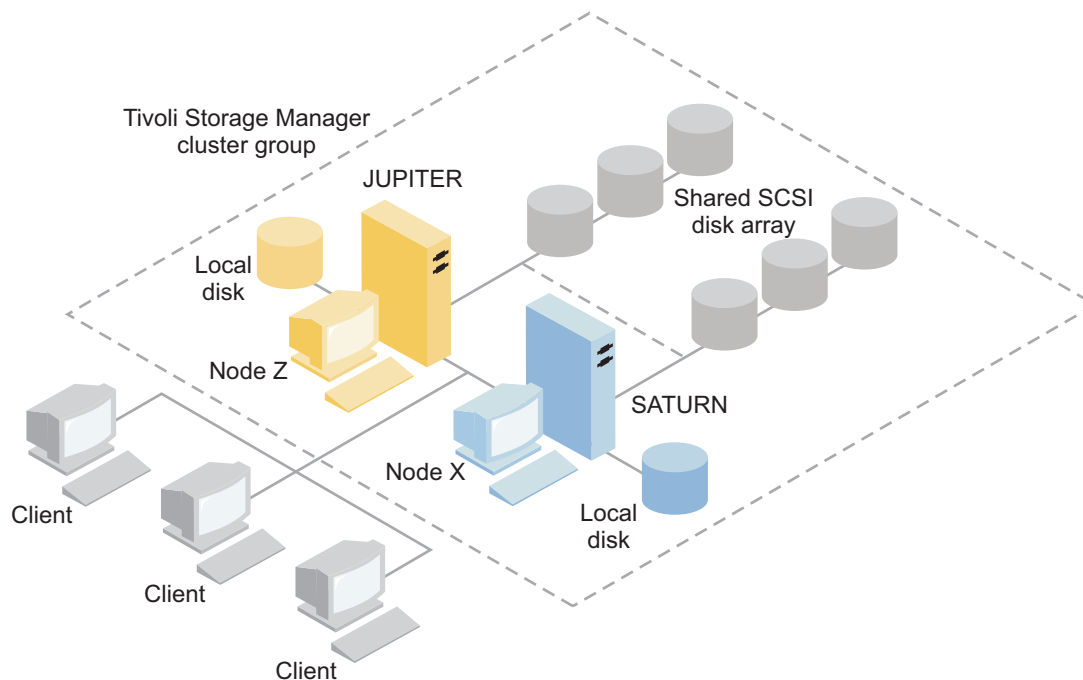


Figure 117. Clustering with JUPITER as Node Z and SATURN as Node X

When one of the software or hardware resources fails, failover occurs. Resources such as applications, disks, and an IP address move from the failed node to the remaining node. The remaining node:

- Takes over the Tivoli Storage Manager cluster group
- Brings the disk resources, the network resources, and the DB2 resource online
- Restarts the Tivoli Storage Manager service
- Provides access to administrators and clients

If Node X fails, Node Z assumes the role of running SATURN. To a client, it is exactly as if Node X were turned off and immediately turned back on again. Clients experience the loss of all connections to SATURN and all active transactions are rolled back to the client. Clients must reconnect to SATURN after the connection is lost. The location of SATURN is not apparent to the client.

Tape failover for nodes in a cluster

Groups in a cluster can be transferred to other nodes when the node that is hosting the groups fails.

A node can host physical or logical units, referred to as resources. Administrators organize these cluster resources into functional units that are called groups and assign these groups to individual nodes. If a node fails, the server cluster transfers the groups that were being hosted by the node to other nodes in the cluster. This transfer process is called *failover*. The reverse process, *failback*, occurs when the failed node becomes active again and the groups that were failed over to the other nodes are transferred back to the original node.

Fiber tape failover

Tivoli Storage Manager can manage the failover of Fibre Channel direct-attached tape and library devices on a Microsoft Windows system in a clustered environment without extra hardware.

The following table describes the hardware and software that you can use with Tivoli Storage Manager fiber-tape failover.

Table 95. Hardware and software supported for fiber-tape failover

Operating system	Fibre Channel adapter	Fibre Channel tape library and drives
Microsoft Windows Server 2008, Microsoft Windows Server 2008 R2 (64-bit), or Microsoft Windows 2012.	QLogic QLE2462 with a Storport driver.	IBM or other vendor Fibre Channel directly attached tape and library devices. For the latest list of supported devices, see the IBM Support Portal.

Ensure that the same level of Windows (Windows 2008, Windows 2008 R2, or Windows 2012) is installed on all computers in the cluster.

To meet the minimum requirements for failover, ensure that one of the following components is installed on the Windows system:

- Directly attached Fibre Channel tape or library device from IBM
- Directly attached tape or library device from another vendor

For best results, install both a Fibre Channel adapter and a Fibre Channel tape library or drive on the Windows system. If you install a Fibre Channel adapter, it must use a Storport driver.

Restriction: You cannot use a miniport driver.

The LUN reset function that is used to clear the tape device reservation can be used only with a Storport driver. However, with Tivoli Storage Manager V6.3.1 and later, if you use persistent reservation, you can install a Fibre Channel adapter without the Storport driver because the LUN reset function is not required. Do not use the LUN reset function to break the reservation if the drive is reserved by persistent reservation. Use the LUN reset function only to release the drive if drive is reserved by the previous reserve commands.

If you use persistent reservation, ensure that you select a tape drive that you can use for persistent reservation for all clusters within the system. For more information about IBM tape drives, see the *IBM Tape Device Drivers Installation and User's Guide*. For more information about persistent reservation, see the information about persistent reserve for tape drives.

Tip: If there is a failover in a clustered environment, the server tries to open an available drive. If the drive is locked, the server tries to break the persistent reservation.

Planning for a clustered environment

Configuration in a clustered environment takes planning to ensure the optimal performance of your system. Whether you configure your system to include clusters depends on your business needs.

Plan for a cluster configuration that accommodates your environment. In addition to assuring the correct type of hardware and the applicable software, you must set up a failover pattern.

When a node fails or needs to be taken offline, which node or nodes in the cluster picks up the transaction processing? In a two-node cluster, there is little planning necessary. In a more complex arrangement, you want to consider how your transaction processing is best handled. A form of load balancing among your nodes needs to be accounted for so that you maintain peak performance. Another consideration is to ensure that your customers do not see any lag and little drop in productivity.

Microsoft Cluster Servers and Microsoft Failover Clusters require each Tivoli Storage Manager server instance to have a private set of disk resources. Although nodes can share disk resources, only one node can actively control a disk at a time.

Attention: Ensure that the same level of Windows (Windows 2008, Windows 2008 R2, or Windows 2012) is installed on all computers in the cluster.

Is one configuration better than the other? To determine your best installation, you need to look at the differences in performance and cost. Assume that you have a Tivoli Storage Manager server-dedicated cluster whose nodes have comparable power. During failover, the performance of a configuration might degrade because one node must manage both Tivoli Storage Manager Cluster Instances. If each node handles 100 clients in a normal operation, one node must handle 200 clients during a failure.

Cluster configuration worksheet

Record your answers to the following planning questions before you set up the cluster configuration.

1. What type of cluster solution best fits your business needs?
2. What type of failover pattern do you need?

The use of tape failover support also affects the pattern.

3. Is tape failover support be needed?

Consider how tape devices are used by the Tivoli Storage Manager Cluster instances. The way that tape devices are used by cluster instances can limit the number of nodes in the failover pattern to two.

4. What are the resources to be dedicated to Tivoli Storage Manager?

Resource type	Resource name
Cluster Resource Group	
Physical Disk Resources	
IP address	
Subnet Mask	
Network	
Network Name (server name)	
Nodes	

Resource type	Resource name
Tape Failover (optional): device name - both nodes	

Planning for cluster hardware and software configuration

Cluster hardware and software configuration is determined during the planning stage and before the actual installation.

Procedure

The following guidelines help determine what resources are needed for a successful Tivoli Storage Manager cluster:

1. Decide which cluster configuration you must use with servers that use disk devices. Each Tivoli Storage Manager Cluster Instance needs a separate set of disk resources on the shared disk subsystem. You might have problems if you configure the I/O subsystem as one large array. For example, when you configure a two server cluster and later decide to expand to a four server cluster.
2. Identify the disk resources to be dedicated to Tivoli Storage Manager. Do not divide a shared disk into multiple partitions with each partition assigned to a different application and thus a different cluster group.
For example, Application A, a stable application, might be forced to fail over because of a software problem with Application B. This failover might occur if both applications use partitions that are part of the same physical disk. This problem causes the Cluster Services to fail over Application B and its corequisite disk resource. Because the partitions exist on the same physical drive, Application A is also forced to fail over. Therefore, when you install and configure a Tivoli Storage Manager application, dedicate a shared disk as a resource that can fail if necessary.
3. Ensure that you have an IP address and network name for each Tivoli Storage Manager server instance that you configure. For a cluster that involves two Tivoli Storage Manager cluster instances, you must have two network names.
4. Create a cluster resource group and move disk resources to it. Each Tivoli Storage Manager server instance requires a cluster resource group. Initially, the group must contain only disk resources. You might choose just to rename an existing resource group that contains only disk resources.
5. Tivoli Storage Manager is installed to a local disk on each node in the cluster. Determine the disk to be used on each node. Use the same drive letter on each system. When Tivoli Storage Manager server is installed in a cluster environment, the SANDISCOVERY option must be set to ON. By default, this option is set to OFF.
6. If you choose not to use Tivoli Storage Manager tape failover support, you can attach tape devices in either of the following configurations:

Configuration	Advantages and disadvantages	The required disk space	How to enable migration	What to do when a failover occurs
Attach to the node on which the Tivoli Storage Manager server instance is active.	This configuration allows high-performance backup and restore operations. However, it is not entirely automated because operator intervention is required to service a failover when repair delays occur.	Define enough volume space for which data is disk-based to keep more than two days worth of average data.	Set up a storage pool hierarchy so that data is moved efficiently to the tape device.	Manually disconnect the tape device and reattach it to the node on which the server was activated.
Attach to a third, non-clustered system on which an extra instance of the Tivoli Storage Manager server is active.	This configuration might not be feasible in installations with low-bandwidth communications between the servers in the cluster and the tape-device controller server.	Define enough volume space for which data is disk-based to keep more than two days worth of average data.	Use the virtual volumes to move the data from the local disk volumes to the tape device.	No action is needed; the activated server continues to use the virtual volumes.

Configuring Tivoli Storage Manager in Microsoft Failover Cluster

The Tivoli Storage Manager cluster configuration procedure must be completed on the set of nodes that hosts a Tivoli Storage Manager cluster group.

Steps for the procedure vary depending upon which node you are currently configuring. When you configure the primary node in the set, the Tivoli Storage Manager server instance is created and configured. When you configure the remaining nodes in the set, each node is updated by using a specific method. The way the node is updated allows it to host the Tivoli Storage Manager server instance that is created on the primary node. A Tivoli Storage Manager server must be installed and configured on the first node in the set before you configure the remaining nodes in the set. Violating this requirement causes the configuration to fail.

Ensure that you completely configure one Tivoli Storage Manager cluster group before you move on to the next when you are configuring multiple Tivoli Storage Manager cluster groups. Because you are dealing with separate IP addresses and network names for each Tivoli Storage Manager cluster group, you lessen the possibility of mistakes by configuring each Tivoli Storage Manager cluster group separately.

Setting up Tivoli Storage Manager in a Microsoft Failover Cluster

You must ensure that your cluster is properly installed and configured before you install Tivoli Storage Manager.

Procedure

To configure the Tivoli Storage Manager in a Microsoft Failover Cluster, complete the following steps:

1. Ensure that the Windows operating system is installed on all computers that are part of the cluster. Failover clustering is supported by Microsoft Windows Server 2008 and Windows Server 2008 R2. See Microsoft Failover Cluster documentation for detailed support information.
2. Log on with domain user ID. The domain user must be in the same domain as the Tivoli Storage Manager server.
3. Ensure that the failover cluster is installed and configured for all the computers in the cluster. To install Tivoli Storage Manager in a Microsoft Failover Cluster, the cluster must be installed and fully functional on your servers.
4. Verify that each node and shared disk in the cluster is operational.
5. Ensure that the shared tape devices are operational if Tivoli Storage Manager tape failover support is being used.

Preparing a Microsoft Failover Cluster group for a basic virtual server

Each Tivoli Storage Manager server instance requires a cluster resource group.

Before you begin

Use the Failover Cluster Manager program on the computer that owns the shared disk or tape resource to prepare your resource group. Initially, the group must contain only disk resources. You can create a group and move disk resources to it. You can also choose to rename an existing resource group that contains only disk resources.

As you construct your resource groups, consider the following items:

- Ensure that each resource group has a distinctive name. Do not change the names after the group is created because it can cause a corrupted configuration.
- Ensure that all nodes in the cluster are online.
- Ensure that the group is online and owned by the node where the initial server instance is installed.

Procedure

To prepare a resource group for cluster configuration, complete the following steps:

1. Open the Failover Cluster Manager program. Right-click **Services and Applications** and then choose **More Actions > Create Empty Service or Application**.
2. Right-click **New Service or Application**, select **Change the name** and choose a new name for the resource group such as TSMGROUP.
3. Right-click the resource group TSMGROUP and select **Add storage**.

4. On the Add storage area panel, select the shared volume or volumes for Tivoli Storage Manager and click **OK**. The resource group TSMGROUP, which contains the disk volumes you just added, is displayed.

Installing Tivoli Storage Manager in a Microsoft Failover Cluster

Install the Tivoli Storage Manager server on every node in the cluster that hosts a Tivoli Storage Manager clustered server.

Procedure

Complete the following steps for each node in your cluster to install the Tivoli Storage Manager server:

1. Log in with an administrator or domain user ID. The domain user must be a member of the Domain Administrators group.
2. Install the Tivoli Storage Manager server to a local disk on each node. Use the same local disk drive letter for each node.
3. Restart the system after the server installation completes.

Initializing the Tivoli Storage Manager server for a Microsoft Failover Cluster on the primary node

After you install Tivoli Storage Manager on the nodes in the cluster, you must initialize the server on the primary node.

Procedure

1. Ensure that all systems are restarted after the installation. Verify that all systems are running correctly.
2. Log in with an administrator or domain user ID. The domain user must be in the same domain as the Tivoli Storage Manager server.
3. Open the Failover Cluster Manager program and verify that the resources are online and available to the primary node.
4. Begin the initialization procedure on the primary node in your cluster. In the Failover Cluster Manager program, verify that the owner of the resource group is the primary node in your cluster.
5. From the **Start** menu, click **All programs > Tivoli Storage Manager > Configuration wizard**.
6. Follow the wizard directions, clicking **Next** to step through the wizard. When you are prompted to enter the user ID, enter the name of the domain account to associate with the cluster.
7. If the initialization completed, click **Done**.

Verifying the configuration of Tivoli Storage Manager in a Microsoft Failover Cluster

When you finish configuring Tivoli Storage Manager in a Microsoft Failover Cluster, you can review the Failover Cluster Manager summary window. Verify that clustering is completed successfully and the Tivoli Storage Manager server is started.

Procedure

To verify that the Tivoli Storage Manager server instance in a Microsoft Failover Cluster is created and configured correctly, complete the following steps:

1. From the Failover Cluster Manager, select the server instance. The network name that you configured is displayed in the Server Name pane.

2. In the Other Resources pane, confirm that the server instance and the IBM DB2 server resource are displayed.
3. Right-click the Tivoli Storage Manager server instance and select **Bring this resource online**.

Completing a failover test for your cluster

After you complete the cluster configuration, run a failover test to ensure that the nodes are working properly.

Procedure

1. Open Failover Cluster Manager. Under Other Resources, right-click the Tivoli Storage Manager Instance(x) resource. Select **Bring this resource online**.
2. To test the failover, right-click the Tivoli Storage Manager cluster resource group and select **Move this service or application to another node**.
3. Verify that the failover from the second node to the first node completes successfully.

Maintaining the clustered environment

After you set up your initial cluster or clusters, maintenance needs are minimal.

Check your Windows Event log on a regular, if not daily, basis to monitor the activity of the nodes in the cluster. Use the log to check whether a node fails and needs maintenance.

The following list of topics describes situations that might affect the configuration or format of your cluster after it is operational.

Migrating an existing Tivoli Storage Manager server into a cluster

The reason for migrating an existing server into a cluster is similar to the reason for adding a server to a cluster. You want to increase the availability and reliability of data to all your users. By having the server as part of the cluster, you provide an extra level of security by ensuring that no transactions are missed due to a failed server. The failover pattern that you establish prevents future failures.

About this task

To migrate an existing Tivoli Storage Manager server into a cluster, you can either move the clients or complete a backup and restore procedure. The choice depends primarily on the availability and capacity of other Tivoli Storage Manager server computers in your site and your familiarity with the backup and restore procedure.

Moving the clients:

If you move clients from a non-clustered Tivoli Storage Manager server computer to a clustered one, you can slowly move your users to the new system and not interrupt services. However, you must have the correct hardware to run two Tivoli Storage Manager servers simultaneously.

About this task

You can move clients in either of the following ways:

- You can register clients with the new clustered Tivoli Storage Manager server. Have them complete a full backup of their data to the clustered server. When

you are sure that the client data is safely on the clustered server, that client can be deleted from the old server. When all clients are moved to the clustered server, the old server can be eliminated.

- You can export the clients from the old server and import those clients into the clustered server. After you verify that a client's data is on the clustered server, you can delete that client from the old server. After you import all clients to the clustered server, you can delete the old server.

Adding a Tivoli Storage Manager server with backup and restore

If your hardware resources are limited, you can add an existing Tivoli Storage Manager server to a cluster by using a backup and restore procedure.

About this task

For example, suppose that you have no hardware other than the two servers to be clustered. You plan to use the computer that is running the Tivoli Storage Manager server as a node. Complete this procedure to remove Tivoli Storage Manager from the computer and reinstall it in the cluster:

Procedure

1. Back up all disk storage pools to a copy storage pool.
2. Back up the database of the existing Tivoli Storage Manager server.
3. Perform the installation and configuration of the cluster.
4. Restore the database to the clustered Tivoli Storage Manager server.
5. Restore the disk storage pool volumes from the copy storage pool.
6. After you verify that all of your data is on the clustered server, delete the old server.

Managing a virtual Tivoli Storage Manager server on a cluster

For most tasks, you can administer a virtual Tivoli Storage Manager server as you would a non-clustered server. To complete tasks such as starting and stopping the server or moving a resource group to another node to complete system maintenance, you must use the Microsoft Cluster Administrator interface.

About this task

The Microsoft Cluster Administrator interface is available through the Administrative Tools program group. The interface is a detailed view of a virtual server configuration. The virtual server configuration includes details such as the physical Windows servers that are part of the cluster and their resources, network connections, and status. View the components of a virtual server configuration and start, stop, or fail back a virtual server by using this interface. Manage a virtual Tivoli Storage Manager server by using the Microsoft Cluster Administrator interface to avoid server failures and error messages. For example, if you use the Windows Service Control Manager to shut down the server, you might receive messages that the server failed.

You might want to move a virtual Tivoli Storage Manager server when the Windows server acts as the primary node and this server requires hardware or system maintenance. Use the Microsoft Cluster Administrator interface to move the management of the virtual Tivoli Storage Manager server to the secondary node until the maintenance is completed.

Managing tape failover in a cluster

As part of your regular routine, check the event log to ensure that the configuration is operating properly. If a server fails, the error is logged. The log provides you with information to understand why the failure took place.

About this task

Sometimes a node must rejoin the cluster, for example:

- When a node failed
- When a new Host Bust Adapter fiber card is added (equipment changes)

Procedure

Complete the following tasks in any order to ensure that a node can successfully join the cluster:

- Update, if necessary, the drive and library that use the Tivoli Storage Manager cluster tool.
- Take the Tivoli Storage Manager server offline until the failed node rejoins the cluster. This action helps ensure that the Tivoli Storage Manager server that is running on the other node is not affected.

Troubleshooting with Tivoli Storage Manager cluster log

The Tivoli Storage Manager Cluster Resource DLL reports events and errors to the cluster log. The cluster log is a useful troubleshooting tool. When this log is enabled, it records the actions of each component of the Cluster service as the result of each action.

In comparison with the Microsoft Windows Event Log, the cluster log is a complete record of cluster activity. The cluster log records the cluster service activity that is recorded in the event log. Although the event log can point you to a problem, the cluster log helps you resolve the problem.

The cluster log is enabled by default in Windows. Its output is printed as a log file in %SystemRoot%\Cluster. For more information, see the Windows online help documentation.

Chapter 30. Disaster recovery manager

You can use the disaster recovery manager (DRM) function to prepare a plan that can help you to recover your applications if a disaster occurs.

About this task

You can recover data at an alternative site, on replacement computer hardware, and with people who are not familiar with the applications. You can also manage your offsite recovery media, store client recovery information, and use the disaster recovery plan for audits to certify the recoverability of the server.

To recover from a disaster, you must know the location of your offsite recovery media. DRM helps you to determine which volumes to move offsite and back onsite and track the location of the volumes.

You can use complementary technologies to protect the Tivoli Storage Manager server and to provide an alternative to disaster recovery. For example, you can use DB2 HADR to replicate the Tivoli Storage Manager database or device-to-device replication.

To ensure high server availability, you can use node replication with clustering to minimize a disaster risk. In a clustered environment, a client is less likely to fail over to another server. If you replicate data from several source replication servers to one target replication server, there is a high dependency on the target replication server. A clustered environment eases the dependency on the target replication server.

The following list identifies key tasks:

- “Querying defaults for the disaster recovery plan file” on page 1067
- “Specifying recovery instructions for your site” on page 1072
- “Specifying information about your server and client node machines” on page 1074
- “Specifying recovery media for client machines” on page 1078
- “Creating and storing the disaster recovery plan” on page 1079
- “Managing disaster recovery plan files stored on target servers” on page 1083
- “Moving backup media for disaster recovery operations” on page 1086
- “Managing the Disaster Recovery Manager tasks” on page 1041
- “Preparing for disaster recovery” on page 1034
- “Recovering from a disaster” on page 1091

Note: Unless otherwise noted, you need system privilege class to complete DRM tasks.

Related concepts:

“Clustered environment overview” on page 1019

Related tasks:

Chapter 27, “Protecting and recovering the server infrastructure and client data,” on page 893

Related reference:

Preparing for disaster recovery

Stay prepared for a disaster by establishing a procedure for disaster recovery by using the Disaster Recovery Manager (DRM). The steps are completed by the onsite administrator unless otherwise indicated.

Procedure

Complete the following steps to prepare for disaster recovery:

1. Record the following information in the RECOVERY.INSTRUCTIONS stanza source files:
 - Software license numbers
 - Sources of replacement hardware
 - Any recovery steps specific to your installation
2. Store the following information in the database:
 - Server and client node machine information (**DEFINE MACHINE**, **DEFINE MACHINENODE ASSOCIATION**, and **INSERT MACHINE** commands)
 - The location of the boot recovery media (**DEFINE RECOVERYMEDIA** command)
3. Schedule automatic nightly backups to occur in the following order:
 - Primary Storage Pools
 - Backup active and inactive data to copy storage pools.
 - Copy active data to active-data pools.
 - Database
 - Back up the database

Restriction: Ensure that the primary storage pool backup process is complete before you back up the database.

4. Daily, create a list of the previous night's database, copy storage pool, and active-data pool volumes to be sent offsite:

```
query drmedia * wherestate=mountable
```

- a. Check the volumes out of the library:

```
move drmedia * wherestate=mountable
```

Restriction: Ensure that the **BACKUP STGPOOL** command and the **BACKUP DB** command are complete before you issue the **MOVE DRMEDIA** command.

- b. Send the volumes offsite and record that the volumes were given to the courier:

```
move drmedia * wherestate=notmountable
```

5. Create a recovery plan:

```
prepare
```

Tip: The active-data pool volume information is added to the RECOVERY.VOLUMES.REQUIRED stanza in the recovery plan file when the active-data pool volume is in a COURIER or a VAULT state.

6. Give a copy the recovery plan file to the courier.
7. Create a list of tapes that contain data that is no longer valid and that must be returned to the site:

```
query drmedia * wherestate=vaultretrieve
```

8. Give the courier the database backup tapes, storage pool backup tapes, active-data pool tapes, the recovery plan file, and the list of volumes to be returned from the vault.
9. The courier gives you any tapes that were on the previous day's return from the vault list.

Update the state of these tapes and check them into the library:

```
move drmedia * wherestate=courierretrieve cmdf=c:\drm\checkin.mac  
cmd="checkin libvol libauto &vol status=scratch"
```

The volume records for the tapes that were in the COURIERRETRIEVE state are deleted from the database. The **MOVE DRMEDIA** command also generates the **CHECKIN LIBVOL** command for each tape that is processed in the file

c:\drm\checkin.mac. For example:

```
checkin libvol libauto tape01 status=scratch  
checkin libvol libauto tape02 status=scratch  
...
```

Note: An administrator can run the MACRO command by specifying

c:\drm\checkin.mac as the macro name to process the CHECKIN LIBVOL commands.

```
> dsmadm -id=xxxxx -pa=yyyyyy MACRO c:\drm\checkin.mac
```

10. The courier takes the database backup tapes, storage pool backup tapes, active-data pool tapes, the recovery plan, and the list of volumes to return from the vault.
11. Call the vault and verify that the backup tapes arrived and are secure, and that the tapes that must be returned to the site are given to the courier.
12. Set the location of the volumes sent to the vault:

```
move drmedia * wherestate=courier
```
13. Set the location of the volumes that are given to the courier by the vault:

```
move drmedia * wherestate=vaultretrieve
```

Example

The following example of a custom maintenance script shows the recommended sequence of steps for a specific Tivoli Storage Manager server configuration:

```
PARALLEL  
BACKUP STGPOOL PRIMDISK DRM_COPYTAPE WAIT=YES  
BACKUP STGPOOL PRIMTAPE DRM_COPYTYPE WAIT=YES  
SERIAL  
PARALLEL  
COPY ACTIVATEDATA PRIMDISK DRM_ACTTAPE WAIT=YES  
COPY ACTIVATEDATA PRIMTAPE DRM_ACTTAPE WAIT=YES  
SERIAL  
BACKUP DB DEVCLASS=TS7650G_N34 TYPE=FULL WAIT=YES  
MOVE DRMEDIA * WHERESTATE=MOUNTABLE TOSTATE=VAULT SOURCE=DBBACKUP WAIT=YES  
PREPARE SOURCE=DBBACKUP WAIT=YES  
MIGRATE STGPOOL PRIMDISK LOWMIG=0 WAIT=YES  
EXPIRE INVENTORY SKIPDIRS=NO RESOURCE=4 WAIT=YES  
PARALLEL  
RECLAIM STGPOOL PRIMDISK THRESHOLD=50 WAIT=YES  
RECLAIM STGPOOL PRIMTAPE THRESHOLD=50 WAIT=YES
```

Restriction: Ensure that the **BACKUP STGPOOL** command and the **BACKUP DB** command complete before you issue other commands, for example, the **MOVE DRMEDIA** command.

Disaster recovery manager checklist

The following checklist can help you set up disaster recovery manager.

Table 96. Checklist

Activity	Start Date	End Date	Status	Responsible Person	Backup Person
Plan for DRM					
Evaluate your disaster recovery requirements <ul style="list-style-type: none">• What are the business priorities for recovering your clients?• Where is the recovery site?• Is the recovery site hot, warm, or cold?• Do the clients have connectivity to recovery server?• Who are the system and Tivoli Storage Manager administrators?• Will you need to return to the original site?• Where are the offsite backups stored?• How does the vault handle the backup media?• How are the backups packaged or processed?• Who provides the courier service?					
Evaluate the current storage pool backup implementation <ul style="list-style-type: none">• What primary storage pools are being backed up?• When are the backups performed?• Will the backups remain onsite or be sent offsite?• Naming conventions for replacement volumes for primary storage pools					

Table 96. Checklist (continued)

Activity	Start Date	End Date	Status	Responsible Person	Backup Person
Evaluate the current database backup implementation <ul style="list-style-type: none"> • When are the backups performed? • Backup purpose: offsite or onsite • Will you use snapshot database backups or full plus incremental database backups? • How long do you want to keep backup series? Verify that the values for copy storage pool and active-data pool REUSEDELAY and DRMDBBACKUPEXPIREDAYS are the same. If copy storage pools or active-data pools that are managed by DRM have different REUSEDELAY values, set the DRMDBBACKUPEXPIREDAYS value to the highest REUSEDELAY value. 					
Determine which primary storage pools are to be managed by DRM					
Determine which copy storage pools are to be managed by DRM <ul style="list-style-type: none"> • Offsite copy storage pools 					
Determine which active-data pools are to be managed by DRM <ul style="list-style-type: none"> • Offsite active-data pools 					

Table 96. Checklist (continued)

Activity	Start Date	End Date	Status	Responsible Person	Backup Person
Where to Save the Recovery Plan File Locally: <ul style="list-style-type: none"> • What is the recovery plan file path name prefix? • How are the recovery plan files made available at the recovery site? <ul style="list-style-type: none"> – Print and store offsite – Copy stored offsite – Copy sent/NFS to recovery site On Another Server: <ul style="list-style-type: none"> • What server is to be used as the target server? • What is the name of the target server's device class? • How long do you want to keep recovery plan files? 					
Determine where you want to create the user-specified recovery instructions What is the prefix of the instructions path name?					
Analyze the sequence of steps that are related to the PREPARE command backup movement Document the flow of activities and timings: <ul style="list-style-type: none"> • Sending of volumes offsite • Return of empty volumes • PREPARE timing 					
Installation					
Receive and Install the Tivoli Storage Manager code					
License DRM <ul style="list-style-type: none"> • REGISTER LICENSE or • Update the server options 					

Table 96. Checklist (continued)

Activity	Start Date	End Date	Status	Responsible Person	Backup Person
<p>Set DRM defaults</p> <p>Issue:</p> <ul style="list-style-type: none"> • SET DRMDBBACKUPEXPIREDAYS to define the database backup expiration • SET DRMPRIMSTGPPOOL to specify the DRM-managed primary storage pools • SET DRMCOPYSTGPPOOL to specify the DRM-managed copy storage pools • SET DRMACTIVEDATASTGPPOOL to specify the DRM-managed active-data pools • SET DRMPPLANVPOSTFIX to specify a character to be appended to new storage pools • SET DRMPPLANPREFIX to specify the RPF prefix • SET DRMINSTRPREFIX to specify the user instruction file prefix • SET DRMNOTMOUNTABLENAME to specify the default location for media to be sent offsite • SET DRMCOURIERNAME to specify the default courier • SET DRMVAULTNAME to specify the default vault • SET DRMCMDFILENAME to specify the default file name to contain the commands that are specified with the CMD parameter on MOVE and QUERY DRMEDIA • SET DRMCHECKLABEL to specify whether volume labels are verified when checked out by the MOVE DRMEDIA command • SET DRMRPFEXPIREDAYS to specify a value for the frequency of RPF expiration (when plan files are stored on another server) 					

Table 96. Checklist (continued)

Activity	Start Date	End Date	Status	Responsible Person	Backup Person
Define the site-specific recovery instructions Identify: <ul style="list-style-type: none"> • Target disaster recovery server location • Target server software requirements • Target server hardware requirements (storage devices) • Tivoli Storage Manager administrator contact • Courier name and telephone number • Vault location and contact person Create: <ul style="list-style-type: none"> • Enter the site-specific recovery instructions data into files that are created in the same path/HLQ as specified by SET DRMINSTRPREFIX 					
Test disaster recovery manager					
Test the installation and customization <ul style="list-style-type: none"> • QUERY DRMSTATUS to display the DRM setup • Back up the active and inactive data that is in primary storage pools to copy storage pools. Copy the active data that is in primary storage pools to active-data pools. • Back up the Tivoli Storage Manager database • QUERY DRMEDIA to list the copy storage pool and active-data pool volumes • MOVE DRMEDIA to move offsite • PREPARE to create the recovery plan file 					
Examine the recovery plan file created					
Test the recovery plan file break out <ul style="list-style-type: none"> • VBScript procedure planexpl.vbs • Locally written procedure 					

Table 96. Checklist (continued)

Activity	Start Date	End Date	Status	Responsible Person	Backup Person
Set up the schedules for automated functions					

Managing the Disaster Recovery Manager tasks

To protect data, you can use the Disaster Recovery Manager (DRM) during routine operations and during disaster recovery.

Before you begin

If Tivoli Storage Manager is set up to use Secure Sockets Layer (SSL) for client/server authentication, a digital certificate file, `cert.kdb`, is created as part of the process. This file includes the server's public key, which allows the client to encrypt data. The digital certificate file cannot be stored in the server database because the Global Security Kit (GSKit) requires a separate file in a certain format.

1. Keep backup copies of the `cert.kdb` and `cert256.arm` files.
2. Regenerate a new certificate file, if both the original files and any copies are lost or corrupted.

About this task

Ensure that you set up the DRM and perform the daily operations to protect the database, data, and storage pools.

Setup

1. License DRM by issuing the **REGISTER LICENSE** command.
2. Ensure that the device configuration and volume history files exist.
3. Back up the storage pools by issuing the **BACKUP STGPOOL** command.
4. Copy active data to active-data pools by using the **COPY ACTIVE DATA** command.
5. Do a full backup the database (for example, a database snapshot backup) by using the **BACKUP DB** command.
6. Define site-specific server recovery instructions in the DRM plan file.
7. Describe priority client machines by using the **DEFINE MACHINE** command.
8. Generate the disaster recovery plan.

Daily Preparation Operations

Day 1

1. Back up client files.
2. Back up the primary storage pools to copy storage pools.
3. Copy active data from primary storage pools to active-data pools.
4. Back up the database (for example, a database snapshot backup).

Restriction: Ensure that the primary storage pool backup process is complete before you back up the database.

5. Mark the backup volumes as unavailable to Tivoli Storage Manager.

Restriction: Ensure that the **BACKUP STGPPOOL** command and the **BACKUP DB** command are complete before you issue the **MOVE DRMEDIA** command.

6. Send the backup volumes and disaster recovery plan file to the vault.
7. Generate the disaster recovery plan.

Day 2

1. Back up client files
2. Back up active and inactive data that is in the primary storage pools to copy storage pools. Copy the active data that is in primary storage pools to active-data pools.
3. Back up the database (for example, a database snapshot backup).

Restriction: Ensure that the primary storage pool backup process is complete before you back up the database.

4. Mark the backup volumes as unavailable to Tivoli Storage Manager.

Restriction: Ensure that the **BACKUP STGPPOOL** command and the **BACKUP DB** command are complete before you issue the **MOVE DRMEDIA** command.

5. Send the backup volumes and disaster recovery plan file to the vault.
6. Generate the disaster recovery plan.

Day 3

1. Automatic storage pool reclamation processing occurs.
2. Back up client files.
3. Back up the active and inactive data that is in primary storage pools to copy storage pools. Copy the active data that is in primary storage pools to active-data pools.
4. Back up the database (for example, a database snapshot backup).

Restriction: Ensure that the primary storage pool backup process is complete before you back up the database.

5. Send the backup volumes and a list of expired volumes to be reclaimed to the vault.
6. The vault acknowledges receipt of the volumes that were sent on the previous day.
7. Generate the disaster recovery plan.

Disaster and Recovery

Day 4 The server and the client machines are destroyed.

1. Restore the server by using the latest recovery plan.
2. Identify the high priority client nodes at the disaster site.
3. Restore urgently needed client-system files from active-data pools. Restore other, less urgently needed client-system files from copy storage pools.
4. Restore the primary storage pools from copy storage pools.

Attention: Restoring a primary storage pool from an active-data pool might cause some or all inactive files to be deleted from the database. Some or all of the inactive files might be deleted if the server determines that an inactive file must be replaced but cannot find it in the active-data pool.

5. Move database backup, copy storage pool, and active-data pool volumes to the vault.

Daily Operations

Day 5

1. Back up client files.
2. Back up the active and inactive data that is in primary storage pools to copy storage pools. Copy the active data that is in primary storage pools to active-data pools.
3. Back up the database (for example, a database snapshot backup).
4. Send the backup volumes and a list of expired volumes to be reclaimed to the vault.
5. Generate the disaster recovery plan.

The disaster recovery plan file

The disaster recovery plan file contains the information that is required to recover a Tivoli Storage Manager server to the point in time that is represented by the last database backup operation that is completed before the plan is created. The plan is organized into stanzas, which you can break out into multiple files.

Tip: The plan file that DRM generates is a template that contains information, including commands for recovering the database, that might not apply to your particular recovery scenario. To modify the plan or to store more instructions that you need during recovery from an actual disaster, use the RECOVERY.INSTRUCTIONS stanzas. Enter your site-specific information in the stanzas when you first create the plan file or after you test it.

Breaking out a disaster recovery plan file

You can break out the stanzas of the disaster recovery plan file into individual files.

You can use a Microsoft VBScript command procedure or an editor to break out the stanzas in the disaster recovery plan file into individual files. A sample procedure, `planexpl.vbs`, is included with DRM. You can modify the procedure for your installation. Store a copy of the procedure offsite for recovery.


```

'*****
' IBM TSM Disaster Recovery Manager for Windows Server 2008 Sample Script
'
' Explode a recovery plan file into separate files (batch programs,
'   TSM macros, TSM server options file etc.)
'
' Invoke with:
'   cscript planexpl.vbs recoveryplanfilename
'   where:
'       recoveryplanfilename is the name of the recovery plan file created
'       by the DRM PREPARE command
'
' Example usage:
'   cscript planexpl.vbs c:\admsrv\recplans\20001115.051421
'*****

Dim args
Dim PLANFILE, OUTDIR, OUTFILE
Dim STANZAS
Dim VOLNAMES(100),NbrV,LOGDBVOLS
Dim fso, fi, fo
Dim WORDS
Dim CRLF
Dim RESULTS, RESULTS2
CRLF = Chr(13) & Chr(10)
LOGDBVOLS = False : NbrV = 0
OUTDIR = "" : OUTFILE = ""
RESULTS = "" : RESULTS2 = ""

'*****
'* Get input arguments: PLANFILE=recoveryplanfilename
'*****

set args = Wscript.Arguments

If args.Count < 1 Then
    Wscript.Echo _
        "usage: cscript planexpl.vbs recoveryplanfilename" & CRLF & _
        "example: cscript planexpl.vbs c:\admsrv\recplans\20001115.051421"
    Wscript.Quit(1)
Else
    PLANFILE = args.Item(0)
End If

RESULTS = RESULTS & "Planfile: " & PLANFILE & CRLF
'*****
' For each recovery plan file stanza name determine the extension (if any)
' to be added to the file name created by using the stanza name and extension
'*****

```

```

Set STANZAS = CreateObject("Scripting.Dictionary")
STANZAS.Add "RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE", ".CMD"
STANZAS.Add "RECOVERY.SCRIPT.NORMAL.MODE", ".CMD"
STANZAS.Add "RECOVERY.VOLUMES.REQUIRED", "none"
STANZAS.Add "RECOVERY.DEVICES.REQUIRED", "none"
STANZAS.Add "SERVER.REQUIREMENTS", "none"
STANZAS.Add "LICENSE.REGISTRATION", ".MAC"
STANZAS.Add "COPYSTGPOOL.VOLUMES.AVAILABLE", ".MAC"
STANZAS.Add "COPYSTGPOOL.VOLUMES.DESTROYED", ".MAC"
STANZAS.Add "ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE", ".MAC"
STANZAS.Add "ACTIVEDATASTGPOOL.VOLUMES.DESTROYED", ".MAC"
STANZAS.Add "PRIMARY.VOLUMES.DESTROYED", ".MAC"
STANZAS.Add "PRIMARY.VOLUMES.REPLACEMENT", ".MAC"
STANZAS.Add "STGPOOLS.RESTORE", ".MAC"
STANZAS.Add "RECOVERY.INSTRUCTIONS.GENERAL", "none"
STANZAS.Add "RECOVERY.INSTRUCTIONS.OFFSITE", "none"
STANZAS.Add "RECOVERY.INSTRUCTIONS.INSTALL", "none"
STANZAS.Add "RECOVERY.INSTRUCTIONS.DATABASE", "none"
STANZAS.Add "RECOVERY.INSTRUCTIONS.STGPOOL", "none"
STANZAS.Add "MACHINE.GENERAL.INFORMATION", "none"
STANZAS.Add "MACHINE.RECOVERY.INSTRUCTIONS", "none"
STANZAS.Add "MACHINE.CHARACTERISTICS", "none"
STANZAS.Add "MACHINE.RECOVERY.MEDIA.REQUIRED", "none"
STANZAS.Add "VOLUME.HISTORY.FILE", "none"
STANZAS.Add "DEVICE.CONFIGURATION.FILE", "none"
STANZAS.Add "DSMSERV.OPT.FILE", "none"
STANZAS.Add "LICENSE.INFORMATION", "none"

Set fso = CreateObject("Scripting.FileSystemObject")

Set fi = fso.OpenTextFile(PANFILE, 1, False)

Do While fi.AtEndOfStream <> True

'*****
' Read a line from the input recovery plan file
'*****

ALINE = fi.ReadLine

'*****
' Get the first 2 words. We're looking for 'begin!/'end' and a stanza name
'*****

WORD1 = "" : WORD2 = "" : THEREST = ""
If Not ALINE = "" then
    WORDS = Split(ALINE, " ", -1, 1)
    WORD1 = WORDS(0)
    If Ubound(WORDS) > 0 Then WORD2 = WORDS(1)
    if Ubound(WORDS) > 1 Then THEREST = WORDS(2)
End If

```

```

'*****
' If the first word is 'begin' and this is a stanza that we'll create a file
' for then build the output file name using the output directory. Add an
' extension if needed. Erase the previous version of the file and then
' indicate that the new file is being created.
'*****

If WORD1 = "begin" And STANZAS.Exists(WORD2) Then

    OUTFILE = OUTDIR & WORD2

    If Not STANZAS.Item(WORD2) = "none" Then
        OUTFILE = OUTFILE & STANZAS.Item(WORD2)
    End If

    Set fo = fso.OpenTextFile(OUTFILE, 2, True)

    RESULTS = RESULTS & "Creating file " & OUTFILE & CRLF
'*****
' If the first word is 'end' and this was a stanza that we created a file
' for then close the output file.
'*****

Elseif WORD1 = "end" And STANZAS.Exists(WORD2) Then
    fo.close
    OUTFILE = ""
End If

```

```

'*****
' This is the line within the plan file that identifies the plan file prefix.
'*****

Elseif OUTDIR = "" And WORD1 = "DRM" And WORD2 = "PLANPREFIX" Then
    OUTDIR = THEREST
    If Not Right(OUTDIR,1) = "\" Then
        OUTDIR = OUTDIR & "."
    End If
    RESULTS = RESULTS & "set planprefix to " & OUTDIR & CRLF

End If '/* select on first word of input line from the recovery plan file */

Loop '/* do while more lines in input recovery plan file */

fi.close

```

Structure of the disaster recovery plan file

The disaster recovery plan is divided into the following types of stanzas:

Tip: The plan file that DRM generates is a template that contains information, including commands for recovering the database, that might not apply to your particular recovery scenario. To modify the plan or to store more instructions that you need during recovery from an actual disaster, use the RECOVERY.INSTRUCTIONS stanzas. Enter your site-specific information in the stanzas when you first create the plan file or after you test it.

Command stanzas

Consist of scripts (for example, batch programs or batch files) and Tivoli Storage Manager macros. You can view, print, and update these stanzas, and run them during recovery.

Note: The RECOVERY.SCRIPT.NORMAL.MODE and RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE stanzas contain the commands that start the scripts and macros that are contained in the other stanzas.

Instruction stanzas

Consist of recovery instructions specific to your site. You can view, print, and update these stanzas, and use them during recovery.

Server requirements stanzas

Include the database and recovery log requirements, device and volume requirements, and license information. You can view and print these stanzas, and use them during recovery.

Configuration file stanzas

Consist of the volume history, device configuration, and server options files.

Machine and recovery media stanzas

Consist of machine recovery instructions and information about machine hardware, software, and recovery media. You can print and update these stanzas, and use them during server recovery.

Table 97 lists the recovery plan file stanzas, and indicates what type of administrative action is required during setup or periodic updates, routine processing, and disaster recovery. The table also indicates whether the stanza contains a macro, a script, or a configuration file.

Note: For tasks that must be completed during setup or periodic updates, DRM automatically collects this information for the plan.

Table 97. Administrative tasks associated with the disaster recovery plan file

Stanza Name	Tasks
PLANFILE.DESCRPTION	None
PLANFILE.TABLE.OF.CONTENTS	None
SERVER.REQUIREMENTS	None
RECOVERY.INSTRUCTIONS.GENERAL	During setup or periodic updates: Edit the source file that is associated with the stanza (optional)
RECOVERY.INSTRUCTIONS.OFFSITE	During setup or periodic updates: Edit the source file that is associated with the stanza (optional)
RECOVERY.INSTRUCTIONS.INSTALL	During setup or periodic updates: Edit the source file that is associated with the stanza (optional)
RECOVERY.INSTRUCTIONS.DATABASE	During setup or periodic updates: Edit the source file that is associated with the stanza (optional)
RECOVERY.INSTRUCTIONS.STGPOOL	During setup or periodic updates: Edit the source file that is associated with the stanza (optional)
RECOVERY.VOLUMES.REQUIRED	During routine processing: MOVE DRMEDIA
RECOVERY.DEVICES.REQUIRED	None
RECOVERY.SCRIPT. DISASTER.RECOVERY.MODE script	During disaster recovery: Edit and run (optional)
RECOVERY.SCRIPT. NORMAL.MODE script	During disaster recovery: Edit and run (optional)
DB.STORAGEPATHS	During disaster recovery: Edit (optional)

Table 97. Administrative tasks associated with the disaster recovery plan file (continued)

Stanza Name	Tasks
LICENSE.REGISTRATION macro	During disaster recovery: Edit and run (optional)
ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE	During routine processing: MOVE DRMEDIA During disaster recovery: Edit and run (optional)
ACTIVEDATASTGPOOL.VOLUMES.DESTROYED	During routine processing: MOVE DRMEDIA During disaster recovery: Edit and run (optional)
COPYSTGPOOL.VOLUMES.AVAILABLE macro	During routine processing: MOVE DRMEDIA During disaster recovery: Edit and run (optional)
COPYSTGPOOL.VOLUMES.DESTROYED macro	During routine processing: MOVE DRMEDIA During disaster recovery: Edit and run (optional)
PRIMARY.VOLUMES.DESTROYED macro	During disaster recovery: Edit and run (optional)
PRIMARY.VOLUMES.REPLACEMENT macro	During disaster recovery: Edit and run (optional)
STGPOOLS.RESTORE macro	During disaster recovery: Edit and run (optional)
VOLUME.HISTORY.FILE configuration file	During disaster recovery: Copy (optional)
DEVICE.CONFIGURATION.FILE configuration file	During disaster recovery: Edit and copy (optional)
DSMSERV.OPT.FILE configuration file	During disaster recovery: Edit and copy (optional)
LICENSE.INFORMATION	None
MACHINE.GENERAL.INFORMATION	During setup or periodic updates: Issue DEFINE MACHINE ADSMSERVER=YES (optional)
MACHINE.RECOVERY.INSTRUCTIONS	During setup or periodic updates: Issue INSERT MACHINE RECOVERYINSTRUCTIONS (optional)
MACHINE.RECOVERY.CHARACTERISTICS	During setup or periodic updates: Issue INSERT MACHINE CHARACTERISTICS (optional)
MACHINE.RECOVERY.MEDIA	During setup or periodic updates: Issue DEFINE RECOVERYMEDIA and DEFINE RECMEDMACHASSOCIATION (optional)

Example disaster recovery plan file

Use the example disaster recovery plan file to find out more about the information that is contained in each stanza. The disaster recovery plan file is divided into separate figures that correlate to the descriptions of specific stanzas within each figure.

Tip: The plan file that DRM generates is a template that contains information, including commands for recovering the database, that might not apply to your particular recovery scenario. To modify the plan or to store more instructions that you need during recovery from an actual disaster, use the RECOVERY.INSTRUCTIONS stanzas. Enter your site-specific information in the stanzas when you first create the plan file or after you test it.

Description and table of contents stanzas

These stanzas identify the server for the recovery plan and the date and time the plan is created, and also list all the stanzas in the plan.

PLANFILE.DESRIPTION

```
begin PLANFILE.DESRIPTION
Recovery Plan for Server COUPE
Created by DRM PREPARE on 09/26/2008 13:46:24
DRM PLANPREFIX D:\TSM\SERVER1\PLANPRE
Storage Management Server for Windows - Version 6, Release 1, Level 0.0
end PLANFILE.DESRIPTION
```

PLANFILE.TABLE.OF.CONTENTS

```
begin PLANFILE.TABLE.OF.CONTENTS
PLANFILE.DESRIPTION
PLANFILE.TABLE.OF.CONTENTS
Server Recovery Stanzas:
SERVER.REQUIREMENTS
RECOVERY.VOLUMES.REQUIRED
RECOVERY.DEVICES.REQUIRED
RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script
RECOVERY.SCRIPT.NORMAL.MODE script
DB.STORAGEPATHS
LICENSE.REGISTRATION macro
ACTIVESTGPOOL.VOLUMES.AVAILABLE macro
ACTIVESTGPOOL.VOLUMES.DESTROYED macro
COPYSTGPOOL.VOLUMES.AVAILABLE macro
COPYSTGPOOL.VOLUMES.DESTROYED macro
PRIMARY.VOLUMES.DESTROYED macro
PRIMARY.VOLUMES.REPLACEMENT macro
STGPools.RESTORE macro
VOLUME.HISTORY.FILE
DEVICE.CONFIGURATION.FILE
DSMSERV.OPT.FILE
LICENSE.INFORMATION
end PLANFILE.TABLE.OF.CONTENTS
```

Server requirements stanza

The SERVER.REQUIREMENTS stanza identifies the database and recovery log storage requirements for the server.

The replacement server must have enough disk space to install the database and recovery log.

This stanza also identifies the Tivoli Storage Manager installation directory. When Tivoli Storage Manager is reinstalled on the replacement server, specify this directory on the Setup Type panel during installation. If you specify a different directory, edit the plan file to account for this change.

```

begin SERVER.REQUIREMENTS

Database Requirements Summary:

    Database Name: tsm_serv
    Total Space(MB): 285,985
    Used Space(MB): 384
    Free Space(MB): 285,527
    Page Size(Bytes): 16,384
    Total Pages: 26,627
    Usable Pages: 26,491
    Used Pages: 22,003
    Free Pages: 4,488
    Full Device Class Name: VTL

Location: E:\tsmdata\DBSpace
Total Space(MB): 285,985
Used Space(MB): 457
Free Space(MB): 285,527

Recovery Log Requirements Summary:

    Assigned Capacity (MB): 8,192
    Used Space(MB): 0
    Free Space(MB): 8,159
    Active Log Directory: H:\tsmdata\Alog
    Mirror Log Directory:
    Archive Failover Log Directory: c:\tsmdata\Flog
    Archive Log Directory: H:\tsmdata\archive

Server Installation Directory: D:\tsm\

end SERVER.REQUIREMENTS

*****

begin RECOVERY.VOLUMES.REQUIRED

Volumes required for data base restore

    Location = dkvault
    Device Class = VTL
    Volume Name =
    003902L4

Volumes required for storage pool restore

    Location = dkvault
    Copy Storage Pool = COPYPOOL
    Device Class = VTL
    Volume Name =
    003900L4

Volumes required for active-data storage pool(s)

    Location = dkvault
    Active-data Storage Pool = ADP1
    Device Class = VTL
    Volume Name =
    003901L4

end RECOVERY.VOLUMES.REQUIRED

```


Recovery instructions stanzas

The administrator enters recovery instructions into source files that the **PREPARE** command includes in the plan files.

Tip: In the following descriptions, *prefix* represents the prefix portion of the file name.

RECOVERY.INSTRUCTIONS.GENERAL

Identifies site-specific instructions that the administrator enters in the file that is identified by *prefix* RECOVERY.INSTRUCTIONS.GENERAL. The instructions include the recovery strategy, key contact names, an overview of key applications that are backed up by this server, and other relevant recovery instructions.

```
begin RECOVERY.INSTRUCTIONS.GENERAL

This server contains the backup and archive data for FileRight Company
accounts receivable system. It also is used by various end users in the
finance and materials distribution organizations.
The storage administrator in charge of this server is Jane Doe 004-001-0006.
If a disaster is declared, here is the outline of steps that must be completed.
1. Determine the recovery site. Our alternate recovery site vendor is IBM
   BRS in Tampa, FL, USA 213-000-0007.
2. Get the list of required recovery volumes from this recovery plan file
   and contact our offsite vault so that they can start pulling the
   volumes for transfer to the recovery site.
3. etc...

end RECOVERY.INSTRUCTIONS.GENERAL
```

RECOVERY.INSTRUCTIONS.OFFSITE

Contains instructions that the administrator enters in the file that is identified by *prefix* RECOVERY.INSTRUCTIONS.OFFSITE. The instructions include the name and location of the offsite vault, and how to contact the vault (for example, a name and phone number).

```
begin RECOVERY.INSTRUCTIONS.OFFSITE

Our offsite vaulting vendor is OffsiteVault Inc.
Their telephone number is 514-555-2341. Our account rep is Joe Smith.
Our account number is 1239992. Their address is ...
Here is a map to their warehouse ...
Our courier is ...

end RECOVERY.INSTRUCTIONS.OFFSITE
```

RECOVERY.INSTRUCTIONS.INSTALL

Contains instructions that the administrator enters in the file that is identified by *prefix* RECOVERY.INSTRUCTIONS.INSTALL. The instructions include how to rebuild the base server and the location of the system image backup copies.

```
begin RECOVERY.INSTRUCTIONS.INSTALL

The base server system is Windows Server 2008: Standard running on
an IBM PC-350. The Windows Server 2008 operating system and product
installation media is stored at the vault. There is also a copy
in bldg 24 room 4 cabinet a. The system administrator responsible
for the Windows Server 2008 and server installation is Fred Myers.
Following are the instructions for installation of Windows Server
2008 and the server:

end RECOVERY.INSTRUCTIONS.INSTALL
```

RECOVERY.INSTRUCTIONS.DATABASE

Contains instructions that the administrator enters in the file that is identified by *prefix* RECOVERY.INSTRUCTIONS.DATABASE. The instructions include how to prepare for the database recovery. For example, you might enter instructions on how to initialize or load the backup volumes for an automated library. No sample of this stanza is provided.

RECOVERY.INSTRUCTIONS.STGPOOL

Contains instructions that the administrator enters in the file that is identified by *prefix* RECOVERY.INSTRUCTIONS.STGPOOL. The instructions include the names of your software applications and the copy storage pool names that contain the backup of these applications. No sample of this stanza is provided.

Related tasks:

“Specifying defaults for the disaster recovery plan file” on page 1067

“Specifying recovery instructions for your site” on page 1072

Volume and device requirements stanzas

These stanzas provide a list of volumes that are required to recover the server and details about the devices that are needed to read those volumes.

RECOVERY.VOLUMES.REQUIRED

Provides a list of the database backup, copy storage-pool volumes, and active-data pool volumes that are required to recover the server. This list can include both virtual volumes and non-virtual volumes. A database backup volume is included if it is part of the most recent database backup series. A copy storage pool volume or an active-data pool volume is included if it is not empty and not marked destroyed.

If you are using a non-virtual volume environment and you issue the **MOVE DRMEDIA** command, a blank location field means that the volumes are onsite and available to the server. This volume list can be used in periodic audits of the volume inventory of the courier and vault. You can use the list to collect the required volumes before you recover the server.

For virtual volumes, the location field contains the target server name.

```

begin RECOVERY.VOLUMES.REQUIRED

Volumes required for data base restore

Location = dkvault
Device Class = VTL
Volume Name =
003902L4

Volumes required for storage pool restore

Location = dkvault
Copy Storage Pool = COPYPOOL
Device Class = VTL
Volume Name =
003900L4

Volumes required for active-data storage pool(s)

Location = dkvault
Active-data Storage Pool = ADP1
Device Class = VTL
Volume Name =
003901L4

end RECOVERY.VOLUMES.REQUIRED

```

RECOVERY.DEVICES.REQUIRED

Provides details about the devices that are needed to read the backup volumes.

```

begin RECOVERY.DEVICES.REQUIRED

Purpose: Description of the devices required to read the
volumes listed in the recovery volumes required stanza.

Device Class Name: VTL
Device Access Strategy: Sequential
Storage Pool Count: 2
Device Type: LTO
Format: DRIVE
Est/Max Capacity (MB):
Mount Limit: 2
Mount Wait (min): 5
Mount Retention (min): 1
Label Prefix: AD5M
Drive Letter:
Library: VTL
Directory:
Server Name:
Retry Period:
Retry Interval:
Twosided:
Shared:
WORM: No
Drive Encryption: Allow
Scaled Capacity:
Last Update by (administrator): ADMIN
Last Update Date/Time: 09/26/2008 12:11:50

end RECOVERY.DEVICES.REQUIRED

```

Disaster recovery mode stanza

The `RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE` stanza contains a script with the commands needed to recover the server.

RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE

You can use the script as a guide and run the commands from a command line. Alternatively, you can copy, modify, and run the script and the files it refers to.

Tip: The commands in the plan file that is generated by DRM might not work on your replacement systems. If necessary, use the `recovery.instructions` stanzas in the plan file to store information about the particular commands to be used during recovery from an actual disaster. Enter your site-specific information in the `recovery.instructions` stanzas when you first create the plan file or after you test it. At the completion of these steps, client requests for file restore are satisfied directly from copy storage pool volumes and active-data pool volumes.

The disaster recovery plan issues commands by using the administrative client.

The commands in the script do the following tasks:

- Restore the server options, volume history, and device configuration information files.
- Start the macros that are contained in the following stanzas:
 - `LICENSE.REGISTRATION`
 - `COPYSTGPOOL.VOLUMES.AVAILABLE`
 - `COPYSTGPOOL.VOLUMES.DESTROYED`
 - `ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE`
 - `ACTIVEDATASTGPOOL.VOLUMES.DESTROYED`
 - `PRIMARY.VOLUMES.DESTROYED`

Note: Before you run the script, ensure that the communications options in the administrative client options file are set to communicate with the recovered server. The script starts the administrative command line. To review the communications options that are used in the recovered server, see the server options file in the `DSMSERV.OPT.FILE` stanza.

To start this script, specify the following positional parameters:

- %1 (the administrator ID)
- %2 (the administrator password)

For example, to start this script by using an administrator ID of *don* and a password of *mox*, enter the following command:

```
planprefixRECOVERY.SCRIPT.DISASTER.RECOVERY.MODE don mox
```

```

rem Tell the server these active-data pool volumes are available for use.
rem Recovery Administrator: Remove from macro any volumes not obtained from vault.
dsmadmc -id=%1 -pass=%2 -ITEMCOMMIT +
-OUTFILE="D:\TSM\SERVER1\PLANPRE.ACTIVESTGPOOL.VOLUMES.AVAILABLE.LOG" +
macro "D:\TSM\SERVER1\PLANPRE.ACTIVESTGPOOL.VOLUMES.AVAILABLE.MAC"

rem Active-data pool volumes in this macro were not marked as 'offsite' at the time
rem PREPARE ran. They were likely destroyed in the disaster.
rem Recovery Administrator: Remove from macro any volumes not destroyed.
dsmadmc -id=%1 -pass=%2 -ITEMCOMMIT +
-OUTFILE="D:\TSM\SERVER1\PLANPRE.ACTIVESTGPOOL.VOLUMES.DESTROYED.LOG" +
macro "D:\TSM\SERVER1\PLANPRE.ACTIVESTGPOOL.VOLUMES.DESTROYED.MAC"

rem Tell the server these copy storage pool volumes are available for use.
rem Recovery Administrator: Remove from macro any volumes not obtained from vault.
dsmadmc -id=%1 -pass=%2 -ITEMCOMMIT +
-OUTFILE="D:\TSM\SERVER1\PLANPRE.COPYSTGPOOL.VOLUMES.AVAILABLE.LOG" +
macro "D:\TSM\SERVER1\PLANPRE.COPYSTGPOOL.VOLUMES.AVAILABLE.MAC"

rem Copy storage pool volumes in this macro were not marked as 'offsite' at the time
rem PREPARE ran. They were likely destroyed in the disaster.
rem Recovery Administrator: Remove from macro any volumes not destroyed.
dsmadmc -id=%1 -pass=%2 -ITEMCOMMIT +
-OUTFILE="D:\TSM\SERVER1\PLANPRE.COPYSTGPOOL.VOLUMES.DESTROYED.LOG" +
macro "D:\TSM\SERVER1\PLANPRE.COPYSTGPOOL.VOLUMES.DESTROYED.MAC"

rem Mark primary storage pool volumes as ACCESS=DESTROYED.
rem Recovery administrator: Remove from macro any volumes not destroyed.
dsmadmc -id=%1 -pass=%2 -ITEMCOMMIT +
-OUTFILE="D:\TSM\SERVER1\PLANPRE.PRIMARY.VOLUMES.DESTROYED.LOG" +
macro "D:\TSM\SERVER1\PLANPRE.PRIMARY.VOLUMES.DESTROYED.MAC"

rem Restore the previous working directory.
popd

rem Restore the previous working directory.
popd

:end
end RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script

```

Related tasks:

- “Restoring to a point-in-time in a shared library environment” on page 941
- “Scenario: Protecting the database and storage pools” on page 923
- “Scenario: Recovering a lost or damaged storage pool volume” on page 936
- “Example: Restoring a library manager database” on page 929
- “Example: Restoring a library client database” on page 930

Related reference:

- “Recovery instructions stanzas” on page 1052

Normal mode stanza

The RECOVERY.SCRIPT.NORMAL.MODE stanza contains a script with the commands needed to restore the server primary storage pools.

RECOVERY.SCRIPT.NORMAL.MODE

You can use the script as a guide and run the commands from a command line. Or you can copy, modify, and run the script and the files it refers to. You might need to modify the script because of differences between the original and the replacement systems.

The disaster recovery plan issues commands by using the administrative client.

At the completion of these steps, client requests for file restore are satisfied from primary storage pool volumes. Clients can also resume file backup, archive, and migration functions.

This script starts the macros that are contained in the following stanzas:

```
PRIMARY.VOLUMES.REPLACEMENT
STGPOOLS.RESTORE
```

Note: Because this script starts the administrative client, ensure that the communications options in the client options file are set to communicate with the recovered server before you run this script. To review the communications options that are used in the recovered server, see the server options file in the DSMSERV.OPT.FILE stanza.

To start this script, specify the following positional parameters:

- %1 (the administrator ID)
- %2 (the administrator password)

For example, to start this script by using an administrator ID of *don* and a password of *mox*, enter the following command:

```
planprefixRECOVERY.SCRIPT.NORMAL.MODE don mox
```

For more information, see the entry for the recovery plan prefix in Table 98 on page 1067.

The following stanza contains text strings that are too long to display in the hardcopy or softcopy publications. The long text strings use a plus symbol (+) to indicate string continuation on the next line.

```

begin RECOVERY.SCRIPT.NORMAL.MODE script

@echo off

rem Purpose: This script contains the steps required to recover the server
rem           primary storage pools. This mode allows you to return the
rem           copy storage pool volumes to the vault and to run the
rem           server as normal.
rem Note: This script assumes that all volumes necessary for the restore
rem       have been retrieved from the vault and are available. This script
rem       assumes the recovery environment is compatible (essentially the
rem       same) as the original. Any deviations require modification to this
rem       this script and the macros and scripts it runs. Alternatively, you
rem       can use this script as a guide, and manually execute each step.

if not %1.==. if not %2.==. goto start
echo Specify the following positional parameters:
echo administrative client ID and password.
echo Script stopped.
goto end
:start

rem Set the administrative command line client directory.
pushd "D:\tsm\Server\tsmdiag"
set DSM_DIR=D:\tsm\Server\tsmdiag

rem Define replacement volumes in the primary storage pools. Must
rem have different name than original.
rem Recovery administrator: Edit macro for your replacement volumes.
dsmadmc -id=%1 -pass=%2 -ITEMCOMMIT +
-OUTFILE="D:\TSM\SERVER1\PLANPRE.PRIMARY.VOLUMES.REPLACEMENT.LOG" +
macro "D:\TSM\SERVER1\PLANPRE.PRIMARY.VOLUMES.REPLACEMENT.MAC"

rem Restore the primary storage pools from the copy storage pools.
dsmadmc -id=%1 -pass=%2 -ITEMCOMMIT +
-OUTFILE="D:\TSM\SERVER1\PLANPRE.STGPOOLS.RESTORE.LOG" +
macro "D:\TSM\SERVER1\PLANPRE.STGPOOLS.RESTORE.MAC"

rem Restore the previous working directory.
popd

:end
end RECOVERY.SCRIPT.NORMAL.MODE script

```

Related tasks:

- “Restoring to a point-in-time in a shared library environment” on page 941
- “Scenario: Protecting the database and storage pools” on page 923
- “Scenario: Recovering a lost or damaged storage pool volume” on page 936
- “Example: Restoring a library manager database” on page 929
- “Example: Restoring a library client database” on page 930

Database directories stanza

The DB.STORAGEPATHS stanza identifies the directories for the Tivoli Storage Manager database.

This stanza is referred to by the **DSMSERV RESTORE DB** command in the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script. The locations are populated by the **QUERY DBSPACE** command. If you need to restore the database to an alternative location, update this file with the new directories. You must also update the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script to start the **DSMSERV RESTORE DB** command instead of the default command.

```
begin DB.STORAGEPATHS
E:\tsmdata\DBSpace
end DB.STORAGEPATHS
```

License registration stanza

The LICENSE.REGISTRATION stanza contains a macro to register your server licenses.

LICENSE.REGISTRATION

This macro is started by the
RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

```
begin LICENSE.REGISTRATION macro

/* Purpose: Register the server licenses by specifying the names */
/* of the enrollment certificate files necessary to re-create the */
/* licenses that existed in the server. */
/* Recovery Administrator: Review licenses and add or delete licenses */
/* as necessary. */

register license file(dataret.lic)
register license file(tsmbasic.lic)
register license file(tsmee.lic)

end LICENSE.REGISTRATION macro
```

Copy storage pool volumes stanzas

The copy storage pool volumes stanzas contain macros to mark copy storage pool volumes as available or unavailable.

COPYSTGPOOL.VOLUMES.AVAILABLE

Contains a macro to mark copy storage pool volumes that were moved offsite and then moved back onsite. This stanza does not include copy storage pool virtual volumes. You can use the information as a guide and issue the administrative commands, or you can copy, modify, and run it to a file. This macro is started by the
RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

After a disaster, compare the copy storage pool volumes that are listed in this stanza with the volumes that were moved back onsite. Remove entries from this stanza for any missing volumes.

```
begin COPYSTGPOOL.VOLUMES.AVAILABLE macro

/* Purpose: Mark copy storage pool volumes as available for use in recovery. */
/* Recovery Administrator: Remove any volumes that have not been obtained */
/* from the vault or are not available for any reason. */
/* Note: It is possible to use the mass update capability of the server */
/* UPDATE command instead of issuing an update for each volume. However, */
/* the 'update by volume' technique used here allows you to select */
/* a subset of volumes to be processed. */

upd vol "003900L4" acc=READ0 wherestg=COPYPOOL

end COPYSTGPOOL.VOLUMES.AVAILABLE macro
```

COPYSTGPOOL.VOLUMES.DESTROYED

Contains a macro to mark copy storage pool volumes as unavailable if the volumes were onsite at the time of the disaster. This stanza does not include copy storage pool virtual volumes. These volumes are considered offsite and have not been destroyed in a disaster. You can use the information as a guide and issue the administrative commands from a

command line, or you can copy, modify, and run it to a file. This macro is invoked by the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

After a disaster, compare the copy storage pool volumes that are listed in this stanza with the volumes that remain onsite. If you have any of the volumes and they are usable, remove their entries from this stanza.

```
begin COPYSTGPOOL.VOLUMES.DESTROYED macro

/* Purpose: Mark destroyed copy storage pool volumes as unavailable.      */
/* Volumes in this macro were not marked as 'offsite' at the time the    */
/* PREPARE ran. They were likely destroyed in the disaster.              */
/* Recovery Administrator: Remove any volumes that were not destroyed.    */
/*                                                                    */

end COPYSTGPOOL.VOLUMES.DESTROYED macro
```

Active-data storage pool volumes stanzas

The active-data storage pool volumes stanzas contain macros to mark active-data storage pool volumes as available or unavailable.

ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE

Contains a macro to mark active-data pool volumes that were moved offsite and then moved back onsite. This stanza does not include active-data pool virtual volumes. You can use the information as a guide and issue the administrative commands. Alternatively, you can copy, modify, and run the information in a file. This macro is started by the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

After a disaster, compare the active-data pool volumes that are listed in this stanza with the volumes that were moved back onsite. Remove entries from this stanza for any missing volumes.

```
begin ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE macro

/* Purpose: Mark active-data storage pool volumes as available for use in recovery. */
/* Recovery Administrator: Remove any volumes that have not been obtained */
/* from the vault or are not available for any reason.                      */
/* Note: It is possible to use the mass update capability of the server      */
/* UPDATE command instead of issuing an update for each volume. However,    */
/* the 'update by volume' technique used here allows you to select          */
/* a subset of volumes to be processed.                                     */
/*                                                                    */

upd vol "003901L4" acc=READ0 wherestg=ADP1

end ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE macro
```

ACTIVEDATASTGPOOL.VOLUMES.DESTROYED

Contains a macro to mark active-data pool volumes as unavailable if the volumes were onsite at the time of the disaster. This stanza does not include active-data pool virtual volumes. These volumes are considered offsite and are not destroyed in a disaster. You can use the information as a guide and issue the administrative commands from a command line. Alternatively, you can copy, modify, and run the information in a file. This macro is started by the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

After a disaster, compare the active-data pool volumes that are listed in this stanza with the volumes that remain onsite. If you have any of the volumes and they are usable, remove their entries from this stanza.

```
begin ACTIVEDATASTGPPOOL.VOLUMES.DESTROYED macro

/* Purpose: Mark destroyed active-data storage pool volumes as unavailable. */
/* Volumes in this macro were not marked as 'offsite' at the time the */
/* PREPARE ran. They were likely destroyed in the disaster. */
/* Recovery Administrator: Remove any volumes that were not destroyed. */

end ACTIVEDATASTGPPOOL.VOLUMES.DESTROYED macro
```

Primary storage pool volumes stanzas

These stanzas contain a macro to mark primary storage pool volumes as destroyed.

PRIMARY.VOLUMES.DESTROYED

Contains a macro to mark primary storage pool volumes as destroyed if the volumes were onsite at the time of disaster. You can use the information as a guide and run the administrative commands from a command line, or you can copy, modify, and run it to a file. This macro is started by the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

During recovery, compare the primary storage pool volumes that are listed in this stanza with the volumes that were onsite. If you have any of the volumes and they are usable, remove their entries from the stanza.

This stanza does not include primary storage pool virtual volumes. These volumes are considered offsite and not destroyed in a disaster.

```
begin PRIMARY.VOLUMES.DESTROYED macro

/* Purpose: Mark primary storage pool volumes as ACCESS=DESTROYED. */
/* Recovery administrator: Delete any volumes listed here */
/* that you do not want to recover. */
/* Note: It is possible to use the mass update capability of the server */
/* UPDATE command instead of issuing an update for each volume. However */
/* the 'update by volume' technique used here allows you to select */
/* a subset of volumes to be marked as destroyed. */

vary offline "D:\DISK.DSM" wait=yes
upd vol "D:\DISK.DSM" acc=DESTROYED wherestg=PRIMP00L1

end PRIMARY.VOLUMES.DESTROYED macro
```

Contains a macro to define primary storage pool volumes to the server. You can use the macro as a guide and run the administrative commands from a command line, or you can copy, modify, and run it to a file. This macro is started by the RECOVERY.SCRIPT.NORMAL.MODE script.

Primary storage pool volumes with entries in the PRIMARY.VOLUMES.REPLACEMENT stanza have at least one of the following three characteristics:

- Original volume in a storage pool whose device class was DISK.
- Original volume in a storage pool with MAXSCRATCH=0.
- Original volume in a storage pool and volume scratch attribute=no.

The **SET DRMPLANVPOSTFIX** command adds a character to the end of the names of the original volumes that are listed in this stanza. This character does the following:

- Improves the retrieval of volume names that must be renamed in the stanzas. Before you use the volume names, change these names to new names that are valid for the device class on the replacement system.

- Generates a new name that can be used by the replacement server. Your naming convention must take into account the appended character.

Note:

1. Replacement primary volume names must be different from any other original volume name or replacement name.
2. The **RESTORE STGPOOL** command restores storage pools on a logical basis. There is no one-to-one relationship between an original volume and its replacement.
3. There might be entries for the same volume in PRIMARY.VOLUMES.REPLACEMENT if the volume has a device class of DISK.

This stanza does not include primary storage pool virtual volumes. These volumes are considered offsite and not destroyed in a disaster.

Primary storage volumes replacement stanza

```
begin PRIMARY.VOLUMES.REPLACEMENT macro

/* Purpose: Define replacement primary storage pool volumes for either: */
/* 1. Original volume in a storage pool whose device class was DISK. */
/* 2. Original volume in a storage pool with MAXSCRATCH=0. */
/* 3. Original volume in a storage pool and volume scratch=no. */
/* Recovery administrator: Edit this section for your replacement */
/* volume names. New name must be unique, i.e. different from any */
/* original or other new name. */

/* Replace D:\DISK.DSM DISK 8,096.0M in PRIMPOOL1 */
def vol PRIMPOOL1 "D:\DISK.DSMX" acc=READW f=8,096 wait=yes

end PRIMARY.VOLUMES.REPLACEMENT macro
```

Storage pools restore stanza

This stanza contains a macro to restore the primary storage pools.

STGPOOLS.RESTORE

You can use the stanza as a guide and run the administrative commands from a command line. You can also copy, modify, and run it to a file. This macro is started by the RECOVERY.SCRIPT.NORMAL.MODE script.

This stanza does not include primary storage pool virtual volumes. These volumes are considered offsite and not destroyed in a disaster.

```
egin STGPOOLS.RESTORE macro

/* Purpose: Restore the primary storage pools from copy storage pool(s). */
/* Recovery Administrator: Delete entries for any primary storage pools */
/* that you do not want to restore. */

restore stgp PRIMPOOL1

end STGPOOLS.RESTORE macro
```

Configuration stanzas

These stanzas contain copies of the following information: volume history, device configuration, and server options.

VOLUME.HISTORY.FILE

Contains a copy of the volume history information when the recovery plan was created. The **DSMSERV RESTORE DB** command uses the volume history file to determine what volumes are needed to restore the database. It is used by the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

The following rules determine where to place the volume history file at restore time:

- If the server option file contains VOLUMEHISTORY options, the server uses the fully qualified file name that is associated with the first entry. If the file name does not begin with a directory specification, the server uses the prefix *volhprefix*.
- If the server option file does not contain VOLUMEHISTORY options, the server uses the default name *volhprefix* followed by *drmvollh.txt*. The *volhprefix* is set to the directory that represents this instance of the server, which is typically the directory that the server was originally installed from.
- If a fully qualified file name was not specified in the server options file for the VOLUMEHISTORY option, the server adds it to the DSMSERV.OPT.FILE stanza.

```
*****
*
*               Sequential Volume Usage History
*               Updated 12/13/2008 10:47:38
*
*****
Operation Date/Time: 2008/11/13 14:44:16

Volume Type: BACKUPFULL
* Location for volume C:\TEST318\DUMP\26612659.DBV is: 'NOTMOUNTABLE'
Database Backup LLA: FULL_BACKUP.20081113144416.1
Database Backup HLA: \NODE0000\
Volume Name: "C:\TEST318\DUMP\26612659.DBV"
Backup Series: 1
Backup Op: 0
Volume Seq: 1
Device Class Name: FILES
Database Backup ID: 0,1025
Database Backup Home Position: 0
Database Backup Total Data Bytes: 0,327385099
Database Backup Total Log Bytes: 0,2125835
Database Backup Log Block Number: 4294967295,4294967295
*****
Operation Date/Time: 2008/11/13 14:44:16

Volume Type: BACKUPFULL
* Location for volume C:\TEST318\DUMP\26612725.DBV is: 'NOTMOUNTABLE'
Database Backup LLA: FULL_BACKUP.20081113144416.2
Database Backup HLA: \NODE0000\
Volume Name: "C:\TEST318\DUMP\26612725.DBV"
Backup Series: 1
Backup Op: 0
Volume Seq: 2
Device Class Name: FILES
Database Backup ID: 0,1026
Database Backup Home Position: 0
Database Backup Total Data Bytes : 0,327385099
Database Backup Total Log Bytes: 0,2125835
Database Backup Log Block Number: 4294967295,4294967295
*****
```

DEVICE.CONFIGURATION.FILE

Contains a copy of the server device configuration information when the recovery plan was created. The **DSMSERV RESTORE DB** command uses the device configuration file to read the database backup volumes. It is used by the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

At recovery time, you might need to modify this stanza. You must update the device configuration information if the hardware configuration at the recovery site is changed. The following examples are changes that require updates to the configuration information:

- Different device names
- Use of a manual library instead of an automated library
- For automated libraries, the requirement to manually place the database backup volumes in the automated library and update the configuration information to identify the element within the library. The server can locate the required database backup volumes in the automated library.

For details, see “Updating the device configuration file” on page 931.

The following rules determine where the device configuration file is placed at restore time:

- If the server options file contains DEVCONFIG entries, the server uses the fully qualified file name that is associated with the first entry. If the specified file name does not begin with a directory specification, the server adds the prefix *devcprefix*.
- If the server options file does not contain DEVCONFIG entries, the server uses the default name *devcprefix* followed by *drmdevc.txt*.

For example, if *devcprefix* is c:\Program Files\Tivoli\TSM\server2\ the file name that is used by **PREPARE** is c:\Program Files\Tivoli\TSM\server2\drmdevc.txt.

Remember: The *devcprefix* is set to the directory that represents this instance of the server, which is typically the directory from which the server was originally installed.

If a fully qualified file name was not specified for the DEVCONFIG option in the server options file, the server adds it to the stanza DSMSERV.OPT.FILE.

```
begin DEVICE.CONFIGURATION.FILE
```

```
/* Tivoli Storage Manager Device Configuration */
DEFINE DEVCLASS COOL8MM DEVTYPE=8MM FORMAT=DRIVE MOUNTLIMIT=1 MOUNTWAIT=60
MOUNTRETENTION=60 PREFIX=TIVSM LIBRARY=ITSML
DEFINE DEVCLASS FILES DEVTYPE=FILE MAXCAPACITY=4096K MOUNTLIMIT=2 DIRECTORY=c:\Program Files\Tivoli\TSM\server2\stg
DEFINE DEVCLASS FILESSM DEVTYPE=FILE MAXCAPACITY=100K MOUNTLIMIT=2 DIRECTORY=c:\Program Files\Tivoli\TSM\server2\stg
DEFINE DEVCLASS LIB8MM DEVTYPE=8MM FORMAT=DRIVE MOUNTLIMIT=1 MOUNTWAIT=60 MOUNTRETENTION=60 PREFIX=TIVSM
LIBRARY=RLLIB
DEFINE LIBRARY ITSML LIBTYPE=MANUAL
DEFINE LIBRARY RLLIB LIBTYPE=MANUAL
SERVERBACKUPNODEID 1
```

```
end DEVICE.CONFIGURATION.FILE
```

DSMSERV.OPT.FILE

Contains a copy of the server options file. This stanza is used by the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE script.

Tip: The following figure contains text strings that are too long to display in hardcopy or softcopy publications. The long text strings have a plus symbol (+) at the end of the string to indicate that they continue on the next line.

The disaster recovery plan file adds the `DISABLESCHEDS` option to the server options file and sets it to `YES`. This option disables administrative and client schedules while the server is being recovered. After the server is recovered, you can enable scheduling by deleting the option or setting it to `NO` and then restarting the server.

```
begin DSMSERV.OPT.FILE

* Server options file located in c:\Program Files\Tivoli\TSM\server2\dmserv.opt
TCPPort 1509
VOLUMEHISTORY c:\Program Files\Tivoli\TSM\server2\volhist.txt
DEVCONFIG     c:\Program Files\Tivoli\TSM\server2\devconf.txt
* The following option was added by PREPARE.
DISABLESCHEDS YES

end DSMSERV.OPT.FILE
```

License information stanza

The license information stanza contains a copy of the latest license audit results and the server license terms.

LICENSE.INFORMATION

```
begin LICENSE.INFORMATION

                                Last License Audit: 09/26/2008 12:02:35
Is IBM System Storage Archive Manager in use ?: No
Is IBM System Storage Archive Manager licensed ?: Yes
Is Tivoli Storage Manager Basic Edition in use: Yes
Is Tivoli Storage Manager Basic Edition licensed: Yes
Is Tivoli Storage Manager Extended Edition in use: No
Is Tivoli Storage Manager Extended Edition licensed: Yes
                                Server License Compliance: Valid

end LICENSE.INFORMATION
```

Machine files stanza

These stanzas contain information that is needed to rebuild the server machine.

MACHINE.GENERAL.INFORMATION

Provides information for the server machine (for example, machine location). This stanza is included in the plan file if the machine information is saved in the database by using the **DEFINE MACHINE** with **ADSMSEVER=YES**.

```
begin MACHINE.GENERAL.INFORMATION
Purpose: General information for machine DSMSRV1.
        This is the machine that contains DSM server DSM.
        Machine Name: DSMSRV1
        Machine Priority: 1
            Building: 21
            Floor: 2
            Room: 2749
        Description: DSM Server for Branch 51
        Recovery Media Name: DSMSRVIMAGE

end MACHINE.GENERAL.INFORMATION
```

MACHINE.RECOVERY.INSTRUCTIONS

Provides the recovery instructions for the server machine. This stanza is included in the plan file if the machine recovery instructions are saved in the database.

```
begin MACHINE.RECOVERY.INSTRUCTIONS
Purpose: Recovery instructions for machine DSMSRV1.

Primary Contact:
  Jane Smith (wk 520-000-0000 hm 520-001-0001)
Secondary Contact:
  John Adams (wk 520-000-0001 hm 520-002-0002)

end MACHINE.RECOVERY.INSTRUCTIONS
```

MACHINE.RECOVERY.CHARACTERISTICS

Provides the hardware and software characteristics for the server machine. This stanza is included in the plan file if the machine characteristics are saved in the database.

```
begin MACHINE.CHARACTERISTICS
Purpose: Hardware and software characteristics of machine DSMSRV1.
Processor           : x86 Family 5 Model 2 Stepping 11
Bus Type            : AT 16-Bit bus
Keyboard Type       : 101/102 Key Enhanced Keyboard
Pointer Type        : PS/2 Mouse Buttons: 2
Equipment           : 1 Parallel Port(s)
                    : 1 Serial Port(s)
                    : 1 CD Drive(s)
                    : 2 Fixed Disk(s)
                    : Pointing Device
                    : Math CoProcessor
Fixed Disk 1        : 609 MB
Total Physical Memory : 32,832 KB (33,619,968)

end MACHINE.CHARACTERISTICS
```

MACHINE.RECOVERY.MEDIA

Provides information about the media (for example, boot media) needed for rebuilding the machine that contains the server. This stanza is included in the plan file if recovery media information is saved in the database and it is associated with the machine that contains the server.

```
begin MACHINE.RECOVERY.MEDIA.REQUIRED
Purpose: Recovery media for machine DSMSRV1.
Recovery Media Name: DSMSRV
Type: Other
Volume Names:
  Location: IRONMNT
  Description: Server Installation CD
  Product:
Product Information:

end MACHINE.RECOVERY.MEDIA.REQUIRED
```

Querying defaults for the disaster recovery plan file

DRM provides default settings for the preparation of the recovery plan file and for the management of offsite recovery media.

Procedure

To query the settings, issue the following command:

```
query drmstatus
```

Results

The output is similar to the following output:

```
Recovery Plan Prefix: c:\Program Files\Tivoli\TSM\server2\recplans\  
Plan Instructions Prefix: c:\Program Files\Tivoli\TSM\server2\recinstr\  
Replacement Volume Postfix: @  
Primary Storage Pools: PRIM1 PRIM2  
Copy Storage Pools: COPY*  
Active-data Storage Pools: ACTIVEPOOL  
Not Mountable Location Name: Local  
Courier Name: Joe's Courier Service  
Vault Site Name: Ironvault, D. Lastname, 1-000-000-0000  
DB Backup Series Expiration Days: 30 Day(s)  
Recovery Plan File Expiration Days: 60 Day(s)  
Check Label?: Yes  
Process FILE Device Type?: No  
Command File Name: c:\drm\orm\exec.cmd
```

Specifying defaults for the disaster recovery plan file

You can override the default settings in the recovery plan file.

About this task

The following table describes how to set defaults for the disaster recovery plan file.

Table 98. Defaults for the disaster recovery plan file

Process	Default
Primary storage pools to be processed	<p>When the recovery plan file is generated, you can limit processing to specified pools. The recovery plan file does not include recovery information and commands for storage pools with a data format of NETAPPDUMP.</p> <p>The default at installation: All primary storage pools.</p> <p>To change the default: SET DRMPRIMSTGPPOOL command</p> <p>For example, to specify that only the primary storage pools that are named PRIM1 and PRIM2 are to be processed, enter: set drmprimstgpool prim1,prim2</p> <p>Tip: To remove all previously specified primary storage pool names and select all primary storage pools for processing, specify a null string ("") in SET DRMPRIMSTGPPOOL.</p> <p>To override the default: Specify primary storage pool names in the PREPARE command.</p>

Table 98. Defaults for the disaster recovery plan file (continued)

Process	Default
Copy storage pools to be processed	<p>When the recovery plan file is generated, you can limit processing to specified pools.</p> <p>The default at installation: All copy storage pools.</p> <p>To change the default: SET DRMCOPYSTGPOOL command</p> <p>For example, to specify that only the copy storage pools that are named COPY1 and COPY2 are to be processed, enter: set drmcopystgpool copy1,copy2</p> <p>To remove any specified copy storage pool names, and thus select all copy storage pools, specify a null string ("") in SET DRMCOPYSTGPOOL. If you specify both primary storage pools and copy storage pools, the specified copy storage pools must be used to back up the specified primary storage pools.</p> <p>To override the default: Specify copy storage pool names in the PREPARE command.</p>
Active-data pools to be processed	<p>When the recovery plan file is generated, you can limit processing to specified pools.</p> <p>The default at installation: None</p> <p>To specify the default: SET DRMACTIVEDATASTGPOOL command</p> <p>For example, to specify that only the active-data pools that are named ACTIVEPOOL1 and ACTIVEPOOL2 are to be processed, enter: set drmactivedatastgpool activepool1,activepool2</p> <p>To remove any specified active-data pool names, specify a null string ("") in SET DRMACTIVEDATASTGPOOL.</p> <p>Active-data pool volumes in MOUNTABLE state are processed only if you specify the active-data pools by using the SET DRMACTIVEDATASTGPOOL command or the ACTIVEDATASTGPOOL parameter on the MOVE DRMEDIA, QUERY DRMEDIA, and PREPARE commands. Processing of active-data pool volumes in MOUNTABLE state is different from the processing of copy storage pool volumes in MOUNTABLE state. All MOUNTABLE copy storage pool volumes are processed regardless whether you specify copy storage pools with either the SET DRMCOPYSTGPOOL command or the COPYSTGPOOL parameter.</p> <p>If you do not issue the SET DRMACTIVEDATASTGPOOL command or if you use this command to remove the names of all active-data storage pools, the Tivoli Storage Manager server processes active-data pool volumes that are specified by using the ACTIVEDATASTGPOOL parameter:</p> <ul style="list-style-type: none"> • MOVE DRMEDIA and QUERY DRMEDIA: The server processes all active-data pool volumes except volumes that have a MOUNTABLE state. • PREPARE: The server processes only the active-data pool volumes that are marked onsite at the time the PREPARE command is run. These volumes are marked UNAVAILABLE. <p>To override the default: Specify active-data pool names using the MOVE DRMEDIA, QUERY DRMEDIA, or PREPARE command.</p>

Table 98. Defaults for the disaster recovery plan file (continued)

Process	Default
Identifier for replacement volume names	<p>To restore a primary storage pool volume, mark the original volume as destroyed and create a replacement volume with a unique name. You can specify a character to be appended to the name of the original volume to create a name for the replacement volume. This character can help you find the replacement volume names in the disaster recovery plan.</p> <p>The default at installation: @</p> <p>To specify the default: SET DRMPPLANVPOSTFIX command.</p> <p>For example, to use the character r, enter: set drmplnvpstfix r</p>
Recovery instructions prefix	<p>You can specify a prefix for the names of the recovery instructions source files in the recovery plan file.</p> <p>The default at installation: For a description of how DRM determines the default prefix, see the INSTRPREFIX parameter of the PREPARE command section in the <i>Administrator's Reference</i> or enter HELP PREPARE from administrative client command line.</p> <p>To set a default: SET DRMINSTRPREFIX command.</p> <p>For example, to specify the prefix, enter: set drminstrprefix c:\Program Files\Tivoli\TSM\server2\recinstr\rpp</p> <p>The disaster recovery plan file includes, for example, the following file: c:\Program Files\Tivoli\TSM\server2\recinstr\rpp.RECOVERY.INSTRUCTIONS.GENERAL</p> <p>To override the default: The INSTRPREFIX parameter with the PREPARE command.</p>
Prefix for the recovery plan file	<p>You can specify a prefix to the path name of the recovery plan file. DRM uses this prefix to identify the location of the recovery plan file and to generate the macros and script file names that are included in the RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE and RECOVERY.SCRIPT.NORMAL.MODE stanzas.</p> <p>The default at installation: For a description of how DRM determines the default prefix, see the PLANPREFIX parameter of the PREPARE command section in the <i>Administrator's Reference</i> or enter HELP PREPARE from administrative client command line.</p> <p>To change the default: SET DRMPPLANPREFIX command.</p> <p>For example, to specify the prefix, enter the following command: set drmplnnprefix c:\Program Files\Tivoli\TSM\server2\recplans\</p> <p>The disaster recovery plan file name that is created by PREPARE processing is in the following format: c:\Program Files\Tivoli\TSM\server2\recplans\20000603.013030</p> <p>To override the default: The PLANPREFIX parameter with the PREPARE command.</p>

Table 98. Defaults for the disaster recovery plan file (continued)

Process	Default
The disaster recovery plan expiration period	<p>You can set the numbers of days after creation that a disaster recovery plan file stored on a target server expires. After the number of days elapses, all recovery plan files that meet both of the following conditions are eligible for expiration:</p> <ul style="list-style-type: none"> • The last recovery plan that is associated with the database series is older than the set number of days. • The recovery plan file is not associated with the most recent backup series. <p>The default at installation: 60 days.</p> <p>To change the default: SET DRMRPFEXPIREDAYS command.</p> <p>For example, to change the time to 90 days, enter: set drmrpfexpiredays 90</p>

Specifying defaults for offsite recovery media management

You can set defaults for offsite recovery media management.

About this task

Table 99. Defaults for offsite recovery media management

Process	Default
Copy storage pool volumes to be processed	<p>MOVE DRMEDIA and QUERY DRMEDIA can process copy storage pool volumes in the MOUNTABLE state. You can limit processing to specified copy storage pools.</p> <p>The default at installation: All copy storage pool volumes in the MOUNTABLE state.</p> <p>To change the default: SET DRMCOPYSTGPOOL command.</p> <p>To override the default: COPYSTGPOOL parameter on MOVE DRMEDIA and QUERY DRMEDIA commands.</p>
Active-data pool volumes to be processed	<p>MOVE DRMEDIA and QUERY DRMEDIA can process active-data pool volumes except volumes in the MOUNTABLE state. You can limit processing to specified active-data pools.</p> <p>The default at installation: None.</p> <p>To change the default: SET DRMACTIVEDATASTGPOOL command.</p> <p>To override the default: ACTIVEDATASTGPOOL parameter on MOVE DRMEDIA, QUERY DRMEDIA, or PREPARE commands.</p>

Table 99. Defaults for offsite recovery media management (continued)

Process	Default
Executable commands file name	<p>You can use MOVE DRMEDIA or QUERY DRMEDIA to generate executable commands and store them in a file.</p> <p>The default at installation: None.</p> <p>To set a default: SET DRMCMDFILENAME. For example, enter: set drmcmdfilename c:\drm\orm\exec.cmd</p> <p>To override the default: CMDFILENAME parameter on MOVE DRMEDIA or QUERY DRMEDIA commands.</p>
Location name for volumes that move to the NOTMOUNTABLE state	<p>MOVE DRMEDIA generates a location name for volumes that move to the NOTMOUNTABLE state.</p> <p>The default at installation: NOTMOUNTABLE</p> <p>To change the default: SET DRMNOTMOUNTABLENAME command.</p> <p>For example, to specify a location that is named LOCAL, enter: set drmnotmountablename local</p>
Location name for volumes that move to the COURIER or COURIERRETRIEVE state	<p>MOVE DRMEDIA generates a location name for volumes that are changing from NOTMOUNTABLE to COURIER or from VAULTRETRIEVE to COURIERRETRIEVE.</p> <p>The default at installation: COURIER</p> <p>To change the default: SET DRMCOURIERNAME command.</p> <p>For example, to specify a courier that is named Joe's Courier Service, enter: set drmcouriername "Joe's Courier Service"</p>
Reading labels of checked out volumes	<p>To determine whether DRM reads the sequential media labels of volumes that are checked out with MOVE DRMEDIA.</p> <p>The default at installation: DRM reads the volume labels.</p> <p>To change the default: SET DRMCHECKLABEL command.</p> <p>For example, to specify that DRM should not read the volume labels, enter: set drmchecklabel no</p>

Table 99. Defaults for offsite recovery media management (continued)

Process	Default
Expiration period of a database backup series	<p>A database backup series (full plus incremental and snapshot) is eligible for expiration if all of these conditions are true:</p> <ul style="list-style-type: none"> • The volume state is VAULT or the volume is associated with a device type of SERVER (for virtual volumes). • It is not the most recent database backup series. • The last volume of the series exceeds the expiration value, number of days since the last backup in the series. <p>The default at installation: 60 days.</p> <p>To change the default: SET DRMDBBACKUPEXPIREDAYS command.</p> <p>For example, to set the expiration value to 30 days, enter: set drmdbbackupexpiredays 30</p>
Whether to process copy storage pool and active-data pool volumes of the FILE device type	<p>At installation, MOVE DRMEDIA and QUERY DRMEDIA does not process copy storage pool or active-data pool volumes that are associated with a device type of FILE.</p> <p>The default at installation: Copy storage pool and active-data pool volumes of the FILE device type are not processed.</p> <p>To change the default: SET DRMFILEPROCESS command.</p> <p>To allow processing, enter: set drmfprocess yes</p>
Vault Name	<p>MOVE DRMEDIA uses the vault name to set the location of volumes that are moving from the COURIER state to the VAULT state</p> <p>The default at installation: The vault name is set to VAULT.</p> <p>To change the default: SET DRMVAULTNAME command.</p> <p>For example, to specify the vault name as IRONVAULT, the contact name as J. SMITH, and the telephone number as 1-555-000-0000, enter: set drmvaultname "Ironvault, J. Smith, 1-555-000-0000"</p>

Specifying recovery instructions for your site

The plan file that DRM generates is a template that contains information, including commands for recovering the database, that might not apply to your particular recovery scenario. To modify the plan or to store more instructions that you need during recovery from an actual disaster, use the RECOVERY.INSTRUCTIONS stanzas.

About this task

Tip: Enter your site-specific information in the stanzas when you first create the plan file or after you test it.

Enter your instructions in flat files that have the following names:

- *prefix*.RECOVERY.INSTRUCTIONS.GENERAL

- *prefix*.RECOVERY.INSTRUCTIONS.OFFSITE
- *prefix*.RECOVERY.INSTRUCTIONS.INSTALL
- *prefix*.RECOVERY.INSTRUCTIONS.DATABASE
- *prefix*.RECOVERY.INSTRUCTIONS.STGPOOL

Note: The files that are created for the recovery instructions must be physical sequential files.

RECOVERY.INSTRUCTIONS.GENERAL

Include information such as administrator names, telephone numbers, and location of passwords. For example:

Recovery Instructions for Tivoli Storage Manager Server ACMESRV on system ZEUS
 Joe Smith (wk 002-000-1111 hm 002-003-0000): primary system programmer
 Sally Doe (wk 002-000-1112 hm 002-005-0000): primary recovery administrator
 Jane Smith (wk 002-000-1113 hm 002-004-0000): responsible manager

Security Considerations:

Joe Smith has the password for the Admin ID ACMEADM. If Joe is unavailable, you need to either issue SET AUTHENTICATION OFF or define a new administrative user ID at the replacement Tivoli Storage Manager server console.

RECOVERY.INSTRUCTIONS.OFFSITE

Include information such as the offsite vault location, courier name, and telephone numbers. For example:

Our offsite vault location is Ironvault, Safetown, AZ.
 The phone number is 1-800-000-0008. You need to contact them directly to authorize release of the tapes to the courier.
 The name of the courier is Fred Harvey. You can contact him at 1-800-444-0000.
 Since our vault is so far away, be sure to give the courier a list of both the database backup, copy storage pool volumes, and active-data storage pool volumes required. Fred is committed to returning these volumes to us in less than 12 hours.

RECOVERY.INSTRUCTIONS.INSTALL

Include the following installation information:

Server installation and the location of installation volumes and the license number.

For example:

You will need to reinstall the Tivoli Storage Manager server and administrative client after installing the Windows operating system.
 The install volume for the Tivoli Storage Manager server is INS001. If that is lost, you will need to contact Copy4You Software, at 1-800-000-0000, and obtain a new copy. Another possibility is the local IBM Branch office at 555-7777.

A sample file, *recinsti.txt*, is included with DRM. You might want to copy *recinsti.txt* into your *RECOVERY.INSTRUCTIONS.INSTALL* file to supplement your installation-specific instructions.

- Obtain a workstation with at least the following:
 - o 16MB of memory (32MB recommended)
 - o CD-ROM device
- Install Microsoft Windows NT 4.0 or later
- Install the Tivoli Storage Manager Server and Tivoli Storage Manager Administrative Client
 - o It is recommended that you have at least 100MB of disk storage
 - o The installation directory to specify on the Setup Type screen can be found in the SERVER.REQUIREMENTS stanza within the disaster recovery plan file
 - o It is recommended that the Tivoli Storage Manager Server be brought up to the most current maintenance level. If this is not possible, then the minimum acceptable maintenance level is the level used to create the disaster recovery plan file. The level used to create the disaster recovery plan file can be found in the PLANFILE.DESCRPTION stanza within the disaster recovery plan file.

RECOVERY.INSTRUCTIONS.DATABASE

Include information about how to recover the database and about how much hardware space requirements. For example:

You will need to find replacement disk space for the server database. We have an agreement with Joe Replace that in the event of a disaster, he will provide us with disk space.

RECOVERY.INSTRUCTIONS.STGPOOL

Include information on primary storage pool recovery instructions. For example:

Do not worry about the archive storage pools during this disaster recovery. Focus on migration and backup storage pools. The most important storage pool is XYZZZZ.

Specifying information about your server and client node machines

You need information about your server machine to rebuild its replacement. You also need information about client node machines to rebuild or restore them.

About this task

Tip: The plan file that DRM generates is a template that contains information, including commands for recovering the database, that might not apply to your particular recovery scenario. To modify the plan or to store more instructions that you need during recovery from an actual disaster, use the RECOVERY.INSTRUCTIONS stanzas. Enter your site-specific information in the stanzas when you first create the plan file or after you test it.

Use the following procedure to specify information about server and client machines and to store it in the server database:

Procedure

1. Specify server machine information by issuing the **DEFINE MACHINE** command and specify the **ADSMSEVER=YES** parameter. For example, to define machine MACH22 in building 021, 2nd floor, in room 2929, with a priority of 1, enter the following command:

```
define machine tsm1 admsserver=yes priority=1
```

2. Specify the client node location and business priority by issuing the **DEFINE MACHINE** command. For example, to define machine MACH22 in building 021, 2nd floor, in room 2929, with a priority of 1, enter:

```
define machine mach22 building=021 floor=2 room=2929 priority=1
```

3. Associate one or more client nodes with a machine by issuing the **DEFINE MACHNODEASSOCIATION** command. Use this association information to identify client nodes on machines that were destroyed. You should restore the file spaces associated with these nodes. For example, to associate node CAMPBELL with machine MACH22, enter:

```
define machnodeassociation mach22 campbell
```

4. To query machine definitions, issue the **QUERY MACHINE** command.
5. To add machine characteristics and recovery instructions to the database, issue the **INSERT MACHINE** command. You must first query the operating system to identify the characteristics for your client machine.

You can add the information manually or use a Microsoft VBScript command procedure. A sample program is included with DRM.

- a. Use the following partial output from a query on an AIX client machine to add information manually.

```
--1 Host Name: mach22 with 256 MB Memory Card
--- 256 MB Memory Card
---
--4 Operating System: AIX Version 4 Release 3
---
--- Hardware Address: 10:00:5x:a8:6a:46
```

Specify characteristics and recovery instructions one line at a time with separate **INSERT MACHINE** commands:

- To save the first line, Host Name: mach22 with 256 MB Memory Card, as line 1 and to save the fourth line, Operating System: AIX Version 4 Release 3, as line 2 for machine MACH22, issue the following commands:

```
insert machine mach22 1 characteristics="Host Name: mach22 with
256 MB Memory Card"
```

```
insert machine mach22 2 characteristics="Operating System:
AIX Version 4 Release 3"
```

- To specify recovery instructions for your client machine, issue the following command:

```
insert machine mach22 1 -
recoveryinstructions="Recover this machine for accounts
receivable dept."
```

- b. To add information by using a Microsoft VBScript Command Procedure, use the sample VBScript command procedure that is named machchar.vbs. The sample procedure is included with DRM to help automate the adding of client machine information. The following example shows how to use a local program to add machine characteristics or recovery instructions:

- 1) The clientinfo.txt file from the AIX client machine is transferred to a Windows machine that has an administrative command-line client installed. The file is then processed by a sample VBScript command procedure, which builds a macro of **INSERT** commands (one command for each line in the file). The following screens show an example of a procedure that is named machchar.vbs that is used to insert machine characteristics.


```

'*****
' Tivoli Disaster Recovery Manager for Windows NT/2000 Sample Script
'
' Read machine characteristics from an input file and build an output file
' that is a TSM macro. The TSM macro contains statements which are
' TSM commands to insert client machine information into the ADSM server
' database. The TSM macro is used with the TSM administrative client.
'
' Invoke with:
' cscript machchar.vbs machinename inputmachinefilename outputmacrofilename
' where:
'   machinename           is the name of a machine that has previously
'                           been defined to the TSM server with the
'                           DEFINE MACHINE command
'   inputmachinefilename  is the name of the input file which contains
'                           the client machine characteristics. This file
'                           would typically be built on the client machine
'                           then the file would be transferred to the
'                           Windows machine where the TSM Administrative
'                           client is installed.
'   outputmacrofilename   is the name of the output file in an existing
'                           directory which will be the TSM macro. The
'                           TSM macro will consist of a series of commands
'                           to insert machine characteristics into the TSM
'                           server database. For example:
'
'                           INSERT MACHINE mch1 n characteristics='xxx...'
'
'                           where:
'                               n           represents the sequence number
'                                           this line will have in the
'                                           TSM server database
'                               'xxx...'   represents a single line from
'                                           the input file
'
'                           NOTE: The maximum length of a line of machine
'                                   characteristics is 1024
'
' Example usage:
' cscript machchar.vbs mch1 c:\client1\clientinfo.txt c:\client1\clientinfo.mac
'*****
Dim args
Dim MACHINENAME, INFILE, OUTFILE
dim fso
dim fo, fi
dim SEQUENCE
Dim CRLF

```

```

CRLF = Chr(13) & Chr(10)
Const ForReading = 1, ForWriting = 2

'*****
' Get input arguments: MACHINENAME =machinename
'                      INFILE =inputmachinefilename
'                      OUTFILE =outputmacrofilename
'*****

set args = Wscript.Arguments

If args.Count < 3 Then
    Wscript.Echo _
        "usage: cscript machchar.vbs machinename inputmachinefilename
        outputmacrofilename" & CRLF & _
        "example: cscript machchar.vbs mchl c:\client1\clientinfo.txt
        c:\client1\clientinfo.mac"
    Wscript.Quit(1)
Else
    MACHINENAME = args.Item(0)
    INFILE       = args.Item(1)
    OUTFILE      = args.Item(2)
End if

Set fso = CreateObject("Scripting.FileSystemObject")

'*****
' Create the TSM macro file.
'*****

Set fo = fso.OpenTextFile(OUTFILE, ForWriting, True)

Wscript.Echo "Creating TSM macro file: " & OUTFILE

'*****
' Place a TSM command in the TSM macro to delete any existing machine
' characteristics for this machine from the TSM server database.
'*****

fo.WriteLine "delete machine " & MACHINENAME & " type=characteristics"

'*****
' Read a line from the input machine characteristics file, add the TSM
' command to insert the line of machine characteristics into the TSM server
' database, and write the result to the output TSM macro.
'*****

```

```

SEQUENCE = 1

Set fi = fso.OpenTextFile(INFILE, ForReading, False)

Do While fi.AtEndOfStream <> True

    INLINE = fi.ReadLine
    fo.WriteLine "insert machine " & MACHINENAME & " " & SEQUENCE & "
        char=" & INLINE & ""
    SEQUENCE = SEQUENCE + 1

Loop

'*****
' Close the files.
'*****

fo.Close
fi.Close

```

The machchar.vbs VBScript command procedure is run:
cscript machchar.vbs acctsrcv clientinfo.txt clientinfo.mac

Then the macro is run to load the data into the database.

- 2) To add the machine characteristics, start the administrative client and run the macro. For example:

```
> dsmdmc -id=xxx -pw=xxx macro clientinfo.mac
```

You can view your machine characteristics by issuing the **QUERY MACHINE** command with **FORMAT=CHARACTERISTICS** parameter.

- 3) To specify recovery instructions for your client machine, you can use a similar VBScript command procedure but with the **RECOVERYINSTRUCTIONS** parameter.

Related tasks:

“Recovering the client scenario” on page 1095

Specifying recovery media for client machines

Follow these steps to specify the bootable media that are needed to reinitialize or reinstall an operating system on a client machine and to associate machines with media. You can also associate non-executable media such as application user guides with client machines.

Procedure

1. Define the bootable media. For example, define the media that are named **TELLERWRKSTNIMAGE**, which is for AIX Version 4.3, contains the volumes that are named **AIX001**, **AIX002**, and **AIX003**, and is in Building 21.

```
define recoverymedia tellerwrkstnimage type=boot
  volumenames=aix001,aix002,aix003 product="AIX 4.3"
  location="Building 21"
```

Define the recovery media after configuration changes for the client machine. For example, after you install a new level of AIX on a client machine and created a bootable image by using **mksysb**, issue the **DEFINE RECOVERYMEDIA** command to define the new **mksysb** volumes.

To query your recovery media definitions, issue the **QUERY RECOVERYMEDIA** command with the **FORMAT=DETAILED** parameter.

2. Associate one or more machines with recovery media. Use the association information to identify the boot media to use in the replacement machines. For example, to associate machine **MACH255** with recovery media **TELLERWRKSTNIMAGE**, issue the following command:

```
define recmedmachassociation tellerwrkstnimage mach255
```

3. When the boot media is moved offsite, update its location. For example, to update the location of boot media **TELLERWRKSTNIMAGE** to the offsite location **IRONVAULT**, issue the following command:

```
update recoverymedia tellerwrkstnimage location=ironvault
```

Results

You can define media that contain softcopy manuals that you would need during recovery. For example, to define a CD-ROM containing the AIX 5.1 manuals that are on volume **CD0001**, enter:

```
define recoverymedia aix51manuals type=other volumes=cd0001
  description="AIX 5.1 Bookshelf"
```

Creating and storing the disaster recovery plan

You can create a disaster recovery plan file and store the file locally or on another server.

About this task

The recovery plan contains the following information:

- The recovery procedure
- A list of required database volumes, copy storage pool volumes, and active-data pool volumes, devices to read those volumes, and database and recovery log space requirements
- Copies of the server options file, device configuration file, and volume history information file
- Commands for completing database recovery and primary storage pool recovery
- Commands for registering licenses
- Instructions that you define
- Machine and recovery media information that you define

DRM creates one copy of the disaster recovery plan file each time you issue the **PREPARE** command. Create multiple copies of the plan for safekeeping. For example, keep copies in print, on CD, on disk space that is located offsite, or on a remote server.

Tips:

- Before you create a disaster recovery plan, back up your storage pools then back up the database.
- If you manually send backup media offsite, you can move copy and storage pool and active-data pool volumes offsite. Use virtual volumes to store data on another server.
- When your backups are both offsite and marked offsite, you can create a disaster recovery plan.

You can use the Tivoli Storage Manager scheduler to periodically run the **PREPARE** command.

Tips:

- The plan file that DRM generates is a template that contains information, including commands for recovering the database, that might not apply to your particular recovery scenario. To modify the plan or to store more instructions that you need during recovery from an actual disaster, use the **RECOVERY.INSTRUCTIONS** stanzas. Enter your site-specific information in the stanzas when you first create the plan file or after you test it.
- DRM creates a plan that assumes that the latest database full plus incremental series would be used to restore the database. However, you might want to use **DBSNAPSHOT** backups for disaster recovery and retain your full plus incremental backup series on site to recover from possible availability problems. In this case, you must specify the use of **DBSNAPSHOT** backups in the **PREPARE** command. For example:

```
prepare source=dbsnapshot
```

Backup of Centera storage pools is not supported. Do not include commands for Centera primary storage pools in the recovery plan file. As a work-around, do one of the following tasks:

- Use the **SET DRMPRIMSTGPOOL** command or the **PRIMSTGPOOL** parameter with the **PREPARE** command to specify the names of the primary storage pools that are eligible for **DRM PREPARE** processing and do not include Centera storage pools. If a specified pool name contains a wildcard, ensure that the expanded name does not match the name of any Centera storage pool that is defined to the Tivoli Storage Manager server.
- Or, if a Centera storage pool is included in the primary pool list when a **PREPARE** command is run, update the recovery plan file that it generated. Delete or comment out the commands for the Centera storage pool that might be included in the following stanzas:
 - PRIMARY.VOLUMES.DESTROYED
 - PRIMARY.VOLUMES.REPLACEMENT
 - STGPOOLS.RESTORE

Related tasks:

“Backing up primary storage pools” on page 908

“Storing data on another server as virtual volumes” on page 726

Chapter 19, “Automating server operations,” on page 611

“Moving copy storage pool and active-data pool volumes offsite” on page 1088

Related reference:

“The disaster recovery plan file” on page 1043

Storing the disaster recovery plan locally

When you create a recovery plan file but do not specify a device class, the file is stored locally in a file system. If you store the file locally, you can specify a storage location.

About this task

For example, to store the recovery plan file locally in the `c:\Program Files\Tivoli\TSM\server2\recplans\` directory, issue the following command:
`prepare planprefix=c:\Program Files\Tivoli\TSM\server2\recplans\`

What to do next

Recovery plan files that are stored locally are not automatically expired. Periodically, delete older recovery plan files manually. DRM appends to the file name the date and time (yyyymmdd.hhmmss). For example:

`c:\Program Files\Tivoli\TSM\server2\recplans\20000925.120532`

Storing the disaster recovery plan on a target server

When you create a recovery plan file and specify a device class, the file is stored on a target server.

About this task

Storing recovery plan files on a target server provides the following capabilities:

- A central repository on a target server for recovery plan files
- Automatic expiration of plan files
- Query capabilities that display information about recovery plan files and the ability to display the contents of a recovery plan file that is on a target server
- Recovery plan file retrieval from a target server

Set up the source and target servers and define a device class a device type of SERVER. For example, assume a device class that is named TARGETCLASS is defined on the source server where you create the recovery plan file. Then, to create the plan file, enter:

```
prepare devclass=targetclass
```

The recovery plan file is written as an object on the target server, and a volume history record is created on the source server.

Related tasks:

“Setting up source and target servers for virtual volumes” on page 728

“Displaying information about recovery plan files” on page 1083

Disaster recovery plan environment

The environment for a recovery that uses the disaster recovery plan file is assumed to be the same as the original environment. The environment includes the directory structure and location of the executable server file and enrollment certificates. If the recovery environment is not the same, then you must edit the plan file to account for the changes in the environment.

If Tivoli Storage Manager is installed in the c:\Program Files\Tivoli\TSM directory, the files are stored as follows:

- Executable server file, message and help files, and enrollment certificates:
 - c:\Program Files\Tivoli\TSM\server\dsmserve.exe
 - c:\Program Files\Tivoli\TSM\server\dsmameng.txt
 - c:\Program Files\Tivoli\TSM\server\dsmameng.hlp
 - c:\Program Files\Tivoli\TSM\server*.lic
- Administrative command-line client:
 - c:\Program Files\Tivoli\TSM\saclient\dsmadm.exe

Each instance of the server has a unique set of files. For example, you might see the following in this instance-specific directory:

- Server options file, disk file, database and log paths, and storage pool volumes:
 - c:\Program Files\Tivoli\TSM\server2\dsmserve.opt
 - c:\Program Files\Tivoli\TSM\server2\dsmserve.dsk
 - c:\Program Files\Tivoli\TSM\server2\db1
 - c:\Program Files\Tivoli\TSM\server2\activlog
 - c:\Program Files\Tivoli\TSM\server2\archlog

```
c:\Program Files\Tivoli\TSM\server2\data1.dsm
```

The database and log paths, and storage pool volumes might also be in a different directory. For example, you might see:

```
c:\c:\Program Files\Tivoli\TSM\server2\stg\db1
c:\ c:\Program Files\Tivoli\TSM\server2\stg\activelog
c:\Program Files\Tivoli\TSM\server2\stg\data1.dsm
```

Files that typically are in an instance-specific directory, `dsmserv.opt` and `dsmserv.dsk`, and storage pool volumes might be in the same directory where `dsmserv.exe` is located, `c:\Program Files\Tivoli\TSM\server`. In this case, the directory that contains `dsmserv.exe` would also be referred to as the instance-specific directory.

When the disaster recovery plan is created, information about the server environment is used in the stanzas within the plan file. This environmental information includes the location of `dsmserv.exe`, the location of the disk formatting utility, the instance-specific directory, the directories storage pool volumes. During a recovery, it is assumed that the same server environment exists.

Additionally, the plan file is in a directory that you might specify or it might be in the default directory, which is the instance-specific directory. For example, if you specified the disaster recovery plan file prefix `c:\Program Files\Tivoli\TSM\server2\prepare\`, you might see the following directory:

```
c:\Program Files\Tivoli\TSM\server2\prepare\20000925.120532
```

The disaster recovery plan file prefix that is specified or the instance-specific directory if no disaster recovery plan file prefix was specified is also used in the stanzas within the plan file. During a recovery, when the plan file is split into individual files, it is assumed that these individual files are in this same directory.

To summarize, the environment for a recovery that uses the disaster recovery plan file is assumed to be the same as the original environment that includes the following directory structures:

- The directory structure and location of the executable server file and enrollment certificates (for licensing)
- The directory structure and location of the administrative command-line client
- The directory structure for server instance-specific files
- The directory structure for the database path, active log, and archive log directories and storage pool volumes.
- The directory structure and the files that are created when the plan file was split into multiple files. For example, the following directories might be included:

Tip: The following directories are not the entire output.

- `c:\Program Files\Tivoli\TSM\server2\prepare\COPYSTGPOOL.VOLUMES.AVAILABLE.MAC`
- `c:\Program Files\Tivoli\TSM\server2\prepare\COPYSTGPOOL.VOLUMES.DESTROYED.MAC`
- `c:\Program Files\Tivoli\TSM\server2\prepare\ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE.MAC`
- `c:\Program Files\Tivoli\TSM\server2\prepare\ACTIVEDATASTGPOOL.VOLUMES.DESTROYED.MAC`

If the recovery environment is not the same, then you must edit the plan file to account for the changes in the environment.

To help understand where these various directories and expected locations for executable files are used within the plan file, see “Example disaster recovery plan file” on page 1049 and you see the following usage:

Usage	Directory
Executable server file	c:\Program Files\Tivoli\TSM\server
Enrollment certificates (licensing)	c:\Program Files\Tivoli\TSM\server
Administrative command-line client	c:\Program Files\Tivoli\TSM\saclient
Disk formatting utility	c:\Program Files\Tivoli\TSM\console
Instance-specific files	c:\Program Files\Tivoli\TSM\server2
Storage pool volumes	c:\Program Files\Tivoli\TSM\server2\stg
Plan file location	c:\Program Files\Tivoli\TSM\server2\prepare
Individual files that are split out from plan	c:\Program Files\Tivoli\TSM\server2\prepare

Managing disaster recovery plan files stored on target servers

The following sections describe how to view information about disaster recovery plans stored on a target server and view their contents. It also describes how to direct the contents of a disaster recovery plan file to another file and how to delete volume history records of the recovery plan files.

Displaying information about recovery plan files

You can display information about recovery plan files from the server that created the files (the source server) or from the server on which the files are stored (the target server).

Procedure

1. **From the source server:** Issue the **QUERY RPFIL** command with the **DEVCLASS** parameter that was used on the **PREPARE** command. Specify the type of database backups that were assumed when the plan was created (either full plus incremental or snapshot). For example, to display a list of all recovery plan files that have been saved for the source server on any target servers and created assuming snapshot database backups, enter:

```
query rpfil devclass=* source=dbsnapshot
```
2. You can also issue the **QUERY VOLHISTORY** command to display a list of recovery plan files for the source server. Specify recovery plan files that were created assuming either full plus incremental database backups (**TYPE=RPFIL**) or database snapshot backups (**TYPE=RPFSNAPSHOT**). For example:

```
query volhistory type=rpfil
```
3. **From the target server:** Issue a **QUERY RPFIL** command that specifies the node name associated with the server or servers that prepared the plan. For example, to display a list of all recovery plan files that have been saved in the target server, enter:

```
query rpfil nodename=*
```


Displaying the contents of a recovery plan file

From the server that created the recovery plan file (the source server) or from the server on which the file is stored (the target server), you can display the contents of that file that was saved as an object on the target server.

About this task

For an example of the contents of a recovery plan file, see “The disaster recovery plan file” on page 1043. You cannot issue the commands shown below from a server console. An output delay can occur if the plan file is located on tape.

Procedure

- **From the source server:** Issue the following command for a recovery plan file created on September 1, 2000 at 4:39 a.m. with the device class TARGETCLASS:

```
query rpfcontent marketing.20000901.043900 devclass=targetclass
```
- **From the target server:** Issue the following command for a recovery plan file created on August 31, 2000 at 4:50 a.m. on a source server named MARKETING whose node name is BRANCH8:

```
query rpfcontent marketing.20000831.045000 nodename=branch8
```

Restoring a recovery plan file

To restore a recovery plan file, use the **QUERY RPFCONTENT** command and direct the output to a file. You can issue the command from the server that created the files (the source server) or from the server on which the files are stored (the target server). To see a list of recovery plan file names, issue the **QUERY RPFFILE** command.

About this task

For example, a recovery plan file that is named marketing.20000831.045000 was created by using the device class of TARGETCLASS. The file was created on a source server whose node name at the target server is BRANCH8. You want to restore the file and direct the output to rpf.out:

Procedure

- From the source server, issue the following command:

```
query rpfcontent marketing.20000831.045000  
devclass=targetclass > rpf.out
```
- From the target server, issue the following command:

```
query rpfcontent marketing.20000831.045000  
nodename=branch8 > rpf.out
```

What to do next

To display a list of recovery plan files, use the **QUERY RPFFILE** command.

Related tasks:

“Displaying information about recovery plan files” on page 1083

Expiring recovery plan files automatically

You can set DRM to expire recovery plan files that are stored on a target server some days after they are created.

About this task

All recovery plan files that meet the criteria are eligible for expiration if all of the following conditions exist:

- The last recovery plan file of the series is over 90 days old.
- The recovery plan file is not associated with the most recent backup series. A backup series consists of a full database backup and all incremental backups that apply to that full backup. Another series begins with the next full backup of the database.
- The number of days that is set for the **DELgraceperiod** parameter in the **DEFINE SERVER** command is reached.

Expiration applies to plan files based on both full plus incremental and snapshot database backups. Note, however, that expiration does not apply to plan files stored locally.

Procedure

To set up expiration, issue the **SET DRMRPFEXPIREDAYS** command. The default value is 60 days. For example, to change the time to 90 days, enter:

```
set drmrpfexpiredays 90
```

Related tasks:

“Storing the disaster recovery plan locally” on page 1080

Deleting recovery plan files manually

You can delete volume history records containing information about recovery plan file objects.

About this task

When the records are deleted from the source server and the number of days that is set for the **DELgraceperiod** parameter in the **DEFINE SERVER** command is reached, the objects are deleted from the target server. The record for the latest recovery plan file is not deleted.

Procedure

To delete recovery plan files, issue the **DELETE VOLHISTORY** command. For example, to delete records for recovery plan files that were created on or before 08/30/2000 and assuming full plus incremental database backup series, enter the following command:

```
delete volhistory type=rpfile todate=08/30/2000
```

To limit the operation to recovery plan files that were created assuming database snapshot backups, specify **TYPE=RPFSNAPSHOT**.

Moving backup media for disaster recovery operations

To recover from a disaster you need database backup volumes, copy storage pool volumes, and, optionally, active-data pool volumes. To stay prepared for a disaster, you need to complete daily tasks.

Before you begin

Task	Required Privilege Class
Send copy storage pool and active-data pool volumes offsite and back onsite	Unrestricted storage or operator

Procedure

1. Move new backup media offsite and update the database with their locations.
2. Return expired or reclaimed backup media onsite and update the database with their locations.
3. Offsite recovery media management does not process virtual volumes. To display all virtual copy storage pool, active-data pool, and database backup volumes that have their backup objects on the remote target server, issue the **QUERY DRMEDIA** command: For example, enter the following command.

```
query drmedia * wherestate=remote
```

Results

Offsite recovery media management does not move or display any two-sided volumes that have a REMOVABLEFILE device type.

The disaster recovery plan includes the location of copy storage pool volumes and active-data pool volumes. The plan can provide a list of offsite volumes that are required to restore a server.

The following diagram shows the typical lifecycle of the recovery media:

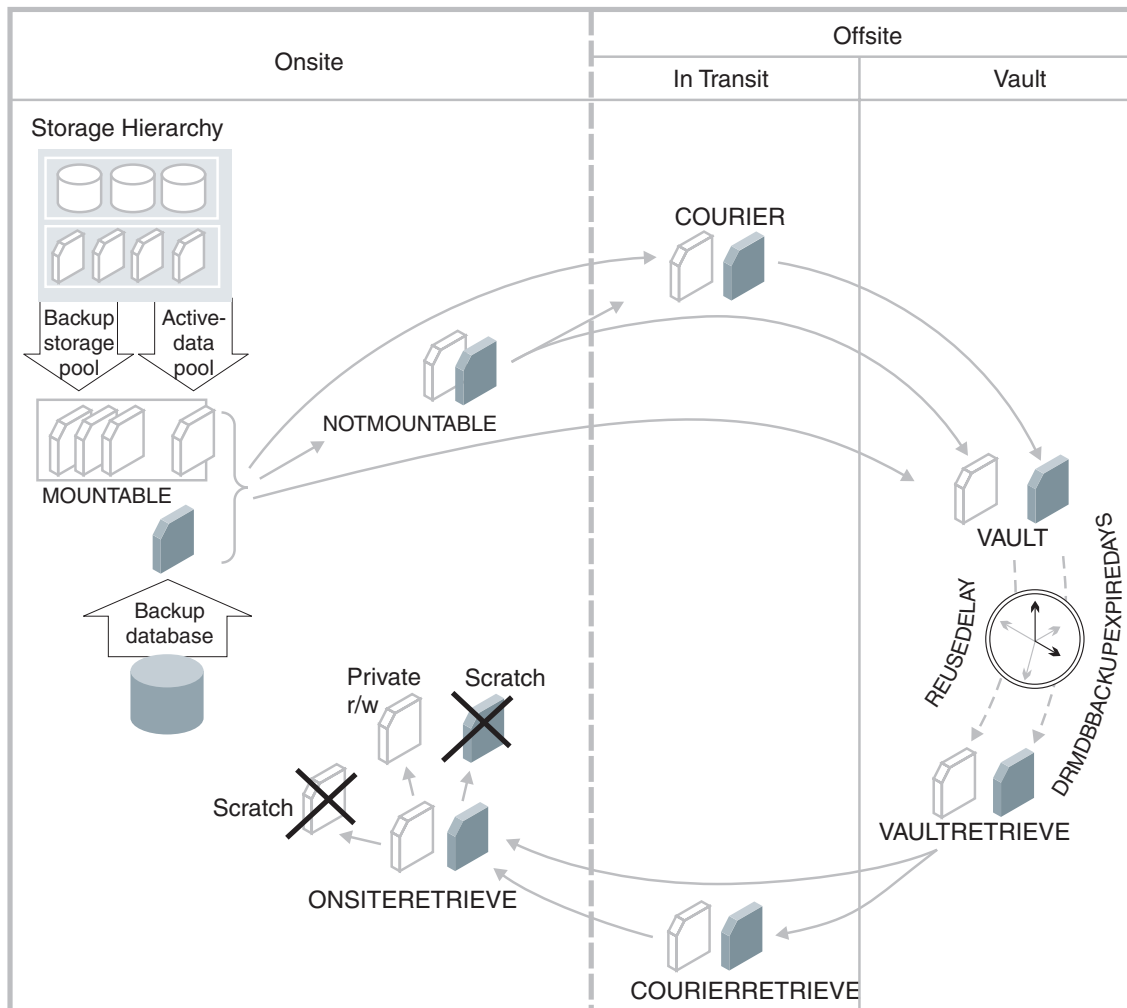


Figure 118. Recovery media lifecycle

DRM assigns the following states to volumes. The location of a volume is known at each state.

MOUNTABLE

The volume contains valid data, and Tivoli Storage Manager can access it.

NOTMOUNTABLE

The volume contains valid data and is onsite, but Tivoli Storage Manager cannot access it.

COURIER

The volume contains valid data and is in transit to the vault.

VAULT

The volume contains valid data and is at the vault.

VAULTRETRIEVE

The volume, which is at the offsite vault, no longer contains valid data and is to be returned to the site.

COURIERRETRIEVE

The volume no longer contains valid data and is returned by the courier.

ONSITERETRIEVE

The volume no longer contains valid data and is moved back to the onsite

location. The volume records of database backup, scratch copy storage pool volumes, and scratch active-data pool volumes are deleted from the database. For private copy storage pool volumes and active-data pool volumes, the access mode is updated to READWRITE.

Related concepts:

“Reclamation of offsite volumes” on page 388

Related tasks:

“Moving copy storage pool and active-data pool volumes offsite”

“Moving copy storage pool and active-data pool volumes onsite” on page 1090

Moving copy storage pool and active-data pool volumes offsite

After you created the backup copies of your primary storage pools and database, you can send your backup media offsite. To send media offsite, mark the volumes as unavailable to Tivoli Storage Manager and give them to the courier.

Procedure

Complete the following steps to identify the database backup, copy storage pool, and active-data pool volumes and move them offsite:

1. Identify the copy storage pool, active-data pool, and database backup volumes to be moved offsite. For example, issue the following command:

```
query drmedia * wherestate=mountable
```

DRM displays information similar to the following output:

Volume Name	State	Last Update Date/Time	Automated LibName
-----	-----	-----	-----
TPBK05	Mountable	01/01/2000 12:00:31	LIBRARY
TPBK99	Mountable	01/01/2000 12:00:32	LIBRARY
TPBK06	Mountable	01/01/2000 12:01:03	LIBRARY

2. Indicate the movement of volumes whose current state is MOUNTABLE. For example, issue the following command:

```
move drmedia * wherestate=mountable
```

Restriction: Do not run the **MOVE DRMEDIA** and **BACKUP STGPPOOL** commands concurrently. Ensure that the storage pool backup processes are complete before you issue the **MOVE DRMEDIA** command.

For all volumes in the MOUNTABLE state, DRM does the following:

- Updates the volume state to NOTMOUNTABLE and the volume location according to the **SET DRMNOTMOUNTABLENAME**. If this command is not issued, the default location is NOTMOUNTABLE.
- For a copy storage pool volume or active-data pool volume, updates the access mode to unavailable.
- For a volume in an automated library, checks the volume out of the library.
 - a. During checkout processing, SCSI libraries request operator intervention. To bypass these requests and eject the cartridges from the library, first issue the following command:

```
move drmedia * wherestate=mountable remove=no
```
 - b. Access a list of the volumes by issuing the following command:

```
query drmedia wherestate=notmountable
```

From this list identify and remove the cartridges (volumes) from the library.

- c. For the 349X library type, if the number of cartridges to be checked out of the library is greater than the number of slots in the I/O station, you can define a high capacity area in your library. Then, use the following command to eject the cartridges to the high capacity area, rather than to the I/O station:

```
move drmedia * wherestate=mountable remove=bulk
```

3. Send the volumes to the offsite vault. Issue the following command to have DRM select volumes in the NOTMOUNTABLE state:

```
move drmedia * wherestate=notmountable
```

For all volumes in the NOTMOUNTABLE state, DRM updates the volume state to COURIER and the volume location according to the **SET DRMCOURIERNAME**. If the **SET** command is not yet issued, the default location is COURIER.

4. When the vault location confirms receipt of the volumes, issue the **MOVE DRMEDIA** command in the COURIER state. For example:

```
move drmedia * wherestate=courier
```

For all volumes in the COURIER state, DRM updates the volume state to VAULT and the volume location according to the **SET DRMVAULTNAME** command. If the **SET** command is not yet issued, the default location is VAULT.

5. Display a list of volumes that contain valid data at the vault. Issue the following command:

```
query drmedia wherestate=vault
```

DRM displays information similar to the following output:

Volume Name	State	Last Update Date/Time	Automated LibName
-----	-----	-----	-----
TAPE0P	Vault	01/05/2000 10:53:20	
TAPE1P	Vault	01/05/2000 10:53:20	
DBT02	Vault	01/05/2000 10:53:20	
TAPE3S	Vault	01/05/2000 10:53:20	

6. If you do not want to step through all the states, you can use the TOSTATE parameter on the **MOVE DRMEDIA** command to specify the destination state. For example, to change the volumes from NOTMOUNTABLE state to VAULT state, issue the following command:

```
move drmedia * wherestate=notmountable tostate=vault
```

For all volumes in the NOTMOUNTABLE state, DRM updates the volume state to VAULT and the volume location according to the **SET DRMVAULTNAME** command. If the **SET** command is not yet issued, the default location is VAULT.

Related tasks:

“Specifying defaults for offsite recovery media management” on page 1070

“Preparing for disaster recovery” on page 1034

Moving copy storage pool and active-data pool volumes onsite

Use the following procedure to expire the non-virtual database backup volumes and return the volumes back onsite for reuse or disposal.

Procedure

1. To specify the number of days before a database backup series is expired, issue the **SET DRMDBBACKUPEXPIREDAYS** command. The following example sets the number of days to 30.

```
set drmdbbackupexpiredays 30
```

To ensure that the database can be returned to an earlier level and database references to files in the copy storage pool or active-data pool are still valid, specify the same value for the **REUSEDELAY** parameter in your copy storage pool and active-data pool definitions. If copy storage pools or active-data pools that are managed by DRM have different **REUSEDELAY** values, set the **DRMDBBACKUPEXPIREDAYS** value to the highest **REUSEDELAY** value.

If all of the following conditions are true, a database backup volume is considered eligible for expiration:

- The age of the last volume of the series exceeds the expiration value. This value is the number of days since the last backup in the series. At installation, the expiration value is 60 days. To override this value, issue the **SET DRMDBBACKUPEXPIREDAYS** command.
- For volumes that are not virtual volumes, all volumes in the series are in the VAULT state.
- The volume is not part of the most recent database backup series.

Database backup volumes that are virtual volumes are removed during expiration processing. This processing is started manually by issuing the **EXPIRE INVENTORY** command or automatically by the **EXPINTERVAL** option setting that is specified in the server options file.

2. Move a copy storage pool volume or an active-data pool volume onsite for reuse or disposal. A copy storage pool volume or an active-data pool volume can be moved onsite if it is EMPTY for at least the number of days that are specified with the **REUSEDELAY** parameter on the **DEFINE STGPOOL** command. A database backup volume can be moved onsite if the database backup series is EXPIRED according to the rules outlined in step 1. To determine which volumes to retrieve, issue the following command:

```
query drmedia * wherestate=vaultretrieve
```

The server dynamically determines which volumes can be moved back onsite. When you issue **QUERY DRMEDIA WHERESTATE=VAULTRETRIEVE**, the **Last Update Date/Time** field in the output contains the date and time that the state of the volume was moved to VAULT, not VAULTRETRIEVE. Because the server makes the VAULTRETRIEVE determination dynamically, issue **QUERY DRMEDIA WHERESTATE=VAULTRETRIEVE** without the **BEGINDATE**, **ENDDATE**, **BEGINTIME**, or **ENDTIME** parameters. Doing so ensures that you identify all volumes that are in the VAULTRETRIEVE state.

3. After the vault location acknowledges that the volumes are given to the courier, issue the **MOVE DRMEDIA** command.

```
move drmedia * wherestate=vaultretrieve
```

The server does the following for all volumes in the VAULTRETRIEVE state:

- Change the volume state to COURIERRETRIEVE.

- Update the location of the volume according to what is specified in the **SET DRMCOURIERNAME** command. For more information, see “Specifying defaults for offsite recovery media management” on page 1070.
4. When the courier delivers the volumes, acknowledge that the courier returned the volumes onsite. Issue the following command:

```
move drmedia * wherestate=courierretrieve
```

The server does the following for all volumes in the **COURIERRETRIEVE** state:

 - Moves the volumes onsite where they can be reused or disposed of.
 - Deletes the database backup volumes from the volume history table.
 - For scratch copy storage pool volumes or active-data pool volumes, deletes the record in the database. For private copy storage pool volumes or active-data pool volumes, updates the access to read/write.
 5. If you do not want to step through all the states, you can use the **TOSTATE** parameter on the **MOVE DRMEDIA** command to specify the destination state. For example, to move the volumes from **VAULTRETRIEVE** state to **ONSITERETRIEVE** state, issue the following command:

```
move drmedia * wherestate=vaultretrieve tostate=onsiteretrieve
```

The server does the following for all volumes with in the **VAULTRETRIEVE** state:

- Moves the volumes onsite where they can be reused or disposed of.
- Deletes the database backup volumes from the volume history table.
- For scratch copy storage pool volumes or active-data pool volumes, deletes the record in the database. For private copy storage pool volumes or active-data pool volumes, updates the access to read/write.

Related tasks:

“Specifying defaults for offsite recovery media management” on page 1070

Recovering from a disaster

Plan the tasks that are involved in recovering the server and clients. It also presents scenarios of both procedures.

Procedure

Here are guidelines for recovering your server:

1. Obtain the latest disaster recovery plan file.
2. Break out the file to view, update, print, or run as macros or scripts, for example, batch programs or batch files.
3. Obtain the copy storage pool volumes and active-data pool volumes from the vault.
4. Locate a suitable replacement machine.
5. Restore the Windows operating system and Tivoli Storage Manager to your replacement machine. When you use the Tivoli Storage Manager device driver, **ADSMSCSI**, you must also start **ADSMSCSI**.
6. Review the **RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE** **RECOVERY.SCRIPT.NORMAL.MODE** scripts because they are important for restoring the server to a point where clients can be recovered (see “Disaster recovery mode stanza” on page 1055).

Results

Recovering the Clients:

To recover clients, complete the following tasks:

1. Get the following information by querying the recovered database:
 - Client machines that are defined to Tivoli Storage Manager, along with their location and restore priority value
 - The location of the boot recovery media
 - Specific recovery instructions for the machine
 - Hardware requirements for the machine
2. With this information, restore the client machines. As a first priority, check into the library the volumes that belong to active-data pools. When a client initiates a restore attempt, storage volumes within an active-data pool have a higher restore priority than standard primary sequential storage pool volumes or copy storage pool volumes.

Recovering the server scenario

You can recover the server after a disaster. In this example virtual volumes are not used. The steps are completed by the onsite administrator unless otherwise indicated.

Procedure

Restriction: When you run the disaster recovery script or the commands that the script contains, you must determine whether to run as root or as the DB2 instance user ID.

1. Review the recovery steps that are described in the RECOVERY.INSTRUCTIONS.GENERAL stanza of the plan.
2. Request the server backup tapes from the offsite vault.
3. Break out the recovery plan file stanzas into multiple file. These files can be viewed, updated, printed, or run as Tivoli Storage Manager macros or scripts.
4. Print the RECOVERY.VOLUMES.REQUIRED file. Give the printout to the courier to retrieve the copy storage pool volumes and active-data pool volumes.
5. Find a replacement server. The RECOVERY.DEVICES.REQUIRED stanza specifies the device type that read the backups. The SERVER.REQUIREMENTS stanza specifies the disk space.

Note: When you use the Tivoli Storage Manager device driver (ADSMSCSI), you must start ADSMSCSI.

6. The recovery media names and their locations are specified in the RECOVERY.INSTRUCTIONS.INSTALL stanza and the MACHINE.RECOVERY.MEDIA.REQUIRED stanza. Ensure that the environment is the same as when the disaster recovery plan file was created. The environment includes the following directory structures:
 - The directory structure of the executable Tivoli Storage Manager server file and disk formatting utility
 - The directory structure for Tivoli Storage Manager server configuration files (disk log, volume history file, device configuration file, and server options file)
 - The directory structure and the files that are created when the disaster recovery plan file was split into multiple files

7. Restore the operating system, the Tivoli Storage Manager server software, the Tivoli Storage Manager licenses, and the administrative client on the replacement hardware.
 - a. Build a new replacement server instead of restoring the environment from a backup:
 - 1) Install the Tivoli Storage Manager server software.
 - 2) Create the database directories, the active directories, and the archive directories as in the original.
 - 3) Run the `dsmlcfgx` utility to configure the replacement instance. This step configures the API for the **DSMSERV RESTORE DB** utility.
 - Specify the instance userid and password.
 - Specify the database directories, the active directories, and the archive directories.
 - 4) Remove the database instance that was created by the `dsmlcfgx` utility. For example,


```
dsmserv removedb TSMDB1
```
 - 5) Restore the original `dsmserv.opt`, volume history, and device configuration files to the instance directory (as done by the recovery script in plan file)
 - 6) Run the **DSMSERV RESTORE DB** (as done by the recovery script in the plan file).
8. Review the Tivoli Storage Manager macros that are contained in the recovery plan. If the following conditions are true at the time of the disaster, complete the following tasks:
 - The courier does not have the previous night's database and storage pool incremental backup volumes but they were not destroyed, remove the entry for the storage pool backup volumes from the `COPYSTGPOOL.VOLUMES.DESTROYED` file.
 - The courier does not have the previous night's database and active-data pool volumes but they were not destroyed, remove the entry for the active-data pool volumes from the `ACTIVEDATASTGPOOL.VOLUMES.DESTROYED` file.
9. If some storage pool backup volumes cannot be retrieved from the vault, remove the volume entries from the `COPYSTGPOOL.VOLUMES.AVAILABLE` file.
 If some active-data pool volumes cannot be retrieved from the vault, remove the volume entries from the `ACTIVEDATASTGPOOL.VOLUMES.AVAILABLE` file.
10. If all primary volumes were destroyed, no changes are required to the `PRIMARY.VOLUMES` script and Tivoli Storage Manager macro files.
11. Review the device configuration file to ensure that the hardware configuration at the recovery site is the same as the original site. Any differences must be updated in the device configuration file. The following example configuration changes require updates to the configuration information:
 - Different device names
 - Use of a manual library instead of an automated library
 - For automated libraries, the requirement of manually placing the database backup volumes in the automated library and updating the configuration information to identify the element within the library. This allows the server to locate the required database backup volumes.

12. To restore the database to a point where clients can be recovered, ensure that the Tivoli Storage Manager server is halted and then invoke the `RECOVERY.SCRIPT.DISASTER.RECOVERY.MODE` script file. Enter the script file name at the command line. As an alternative, you can use the recovery script as a guide and manually issue the steps.

The following steps are an example recovery script:

- a. Copy the Tivoli Storage Manager server options file from the `dsmserv.opt` file to its original location.
- b. Copy the volume history file that you need for database restore processing from the `VOLUME.HISTORY.FILE` file to its original location. Use this copy of the volume history file unless you have a more recent copy (after the disaster occurred).
- c. Copy the device configuration file that you need for database restore processing from the `DEVICE.CONFIGURATION.FILE` file to its original location.
- d. Issue the **DSMSERV RESTORE DB** command.
- e. Start the server.
- f. Register Tivoli Storage Manager server licenses.
- g. Mark copy storage pool volumes and active-data pool volumes that are retrieved from the vault as available.
- h. Mark copy storage pool volumes and active-data pool volumes that cannot be obtained as unavailable.
- i. Mark primary storage pool volumes as destroyed.

Due to changes in hardware configuration during recovery, you might have to update the device configuration file in the restored Tivoli Storage Manager database (see “Updating the device configuration file” on page 931).

You can mount copy storage pool volumes and active-data pool volumes upon request, check in the volumes in advance, or manually place the volumes in the library and ensure consistency by issuing the **AUDIT LIBRARY** command. Use the **AUDIT LIBRARY** command to ensure that the restored Tivoli Storage Manager database is consistent with the automated library volumes.

13. If client workstations are not damaged, invoke the `RECOVERY.SCRIPT.NORMAL.MODE` script file to restore the server primary storage pools. If client workstations are damaged, you might want to delay this action until after all clients are recovered.

This action is optional because Tivoli Storage Manager can access the copy storage pool volumes and active-data pool volumes directly to restore client data. Using this feature, you can minimize client recovery time because server primary storage pools do not have to be restored first. However, in this scenario, the client workstations were not damaged, so the focus of the administrator is to restore full Tivoli Storage Manager server operation.

As an alternative, you can use the recovery script as a guide and manually run each step. Run the following steps in this script:

- a. Create replacement primary volumes.
- b. Define the replacement primary volumes to Tivoli Storage Manager.
- c. Restore the primary storage pools from copy storage pools.

Attention: If the server determines that an inactive file must be replaced but cannot find it in the active-data pool, restoring a primary storage pool from an active-data pool might cause some or all inactive files to be deleted from the database.

14. Collect the database backup, copy storage pool volumes, and active-data pool volumes that are used in the recovery for return to the vault. For these backup volumes to be returned to the vault by using the routine **MOVE DRMEDIA** process, issue the following commands:

```
update volhist TPBK50 devcl=lib8mm ormstate=mountable
update volhist TPBK51 devcl=lib8mm ormstate=mountable
```

The copy storage pool volumes and active-data pool volumes that are used in the recovery already have the correct ORMSTATE.

15. Issue the **BACKUP DB** command to back up the newly restored database.
16. Issue the following command to check the volumes out of the library:

```
move drmedia * wherestate=mountable
```

17. Create a list of the volumes to be given to the courier:

```
query drmedia * wherestate=notmountable
```

18. Give the volumes to the courier and issue the following command:

```
move drmedia * wherestate=notmountable
```

19. Issue the PREPARE command.

Related tasks:

“Updating the device configuration file” on page 931

Related reference:

“Breaking out a disaster recovery plan file” on page 1043

Recovering the client scenario

The following scenario demonstrates the recovery of clients.

Procedure

1. To view a list of client machines that were lost in building 21 and their restore priority, issue the following command:

```
query machine building=021 format=detailed
```

DRM displays information that is similar to the following output:

```
Machine Name: POLARIS
Machine Priority: 1
Building: 21
Floor: 2
Room: 1
Server?: No
Description: Payroll
Node Name: POLARIS
Recovery Media Name: MKSYSB1
Characteristics?: Yes
Recovery Instructions?: Yes
```

Identify the client machines that have the highest priority to determine the restore operations that can use active-data pool volumes.

2. For each machine, issue the following commands:
 - a. Determine the location of the boot media. For example:

```
query recoverymedia mksysb1
```

The server displays the following information:

Recovery Media Name	Volume Names	Location	Machine Name
MKSYSB1	vol1 vol2 vol3	IRONVAULT	POLARIS

- b. Determine the machine-specific recovery instructions. For example:
`query machine polaris format=recoveryinstructions`

The server displays the following output:

```
Recovery Instructions for Polaris.
Primary Contact:
  Jane Smith (wk 520-000-0000 hm 520-001-0001)
Secondary Contact:
  John Adams (wk 520-000-0001 hm 520-002-0002)
```

- c. Determine the machine hardware requirements.
`query machine polaris format=characteristics`

The server displays information similar to the following output:

```

devices
aio0      Defined      Asynchronous I/O
bus0      Available 00-00      Microchannel Bus
fd0       Available 00-00-0D-00 Diskette Drive
fda0      Available 00-00-0D      Standard I/O Diskette Adapter
fpa0      Available 00-00      Floating Point Processor
gda0      Available 00-04      Color Graphics Display Adapter
hd1       Defined      Logical volume
hd2       Defined      Logical volume
hd3       Defined      Logical volume
hdisk0    Available 00-01-00-00 400 MB SCSI Disk Drive
hdisk1    Available 00-01-00-40 Other SCSI Disk Drive
hft0      Available      High Function Terminal Subsystem
inet0     Available      Internet Network Extension
ioplanar0 Available 00-00      I/O Planar
kbd0      Defined 00-00-0K-00 United States keyboard
lb0       Available 00-02-00-20 TIVSM Library
lo0       Available      Loopback Network Interface
loglv00   Defined      Logical volume
lp0       Available 00-00-0P-00 IBM 4201 Model 3 Proprinter III
lv03      Defined      Logical volume
lv04      Defined      Logical volume
lvdd      Available      N/A
mem0      Available 00-0B      8 MB Memory Card
mem1      Available 00-0C      16 MB Memory Card
mous0     Defined 00-00-0M-00 3 button mouse
mt0       Available 00-02-00-40 TIVSM Tape Drive
ppa0      Available 00-00-0P      Standard I/O Parallel Port Adapter
pty0      Available      Asynchronous Pseudo-Terminal
rootvg    Defined      Volume group
sa0       Available 00-00-S1      Standard I/O Serial Port 1
sa1       Available 00-00-S2      Standard I/O Serial Port 2
scsi0     Available 00-01      SCSI I/O Controller
scsil     Available 00-02      SCSI I/O Controller
sio0      Available 00-00      Standard I/O Planar
siokb0    Available 00-00-0K      Keyboard Adapter
sioms0    Available 00-00-0M      Mouse Adapter
siotb0    Available 00-00-0T      Tablet Adapter
sys0      Available 00-00      System Object
sysplanar0 Available 00-00      CPU Planar
sysunit0  Available 00-00      System Unit
tok0      Available 00-03      Token-Ring High-Performance Adapter
tr0       Available      Token Ring Network Interface
tty0      Available 00-00-S1-00 Asynchronous Terminal
tty1      Available 00-00-S2-00 Asynchronous Terminal
usrvice   Defined      Logical volume
veggie2   Defined      Volume group
logical volumes by volume group
veggie2:
LV NAME      TYPE      LPs      PPVs      PVs      LV STATE      MOUNT POINT
hd2          jfs       103      103      1      open/syncd    /usr
hd1          jfs       1        1        1      open/syncd    /home
hd3          jfs       3        3        1      open/syncd    /tmp
hd9var       jfs       1        1        1      open/syncd    /var
file systems
Filesystem   Total KB   free %used   iused %iused   Mounted on
/dev/hd4     8192      420 94%      909 44% /
/dev/hd9var  4096      2972 27%      87 8% /var
/dev/hd2     421888    10964 97%     17435 16% /usr
/dev/hd3     12288     11588 5%       49 1% /tmp
/dev/hd1     4096      3896 4%       26 2% /home

```

3. With the information obtained, restore each client machine.

When the high-priority clients are restoring their data from active-data pools, the other, lower-priority clients can begin restoring directly from copy storage pools. Restoration from copy storage pools can run concurrently with the restoration from active-data pools. High-priority clients do not attempt to access the copy storage pool volumes because active-data pools have a higher restore priority than copy storage pools.

Recovering with different hardware at the recovery site

You might have to recover your system by using hardware that is different from hardware that you used when you backed up your database and created disaster recovery plan file. Before you restore the database, update the device configuration file that is included in the recovery plan file. After you restore the database, update the device configuration on the database.

About this task

If the hardware environment is different at the recovery site, you must update the device configuration file. Tivoli Storage Manager uses the device configuration file to access the devices that are needed to read the database backup volumes. The RECOVERY.VOLUMES.REQUIRED stanza in the plan file identifies the volumes that are needed to restore the database.

Automated SCSI library at the original and recovery sites

Manually place the database backup volumes in the automated library and note the element numbers where you place them. Then, update the comments in the device configuration file to identify the locations of those volumes.

About this task

Tip: You might also need to audit the library after the database is restored to update the server inventory of the library volumes.

Here is an example of an original device configuration file, which describes an automated tape library:

```
/* Device Configuration */

define devclass auto8mm_class devtype=8mm format=drive
  mountlimit=2 mountwait=60 mountretention=60
  prefix=tsm library=auto8mmplib

define library auto8mmplib libtype=scsi

define drive auto8mmplib 8mm_tape0 element=82 online=yes

define drive auto8mmplib 8mm_tape1 element=83 online=yes

define path server1 auto8mmplib srctype=server desttype=library
  device=lb4.0.0.1

define path server1 8mm_tape0 srctype=server desttype=drive
  library=auto8mmplib device=mt1.0.0.1

define path server1 8mm_tape1 srctype=server desttype=drive
  library=auto8mmplib device=mt2.0.0.1

/* LIBRARYINVENTORY SCSI AUTO8MMLIB KEV004 1 101*/
/* LIBRARYINVENTORY SCSI AUTO8MMLIB KEV005 3 101*/
```

Here is an example of the updated device configuration file when an automated library is used at the recovery site to read a database volume DBBK01:

```
/* Device Configuration */

define devclass auto8mm_class devtype=8mm format=drive
  mountlimit=2 mountwait=60 mountretention=60
  prefix=tsm library=auto8mmplib
```

```

define library auto8mmlib libtype=scsi

define drive auto8mmlib 8mm_tape0 element=82 online=yes

define drive auto8mmlib 8mm_tape1 element=83 online=yes

define path server1 auto8mmlib srctype=server desttype=library
device=1b4.0.0.1

define path server1 8mm_tape0 srctype=server desttype=drive
library=auto8mmlib device=mt1.0.0.1

define path server1 8mm_tape1 srctype=server desttype=drive
library=auto8mmlib device=mt2.0.0.1

/* LIBRARYINVENTORY SCSI AUTO8MMLIB DBBK01 1 101*/

```

In this example, database backup volume DBBK01 was placed in element 1 of the automated library. Then, a comment is added to the device configuration file to identify the location of the volume. Tivoli Storage Manager needs this information to restore the database restore. Comments that no longer apply at the recovery site are removed.

Automated SCSI library at the original site and a manual SCSI library at the recovery site

Ensure that the **DEFINE DRIVE** and **DEFINE LIBRARY** commands in the device configuration file are valid for the new hardware configuration.

About this task

For example, if an automated tape library was used originally and cannot be used at the recovery site, update the device configuration file. Include the **DEFINE LIBRARY** and **DEFINE DRIVE** commands that are needed to define the manual drive to be used. In this case, you must manually mount the backup volumes.

Note: If you are using an automated library, you might also need to update the device configuration file to specify the location of the database backup volume.

Procedure

1. Review the original device configuration file, which describes an automated tape library:

```

/* Device Configuration */

define devclass auto8mm_class devtype=8mm format=drive
mountlimit=2 mountwait=60 mountretention=60
prefix=tsm library=auto8mmlib

define library auto8mmlib libtype=scsi

define drive auto8mmlib 8mm_tape0 element=82 online=yes

define drive auto8mmlib 8mm_tape1 element=83 online=yes

define path server1 auto8mmlib srctype=server desttype=library
device=1b4.0.0.1

define path server1 8mm_tape0 srctype=server desttype=drive
library=auto8mmlib device=mt1.0.0.1

```



```
define path server1 8mm_tape1 srctype=server desttype=drive
library=auto8mm lib device=mt2.0.0.1
```

```
/* LIBRARYINVENTORY SCSI AUTO8MMLIB KEV004 1 101*/
/* LIBRARYINVENTORY SCSI AUTO8MMLIB KEV005 3 101*/
```

2. Review the updated device configuration file when a manual library is used at the recovery site:

```
/* Device Configuration */
```

```
define devclass auto8mm_class devtype=8mm format=drive
mountlimit=1 mountwait=60 mountretention=60 prefix=tsm
library=manual8mm
```

```
define library manual8mm libtype=manual
```

```
define drive manual8mm 8mm_tape0
```

```
define path server1 8mm_tape0 srctype=server desttype=drive
library=manual8mm device=mt1.0.0.1
```

The following changes were made:

- In the device class definition, the library name was changed from AUTO8MMLIB to MANUAL8MM. The device class name remains the same because it is associated with the database backup volumes in the volume history file.
- The manual library, MANUAL8MM, was defined.
- A new drive, 8MM_TAPE0, was defined for the manual library.
- The comments that named the location of volumes in the automated library were removed.

What to do next

After you restore the database, modify the device configuration file in the database. After you start the server, define, update, and delete your library and drive definitions to match your new configuration.

Note: If you are using an automated library, you might need to use the **AUDIT LIBRARY** command to update the server inventory of the library volumes.

Managing copy storage pool volumes and active-data pool volumes at the recovery site

The RECOVERY.VOLUMES.REQUIRED stanza in the recovery plan file identifies the required copy storage pool volumes and active-data pool volumes. All volumes must be available to the restored server.

About this task

The active-data pool volume information is added to the RECOVERY.VOLUMES.REQUIRED stanza in the recovery plan file when the active-data pool volume is in a COURIER or a VAULT state. The restored server uses copy storage pool volumes to satisfy requests (for example, from backup/archive clients) and to restore primary storage pool volumes that were destroyed. If they are available, the server uses active-data pools to restore critical client data.

Attention: Restoring a primary storage pool from an active-data pool might cause some or all inactive files to be deleted from the database. Inactive files might be deleted if the server determines that an inactive file needs to be replaced but cannot find it in the active-data pool.

After the database is restored, you can handle copy storage pool volumes and active-data pool volumes at the recovery site in three ways:

- Mount each volume as requested by Tivoli Storage Manager. If an automated library is used at the recovery site, check the volumes into the library.
- Check the volumes into an automated library before Tivoli Storage Manager requests them.
- Manually place the volumes in an automated library and audit the library to update the server inventory.

If you are using an automated library, you might need to audit the library after the database is restored to update the Tivoli Storage Manager inventory of the volumes in the library.

Chapter 31. Integrating disaster recovery manager and node replication into your disaster recovery strategy

Many tools, architectures, and technologies are available for you to use to implement a disaster recovery strategy. For example, you can use disaster recovery manager (DRM) to vault of offsite volumes, generate a disaster recovery plan, and automate the recovery of the Tivoli Storage Manager server. To maintain the same level of files on two networked servers, you can use Tivoli Storage Manager node replication.

The framework for evaluating disaster recovery strategies consists of the following tiers:

Tier 0 -- Do nothing, no offsite data
Tier 1 -- Offsite vaulting
Tier 2 -- Offsite vaulting with a hot site
Tier 3 -- Electronic vaulting
Tier 4 -- Electronic vaulting to hot site (active secondary site)
Tier 5 -- Two-site, two-phase commit
Tier 6 -- Zero data loss

Figure 119. Tiers of disaster recovery

Each tier corresponds to different recovery times and potentials for data loss. For example, in a tier 1 production site data is typically saved only selectively, and volumes that are stored at an offsite facility can be difficult to track. In addition, recovery time is unpredictable. After a disaster, hardware and software must be restored, and storage volumes must be sent back to the production site.

A tier 6 strategy consists of synchronous remote-copy technologies between peer production sites. Sites with tier 6 protection offer fast recovery times with no loss of data. Data is considered lost only if a transaction started, for example if the user presses Enter, but the transaction request was not completed at both sites.

Plan for a disaster recovery strategy

For optimal results, plan the integration of disaster recovery manager (DRM) and node replication.

Use the following questions as a guide to help you in the planning process:

Cost How much can you afford for your disaster recovery implementation?

Performance

Do you want a low or a high performance disaster recovery solution?

Recovery Time Objective (RTO) and Recovery Point Objective (RPO)

What are your system requirements?

Current disaster recovery strategy

What disaster recovery strategy is implemented in your environment?

Data What data do you need? Categorize and prioritize the data that you require.

When you plan a disaster recovery strategy that might be suitable for your site, consider using DRM and Tivoli Storage Manager node replication for these reasons:

- DRM is an effective tool for managing offsite vaulting. With DRM, you can configure and automatically generate a disaster recovery plan that contains the information, scripts, and procedures that are required to automatically restore the server and recover client data after a disaster.

DRM also manages and tracks the media on which client data is stored, whether the data is on site, in-transit, or in a vault, so that the data can be more easily located if disaster strikes. DRM also generates scripts that assist you in documenting information-technology systems and recovery procedures that you can use, including procedures to rebuild the server.

Use DRM alone to meet the disaster recovery objectives in tier 1, or use it together with other backup-and-recovery tools and technologies in tiers 2, 3 and 4.

- Tivoli Storage Manager node replication meets the objectives of tier 5. After a successful node replication, the target server contains all metadata updates and data that is stored on the source server.

In addition to fast recovery and minimal potential data loss, Tivoli Storage Manager node replication offers the following advantages:

- Node replication is easier to manage than device-based replication. Device-based replication requires that you keep the database and the data it represents synchronized. You manually schedule database backups to match the point in time when the device synchronizes.
- Results for Tivoli Storage Manager operations are reported in terms such as "node names" and "file names." In contrast, device-based replication results are reported in terms of "disks," "sectors," and "blocks."

Tier 0: No disaster recovery capability

Tier 0 is defined as a single-site data center that does not back up data or, if data is backed up, backups are left on site. The data center does not have a disaster recovery plan or backup hardware and software.

In the following figure, the Tivoli Storage Manager server and database, tape libraries, and tapes are in a single facility. If a disaster occurs, recovery time is unpredictable. Tier 0 is not recommended and data might never be recovered.

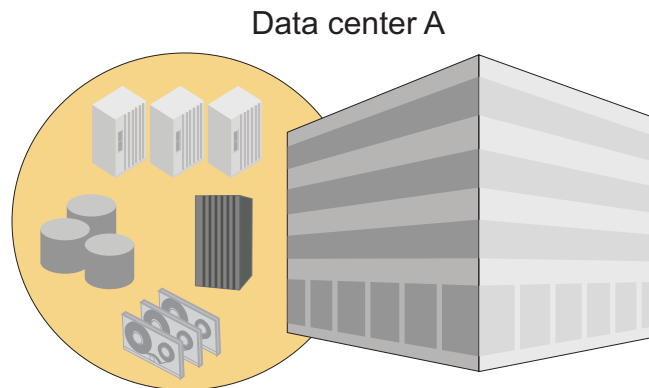


Figure 120. Tier 0: No disaster recovery capability

Tier 1: Offsite vaulting from a single production site

A tier-1 disaster-recovery strategy requires a disaster recovery plan and careful management of volumes that are stored in an offsite facility. To manage offsite volumes, generate a disaster recovery plan, and automate the Tivoli Storage Manager server recovery process, use disaster recovery manager.

As shown in the following figure, storage volumes, such as tape cartridges and media volumes, and are vaulted at an offsite location. Transportation is typically handled by couriers. If a disaster occurs, the volumes are sent back to the production site after hardware and the Tivoli Storage Manager server is restored.

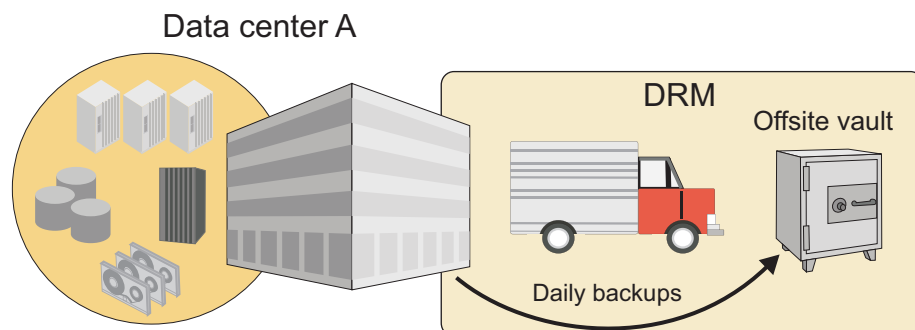


Figure 121. Tier 1: Offsite vaulting from a single production site

Because it is relatively inexpensive, a tier 1 strategy is used by many organizations. However, tier 1 capability is low and recovery time is slow. The recovery time depends on how long it takes to restore the hardware and software and to transport and load tapes into libraries. Before you implement a tier 1 strategy,

consider that an extended recovery time can impact business operations for several months or longer.

Tier 2: Offsite vaulting with a recovery site

A tier-2 disaster-recovery strategy includes a physically separate recovery site in addition to offsite vaulting. The recovery site has the hardware and software that are necessary to recover client data. To manage offsite volumes, generate a disaster recovery plan, and automate the server recovery process, use disaster recovery manager.

Like tier 1 organizations, tier 2 organizations rely on a courier to move storage volumes from the production site to an offsite storage facility. However, if a disaster occurs, tier 1 organizations move the data from the offsite storage facility to the recovery site. A Tier 2 disaster recovery strategy has low capability and is slow. See the following figure:

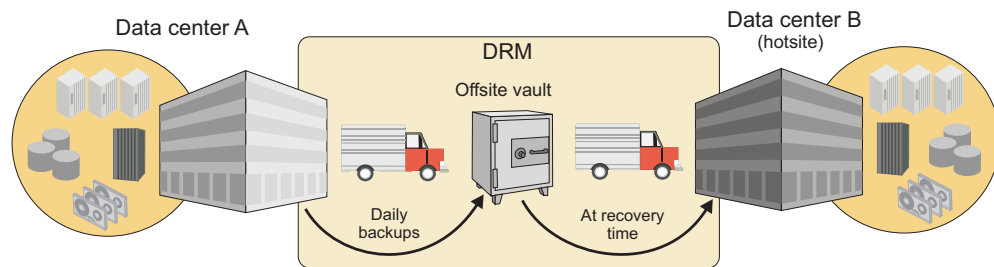


Figure 122. Tier 2: Offsite vaulting with a recovery site

A dedicated recovery site can reduce recovery time compared to the single production site in tier 1. The potential for data loss is also less. However, tier 2 architecture increases the cost of disaster recovery because more hardware and software must be maintained. The recovery site must also have hardware and software that are compatible with the hardware and software at the primary site. For example, the recovery site must have compatible tape devices and Tivoli Storage Manager server software. Before the production site can be recovered, the hardware and software at the recovery site must be set up and running. Transporting the storage volumes to the recovery site also affects recovery time.

Consider using Tivoli Storage Manager server-to-server communications for enterprise configuration of the Tivoli Storage Manager servers at the primary and recovery sites and routing commands from server to server.

Tier 3: Electronic vaulting of critical data

A tier-3 disaster-recovery strategy includes a recovery site with a running Tivoli Storage Manager server. Critical data is vaulted electronically from the production site to the recovery site. Disaster recovery manager is also used for offsite vaulting of non-critical data.

Electronic vaulting moves critical data offsite faster and more frequently than traditional courier methods. Recovery time is reduced because critical data is already stored at the recovery site. The potential for lost or misplaced data is also reduced. However, because the recovery site runs continuously, a tier 3 strategy is relatively more expensive than a tier 1 or a tier 2 strategy.

Critical data can include database backups, infrastructure setup files, and active client-backup data. To vault data electronically, consider using Tivoli Storage Manager virtual volumes over a TCP/IP connection. Data is stored as archive files on the server at the recovery site.

As shown in the following figure, the recovery site is physically separated from the production site. Often, the recovery site is a second data center that is operated by the same organization or by a storage service provider. If a disaster occurs at the primary site, storage media with the non-critical data are transported from the offsite storage facility to the recovery site.

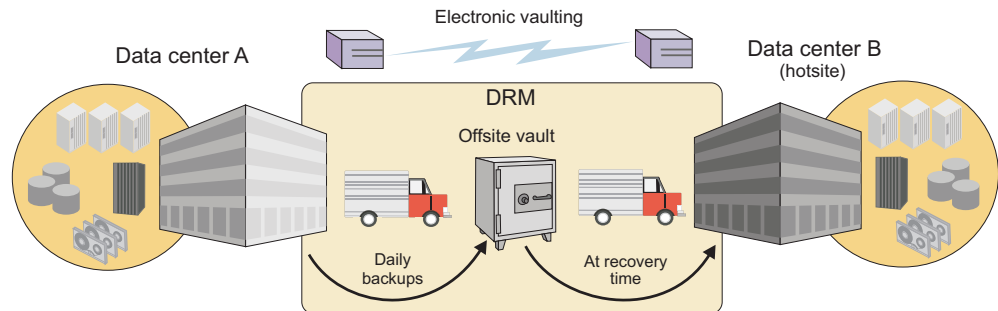


Figure 123. Tier 3: Electronic vaulting of critical data

If you implement a tier 3 strategy, you can use Tivoli Storage Manager server-to-server communications for enterprise configuration of the Tivoli Storage Manager servers and command routing.

Tier 4: Active data management at peer sites

In a tier-4 disaster-recovery strategy, data is actively managed at two physically separate sites. The servers at each site are set up in a peer-to-peer relationship. Critical data is replicated asynchronously. Copies of the data are available at both sites, and each server is able to recover the server at the alternate site. As part of this strategy, backup storage media are vaulted offsite and tracked by using disaster recovery manager.

As shown in the following figure, critical data is replicated the two sites by using high-bandwidth connections and data replication technology, for example, Peer-to-Peer Remote Connection (PPRC). Data is transmitted over long distances by using technologies such as extended storage area network (SAN), Dense Wave Division Multiplexing (DWDM), and IP/WAN channel extenders.

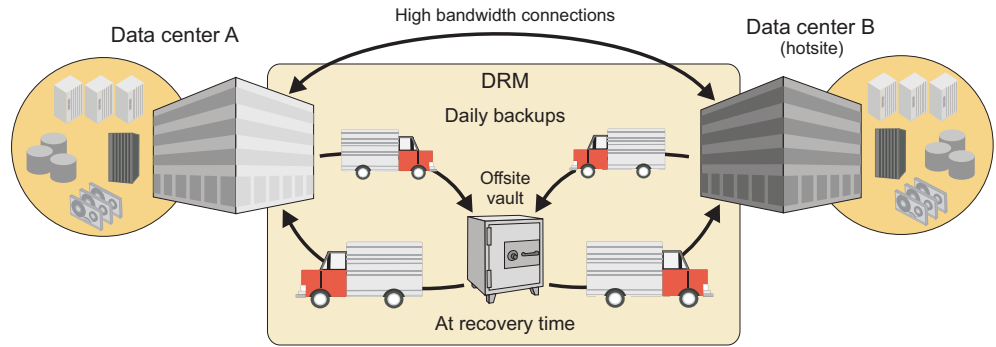


Figure 124. Tier 4: Active data management at peer-to-peer sites

Non-critical backups from both sites are moved to a single offsite storage facility. If a disaster occurs, the backup volumes are recovered by courier from the offsite vault and transported the designated recovery site.

If you implement a tier-4 disaster-recovery strategy, you can use Tivoli Storage Manager server-to-server communications for enterprise configuration of multiple Tivoli Storage Manager servers and command routing.

Recovery time for a tier 4 strategy is faster than the recovery time for a tier 1, tier 2, or tier 3 strategy. Recovery time is faster because hardware, software, and data are available or can be made available at two sites.

Tier 5: Synchronous replication

Tier 5 encompasses all the requirements of tier 4, including peer-peer sites. However, data, including database backups and copy storage pools, is replicated synchronously. Selected data is maintained in image status so that updates are applied to both the local and the remote copies of the database. Data, metadata, and the inventory information for the database are synchronized. The data at both the sites must be updated before the update request is considered successful. Physical media is not vaulted offsite.

As shown in the following figure, data is transmitted continuously between the two sites and synchronized by using high-bandwidth connections such as Peer-to-Peer Remote Copy (PPRC). Transmission over long distances is achieved by using technologies such as extended storage area network (SAN), Dense Wave Division Multiplexing (DWDM), and IP/WAN channel extenders. Copies of critical data are available at both sites, and each server is able to recover the server at the alternate site. With a minimum amount of data to recover, recovery time is reduced significantly.

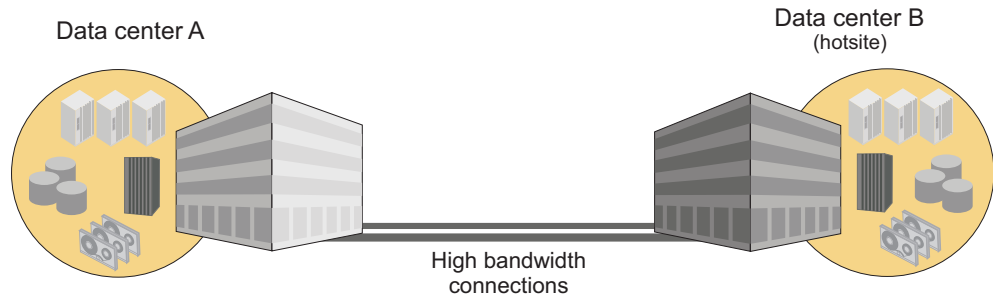


Figure 125. Tier 5: Synchronous replication

Copies of critical data are available at both sites, and each server is able to recover the server at the alternate site. Only the data transactions that are in-flight are lost during a disaster.

If you implement a tier-5 disaster-recovery strategy, you can also use Tivoli Storage Manager server-to-server communications to configure multiple Tivoli Storage Manager servers and command routing.

Tier 6: Synchronous replication with coupling or clustering applications

In Tier 6, local and remote copies of all data are updated synchronously, and dual online storage is used with a full network-switching capability. Systems are coupled with automated failover and failback capabilities when required.

As shown in the following figure, two sites are fully synchronized by using a high-bandwidth connection.

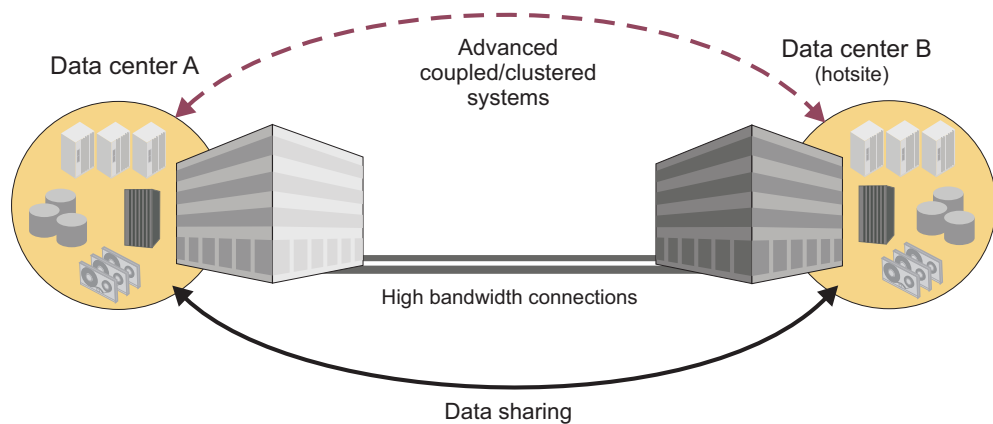


Figure 126. Tier 6: Synchronous replication with coupling or clustering applications

Tier 6 is the most expensive disaster recovery strategy because it requires coupling or clustering applications, additional hardware to support data sharing, and high-bandwidth connections over extended distances. However, this strategy also offers the fastest recovery time and the least amount of data loss. The typical length of time for recovery is normally a few minutes.

Part 7. Appendixes

Appendix A. External media management interface description

The programming interface that IBM Tivoli Storage Manager provides to external media-management programs consists of request description strings that IBM Tivoli Storage Manager sends and response strings that the external program sends.

To use the interface, you must first define an EXTERNAL-type Tivoli Storage Manager library that represents the media manager. You do not define drives, label volumes, or check in media. Refer to your media manager's documentation for that product's setup information and instructions for operational usage.

The details of the request types and the required processing are described in the sections that follow. The request types are:

- Initialization of the external program
- Begin Batch
- End Batch
- Volume Query
- Volume Eject
- Volume Release
- Volume Mount
- Volume Dismount

The responses can be right-padded with any number of white-space characters.

The libraryname passed in a request must be returned in the response. The volume specified in an eject request or a query request must be returned in the response. The volume specified in a mount request (except for 'SCRTCH') must be returned in the response. When 'SCRTCH' is specified in a mount request, the actual volume mounted must be returned.

CreateProcess call

The server creates two anonymous unidirectional pipes and maps them to the stdin and stdout streams during the CreateProcess call. When a standard handle is redirected to refer to a file or a pipe, the handle can only be used by the ReadFile and WriteFile functions.

This precludes normal C functions such as gets or printf. Since the server will never terminate the external program process, it is imperative that the external program recognize a read or write failure on the pipes and exit the process. In addition, the external program should exit the process if it reads an unrecognized command.

The external program may obtain values for the read and write handles using the following calls:

```
readPipe=GetStdHandle(STD_INPUT_HANDLE)
```

and

Processing during server initialization

Ensure that the external media management program works with the server during the server's initialization.

About this task

For each external library defined to the server, the following must occur during server initialization:

Procedure

1. The server loads the external program (CreateProcess) in a newly created process and creates pipes to the external program.
2. The server sends an initialization request description string, in text form, into the standard input (stdin) stream of the external program. The server waits for the response.
3. When the external process completes the request, the process must write an initialization response string, in text form, into its standard output (stdout) stream.
4. The server closes the pipes.
5. When the agent detects that the pipes are closed, it performs any necessary cleanup and calls the stdlib exit routine.

Processing for mount requests

To process the mount request, the server has to complete certain steps.

About this task

The server completes the following steps to process mount requests:

Procedure

1. The server loads the external program in a newly created process and creates pipes to the external program.
2. The server sends an initialization request description string (in text form) into the standard input (stdin) stream of the external program. The server waits for the response.
3. When the external process completes the request, the process must write an initialization response string (in text form) into its standard output (stdout) stream.
4. The server sends the MOUNT request (stdin).
5. The agent sends the MOUNT response (stdout).
6. The agent waits.
7. The server sends the DISMOUNT request (stdin).
8. The agent sends the DISMOUNT response (stdout), performs any necessary cleanup, and calls the stdlib exit routine.

Processing for release requests

To process release requests, the server has to complete certain steps.

About this task

The server completes the following steps to process release requests:

Procedure

1. The server loads the external program in a newly created process and creates pipes to the external program.
2. The server sends an initialization request description string (in text form) into the standard input (stdin) stream of the external program. The server waits for the response.
3. When the external process completes the request, the process must write an initialization response string (in text form) into its standard output (stdout) stream.
4. The server sends the RELEASE request (stdin).
5. The agent sends the RELEASE response (stdout), performs any necessary cleanup, and calls the stdlib exit routine.

Processing for batch requests

Batch processing is done during MOVE MEDIA, MOVE DRMEDIA, and QUERY MEDIA command processing when performed on volumes in external libraries.

About this task

The move commands cause a QUERY to be issued for a volume. If the QUERY indicates that the volume is in the library, a subsequent EJECT for that volume is issued. Because the move commands can match any number of volumes, a QUERY and an EJECT request is issued for each matching volume.

The QUERY MEDIA command results in QUERY requests being sent to the agent. During certain types of processing, Tivoli Storage Manager might need to know if a volume is present in a library. The external agent should verify that the volume is physically present in the library.

Procedure

1. The server loads the external program in a newly created process and creates pipes to the external program.
2. The server sends an initialization request description string (in text form) into the standard input (stdin) stream of the external program. The server waits for the response.
3. When the external process completes the request, the process must write an initialization response string (in text form) into its standard output (stdout) stream.
4. The server sends the BEGIN BATCH request (stdin).
5. The agent sends the BEGIN BATCH response (stdout).
6. The server sends 1 to n volume requests ($n > 1$). These can be any number of QUERY or EJECT requests. For each request, the agent will send the applicable QUERY response or EJECT response.
7. The server sends the END BATCH request (stdin).

8. The agent sends the END BATCH response (stdout), performs any necessary cleanup, and calls the stdlib exit routine.

Error handling

If the server encounters an error during processing, it closes the stdin and stdout streams to the agent exit. The agent detects this when it attempts to read from stdin or write to stdout. If this occurs, the agent performs any necessary cleanup and calls the stdlib exit routine.

If the code for any response (except for EJECT and QUERY) is not equal to SUCCESS, Tivoli Storage Manager does not proceed with the subsequent steps. After the agent sends a non-SUCCESS return code for any response, the agent will perform any necessary cleanup and call the stdlib exit routine.

However, even if the code for EJECT or QUERY requests is not equal to SUCCESS, the agent will continue to send these requests.

If the server gets an error while trying to write to the agent, it will close the pipes, perform any necessary cleanup, and terminate the current request.

Begin batch request

The programming interface includes a begin-batch description string and an external-program response string.

The format of the begin batch request is:

BEGIN BATCH

The format of the external program response is:

BEGIN BATCH COMPLETE, RESULT=*resultCode*

where:

resultCode

One of the following:

- SUCCESS
- INTERNAL_ERROR

End batch request

The end batch request is sent by Tivoli Storage Manager to indicate that no more requests are to be sent by the external library manager for the current process. The external agent must send the end batch response and end by using the stdlib exit routine.

The format of the end batch request is:

END BATCH

The format of the external program response is:

END BATCH COMPLETE, RESULT=*resultCode*

where *resultCode* is SUCCESS or INTERNAL_ERROR.

Volume query request

The programming interface includes a volume-query-request description string and an external-program response string.

The format of the volume query request is:

QUERY *libraryname* *volume*

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volume

Specifies the volume name to be queried.

The format of the external program response is:

QUERY *libraryname* *volume* COMPLETE, STATUS=*statusValue*, RESULT=*resultCode*

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volume

Specifies the volume name queried.

resultCode

One of the following:

- SUCCESS
- LIBRARY_ERROR
- VOLUME_UNKNOWN
- VOLUME_UNAVAILABLE
- CANCELLED
- TIMED_OUT
- INTERNAL_ERROR

If *resultCode* is not SUCCESS, the exit must return *statusValue* set to UNDEFINED.

If *resultCode* is SUCCESS, STATUS must be one of the following values:

- IN_LIBRARY
- NOT_IN_LIBRARY

IN_LIBRARY means that the volume is currently in the library and available to be mounted.

NOT_IN_LIBRARY means that the volume is not currently in the library.

Initialization requests

When the server is started, it sends an initialization request to the external media management program for each EXTERNAL library. The external program processes this request to ensure that the external program is present, functional, and ready to process requests.

If the initialization request is successful, Tivoli Storage Manager informs its operators that the external program reported its readiness for operations. Otherwise, Tivoli Storage Manager reports a failure to its operators.

Tivoli Storage Manager does not attempt any other type of operation with that library until an initialization request has succeeded. The server sends an initialization request first. If the initialization is successful, the request is sent. If the initialization is not successful, the request fails. The external media management program can detect whether the initialization request is being sent by itself or with another request by detecting end-of-file on the stdin stream. When end-of-file is detected, the external program must end by using the `stdlib` exit routine (not the `return` call).

When a valid response is sent by the external program, the external program must end by using the exit routine.

Format of the request:

`INITIALIZE libraryname`

where *libraryname* is the name of the EXTERNAL library as defined to Tivoli Storage Manager.

Format of the external program response:

`INITIALIZE libraryname COMPLETE, RESULT=resultcode`

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

resultcode

One of the following:

- SUCCESS
- NOT_READY
- INTERNAL_ERROR

Volume eject request

The Programming Interface includes a volume-eject-request description string and an external-program response string.

The format of the volume eject request is:

`EJECT libraryname volume 'location info'`

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volume

Specifies the volume to be ejected.

'location info'

Specifies the location information associated with the volume from the Tivoli Storage Manager inventory. It is delimited with single quotation marks. This information is passed without any modification from the Tivoli Storage Manager inventory. The customer is responsible for setting its contents with the appropriate UPDATE MEDIA or UPDATE VOLUME command before the move command is invoked. Set this field to some target location value that will assist in placing the volume after it is ejected from the library. It is suggested that the external agent post the value of this field to the operator.

The format of the external program response is:

EJECT *libraryname volume* COMPLETE, RESULT=*resultCode*

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volume

Specifies the ejected volume.

resultCode

One of the following:

- SUCCESS
- LIBRARY_ERROR
- VOLUME_UNKNOWN
- VOLUME_UNAVAILABLE
- CANCELLED
- TIMED_OUT
- INTERNAL_ERROR

Volume release request

When the server returns a volume to scratch status, the server starts the external media management program, issues a request to initialize, then issues a request to release a volume.

The external program must send a response to the release request. No matter what response is received from the external program, Tivoli Storage Manager returns the volume to scratch. For this reason, Tivoli Storage Manager and the external program can have conflicting information on which volumes are scratch. If an error occurs, the external program should log the failure so that the external library inventory can be synchronized later with Tivoli Storage Manager. The synchronization can be a manual operation.

The format of the request is:

RELEASE *libraryname volname*

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volname

Specifies the name of the volume to be returned to scratch (released).

The format of the external program response is:

```
RELEASE libraryname volname COMPLETE, RESULT=resultcode
```

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volname

Specifies the name of the volume returned to scratch (released).

resultcode

One of the following:

- SUCCESS
- VOLUME_UNKNOWN
- VOLUME_UNAVAILABLE
- INTERNAL_ERROR

Volume mount request

The Tivoli Storage Manager server can mount volumes as needed. Alternatively, volumes can be manually mounted by issuing the **MOUNT** command.

When the server requires a volume mount, the server starts the external media management program, issues a request to initialize, then issues a request to mount a volume. The external program is responsible for verifying that this request is coming from Tivoli Storage Manager and not from an unauthorized system.

The volume that is mounted by the external media management program must be a tape with a standard IBM label that matches the external volume label. When the external program completes the mount request, the program must send a response. If the mount was successful, the external program must remain active. If the mount failed, the external program must end immediately by using the `stdlib` exit routine.

The request must be in the following format:

```
MOUNT libraryname volname accessmode devicetypes timelimit userid  
volumenumber 'location'
```

where

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volname

Specifies the actual volume name if the request is for an existing volume. If a scratch mount is requested, the *volname* is set to `SCRATCH`.

accessmode

Specifies the access mode that is required for the volume. Possible values are READONLY and READWRITE.

devicetypes

Specifies a list of device types that can be used to satisfy the request for the volume and the FORMAT specified in the device class. The most preferred device type must be specified first in the list. Items are separated by commas with no intervening spaces. Possible values are:

- 3590
- 3590E
- 3590H
- 3592
- 4MM_DDS1
- 4MM_DDS1C
- 4MM_DDS2
- 4MM_DDS2C
- 4MM_DDS3
- 4MM_DDS3C
- 4MM_HP_DDS4
- 4MM_DDS4
- 4MM_HP_DDS4C
- 4MM_DDS4C
- 4MM_DDS5C
- 4MM_DDS6C
- 8MM_SAIT
- 8MM_VXA2
- 8MM_VXA3
- 8MM_AITC
- 8MM_AIT
- 8MM_8200
- 8MM_ELIAINT
- 8MM_8500
- 8MM_8500C
- 8MM_8205
- 8MM_8900
- 8MM_M2
- DLT_2000
- DLT_4000
- DLT_7000
- DLT_8000
- SDLT
- SDLT320
- DLT1
- DLT2
- SDLT600
- GENERICTAPE

- LTO_ULTRIUM
- LTO_ULTRIUM2
- LTO_ULTRIUM3
- LTO_ULTRIUM4
- LTO_ULTRIUM5
- LTO_ULTRIUM6
- REMOVABLEFILE
- STK_T9840C
- STK_T9840C_VOLSAFE
- STK_T10000A
- STK_T10000B
- STK_T10000C
- STK_T10000D

timelimit

Specifies the maximum number of minutes that the server waits for the volume to be mounted. If the mount request is not completed within this time, the external manager responds with the result code TIMED_OUT.

userid

Specifies the user ID of the process that needs access to the drive.

volumenumber

The volume number is 1.

'location'

Specifies the value of the location field from the Tivoli Storage Manager inventory. For example, 'Room 617 Floor 2'. One blank character is inserted between the volume number and the left single quotation mark in the location information. If no location information is associated with a volume, nothing is passed to the exit. If no volume information exists, the single quotation marks are not passed. Also, if volume information is passed, the volume might be ejected from the library and it must be returned to the library before the mount operation can proceed. The location information is posted by the agent so that the operator can obtain the volume and return it to the library.

The external program response is in the following format:

MOUNT *libraryname* *volname* COMPLETE ON *specialfile*, RESULT=*resultcode*

where

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volname

Specifies the name of the volume that is mounted for the request.

specialfile

The fully qualified path name of the device special file for the drive in which the volume was mounted. If the mount request fails, set the value to /dev/null.

The external program must ensure that the special file is closed before the response is returned to the server.

resultcode

The result code can be one of the following values:

- SUCCESS
- DRIVE_ERROR
- LIBRARY_ERROR
- VOLUME_UNKNOWN
- VOLUME_UNAVAILABLE
- CANCELLED
- TIMED_OUT
- INTERNAL_ERROR

Volume dismount request

When a successful mount operation completes, the external process must wait for a request to dismount the volume. When the dismount operation completes, the external program must send a response to the server.

After the dismount response is sent, the external process ends immediately by using the `stdlib` exit routine.

Format of the request:

`DISMOUNT libraryname volname`

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volname

Specifies the name of the volume to be dismounted.

Format of the external program response:

`DISMOUNT libraryname volname COMPLETE, RESULT=resultcode`

where:

libraryname

Specifies the name of the EXTERNAL library as defined to Tivoli Storage Manager.

volname

Specifies the name of the volume dismounted.

resultcode

One of the following:

- SUCCESS
- DRIVE_ERROR
- LIBRARY_ERROR
- INTERNAL_ERROR

Appendix B. User exit and file exit receivers

The data structure of the user exit receivers applies to the file exit receivers. To use one of these exits with Tivoli Storage Manager, you must specify the corresponding server option (FILEEXIT, FILETEXTEXIT, or USEREXIT) in the server options file.

The samples for the C, H, and make files are shipped with the server code in the \win32app\ibm\adsm directory.

You can also use Tivoli Storage Manager commands to control event logging. For details, see “Logging IBM Tivoli Storage Manager events to receivers” on page 832 and *Administrator's Reference*.

Sample user-exit declarations

USEREXITSAMPLE.H contains declarations for a user-exit program.

Figure 127. Sample user exit declarations

```
/*
 * Name:          USEREXITSAMPLE.H
 * Description:    Declarations for a user exit
 * Environment:    WINDOWS NT
 */

#ifndef _H_USEREXITSAMPLE
#define _H_USEREXITSAMPLE

#include <stdio.h>
#include <sys/types.h>

/***** Do not modify below this line *****/

#define BASE_YEAR      1900

typedef short  int16;
typedef int    int32;

#ifndef uchar
typedef unsigned char uchar;
#endif
/* DateTime Structure Definitions - TSM representation of a timestamp */

typedef struct
{
    uchar   year; /* Years since BASE_YEAR (0-255) */
    uchar   mon;  /* Month (1 - 12) */
    uchar   day;  /* Day (1 - 31) */
    uchar   hour; /* Hour (0 - 23) */
    uchar   min;  /* Minutes (0 - 59) */
    uchar   sec;  /* Seconds (0 - 59) */
} DateTime;

/*
 * Some field size definitions (in bytes)
 */

#define MAX_SERVERNAME_LENGTH  64
#define MAX_NODE_LENGTH       64
```

```

#define MAX_COMMNAME_LENGTH 16
#define MAX_OWNER_LENGTH 64
#define MAX_HL_ADDRESS 64
#define MAX_LL_ADDRESS 32
#define MAX_SCHED_LENGTH 30
#define MAX_DOMAIN_LENGTH 30
#define MAX_MSGTEXT_LENGTH 1600

/*****
 * Event Types (in elEventRecvData.eventType) *
 *****/

#define TSM_SERVER_EVENT      0x03 /* Server Events */
#define TSM_CLIENT_EVENT     0x05 /* Client Events */

/*****
 * Application Types (in elEventRecvData.applType) *
 *****/

#define TSM_APPL_BACKARCH    1 /* Backup or Archive client */
#define TSM_APPL_HSM         2 /* Space manage client */
#define TSM_APPL_API         3 /* API client */
#define TSM_APPL_SERVER     4 /* Server (ie. server to server) */

/*****
 * Event Severity Codes (in elEventRecvData.sevCode) *
 *****/

#define TSM_SEV_INFO         0x02 /* Informational message. */
#define TSM_SEV_WARNING      0x03 /* Warning message. */
#define TSM_SEV_ERROR        0x04 /* Error message. */
#define TSM_SEV_SEVERE       0x05 /* Severe error message. */
#define TSM_SEV_DIAGNOSTIC   0x06 /* Diagnostic message. */
#define TSM_SEV_TEXT         0x07 /* Text message. */

/*****
 * Data Structure of Event that is passed to the User-Exit. *
 * The same structure is used for a file receiver *
 *****/

typedef struct evRdata
{
    int32    eventNum;           /* the event number. */
    int16    sevCode;           /* event severity. */
    int16    applType;          /* application type (hsm, api, etc) */
    int32    sessId;            /* session number */
    int32    version;           /* Version of this structure (1) */
    int32    eventType;         /* event type */
                                /* (TSM_CLIENT_EVENT, TSM_SERVER_EVENT) */
    DateTime timeStamp;         /* timestamp for event data. */
    uchar    serverName[MAX_SERVERNAME_LENGTH+1]; /* server name */
    uchar    nodeName[MAX_NODE_LENGTH+1]; /* Node name for session */
    uchar    commMethod[MAX_COMMNAME_LENGTH+1]; /* communication method */
    uchar    ownerName[MAX_OWNER_LENGTH+1]; /* owner */
    uchar    hlAddress[MAX_HL_ADDRESS+1]; /* high-level address */
    uchar    llAddress[MAX_LL_ADDRESS+1]; /* low-level address */
    uchar    schedName[MAX_SCHED_LENGTH+1]; /* sched name if applicable */
    uchar    domainName[MAX_DOMAIN_LENGTH+1]; /* omain name for node */
    uchar    event[MAX_MSGTEXT_LENGTH]; /* event text */
} elEventRecvData;

/*****
 * Size of the Event data structure *
 *****/

#define ELEVENTRECVDATA_SIZE      sizeof(elEventRecvData)

```

```

/*****
 * User Exit EventNumber for Exiting *
 *****/

#define USEREXIT_END_EVENTNUM      1822 /* Only user-exit receiver to exit*/
#define END_ALL_RECEIVER_EVENTNUM 1823 /* All receivers told to exit */

/*****
 *** Do not modify above this line. ***
 *****/

/***** Additional Declarations *****/

#endif

```

Sample user exit program

USEREXITSAMPLE.C is a sample user-exit program invoked by the Tivoli Storage Manager server.

Figure 128. Sample user exit program

```

/*****
 * Name:          USEREXITSAMPLE.C
 * Description:   Example user-exit program that is invoked by
 *               the TSM V3 Server
 * Environment:   *****/
 *               ** This is a platform-specific source file **
 *               ** versioned for:  "WINDOWS NT"           **
 *               *****/
 *****/

#include <stdio.h>
#include <stdlib.h>
#include <sys/types.h>
#include <io.h>
#include <windows.h>
#include "USEREXITSAMPLE.H"

/*****
 *** Do not modify below this line. ***
 *****/

#define DllExport __declspec(dllexport)

/*****
 *** DLL MAIN ***
 *****/

BOOL WINAPI
DllMain(HMODULE hMod, DWORD fdwReason, LPVOID lpvReserved)
{
return(TRUE);
} // End of WINAPI

/*****
 * Procedure:  adsmV3UserExit
 * If the user-exit is specified on the server, a valid and
 * appropriate event will cause an elEventRecvData structure
 * (see USEREXITSAMPLE.H) to be passed to a procedure named
 * adsmV3UserExit that returns a void.
 *
 * This procedure can be named differently:
 * -----

```

```

* The procedure name must match the function name specified in
* the server options file (4th arg). The DLL name generated from
* this module must also match in the server options file
* (3rd arg).
* INPUT : A (void *) to the elEventRecvData structure
* RETURNS: Nothing
*****/

DllExport void adsmV3UserExit( void *anEvent )
{
/* Typecast the event data passed */
elEventRecvData *eventData = (elEventRecvData *)anEvent;

/*****
*** Do not modify above this line. ***
*****/

fprintf(stderr,"NT UserExit: Got event

if( ( eventData->eventNum == USEREXIT_END_EVENTNUM ) ||
    ( eventData->eventNum == END_ALL_RECEIVER_EVENTNUM ) )
{
/* Server says to end this user-exit. Perform any cleanup, *
 * but do NOT exit() !!!                                     */
return;
}

/* Field Access: eventData->.... */
/* Your code here ... */

/* Be aware that certain function calls are process-wide and can cause
 * synchronization of all threads running under the TSM Server process!
 * Among these is the system() function call. Use of this call can
 * cause the server process to hang and otherwise affect performance.
 * Also avoid any functions that are not thread-safe. Consult your
 * system's programming reference material for more information.
 */

return; /* For picky compilers */
} /* End of adsmV3UserExit() */

```

Readable text file exit (FILETEXTEXIT) format

If you specify the readable text file exit (FILETEXTEXIT), each logged event is written to a fixed-size, readable line.

The following table presents the format of the output. Fields are separated by blank spaces.

Table 100. Readable text file exit (FILETEXTEXIT) format

Column	Description
0001-0006	Event number (with leading zeros)
0008-0010	Severity code number
0012-0013	Application type number
0015-0023	Session ID number
0025-0027	Event structure version number
0029-0031	Event type number
0033-0046	Date/Time (YYYYMMDDHHmmSS)

Table 100. Readable text file exit (FILETEXTEXIT) format (continued)

Column	Description
0048-0111	Server name (right padded with spaces)
0113-0176 ¹	Node name
0178-0193 ¹	Communications method name
0195-0258 ¹	Owner name
0260-0323 ¹	High-level internet address (n.n.n.n)
0325-0356 ¹	Port number from high-level internet address
0358-0387 ¹	Schedule name
0389-0418 ¹	Domain name
0420-2019	Event text
2020-2499	Unused spaces
2500	New line character
¹ Columns 113 - 418 contain data only for events that originate in a client or in another Tivoli Storage Manager server. Otherwise, columns 113 - 418 contain blanks.	

Appendix C. Accessibility features for the Tivoli Storage Manager product family

Accessibility features help users who have a disability, such as restricted mobility or limited vision to use information technology products successfully.

Accessibility features

The IBM Tivoli Storage Manager family of products includes the following accessibility features:

- Keyboard-only operation using standard operating-system conventions
- Interfaces that support assistive technology such as screen readers

The command-line interfaces of all products in the product family are accessible.

Tivoli Storage Manager Operations Center provides the following additional accessibility features when you use it with a Mozilla Firefox browser on a Microsoft Windows system:

- Screen magnifiers and content zooming
- High contrast mode

The Operations Center and the Tivoli Storage Manager Server can be installed in console mode, which is accessible.

The Operations Center help system is enabled for accessibility. For more information, click the question mark icon on the help system menu bar.

Vendor software

The Tivoli Storage Manager product family includes certain vendor software that is not covered under the IBM license agreement. IBM makes no representation about the accessibility features of these products. Contact the vendor for the accessibility information about its products.

IBM and accessibility

See the IBM Human Ability and Accessibility Center (<http://www.ibm.com/able>) for information about the commitment that IBM has to accessibility.

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.*

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

*Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan*

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who want to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

*IBM Corporation
2Z4A/101
11400 Burnet Road
Austin, TX 78758
U.S.A.*

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work, must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. _enter the year or years_.

If you are viewing this information in softcopy, the photographs and color illustrations may not appear.

Trademarks

IBM, the IBM logo, and [ibm.com](http://www.ibm.com)® are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at “Copyright and trademark information” at <http://www.ibm.com/legal/copytrade.shtml>.

Adobe and PostScript are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.



Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

LTO and Ultrium are trademarks of HP, IBM Corp. and Quantum in the U.S. and other countries.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Privacy policy considerations

IBM Software products, including software as a service solutions, (“Software Offerings”) may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering’s use of cookies is set forth below.

This Software Offering does not use cookies or other technologies to collect personally identifiable information.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies

and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at <http://www.ibm.com/privacy> and IBM's Online Privacy Statement at <http://www.ibm.com/privacy/details> in the section entitled "Cookies, Web Beacons and Other Technologies," and the "IBM Software Products and Software-as-a-Service Privacy Statement" at <http://www.ibm.com/software/info/product-privacy>.

Glossary

A glossary is available with terms and definitions for the IBM Tivoli Storage Manager family of products.

See Tivoli Storage Manager glossary (http://www.ibm.com/support/knowledgecenter/SSGSG7_7.1.1/com.ibm.itsm.ic.doc/glossary.html).

To view glossaries for other IBM products, see <http://www.ibm.com/software/globalization/terminology/>.

Index

Special characters

\$\$CONFIG_MANAGER\$\$ 714

Numerics

3480 tape drive
 cleaner cartridge 181
 mixing drive generations 200
3490 tape drive
 cleaner cartridge 181
 mixing drive generations 200
3494 automated library device 92, 108
3494 library 92
 configuration with a single drive device 110
 defining devices 118
3590 tape drive
 defining device class 187, 194, 195
 device support 109, 143
3592 drives and media
 as element of storage hierarchy 27
 cleaning 179
 data encryption 168, 202, 526
 defining device class 187
 enabling for WORM media 147
 mixing drive generations 200
4mm tape device support 195
7.1 server 665
8mm tape device support 195

A

About this publication xiii
absolute mode, description of 496
access authority, client 455, 456
access mode, volume
 changing 272
 description 273
 determining for storage pool 258, 423
access, managing 855, 870
accessibility features 1131
accounting record
 description of 831
 monitoring 831
accounting variable 831
ACSL (Automated Cartridge System Library Software)
 StorageTek library 61
 configuring 121
 mixing 3592 drive generations 200
ACTIVATE POLICYSET command 502
active data 966
active files, storage-pool search order 426
active log 3, 671, 902
 description 638
 increasing the size 671
 move to another directory 677
 out of space 671
 space requirements 645
active log mirror 902
 description 639

active log size
 reducing the size 672
ACTIVE policy set
 creating 502
 replacing 486
active-data pool
 auditing volumes in 914
 backup-set file source 533
 collocation on 379
 defining 422
 example set up 283
 export file source 741, 750, 751
 import operations 760
 overview 26, 279
 reclamation of 387
 simultaneous-write function 346
 specifying in policy definition 493
 storage pool search-and-selection order 426
ACTIVELOGDIRECTORY server option 671, 677
ACTIVELOGSIZE 672
ACTIVELOGSIZE server option 671, 672
activity log
 description of 828
 logging events to 834
 monitoring 828
 querying 829
 setting size limit 830
 setting the retention period 830
adding space to the database 663
administrative client
 viewing information after IMPORT or EXPORT 765
administrative clients
 preventing from accessing the server 738
administrative commands 665
 ACCEPT DATE 603
 AUDIT LIBRARY 151
 AUDIT LICENSE 589
 AUDIT VOLUME 918
 BACKUP NODE 245, 246
 BEGIN EVENTLOGGING 834
 CANCEL PROCESS 604
 CANCEL REQUEST 158
 CANCEL RESTORE 481
 CANCEL SESSION 477
 CHECKIN LIBVOLUME 144
 CHECKOUT LIBVOLUME 150
 CLEAN DRIVE 177
 COMMIT 631
 COPY ACTIVATEDATA 279, 426
 COPY CLOPTSET 475
 COPY SCHEDULE 560
 COPY SCRIPT 625
 COPY SERVERGROUP 724
 DEFINE ASSOCIATION 552
 DEFINE BACKUPSET 538
 DEFINE CLIENTACTION 573
 DEFINE CLIENTOPT 573
 DEFINE CLOPTSET 473
 DEFINE COPYGROUP 494, 500
 DEFINE DATAMOVER 192, 240

administrative commands (continued)

DEFINE DEVCLASS
 3592 200
 FILE device classes 204
 LTO device classes 208
 REMOVEABLEFILE device classes 203
 SERVER device classes 211
 tape device classes 195
 VOLSAFE device classes 212
 DEFINE DRIVE 190
 DEFINE GRPMEMBER 723
 DEFINE LIBRARY 189
 DEFINE PATH 193
 DEFINE PROFASSOCIATION 701, 702
 DEFINE PROFILE 701
 DEFINE SCHEDULE 613
 DEFINE SCRIPT 619
 DEFINE SERVER 688, 720, 726
 DEFINE SERVERGROUP 723
 DEFINE STGPOOL 261, 263, 275, 276
 DEFINE SUBSCRIPTION 712
 DEFINE VIRTUALFSMAPPING 252
 DEFINE VOLUME 28, 271
 DELETE ASSOCIATION 563
 DELETE BACKUPSET 542
 DELETE DRIVE 182
 DELETE EVENT 565
 DELETE GRPMEMBER 725
 DELETE LIBRARY 166
 DELETE PROFASSOCIATION 706
 DELETE PROFILE 708
 DELETE SCHEDULE 560
 DELETE SCRIPT 627
 DELETE SERVER 694
 DELETE SERVERGROUP 725
 DELETE STGPOOL 427
 DELETE SUBSCRIBER 718
 DELETE SUBSCRIPTION 708, 714
 DELETE VOLHISTORY 609
 DELETE VOLUME 428, 429
 DISABLE EVENTS 833
 DISABLE SESSIONS 479
 DISMOUNT VOLUME 159
 DSMSEV DISPLAY DBSPACE 636
 DSMSEV DISPLAY LOG 636
 ENABLE EVENTS 833
 ENABLE SESSIONS 479
 END EVENTLOGGING 834
 EXPORT ADMIN 735
 EXPORT NODE 749
 EXPORT POLICY 749
 EXPORT SERVER 749
 EXTEND DBSPACE 660
 GENERATE BACKUPSET 534
 HALT 601
 HELP 610
 IMPORT 764, 765
 IMPORT ADMIN 752
 IMPORT NODE 752, 761
 IMPORT POLICY 752
 IMPORT SERVER 752, 761
 LOCK ADMIN 876
 LOCK NODE 449
 LOCK PROFILE 705, 706
 MACRO 152
 MOVE DATA 414
 MOVE MEDIA 152

administrative commands (continued)

MOVE NODEDATA 419
 NOTIFY SUBSCRIBERS 706
 PING SERVER 726
 PREPARE 1079
 QUERY ACTLOG 829
 QUERY BACKUPSETCONTENTS 541
 QUERY CONTENT 401
 QUERY COPYGROUP 759
 QUERY DB 636
 QUERY DBSPACE 636
 QUERY DEVCLASS 215
 QUERY DRIVE 166
 QUERY DRMSTATUS 1067
 QUERY ENABLED 847
 QUERY EVENT 553
 QUERY FILESPACE 471
 QUERY LIBRARY 164
 QUERY LICENSE 589
 QUERY MEDIA 152
 QUERY MOUNT 157
 QUERY NODE 453
 QUERY NODEDATA 411
 QUERY OCCUPANCY
 backed-up, archived, and space-managed files 412
 client file spaces 410
 client nodes 410
 device classes 411
 storage pools 411
 QUERY OPTION 822
 QUERY PROCESS 417
 QUERY REQUEST 158
 QUERY RESTORE 481
 QUERY SCHEDULE 553
 QUERY SCRIPT 625
 QUERY SERVERGROUP 724
 QUERY STGPOOL 394, 405, 755
 QUERY SUBSCRIPTION 713
 QUERY VOLUME 397, 418
 RECONCILE VOLUMES 733
 REGISTER ADMIN 871
 REGISTER LICENSE 588
 REMOVE ADMIN 875
 REMOVE NODE 450
 RENAME ADMIN 874
 RENAME FILESPACE 763
 RENAME NODE 449
 RENAME SCRIPT 626
 RENAME SERVERGROUP 724
 RENAME STGPOOL 422
 REPLY 158
 RESTORE DB 602
 RESTORE NODE 245, 246
 RESTORE STGPOOL 942
 ROLLBACK 631
 RUN 627
 SELECT 823
 SET ACCOUNTING 831
 SET AUTHENTICATION 888
 SET CLIENTACTDURATION 573
 SET CONFIGMANAGER 697, 700
 SET CONFIGREFRESH 713
 SET CONTEXTMESSAGING 833
 SET CROSSDEFINE 689, 692
 SET DBREPORTMODE 636
 SET EVENTRETENTION 565, 618
 SET INVALIDPWLIMIT 886

- administrative commands (*continued*)
 - SET LICENSEAUDITPERIOD 589
 - SET MAXCMDRETRIES 572
 - SET MAXSCHEDSESSIONS 569
 - SET MINPWLENGTH 888
 - SET PASSEX 885
 - SET QUERYSCHEDPERIOD 571
 - SET RANDOMIZE 570
 - SET REGISTRATION 435
 - SET RETRYPERIOD 572
 - SET SCHEDMODES 567
 - SET SERVERHLADDRESS 689, 692
 - SET SERVERLLADDRESS 689, 692
 - SET SERVERNAME 688, 692, 822
 - SET SERVERPASSWORD 688, 689, 692
 - SET SUBFILE 542
 - SET SUMMARYRETENTION 827
 - SETOPT 609
 - UNLOCK PROFILE 705, 706
 - UPDATE ADMIN 871
 - UPDATE ARCHIVE 546
 - UPDATE BACKUPSET 540
 - UPDATE CLIENTOPT 475
 - UPDATE CLOPTSET 475
 - UPDATE COPYGROUP 494, 500
 - UPDATE DEVCLASS 195
 - UPDATE DRIVE 167
 - UPDATE LIBRARY 165
 - UPDATE LIBVOLUME 149
 - UPDATE NODE 448
 - UPDATE SCHEDULE 613
 - UPDATE SCRIPT 624
 - UPDATE SERVER 694
 - UPDATE SERVERGROUP 724
 - UPDATE STGPOOL 152
 - UPDATE VOLUME 153, 271
 - VALIDATE LANFREE 135
- administrative privilege class
 - granting authority 857
 - reducing 874
 - revoking all 874
- administrative user ID
 - creating automatically 457
 - description of 434
 - preventing automatic creation of 458
- administrative web interface
 - description 18
- administrative Web interface
 - limitation of browser for script definitions 619
- administrator
 - locking 876
 - managing registration 587
 - querying 872
 - registering 871
 - removing 875
 - renaming 874
 - restrictions when registering 871
 - unlocking 876
 - updating 871, 874
 - viewing information about 872
- administrators
 - managing 870
- aggregates
 - controlling the size of 276
 - estimating size 400
 - RECONSTRUCT parameter 418
 - reconstructing 35, 388, 418
- aggregates (*continued*)
 - viewing information about 403, 410
- alert monitoring 577
 - configuration tasks 579
 - overview 578
- alert state 578
- alert triggers 579
- alias name, device 87
- ANR9999D message 833
- application client
 - adding node for 434
 - policy for 509
- application program interface (API)
 - client, registering 438
 - compression option 438
 - deletion option 438
 - registering to server 438
 - simultaneous-write function, version support for 348
- ARCHFAILOVERLOGDIRECTORY server option 673
- archive 5
 - allowing while file changes 500
 - backup set, uses for 8, 11
 - determining storage usage 412
 - directory 545
 - increasing throughput using DSMMAXSG utility 138
 - instant 7, 11
 - package 545
 - policy, defining 503
 - policy, introduction 36
 - process description 490
 - storage usage, minimizing 545, 546
 - storage usage, reducing 545, 546
 - uses for 7, 11
- archive copy group
 - defining 500
 - description of 36
- archive data
 - expiration 516
 - managing 544
 - protection 516
- archive failover log 902
 - description 640
 - move to another directory 677
- archive log 3, 671, 902
 - compress 672
 - description 640
 - move to another directory 677
 - space requirements 645
- archiving
 - file 39, 490
 - file management 39
 - FILE-type volume, archiving many small objects to 205
- ASCII restriction for browser script definition 619
- association, client with schedule
 - defining 552
 - deleting 563
- association, file with management class 43, 44
- association, object with profile
 - administrative command schedule 705
 - administrator 701, 717
 - client option set 702
 - deleting 706
 - policy domain 703
 - script 702
- AUDIT LIBRARY command 151
- AUDIT LICENSE command 589
- AUDIT VOLUME command 912, 918

- auditing
 - LDAP directory server 940
 - library's volume inventory 151
 - license, automatic by server 589
 - multiple volumes in sequential access storage pool 919
 - single volume in sequential access storage pool 920
 - volume in disk storage pool 918
 - volume, reasons for 912
 - volumes by date 920
 - volumes by storage pool 920
- authority
 - client access 456
- AUTOFSRENAME parameter 464
- AUTOLABEL parameter for tape volumes 143
- Automated Cartridge System Library Software (ACSL)
 - StorageTek library
 - configuring 121
 - mixing 3592 drive generations 200
- automated library device
 - adding, using commands 103
 - auditing 151
 - checking in media 144
 - managing media 149
 - overflow location 258
 - replacing tape drive 173
 - reusing media 155
 - scratch and private volumes 267
 - updating 165
 - volume inventory 142
- automated SCSI library 1098, 1099
- automatic deployment 448
- automatic failover
 - overview 946
- automatic failover scenario 995
- automatically renaming file spaces 464
- automating
 - client operations 550
 - server operations 612
- awk script 1043

B

- background processes 603
- Backing up 806
- Backing up and restoring Tivoli Monitoring for Tivoli Storage Manager
 - DB2
 - backing up for Tivoli Monitoring 796
- Backing up DB2 warehouses
 - Windows systems 798
- Backing up Tivoli Monitoring for Tivoli Storage Manager
 - DB2 797
- Backing up warehouses
 - Windows systems 801
- backup 5
 - amount of space used by client 412
 - comparison of types 9, 12
 - default policy 484
 - defining criteria for client files 503
 - differential, for NAS node 8, 71
 - file 38, 488, 489
 - file management 38
 - file while open 495
 - FILE-type volume, backing up small objects to 205
 - frequency for file 496
 - full, for NAS node 71
 - group 10

- backup (*continued*)
 - increasing throughput using DSMMAXSG utility 138
 - incremental 38, 488
 - logical volume 490
 - NAS file server 229
 - NAS file server to Tivoli Storage Manager server 248
 - NAS filer to Tivoli Storage Manager server 247
 - policy 36
 - selective 38, 489
 - SnapMirror to Tape 253
 - snapshot, using hardware 7, 10
 - subfiles, server set-up 47, 542
 - types available 8, 12
- BACKUP command 676
- backup copy group
 - defining 494
 - description of 36
 - frequency 488
 - mode 488
 - serialization 488
- BACKUP DEVCONFIG command 904
- backup media
 - move 1086
- backup period, specifying for incremental 569
- backup set
 - adding subfiles to 544
 - deleting 542
 - description of 534
 - displaying contents of 541
 - example of generating 536
 - generating 534
 - how the server manages and tracks 539
 - media, selecting 535
 - moving to other servers 538
 - OST extension on 535
 - selecting a name for 535
 - selecting retention period for 539
 - suggested usage 8, 47
 - updating 540
 - use as archive 11, 17, 47
- backup sets
 - displaying information 540
 - generate to a point-in-time 536
 - generate with multiple data types 537
- backup sets, managing 539
- BACKUP VOLHISTORY command 903
- backup volumes
 - create single set 537
- backup-archive client
 - operations summary 8
 - performing operations for 525, 559, 566
 - policy for 40
 - registering node 434
 - scheduling operations for 550
 - unified logon 890
 - using to back up NAS file server 222, 246
- backups
 - server inventory 12
 - storage pool 12
- base file 542
- batch file, scheduling on client 554
- binding a file to a management class 43
- browser, limited to ASCII entry for script definition 619

C

- cache
 - deleting files from 299, 414
 - description of 29
 - disabling for disk storage pools 298
 - effect on performance 298
 - effect on statistics 299
 - enabling for disk storage pools 258, 298
 - monitoring utilization on disk 408
- calculate replication 964
- CANCEL PROCESS command 406, 604
- CANCEL RESTORE command 481
- CANCEL SESSION command 477
- capacity planning
 - database space requirements
 - estimates based on number of files 641
 - estimates based storage pool capacity 643
 - starting size 641
 - recovery log space requirements
 - active and archive logs 645
 - active log mirror 657
 - archive failover log 658
 - archive log space for database reorganization 657
- capacity, tape 216
- cartridge
 - cleaner cartridge 181
 - mixing drive generations 200
- categories, 349X library 108
- CD-ROM media (REMOVABLEFILE device class) 101
- Celerra
 - file server integrated checkpoints 254
- Centera libraries 95
- Centera SDK
 - installing 95
- Centera storage device
 - concurrent access 214
 - overview 65
 - restore improve 214
 - unsupported server operations 214
- CENTERA storage device
 - unsupported functions 261
- Centera storage pool, backing up 910
- central monitoring 683
- Central Processing Unit
 - CPU 590
- central scheduling
 - client operations 525, 549, 559, 566
 - controlling the workload 569
 - coordinating 566
 - description of 49, 549
 - server operations 612
- certificate
 - adding to the key database 862
- changing date and time on server 603
- changing hostname 607
- characteristics, machine 1075
- check in
 - cleaner cartridge 180
 - library volume 144
 - setting a time interval for volume 199
 - VolSafe-enabled volumes 212
- CHECKIN LIBVOLUME command 144
- checking the log file generated by processed schedules 565
- checklist for DRM project plan 1036
- CHECKOUT LIBVOLUME command 150
- class, device
 - 3590 194, 195
 - 3592 195
 - 4MM 194, 195
 - 8MM 194, 195
 - amount of space used 411
 - CENTERA 65
 - defining 194
 - DISK 194
 - DLT 194, 195
 - ECARTRIDGE 195
 - FILE 194
 - for devices using native Windows device driver 100
 - FORMAT parameter 197
 - GENERICTAPE 100, 194, 195
 - LTO 208
 - overview 106
 - REMOVABLEFILE 203
 - requesting information about 215
 - selecting for import and export 748
 - sequential 195
 - SERVER 194, 195, 728
 - StorageTek devices 195, 212
 - tape 195, 203
 - Ultrium, LTO 195
 - updating 195, 203
 - VOLSAFE 212
 - WORM 194, 195
- class, policy privilege
 - description 870
 - revoking 873
- class, storage privilege
 - reducing 873
- CLEAN DRIVE command 177
- cleaner cartridge
 - checking in 180
 - operations with 181
- CLI 577
- client
 - access user ID 456
 - API (application program interface) 438
 - application client 509
 - how to protect 7
 - operations summary 8
 - options file 439
 - restore without primary volumes available 938
 - Tivoli Storage Manager for Space Management (HSM client) 40
 - using to back up NAS file server 229, 246
- client backup
 - data movement overview 15
- client file
 - allowing archive while changing 484
 - allowing backup while changing 484, 495
 - archive package 545
 - associating with management class 43, 44
 - damaged 938
 - delaying migration of 292
 - deleting 428
 - deleting from a storage pool 426
 - deleting from cache 299
 - deleting when deleting a volume 428
 - duplication when restoring 938
 - eligible for archive 484, 487
 - eligible for backup 484, 487
 - eligible for expiration 486
 - eligible for space management 491
 - how IBM Tivoli Storage Manager stores 276

- client file (*continued*)
 - on a volume, querying 401
 - server migration of 285
- client migration 491
- client node
 - adding 433
 - agent 451
 - amount of space used 410
 - creating backup sets for 534
 - file spaces, QUERY OCCUPANCY command 410
 - finding tapes used by 404
 - immediate processing 573
 - importing 761
 - locking 449
 - managing registration 434, 445, 587
 - options file 439
 - performing operations for 525, 559, 566
 - privilege class for scheduling operations for 551
 - proxy node relationships 450
 - querying 453
 - reducing archive packages for 546
 - registering 438
 - removing 450
 - renaming 449
 - scheduling operations for 550
 - setting password authentication 888
 - setting scheduling mode 568
 - setting up subfile backups 543
 - target 451
 - unlocking 449
 - updating 448
 - viewing information about 453
- client nodes
 - defining 460
 - file spaces 460
 - managing 46, 445
 - managing across a firewall 446
 - prevent from accessing server 738
- client operations
 - management of 46
 - scheduling 49
- client option
 - TXNBYTELIMIT 277
 - VIRTUALMOUNTPOINT 459
- client option set
 - adding client options to 474
 - assigning clients to 475
 - copying 475
 - creating 474
 - deleting 475
 - deleting an option from 475
 - for NAS node 229
 - requesting information about 475
 - updating description for 475
- client option set, creating 473
- client options
 - UNIX and Linux 440
- client options file
 - create 440
 - update 440
- client point-in-time restore, enabling 513
- client queries to the server, setting the frequency 571
- client recovery 1095
- client recovery media 1078
- client recovery scenario 1095
- client reports 782
- client restartable restore session
 - canceling 481
 - interrupting, active 481
 - requesting information about 481
- client schedule
 - define 551
- client session
 - canceling 477
 - DSMC loop 476
 - held volume 476
 - managing 476
 - querying 476, 820
 - viewing information about 476, 820
- client system options file 438
- client-polling scheduling 567, 571
- client, application
 - adding node for 434
 - policy for 509
- clients
 - adding through the command line client 442
- closed registration
 - description 435
 - process 435
 - setting 435
- cluster 1028, 1030
 - administrators tasks 1029
 - configuration 1028, 1029
 - configuration considerations 1024
 - managing SCSI tape failover 1031
 - server migration 1029
 - setup 1027
- cluster configuration 1019, 1020
- cluster failover 1022
- cluster group 1021
- cluster logs 1031
- cluster nodes 1020
- cluster overview 1019
- clustered environment 1019, 1030
 - administrative tasks 1024
- clustering 1026
 - hardware and software configuration 1025
- clusters 1027
- Cognos reports 790
 - emailing reports 790
 - scheduling reports 790
 - viewing reports 781
- collocation
 - active-data pools 379
 - changing, effect of 378
 - copy storage pools 379
 - definition 258, 372, 423
 - description of 29
 - determining whether to use collocation 258, 372, 423
 - effects on operations 374
 - effects on volume reclamation 391
 - enabling 380
 - enabling for sequential storage pool 258, 372, 423
 - how the server selects volumes when disabled 378
 - migration thresholds 293
 - planning 380
 - selecting volumes when enabled 376
- command file, scheduling on client 554
- command line 577
- command retry attempts
 - setting the amount of time between 572
 - setting the number of 572
- command routing 720

command script 619
 commands
 grant authority 872
 commands, administrative
 ACCEPT DATE 603
 AUDIT LIBRARY 151
 AUDIT LICENSE 589
 AUDIT VOLUME 918
 BACKUP NODE 245, 246
 BEGIN EVENTLOGGING 834
 CANCEL PROCESS 604
 CANCEL REQUEST 158
 CANCEL RESTORE 481
 CANCEL SESSION 477
 CHECKIN LIBVOLUME 144
 CHECKOUT LIBVOLUME 150
 CLEAN DRIVE 177
 COMMIT 631
 COPY ACTIVATEDATA 279, 426
 COPY CLOPTSET 475
 COPY SCHEDULE 560
 COPY SCRIPT 625
 DEFINE ASSOCIATION 552
 DEFINE BACKUPSET 538
 DEFINE CLIENTACTION 573
 DEFINE CLIENTOPT 573
 DEFINE CLOPTSET 473
 DEFINE COPYGROUP 494, 500
 DEFINE DATAMOVER 192, 240
 DEFINE DEVCLASS
 3592 200
 FILE device classes 204
 LTO device classes 208
 REMOVEABLEFILE device classes 203
 SERVER device classes 211
 tape device classes 195
 VOLSAFE device classes 212
 DEFINE DRIVE 190
 DEFINE GRPMEMBER 723
 DEFINE LIBRARY 189
 DEFINE PATH 193
 DEFINE PROFASSOCIATION 701, 702
 DEFINE PROFILE 701
 DEFINE SCHEDULE 613
 DEFINE SCRIPT 619
 DEFINE SERVER 688, 720, 726
 DEFINE SERVERGROUP 723
 DEFINE STGPOOL 261, 263, 275, 276
 DEFINE SUBSCRIPTION 712
 DEFINE VIRTUALFSMAPPING 252
 DEFINE VOLUME 28, 271
 DELETE ASSOCIATION 563
 DELETE BACKUPSET 542
 DELETE DRIVE 182
 DELETE EVENT 565
 DELETE GRPMEMBER 725
 DELETE LIBRARY 166
 DELETE PROFASSOCIATION 706
 DELETE PROFILE 708
 DELETE SCHEDULE 560
 DELETE SCRIPT 627
 DELETE SERVER 694
 DELETE SERVERGROUP 725
 DELETE STGPOOL 427
 DELETE SUBSCRIBER 718
 DELETE SUBSCRIPTION 708, 714
 DELETE VOLHISTORY 609
 commands, administrative (*continued*)
 DELETE VOLUME 428, 429
 DISABLE EVENTS 833
 DISABLE SESSIONS 479
 DISMOUNT VOLUME 159
 DSMSERV DISPLAY DBSPACE 636
 DSMSERV DISPLAY LOG 636
 ENABLE EVENTS 833
 ENABLE SESSIONS 479
 END EVENTLOGGING 834
 EXPORT ADMIN 735
 EXPORT NODE 749
 EXPORT POLICY 749
 EXPORT SERVER 749
 EXTEND DBSPACE 660
 GENERATE BACKUPSET 534
 HALT 601
 HELP 610
 IMPORT 764, 765
 IMPORT ADMIN 752
 IMPORT NODE 752, 761
 IMPORT POLICY 752
 IMPORT SERVER 752, 761
 LOCK ADMIN 876
 LOCK NODE 449
 LOCK PROFILE 705, 706
 MACRO 152
 MOVE DATA 414
 MOVE MEDIA 152
 MOVE NODEDATA 419
 NOTIFY SUBSCRIBERS 706
 PING SERVER 726
 PREPARE 1079
 QUERY ACTLOG 829
 QUERY BACKUPSETCONTENTS 541
 QUERY CONTENT 401
 QUERY COPYGROUP 759
 QUERY DB 636
 QUERY DBSPACE 636
 QUERY DEVCLASS 215
 QUERY DRIVE 166
 QUERY DRMSTATUS 1067
 QUERY ENABLED 847
 QUERY EVENT 553
 QUERY FILESPACE 471
 QUERY LIBRARY 164
 QUERY LICENSE 589
 QUERY MEDIA 152
 QUERY MOUNT 157
 QUERY NODE 453
 QUERY NODEDATA 411
 QUERY OCCUPANCY
 backed-up, archived, and space-managed files 412
 client file spaces 410
 client nodes 410
 device classes 411
 storage pools 411
 QUERY OPTION 822
 QUERY PROCESS 417
 QUERY REQUEST 158
 QUERY RESTORE 481
 QUERY SCHEDULE 553
 QUERY SCRIPT 625
 QUERY SERVERGROUP 724
 QUERY STGPOOL 394, 405, 755
 QUERY SUBSCRIPTION 713
 QUERY VOLUME 397, 418

commands, administrative (*continued*)

- RECONCILE VOLUMES 733
- REGISTER LICENSE 588
- REMOVE NODE 450
- RENAME ADMIN 874
- RENAME FILESPACE 763
- RENAME NODE 449
- RENAME SCRIPT 626
- RENAME SERVERGROUP 724
- RENAME STGPOOL 422
- REPLY 158
- RESTORE DB 602
- RESTORE NODE 245, 246
- RESTORE STGPOOL 942
- ROLLBACK 631
- RUN 627
- SELECT 823
- SET ACCOUNTING 831
- SET AUTHENTICATION 888
- SET CLIENTACTDURATION 573
- SET CONFIGMANAGER 697, 700
- SET CONFIGREFRESH 713
- SET CONTEXTMESSAGING 833
- SET CROSSDEFINE 689, 692
- SET DBREPORTMODE 636
- SET EVENTRETENTION 565, 618
- SET LICENSEAUDITPERIOD 589
- SET MAXCMDRETRIES 572
- SET MAXSCHEDSESSIONS 569
- SET PASSEX 885
- SET QUERYSCHEDPERIOD 571
- SET RANDOMIZE 570
- SET REGISTRATION 435
- SET RETRYPERIOD 572
- SET SCHEDMODES 567
- SET SERVERHLADDRESS 689, 692
- SET SERVERLLADDRESS 689, 692
- SET SERVERNAME 688, 692, 822
- SET SERVERPASSWORD 688, 689, 692
- SET SUBFILE 542
- SET SUMMARYRETENTION 827
- SETOPT 609
- UNLOCK PROFILE 705, 706
- UPDATE ARCHIVE 546
- UPDATE BACKUPSET 540
- UPDATE CLIENTOPT 475
- UPDATE CLOPTSET 475
- UPDATE COPYGROUP 494, 500
- UPDATE DEVCLASS 195
- UPDATE DRIVE 167
- UPDATE LIBRARY 165
- UPDATE LIBVOLUME 149
- UPDATE NODE 448
- UPDATE SCHEDULE 613
- UPDATE SCRIPT 624
- UPDATE SERVER 694
- UPDATE SERVERGROUP 724
- UPDATE STGPOOL 152
- UPDATE VOLUME 153, 271
- VALIDATE LANFREE 135

commands, administrative COPY SERVERGROUP command

- COPY SERVERGROUP 724

COMMIT command 631

Common Agent Services

- CAS 590

Common Inventory Technology 590

COMMTIMEOUT server option 477, 478

communication set up

- among servers 686
- command routing, for 690
- cross definition 687, 688, 692
- enterprise configuration, for 686
- enterprise event logging, for 686, 845
- security 689
- server-to-server virtual volumes 728
- using Secure Sockets Layer 859
- using Transport Layer Security (TLS) 859

compression

- choosing client or drive 217
- option for API 438
- options for clients 436
- setting 436
- tape volume capacity, effect on 217

concurrent access

- Centra volumes 214

configuration file, device

- unrecognized by IBM Tivoli Storage Manager 100

configuration information, enterprise management

- administrative command schedule 698, 705
- administrator 701, 717
- changing 705
- client option set 698, 702
- client schedule 698, 699, 703
- copy group 698, 703
- deleting 706, 708
- distributing 695, 702, 706
- management class 703
- policy domain 698, 699, 703
- refreshing 706, 713, 715
- script 698, 702
- server 704
- server group 704

configuration manager

- communication setup 686
- default profile 697, 704
- scenario 697
- setting up 697, 700, 701

configuration settings 577

configuration stanzas 1063

configuration wizard

- Operations Center 584

configure

- alert monitoring 579

configuring

- connect 349x library to server 237
- connecting ACSLS library to server 238
- devices not supported by the IBM Tivoli Storage Manager
 - device driver 100
- devices, automated library example 109
- hub server 584
- NDMP operations for NAS file servers 227
- Operations Center 581, 584
- planning your storage environment 59
- shared library 114, 131
- VTL 129

configuring storage 97

console mode 765

contents of a volume 401

context messaging for ANR9999D 833

continuation characters, using 621

controlling devices 94

conventions

- typographic xiii

COPY CLOPTSET command 475

- copy group
 - archive, description of 36
 - backup, description of 36
 - defining archive 500
 - defining backup 494
- COPY SCHEDULE command 560, 616
- COPY SCRIPT command 625
- copy storage pool
 - compared with primary 424
 - defining a 422
 - restore from multiple 938
 - role in storage pool migration 298
 - simultaneous-write function 346
- creating
 - backup sets 47
 - new policy 506
 - server scripts 619
- creating backup sets
 - benefits of 534
 - example for 536
- cross definition 687, 688, 692
- current server status workspaces 774
- customized reports 790
- cyclic redundancy check
 - during a client session 525
 - for storage pool volumes 915
 - for virtual volumes 726
 - performance considerations for nodes 526
 - performance considerations for storage pools 918

D

- daily monitoring
 - Tivoli Monitoring for Tivoli Storage Manager 778
- damaged files 921, 922
- data
 - active backup versions, storing 26
 - considering user needs for recovering 188
 - exporting 735
 - importing 735
- data compression 436
- data deduplication xx, 331, 332
 - checklist for configuration 308
 - client-side 329
 - changing location 330
 - client and server settings 300, 324
 - multiple nodes 330
 - overview 301
 - single node 329
 - controlling duplicate-identification manually 326
 - data deduplication 310, 311, 312, 313, 314, 315, 316, 338, 339, 341, 342, 343, 345
 - DEDUPLICATION parameter 325
 - DEDUPREQUIRESBACKUP server option 322
 - definition 299
 - detecting security attacks 317
 - duplicate-identification processes 320, 325, 328
 - IDENTIFY DUPLICATES command 326
 - limitations 303
 - managing 320
 - memory xx
 - moving or copying data 323
 - node replication 959, 1015
 - options for 332
 - planning 305, 306
 - processing 319
 - protecting data 322
- data deduplication (*continued*)
 - reclamation 322
 - requirements 308
 - server-side 300, 324, 325
 - specifying the size of objects to be deduplicated 331
 - statistics
 - displaying information about files with links to a volume 334
 - querying a duplicate-identification process 333, 334, 335, 337
 - querying a storage pool 333
 - testing
 - restore operations 318
 - space savings 319
 - Tivoli Storage Manager for Virtual Environments 340
 - turning off 324
 - virtual volumes, server-to-server
 - data deduplication 323
- data format
 - NATIVE 255
- data format for storage pool 222, 225, 255
 - definition 258
 - operation restrictions 261
- data movement, querying 417
- data mover 4
 - defining 192, 240
 - managing 224
- data protection with WORM media 147
- data retention protection 516
- data retention using Centera
 - overview 65
- data retention using CENTERA
 - unsupported functions 261
- data shredding
 - BACKUP STGPOOL command 531
 - COPY ACTIVATEDATA command 531
 - DEFINE STGPOOL command 531
 - DELETE FILESPACE, command 531
 - DELETE VOLUME, command 531
 - description 529
 - enforcing 531
 - EXPIRE INVENTORY command 531
 - EXPORT NODE command 531, 736
 - EXPORT SERVER command 531, 736
 - GENERATE BACKUPSET command 531, 533
 - MOVE DATA command 415, 531
 - setting up 530
 - UPDATE STGPOOL command 531
- data storage
 - client files, process for storing 13
 - concepts overview 16
 - considering user needs for recovering 188
 - deleting files from 428
 - evaluating 59
 - example 264
 - managing 21
 - monitoring 912
 - planning 59
 - tailoring definitions 759
 - using another IBM Tivoli Storage Manager server 726
 - using devices not recognized by IBM Tivoli Storage Manager 100
 - using disk devices 75
 - using removable media devices 101
 - using the storage hierarchy 284
- data validation
 - during a client session 525

- data validation (*continued*)
 - for storage pool volumes 915
 - for virtual volumes 726
 - performance considerations for nodes 526
 - performance considerations for storage pools 918
- database 3
 - adding directories 663
 - audits 634
 - backup xviii, 894, 895, 899, 901
 - buffer size 634
 - description of 633
 - increasing the size 660
 - log files, alternative locations 673
 - managing 633
 - monitoring 636
 - move to another directory 676, 677
 - moving 602
 - protecting 923
 - reducing the size 664, 665
 - relocating on a server 676
 - reorganization, table and index
 - archive log, space requirements 657
 - index 668
 - overview 666
 - restrictions 667
 - table 668
 - restoring 926, 929, 930
 - most current state 900, 926, 929
 - point in time 900, 926, 927
 - SQL queries 634
 - statistics collection 634
 - transactions 633, 678
- database backup 896
- database backup and recovery
 - general strategy 726
 - methods 726
 - providing 726
- database manager 644
- database space 644
- database, IBM Tivoli Storage Manager
 - description of 51
 - ensuring integrity of 55
 - querying using SQL 823
- date and time, changing on the server 603
- day of the week parameter 614
- DB2 tools, use of 633
- DB2 Universal Database
 - Enterprise Extended Edition 451
- deactivating policy 486
- deduplicate-identification processes 326
- DEDUPTIER2FILESIZE 331, 332
- DEDUPTIER3FILESIZE 331, 332
- default management class
 - binding files to 45
 - description of 36
 - purpose 41
 - recommendation for using 43
 - replication
 - rebinding a file 45
- default policy 484
- default profile 697, 704, 711
- default scheduling mode
 - modifying 566
- DEFINE ASSOCIATION command 552
- DEFINE BACKUPSET command 538
- DEFINE CLIENTACTION command 573
- DEFINE CLIENTOPT command 474
- DEFINE CLOPTSET command 473
- DEFINE COPYGROUP command 494, 500
- DEFINE DEVCLASS command 195, 203
- define drive 130
- DEFINE DRIVE command 190
- DEFINE GRPMEMBER command 723
- DEFINE LIBRARY command 189
- DEFINE MACHINE 1074
- define path 130
- DEFINE PROFASSOCIATION command 702
- DEFINE PROXYNODE command 451
- DEFINE RECOVERYMEDIA 1078
- DEFINE SCHEDULE command 613
- DEFINE SCRIPT command 619
- DEFINE SERVER command 688, 720, 726
- DEFINE STGPPOOL command 261, 263, 275, 276
- DEFINE SUBSCRIPTION command 712
- DEFINE VIRTUALFSMAPPING command 252
- DEFINE VOLUME command 271
- defining
 - client nodes 460
- delaying migration for files 292
- delaying reuse of volumes 391
- DELETE ASSOCIATION command 563
- DELETE BACKUPSET command 542
- DELETE CLIENTOPT command 475
- DELETE EVENT command 565, 618
- DELETE FILESPACE command 472
- DELETE GRPMEMBER command 725
- DELETE PROFASSOCIATION command 706
- DELETE PROFILE command 708
- DELETE SCHEDULE command 560, 617
- DELETE SCRIPT command 627
- DELETE SERVER command 695
- DELETE SERVERGROUP command 725
- DELETE STGPPOOL command 427
- DELETE SUBSCRIBER command 718
- DELETE SUBSCRIPTION command 714
- DELETE VOLHISTORY command 609
- DELETE VOLUME command 428, 429
- deleting
 - cached files on disk 414
 - empty volume 428, 609
 - file spaces 472
 - files 428, 514
 - scratch volume 269, 609
 - storage volume 429
 - subfile 544
 - volume history information 609
 - volume with residual data 429
- deletion hold 517
- deployment
 - command-line interface 448
- descriptions, for archive packages 545, 546
- DESTINATION parameter (storage pool) 484, 494
- destroyed volume access mode 274, 937
- determining
 - cause of ANR9999D messages 833
 - the time interval for volume check in 199
- device 88
 - adding using commands 103
 - attaching to server 103, 234
 - configuring removable media 101
 - defining to IBM Tivoli Storage Manager 104
 - multiple types in a library 72
 - selecting device drivers 91
 - troubleshooting 135

- device (*continued*)
 - unsupported 100
 - Windows device drivers 93
- device class 4
 - 3590 194, 195
 - 3592 195
 - 4MM 194, 195
 - 8MM 194, 195
 - amount of space used 411
 - CENTERA 65
 - defining 194
 - DISK 194
 - DLT 194, 195
 - ECARTRIDGE 195
 - FILE 194
 - for devices using native Windows device driver 100
 - FORMAT parameter 197
 - GENERICTAPE 100, 194, 195
 - LTO 208
 - overview 106
 - REMOVABLEFILE 203
 - requesting information about 215
 - selecting for import and export 748
 - sequential 195
 - SERVER 194, 195, 728
 - StorageTek devices 195, 212
 - tape 195, 203
 - Ultrium, LTO 195
 - updating 195, 203
 - VOLSAFE 212
 - WORM 194, 195
- device classes
 - database backups 895
- device configuration file 904, 931
 - unrecognized by IBM Tivoli Storage Manager 100
- device diagnostics 136
- device driver
 - for manual tape devices 86
 - IBM Tivoli Storage Manager, installing 86
 - installing 85
 - overview 91
 - requirements 85
 - Tivoli Storage Manager, installing 86
 - Windows 93
- device sharing 59
- device special file names 88
- device type
 - 3590 195
 - 4MM 194, 195
 - 8MM 194, 195
 - CENTERA 65
 - DISK 194
 - DLT 194, 195
 - ECARTRIDGE 195
 - FILE 194
 - GENERICTAPE 194, 195
 - LTO 196, 208
 - multiple in a single library 72
 - REMOVABLEFILE 194
 - SERVER 194, 195, 728, 730
 - VOLSAFE 212
 - WORM 194, 195
- device, storage
 - adding, overview 98
 - alias 87
 - automated library device 109
 - device information 136
- device, storage (*continued*)
 - device name 87
 - disk 75
 - removable media device 101, 203
 - replacing tape drive 173
 - required IBM Tivoli Storage Manager definitions 187
- devices
 - defining 189
- diagnosing ANR9999D messages 833
- diagnostics, for device 136
- differential backup
 - compared to incremental 12
 - of image, description 8, 71
- direct-to-tape, policy for 508
- directories
 - deleting from archive packages 546
 - directory-level backup 252
 - preventing archive of 547
 - storage usage for archive packages 545
- disability 1131
- DISABLE EVENTS command 833
- DISABLE SESSIONS command 479
- disaster recovery 1034, 1091
 - auditing storage pool volumes 922
 - general strategy 726
 - methods 55, 726
 - node replication as a method for 1017
 - providing 726
 - server
 - disaster recovery 1092
 - server recovery 1092
- disaster recovery instructions 1072
- disaster recovery manager
 - awk script 1043
 - client recovery information 1033
 - creating a disaster recovery plan 1079
 - customizing 1067
 - displaying a disaster recovery plan 1083
 - features 1033
 - moving volumes back on-site 1090
 - project plan, checklist 1036
 - recovery media 1078
 - saving machine characteristics 1074
 - stanzas, recovery instructions 1072
 - storing a disaster recovery plan 1079
- Disaster Recovery Manager 1041
- Disaster Recovery Manager task 1041
- disaster recovery plan 1043, 1081
 - default settings 1067
 - local copy 1080
 - target server 1081
- disaster recovery plan environment 1081
- disaster recovery plan file 1043
- disaster recovery site 1100
- disaster, protecting against 54
- disk 4
- disk device class, defined 194
- disk devices 24
 - random access 77
 - sequential access 77
- disk space
 - for the database and recovery log 658
 - freeing 83
- disk storage
 - and file-system requirements 75
 - random access (DISK) 64
 - sequential access (FILE) 64

- disk storage pool
 - cache, use of 299
 - deleting cached files from 414
 - estimating space 392
 - estimating space for archived files 393
 - estimating space for backed up files 393
 - migration threshold 287
 - setting up 75
- disk subsystems
 - requirements 75
- disk support 75
- disk systems support 75
- dismounting
 - idle volumes 159
 - volumes from REMOVABLEFILE devices 160
- display information 453
 - specific client node 454
- DISPLAY OBJNAME command 460
- distribute workloads
 - to reduce backup and restore time 451
- DLT WORM media 147
- domain, policy
 - active-data pools, specifying 493
 - associating a client with 506
 - changing 486
 - description of 36
 - distributing via profile 524, 699
 - for NAS file server node 228
 - updating 492, 493
- drive 4
 - cleaning 177
 - defining 190
 - defining path for 193
 - deleting 182
 - detecting changes on a SAN 137
 - element address 190, 193
 - querying 166
 - serial number 190
 - simultaneous-write function, requirements for 368
 - updating 167
 - updating to use for NDMP operations 224
- drive configuration 129
- DRIVEENCRYPTION parameter
 - 3592 device class 202
 - ECARTRIDGE device class 213, 214
 - LTO device class 210
- driver, device
 - for manual tape devices 86
 - IBM Tivoli Storage Manager, installing 86
 - installing 85
 - requirements 85
 - Tivoli Storage Manager, installing 86
 - Windows 93
- drivers
 - for IBM devices 90
- drives 129
 - defining in the library 105
- DRM 1041, 1043
- DRM file 1043
- DRM tasks 1041
- dsm.opt file 439, 473, 549
- dsmacnt.log 831
- DSMADMC command 744, 758, 765
- DSMC loop session 476
- DSMMAXSG utility 138
- dsmsched.log file 565
- DSMSERV DISPLAY DBSPACE command 636
- DSMSERV DISPLAY LOG command 636, 671
- DSMSERV_ACCOUNTING_DIR 831
- duplicate-identification processes 320, 325
- duplication of restored data 938
- DVD-RAM support
 - configuring 103
 - defining and updating a device class 203
 - dismounting volumes from DVD-RAM devices 160
- dynamic serialization, description of 495, 500

E

- ECARTRIDGE device class 195
- element address 190
- email alerts 579
- embedded help 577
- ENABLE EVENTS command 833
- ENABLE SESSIONS command 479
- enabling
 - target replication server policies xvii, 1010
- encoding events to UTF-8 839
- encryption
 - changing method 528
 - choosing a method 527
 - DRIVEENCRYPTION parameter
 - 3592 Generation 2 202
 - ECARTRIDGE 213, 214
 - LTO-4 210
 - methods 168, 526
- END EVENTLOGGING command 834
- Enterprise Administration
 - description 681
- enterprise configuration
 - communication setup 686
 - description 682, 695
 - procedure for setup 696
 - profile for 697
 - scenario 684, 696
 - subscription to 699
- enterprise event logging 686, 845
- environment file
 - modifying queries 793, 794
 - modifying reporting performance 793
- environment variable, accounting 831
- error checking for drive cleaning 181
- error reporting for ANR9999D messages 833
- error reports for volumes 399
- establishing server-to-server communications
 - enterprise configuration 686
 - enterprise event logging 686
 - virtual volumes 694
- estimate network bandwidth 964
- estimate replication 963
- estimated capacity for storage pools 395
- estimated capacity for tape volumes 399
- event logging 832, 839
- event record (for a schedule)
 - deleting 565, 618
 - description of 553, 563
 - managing 617
 - querying 617
 - removing from the database 565, 618
 - setting retention period 565, 618
- event server 845
- example
 - register three client nodes with CLI 442
- expiration 83

- expiration date, setting 615
- expiration processing
 - description 911
 - different policies
 - client node files 1011
 - files in a filespace 1011
 - files eligible 486, 514
 - of subfiles 486, 497, 514, 544
 - starting 514
 - using disaster recovery manager 515
- expire
 - recovery plan files 1085
- EXPIRE INVENTORY command
 - duration of process 515
- export
 - administrator information 745
 - client node information 745
 - data from virtual volumes 767
 - decided when 737
 - directly to another server 738
 - labeling tapes 740, 748
 - monitoring 763
 - options to consider 739
 - planning for sequential media 748
 - policy information 746
 - PREVIEW parameter 747
 - previewing results 743
 - querying about a process 764
 - querying the activity log 766
 - replacing definitions before 740
 - server data 746
 - using scratch media 748
 - viewing information about a process 764
- EXPORT ADMIN command 749
- export and import data
 - sequential media volumes 747
- export Cognos reports 792
- EXPORT commands 764, 765
- EXPORT NODE command 750
- EXPORT POLICY command 751
- EXPORT SERVER command 747, 751
- exporting
 - administrator data 749
 - client node data 750
 - data to tape 749
 - description of 735
 - IBM Tivoli Monitoring historical settings 808
 - policy data 751
 - server data 751
 - situations 807
 - subfiles 544
- exporting and importing TEP workspaces and queries 807
- Exporting Cognos reports
 - Cognos reports
 - exporting 809
- exporting workspaces 807
- EXPQUIET server option 515
- EXTEND DBSPACE command 660
- EXTERNAL library type 1118
- external media management
 - IBM Tivoli Storage Manager setup 163
 - initialization requests 1118
 - interface description 1113
 - overview 162
 - processing during server initialization 1114
 - volume dismount requests 1123
 - volume mount requests 1120

- external media management *(continued)*
 - volume release requests 1119

F

- failover 995
- failover cluster 1026
 - installing Tivoli Storage Manager 1028
- fiber tape failover 1023
- file data, importing 735
- file deletion option
 - setting 439
- FILE device type
 - backing up or archiving many small objects 205
 - benefits 64
 - concurrent access to FILE volumes 64
 - defining device class 194
 - deleting scratch volumes 609
 - free space in directories 413
 - setting up storage pool 82
- file exit 832
 - logging events to 835
- file path name 460
- file retrieval date 299
- file server, network-attached storage (NAS)
 - backup methods 229
 - registering a NAS node for 239
 - using NDMP operations 69, 219
- file size, determining maximum for storage pool 258
- file space
 - deleting, effect on reclamation 35
 - deleting, overview 472
 - description of 459
 - merging on import 739, 753
 - names that do not display correctly 471
 - QUERY OCCUPANCY command 410
 - querying 459
 - renaming 763
 - Unicode enabled 470
 - viewing information about 459
- file space identifier (FSID) 470
- file spaces
 - defining 460
- file-level restore
 - managing 250
 - planning 249
- file-system requirements for disk storage 75
- file, client
 - allowing archive while changing 484
 - allowing backup while changing 484, 495
 - archive package 545
 - associating with management class 43, 44
 - damaged 938
 - delaying migration of 292
 - deleting 428
 - deleting from a storage pool 426
 - deleting from cache 299
 - deleting when deleting a volume 428
 - duplication when restoring 938
 - eligible for archive 484, 487
 - eligible for backup 484, 487
 - eligible for expiration 486
 - eligible for space management 491
 - how IBM Tivoli Storage Manager stores 276
 - on a volume, querying 401
 - server migration of 285
- files, damaged 921, 922, 938

- files, damaged (*continued*)
 - recovering
 - replication server 922
- files, unreadable 921, 922
 - recovering
 - replication server 922
- firewall, client nodes
 - client-initiated sessions 446
 - server-initiated sessions 447
- format for storage pool 222, 225
 - definition 258
 - operation restrictions 261
- formatting
 - event classes 837
 - storage pool volume 81, 269
- frequency of backup 496
- FSID 470
- full image backup, NAS node 71

G

- GENERATE BACKUPSET command 534
- GENERICTAPE device type 203
- Global Security Kit (GSKit) 859
- GRANT AUTHORITY 857
- group backup, on the client 10
- group, server
 - copying 724
 - defining 723
 - deleting 725
 - member, deleting 725
 - moving a member 725
 - querying 724
 - renaming 724
 - updating description 724

H

- HALT command 601
- halting the server 601
- hardware recovery 1098
- hardware scans
 - VMware environment 595
- held volume in a client session 476
- help 577
- HELP command 610
- hierarchy, storage
 - defining in reverse order 261, 275
 - establishing 27
 - example 264
 - for LAN-free data movement 275
 - how the server stores files in 276
 - next storage pool
 - definition 275
 - deleting 427
 - migration to 285, 405
 - restrictions 275
 - staging data on disk for tape storage 284
- HL ADDRESS 447
- Host Bus Adapter (HBA), increasing maximum transfer length
 - for 138
- hostname
 - changing 607
- how to cause the server to accept date and time 603
- hub server
 - changing 581

- hub server (*continued*)
 - configuring 584
 - restoring to preconfigured state 582

I

- IBM Cognos 781
- IBM Knowledge Center xiii
- IBM Tivoli Monitoring 773
- IBM Tivoli Storage Manager (Tivoli Storage Manager)
 - server network 53
- IBM Tivoli Storage Manager device driver 90
- IBM Tivoli Storage Manager MACRO command 152
- IDLETIMEOUT server option 477, 478
- image backup
 - policy for 509, 510
 - suggested use 7, 10
- import
 - Cognos reports 817
 - data from virtual volumes 767
 - monitoring 763
 - options to consider 753
 - PREVIEW parameter 747, 755
 - querying about a process 764
 - querying the activity log 766
 - recovering from an error 763
 - replace existing definitions 754
 - viewing information about a process 764
- IMPORT ADMIN command 752
- import Cognos reports 792
- IMPORT commands 764, 765
- IMPORT NODE command 752, 761
- IMPORT POLICY command 752
- IMPORT SERVER command 752, 761
- importing
 - active-data pools 760
 - data 752
 - data storage definitions 757, 759
 - date of creation 754, 761
 - description of 735
 - directing messages to an output file 744, 758
 - duplicate file spaces 760
 - file data 760
 - node replication restriction 968
 - policy definitions 757
 - queries 816
 - server control data 758
 - situations 816
 - subfiles 544
 - subsets of information 762
 - workspaces 816
- include-exclude file
 - description of 36, 42
 - for policy environment 36, 42
- incomplete copy storage pool, using to restore 938
- incremental backup 487
- incremental backup, client
 - file eligibility for 488
 - frequency, specifying 569
 - full 488
 - partial 489
 - progressive 12
- incremental replication 967
- inheritance model for the simultaneous-write function 355
- initial replication 966
- initial start date for schedule 614
- initial start time for schedule 614

- initializing 1028
- installing 92
- installing IBM Tivoli Storage Manager 434
- instance user ID 600
- instant archive
 - creating on the server 533
 - description of 8, 11
- interface, application program
 - client, registering 438
 - compression option 438
 - deletion option 438
 - registering to server 438
 - simultaneous-write function, version support for 348
- interfaces to IBM Tivoli Storage Manager 18
- introduction to IBM Tivoli Storage Manager 3
- introduction to Tivoli Storage Manager server 21
- inventory 3
- iPad
 - monitoring the storage environment 580

K

- kdb 863
- keepalive, TCP
 - enabling 227
 - overview 226
 - specifying connection idle time 227
- key database
 - adding certificates 862
 - password change 862
- key database file 863
- keyboard 1131
- Knowledge Center xiii

L

- label
 - automatic labeling in SCSI libraries 143
 - sequential storage pools 270
- LABEL LIBVOLUME command
 - restrictions for VolSafe-enabled drives 212
 - using an automated library 113, 127
- LAN-free data movement
 - configuration 134
 - description 15, 68
 - storage pool hierarchy restriction 275
 - suggested usage 8
- LDAP-authenticated password
 - configuring an LDAP directory server 879
 - configuring the server 882
 - policy 881
 - query admin 885
 - query node 885
 - register nodes and admin IDs 883
 - scenarios 888
 - transport layer security 865
 - update node or admin 884
- libraries
 - defining 104
 - NDMP operations 233
 - virtual tape library 128
- library 4
 - 349X 61
 - ACSL 61
 - ACSL (Automated Cartridge System Library Software) 121

- library (*continued*)
 - attaching for NAS file server backup 234
 - auditing volume inventory 151
 - automated 149
 - categories for volumes in IBM 3494 108
 - configuration example 109
 - configure for more than one device type 72
 - defining 166, 189
 - defining path for 193
 - deleting 166
 - detecting changes to, on a SAN 137, 190
 - external 61
 - IBM 3494 108
 - managing 164
 - manual 61
 - mixing device types 72, 200, 208
 - mode, random or sequential 86
 - overflow location 258
 - querying 164
 - SCSI 61
 - serial number 190
 - shared 61
 - sharing among servers 114, 131
 - type 66
 - updating 165
 - volume inventory 142
 - VTL 61
 - zosmedia 61
- library client, shared library 67, 115, 126, 133, 930, 941
- library drive usage
 - determining 231
- library manager, shared library 67, 115, 125, 131, 929, 941
- library sharing 74
- license
 - compliance 589
 - features 588
 - monitoring 589
 - registering 588
 - using 587
- limitation for script definition on administrative Web
 - interface 619
- LL ADDRESS 447
- Local System account 597
- location, volume
 - changing 272
 - overflow for storage pool 258
 - querying volume 400
- LOCK ADMIN command 876
- LOCK NODE command 449
- LOCK PROFILE command 705, 706
- log compression 672
- log location 671
- log mirror 638, 671
- logical block protection
 - enabling 170
 - overview 169
 - read/write operations 172
 - storage pool management 173
 - supported drives 170
- logical devices 82
- logical volume on client
 - management class for 43
 - policy for 487, 509
 - process for backup 490
- logs
 - active 3
 - archive 3

- loop session, DSMC 476
- low migration thresholds 291
- LTO Ultrium devices and media
 - device class, defining and updating 208
 - encryption 168, 210, 526
 - WORM 147, 212
- LUN
 - using in paths 193

M

- machine characteristics 1075
- machine recovery information 1075
- macro
 - commit individual commands 631
 - continuation characters 629
 - controlling command processing 631
 - running 630
 - scheduling on client 554
 - substitution variables 630
 - testing 631
 - using 627
 - writing commands 628
 - writing comments 629
- MACRO administrative command, using 442
- magnetic disk devices 64, 75
- managed server
 - changing the configuration manager 712, 718
 - communication setup 686
 - deleting a subscription 714
 - description 682
 - managed objects 682, 711
 - refreshing configuration information 715
 - renaming 719
 - returning managed objects to local control 716
 - setting up 699
 - subscribing to a profile 699, 711, 712
- management class
 - associating a file with 43
 - binding a file to 43
 - configuration 40
 - controlling user access 40
 - copying 492
 - default 41
 - define new 513
 - description of 36, 40
 - rebinding a file 45
 - updating 44, 492
- managing
 - active-data pool volumes 1100
 - copy storage pool volumes 1100
 - database log 671
 - replicated client-node data xvii, 1010
- managingserver operation 50
- manual drive
 - attaching 85
- manual library device
 - adding, using commands 103
 - managing media 156
 - reusing media 156
- manual SCSI library 1099
- manually configuring a device
 - Windows 98
- MAXSCRATCH parameter 258, 272, 423
- media
 - checking in 144
 - labeling for automated library devices 143
- media (*continued*)
 - mount operations 157
 - reusing 155
 - tape rotation 31, 160
- media label
 - for devices unrecognized by IBM Tivoli Storage Manager 143
- media operations 30
- merging file spaces 739, 753
- messages
 - determining cause of ANR9999D message 833
 - directing import messages to an output file 744, 758
 - for drive cleaning 181
 - getting help on 610
 - severe 833
- Microsoft Failover Cluster 1026
- Microsoft Failover Cluster Manager 1021
- migrate 5
- MIGRATE STGPOOL command 296
- migrating a file 39, 491
- migration, client
 - automatic, for HSM client
 - files, eligible 491
 - reconciliation 40
 - stub file on HSM client 39
- migration, server
 - canceling the server process 406
 - controlling by file age 292
 - controlling duration 296
 - controlling start of, server 291
 - copy storage pool, role of 298
 - defining threshold for disk storage pool 290
 - defining threshold for tape storage pool 293
 - delaying by file age 292
 - description, server process 287
 - minimizing access time to migrated files 293
 - monitoring thresholds for storage pools 405
 - multiple concurrent processes
 - random access storage pool 258, 287
 - sequential access storage pool 258, 297
 - problems, diagnosing and fixing 285
 - providing additional space for server process 407
 - starting manually 296
 - starting server process 284, 291
 - threshold for a storage pool
 - random access 287
 - sequential access 293, 294
- mirroring 902
 - description of 55
- MIRRORLOGDIRECTORY server option 673
- mixed device types in a library 72, 200, 208
- mobile client support 542
- mobile device
 - monitoring the storage environment 580
- mode
 - client backup 496
 - library (random or sequential) 86
 - scheduling 567
- modified mode, description of 496
- modifying schedules 560
- monitoring
 - server-to-server export 744
- monitoring the storage environment 577
- monitoring workspaces
 - agent status 774
 - availability 774
 - client missed files 774

monitoring workspaces *(continued)*

- client node status 774
- client node storage 774
- database 774
- node activity 774
- schedule 774
- server status 774
- storage device 774
- storage pool 774
- tape usage 774
- tape volume 774
- Tivoli Enterprise Portal
 - monitoring workspaces 780

mount

- count of number of times per volume 400
- library 198
- limit 198
- retention period 199
- wait period 199

mount point 1003

- preemption 605
- relationship to mount limit in a device class 198, 207, 215
- requirements for simultaneous-write operations 367
- settings for a client session 435

MOVE DATA command 414

MOVE DRMEDIA command 1090

MOVE NODEDATA 419

moving a backup set

- benefits of 538
- to another server 538

moving data 472

- from offsite volume in a copy storage pool 415
- monitoring the movement of 418
- procedure 416
- requesting processing information 417
- to another storage pool 415
- to other volumes in same storage pool 414

multipath I/O 91

multiple

- copy storage pools, restoring from 938
- managing IBM Tivoli Storage Manager servers 53
- managing Tivoli Storage Manager servers 681

multiple server instances 600

multiple servers 719

- completing tasks 719

multistreaming, concurrent for database backups and

- restores 896, 926

N

NAS file server, NDMP operations

- backing up a NAS file server 246
- backing up a NAS file server to native pools 247, 248
- configuration checklist 227
- data format 222
- data mover, description 192
- defining a data mover 192, 240
- defining a storage pool 233
- defining paths to drives
 - drives attached only to file server 242
 - drives attached to file server and Tivoli Storage Manager server 241
 - obtaining names for devices attached to file server 243
- defining paths to libraries 244
- differential image backup, description 71
- full image backup, description 71
- interfaces used with 222

NAS file server, NDMP operations *(continued)*

- managing NAS nodes 223
- path, description 193
- planning 231
- policy configuration 228, 510
- registering a NAS node 239, 437
- requirements for set up 219
- restoring a NAS file server 246
- scheduling a backup 245
- storage pools for NDMP operations 233

NAS node

- defining 239
- deleting 224
- registering 239
- renaming 223

NAS nodes 255

NATIVE data format 222

NDMP

- operations 223

NDMP backup data 255

NDMP operations 254

NDMP operations for Celerra data movers 254

NDMP operations for NAS file servers

- backing up a NAS file server 246
- backing up a NAS file server to native pools 247, 248
- configuration checklist 227
- data format 222
- data mover, description 192
- defining a data mover 192, 240
- defining a storage pool 233
- defining paths to drives
 - drives attached only to file server 242
 - drives attached to file server and Tivoli Storage Manager server 241
 - obtaining names for devices attached to file server 243
- defining paths to libraries 244
- differential image backup, description 71
- full image backup, description 71
- interfaces used with 222
- managing NAS nodes 223
- path, description 193
- planning 231
- policy configuration 228, 510
- prevent closing of inactive connections
 - enabling TCP keepalive 227
- overview 226
- specifying connection idle time 227
- registering a NAS node 239, 437
- requirements for set up 219
- restoring a NAS file server 246
- scheduling a backup 245
- storage pools for NDMP operations 233

NetApp file server

- data format for backup 222
- international characters 251

NETAPPDUMP data format 222, 233

NetView 832

Network Appliance file server

- backup methods 229
- requirements 219
- storage pool for backup 261
- tape device for backup 219
- using NDMP operations 69, 219

network attached storage

- virtual file spaces 245

network bandwidth 964

network of IBM Tivoli Storage Manager servers 53

- network of Tivoli Storage Manager servers 681
- network-attached nodes
 - comparing to local nodes 441
- network-attached storage (NAS) file server
 - backup methods 229
 - registering a NAS node for 239
 - using NDMP operations 69, 219
- new tape drive 173
- next storage pool
 - definition 275
 - deleting 427
 - migration to 285, 405
- node
 - registering 458, 485
- node privilege class
 - description of 455
 - granting 457
- node replication 967, 1003
 - configuration
 - effectiveness, measuring 1015
 - removing 1018
 - setting up the default 976, 979, 980
 - source and target replication servers 947
 - validating 995
 - database requirements 962
 - database restore, replicating after 1011
 - deduplicated data 959, 1015
 - disabling and enabling
 - rules 1007
 - disabling and enabling replication
 - all client nodes 1005, 1007
 - data types in file spaces 1004
 - individual client nodes 1005
 - disaster recovery
 - store operations on the target replication server 1017
 - file spaces
 - data types, disabling and enabling 1004
 - purging data in 1011
 - querying replication results 1014
 - rules, changing 982
 - import-and-export operations
 - converting from 988
 - restriction 968
 - Managing
 - replicated client-node data 1009
 - migration by HSM for Windows client 968
 - mode, replication 958
 - nodes
 - adding for replication 989
 - all client nodes, disabling and enabling replication 1005, 1007
 - attributes updated during replication 960
 - individual client nodes, disabling and enabling replication 1005
 - removing from replication 990
 - resetting the replication mode 991
 - overview 945
 - planning 961
 - policy management 949
 - process information
 - activity log 1014
 - file spaces 1014
 - record retention 1016
 - summary records 1015
 - records
 - displaying 1014
 - retaining 1016
- node replication (*continued*)
 - replicating
 - data by file space 997
 - data by priority 1000
 - data by type 999
 - scheduling or starting manually 996
 - throughput, managing 1001
 - retention protection, archive 968
 - rules
 - attributes 952
 - definitions 950
 - disabling and enabling 1007
 - file spaces 982
 - hierarchy 952
 - nodes, individual 983
 - processing example 953
 - server 984
 - Secure Sockets Layer (SSL) 978, 979
 - servers
 - communications, setting up 976
 - configurations 947
 - source, adding 992
 - target 992, 1017
 - SSL (Secure Sockets Layer) 978, 979
 - state, replication 955
 - task tips
 - monitoring processes 974
 - nodes, adding and removing 971
 - previewing results 973
 - processing, managing 973
 - rules, changing replication 971
 - servers, managing 972
 - validating a configuration 973
 - verifying results 974
- node replication method 965, 966
- node replication synchronization 965
- node replication tiering 1104
- node, client
 - adding 433
 - agent 451
 - amount of space used 410
 - creating backup sets for 534
 - file spaces, QUERY OCCUPANCY command 410
 - finding tapes used by 404
 - immediate processing 573
 - importing 761
 - locking 449
 - managing registration 434, 445, 587
 - options file 439
 - performing operations for 525, 559, 566
 - privilege class for scheduling operations for 551
 - proxy node relationships 450
 - querying 453
 - reducing archive packages for 546
 - registering 438
 - removing 450
 - renaming 449
 - scheduling operations for 550
 - setting password authentication 888
 - setting scheduling mode 568
 - setting up subfile backups 543
 - target 451
 - unlocking 449
 - updating 448
 - viewing information about 453
- nodes
 - moving nodes from schedule 562

- nodes (*continued*)
 - overview of client and server 433
- NOPREEMPT server option 605
- NORETRIEVEDATE server option 299
- NOTIFY SUBSCRIBERS command 706
- NT event log receiver 845
- number of times mounted, definition 400

O

- occupancy, querying 410
- off-site volume
 - limiting the number to be reclaimed 390
- offline index reorganization 669
- offline reorganization 669, 671
- offline reorganization space 671
- offline table reorganization 669
- offsite recovery media
 - specify defaults 1070
- offsite recovery media (for DRM)
 - volumes
 - moving back on-site 1090
 - sending offsite 1088
 - states 1086
- offsite recovery media default 1070
- offsite recovery media management 1070
- offsite volume access mode 274
- offsite volumes
 - limiting the number to be reclaimed 258
 - moving data in a copy storage pool 415
- one-drive library, volume reclamation 258, 385
- open registration
 - description 435
 - enabling 442
 - process 436
 - setting 435
- operations available to client 8
- Operations Center 577
 - configuring 581, 584
 - opening 580
 - overview xv, 577
 - port number 580
 - restoring to preconfigured state 582
 - URL 580
 - web server 583
- operator privilege class
 - reducing 874
 - revoking 874
- optical device
 - reclamation for media 386
- option set, client
 - adding client options to 474
 - assigning clients to 475
 - copying 475
 - creating 474
 - deleting 475
 - deleting an option from 475
 - for NAS node 229
 - requesting information about 475
 - updating description for 475
- option, server
 - AUDITSTORAGEstorage audit 589
 - changing with SETOPT command 609
 - COMMTIMEOUTcommunication timeout 477, 478
 - EXPINTERVAL 514
 - EXPQUIET 515
 - IDLETIMEOUTidle timeout 477, 478, 820

- option, server (*continued*)
 - NOPREEMPT 605
 - NORETRIEVEDATEfile retrieval date 299
 - RESTOREINTERVAL 480, 486
 - THROUGHPUTDATATHRESHOLD 478
 - THROUGHPUTTIMETHRESHOLD 478
 - TXNGROUPMAXmaximum transaction group size 276
- options file, client 439
- options, querying
 - VIRTUALMOUNTPOINT client option 460
- original site 1098
- overflow location 258
- overview
 - Operations Center xv
- overviewOperations Center 577
- owner authority, client 455, 457

P

- PARALLEL command 620
- password
 - changing the key database 862
 - LDAP-authenticated policy 881
 - resetting an administrative 874
 - setting authentication for a client 888
 - setting expiration 885
 - setting invalid limit 886
 - setting minimum length 888
 - update for scheduling operations 440
 - using with unified logon 890
- path 4
 - defining 193
 - description 231
- paths
 - defining 189
- pending, volume state 400
- per product ID (PID) 593
- PERFORM LIBACTION 130
- performance
 - cache, considerations for using 83, 298
 - concurrent client/server operation considerations 569
 - data protection, increasing with simultaneous-write
 - function 346
 - data validation for nodes 526
 - data validation for storage pools 918
 - file system effects on 81, 269
 - random-access disk (DISK) 75
 - FILE-type volumes, backing up many small objects to 205
 - fragmentation, private FILE volumes for reducing disk 64
 - migration, multiple concurrent processes 258, 297
 - mobile client 542
 - reclamation, multiple concurrent processes
 - copy storage pools 387
 - primary sequential access storage pools 258, 384
 - storage pool backup, reducing time required for 346
 - storage pool volume 293
 - volume frequently used, improve with longer mount
 - retention 199
- period, specifying for an incremental backup 569
- plan
 - Disaster Recovery Manager 1104
 - DRM 1104
- planning, capacity
 - database space requirements
 - estimates based on number of files 641
 - estimates based storage pool capacity 643
 - starting size 641

- planning, capacity (*continued*)
 - recovery log space requirements
 - active and archive logs 645
 - active log mirror 657
 - archive failover log 658
 - archive log space for database reorganization 657
- point-in-time restore
 - enable for clients 8, 513
- policy 5, 14
 - default 13, 484
 - description of 36
 - distributing with enterprise management 524
 - for application clients 509
 - for clients using SAN devices 511
 - for direct-to-tape backup 508
 - for logical volume backups 509
 - for NAS file server node 228
 - for point-in-time restore 513
 - for server as client 513
 - for space management 484, 491
 - importing 757
 - managing 483
 - operations controlled by 38
 - planning 483
- policy domain
 - active-data pools, specifying 493
 - associating a client with 506
 - changing 486
 - define 511
 - description of 36
 - distributing via profile 524, 699
 - for NAS file server node 228
 - updating 492, 493
- policy privilege class
 - description 870
 - granting 873
 - revoking 873
- policy set
 - activating 502
 - changing, via the active policy set 486
 - copying 486, 492
 - description of 36
 - validating 502
- pool, storage
 - 3592, special considerations for 200
 - amount of space used 411
 - auditing a volume 912
 - comparing primary and copy types 424
 - copy 25
 - creating a hierarchy 27
 - data format 222, 258, 261
 - defining 257
 - defining a copy storage pool 422
 - defining for disk, example 261, 275
 - defining for LAN-free data movement 265
 - defining for NDMP operations 233
 - defining for tape, example 261, 275
 - deleting 427
 - description of 24
 - destination in copy group 494, 500
 - determining access mode 258, 423
 - determining maximum file size 258
 - determining whether to use collocation 258, 372, 423
 - duplicate, using to restore 938
 - enabling cache for disk 258, 298
 - estimating space for archived files on disk 393
 - estimating space for backed up files on disk 393
- pool, storage (*continued*)
 - estimating space for disk 392
 - estimating space for sequential 394
 - estimating space in multiple 27
 - incomplete, using to restore 938
 - LTO Ultrium, special considerations for 208
 - managing 257
 - monitoring 394
 - moving files 414
 - moving files between 415
 - multiple, using to restore 938
 - next storage pool
 - definition 275
 - deleting 427
 - migration to 285, 405
 - policy use 494, 500
 - primary 25
 - querying 394
 - renaming 422
 - search-and-selection order for active files 426
 - simultaneous-write function 346
 - updating 257
 - updating for disk, example 263, 276
 - using cache on disk 258, 298
 - validation of data 915
 - viewing information about 394
- port number
 - Operations Center 580
- portable media
 - description of 7, 533
 - restoring from 538
- preemption
 - mount point 605
 - volume access 606
- prefix, server 721
- premigration 39
- prepare
 - disaster recovery 1034
- PREPARE command 1079
- PREVIEW parameter 747, 755
- primary volumes unavailable for restore 938
- private category, 349X library 108
- private volumes 28
- privilege class, administrator
 - reducing 874
- privilege class, policy
 - description 870
 - revoking 873
- privilege class, storage
 - granting 873
 - reducing 873
 - revoking 874
- problem determination
 - migration 285
- process
 - background 603
 - canceling 604
 - drive clean error checking 181
 - expiration 911
 - number for migration 258, 287
 - reclamation 382, 389
- processor value unit 590
- Product ID (PID) 590
- profile
 - associating configuration information with 701
 - changing 701, 705, 706
 - default 704, 711

- profile (*continued*)
 - defining 701, 702
 - deleting 706, 708
 - description 701
 - getting information about 708
 - locking 705
 - problems with synchronization 717
 - unlocking 705
- progressive incremental backup 12
- protecting your data 54, 147
 - active-data pools 26
 - data deduplication 322
 - simultaneous-write function 346
- protection options
 - client 7
 - server 55
- proxy node relationships 452
- publications xiii
- PVU
 - estimation 590
 - VMware environment 595

Q

- query
 - for general information 398
- QUERY ACTLOG command 766, 829
- QUERY ADMIN command 872
- query association output 562
- QUERY BACKUPSETCONTENTS command 541
- QUERY CONTENT command 401
- QUERY COPYGROUP command 759
- QUERY DB command 636
- QUERY DBSPACE command 636
- QUERY DEVCLASS command 748
- QUERY DIRSPACE 413
- QUERY DRMSTATUS command 1067
- QUERY ENABLED command 847
- QUERY EVENT command 563, 617
- QUERY FILESPACE command 459
- QUERY LICENSE command 589
- QUERY MEDIA command 152
- QUERY NODE command 453
- QUERY OCCUPANCY command 410, 411, 412
- QUERY OPTION command 822
- QUERY PROCESS command 604, 764, 821
 - identification numbers of migration processes 406
 - information about data movement process 417
- QUERY PVUESTIMATE 593
- QUERY RESTORE command 481
- QUERY SCHEDULE command 553
- QUERY SCRIPT command 625
- QUERY SERVERGROUP command 724
- QUERY SESSION command 476, 820
- QUERY SHREDSTATUS command 530
- QUERY STATUS command 822
- QUERY STGPOOL command 394, 405, 408
- QUERY SUBSCRIPTION command 713
- QUERY VOLHISTORY command 609
- QUERY VOLUME command 397, 398, 418

R

- random mode for libraries 86
- randomize, description of 570
- read-only access mode 274

- read/write access mode 273
- real-time monitoring 780
- rebinding
 - description of 45
 - file to a management class 45
- recall 5
- recall of migrated files 40
- recalling a file
 - selective 40
 - transparent 40
- receiver 832
- RECLAIM STGPOOL command 383
- reclaiming storage space 663
- reclamation 390
 - active-data pools 387
 - aggregate reconstruction 35
 - controlling duration 383
 - delayed start of process 35
 - delaying reuse of volumes 391, 911
 - description of 29
 - effects of collocation 391
 - effects of DELETE FILESPACE 35
 - multiple concurrent processes
 - copy storage pools 387
 - primary sequential access storage pools 258, 384
 - off-site volume
 - controlling when reclamation occurs 388
 - setting a threshold for sequential storage pool 258, 382, 423
 - starting reclamation manually 383
 - storage pool for 258
 - virtual volumes 386
 - with single drive 385
- reclamation thresholds 35
- RECONCILE VOLUMES command 733
- reconstructing aggregates 35, 388, 418
- recovering the client 1095
- recovering your server 1091
- recovery instructions file 1052
- recovery log 633, 638
 - active log 52, 638
 - active log mirror 639
 - alternative file locations
 - overview 673
 - specifying with ARCHFAILOVERLOGDIRECTORY option or parameter 674
 - specifying with ARCHLOGDIRECTORY parameter 675
 - specifying with RECOVERYDIR parameter 675
 - archive failover log 52, 638, 640
 - archive log 52, 638, 640
 - description of 51, 633
 - increasing the size 671
 - log mirror 52, 638, 639
 - managing 633
 - monitoring 636
 - out of space 671
- recovery logs
 - move to another directory 676
 - relocating on a server 676
- recovery media
 - client 1078
- recovery plan 1085
 - delete 1085
- recovery plan file 1084, 1085
 - break out stanzas 1043
 - using VBScript procedure 1043

- recovery plan file *(continued)*
 - creating 1079
 - default settings 1067
 - example 1049
 - restoring 1084
 - structure 1046
- recovery plan file restore 1084
- recovery plan files 1085
- recovery site 1098
- recovery site volumes 1100
- recovery, disaster
 - auditing storage pool volumes 922
 - different file versions on replication servers affects
 - recovery 1008
 - general strategy 726
 - methods 726
 - providing 726
 - recovering damaged files from a replication server 922
- redistributing data for database directories 663
- REGISTER LICENSE command 588
- REGISTER NODE command 457
- registering
 - client option sets 437
 - workstation 438
- registration
 - description of 435
 - licensing for a client node 587
 - licensing for an administrator 587
 - managing client node 434, 445
 - setting for a client node 435
 - source server 438
- remote access to clients 455
- removable file system device
 - example of setting up 101
 - REMOVABLEFILE device type, defining and
 - updating 203
 - support for 101, 203
- removable media 64
- removable media device, adding 101
- REMOVE ADMIN command 875
- REMOVE NODE command 450
- remove replication server 994
- REMOVE REPLSERVER 994
- RENAME ADMIN command 874
- RENAME FILESPACE command 763
- RENAME NODE command 449
- RENAME SCRIPT command 626
- RENAME SERVERGROUP command 724
- RENAME STGPOOL command 422
- renamed file spaces 470
- renaming
 - administrator ID 874
 - NAS node 223
 - storage pool 422
- renaming the host 607
- renaming the server 607
- replace certificates 863
- replacing tape drive 173
- replicate data 963
- replicate NAS node 255
- replication 964, 1003
 - node replication 945
 - recovering an LDAP server 940
- replication method 966, 967
- replication performance 1002, 1003
- replication target server 993
- replication time 964
- replication workload 1003
- report studio 792
- Report Studio 790
- reporting
 - modifying for performance 794
 - modifying queries 794
- reporting and monitoring 773
- reporting ANR9999D messages 833
- reports
 - client activity 782
 - custom reports 781
 - emailing Cognos reports 790
 - historical reports
 - client activity 782
 - scheduling Cognos reports 790
 - viewing reports 781
- requirements for disk subsystems 75
- resetting
 - administrative password 874
 - user password expiration 885
- restartable export 741
- restartable restore session, client
 - canceling 481
 - interrupting, active 481
 - requesting information about 481
- restore 5
 - increasing throughput using DSMMAXSG utility 138
 - selecting individual files 538
- RESTORE DB command 602
- restore interval for restartable restore sessions 480, 486
- restore operations 896
- RESTORE STGPOOL command 942
- restore to point-in-time, enabling for clients 513
- RESTOREINTERVAL server option 480, 514
- restoring
 - file 38
 - storage pools with incomplete volumes 938
 - Tivoli Monitoring for Tivoli Storage Manager
 - importing situations 816
- restoring image data
 - from backup sets 538
- Restoring Tivoli Monitoring for Tivoli Storage Manager 810
 - importing Cognos reports 817
 - restoring backups 813
 - Tivoli Enterprise Portal server
 - agent configuration settings 815
- restriction
 - ASCII characters in administrative Web interface 619
 - serial number detection 138
- retain extra versions, description of 484, 497
- retain only version, description of 484, 497
- retaining data using Centera
 - overview 65
- retaining data using CENTERA
 - unsupported functions 261
- retention grace period
 - description of archive 493
 - description of backup 493
 - for backup sets 536
 - using archive 493
 - using backup 493
- RETEXTRA parameter 484, 497
- REONLY parameter 484, 497
- retrieval date for files 299
- retrieval from archive
 - archive package 545
 - file 39

- retrieve 5
- reuse of sequential volumes
 - delaying 391, 911
 - volume pending state 400
- reusing media 155
- roll-forward recovery 638
- ROLLBACK command 631
- routing commands 683
- routing commands to servers 720
- RUN command 627

S

- SAN (storage area network)
 - client access to devices 68
 - device changes, detecting 137
 - LAN-free data movement 68
 - NDMP operations 69, 219
 - policy for clients using LAN-free data movement 511
 - sharing a library among servers 67, 114, 131
 - storage agent role 68
- scale capacity 202
- scenarios
 - policy configuration 507
- schedule
 - administrative command 611
 - associating client node with 552
 - checking the log file 565
 - coordinating 566
 - copying 560, 616
 - database backups 901
 - day of the week 614
 - defining 551, 607, 613
 - deleting 560, 617
 - description of 549
 - expiration date 615
 - failed, querying 553, 564
 - for NAS file server backup 245
 - frequency of service 614
 - initial start date 614
 - initial time 614
 - mode, setting 567
 - priority 615
 - querying 553
 - results of 563, 617
 - server administrative command 612
 - startup window 569, 614
 - type of action 615
 - uncertain status 564, 618
 - updating 613
 - viewing information about 553
- schedule event
 - managing 563, 617
 - querying 563, 617
 - viewing information about 563, 617
- schedule replication 967
- scheduled operations, setting the maximum 569
- scheduler workload, controlling 569
- scheduling mode
 - client-polling 567
 - overview of 567
 - selecting 567
 - server-prompted 567
 - setting on a client node 568
 - setting on the server 567
- scratch category, 349X library 108
- scratch volume
 - deleting 269, 609
 - description 28
 - FILE volumes 84
 - number allowed in a storage pool 258, 423
 - using in storage pools 272
- script, scheduling on client 554
- script, server
 - continuation characters 621
 - copying 625
 - defining 619
 - deleting 627
 - EXIT statement 623
 - GOTO statement 623
 - IF clause 622
 - querying 625
 - renaming 626
 - routing commands in 721
 - running 627
 - running commands in parallel 620
 - running commands serially 620
 - substitution variables 622
 - updating 624
 - used with SNMP 840
 - Web browser, restricted to ASCII entry 619
- scripts 826
- SCSI
 - automatic labeling of volumes 143
 - library with different tape technologies 200
- SCSI library
 - connect to NAS file server 236
 - connecting to the server 235
- SCSI tape library
 - setting up for NDMP operations 233
- secure sockets layer 864
 - configuration 864
- Secure Sockets Layer 856
- Secure Sockets Layer (SSL)
 - certificate
 - adding to key database 862
 - communication using 855
 - digital certificate file protection 906
 - Global Security Kit 859
- security
 - client access, controlling 456
 - data encryption
 - 3592 generation 2 526
 - 3592 Generation 2 202
 - 3592 generation 3 526
 - ECARTRIDGE 213, 214
 - IBM LTO Generation 4 168, 210, 526
 - Oracle StorageTek T10000B 168, 526
 - Oracle StorageTek T10000C 168, 526
 - Oracle StorageTek T10000D 168
 - data encryption, 3592 Generation 2 and later 168
 - features, overview 48
 - for the server 855
 - locking and unlocking administrators 876
 - locking and unlocking nodes 449
 - managing access 855, 870
 - password expiration for nodes 885
 - Secure Sockets Layer (SSL) for node replication 978, 979
- security, replicating node data 945
- SELECT command 823
 - customizing queries 824
- selective backup 38, 489
- selective recall 40

- sending commands to servers 720
- sequence number 474, 475
- sequential mode for libraries 86
- sequential storage pool
 - auditing a single volume in 920
 - auditing multiple volumes in 919
 - collocation 379
 - criteria for migrating 295
 - estimating space 394
 - migration threshold 293
 - reclamation 382
- SERIAL command 620
- serial number
 - automatic detection by the server 137, 190, 193
 - for a drive 190
 - for a library 190, 193
- serialization parameter 484, 495, 500
- server
 - backing up subfiles on 542
 - canceling process 604
 - changing the date and time 603
 - deleting 694
 - disabling access 479
 - disaster recovery 55
 - enabling access 479
 - halting 601
 - importing subfiles from 544
 - instances
 - multiple on single system 600
 - owner ID 600
 - maintaining, overview 18, 21
 - managing 50
 - managing multiple 53
 - managing operations 587
 - managing processes 603
 - messages 833
 - monitoring 683
 - multiple instances 600
 - network of IBM Tivoli Storage Manager 53
 - network of Tivoli Storage Manager servers 681
 - options
 - adding or updating 609
 - prefix 721
 - protecting 55
 - querying about processes 604, 821
 - querying options 822
 - querying status 822
 - running multiple servers 600
 - setting the server name 607
 - source replication server 947
 - starting 596
 - starting as a service
 - configuration 597
 - procedure 598
 - stopping 601
 - target replication server 947
 - updating 694
 - viewing information about 822
 - viewing information about processes 604, 821
 - Windows service 599
- server and client node machine 1074
- server console
 - logging events to 834
- server console, description of 869
- SERVER device type 726
- server group
 - copying 724
- server group (*continued*)
 - defining 723
 - deleting 725
 - member, deleting 725
 - moving a member 725
 - querying 724
 - renaming 724
 - updating description 724
- server option
 - ACTIVELOGDIRECTORY 671, 677
 - ACTIVELOGSIZE 671
 - AUDITSTORAGEstorage audit 589
 - changing with SETOPT command 609
 - COMMTIMEOUTcommunication timeout 477, 478
 - EXPINTERVAL 514
 - EXPQUIET 515
 - IDLETIMEOUTidle timeout 477, 478, 820
 - NOPREEMPT 605
 - NORETRIEVEDATEfile retrieval date 299
 - RESTOREINTERVAL 480, 486, 514
 - THROUGHPUTDATATHRESHOLD 478
 - THROUGHPUTTIMETHRESHOLD 478
 - TXNGROUPMAXmaximum transaction group size 276
- server options 608
 - ARCHFAILOVERLOGDIRECTORY 673
 - MIRRORLOGDIRECTORY 673
 - QUERYAUTH 857
 - REQSYSAUTHOUTFILE 857
 - SSLDISABLELEGACYTLS xviii
 - TECUTF8EVENT 839
- server options file 905
- server script
 - continuation characters 621
 - copying 625
 - defining 619
 - deleting 627
 - EXIT statement 623
 - GOTO statement 623
 - IF clause 622
 - querying 625
 - renaming 626
 - routing commands in 721
 - running 627
 - running commands in parallel 620
 - running commands serially 620
 - substitution variables 622
 - updating 624
 - used with SNMP 840
 - Web browser, restricted to ASCII entry 619
- server scripts 618
- server session
 - states 477
- server storage
 - active-data pools 26
 - client files, process for storing 13
 - concepts overview 16
 - considering user needs for recovering 188
 - deleting files from 428
 - evaluating 59
 - example 264
 - managing 21
 - monitoring 912
 - planning 59
 - tailoring definitions 759
 - using another IBM Tivoli Storage Manager server 726
 - using devices not recognized by IBM Tivoli Storage Manager 100

- server storage (*continued*)
 - using disk devices 75
 - using removable media devices 101
 - using the storage hierarchy 284
- server-free data movement
 - suggested usage 8
- server-prompted scheduling 567
- server-to-server communications, establishing
 - enterprise configuration 686
 - enterprise event logging 686
 - virtual volumes 694
- server-to-server virtual volumes
 - deduplication 726
 - reclaiming 386
 - using to store data 726
- service
 - starting the server as a Windows service 598
 - configuration 597
- services on Windows systems
 - creating for server instances 599
- session
 - canceled 477
 - negative number 481
 - server-initiated 447
 - setting the maximum percentage for scheduled operations 569
- session, client
 - canceled 477
 - DSMC loop 476
 - held volume 476
 - managing 476
 - querying 476, 820
 - viewing information about 476, 820
- sessions, maximum number for scheduled operations 1001
- SET ACCOUNTING command 831
- SET ACTLOGRETENTION command 830
- SET AUTHENTICATION command 888
- SET CLIENTACTDURATION command 573
- SET CONFIGMANAGER command 697, 700
- SET CONFIGREFRESH command 713
- SET CONTEXTMESSAGING command 833
- SET CROSSDEFINE command 689, 692
- SET DBREPORTMODE command 636
- SET DISSIMILARPOLICIES command xvii, 1010
- SET DRMPRIMSTGPOOL command 1067
- SET EVENTRETENTION command 565, 618
- SET INVALIDPWLIMIT command 886
- SET LICENSEAUDITPERIOD command 589
- SET MAXCMDRETRIES command 572
- SET MAXSCHEDSESSIONS command 569
- SET PASSEX command 885
- SET QUERYSCHEDPERIOD command 571
- SET RANDOMIZE command 570
- SET REGISTRATION command 435
- SET RETRYPERIOD command 572
- SET SCHEDMODES command 567
- SET SERVERHLADDRESS command 689, 692
- SET SERVERLLADDRESS command 689, 692
- SET SERVERNAME command 607, 688, 689, 692
- SET SERVERPASSWORD 688, 689, 692
- SET SUBFILE 542
- SET SUMMARYRETENTION 827
- set up storage agent 864
- SETOPT command 609
- setting
 - clients to use subfile backup 543
 - compression 436
- setting (*continued*)
 - library mode 86
 - password 885
 - time interval for checking in volumes 199
- setting data deduplication options 332
- settings 577
- shared access, nodes 452
- shared dynamic serialization, description of 495, 500
- shared file system 82
- shared library 114, 131
- shared links 577
- shared static serialization, description of 495, 500
- sharing Cognos reports 791, 792
- SHRED DATA command 530
- shredding
 - BACKUP STGPOOL command 531
 - COPY ACTIVATEDATA command 531
 - DEFINE STGPOOL command 531
 - DELETE FILESPACE, command 531
 - DELETE VOLUME, command 531
 - deleting empty volumes 428
 - deleting volumes with data 429
 - description 529
 - enforcing 531
 - EXPIRE INVENTORY command 531
 - EXPORT NODE command 531, 736
 - EXPORT SERVER command 531, 736
 - GENERATE BACKUPSET command 531, 533
 - MOVE DATA command 415, 531
 - setting up 530
 - UPDATE STGPOOL command 531
- SHREDDING server option 530
- simultaneous-write operations to primary and copy storage
 - pools
 - drives 368, 369
 - inheritance model 354
 - mount points 367
 - storage pools 370
- situations
 - exporting 807
 - importing 816
- SnapLock
 - data protection, ensuring 523
 - event-based retention 522
 - reclamation 519
 - retention periods 519
 - WORM FILE volumes, setting up 523
- SnapMirror to Tape 253
- snapshot, using in backup 7, 10, 901
 - using in directory-level backups 253
- SNMP
 - agent 840
 - communications 840
 - configuring 843
 - enabled as a receiver 832, 840
 - heartbeat monitor 832, 840
 - manager 840
 - subagent 840
- Sony WORM media (AIT50 and AIT100) 147
- source replication server 947
- source server 728
- space
 - directories associated with FILE-type device classes 413
- space requirements 962
- space-managed file 39
- special file names 88

- spoke servers
 - removing 581
 - restoring to preconfigured state 582
- SQL 823
- SQL activity summary table 827
- SQL SELECT * FROM PVUESTIMATE_DETAILS 593
- ssl 856, 864
 - configuration 864
- SSL (Secure Sockets Layer)
 - certificate
 - adding to key database 862
 - communication using 855
 - digital certificate file protection 906
- SSL communication 856
- SSLDISABLELEGACYTLS option xviii
- SSLTCPADMINPORT
 - server option 861
- SSLTCPSPORT
 - server option 861
- standard storage management policies, using 484
- stanza
 - configuration 1063
 - copy storage pool volumes 1059
 - database directory 1058
 - description 1049
 - disaster recovery mode 1055
 - license information 1065
 - license registration 1059
 - Machine files 1065
 - normal mode 1056
 - primary storage pool volumes 1061
 - recovery instructions 1052
 - server requirements 1050
 - storage pools restore 1062
 - table of contents 1049
 - volume and device requirements 1053
- stanzas
 - active-data storage pool volume 1060
- start time, randomizing for a schedule 570
- startup
 - server 596
- startup window, description of 570
- static serialization, description of 495, 500
- status monitoring 577
- status of a volume in an automated library 141
- stopping the server 601
- storage agent 68
- storage area network (SAN)
 - client access to devices 68
 - device changes, detecting 137
 - LAN-free data movement 68
 - NDMP operations 69, 219
 - policy for clients using LAN-free data movement 511
 - sharing a library among servers 67, 114, 131
 - storage agent role 68
- storage devices 4, 97, 194, 195
- storage hierarchy
 - defining in reverse order 261, 275
 - establishing 27
 - example 264
 - for LAN-free data movement 275
 - how the server stores files in 276
 - next storage pool
 - definition 275
 - deleting 427
 - migration to 285, 405
 - restrictions 275
- storage hierarchy (*continued*)
 - staging data on disk for tape storage 284
- storage management policies
 - description of 36
 - managing 483
 - tailoring 492
 - using standard 484
- storage objects 22
- storage occupancy, querying 410
- storage pool 4, 24
 - 3592, special considerations for 200
 - active-data pool 26
 - amount of space used 411
 - auditing a volume 912
 - comparing primary and copy types 424
 - copy 25
 - creating a hierarchy 27
 - data format 222, 258, 261
 - defining 257
 - defining a copy storage pool 422
 - defining for disk, example 261, 275
 - defining for LAN-free data movement 265
 - defining for NDMP operations 233
 - defining for tape, example 261, 275
 - deleting 427
 - description of 24
 - destination in copy group 494, 500
 - determining access mode 258, 423
 - determining maximum file size 258
 - determining whether to use collocation 258, 372, 423
 - duplicate, using to restore 938
 - enabling cache for disk 258, 298
 - estimating space for archived files on disk 393
 - estimating space for backed up files on disk 393
 - estimating space for disk 392
 - estimating space for sequential 394
 - estimating space in multiple 27
 - incomplete, using to restore 938
 - LTO Ultrium, special considerations for 208
 - managing 257
 - monitoring 394
 - moving files 414
 - moving files between 415
 - multiple, using to restore 938
 - next storage pool
 - definition 275
 - deleting 427
 - migration to 285, 405
 - policy use 494, 500
 - primary 25
 - protecting 908, 909, 910, 911, 923
 - querying 394
 - renaming 422
 - restoring 932, 934, 938, 942
 - search-and-selection order for active files 426
 - simultaneous-write function 346
 - updating 257
 - updating for disk, example 263, 276
 - using cache on disk 258, 298
 - validation of data 915
 - viewing information about 394
 - volumes, restoring 935, 936, 937
- storage pool volume 24
- storage pool volume stanzas 1060
- storage pool volumes
 - random-access 267
 - sequential-access 267

- storage pool volumes stanzas 1059
- storage privilege class 857
 - granting 873
 - reducing 873
 - revoking 874
- storage volume
 - auditing 912
 - contents 401
 - formatting random access 81, 269
 - information about 398
 - labeling sequential access 143, 270
 - monitoring use 397
 - preparing sequential access 143, 270
- StorageTek devices 212
- storing
 - disaster recovery plan 1080, 1081
- stub file 39
- subfile backups
 - deleting 544
 - description of 542
 - example of 542
 - expiring 544
 - managing 543
 - restoring 544
- subordinate storage pool 275
- subscriber, deleting 718
- subscription
 - defining 711, 712
 - deleting 714
 - scenario 712
- subset node replication 966
- substitution variables, using 622
- system catalog tables 823
- system privilege class
 - revoking 874

T

- table of contents 249
 - generating for a backup set 539
 - managing 225, 250
- table space 665
- tape
 - capacity 216
 - compatibility between drives 173
 - exporting data 749
 - finding for client node 404
 - monitoring life 400
 - number of times mounted 400
 - planning for exporting data 748
 - recording format 197
 - rotation 31, 160
 - scratch, determining use 258, 272, 423
 - setting mount retention period 199
- tape drive, replacing 173
- tape failover 1022
- tape rotation 4
- target policies
 - enabling xvii, 1010
- target replication server 947
 - configuring 993
- target server 728
- TCP keepalive
 - enabling 227
 - overview 226
 - specifying connection idle time 227
- TCP/IP 446
 - continued*
 - connect server to database 635
 - IPv4 446
 - IPv6 446
 - TECUTF8EVENT option 839
 - temporary disk space 644
 - temporary space 644
 - test replication 1002
 - text editor
 - to work with client 441
 - threshold
 - migration, for storage pool
 - random access 287
 - sequential access 294
 - reclamation 258, 382, 423
 - throughput capability 1002
 - THROUGHPUTDATATHRESHOLD server option 478
 - THROUGHPUTTIMETHRESHOLD server option 478
 - tiered data deduplication 331
 - tiering 331
 - time interval, setting for checking in volumes 199
 - timeout
 - client session 478
 - Tivoli Directory Server
 - configure for TLS 866
 - configure for TLS on the CLI 867
 - Tivoli Enterprise Console 836
 - setting up as a receiver 839
 - Tivoli Enterprise Portal workspaces 774
 - Tivoli event console 832, 836
 - Tivoli Monitoring for Tivoli Storage Manager V7.1
 - updates xvi
 - Tivoli Storage Manager 780
 - server network 681
 - Tivoli Storage Manager concepts
 - reclamation 34
 - Tivoli Storage Manager definitions 819
 - Tivoli Storage Manager device driver 92, 93
 - Tivoli Storage Manager for Space Management
 - description 39
 - migration of client files
 - eligibility 491
 - policy for, setting 491
 - premigration 39
 - reconciliation between client and server 40
 - simultaneous-write function, version support for 348
 - space-managed file, definition 39
 - TLS (Transport Layer Security)
 - certificate
 - adding CA-signed 862
 - specifying communication ports 861
 - TLS communication 856
 - transactions, database 633, 678
 - Transport Layer Security 856
 - Transport Layer Security (TLS) 859
 - specifying communication ports 861
 - troubleshooting
 - device configuration 135
 - errors in database with external media manager 164
 - tsmdlst 88
 - tsmdlst utility 88
 - TXNBYTELIMIT client option 277
 - TXNGROUPMAX server option 276
 - type, device
 - 3590 195
 - 4MM 194, 195
 - 8MM 194, 195

type, device (*continued*)

- CENTERA 65
- DISK 194
- DLT 194, 195
- ECARTRIDGE 195
- FILE 194
- GENERICTAPE 194, 195
- LTO 196, 208
- multiple in a single library 72
- REMOVABLEFILE 194
- SERVER 194, 195, 728, 730
- VOLSAFE 212
- WORM 194, 195

typographic conventions xiii

U

- Ultrium, LTO device type
 - device class, defining and updating 208
 - encryption 168, 210, 526
 - WORM 147, 212
- unavailable access mode
 - description 274
 - marked with PERMANENT parameter 159
- uncertain, schedule status 564, 618
- Unicode
 - automatically renaming file space 464
 - client platforms supported 462
 - clients and existing backup sets 471
 - deciding which clients need enabled file spaces 463
 - description of 462
 - displaying Unicode-enabled file spaces 470
 - example of migration process 469
 - file space identifier (FSID) 470, 471
 - how clients are affected by migration 468
 - how file spaces are automatically renamed 466
 - migrating client file spaces 463
 - options for automatically renaming file spaces 464
- Unicode versions
 - planning for 466
- unified logon
 - enable 891
- unified logon for Windows NT 890
- uninstalling 93
- UNIQUEDPTECEVENTS option 837
- UNIQUETECEVENTS option 837
- UNLOCK ADMIN command 876
- UNLOCK NODE command 449
- UNLOCK PROFILE command 705, 706
- unplanned shutdown 601
- unreadable files 921, 922
 - recovering
 - replication server 922
- UPDATE ADMIN command 874
- UPDATE ARCHIVE command 546
- UPDATE BACKUPSET command 540
- UPDATE CLIENTOPT command 475
- UPDATE CLOPTSET command 475
- UPDATE COPYGROUP command 494, 500
- UPDATE DEVCLASS command 195
- UPDATE LIBVOLUME command 28
- UPDATE NODE command 448, 469
- UPDATE SCHEDULE command 613
- UPDATE SCRIPT command 624
- UPDATE SERVER command 694, 695
- UPDATE VOLUME command 271
- upgrading tape drives 173

URL

- Operations Center 580
- URL for client node 434
- user exit 832
- user exit program 850, 1127
- user ID, administrative
 - creating automatically 457
 - description of 434
 - preventing automatic creation of 458
- user-exit declarations 848, 1125

V

- validate
 - node data 526
- VALIDATE LANFREE command 135
- VALIDATE POLICYSET command 502
- validating data
 - during a client session 525
 - for storage pool volumes 915
 - for virtual volumes 726
 - logical block protection 169
 - performance considerations for nodes 526
 - performance considerations for storage pools 918
- variable, accounting log 831
- VARY command 82
- varying volumes on or off line 82
- VERDELETED parameter 484, 497
- VEREXISTS parameter 484, 497
- verify
 - cluster configuration 1028
- Verifying and deleting Tivoli Monitoring for Tivoli Storage Manager backups
 - DB2
 - verifying and deleting backups 804
- versions data deleted, description of 484, 497
- versions data exists, description of 484, 497
- virtual file space mapping, command 252
- virtual tape libraries 128, 130
 - configuring 128
 - managing 128
- virtual tape library 128, 129
 - configuring 129
 - storage capacity 128
- virtual volume
 - performance expectations 729
- virtual volumes, server-to-server
 - deduplication 726
 - reclaiming 386
 - using to store data 726
- VIRTUALMOUNTPOINT client option 460
- VMware host environment
 - hardware scans 595
- VOLSAFE device class 212
- volume 4
- volume capacity 197
- volume history 903
 - deleting information from 609
- volume history file 84, 903
- volume reuse 84
- volumes
 - access preemption 606
 - allocating space for disk 81, 269
 - assigning to storage pool 269
 - auditing 151, 912
 - auditing considerations 912
 - automated library inventory 142

- volumes (*continued*)
 - capacity, compression effect 217
 - checking out 150
 - contents, querying 401
 - defining to storage pools 271
 - delaying reuse 391, 911
 - deleting 428, 429, 609
 - detailed report 403
 - determining which are mounted 748
 - disk storage 271
 - disk storage pool, auditing 918
 - errors, read and write 399
 - estimated capacity 399
 - finding for client node 404
 - help in dsmc loop session 476
 - labeling using commands 162
 - location 400
 - managing 149
 - monitoring life 400
 - monitoring movement of data 418
 - monitoring use 397
 - mount retention time 199
 - moving files between 414
 - number of times mounted 400
 - off-site, limiting number to be reclaimed 390
 - offsite, limiting number to be reclaimed 258
 - overview 28
 - pending status 400
 - querying contents 401
 - querying for general information 398
 - random access storage pools 25, 269, 272
 - reclamation 385
 - reuse delay 391, 911
 - scratch 28
 - scratch, using 272
 - sequential 271
 - sequential storage pools 143, 270
 - setting access mode 273
 - standard report 402
 - status, in automated library 141, 267
 - status, information on 399
 - updating 271
 - using private 28, 141, 267
 - varying on and off 82
 - WORM scratch category 108
- volumes stanzas 1059, 1060
- VTL 129
- Windows device driver 93
- Windows Server 2008 94
- Windows service
 - starting the server 598
 - configuration 597
- Windows services
 - creating for server instances
 - manually 599
- Windows unified logon 890
- wizard
 - client configuration 441
 - cluster configuration 1029
 - setup 441
- workstation, registering 438
- WORM devices and media
 - DLT WORM 147
 - IBM 3592 147
 - LTO WORM 147
 - Oracle StorageTek T10000B drives 148
 - Oracle StorageTek T10000C drives 148
 - Oracle StorageTek T10000D drives 148
 - Quantum LTO3 147
 - reclamation of optical media 386
 - Sony AIT50 and AIT100 147
 - special considerations for WORM media 147
 - VolSafe
 - considerations for media 147
 - defining VOLSAFE device classes 212
 - WORM FILE and SnapLock 518
 - WORM parameter 212
- WORM scratch category for volumes in 349X library 108
- writing data simultaneously to primary and copy storage pools
 - use during client storage operations 346

W

- web administrative interface
 - description 18
- Web administrative interface
 - limitation of browser for script definitions 619
- Web backup-archive client
 - granting authority to 457
 - remote access overview 455
 - URL 434, 455
- web server
 - starting 583
 - stopping 583
- what's new
 - best practice xix
- Windows Active Directory
 - configuring 868
- Windows cluster configuration 1020
- Windows clustered environment 1020



Product Number: 5608-E01
5608-E02
5608-E03

Printed in USA