


Quick-Start Guide

TouchLinc™ – INSTEON® Wireless Touchscreen Controller

Model: 2448

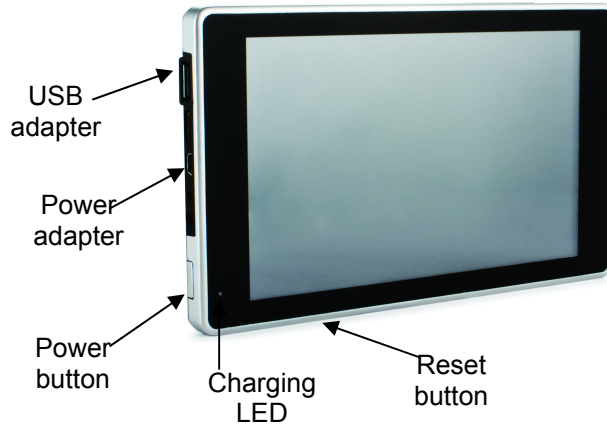

Introduction

With this handheld controller's simple interface and wireless connection, programming and controlling your INSTEON systems will be easier and more convenient than ever. Includes stylus and charger. Tabletop Stand/Wall Mount (sold separately) adds even more flexibility to your INSTEON system.

Installing TouchLinc

- 1) Register for firmware updates at www.smarthome.com/tlreg
- 2) If needed, connect the power supply to TouchLinc and plug into an outlet
NOTE: Typical battery life is 3-4 hours. It is recommended that you plug the power supply into TouchLinc when not in use. While charging, the battery icon in the taskbar will show as half full. This is the default icon and does not represent charging progress.
- 3) Press & hold the Power button (on the left edge) until TouchLinc begins to boot up
TouchLinc should boot up and a network setup dialog box should open

Using TouchLinc

To launch an application, either:

- Double-tap the icon
- Press & hold the icon until the text box opens, and then select "Open"

Internet Explorer	Settings	Calibrate	My Computer	Recycle Bin
Opens the INSTEON system's homepage	Opens the TouchLinc general settings	Opens the Calibration wizard	Shows disk drives and hardware connected to TouchLinc	Contains files and folders that you have deleted from TouchLinc

HINT: You can scroll down in the Settings pane to see additional setting options.

Energy Save Mode

To conserve power, the TouchLinc backlight will shut off after 3 minutes of non-use. Tap the screen to turn the backlight on.

NOTE: TouchLinc operates best with only one Internet Explorer window open. Opening additional Internet Explorer windows may exceed available memory.

Complete Instructions, Troubleshooting, and Tech Support

Owner's Manual: www.smarthome.com/manuals/2448.pdf

Call: INSTEON Gold Support Line at 800-762-7845