



IQM-GBA Alliance-mx Dome Electrical Gang Box Adapter

Installation Instructions

This Quick Install Guide covers the IQM-GBA Flush Ceiling mount for the Alliance-mx camera domes. Be sure to go to our website www.vicon-security.com to assure you have the most current documentation.

1 Service

If the unit needs repair service or parts, the customer should contact Vicon Industries for authorization to return, as well as shipping instructions.

2 Unpacking

The IQM-GBA Alliance-mx Electrical Gang Box Adapter assembly should include the following:

1. Electrical Gang Box Adapter
2. Pack of (8) machine screws
 - (4) #6 x 1" Philips Pan Head machine screws
 - (4) M4 x 12mm Phillips Pan Head machine screws

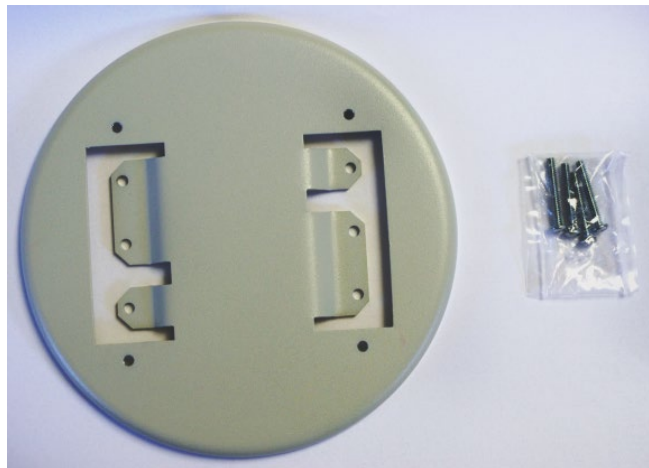


Figure 1

3 Installation

1. Route the Ethernet cable through the opening in the Electrical Gang Box Adapter, and attach the adapter as shown in Figure 2 using the four supplied #6 x 1" machine screws.

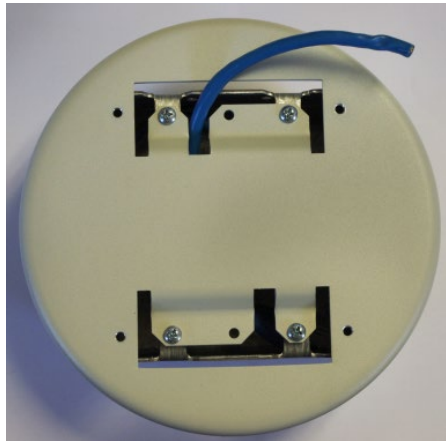


Figure 2

2. Route the Ethernet cable through the gasket installed in the enclosure. Attach the Alliance-mx series camera to the adapter as shown Figure 3 using the four M4 x 12mm machine screws and sealing washers supplied with the Alliance-mx dome camera.



Figure 3

3. After the field-of-view and focus are completed, attach the dome trim ring cover with shroud to the enclosure by tightening the three tamper-proof screws with the Torx T-20 security wrench supplied with the Alliance-mx camera.



Figure 4