



LAPP SIGNAL R 3.0 A Circular Connectors with Solder Termination Instruction Manual

[Home](#) » [LAPP](#) » LAPP SIGNAL R 3.0 A Circular Connectors with Solder Termination Instruction Manual 

Contents

- [1 LAPP SIGNAL R 3.0 A Circular Connectors with Solder Termination](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)



LAPP SIGNAL R 3.0 A Circular Connectors with Solder Termination




Product Information

- Product Name: Conductors
- Product Code: Dok.-№: L99092886 vs00
- Panel Cut-out: M3 (4x)
- Gasket: Art.№ 50201203
- Safety Certification: ISO 1580 – M3 0,5 Nm


Product Usage Instructions

Assembly instruction


1. Ensure that the product is not under load before performing any connection or disconnection.




2. Locate the panel cut-out on the desired installation surface.

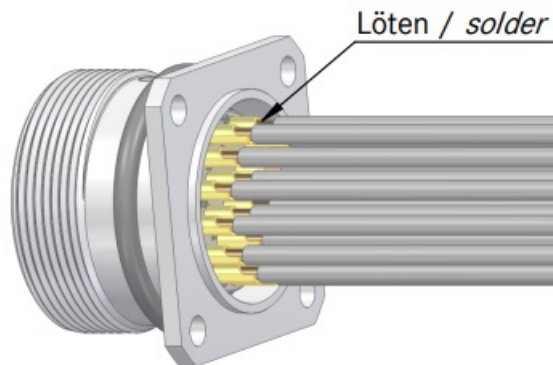

3. Using four M3 screws, secure the conductors in place.

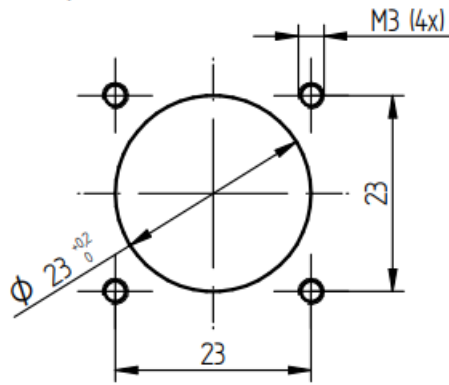

4. Tighten the screws to a torque of 0.5 Nm using an appropriate tool.

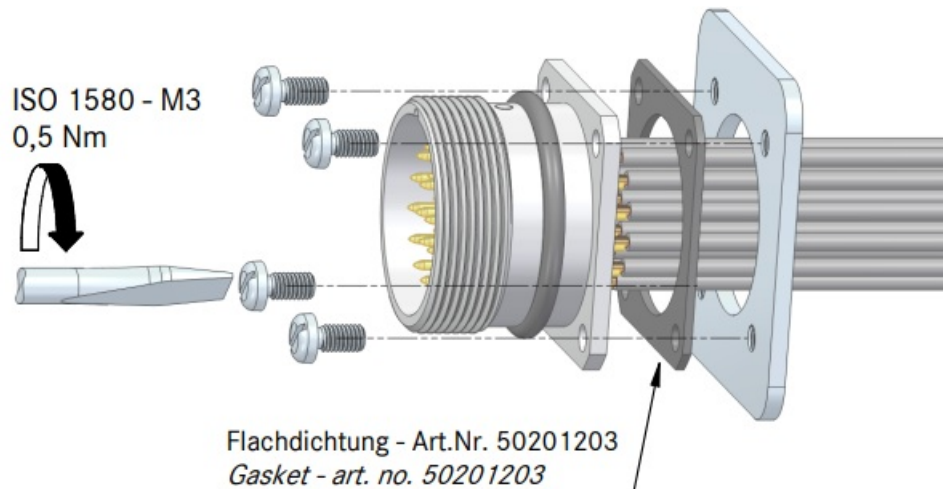

5. Install the gasket (Art.Nº 50201203) to provide a secure seal.


Note: If the content of this bag will be split on two or more units, a copy of this instruction sheet must be placed in every packing unit.

Safety Information:

- **CAUTION:** Do not disconnect under load.
- **ATTENTION:** Ne pas utiliser pour couper le courant.

<http://www.lappgroup.com>

Documents / Resources



LAPP SIGNAL R 3.0 A Circular Connectors with Solder Termination [pdf] Instruction Manual
00008747, 00008825, 00008867, SIGNAL R 3.0 A Circular Connectors with Solder Termination, SIGNAL R 3.0 A, Circular Connectors with Solder Termination, Circular Connectors, Connectors

References

-  [Lapp Group](http://www.lappgroup.com)