


Digital Set Top Box Set-Up-Guide




Unpack the box

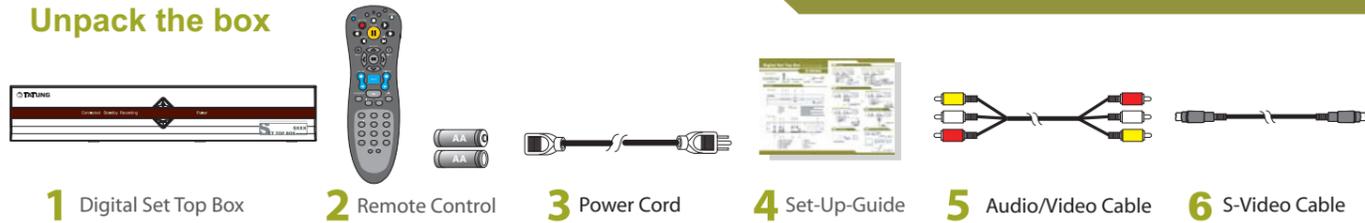

- 1 Digital Set Top Box
- 2 Remote Control
- 3 Power Cord
- 4 Set-Up-Guide
- 5 Audio/Video Cable
- 6 S-Video Cable

Features

Front Panel

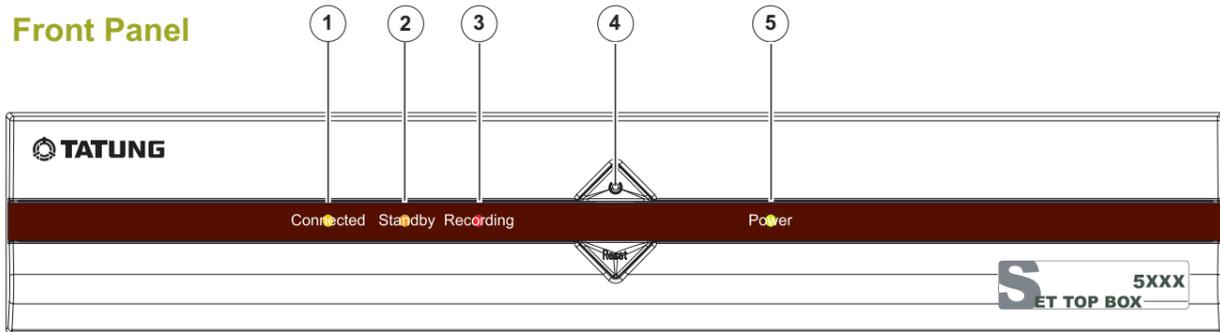

Indicators

- 1 Connected :This yellow light illuminates when DSTB is connected to the network.
- 2 Standby :This amber light illuminates when DSTB is in standby mode.
- 3 Recording :This red light illuminates when DSTB is recording a program.
- 5 Power :This green light illuminates when DSTB is on and sending a signal to the TV. (Note: the Standby light should be off.)

Buttons

- 4 Power Button :Pressing this button turns the signal to the TV on and off. If you press this button when the Power light is off and the Standby light is on (there is no signal to the TV), the Power light turns on, the Standby light turns off, and the TV receives the signal. If you press this button when the Power light is on and the Standby light is off (there is a signal to the TV), the Power light turns off, the Standby light turns on, and the TV stops receiving the signal. Note that if the Power and Standby lights are both off, the set-top box has no electrical power, perhaps because it is unplugged.


* STANDBY LED

- When the STANDBY LED is on, the DSTB is not sending a signal to the TV.
- When the STANDBY LED is off and Power LED is on, the DSTB is sending a signal to the TV.

Note:

- This function may be different for each model. Please refer to the specification of the model you purchased.
- Model No. STB-5000 has HDD inside
- Model No. STB-5001 does not have HDD inside
- The Reset Button is disabled.


Rear Panel

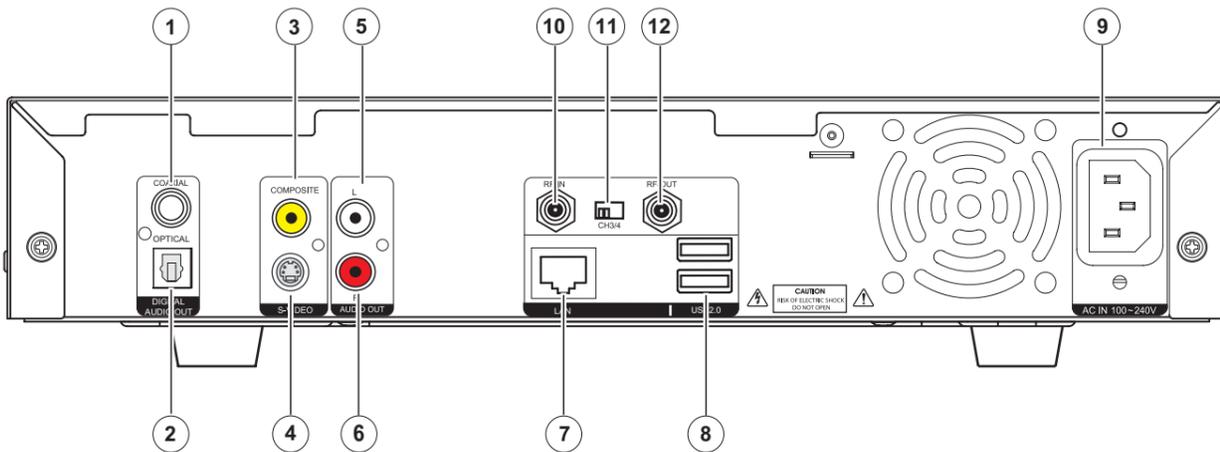


- | | |
|-----------------------------|--------------------|
| 1 DIGITAL AUDIO OUT COAXIAL | 7 LAN |
| 2 DIGITAL AUDIO OUT OPTICAL | 8 USB2.0 x2 |
| 3 COMPOSITE (Video Out) | 9 AC IN Power jack |
| 4 S-VIDEO (Video Out) | 10 RF-IN |
| 5 AUDIO OUT (Left) | 11 CH3/4 switch |
| 6 AUDIO OUT (Right) | 12 RF-OUT |

1 Audio Out

Analog Audio Out (Audio Cable)

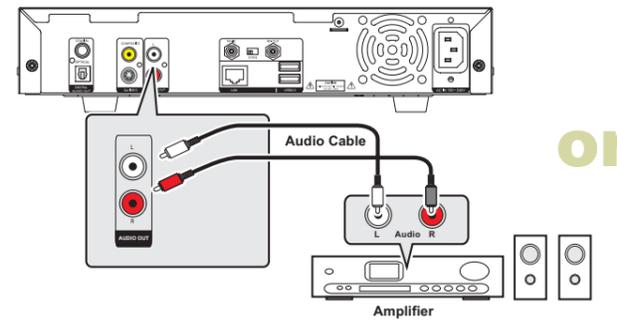


S/PDIF Out (Coaxial or Digital Optical Cable)

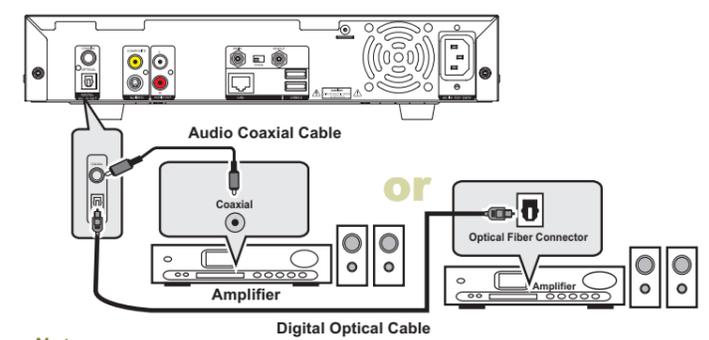


Note: The S/PDIF (coaxial and optical) jacks are not functional at this time. They may be enabled in the future.

2 Video Out


Connecting RF Modulator

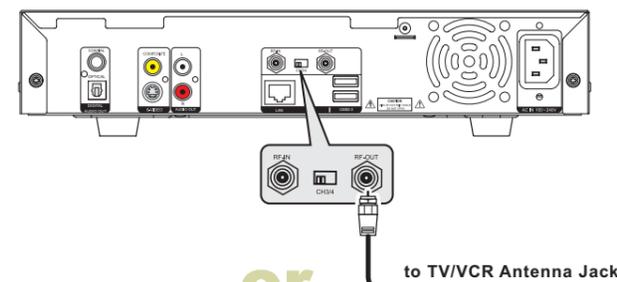


Connecting Analog AV

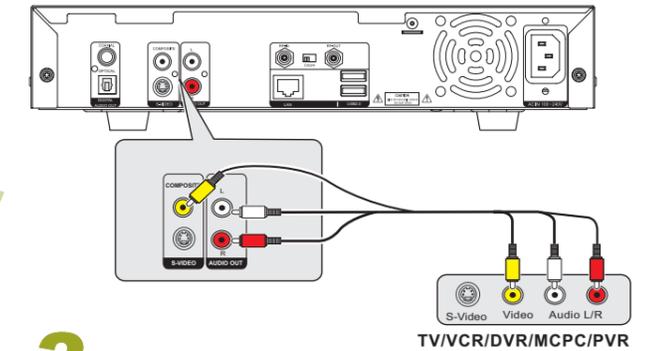


Connecting Analog S-VIDEO

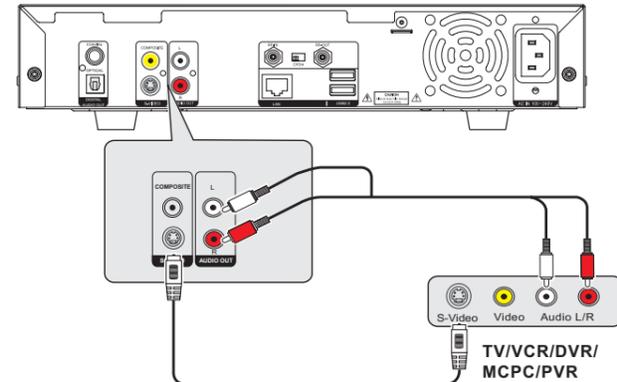

3 Local Area Network (LAN)

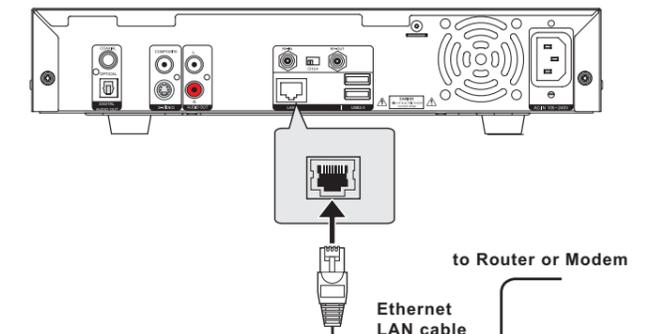


4 Installing Batteries

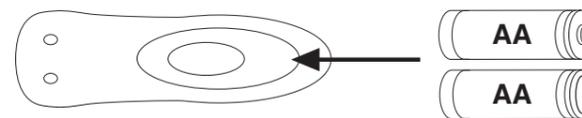

Remote Control
bottom side of view

5 Plug in Power Cord and Turn Power On

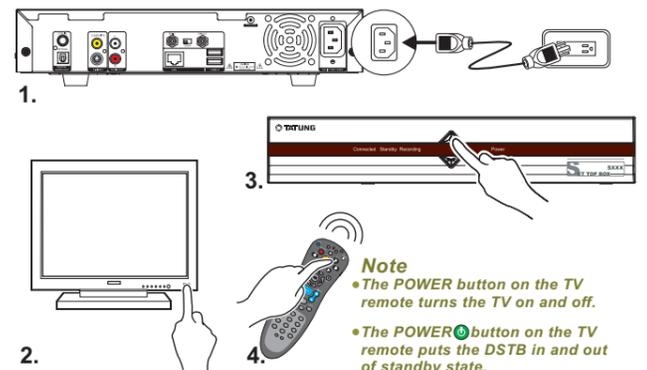

- Note
- The POWER button on the TV remote turns the TV on and off.
- The POWER button on the TV remote puts the DSTB in and out of standby state.

Safety Information

Before you getting started, please read the important safety information below.

AC Power Safety Warnings

The power supply is pre-set for the country/region in which you purchased DSTB (Digital Set Top Box). If you move to another country/region, please make sure you check its voltage requirements before plugging DSTB into an AC power outlet.

Install the DSTB near an AC outlet. The AC power cord is DSTB's main AC disconnecting device and must be easily accessible at all times.

For your safety, the power cord provided with your system has a grounded plug. Always use the power cord with a properly grounded wall outlet to avoid the risk of electrical shock.

Conventions used in this manual

 **WARNING:** Information to prevent injury to yourself when trying to complete a task.

 **CAUTION:** Information to prevent damage to the components when trying to complete a task.

Electrical Safety

- To prevent electrical shock hazard, disconnect the power cable from the electrical outlet before relocating the system.
- DO NOT OPEN THE CHASSIS ANY TIME.

Operation Safety

- Before using the product, make sure all cables are correctly connected and the power cables are not damaged. If you detect any damage, contact your Service Provider immediately.
- To avoid short circuits, keep paper clips, screws, and staples away from connectors, slots, sockets and circuitry.
- Avoid dust, humidity, and temperature extremes. Do not place the product in any area where it may become wet. Place the product on a stable surface.
- Slots and openings are provided for ventilation; to ensure reliable operation of the product and to protect it from overheating. These openings must not be blocked or covered. This product should never be placed near or over a radiator or heat register.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Troubleshooting

Quick, easy solutions for common problems.

No yellow video input jack on your TV.

You must use an RF coaxial cable to connect the RF-OUT jack on the box to the antenna input jack on your TV/VCR. Please see step 2 on this guide for details.

Only one audio input jack on your TV.

Connect the white audio cable from the white AUDIO OUT L jack on the box to the Audio Input Jack on your TV. The red audio cable or the red AUDIO OUT R jack on the box will not be used.

Some of the jacks on the box are not connected.

It is not necessary to use all of the jacks on the box.

The box has no power.

- Check power cord is connected securely from the power outlet to AC IN jack at the back of the box.
- Make sure the power outlet works properly by plugging another device into the power outlet you're using.
- If the green power light at the front of the box does not illuminate, check the batteries in your remote control are installed correctly or try other new batteries. If still no power, next.
- Point your remote control at the front of the box and press POWER . If the green power light illuminates, your box has power.

The service does not display on your TV.

- Make sure the green power light is illuminated on the box. If green light does not illuminate, back to "The box has no power." section.
- If the box was connected to TV directly, press the VIDEO source button on your TV's remote control or at the front of your TV until the service appears.
- If you connected your box through a video recorder (like VCR, DVR, PVR or MCPC), make sure the video recorder power is on, the TV is set to receive the signal from the video recorder, and the video recorder is set to receive the signal from the box.

Maintenance and cleaning

- Do not leave the box where it will be subjected to prolonged direct sunlight or extreme temperatures.
- Do not let liquids come into contact with the box. If this happens, wipe the box with a dry cloth immediately.
- Avoid exposing the box to excessive dust and sand, which may damage the box.
- Avoid areas with strong magnetic fields or placing the box around such environments or with metallic objects.
- Do not drop or hit or place heavy objects on the box.
- Do not use thinner, alcohol, benzene or other chemicals when cleaning the box.
- To avoid electrical shock, do not disassemble the case.

Information contained in this document, including graphics, websites and other names of products or companies may be claimed as the property or trademarks of the respective owners.

The actual design and specifications are subject to change without further notice. ©2005 TATUNG CO. All rights reserved.