RENTAL EQUIPMENT SETUP GUIDE

NETGEAR Nighthawk M1 4G LTE Mobile Router

Shipment Content:
1 x Protective Case
1 x 4G LTE Router
1 x Type C Power Adapter
2 x Retractable Ethernet Cable
1 x Short Ethernet Cable
1 x Mini Ethernet Switch
1 x Type B Micro USB



Quick Setup:

1. **Plug in the Type C cable and turn On** the router by holding the power button for 3 seconds. *Allow **1 minute** for the top right LED to light up blue when ready. This router can run on a charge and be moved freely by itself. See below.*


2. **Connect your Wired devices via the Mini Switch. (e.g. Ethernet enabled Printer)** Plug in the Micro USB Type B to the Mini Switch and the other end of the USB Type A to the router. *This device allows you to connect to 4 wired devices via Ethernet.*





3. **Connect one of the Ethernet Cables** to the router and the other end to Port 1 of the Mini Switch. Now you can connect the Ethernet cables to the Mini Switch Ports 2-5 and the other end to a Printer or PC.



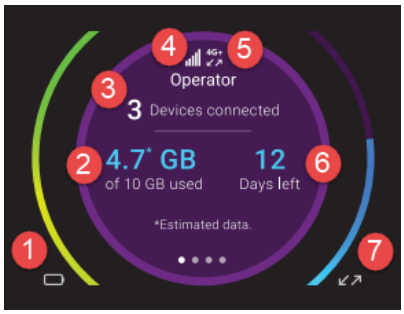

4. **Connect your Wireless devices (e.g. Tablet / PC)** Search with your device for the SSID (Wireless Network Name) on the bottom of the router along with the password in your *Important Documents Folder* to connect wirelessly. *You could also **find this information** on the LCD screen by pressing once the power button to switch screens, press twice if router is asleep.*

5. **Connect via WPS (e.g. Brother Printer)** You will need to download the Netgear Mobile App. *App is already included in the iPads from your rental.* Please make sure the device is connected to the WiFi from the router. Proceed to log in to the App using the username and password "*admin*". Select the WiFi icon. Press on WPS followed by pressing the WPS button Pairing. Now follow the WPS guideline of your printer. *See next page.*

1. Battery life
2. Data Usage
3. Devices Connected
4. Signal Strenght
5. Network Type & Up/Down Link
6. Data Plan Days
7. Up/Down Link


Setup Video Guide:
Scan this QR code with your phone camera for video.


Choose 2 Rent


Contact our Support Team:
www.choose2rent.com/help
+1 (800) 622-6484 Ext. 3 (USA)
+49 40 226 360 - 590 (Europe)

RENTAL EQUIPMENT SETUP GUIDE

NETGEAR Nighthawk M1 4G LTE Mobile Router

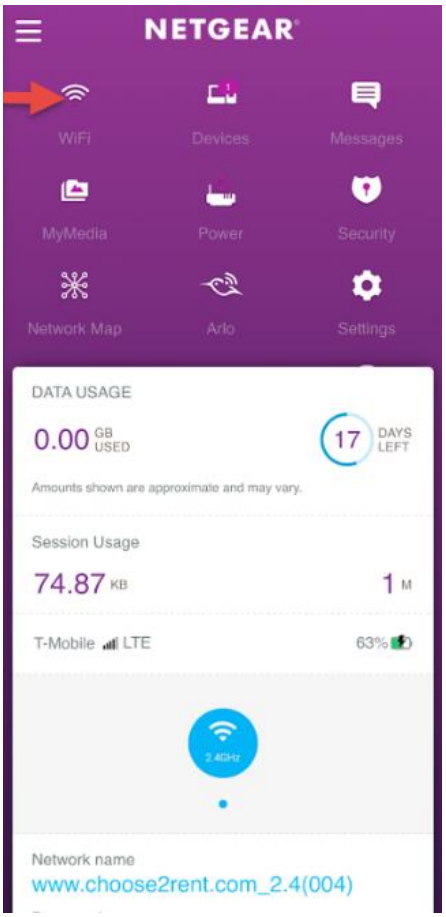

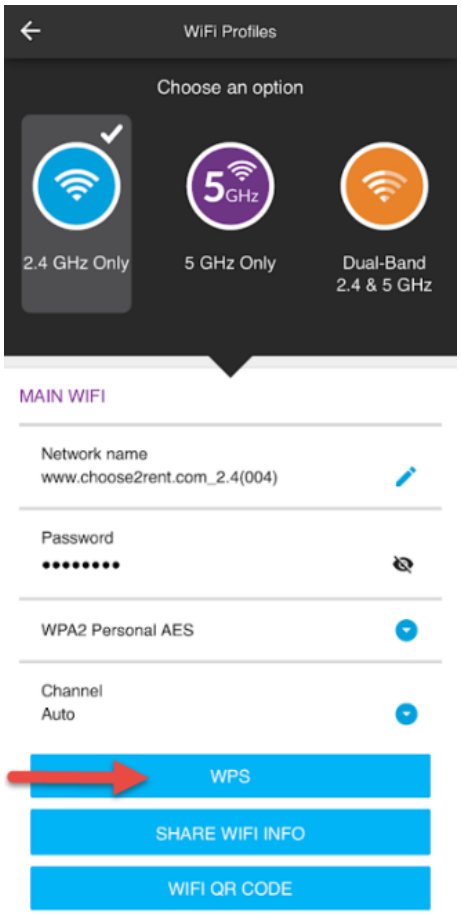

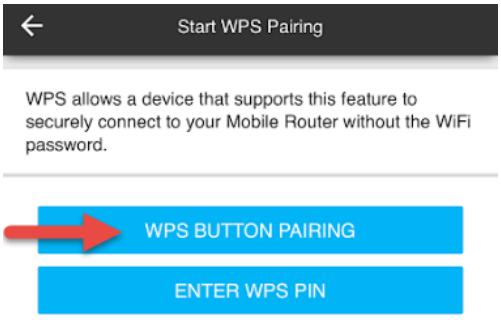

Please Do Not make any other changes through the App. It may incur a Setup Fee.

Troubleshooting:

What if…

…the router does not power up?	Please make sure you are holding the Power button for at least 3 seconds. Try plugging in the unit to power and let it charge.
…the WiFi symbol does not light up /the devices can't find WiFi to connect to?	Make sure, the WiFi function is switched On; Go to the app mentioned above and go to the WiFi screen. See above on the second image the 2.4GHz or 5GHz should be checked depending on rental equipment.
…I am reaching my Data use limit?	Please contact your event manager or Choose2Rent Client Services Representative to extend your allotted Data.
…I want to change to a hardline connection?	This unit does not support DHCP hardlines.

Setup Video Guide:
Scan this QR code with your phone camera for video.

Contact our Support Team:
www.choose2rent.com/help
+1 (800) 622-6484 Ext. 3 (USA)
+49 40 226 360 - 590 (Europe)