

OLIGHT Oclip Little Clip Light User Manual

Contents

1 OLIGHT Oclip Little Clip Light
2 Product Information
3 IN THE BOX
4 Product specification
5 Product Overview
6 Charge
7 EXCLUSION CLAUSE
8 Documents / Resources
8.1 References
9 Related Posts

OLIGHT Oclip Little Clip Light



Product Information

Specifications

COOL WHITE CCT	CRI	High	Medium	Low	Moonlight	Redlight
5700-6500K	70	300 lumens	100 lumens	10 lumens	1.5 lumens	4 lumens
Runtime						
100%	1min	60min	90min	12h	30h	5h
60%						

FAQ

Q: How long does it take to charge the light ?

A: The charging time is approximately 1.5 hours.


Q: What is the cable length of the USB-C charging cable?

A: The cable length is 0.25m.

Q: What is the input for charging?

A: The input for charging is 5V/1A.


IN THE BOX

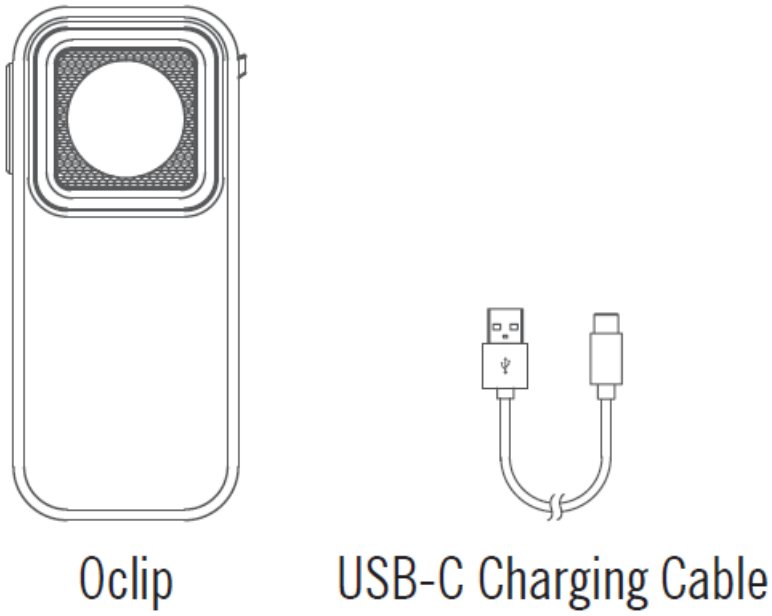

Product specification

Table 1:

Charge Type	USB-C
Cable Length	0.25m
Input	5V/1A
Charging Time	About 1.5 hours

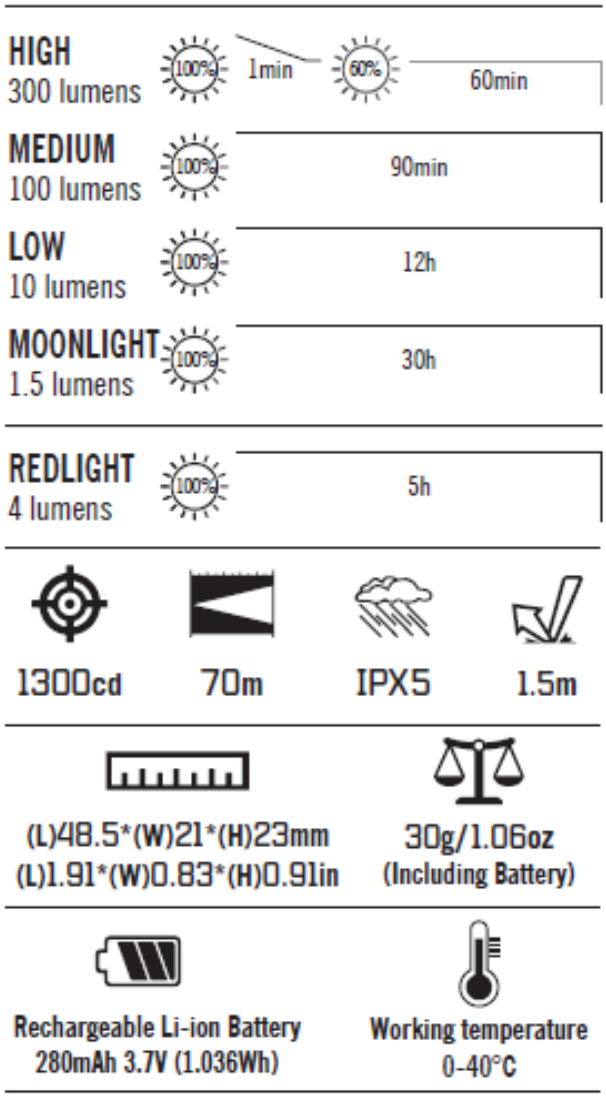

see Table 1 and Table 2.

COOL WHITE
CCT: 5700-6500K CRI: 70

- The above data are tested per ANSI/NEMA FL 1-2009 standard in Olight's labs for reference. The tests are performed indoors under a room temperature of 25 degrees celsius with windless conditions. The runtime may vary depending on the external temperature and ventilation conditions, and these biases may affect the results of testing.


Table 2:
USB-C Charging Cable

Charge Type: USB-C

Cable Length: 0.25m
Input :5V/1A
Charging Time: About 1.5 hours 0.25m

Product Overview

Figure 1
Product overview

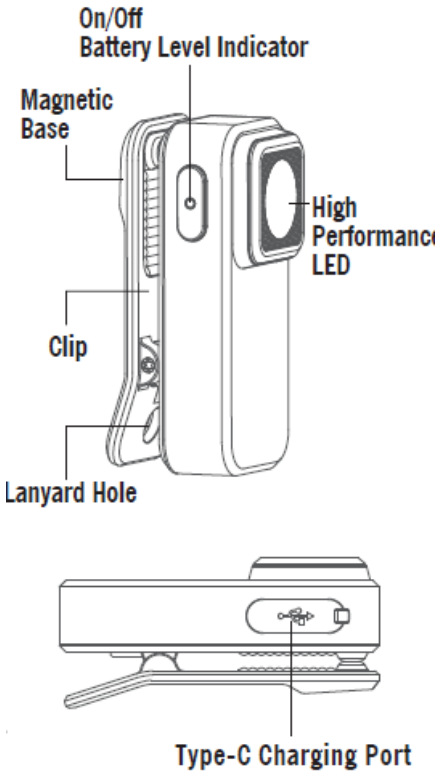

Operating instructions below:

Charge

Figure 2
Charge


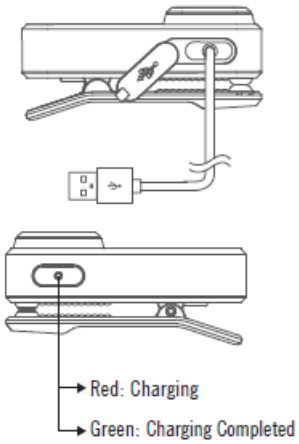


Figure 3
On/Off

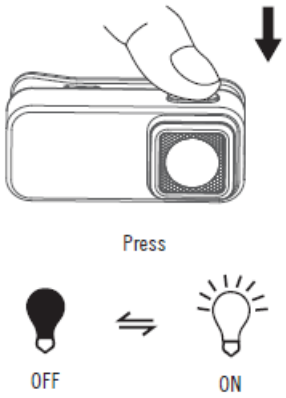

see Figure 2.

On/Off, see Figure 3.

Single press the button to turn on and off. When turned off, the current mode will be memorized. (Strobe and White Light Beacon can’t be memorized)

Lockout / Unlock, see Figure 4.

Figure 4
Lockout / Unlock


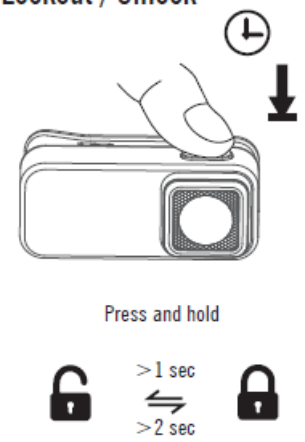


Figure 5
Moonlight mode

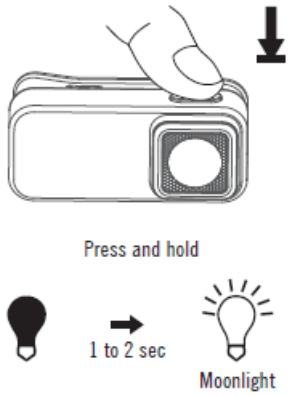


When the light is off, press and hold the side switch for about 2 seconds to access the lockout mode. The light will enter the moonlight mode first and then switch off to signal the lockout mode. The red indicator at the center of the switch will be on for a short time to indicate that the light is still in lockout mode. To unlock it, continue holding the side switch for over one second until the moonlight mode is on again.

Moonlight mode, see Figure 5.

To activate Moonlight mode, press and hold the button for 1 second or more when the flashlight is off. If the last used mode was Moonlight mode, simply press the button.

Change brightness level (White light mode only), see Figure 6.


Figure 6
Change brightness level

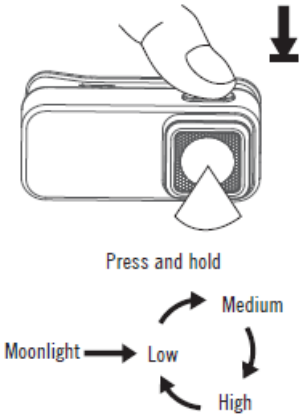

In the white light mode, long press the button to change the brightness. The output starts from the current brightness, and changes in the order of Low->Medium->High->Low. Release the button to select the brightness. (Note: Moonlight mode are not included in this cycle).

Strobe mode, see Figure 7.


Figure 7
Strobe (White light mode only)

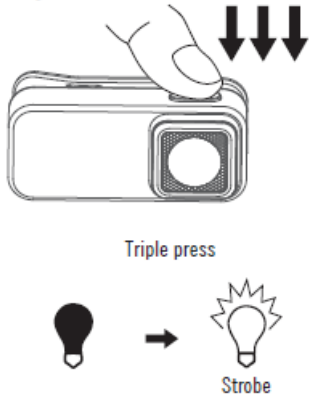

To turn Strobe on, quickly press the button three times or more when the light is off. Press or press and hold to turn off Strobe.

Red light mode, see Figure 8.


Figure 8
Red light mode

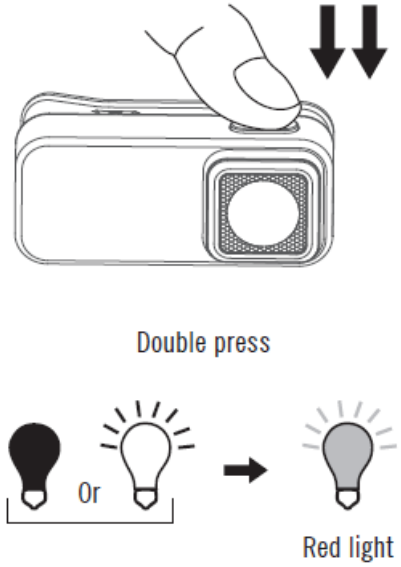

While the light is on or off, double-press to enter red light mode. Single-press to turn off, and the current mode will be memorized when the light is turned on again.

Switch between red and white light mode, see Figure 9.


Figure 9
Switch between red and white light mode

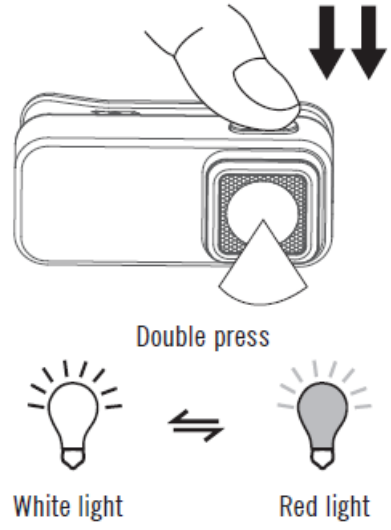

When the light is on, double press the button to switch between red light mode and white light mode.

Change red light mode, see Figure 10.


Figure 10
Change red light mode

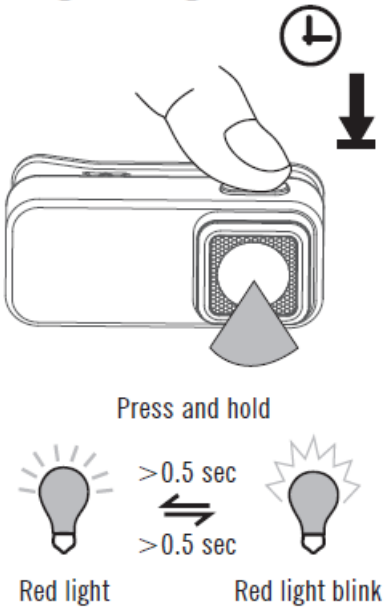

In the red light mode, press and hold for more than 0.5 seconds to switch to red light blink, release the button, and press and hold for more than 0.5 seconds to go back to constant red light.

Turn on white light beacon, see Figure 11.


Figure 11
Turn on white light beacon

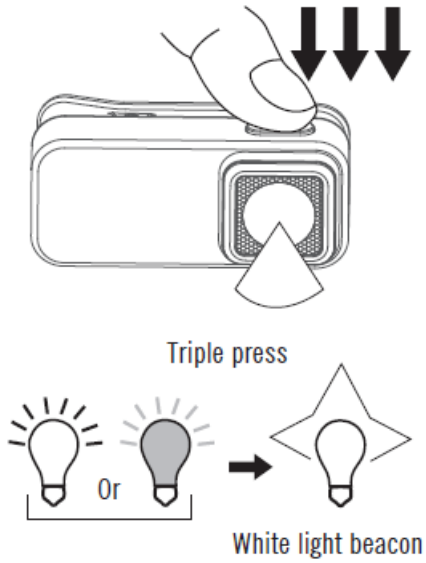

Turn on white light beacon by quickly pressing the button three times when the light is off or in red light mode. To exit the mode, simply press or press and hold the button.

Battery Indicator, see Figure 12.

Figure 12
Battery indicator

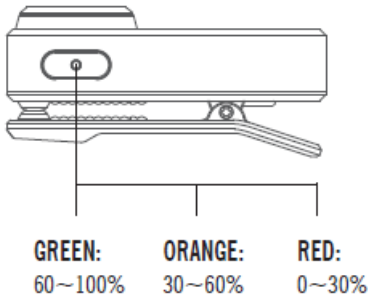

DANGER

- Do not disassemble the product.
- Do not throw the product into the fire, it may cause the battery to burn or even explode, causing unpredictable disasters.

CAUTION

- Do not look directly at the light source or shine it into your eyes, as this may cause temporary blindness or permanent damage to your eyes.
- Do not obstruct the lens, or else the energy emitted from the light may cause the object to burn.
- Don’t place, charge or use this light in a car where the temperature inside may exceed 60°C or in similar environments.
- Do not immerse the product in water or other liquid as it will damage the product.
- Do not place the light in a dusty environment as dust may enter the switch and cause functional failure.
- The clip is magnetic, and the metal powder adsorbed on the surface will affect the function, please clean it immediately.

NOTICE

- Please only use the TYPE-C charging cable to charge the product to avoid damage.
- Charge the product completely before storing it for a long period.
- If the product is carried, transported, please lock the product.
- When the charging port is not in use, keep the dust cover closed to prevent dust or foreign objects from entering.

REMARK

- Do not put a hot light into any type of fabric bag or fusible plastic container.
- Non-pet toys.
- When the ambient temperature is below 0°C/32.0 °F, the light can only output at the low and medium brightness mode.

EXCLUSION CLAUSE

Olight is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual, including but not limited to using the product inconsistent with the recommended lockout mode.

Documents / Resources

	**OLIGHT Oclip Little Clip Light** [pdf] User Manual Oclip Little Clip Light, Oclip, Little Clip Light, Clip Light, Light

References

- **Olight | Illuminate Your World.**
- **User Manual**

Manuals+, Privacy Policy