


使用说明书

一、结构说明

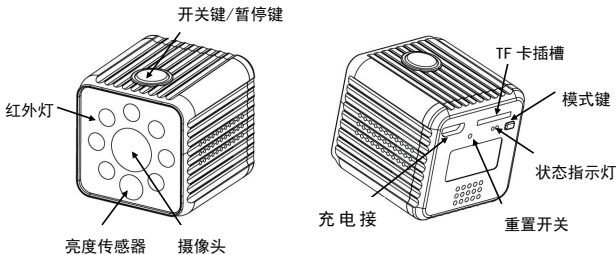

二、指示灯说明

	待机状态	工作状态
录像	蓝灯常亮，红灯常亮	蓝灯常亮.，红灯每秒闪一下，5 秒后蓝、红灯熄灭
拍照	红灯常亮	红灯闪一下
移动侦测录像	蓝灯常亮	蓝灯常亮，红灯每秒闪一下，5 秒后蓝、红灯熄灭
充电状态	充电时绿灯亮.充满自动熄灭	

三、操作方法

1. 开关机：长按 3 秒开机，长按 3 秒关机。
2. 录像：开机后进入录像待机状态（蓝、红灯常亮），短按开关机键，此时蓝灯常亮，红灯闪每秒闪一下，进入录像状态。5 秒后蓝、红色指示灯自动关闭。录像文件每三分钟一段。


3. 拍照：开机完成后，短按模式键，进入拍照待机状态(红灯常亮)，短按开关机按键，红灯闪一下完成拍照（1200 万像素 4032*3024），拍照完成后自动进入拍照待机状态。
4. 移动侦测录像：开机后短按 2 下模式键，进入移动侦测录像待机状态(蓝灯常亮)，短按开关机键，此时蓝灯常亮，红灯每秒闪一下，进入移动侦测录像工作状态。5 秒后蓝、红色指示灯自动关闭。录像文件每分钟一段。
（机器插入 T 卡并开机后，T 卡会自动生成 time.txt 的文件，可以在电脑中对 time.txt 文件进行如下配置修改）。
5. 修改时间：第一行自动生成的“2019/01/01 00:00:00”中直接修改。依次为年、月、日、时、分、秒。
6. 修改录像分辨率：第二行默认为“1080p”，如需要可以直接改为“720p”。
7. 修改录像模式：第三行默认为“1”（循环录像），改为“0”为普通录像。
8. 夜视模式：产品自带光亮传感器，光线弱会自动开启红外灯(940nm 波长)。

四、产品参数

项目	参数
视频格式	AVI
视频编码	M-JPEG
视频分辨率	720P@30fps/升级 1080P@30fps
播放软件	操作系统自带或主流影音播放软件
图片格式	JPG
影像比例	4:3
镜头角度	70°
电池容量	1000ma
白天工作时间	7 小时
晚上工作时间	约 4.5 小时
充电时间	4 小时
夜视距离	5~6 米
移动侦测距离	5 米
产品重量	43 克
工作温度/湿度	0~+50℃/0-85%
充电电压	DC-5V@1A
存储支持	最大 32GB TF 卡
电池类型	高容量聚合物锂电

User Manual

*Product Structure

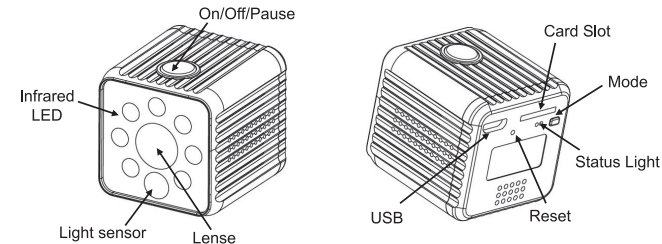

*Status Light

	Standby time	Camera Working
Video Recording	LED stays blue,LED stays red	LED stays blue,and the red flashes for 1 time each second.blue and red goes off after 5 seconds.
Taking Photo	LED stays red	LED red flashed once and goes off
Motion Detection	LED stays blue	LED stays blue,and the red flashing for 1 times each second.blue and red goes off after 5 seconds.
Charging	LED stays blue in charging and goes off once it is full charged.	

*Instructions

1. **Power on/off:** Hold on power on for 3 seconds it will power on and stand-by.Hold on it for 3 seconds again it will power off.
2. **Video recording:** In stand-by mode (LED stays blue and red) , press the button power on ,LED stays blue,the red flashes for 1 time each second,enter video recording .LED blue and red goes off after 5 seconds.The video file is 3 minutes each file.
3. **Taking photo:**after turn on the camera,press the mode button,enter take photo mode(LED stays red),press the power on button,LED red flashes 1 time then photo have done,after taken a photo enter standby mode.
4. **Motion detection:** press the mode button for twice,enter motion detection mode(LED stays blue),press the power on button,LED stays blue,the red flashes for 1 time each second ,enter motion detection mode,LED blue and red goes off after 5 seconds.The video file is 1 minutes each file.
(Please insert the SD card and power on. It will automatically have a time.txt in the root directory. Then read SD by PC, change the settings in time. txt as bellowing:
2019/01/01 00:00:00 (YYYY/MM/DD hh:mm:ss)
1080p (1080P, or, 720P)
1 (1 means auto recycle; 0 means none auto-recycle)

5. **Night vision mode:**The camera comes with a bright sensor, it will automatically turn on the infrared light when is too dark.

*Technical Specifications

Video format	AVI
Video coding	M-JPEG
Resolution	720P@30fps or upgrade 1080P@30fps
Playback software	Operating system comes with or mainstream audio and video playback software
Lens angle	70°
Battery capacity	1000mA
Max day time recording time	7H
Max night vision recording time	Max 4.5H
Charge time	4H
Night vision distance	5-6M
Motion detection distance	5M
Weight	43G
Working temperature &humidity	0~+50℃/0-85%
Power	DC-5V@1A
Max SD card	32GB
Type of battery	Li-Po