

IBM Cognos Transformer  
Version 10.1.1

*Developer Guide*



**Note**

Before using this information and the product it supports, read the information in "Notices" on page 237.

**Product Information**

This document applies to IBM Cognos Business Intelligence Version 10.1.1 and may also apply to subsequent releases. To check for newer versions of this document, visit the IBM Cognos Information Centers (<http://publib.boulder.ibm.com/infocenter/cogic/v1r0m0/index.jsp>).

Licensed Materials - Property of IBM

© Copyright IBM Corporation 2007, 2011.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

---

# Contents

|                                                                                 |           |
|---------------------------------------------------------------------------------|-----------|
| <b>Introduction . . . . .</b>                                                   | <b>xi</b> |
| <b>Chapter 1. Model Definition Language (MDL) . . . . .</b>                     | <b>1</b>  |
| .py? and .mdl formats . . . . .                                                 | 1         |
| User interface and MDL representations of a model object . . . . .              | 2         |
| MDL usage . . . . .                                                             | 3         |
| Example - Changing a model object using MDL . . . . .                           | 4         |
| Cognos Transformer and verb MDL . . . . .                                       | 5         |
| <b>Chapter 2. Cognos Transformer objects . . . . .</b>                          | <b>7</b>  |
| Object identifiers . . . . .                                                    | 7         |
| Object names . . . . .                                                          | 8         |
| Uniqueness of object names . . . . .                                            | 9         |
| Category names . . . . .                                                        | 9         |
| Column names . . . . .                                                          | 10        |
| View names . . . . .                                                            | 10        |
| Locating objects uniquely . . . . .                                             | 11        |
| Uniquely locate existing objects . . . . .                                      | 11        |
| Uniquely locate new objects . . . . .                                           | 12        |
| Setting global preferences . . . . .                                            | 12        |
| Specify a preferred category sorting option . . . . .                           | 12        |
| <b>Chapter 3. Creating a complete MDL model . . . . .</b>                       | <b>13</b> |
| Example - MDL model using IBM Cognos data sources in verb MDL . . . . .         | 13        |
| Create the data sources in Cognos Transformer . . . . .                         | 13        |
| Example - MDL model using an IQD data source in verb MDL . . . . .              | 14        |
| Step 1: Create the data sources in Cognos Transformer . . . . .                 | 14        |
| Step 2: Create the time dimension . . . . .                                     | 15        |
| Step 3: Create the products dimension . . . . .                                 | 16        |
| Step 4: Create key product measures . . . . .                                   | 17        |
| Step 5: Create allocations . . . . .                                            | 17        |
| Step 6: Create the signon . . . . .                                             | 17        |
| Step 7: Populate the model and create the PowerCube . . . . .                   | 18        |
| Step 8: Create the model by combining the scripts . . . . .                     | 18        |
| Checking the model generated by Cognos Transformer . . . . .                    | 19        |
| Example - MDL model using an IBM Cognos data source in structured MDL . . . . . | 32        |
| Example - MDL model using an IBM Cognos data source in verb MDL . . . . .       | 43        |
| Sample scripts . . . . .                                                        | 54        |
| Change data source types sample . . . . .                                       | 55        |
| Change data source sample . . . . .                                             | 55        |
| Update selected cubes sample . . . . .                                          | 55        |
| Update all cubes sample . . . . .                                               | 55        |
| Description samples . . . . .                                                   | 55        |
| Add several descriptions sample . . . . .                                       | 55        |
| Change a cube output location sample . . . . .                                  | 56        |
| Change several cube output locations sample . . . . .                           | 56        |
| Change the PowerCube output type sample . . . . .                               | 56        |
| Change optimization setting sample . . . . .                                    | 56        |
| Automate CleanHouse sample . . . . .                                            | 56        |
| Convert model file formats sample . . . . .                                     | 56        |
| Create cubes based on dimension views sample . . . . .                          | 57        |
| Update conversion rates sample . . . . .                                        | 57        |
| Disable incremental update sample . . . . .                                     | 57        |
| <b>Chapter 4. Syntax conventions . . . . .</b>                                  | <b>59</b> |

|                                 |    |
|---------------------------------|----|
| Data type conventions . . . . . | 59 |
| Syntax example . . . . .        | 59 |
| Syntax requirements . . . . .   | 60 |

## **Chapter 5. MDL verbs . . . . . 61**

|                                                   |     |
|---------------------------------------------------|-----|
| Verb types . . . . .                              | 61  |
| AllocationAdd . . . . .                           | 63  |
| ApexCat . . . . .                                 | 65  |
| AssociationAdd . . . . .                          | 66  |
| AssociationDelete . . . . .                       | 66  |
| AssociationMake . . . . .                         | 67  |
| AssociationUpdate . . . . .                       | 67  |
| AutoDesign . . . . .                              | 68  |
| CatAdd . . . . .                                  | 68  |
| CatDelete . . . . .                               | 69  |
| CatJoin . . . . .                                 | 69  |
| CatMake . . . . .                                 | 70  |
| CatMorph . . . . .                                | 71  |
| CatMoveVertical . . . . .                         | 72  |
| CatUpdate . . . . .                               | 73  |
| CatUpdateAll . . . . .                            | 73  |
| CleanHouse . . . . .                              | 73  |
| CognosPackageAdd . . . . .                        | 74  |
| CognosPackageDelete . . . . .                     | 75  |
| CognosPackageMake . . . . .                       | 75  |
| CognosPackageUpdate . . . . .                     | 76  |
| CognosPackageDatasourceConnectionAdd . . . . .    | 77  |
| CognosPackageDatasourceConnectionDelete . . . . . | 78  |
| CognosPackageDatasourceConnectionMake . . . . .   | 78  |
| CognosPackageDatasourceConnectionUpdate . . . . . | 80  |
| CognosPackageFilterAdd . . . . .                  | 81  |
| CognosPackageFilterDelete . . . . .               | 81  |
| CognosPackageFilterMake . . . . .                 | 81  |
| CognosPackageFilterUpdate . . . . .               | 82  |
| ColumnAdd . . . . .                               | 83  |
| ColumnDelete . . . . .                            | 83  |
| ColumnListUpdate . . . . .                        | 84  |
| ColumnMake . . . . .                              | 84  |
| ColumnUpdate . . . . .                            | 85  |
| CreateColumns . . . . .                           | 86  |
| CreateFiles . . . . .                             | 86  |
| CreateFromCubes . . . . .                         | 87  |
| CreateFromQueries . . . . .                       | 87  |
| CubeAdd . . . . .                                 | 88  |
| CubeDelete . . . . .                              | 88  |
| CubeGroupAdd . . . . .                            | 89  |
| CubeGroupCubeAdd . . . . .                        | 90  |
| CubeGroupCubeDelete . . . . .                     | 91  |
| CubeGroupCubeListUpdate . . . . .                 | 92  |
| CubeGroupCubeMake . . . . .                       | 92  |
| CubeGroupCubeUpdate . . . . .                     | 93  |
| CubeGroupDelete . . . . .                         | 94  |
| CubeGroupMake . . . . .                           | 95  |
| CubeGroupUpdate . . . . .                         | 96  |
| CubeMake . . . . .                                | 97  |
| CubeUpdate . . . . .                              | 98  |
| CurrencyAdd . . . . .                             | 99  |
| CurrencyDelete . . . . .                          | 100 |
| CurrencyMake . . . . .                            | 101 |
| CurrencyTableAdd . . . . .                        | 103 |
| CurrencyTableDelete . . . . .                     | 103 |

|                                         |     |
|-----------------------------------------|-----|
| CurrencyTableMake . . . . .             | 104 |
| CurrencyTableUpdate . . . . .           | 105 |
| CurrencyUpdate . . . . .                | 106 |
| CustomViewAdd . . . . .                 | 107 |
| CustomViewChildListUpdate . . . . .     | 108 |
| CustomViewDelete . . . . .              | 108 |
| CustomViewMake . . . . .                | 108 |
| CustomViewUpdate . . . . .              | 109 |
| DataSourceAdd . . . . .                 | 110 |
| DataSourceDelete . . . . .              | 111 |
| DataSourceMake . . . . .                | 112 |
| DataSourceUpdate . . . . .              | 113 |
| DeletionListUpdate . . . . .            | 113 |
| DimAdd . . . . .                        | 114 |
| DimCalcDefAdd . . . . .                 | 114 |
| DimCalcDefDelete . . . . .              | 116 |
| DimCalcDefMake . . . . .                | 116 |
| DimCalcDefUpdate . . . . .              | 117 |
| DimDelete . . . . .                     | 119 |
| DimensionListUpdate . . . . .           | 119 |
| DimMake . . . . .                       | 119 |
| DimUpdate . . . . .                     | 120 |
| DrillCatMake . . . . .                  | 121 |
| EventEnd . . . . .                      | 122 |
| EventStart . . . . .                    | 122 |
| FilterCat . . . . .                     | 122 |
| LevelAdd . . . . .                      | 123 |
| LevelDelete . . . . .                   | 124 |
| LevelMake . . . . .                     | 125 |
| LevelMoveAfter . . . . .                | 126 |
| LevelMoveBefore . . . . .               | 126 |
| LevelNewDrill . . . . .                 | 127 |
| LevelUpdate . . . . .                   | 128 |
| MDCClear . . . . .                      | 128 |
| MeasureAdd . . . . .                    | 129 |
| MeasureDelete . . . . .                 | 130 |
| MeasureListUpdate . . . . .             | 130 |
| MeasureMake . . . . .                   | 130 |
| MeasureUpdate . . . . .                 | 132 |
| ModelEnsureCompleteness . . . . .       | 132 |
| NewModel . . . . .                      | 132 |
| OpenDef . . . . .                       | 133 |
| OpenMDL . . . . .                       | 133 |
| OpenPY . . . . .                        | 134 |
| PopulateFromQueries . . . . .           | 135 |
| PopulateModel . . . . .                 | 135 |
| PowerCubeCustomViewListUpdate . . . . . | 135 |
| PowerCubeDelete . . . . .               | 136 |
| PowerCubeListUpdate . . . . .           | 136 |
| PromptAdd . . . . .                     | 137 |
| PromptDelete . . . . .                  | 137 |
| PromptMake . . . . .                    | 137 |
| PromptUpdate . . . . .                  | 138 |
| ReportPartitions . . . . .              | 138 |
| RootCatMake . . . . .                   | 139 |
| RootCatUpdate . . . . .                 | 139 |
| SaveMDL . . . . .                       | 140 |
| SavePY . . . . .                        | 140 |
| SecurityNamespaceAdd . . . . .          | 141 |
| SecurityNamespaceDelete . . . . .       | 141 |
| SecurityNamespaceMake . . . . .         | 142 |

|                                   |     |
|-----------------------------------|-----|
| SecurityNamespaceUpdate . . . . . | 142 |
| SecurityObjectAdd . . . . .       | 143 |
| SecurityObjectDelete . . . . .    | 144 |
| SecurityObjectMake . . . . .      | 144 |
| SecurityObjectUpdate. . . . .     | 145 |
| SignonAdd . . . . .               | 145 |
| SignonDelete . . . . .            | 146 |
| SignonMake . . . . .              | 147 |
| SignonUpdate . . . . .            | 147 |
| SourceListUpdate . . . . .        | 148 |
| SpecialCatAdd . . . . .           | 148 |
| SpecialCatDelete . . . . .        | 149 |
| SpecialCatMake . . . . .          | 150 |
| SpecialCatUpdate . . . . .        | 151 |
| SubDimRootMake . . . . .          | 151 |
| SubDimRootUpdate . . . . .        | 152 |
| SummarizeCat . . . . .            | 153 |
| SummarizeLevel . . . . .          | 154 |
| UpdateForwardReference . . . . .  | 154 |
| UpdatePowerCubes . . . . .        | 155 |
| ViewAdd . . . . .                 | 155 |
| ViewDelete . . . . .              | 156 |
| ViewListUpdate . . . . .          | 156 |
| ViewMake . . . . .                | 157 |
| ViewUpdate . . . . .              | 158 |

## **Chapter 6. MDL options . . . . . 159**

|                                  |     |
|----------------------------------|-----|
| appqueryopts . . . . .           | 159 |
| AppInfo . . . . .                | 159 |
| CharacterSet. . . . .            | 159 |
| CognosSource . . . . .           | 160 |
| Columns . . . . .                | 160 |
| DataRange . . . . .              | 160 |
| DecimalSep . . . . .             | 160 |
| ImrName. . . . .                 | 161 |
| Isolation . . . . .              | 161 |
| ModelStamp. . . . .              | 161 |
| PackageReportSource. . . . .     | 162 |
| PackageTimeStamp . . . . .       | 162 |
| PreSummarized . . . . .          | 162 |
| SegmenterPrompt . . . . .        | 162 |
| SegmenterPromptEnabled . . . . . | 162 |
| Separator. . . . .               | 163 |
| SetCurrent . . . . .             | 163 |
| Source. . . . .                  | 163 |
| SourceInfo . . . . .             | 163 |
| SourcePath . . . . .             | 164 |
| SourceSignonList . . . . .       | 164 |
| SourceType . . . . .             | 164 |
| Speed . . . . .                  | 165 |
| SQL . . . . .                    | 165 |
| Stamp . . . . .                  | 165 |
| StreamExtractSize . . . . .      | 166 |
| SuppressNull . . . . .           | 166 |
| ThousandSep . . . . .            | 166 |
| Timing . . . . .                 | 166 |
| UpdateCycle . . . . .            | 167 |
| Version . . . . .                | 167 |
| assocopts . . . . .              | 167 |
| AssociationContext . . . . .     | 167 |
| AssociationReferenced . . . . .  | 167 |

|                             |     |
|-----------------------------|-----|
| AssociationRole . . . . .   | 168 |
| AssociationType . . . . .   | 168 |
| catopts . . . . .           | 168 |
| Blanks . . . . .            | 168 |
| Calc . . . . .              | 169 |
| CalcDef . . . . .           | 170 |
| CatInfo . . . . .           | 170 |
| ContextLevel . . . . .      | 170 |
| ContextOffset . . . . .     | 171 |
| Current . . . . .           | 171 |
| Date . . . . .              | 171 |
| DateDrill . . . . .         | 171 |
| ExtraWeek . . . . .         | 171 |
| Filtered . . . . .          | 172 |
| Format . . . . .            | 172 |
| Inclusion . . . . .         | 172 |
| IsKeyOrphanage . . . . .    | 173 |
| IsTruncated . . . . .       | 173 |
| Label . . . . .             | 173 |
| LastUse . . . . .           | 173 |
| NewPartition . . . . .      | 174 |
| HideValue . . . . .         | 174 |
| Orphanage . . . . .         | 174 |
| PartialWeek . . . . .       | 174 |
| Primary . . . . .           | 175 |
| PrimaryDrill . . . . .      | 175 |
| Rollup . . . . .            | 175 |
| RunningPeriods . . . . .    | 175 |
| Share . . . . .             | 175 |
| ShortName . . . . .         | 176 |
| Sign . . . . .              | 176 |
| SourceValue . . . . .       | 176 |
| SplitWeek . . . . .         | 176 |
| Suppressed . . . . .        | 177 |
| TargetLevel . . . . .       | 177 |
| TargetOffset . . . . .      | 177 |
| TimeAggregate . . . . .     | 177 |
| ToDateLevel . . . . .       | 178 |
| WeekBegins . . . . .        | 178 |
| YearBegins . . . . .        | 178 |
| cognospackageopts . . . . . | 178 |
| Description . . . . .       | 178 |
| PackageTimeStamp . . . . .  | 179 |
| SourcePath . . . . .        | 179 |
| SourceType . . . . .        | 179 |
| colopts . . . . .           | 179 |
| Calc . . . . .              | 180 |
| Class . . . . .             | 183 |
| ColSrcType . . . . .        | 184 |
| Column . . . . .            | 184 |
| ColumnInfo . . . . .        | 184 |
| Dateconstant . . . . .      | 184 |
| DateLevel . . . . .         | 185 |
| Decimals . . . . .          | 185 |
| Detail . . . . .            | 185 |
| Format . . . . .            | 185 |
| InputScale . . . . .        | 186 |
| Offset . . . . .            | 186 |
| Origin . . . . .            | 186 |
| Scale . . . . .             | 186 |
| Size . . . . .              | 187 |

|                                     |     |
|-------------------------------------|-----|
| Storage . . . . .                   | 187 |
| TimeArray . . . . .                 | 187 |
| TimeArrayCol . . . . .              | 187 |
| TimeArrayMonth . . . . .            | 188 |
| currencyrecordopts . . . . .        | 188 |
| BaseCurrency . . . . .              | 188 |
| CountryCode . . . . .               | 188 |
| CurrencyCountryLabel . . . . .      | 188 |
| CurrencyDecimals . . . . .          | 189 |
| CurrencyFormatOverride . . . . .    | 189 |
| CurrencyIsEMU . . . . .             | 189 |
| CurrencySymbol . . . . .            | 189 |
| EmuEntryDate . . . . .              | 190 |
| EuroBaseCurrency . . . . .          | 190 |
| currencytableopts . . . . .         | 190 |
| CurrencyCountryCodeColumn . . . . . | 190 |
| CurrencyDateColumn . . . . .        | 190 |
| CurrencyLabelColumn . . . . .       | 191 |
| CurrencyRateColumn . . . . .        | 191 |
| CurrencyTableType . . . . .         | 191 |
| deletionopts . . . . .              | 191 |
| CalcDef . . . . .                   | 191 |
| Column . . . . .                    | 192 |
| Cube . . . . .                      | 192 |
| DataSource . . . . .                | 192 |
| Dimension . . . . .                 | 192 |
| Levels . . . . .                    | 192 |
| Measure . . . . .                   | 193 |
| Signon . . . . .                    | 193 |
| View . . . . .                      | 193 |
| dimopts . . . . .                   | 193 |
| Association . . . . .               | 193 |
| DaysInWeek . . . . .                | 194 |
| DimDefaultCategory . . . . .        | 194 |
| DimInfo . . . . .                   | 194 |
| DimType . . . . .                   | 195 |
| EarliestDate . . . . .              | 195 |
| ExcludeAutoPartitioning . . . . .   | 195 |
| LatestDate . . . . .                | 195 |
| ManualPeriods . . . . .             | 196 |
| NewCatsLock . . . . .               | 196 |
| filteropts . . . . .                | 196 |
| CognosPackageFilterRef . . . . .    | 196 |
| DATASOURCE . . . . .                | 196 |
| CognosPackageFilterDelete . . . . . | 196 |
| CognosPackageFilterUpdate . . . . . | 197 |
| ExpMark . . . . .                   | 197 |
| FilterDescription . . . . .         | 197 |
| levelopts . . . . .                 | 197 |
| Association . . . . .               | 197 |
| Blanks . . . . .                    | 198 |
| CategoryCode . . . . .              | 198 |
| CatLabFormat . . . . .              | 198 |
| DateFunction . . . . .              | 198 |
| Description . . . . .               | 199 |
| Filtered . . . . .                  | 199 |
| Format . . . . .                    | 199 |
| Generate . . . . .                  | 199 |
| Inclusion . . . . .                 | 200 |
| LevelInfo . . . . .                 | 200 |
| Label . . . . .                     | 200 |



|                               |     |
|-------------------------------|-----|
| NewCatsLock . . . . .         | 200 |
| OrderBy . . . . .             | 201 |
| SortOrder . . . . .           | 201 |
| SortAs. . . . .               | 201 |
| Partition . . . . .           | 202 |
| RefreshLabel . . . . .        | 202 |
| RefreshDescription . . . . .  | 202 |
| RefreshShortName. . . . .     | 202 |
| Share . . . . .               | 202 |
| ShortName . . . . .           | 203 |
| Source. . . . .               | 203 |
| Suppressed . . . . .          | 203 |
| TimeRank . . . . .            | 203 |
| UniqueCategories . . . . .    | 204 |
| UniqueMove . . . . .          | 204 |
| meaopts . . . . .             | 204 |
| ActivityMeasure . . . . .     | 204 |
| Allocation . . . . .          | 205 |
| Association . . . . .         | 205 |
| Calc . . . . .                | 205 |
| Decimals . . . . .            | 207 |
| Dimension . . . . .           | 207 |
| DrillThrough . . . . .        | 207 |
| DuplicateRollup . . . . .     | 208 |
| DuplicateWeight . . . . .     | 208 |
| Exclude . . . . .             | 208 |
| Format . . . . .              | 209 |
| IgnoreMissingValue . . . . .  | 209 |
| IsCurrency . . . . .          | 210 |
| IsFolder . . . . .            | 210 |
| Label . . . . .               | 210 |
| MeasureInfo. . . . .          | 210 |
| Missing . . . . .             | 211 |
| Rollup. . . . .               | 211 |
| Parent . . . . .              | 211 |
| Scale . . . . .               | 211 |
| ShortName . . . . .           | 212 |
| Sign . . . . .                | 212 |
| Storage . . . . .             | 212 |
| TimeStateRollup . . . . .     | 212 |
| TimeStateWeight . . . . .     | 213 |
| Timing . . . . .              | 213 |
| Weight . . . . .              | 213 |
| WeightID. . . . .             | 214 |
| powercubeopts . . . . .       | 214 |
| BlockParentTotals . . . . .   | 214 |
| Caching . . . . .             | 214 |
| Compress . . . . .            | 214 |
| Consolidate . . . . .         | 215 |
| ConsolidatedRecords . . . . . | 215 |
| CubeCreation . . . . .        | 215 |
| CubeCycle . . . . .           | 215 |
| CubeStamp . . . . .           | 216 |
| CubeUpdateLock . . . . .      | 216 |
| Database . . . . .            | 216 |
| DatabaseInfo . . . . .        | 216 |
| DataSource . . . . .          | 216 |
| DeployLocations . . . . .     | 217 |
| DeployType . . . . .          | 217 |
| DetailLevel . . . . .         | 218 |
| DrillThrough . . . . .        | 218 |

|                                                      |            |
|------------------------------------------------------|------------|
| Exclude . . . . .                                    | 218        |
| IncrementalUpdate . . . . .                          | 219        |
| Information . . . . .                                | 219        |
| MDCFile . . . . .                                    | 219        |
| MeasureName . . . . .                                | 219        |
| Optimize . . . . .                                   | 219        |
| PartitionSize . . . . .                              | 220        |
| PassesNumber . . . . .                               | 220        |
| Password . . . . .                                   | 220        |
| PublishAllowAccessToSuppressionOptions . . . . .     | 220        |
| PublishAllowMultiEdgeSuppression . . . . .           | 221        |
| PublishAllowNullSuppression . . . . .                | 221        |
| SegmenterDimension . . . . .                         | 221        |
| SegmenterLevel . . . . .                             | 221        |
| ServerCube . . . . .                                 | 221        |
| Status . . . . .                                     | 222        |
| SummaryLevel . . . . .                               | 222        |
| UseAlternateFilename . . . . .                       | 222        |
| TimeBasedPartitionedCube . . . . .                   | 222        |
| promptopts . . . . .                                 | 223        |
| PromptType . . . . .                                 | 223        |
| PromptValue . . . . .                                | 223        |
| signonopts . . . . .                                 | 223        |
| PromptForPassword . . . . .                          | 223        |
| UserId . . . . .                                     | 224        |
| password . . . . .                                   | 224        |
| AutoLogon . . . . .                                  | 224        |
| SignonNamespace . . . . .                            | 224        |
| SignonType . . . . .                                 | 224        |
| SignonInfo . . . . .                                 | 225        |
| viewopts . . . . .                                   | 225        |
| Apex . . . . .                                       | 225        |
| Cloak . . . . .                                      | 225        |
| Filter . . . . .                                     | 225        |
| LevelCloak . . . . .                                 | 226        |
| LevelFilter . . . . .                                | 226        |
| LevelSummary . . . . .                               | 226        |
| LevelSuppressed . . . . .                            | 227        |
| Name . . . . .                                       | 227        |
| NotCloak . . . . .                                   | 227        |
| NotFilter . . . . .                                  | 227        |
| NotSummary . . . . .                                 | 228        |
| NotSuppressed . . . . .                              | 228        |
| Summary . . . . .                                    | 228        |
| Suppressed . . . . .                                 | 228        |
| <b>Chapter 7. Structured MDL . . . . .</b>           | <b>229</b> |
| History of MDL . . . . .                             | 229        |
| Comparison of structured and verb keywords . . . . . | 229        |
| Using structured MDL . . . . .                       | 231        |
| Example . . . . .                                    | 231        |
| <b>Notices . . . . .</b>                             | <b>237</b> |
| <b>Index . . . . .</b>                               | <b>241</b> |

---

## Introduction

This information is intended for use with IBM® Cognos® Transformer, the OLAP modeling component delivered with IBM Cognos Business Intelligence.

You can use the *IBM Cognos Transformer Developer Guide* as a reference when writing Model Definition Language (MDL) scripts for IBM Cognos Transformer.

### Audience

This book is intended for experienced Cognos Transformer users who have an advanced understanding of Cognos Transformer concepts, functionality, and terminology. It provides all the information you need to understand MDL representation of Cognos Transformer models, but it does not explain the underlying Cognos Transformer features. Where possible, an equivalent in the user interface is given, and you should refer to the Cognos Transformer documentation for more information.

### Finding information

To find IBM Cognos product documentation on the web, including all translated documentation, access one of the IBM Cognos Information Centers. Release Notes are published directly to Information Centers, and include links to the latest technotes and APARs.

You can also read PDF versions of the product release notes and installation guides directly from IBM Cognos product disks.

### Accessibility features

This product does not currently support accessibility features that help users with a physical disability, such as restricted mobility or limited vision, to use this product.

### Forward-looking statements

This documentation describes the current functionality of the product. References to items that are not currently available may be included. No implication of any future availability should be inferred. Any such references are not a commitment, promise, or legal obligation to deliver any material, code, or functionality. The development, release, and timing of features or functionality remain at the sole discretion of IBM.

### Samples disclaimer

The Great Outdoors Company, GO Sales, any variation of the Great Outdoors name, and Planning Sample depict fictitious business operations with sample data used to develop sample applications for IBM and IBM customers. These fictitious records include sample data for sales transactions, product distribution, finance, and human resources. Any resemblance to actual names, addresses, contact numbers, or transaction values is coincidental. Other sample files may contain fictional data manually or machine generated, factual data compiled from academic or public sources, or data used with permission of the copyright holder,

for use as sample data to develop sample applications. Product names referenced may be the trademarks of their respective owners. Unauthorized duplication is prohibited.

---

## Chapter 1. Model Definition Language (MDL)

MDL is the proprietary model definition language for Cognos Transformer. You use MDL to create, manipulate, update, and store models without accessing the user interface. You can set preferences globally and also automate Cognos Transformer functions for greater efficiency.

**Tip:** You may want to modify the `cogtr.xml` file, installed in the *installation\_location*/configuration directory, to work more effectively in your particular production environment. For example, you can choose to work in structured MDL rather than verb format.

MDL represents Cognos Transformer models in text format (.mdl) and you can view the text in any text editor. The .py? file is a representation of the model, stored in default binary format. The question mark (?) in the extension .py? is replaced by the character used in your version of Cognos Transformer. Note that it is equivalent to the .mdl file, with the exception of any adjustments made on the user interface and, in some instances, passwords. For more information about Cognos Transformer file formats, see “.py? and .mdl formats.”

MDL model statements can contain verbs, objects, and options. For example, in the statement `DataSourceUpdate 257 "All Staff" SourceType ExcelDatabase`

- `DataSourceUpdate` is a verb specifying that a data source should be changed
- `257` is the object identifier and `All Staff` is its object name, identifying a specific data source object
- `SourceType ExcelDatabase` is the option that specifies the type of data source

You can use MDL in two ways:

- To create an MDL model that completely defines a Cognos Transformer model
- To create an MDL script that manipulates or updates an existing Cognos Transformer model

These uses can be combined. For example, you can append a script to the end of a model definition.

For examples of MDL scripts, see “Sample scripts” on page 54.

---

### .py? and .mdl formats

You can save Cognos Transformer models in two formats: .py? and .mdl. You can only open models saved as .py? files in the Cognos Transformer user interface. However, you can open models saved as .mdl files in either the user interface or a text editor.

Each .mdl file is a plain-text representation of the model, and may be compatible with other versions of Cognos Transformer than the one used to create it. However, it loads more slowly than a .py?-format file because it recreates all of the Cognos Transformer objects each time it loads.

You can open models saved as .mdl files on any supported UNIX, Linux, or Windows operating system, making this the preferred format to use in a mixed production environment.

The .py? format is a binary representation of the model. Although not compatible between versions of Cognos Transformer, it loads faster than the .mdl-format equivalent, even though it is larger, because the Cognos Transformer objects are not recreated when the model reloads.


As you edit a model, the size of the associated .py? file increases because information about the operations performed during model editing is retained in the file. Cognos Transformer uses this information when performing incremental updates and other subsequent cube operations. Lengthy descriptions of the appended operations can cause fragmentation of the binary file. Prevent this by periodically saving your .py? models as .mdl files.

---

## User interface and MDL representations of a model object

Based on an older version of the Great Outdoors sample, this illustration shows the Products dimension property sheet as it displays on the Cognos Transformer user interface.

To replicate this view, open the model on the user interface and, on the **Titles** tab of the **Preferences** dialog box, select the **Object identifier** display option. The code for the dimension now displays in the property sheet title; in our example, **Products** is identified by code **385**.

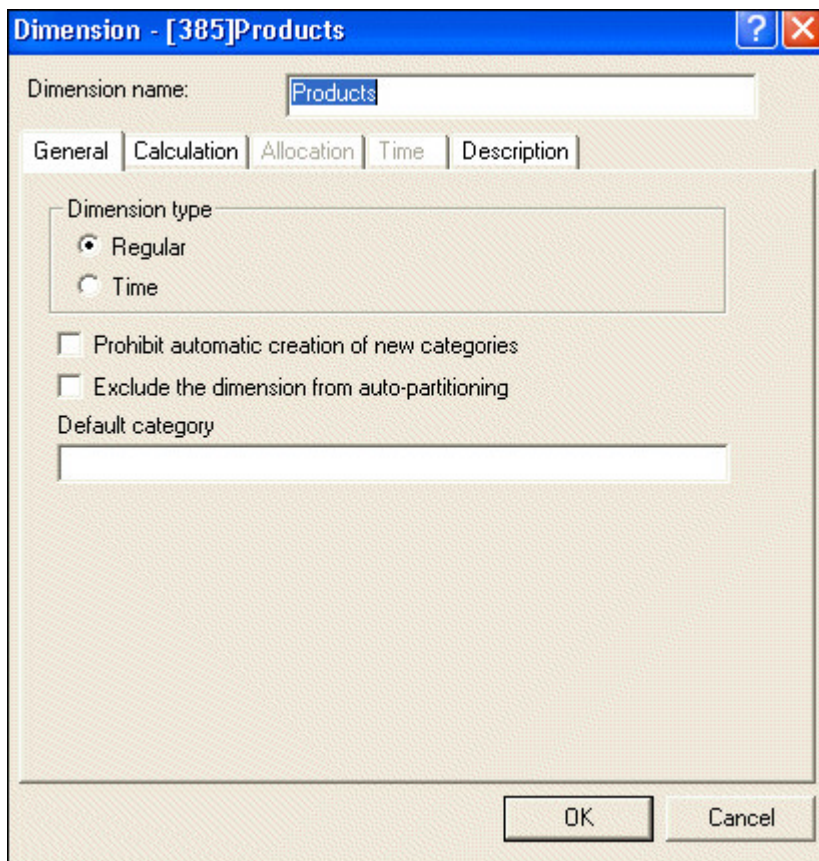

To see the corresponding MDL definition, save the model as an .mdl file, and reopen it in a text editor. You can then use the **Find** utility with the identifier (385) to locate the MDL statement that defines that dimension.

**Tip:** View your text format .mdl files in an editor that enables line-by-line numbering because Cognos Transformer error messages refer to the line on which an error occurred. However, you can use any text editor to edit MDL, as long as you save the file in text format.

On the user interface, the dimension type is **Regular** and the **Prohibit automatic creation of new categories** option is not selected. These choices are represented in the MDL statement by the options `DimType Regular` and `NewCatsLock False` as follows:

```
Dimension 385 "Products" DimType Regular NewCatsLock
False ExcludeAutoPartitioning False DimDefaultCategory 0
```

**Note:** For easier readability, line breaks are inserted in lines over 70 characters in length. This does not affect the functionality.

---

## MDL usage

Although most users find it easier to create and maintain their Cognos Transformer models and cubes from the user interface, there are situations where an experienced Cognos Transformer modeler will benefit from using MDL.

The following are some of the ways you can use MDL, beginning with basic operations and progressing to more advanced applications:

- You can save your Cognos Transformer model as an .mdl file by selecting **Save As** from the **File** menu, changing the extension of the file to .mdl, and then saving the file. You can then use the .mdl file to open the model in subsequent versions of Cognos Transformer, move models between various production servers and platforms, or archive Cognos Transformer models.

Models stored as .mdl files are compact, and because they can be opened in subsequent versions of Cognos Transformer, you need not worry about updating them.

You can also use an .mdl file to improve the performance of Cognos Transformer models.

Saving a .py? file in .mdl format integrates all of the changes made since the last MDL save into a clean model. It also prevents possible corruption of the model.

- You can open as an .mdl file in any text editor to perform global edits, such as changing all directory paths from `C:\` to `D:\` or changing all instances of "Years" to "Yrs".
- You can write scripts in MDL to manipulate Cognos Transformer models.  
For example, you can store repetitive tasks in an MDL batch file that can be run any time.
- You can use a text editor to work directly in .mdl files with Cognos Transformer models.  
For example, you can change a model on a UNIX server, create models as needed, and store parts or all of the resulting models in separate files.
- You can create custom Cognos Transformer applications.

Because MDL is an interpreted language, you can process .mdl files in any of the following ways:

- Open the .mdl file on the Cognos Transformer user interface.
- Run the .mdl file from the Windows command line using cogtr.exe.
- Access the .mdl file on a UNIX server, using the command line option -m.

## Example - Changing a model object using MDL

There are three ways that you can use MDL to modify an object in a Cognos Transformer model.

The three supported methods are listed below:

- Update the definition with a script.
- Change the MDL definition directly.
- Update the definition within the model.

For the sample model Great Outdoors.mdl, suppose you want to change the source file for Products (CSV) from Proinfo.csv to P0001.csv. The original definition of the data source is as follows:

```
DataSourceMake 103 "Products (CSV)" Separator ","
SourceType FlatFile_ColNames CharacterSet Multibyte DecimalSep "."
Thousandsep "," Columns True Timing
PopYesCreateNo
Source ".\samples\powerplay\cubes and reports\proinfo.csv"
Speed False
SetCurrent False ServerSource False
Presummarized False EnableMultiProcess False
```

You can update the definition with a script that changes the data source file to P0001.csv. This script opens the model, issues a DataSourceUpdate statement, and saves the model.

```
OpenMDL "Great Outdoors.mdl"
DataSourceUpdate "Products (CSV)" Source "c:\Production\P0001.csv"
SaveMDL "Great Outdoors (Admin).mdl"
```

Alternatively, you can change the object definition in the model. In this case, you can delete the word Proinfo in the DataSourceMake statement, and then replace it with P0001.

This is the new DataSourceMake statement:

```
DataSourceMake 103 "Products (CSV)" Separator ","
SourceType FlatFile_ColNames CharacterSet Multibyte DecimalSep "."
Thousandsep "," Columns True Timing
PopYesCreateNo
Source "c:\Production\P0001.csv" Speed False
SetCurrent False ServerSource False Presummarized False
EnableMultiProcess False
```

You can also open the MDL model in a text editor and add this DataSourceUpdate statement to the end of the model definition file:

```
DataSourceUpdate "Products (CSV)"
Source "c:\Production\P0001.csv"
```

The next time you open the model in Cognos Transformer, the change will be implemented. The original DataSourceMake statement is not altered, but your addition remains in effect as long as the DataSourceUpdate statement remains attached to the model definition.



If you update an object within the model, Cognos Transformer may be unable to complete the forward-referencing that is required in the definition of some objects. Therefore, you should use the verb `UpdateForwardReference` before the statement that updates the object, as follows:

```
UpdateForwardReference
DataSourceUpdate "Products (CSV)"
Source "c:\Production\P0001.csv"
```

For information about command line options that you can use when running scripts, see the Cognos Transformer *User Guide*. For sample MDL scripts, see “Sample scripts” on page 54.

## Cognos Transformer and verb MDL

There are two types of Model Definition Language: verb MDL and structured MDL. Both types can be used to completely define a Cognos Transformer model. However, by default, Cognos Transformer generates models in structured format, the original version of MDL. This helps to ensure compatibility between models created in different versions of Cognos Transformer.

Use verb MDL when you want to make changes to an existing model, but first you must add the following line to the `cogtr.xml` file:

```
<Preference Name="VerbOutput" Value="1"/>
```

Setting this parameter only affects the format of model definitions subsequently generated and saved by Cognos Transformer. Regardless of this setting, you can still use both verb and structured format on any output file.

For more information about using structured MDL, see Chapter 7, “Structured MDL,” on page 229.



---

## Chapter 2. Cognos Transformer objects

This section describes the objects required to build models in Cognos Transformer and explains how to specify unique object identifiers, names, and locations in Model Definition Language (MDL).

An object is a definition of a particular component of the model. For example, the **Locations** data source object contains all the information in Cognos Transformer about the data source called **Locations**.

On the user interface, the **Locations** object is defined in the **Data Source** property sheet for **Locations**. In MDL, the same information is found in the MDL statement that defines the **Locations** data source object. The property sheet settings are represented in the MDL statement as options.

Each Cognos Transformer model must have at least one model object. The model may also contain one or more of each of the following object types:

- Data Source
- IBM Cognos Source (an IBM Cognos package)
- Column
- Dimension
- Level
- Root Category
- Drill Category
- Regular Category
- Special Category
- Measure
- PowerCube
- PowerCubeGroup
- PowerCubeGroupCube
- Subdimension
- Signon
- View
- Custom View
- Currency Table
- Currency
- Dimension Calculation Definition

All Cognos Transformer objects have property sheets on the Cognos Transformer user interface. Only objects have property sheets.

---

### Object identifiers

You can track every Cognos Transformer object on the user interface and in MDL by its object identifier or its object name.

To show both object identifiers and object names on the Cognos Transformer user interface, ensure that both the **Object Identifier** and **Object Name** check boxes are selected on the **Titles** tab of the **Preferences** dialog box.

To exclude the object identifier from the user interface, clear the **Object Identifier** check box. You can also prevent the object identifier from appearing in the MDL file by clearing the **Save Object Unique Identifier values in MDL** check box on the **General** tab of the **Preferences** property sheet.

In addition to the requirement that the object identifier be unique within each model, Cognos Transformer object identifiers have several other defining characteristics, as follows:

- When auto-generated by Cognos Transformer (Windows), odd numbers identify all objects. This is a carry-over from Cognos Transformer version 7.x, which supported synchronized client-server operations, and assigned only even numbers to the equivalent server objects.
- Object identifiers are greater than 100 and less than 4,294,967,295.
- Once assigned, an object identifier cannot be changed by the modeler or the application.

As the modeler, you can specify a particular identifier and name when you create an object. For example, you can use the MDL statement `DataSourceMake 103 "Natsmall"` to uniquely identify the data source object by the identifier 103 and the name `Natsmall`.

However, because manually assigned identifiers can be difficult to maintain, and cannot be used with incrementally updated cubes, allow Cognos Transformer to automatically generate the object identifiers. A different odd number is associated with each object, and an object name is assigned if it can be determined from the source data.

**Tip:** If you copy and paste parts of your model from different MDL files, change the `ObjecytIdOutput` setting in the `cogtr.xml` file to zero, to prevent object identifiers from appearing in the MDL files. Otherwise, you cannot guarantee that the object identifiers will remain unique after they are merged.

---

## Object names

If you create a Cognos Transformer object manually using MDL, you must supply a name for it.

Because object names are not necessarily unique within a model, if you identify objects only by name you often must supply more information to uniquely identify the object.

You can change object names, but not object identifiers. For example, one way to change the object name is to type the following:

```
DataSourceUpdate 103 "newname"
```

An object name must have the following structure:

- The name must be enclosed by single or double quotes.
- The name cannot contain a carriage return.
- The name cannot be more than 256 characters in length.

## Uniqueness of object names

In certain contexts, object names for the same object type must be unique. These are the restrictions on the uniqueness of object names:

| Object names                                          | Restrictions on uniqueness                                                                                 |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Category names                                        | Must be within a dimension; applies to regular, root, drill, and special categories; see “Category names.” |
| Column names                                          | Must be within a data source; see “Column names” on page 10.                                               |
| Currency names                                        | Must be within a model                                                                                     |
| Currency table names                                  | Must be within a model                                                                                     |
| Data Source names, including package and report names | Must be within a model                                                                                     |
| DimCalcDef names                                      | Must be within a dimension                                                                                 |
| Dimension names                                       | Must be within a model                                                                                     |
| Level names                                           | Must be within dimensions, if used in an advanced subset                                                   |
| Measure names                                         | Must be within a model                                                                                     |
| PowerCube names                                       | Must be within a model; cannot be the same as a PowerCubeGroup name                                        |
| PowerCubeGroup names                                  | Must be within a model; cannot be the same as a PowerCube name                                             |
| PowerCubeGroupCube names                              | Must be within a group                                                                                     |
| Signon names (IQD sources)                            | Must be within a model                                                                                     |
| Subdimension names                                    | Must be within a dimension                                                                                 |
| View names                                            | Must be within a dimension; see “View names” on page 10.                                                   |

## Category names

Categories are identified by a category label and a category code, rather than by a single name. On the Cognos Transformer user interface, category names are derived from category labels. However, in MDL, category names are derived from category codes.

Category codes are not the same as object identifiers. To show both on the Cognos Transformer user interface, you must select the **Object Identifier** and **Category Code** check boxes on the **Titles** tab of the **Preferences** dialog box.

For example, in this **Category** property sheet, both the object identifier **6609** and the category code **104** display in the title bar for the category named **Extreme Outdoors**. The name is derived from the category label and cannot contain either a tilde (~) or an at sign (@).

In the corresponding MDL statement, the object identifier is the same: **6809**. However, the object name **104** is enclosed in double quotation marks and is based on the category code.

Category 6809 "104"

Parent 6425 Levels 1067 OrderBy Drill 1057 Value "104" Label "Extreme Outdoors"

Lastuse 20060920 SourceValue "104" Filtered False Suppressed False

Sign False HideValue False IsKeyOrphanage False IsTruncated False Blanks False

## Column names

Column names are identical in MDL and on the Cognos Transformer user interface, unless they are manually changed. Column names cannot contain an at sign (@).

## View names

In structured MDL, views are represented by the following syntax:

```
ViewName id "Name"
```

where *id* is the unique IBM Cognos Transformer identifier and "*Name*" is the name of the view.

---

## Locating objects uniquely

If an object cannot be uniquely identified by its name or identifier, you must specify its relationship within a hierarchy of objects, such as its ancestors or level in a drill-down path.

When you use both an object identifier and an object name to identify an object in MDL, the object identifier determines whether the object exists. If there is a conflict between the object name and object identifier, the object identifier is used to locate the object, and the name is then changed accordingly.

If the object does not already exist or is not uniquely identified by its object name or object identifier, then you must supply the additional information required to locate it, in the syntax for each verb.

For example, suppose you want to refer to a column that exists in your data source. If your model does not provide a unique object name or object identifier for that column, you must uniquely identify it by specifying the data source in which it exists.

Similarly, if you add a new category to a dimension, in the context of a drill-down path, a level, and a parent category, you must specify all of those objects to locate it precisely and uniquely.

On the other hand, when you refer to an existing category, even if you do not uniquely identify it by its object identifier, you only need to specify the dimension name. This is sufficient because category names are unique within dimensions, and dimension names are unique within models.

The following rules govern the identification and location of objects:

- If the object already exists and is identified by its object identifier, then no other information is needed to locate the object in the model.
- If the object already exists and is identified only by its object name, then Cognos Transformer searches the model for an object with the same name and object type and uses the first one it finds.
- If the object does not already exist, then there must be sufficient contextual information to locate it in the model precisely.

## Uniquely locate existing objects

Use the following table to uniquely locate an existing object not already identified by its object identifier:

| Object                                                                                                                              | Objects that must be referenced |
|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Currency, Dimension, Measure, Model, Data Source (query), IBM Cognos Source (package or report), PowerCube, PowerCube Group, Signon | None                            |
| Category                                                                                                                            | Dimension                       |
| Column                                                                                                                              | Data source                     |
| DimCalcDef                                                                                                                          | Dimension                       |
| Drill Category                                                                                                                      | Dimension, Root Category        |
| Level                                                                                                                               | Dimension, Drill Category       |

| Object               | Objects that must be referenced                   |
|----------------------|---------------------------------------------------|
| PowerCube Group Cube | PowerCube Group, Dimension, Category              |
| Root Category        | Dimension                                         |
| Subdimension         | Dimension, Drill Category, Level, Parent Category |
| Special Category     | Dimension, Parent Category                        |
| View                 | Dimension                                         |

## Uniquely locate new objects

Use the following table to uniquely locate a new object:

| Object                                                                                                                              | Objects that must be referenced                   |
|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| Currency, Dimension, Measure, Model, Data Source (query), IBM Cognos Source (package or report), PowerCube, PowerCube Group, Signon | None                                              |
| Category                                                                                                                            | Dimension, Drill Category, Level, Parent Category |
| Column                                                                                                                              | Data source                                       |
| DimCalcDef                                                                                                                          | Dimension                                         |
| Drill Category                                                                                                                      | Dimension, Root Category                          |
| Level                                                                                                                               | Dimension, Drill Category, Parent Category        |
| PowerCube Group Cube                                                                                                                | PowerCube Group, Dimension, Category              |
| Root Category                                                                                                                       | Dimension                                         |
| Subdimension                                                                                                                        | Dimension, Drill Category, Level, Parent Category |
| Special Category                                                                                                                    | Dimension, Parent Category                        |
| View                                                                                                                                | Dimension                                         |

---

## Setting global preferences

You can use the first few lines of your MDL script or a special MDL header file to specify global environment variables and processing preferences.

### Specify a preferred category sorting option

To globally set a sorting option for all categories in the model, specify one of the following `ModelCategoryOrderDefault` options in the first few header lines of your MDL script:

- `OrderYes`
- `OrderNo`
- `OrderUsePreference`

For more information about each option, see the Cognos Transformer *User Guide*.



---

## Chapter 3. Creating a complete MDL model

The following examples illustrate how to create complete models using Model Definition Language (MDL). Even if you never attempt this task yourself, by reviewing these examples you will learn the structure and interdependencies of Cognos Transformer MDL models.

---

### Example - MDL model using IBM Cognos data sources in verb MDL

This example creates two data sources to be used in the model. The example shows the data source definitions, not the complete model.

**Note:** The Add form illustrates the verb that you use to define an object, to differentiate the syntax from that which Cognos Transformer uses when defining objects (the Make form). However, either form is acceptable. Also, you will note that each statement starts with the verb followed by a lengthy series of options.

When you create the data sources, you define the time and products dimensions and the measures used in the model.

### Create the data sources in Cognos Transformer

This example is based on an IBM Cognos package with one query and an IBM Cognos report with one query.

```
CognosPackageAdd 103 "G0 Sales and Retailers" SourceType Package
SourcePath "/content/package[@name='G0Sales and Retailers']" PackageTimeStamp
"/content/package[@name='G0Salesand Retailers']/model[@name='model']"
```

```
CognosPackageAdd 115 "GSR_rpt_1"SourceType Report SourcePath
"/content/package[@name='G0 Sales and Retailers']/report[@name='GSR_rpt_1']"
PackageTimeStamp
"/content/package[@name='G0Sales and Retailers']/report[@name='GSR_rpt_1']"
```

```
DataSourceAdd 105 "G0 Salesand Retailers~1" Separator ","
SourceType CognosSourceQuery CharacterSetDefault DecimalSep "."
Thousandsep "," Columns True Timing PopYesCreateDefaultPackageReportSource
103 "G0 Sales and Retailers" AutoSummary TrueSetCurrent True ServerSource
False Speed False Presummarized False
```

```
ColumnAdd 107 "[gosales_goretailers].[Orders].[Ordernumber]"
DataSource 105 Origin Source Offset 0 Column "Order number"Storage
Float64 Scale 0 Size 4 Decimals 0 InputScale 0 TimeArrayOff Rollup
CountAll
```

```
ColumnAdd 109 "[gosales_goretailers].[Orders].[Retailername]"
DataSource 105 Origin Source Offset 1 Column "Retailer name"Storage Text
Scale 0 Size 102 Decimals 0 Class Description InputScale0 TimeArray Off
```

```
ColumnAdd 111 "[gosales_goretailers].[Orders].[Orderyear]"
DataSource 105 Origin Source Offset 2 Column "Order year"Storage Float64
Scale 0 Size 4 Decimals 0 InputScale 0 TimeArrayOff Rollup CountAll
```

```
ColumnAdd 113 "[gosales_goretailers].[Orders].[Ordermonth]"
DataSource 105 Origin Source Offset 3 Column "Order month"Storage Float64
Scale 0 Size 4 Decimals 0 InputScale 0 TimeArrayOff Rollup CountAll
```

```
DataSourceAdd 117 "GSR_rpt_1~1" Separator "," SourceTypeCognosSourceQuery
CharacterSet Default DecimalSep "." Thousandsep"," Columns True
Timing PopYesCreateDefaultPackageReportSource 115"GSR_rpt_1" AutoSummary
False SetCurrent True ServerSource False Speed False Presummarized
False
```

```

ColumnAdd 119 "[Report].[Query1xx.0].[Order number]"DataSource
117 Origin Source Offset 0 Column "Order number" StorageFloat64
Scale 0 Size 1 Decimals 0 Class Quantity InputScale 0 TimeArrayOff
ColumnAdd 121 "[Report].[Query1xx.0].[Order date]" DataSource117
Origin Source Offset 1 Column "Order date" Storage Int32 Scale0 Size 1
Decimals 0 Class Date InputScale 0 TimeArray Off
ColumnAdd 123 "[Report].[Query1xx.0].[Product name]"DataSource
117 Origin Source Offset 2 Column "Product name" StorageText Scale 0
Size 1 Decimals 0 Class Description InputScale 0 TimeArrayOff
ColumnAdd 125 "[Report].[Query1xx.0].[Quantity]" DataSource117
Origin Source Offset 3 Column "Quantity" Storage Float64 Scale 0 Size 1
Decimals 0 Class Quantity InputScale 0 TimeArray Off
ColumnAdd 127 "[Report].[Query1xx.0].[Revenue]" DataSource117
Origin Source Offset 4 Column "Revenue" Storage Float64 Scale2 Size 1
Decimals 2 Class QuantityInputScale 0 TimeArray Off

```

---

## Example - MDL model using an IQD data source in verb MDL

In this example, separate files are created for each part of the model. The files are then merged by means of an MDL script, using the appropriate commands and their mandatory options to create the final model. This example does not include dimension views or custom views.

**Note:** The Add form illustrates the verb that you use to define an object, to differentiate the syntax from that which Cognos Transformer uses when defining objects (the Make form). However, either form is acceptable. Also, you will note that each statement starts with the verb, followed by a lengthy series of options. For readability, you may wish to insert carriage returns between the keywords.

This is the order in which you would create the separate files for a typical complete model based on an IQD data source, using verb MDL:

- Create the data sources in Cognos Transformer.
- Create the Time dimension.
- Create the Products dimension.
- Create key product measures.
- Create allocations.
- Create the signon.
- Populate the model and create the PowerCube.
- Create the model by combining the scripts.

### Step 1: Create the data sources in Cognos Transformer

This example is based on an Impromptu® Query Definition (IQD) data source. As a result, the initial DataSourceAdd and ColumnAdd MDL statements are copied directly from the Impromptu SQL string that is automatically generated when Cognos Transformer connects to the IQD data source.

#### Que\_Col.mdl file

The first file adds information to the model from the relevant columns of the IQD data source.

```

DataSourceAdd "Products (CSV)" Separator "," SourceTypeFlatFile_ColNames
Source "c:\prodinfo.csv" ColumnAdd "Product Line"DataSource "Products (CSV)"
Origin Generated Offset 0 Column "ProductLine" ColumnAdd "Product Type"
DataSource "Products (CSV)" Origin Generated Offset 1 Column "Product Type"
ColumnAdd "Product Id" DataSource "Products (CSV)" Origin Generated Offset 2
Column "Product Id" ColumnAdd "Product Name" DataSource "Products (CSV)"

```

```

Origin Generated Offset 3 Column "Product Name" DataSourceAdd "Prod Line Plan"
Separator "," SourceType FlatFile_ColNames Source "c:\ProdPlan.asc"
ColumnAdd "YEAR" DataSource "Prod Line Plan" Origin Generated Offset 0
Column "Time" Format Y DateLevel Year Class Date ColumnAdd "PROD_LINE"
DataSource "Prod Line Plan" Origin Generated Offset 1 Column "Product Line"
ColumnAdd "FORECAST" DataSource "Prod Line Plan" Origin Generated Offset 2
Column "Planned sales" DataSourceAdd "MAIN (IQD)" Separator","
SourceType DataSource Source "c:\bsc_msrs.iqd"
SQL 'select T1."ORDER_DT" as c1,
      T2."PROD_NO" as c2,
      T1."REP_NO" as '
'c3,
      T1."CUST_NO" as c4,
      T2."QTY" as c5,
      (T2."QTY" * T2."PRI
'CE") as c6,
      T2."QTY" * T3."PROD_COST") as c7,
      CASE WHEN (((T1
'2."QTY" * T2."PRICE") - (T2."QTY" * T3."PROD_COST"))/(T2."QTY" * T2.'"
'PRICE')) <= 0.19) THEN (' 'Under
20%') WHEN (((T2." 'QTY" * T2."PRICE"
- (T2."QTY" * T3."PROD_COST")) / (T2."QTY" * T2."PR
'ICE')) BETWEEN 0.2 AND 0.65) THEN (' '20% - 65%')
WHEN (((T2." 'QTY" * T2."PRICE" -
(T2."QTY" * T3."PROD_COST")) / (T2."QTY" * T2."PR
'ICE')) >= 0.66) THEN (' 'Over 65%') ELSE ('ERROR') END) as c8
from "
'ORDER" T1,
("PRODUCT" T3 left outer join "ORDRDETL" T2 on T2."PROD_NO"
' " = T3."PROD_NO")
where (T2."ORDER_NO" = T1."ORDER_NO")
order by c1 asc'
",c3 asc,c4 asc,c2 asc"
ColumnAdd "Order Dt" DataSource "MAIN
(IQD)" Origin Source Offset 0 Column
"Time"
Storage Int32 Scale 0 Size 4 Decimals 0 Class Date InputScale 0 TimeArray Off
ColumnAdd "od-Prod No" DataSource "MAIN (IQD)" Origin Source Offset 1
Column "Product Id" Storage Float64 Scale 0 Size 5 Decimals 0 Class Quantity
InputScale 0 TimeArray Off ColumnAdd "Revenue" DataSource "MAIN (IQD)"
Origin Generated Offset 5 Column "Revenue" ColumnAdd "Cost"
DataSource "MAIN (IQD)" Origin Source Offset 6 Column "Cost" Storage Float64
Scale 0 Size 6 Decimals 0 Class Quantity InputScale 0 TimeArray Off

```

## Step 2: Create the time dimension

When you create any dimension using MDL, you must manually create both the root category and drill category for that dimension.

The verbs RootCatMake and DrillCatMake are used in this example because there is no Add verb form for these objects. Also, you must set the inclusion property to Suppress for the drill category so that it does not display in the reporting components.

### Before you begin

**Note:** If you do not manually create the two default dimension views required for each dimension (All Categories and Omit Dimension), you must use the ModelEnsureCompleteness script to have Cognos Transformer create them automatically.

The definition of each level contains the specification for its dimension, drill category, and parent. Together, these define the hierarchical structure for the dimension.

**Note:** When you create a query in Cognos Transformer based on a Framework Manager package that contains hierarchical time-related categories, Cognos Transformer interprets the time-related categories as a regular dimension and not as a time dimension. As a result, the time dimension in your PowerCube will not contain any relative time categories. Ensure that you import all of the data needed to define your time dimension, and then create the date levels and categories.

### Dim\_Years.mdl file

The second file creates a standard Year-Quarter-Month time dimension for the model.

```
DimAdd "Years" DimType DateRootCatMake "Time" Dimension
"Years"DrillCatMake "By Time" Dimension "Years" Root "Time" Inclusion
Suppress Level Add "Year" Dimension "Years" Drill "By Time" Parent
""Source "Time" Date Function Year Unique Categories True OrderBy
Drill "By Time" Column "Time" SortOrder Default SortAs Ascending
LevelAdd "Quarter" Dimension "Years" Drill "By Time" Parent
"Year" Source "Time" Date Function Quarter CatLabFormat 'YYYY
"Q"
Q'UniqueCategories True OrderBy Drill "By Time" Column "Time" SortOrder
Default
SortAs Ascending LevelAdd "Month" Dimension "Years" Drill "ByTime"
Parent
"Quarter"Source "Time" DateFunction Month CatLabFormat "YYYY/MMM" UniqueCategories
True OrderBy Drill "ByTime" Column "Time"SortOrder Default SortAs
Ascending
```

## Step 3: Create the products dimension

The next step is to specify the details necessary to properly structure the primary dimension, Products.

### Dim\_Products.mdl

The third file pulls information needed for the Products dimension from the imported data.

```
DimAdd "Products" DimType Regular
RootCatMake "Product Line"
Dimension "Products"
DrillCatMake "By Product Line"
Dimension "Products"
Root "Product Line" Inclusion Suppress
LevelAdd "Product Line"
Dimension "Products"
Drill "By Product Line" Source "Product Line"
Associations "Product Line" AssociationType Type_Query
AssociationRole Role_Source
AssociationReferenced "Product Line"
LevelAdd "Product Type"
Dimension "Products"
Drill "By Product Line" Parent "Product Line" Source "Product Type"
Associations "Product Type" AssociationType Type_Query
AssociationRole Role_Source AssociationReferenced "Product Type"
LevelAdd "Product Id"
Dimension "Products"
Drill "By Product Line" Parent "Product Type" Source "Product Id"
Label "Product Name" UniqueCategories
True Associations "Product Id" AssociationType Type_Query
AssociationRole Role_Source AssociationReferenced "Product Id"
```

## Step 4: Create key product measures

Next, you need separate script files to add the three measures associated with the Products dimension.

### **Me\_Prodcost.mdl**

This file creates the Product Cost measure, which is taken from the Cost column.

```
MeasureAdd "Product Cost"
Associations "Cost" AssociationType Type_Query
AssociationRole Role_Source AssociationReferenced "Cost"
```

### **Me\_Prodplan.mdl**

This file creates the Product Plan measure, which is taken from the Planned Sales column.

```
MeasureAdd "Product Plan"
Associations "Planned Sales" AssociationType Type_Query
AssociationRole Role_Source
AssociationReferenced "Planned Sales"
```

### **Me\_Revenue.mdl**

This script creates the Revenue measure, which is taken from the Revenue column.

```
MeasureAdd "Revenue"
Associations "Revenue" AssociationType Type_Query
AssociationRole Role_Source
AssociationReferenced "Revenue"
```

## Step 5: Create allocations

After you add the required measures, you may want to specify how they will be allocated across the various dimensions in your model. Only do this if you do not use the ModelEnsureCompleteness script to generate the default measure allocations.

### **Alloc\_Me.mdl**

This script allocates Product Plan summary data to both the Product Line and Year levels of their respective dimensions proportionate to the product Revenue distribution.

```
AllocationAdd Measure "Revenue" Type Default
AllocationAdd Measure "Product Cost" Type Default
AllocationAdd Measure "Product Plan" Type Default
AllocationAdd Drill "By Product Line" Levels "Product
Line"
Measure "Product Plan" Type Allocate
AllocationMeasure "Revenue"
AllocationAdd Dimension "Years" Drill "By Time" Levels
"Year"
Measure "Product Plan" Type Allocate AllocationMeasure
"Revenue"
```

## Step 6: Create the signon

These scripts create IBM Cognos signons and data source signons.

### **CognosSignon.mdl**

This sample script creates a Cognos signon object and disables automatic signon access.

```
SignonAdd "name" UserId "user name" password "password"
```

```
AutoLogon False SignonNamespace "namespace id" SignonType "Cognos"
```

### **DataSourceSignon.mdl**

This sample script creates a data source signon object and disables interactive prompting for a password.

```
SignonAdd "signon name" PromptForPassword True  
UserId "user name"  
password <password> SignonType "DataSource"
```

Data sources defined in IBM Cognos BI can have multiple connections, each with multiple signons. You can use MDL to create, delete, and update connection and signon information for ambiguous connections and signons.

You may want to use a script to create or later update the object required to provide automatic signon access.

## **Step 7: Populate the model and create the PowerCube**

This is a three-stage process. You should create separate script files for each process.

### **Populate.mdl**

This script generates categories for the model.

```
Populatemodel
```

### **Cube.mdl**

This script adds the PowerCube object to the model, specifying where the .mdc file is located.

```
CubeAdd "Great Outdoors Sales" MdcFile "c:\Outdoors.mdc"  
MeasureInclude 195 Yes
```

### **Createcube.mdl**

This script generates the PowerCube in the form of an .mdc file.

```
CreateFiles
```

## **Step 8: Create the model by combining the scripts**

As a final step, prepare a script that, when run, combines all the previous scripts to create a complete Cognos Transformer model and generates an .mdc file based on that model.

### **NewModel.mdl**

This script runs all the previously created scripts in sequence. Ensure model completeness before you generate your final .mdl file based on the model.

```
NewModel "ModelScript"  
OpenMDL "C:\Que_Col.mdl"  
OpenMDL "C:\Dim_Years.mdl"  
OpenMDL "C:\Dim_Products.mdl"  
OpenMDL "C:\Me_Revenue.mdl"  
OpenMDL "C:\Me_Prodcost.mdl"  
OpenMDL "C:\Me_Prodplan.mdl"  
OpenMDL "C:\Alloc_Me.mdl"  
OpenMDL "C:\CognosSignon.mdl"  
OpenMDL "C:\DataSourceSignon.mdl"
```

```

OpenMDL "C:\Populate.mdl"
OpenMDL "C:\Cube.mdl"
ModelEnsureCompleteness
OpenMDL "C:\Createcube.mdl"
SaveMDL "C:\FinalModel.mdl"

```

## Checking the model generated by Cognos Transformer

When you check the FinalModel.mdl file that results from running your NewModel.mdl script, you will note that the model definition is much longer than it was when you started. This is because it contains all the default options that Cognos Transformer automatically adds to each object definition. In addition,

- The verb PopulateModel adds categories, all of which are defined
- The verb ModelEnsureCompleteness adds the two default views

Line numbers are included to make the file easier to read. The cogtr.xml setting ObjectIdOutput=0 is used, hiding the object identifiers by default, so each object is identified by its name alone.

### FinalModel.mdl

Below is a line-by-line rendering of the sample mdl file.

| No. | MDL                                                                                                                                                                                                                                                                                      |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2   | DataSourceMake "Products (CSV)" Separator "," SourceType FlatFile_ColNames CharacterSet Ansi DecimalSep "." Thousandsep "," Columns True Timing PopYesCreateDefault Source "c:\prodinfo.csv" EnableMultiProcess False SetCurrent True ServerSource False Speed False Presummarized False |
| 3   | ColumnMake "Product Line" DataSource "Products (CSV)" Origin Generated Offset 0 Column "Product Line" Storage Default Scale 0 Size 1 Decimals 0 InputScale 0 TimeArray Off                                                                                                               |
| 4   | ColumnMake "Product Type" DataSource "Products (CSV)" Origin Generated Offset 1 Column "Product Type" Storage Default Scale 0 Size 1 Decimals 0 InputScale 0 TimeArray Off                                                                                                               |
| 5   | ColumnMake "Product Id" DataSource "Products (CSV)" Origin Generated Offset 2 Column "Product Id" Storage Default Scale 0 Size 1 Decimals 0 InputScale 0 TimeArray Off                                                                                                                   |
| 6   | ColumnMake "Product Name" DataSource "Products (CSV)" Origin Generated Offset 3 Column "Product Name" Storage Default Scale 0 Size 1 Decimals 0 InputScale 0 TimeArray Off                                                                                                               |
| 7   | DataSourceMake "Prod Line Plan" Separator "," SourceType FlatFile_ColNames CharacterSet Ansi DecimalSep "." Thousandsep "," Columns True Timing PopYesCreateDefault Source "c:\ProdPlan.asc" EnableMultiProcess False SetCurrent True ServerSource False Speed False Presummarized False |
| 8   | ColumnMake "YEAR" DataSource "Prod Line Plan" Origin Generated Offset 0 Column "Time" Storage Default Format Y DateLevel Year Scale 0 Size 1 Decimals 0 Class Date InputScale 0 TimeArray Off                                                                                            |

| No. | MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9   | ColumnMake "PROD_LINE" DataSource "Prod Line Plan" Origin Generated Offset 1 Column "Product Line" Storage Default Scale 0 Size 1 Decimals 0 InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 10  | ColumnMake "FORECAST" DataSource "Prod Line Plan" Origin Generated Offset 2 Column "Planned sales" Storage Default Scale 0 Size 1 Decimals 0 InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 11  | DataSourceMake "MAIN (IQD)" Separator ","SourceType DataSource CharacterSet Ansi DecimalSep "."Thousandsep "," Columns TrueTiming PopYesCreateDefault<br>Source"c:<install_directory>\bsc_msrs.iqd"SQL 'select T1.<br>"ORDER_DT"<br>as c1<br>T2."PROD_NO" as c2,<br>T1."REP_NO" as ' ' c3,<br>T1."CUST_NO" as c4,<br>T2."QTY" * T2."PRI" 'CE"as c6,<br>(T2."QTY" * T3."PROD_COST") as c7,<br>'2."QTY" * T2."PRICE") - (T2."QTY" * T3."PROD_COST"))/ (T2."QTY"<br>* T2."<br>' 'PRICE")) <= 0.19) THEN (' 'Under 20%')WHEN (((T2."<br>' "QTY" * T2."PRICE") - (T2."QTY" * T3."PROD_COST"))/ (T2."QTY"<br>* T2."PR" 'ICE')) BETWEEN 0.2 AND 0.65)THEN (' '20%- 65%')<br>WHEN (((T2." ' "QTY" * T2."PRICE") - (T2."QTY" * T3."PROD_COST"))<br>/(T2."QTY" * T2."PR" 'ICE'))>= 0.66)<br>THEN (' 'Over 65%') ELSE ('ERROR')ENDas c8<br><br>from " " "ORDER" T1,<br>("PRODUCT" T3 left outer join "ORDRDETL" T2 on T2."PROD_NO" =<br>T3."PROD_NO") order by c1 asc' ",c3 asc,c4 asc,c2asc"<br>Isolation 0 UserEditable FalseSourceSignonList<br>"I70_DBASE_NTV_PP70_SAMPLE"<br><br>EndListImrName "C:<install_directory>\bsc_msrs.imr" Stamp<br>996601938 EnableMultiProcess False SetCurrent TrueServerSource False<br>Speed False Presummarized False |
| 12  | ColumnMake "Order Dt" DataSource "MAIN (IQD)" Origin Source Offset 0 Column "Time" Storage Int32 Scale 0 Size 4 Decimals 0 Class Date InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 13  | ColumnMake "od-Prod No" DataSource "MAIN (IQD)" Origin Source Offset 1 Column "Product Id" Storage Float64 Scale 0 Size 5 Decimals 0 Class Quantity InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 14  | ColumnMake "Revenue" DataSource "MAIN (IQD)" Origin Generated Offset 5 Column "Revenue" Storage Default Scale 0 Size 1 Decimals 0 InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 15  | ColumnMake "Cost" DataSource "MAIN (IQD)" Origin Source Offset 6 Column "Cost" Storage Float64 Scale 0 Size 6 Decimals 0 Class Quantity InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 16  | DimMake "Years" DimType NonStandard EarliestDate 19000101 LatestDate 99991231 ManualPeriods False DaysInWeek 127 NewCatsLock False ExcludeAutoPartitioning False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



| No. | MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 17  | RootCatMake "Time" Dimension "Years" Inclusion Generate Lastuse 20060802 Date 0 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                                                                                               |
| 18  | DrillCatMake "By Time" Dimension "Years" Root "Time" Inclusion Suppress Filtered False Suppressed True PrimaryDrill True YearBegins 20060101 PartialWeek Split ExtraWeek None WeekBegins Sunday                                                                                                                                                                                                                                                                                                                                                                              |
| 19  | LevelMake "Year" Dimension "Years" Drill "By Time" Parent "" Blanks "( blank )" DateFunction Year Generate Need RefreshLabel False RefreshDescription False RefreshShortName False NewCatsLock False CatLabFormat "YYYY" Timerank 10 UniqueCategories True UniqueMove False Associations "Time" AssociationContext "By Time" AssociationType Type_Query AssociationRole Role_OrderBy AssociationReferenced "Time" SortOrder Default SortAs Ascending Associations "Time" AssociationType Type_Query AssociationRole Role_Source AssociationReferenced "Time"                 |
| 20  | LevelMake "Quarter" Dimension "Years" Drill "By Time" Parent "Year" Blanks "( blank )" DateFunction Quarter Generate Need RefreshLabel False RefreshDescription False RefreshShortName False NewCatsLock False CatLabFormat 'YYYY "Q" Q' Timerank 20 UniqueCategories True UniqueMove False Associations "Time" AssociationContext "By Time" AssociationType Type_Query AssociationRole Role_OrderBy AssociationReferenced "Time" SortOrder Default SortAs Ascending Associations "Time" AssociationType Type_Query AssociationRole Role_Source AssociationReferenced "Time" |
| 21  | LevelMake "Month" Dimension "Years" Drill "By Time" Parent "Quarter" Blanks "( blank )" DateFunction Month Generate Need RefreshLabel False RefreshDescription False RefreshShortName False NewCatsLock False CatLabFormat "YYYY/MMM" Timerank 30 UniqueCategories True UniqueMove False Associations "Time" AssociationContext "By Time" AssociationType Type_Query AssociationRole Role_OrderBy AssociationReferenced "Time" SortOrder Default SortAs Ascending Associations "Time" AssociationType Type_Query AssociationRole Role_Source AssociationReferenced "Time"    |
| 22  | CatMake "20010101-20011231" Dimension "Years" Drill "By Time" Levels "Year" Parent "By Time" OrderBy Drill "By Time" Value "2001" Label "2001" Lastuse 20060802 SourceValue "2001" Date 20010101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                                              |
| 23  | CatMake "20010101-20010331" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20010101-20011231" OrderBy Drill "By Time" Value "20010101" Label "2001 Q 1" Lastuse 20060802 SourceValue "20010101" Date 20010101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                     |
| 24  | CatMake "20010101-20010131" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010101-20010331" OrderBy Drill "By Time" Value "200101" Label "2001/Jan" Lastuse 20060802 SourceValue "200101" Date 20010101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                           |

| No. | MDL                                                                                                                                                                                                                                                                                                                      |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 25  | CatMake "20010201-20010229" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010101-20010331" OrderBy Drill "By Time" Value "200102" Label "2001/Feb" Lastuse 20060802 SourceValue "200102" Date 20010201 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 26  | CatMake "20010301-20010331" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010101-20010331" OrderBy Drill "By Time" Value "200103" Label "2001/Mar" Lastuse 20060802 SourceValue "200103" Date 20010301 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 27  | CatMake "20010401-20010630" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20010101-20011231" OrderBy Drill "By Time" Value "20010401" Label "2001 Q 2" Lastuse 20060802 SourceValue "20010401" Date 20010401 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 28  | CatMake "20010401-20010430" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010401-20010630" OrderBy Drill "By Time" Value "200104" Label "2001/Apr" Lastuse 20060802 SourceValue "200104" Date 20010401 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 29  | CatMake "20010501-20010531" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010401-20010630" OrderBy Drill "By Time" Value "200105" Label "2001/May" Lastuse 20060802 SourceValue "200105" Date 20010501 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 30  | CatMake "20010601-20010630" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010401-20010630" OrderBy Drill "By Time" Value "200106" Label "2001/Jun" Lastuse 20060802 SourceValue "200106" Date 20010601 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 31  | CatMake "20010701-20010930" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20010101-20011231" OrderBy Drill "By Time" Value "20010701" Label "2001 Q 3" Lastuse 20060802 SourceValue "20010701" Date 20010701 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 32  | CatMake "20010701-20010731" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010701-20010930" OrderBy Drill "By Time" Value "200107" Label "2001/Jul" Lastuse 20060802 SourceValue "200107" Date 20010701 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 33  | CatMake "20010801-20010831" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010701-20010930" OrderBy Drill "By Time" Value "200108" Label "2001/Aug" Lastuse 20060802 SourceValue "200108" Date 20010801 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |

| No. | MDL                                                                                                                                                                                                                                                                                                                      |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 34  | CatMake "20010901-20010930" Dimension "Years" Drill "By Time" Levels "Month" Parent "20010701-20010930" OrderBy Drill "By Time" Value "200109" Label "2001/Sep" Lastuse 20060802 SourceValue "200109" Date 20010901 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 35  | CatMake "20011001-20011231" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20010101-20011231" OrderBy Drill "By Time" Value "20011001" Label "2001 Q 4" Lastuse 20060802 SourceValue "20011001" Date 20011001 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 36  | CatMake "20011001-20011031" Dimension "Years" Drill "By Time" Levels "Month" Parent "20011001-20011231" OrderBy Drill "By Time" Value "200110" Label "2001/Oct" Lastuse 20060802 SourceValue "200110" Date 20011001 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 37  | CatMake "20011101-20011130" Dimension "Years" Drill "By Time" Levels "Month" Parent "20011001-20011231" OrderBy Drill "By Time" Value "200111" Label "2001/Nov" Lastuse 20060802 SourceValue "200111" Date 20011101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 38  | CatMake "20011201-20011231" Dimension "Years" Drill "By Time" Levels "Month" Parent "20011001-20011231" OrderBy Drill "By Time" Value "200112" Label "2001/Dec" Lastuse 20060802 SourceValue "200112" Date 20011201 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 39  | CatMake "20020101-20021231" Dimension "Years" Drill "By Time" Levels "Year" Parent "By Time" OrderBy Drill "By Time" Value "2002" Label "2002" Lastuse 20060802 SourceValue "2002" Date 20020101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                          |
| 40  | CatMake "20020101-20020331" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20020101-20021231" OrderBy Drill "By Time" Value "20020101" Label "2002 Q 1" Lastuse 20060802 SourceValue "20020101" Date 20020101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 41  | CatMake "20020101-20020131" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020101-20020331" OrderBy Drill "By Time" Value "200201" Label "2002/Jan" Lastuse 20060802 SourceValue "200201" Date 20020101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 42  | CatMake "20020201-20020228" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020101-20020331" OrderBy Drill "By Time" Value "200202" Label "2002/Feb" Lastuse 20060802 SourceValue "200202" Date 20020201 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |

| No. | MDL                                                                                                                                                                                                                                                                                                                      |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 43  | CatMake "20020301-20020331" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020101-20020331" OrderBy Drill "By Time" Value "200203" Label "2002/Mar" Lastuse 20060802 SourceValue "200203" Date 20020301 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 44  | CatMake "20020401-20020630" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20020101-20021231" OrderBy Drill "By Time" Value "20020401" Label "2002 Q 2" Lastuse 20060802 SourceValue "20020401" Date 20020401 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 45  | CatMake "20020401-20020430" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020401-20020630" OrderBy Drill "By Time" Value "200204" Label "2002/Apr" Lastuse 20060802 SourceValue "200204" Date 20020401 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 46  | CatMake "20020501-20020531" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020401-20020630" OrderBy Drill "By Time" Value "200205" Label "2002/May" Lastuse 20060802 SourceValue "200205" Date 20020501 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 47  | CatMake "20020601-20020630" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020401-20020630" OrderBy Drill "By Time" Value "200206" Label "2002/Jun" Lastuse 20060802 SourceValue "200206" Date 20020601 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 48  | CatMake "20020701-20020930" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20020101-20021231" OrderBy Drill "By Time" Value "20020701" Label "2002 Q 3" Lastuse 20060802 SourceValue "20020701" Date 20020701 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 49  | CatMake "20020701-20020731" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020701-20020930" OrderBy Drill "By Time" Value "200207" Label "2002/Jul" Lastuse 20060802 SourceValue "200207" Date 20020701 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 50  | CatMake "20020801-20020831" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020701-20020930" OrderBy Drill "By Time" Value "200208" Label "2002/Aug" Lastuse 20060802 SourceValue "200208" Date 20020801 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 51  | CatMake "20020901-20020930" Dimension "Years" Drill "By Time" Levels "Month" Parent "20020701-20020930" OrderBy Drill "By Time" Value "200209" Label "2002/Sep" Lastuse 20060802 SourceValue "200209" Date 20020901 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |

| No. | MDL                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 52  | CatMake "20021001-20021231" Dimension "Years" Drill "By Time" Levels "Quarter" Parent "20020101-20021231" OrderBy Drill "By Time" Value "20021001" Label "2002 Q 4" Lastuse 20060802 SourceValue "20021001" Date 20021001 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                      |
| 53  | CatMake "20021001-20021031" Dimension "Years" Drill "By Time" Levels "Month" Parent "20021001-20021231" OrderBy Drill "By Time" Value "200210" Label "2002/Oct" Lastuse 20060802 SourceValue "200210" Date 20021001 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                            |
| 54  | CatMake "20021101-20021130" Dimension "Years" Drill "By Time" Levels "Month" Parent "20021001-20021231" OrderBy Drill "By Time" Value "200211" Label "2002/Nov" Lastuse 20060802 SourceValue "200211" Date 20021101 Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                            |
| 55  | CatMake "20021201-20021231" Dimension "Years" Drill "By Time" Levels "Month" Parent "20021001-20021231" OrderBy Drill "By Time" Value "200212" Label "2002/Dec" Lastuse 20060802 SourceValue "200212" Date 20021201 Current Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                    |
| 56  | ViewMake "All Categories" Dimension "Years" Type All                                                                                                                                                                                                                                                                                                                                                                          |
| 57  | ViewMake "Omit Dimension" Dimension "Years" Type Omit                                                                                                                                                                                                                                                                                                                                                                         |
| 58  | DimMake "Products" DimType Regular<br>NewCatsLock False ExcludeAutoPartitioning False<br>RootCatMake "Product Line" Dimension "Products"<br>Inclusion Generate Lastuse 20060802 Filtered False<br>Suppressed False Sign False<br>IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                          |
| 59  | DrillCatMake "By Product Line" Dimension "Products" Root "Product Line"<br>Inclusion Suppress Filtered False Suppressed True PrimaryDrill True                                                                                                                                                                                                                                                                                |
| 60  | LevelMake "Product Line" Dimension "Products" Drill "By Product Line"<br>Parent "" Blanks "( blank )" DateFunction None Generate Need<br>RefreshLabel False RefreshDescription False RefreshShortName False<br>NewCatsLock False Timerank 0 UniqueCategories False UniqueMove False<br>Associations "Product Line" AssociationType Type_Query AssociationRole<br>Role_Source AssociationReferenced "Product Line"             |
| 61  | LevelMake "Product Type" Dimension "Products" Drill "By Product Line"<br>Parent "Product Line" Blanks "( blank )" DateFunction None Generate<br>Need RefreshLabel False RefreshDescription False RefreshShortName<br>False NewCatsLock False Timerank 0 UniqueCategories False UniqueMove<br>False Associations "Product Type" AssociationType Type_Query<br>AssociationRole Role_Source AssociationReferenced "Product Type" |

| No. | MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 62  | LevelMake "Product Id" Dimension "Products" Drill "By Product Line" Parent "Product Type" Blanks "( blank )" DateFunction None Generate Need RefreshLabel False RefreshDescription False RefreshShortName False NewCatsLock False Timerank 0 UniqueCategories True UniqueMove False Associations "Product Id" AssociationType Type_Query AssociationRole Role_Source AssociationReferenced "Product Id" Associations "Product Name" AssociationType Type_Query AssociationRole Role_Label AssociationReferenced "Product Name" |
| 63  | CatMake "Environmental Line" Dimension "Products" Drill "By Product Line" Levels "Product Line" Parent "By Product Line" Lastuse 20060802 SourceValue "Environmental Line" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                      |
| 64  | CatMake "Alert Devices" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Environmental Line" Lastuse 20060802 SourceValue "Alert Devices" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                             |
| 65  | CatMake "60100" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Alert Devices" Label "Pocket U.V. Alerter" Lastuse 20060802 SourceValue "60100" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                        |
| 66  | CatMake "60101" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Alert Devices" Label "Microwave Detector" Lastuse 20060802 SourceValue "60101" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                         |
| 67  | CatMake "60102" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Alert Devices" Label "Pocket Radon Alerter" Lastuse 20060802 SourceValue "60102" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                       |
| 68  | CatMake "Bio-Friendly Soaps" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Environmental Line" Lastuse 20060802 SourceValue "Bio-Friendly Soaps" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                   |
| 69  | CatMake "60300" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Bio-Friendly Soaps" Label "RiverKind Shampoo" Lastuse 20060802 SourceValue "60300" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                     |
| 70  | CatMake "60301" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Bio-Friendly Soaps" Label "RiverKind Soap" Lastuse 20060802 SourceValue "60301" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                        |
| 71  | CatMake "60302" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Bio-Friendly Soaps" Label "RiverKind Detergent" Lastuse 20060802 SourceValue "60302" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                                                                                                                                                                                                                                                   |

| No. | MDL                                                                                                                                                                                                                                                                         |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 72  | CatMake "Recycled Products" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Environmental Line" Lastuse 20060802 SourceValue "Recycled Products" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False  |
| 73  | CatMake "60201" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Recycled Products" Label "Enviro-Kit" Lastuse 20060802 SourceValue "60201" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False          |
| 74  | CatMake "60200" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Recycled Products" Label "EnviroSak" Lastuse 20060802 SourceValue "60200" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False           |
| 75  | CatMake "60202" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Recycled Products" Label "Enviro-T" Lastuse 20060802 SourceValue "60202" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False            |
| 76  | CatMake "Sunblock" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Environmental Line" Lastuse 20060802 SourceValue "Sunblock" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                    |
| 77  | CatMake "60400" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sunblock" Label "Sun Shelter-8" Lastuse 20060802 SourceValue "60400" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False                |
| 78  | CatMake "60401" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sunblock" Label "Sun Shelter-15" Lastuse 20060802 SourceValue "60401" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False               |
| 79  | CatMake "60402" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sunblock" Label "Sun Shelter-30" Lastuse 20060802 SourceValue "60402" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False               |
| 80  | CatMake "Water Purifiers" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Environmental Line" Lastuse 20060802 SourceValue "Water Purifiers" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False      |
| 81  | CatMake "60500" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Water Purifiers" Label "Pro-Lite Water Filter" Lastuse 20060802 SourceValue "60500" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 82  | CatMake "60501" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Water Purifiers" Label "Pocket Water Filter" Lastuse 20060802 SourceValue "60501" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False   |



| No. | MDL                                                                                                                                                                                                                                                                   |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 83  | CatMake "GO Sport Line" Dimension "Products" Drill "By Product Line" Levels "Product Line" Parent "By Product Line" Lastuse 20060802 SourceValue "GO Sport Line" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 84  | CatMake "Carry-Bags" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "GO Sport Line" Lastuse 20060802 SourceValue "Carry-Bags" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False               |
| 85  | CatMake "50100" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Carry-Bags" Label "GO Sport Bag" Lastuse 20060802 SourceValue "50100" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False         |
| 86  | CatMake "50101" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Carry-Bags" Label "GO Ski Gear Bag" Lastuse 20060802 SourceValue "50101" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False      |
| 87  | CatMake "50102" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Carry-Bags" Label "GO Duffel Bag" Lastuse 20060802 SourceValue "50102" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False        |
| 88  | CatMake "Sport Wear" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "GO Sport Line" Lastuse 20060802 SourceValue "Sport Wear" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False               |
| 89  | CatMake "50201" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sport Wear" Label "GO Headband" Lastuse 20060802 SourceValue "50201" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False          |
| 90  | CatMake "50201" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sport Wear" Label "GO Headband" Lastuse 20060802 SourceValue "50201" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False          |
| 91  | CatMake "50202" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sport Wear" Label "GO Wristband" Lastuse 20030825 SourceValue "50202" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False         |
| 92  | CatMake "50203" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sport Wear" Label "GO Water Bottle" Lastuse 20030825 SourceValue "50203" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False      |
| 93  | CatMake "Outdoor Products" Dimension "Products" Drill "By Product Line" Levels "Product Line" Parent "By Product Line" Lastuse 20060802 SourceValue "Outdoor Products" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |



| No. | MDL                                                                                                                                                                                                                                                                      |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 94  | CatMake "Back Packs" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Outdoor Products" Lastuse 20060802 SourceValue "Back Packs" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False               |
| 95  | CatMake "40300" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Back Packs" Label "Day Tripper" Lastuse 20060802 SourceValue "40300" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False             |
| 96  | CatMake "40301" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Back Packs" Label "Pack n' Hike" Lastuse 20060802 SourceValue "40301" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False            |
| 97  | CatMake "40302" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Back Packs" Label "GO Small Waist Pack" Lastuse 20060802 SourceValue "40302" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False     |
| 98  | CatMake "40303" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Back Packs" Label "GO Large Waist Pack" Lastuse 20060802 SourceValue "40303" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False     |
| 99  | CatMake "Cooking Equipment" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Outdoor Products" Lastuse 20060802 SourceValue "Cooking Equipment" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 100 | CatMake "40400" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Cooking Equipment" Label "Dover-1" Lastuse 20060802 SourceValue "40400" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False          |
| 101 | CatMake "40401" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Cooking Equipment" Label "Dover-2" Lastuse 20060802 SourceValue "40401" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False          |
| 102 | CatMake "40402" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Cooking Equipment" Label "GO Cookset" Lastuse 20060802 SourceValue "40402" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 103 | CatMake "40403" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Cooking Equipment" Label "GO Camp Kettle" Lastuse 20060802 SourceValue "40403" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False   |
| 104 | CatMake "Sleeping Bags" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Outdoor Products" Lastuse 20060802 SourceValue "Sleeping Bags" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False         |

| No. | MDL                                                                                                                                                                                                                                                          |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 105 | CatMake "40200" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sleeping Bags" Label "MoonBeam" Lastuse 20060802 SourceValue "40200" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 106 | CatMake "40201" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sleeping Bags" Label "MoonGlow" Lastuse 20060802 SourceValue "40201" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 107 | CatMake "40202" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Sleeping Bags" Label "MoonLite" Lastuse 20060802 SourceValue "40202" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 108 | CatMake "Tents" Dimension "Products" Drill "By Product Line" Levels "Product Type" Parent "Outdoor Products" Lastuse 20060802 SourceValue "Tents" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False             |
| 109 | CatMake "40100" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Tents" Label "Star Lite" Lastuse 20060802 SourceValue "40100" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False        |
| 110 | CatMake "40101" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Tents" Label "Star Gazer-2" Lastuse 20060802 SourceValue "40101" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False     |
| 111 | CatMake "40102" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Tents" Label "Star Gazer-3" Lastuse 20060802 SourceValue "40102" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False     |
| 112 | CatMake "40103" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Tents" Label "StarDome" Lastuse 20060802 SourceValue "40103" Current Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False |
| 113 | CatMake "40104" Dimension "Products" Drill "By Product Line" Levels "Product Id" Parent "Tents" Label "Micro Lite" Lastuse 20060802 SourceValue "40104" Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False Blanks False       |
| 114 | ViewMake "All Categories" Dimension "Products" Type All                                                                                                                                                                                                      |
| 115 | ViewMake "Omit Dimension" Dimension "Products" Type Omit                                                                                                                                                                                                     |
| 116 | MeasureMake "Revenue" Storage Default OutPutScale 0 Decimals 0 ReverseSign False IsCurrency False DrillThrough False EndList Associations "Revenue" AssociationType Type_Query AssociationRole Role_Source AssociationReferenced "Revenue"                   |

| No. | MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 117 | MeasureMake "Product Cost" Storage Default OutPutScale 0 Decimals 0 ReverseSign False IsCurrency False DrillThrough False EndList Associations "Cost" AssociationType Type_Query AssociationRole Role_Source AssociationReferenced "Cost"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 118 | MeasureMake "Product Plan" Storage Default OutPutScale 0 Decimals 0 ReverseSign False IsCurrency False DrillThrough False EndList Associations "Planned Sales" AssociationType Type_Query AssociationRole Role_Source AssociationReferenced "Planned sales"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 119 | SignonMake<br>"I70_DBASE_NTV_PP70_SAMPLE"FullDb"<br>7C3155E28283DDFEF647A376504802295E3F3A5FACBCD1616F8770A97C<br>530151BD5644""09010B9D440F8CC047E5E62D7968B87633C7BC6DA56D9539D5<br>FB47D8A1A5E4EE9790A0""A00CDC111C1CF518BA09F9DAD8971B53E3D1DCA8A2<br>2962F223FA52F4CCE534946A57A5""23FF8FA4643644A41E7F18519B37C7E8C8<br>81B2A80ADAFAB3A3053D4D728B8BAA51F49B0""C4CCB26314FF28DB56ED4BF73<br>57503BAFF0EB65F0713691B4FC64ED26372563E2042978""2A618F81AF735920<br>8330F265CAD582A19D9200E78660EC690A4EF3186AFEE7A3E7429A8""702C51C<br>693EF7EA7F3D673E4B8C569D51E254781B0C6A3CAA6ED4CD5F94AC450E79526<br>""1C53078EFF0ECC"DbType "DB" DatabaseSubType<br>BDEPromptForPassword False Manual False<br>SignonMake "I50_DBASE_NTV_PP60_SAMPLE"<br>PromptForPassword FalseManual False |
| 120 | CubeMake "Great Outdoors Sales" MdcFile "c:\Outdoors.mdc" Status OK<br>CubeCreation On Optimize Categories Compress False DatabaseInfo<br>"Local;" IncrementalUpdate False ServerCube False CubeStamp 996769127<br>CubeCycle 2 BlockParentTotals False Caching False UseAlternateFileName<br>False DrillThrough False EndList DimensionView "Years" "All<br>Categories" DimensionView "Products" "All Categories" MeasureInclude<br>"Revenue" Yes MeasureInclude "Product Cost" Yes MeasureInclude<br>"Product Plan" Yes                                                                                                                                                                                                                                                              |
| 121 | AllocationAdd Measure "Revenue" Type Default                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 122 | AllocationAdd Measure "Product Cost" Type Default                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 123 | AllocationAdd Measure "Product Plan" Type Default                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 124 | AllocationAdd Dimension "Products" Drill "By Product Line" Levels<br>"Product Line" Measure "Product Plan" Type Allocate AllocationMeasure<br>"Revenue"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 125 | AllocationAdd Dimension "Years" Drill "By Time" Levels "Year" Measure<br>"Product Plan" Type Allocate AllocationMeasure "Revenue"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## Example - MDL model using an IBM Cognos data source in structured MDL

This is the order in which you would create a typical model using structured MDL:

- Create the data sources in Cognos Transformer.
- Create the dimensions and key performance measures.
- Create the standard dimension views.
- Create dimension views and custom views.
- Add the namespace and security objects.
- Populate the model and create the PowerCube.

The following example shows a model, created using an IBM Cognos data source, in structured MDL format.

| Structured MDL                                                                                                                                                                                                                                                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CognosSource</b> 103<br>"GO Sales and Retailers"<br><b>SourceType</b> Package<br><b>SourcePath</b> "/content/package[@name='GO Sales and Retailers']" <b>PackageTimeStamp</b> "/content/package[@name='GO Sales and Retailers']/model[@name='model']"                                      | <p><b>CognosSource</b> defines an IBM Cognos package or report as the data source in the model.</p> <p>"Go Sales and Retailers" is the name of the IBM Cognos package. All packages and queries must have unique names.</p> <p><b>SourceType</b> defines the type of IBM Cognos data source. The type can be Package, Report, or CognosSourceQuery. In this example, SourceType defines a package data source type.</p> <p><b>SourcePath</b> is the path to the IBM Cognos package stored in Content Manager.</p> <p><b>PackageTimeStamp</b> is the version of the package last used in the model.</p> |
| <b>CognosSource</b> 11543<br>"QuantityReport"<br><b>SourceType</b> Report<br><b>SourcePath</b><br>"/content/package[@name='GO Sales and Retailers']/report[@name='QuantityReport']" <b>PackageTimeStamp</b> "/content/package[@name='GO Sales and Retailers']/report[@name='QuantityReport']" | <p><b>CognosSource</b> defines a second IBM Cognos package or report data source in the model.</p> <p>In this example, the <b>SourceType</b> defines a report data source type.</p>                                                                                                                                                                                                                                                                                                                                                                                                                    |

| Structured MDL                                                                                                                                                                                                                                                                                                                                                              | Description                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DataSource 105<br>"GO Sales and Retailers~1"<br>Separator ","<br>SourceType <b>CognosSourceQuery</b><br>CharacterSet Default DecimalSep "."<br>Thousandsep "," Columns True Timing<br>PopYesCreateDefault<br><b>PackageReportSource 103</b><br><b>"GO Sales and Retailers"</b><br>AutoSummary True SetCurrent True<br>ServerSource False Speed False<br>Presummarized False | <p><b>CognosSourceQuery</b> defines a query defined against a package or report SourceType.</p> <p><b>PackageReportSource 103 "GO Sales and Retailers"</b> is the reference to the package on which this query is defined.</p>                                              |
| OrgName 107 "[gosales_goretailers].<br>[Orders].[Order number]" Origin Source<br>Offset 0<br>Column "Order number" Storage Float64<br>Scale 0<br>Size 4 Decimals 0 InputScale 0<br>TimeArray Off<br>Rollup CountAll                                                                                                                                                         | <p><b>"[gosales_goretailers].[Orders].[Order number]"</b> is the reference within the package or report to the query item or measure on which this column is defined.</p> <p>Following are more references to query items or measures on which the columns are defined.</p> |
| OrgName 109 "[gosales_goretailers].<br>[Orders].[Retailer name]" Origin Source<br>Offset 1<br>Column "Retailer name" Storage Text<br>Scale 0 Size 102 Decimals 0<br>Class Description InputScale 0<br>TimeArray Off                                                                                                                                                         |                                                                                                                                                                                                                                                                             |
| OrgName 111 "[gosales_goretailers].<br>[Orders].[Order date]" Origin Source<br>Offset 2 Column "Order date"<br>Storage Int32 Scale 0 Size 12 Decimals 0<br>Class Date InputScale 0 TimeArray Off                                                                                                                                                                            |                                                                                                                                                                                                                                                                             |
| OrgName 113 "[gosales_goretailers].<br>[Orders].[Order method]" Origin<br>Source Offset 3 Column "Order method"<br>Storage Text Scale 0 Size 102 Decimals 0<br>Class Description InputScale 0<br>TimeArray Off                                                                                                                                                              |                                                                                                                                                                                                                                                                             |
| OrgName 115 "[gosales_goretailers].<br>[Orders].[Order method code]"<br>Origin Source Offset 4 Column<br>"Order method code" Storage Float64<br>Scale 0 Size 4 Decimals 0<br>InputScale 0 TimeArray Off Rollup<br>CountAll                                                                                                                                                  |                                                                                                                                                                                                                                                                             |
| OrgName 117 "[gosales_goretailers].<br>[Orders].[Product name]" Origin Source<br>Offset 5 Column "Product name"<br>Storage Text Scale 0 Size 102 Decimals 0<br>Class Description InputScale 0<br>TimeArray Off                                                                                                                                                              |                                                                                                                                                                                                                                                                             |

| Structured MDL                                                                                                                                                                                                                                                                                                                                                | Description                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OrgName 119 "[gosales_goretailers].<br>[Orders].[Quantity]" Origin Source<br>Offset 6 Column "Quantity"<br><br>Storage Float64 Scale 0 Size 2<br>Decimals 0<br><br>Class Quantity InputScale 0<br>TimeArray Off<br><br>Rollup Sum                                                                                                                             |                                                                                                                                                                                                                                                                                 |
| <b>Filter 11553 "Americas"</b><br><b>FilterRef "[gosales_goretailers].<br/>[Americas]"</b>                                                                                                                                                                                                                                                                    | <p><b>Filter 115533 "Americas"</b> selects a filter from the data source and imports it into the query.</p> <p><b>FilterRef</b><br/> <b>"[gosales_goretailers].[Americas]"</b> is the reference within the package or report to the filter on which this column is defined.</p> |
| DataSource 11545 "QuantityReport~1"<br>Separator "," SourceType<br>CognosSourceQuery CharacterSet Default<br>DecimalSep "." Thousandsep ","<br>Columns True<br><br>Timing PopYesCreateDefault<br><b>PackageReportSource 11543</b><br><b>"QuantityReport"</b> AutoSummary False<br>SetCurrent True<br>ServerSource False<br>Speed False<br>Presummarized False | <p><b>PackageReportSource 11543</b><br/> <b>"QuantityReport"</b> is a second query, defined against a second package.</p> <p>Following are more references to query items or measures on which the columns are defined.</p>                                                     |
| OrgName 11547 "[Report].[Query1.0].<br>[Product number]"<br><br>Origin Source Offset 0 Column<br>"Product number" Storage Float64 Scale 0<br>Size 1 Decimals 0<br><br>Class Quantity InputScale 0<br>TimeArray Off                                                                                                                                            |                                                                                                                                                                                                                                                                                 |
| OrgName 11549 "[Report].[Query1.0].<br>[Production cost]"<br><br>Origin Source Offset 1<br>Column "Production cost" Storage Float64<br>Scale 2 Size 1 Decimals 2<br><br>Class Quantity InputScale 0<br>TimeArray Off                                                                                                                                          |                                                                                                                                                                                                                                                                                 |
| Dimension 149 "Order date" DimType<br>Date EarliestDate 19010101<br>LatestDate 21001231 ManualPeriods False<br>DaysInWeek 127 NewCatsLock False<br>ExcludeAutoPartitioning False<br>DimDefaultCategory 0                                                                                                                                                      |                                                                                                                                                                                                                                                                                 |

| Structured MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Description                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Categories Root 153 "Order date"<br>Inclusion Generate Lastuse 20070910<br>Date 0<br>Filtered False Suppressed False<br>Sign False<br>HideValue False<br>IsKeyOrphanage False<br>IsTruncated False<br>Blanks False<br>Drill 155 "By Order date" Inclusion<br>Suppress Filtered False Suppressed True<br>PrimaryDrill True HideValue False<br>YearBegins 20070101<br>PartialWeek Split ExtraWeek None<br>WeekBegins Sunday<br>Levels 161 "Year" Blanks "( blank )"<br>Inclusion Generate DateFunction Year<br>Generate Need RefreshLabel False<br>RefreshDescription False<br>RefreshShortName False |                                                                                                                                                                   |
| NewCatsLock False CatLabFormat<br>"YYYY"<br>Timerank 10 <b>UniqueCategories True</b><br>UniqueMove False<br>Associations 163 "Order date"<br>AssociationType Type_Query<br>AssociationRole Role_Source<br>AssociationReferenced "Order date"<br>Associations 165 "Order date"<br>AssociationContext 155 AssociationType<br>Type_Query AssociationRole Role_OrderBy<br>AssociationReferenced "Order date"<br>SortOrder Int16 SortAs Ascending                                                                                                                                                        | <b>UniqueCategories True</b> indicates that the Product Id level is unique. This is necessary because the level is associated with columns from multiple queries. |

| Structured MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Description |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Levels 167 "Quarter" Blanks "( blank)"<br>Inclusion Generate DateFunction Quarter<br>Generate All RefreshLabel False<br>RefreshDescription False Refresh<br>ShortName False NewCatsLock False<br>CatLabFormat 'YYYY "Q" Q'<br>Timerank 20 UniqueCategories True<br>UniqueMove False<br>Associations 169 "Order date"<br>AssociationType Type_Query<br>AssociationRole Role_Source<br>AssociationReferenced "Order date"<br>Associations 171 "Order date"<br>AssociationContext 155<br>AssociationType Type_Query<br>AssociationRole Role_OrderBy<br>AssociationReferenced "Order date"<br>SortOrder Int16 SortAs Ascending |             |
| Category 233 "20040101-20041231"<br>Parent 155 Levels 161 OrderBy Drill 155<br>Value "2004" Label "2004"<br>Lastuse 20070910 SourceValue "2004"<br>Date 20040101 Filtered False<br>Suppressed False Sign False HideValue<br>False IsKeyOrphanage False IsTruncated<br>False Blanks False Category 235<br>"20040101-20040331" Parent 233<br>Levels 167 OrderBy Drill 155<br>Value "20040101" Label "2004 Q 1"<br>Lastuse 20070910 SourceValue "20040101"<br>Date 20040101 Filtered False<br>Suppressed False Sign False HideValue<br>False IsKeyOrphanage False IsTruncated<br>False Blanks False                           |             |
| Category 243 "20040401-20040630"<br>Parent 233 Levels 167 OrderBy Drill 155<br>Value "20040401" Label "2004 Q 2"<br>Lastuse 20070910 SourceValue "20040401"<br>Date 20040401 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                       |             |
| Category 251 "20040701-20040930"<br>Parent 233 Levels 167 OrderBy Drill 155<br>Value "20040701" Label "2004 Q 3"<br>Lastuse 20070910 SourceValue "20040701"<br>Date 20040701 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                       |             |



| Structured MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Description |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Category 259 "20041001-20041231"<br>Parent 233 Levels 167 OrderBy Drill 155<br>Value "20041001" Label "2004 Q 4"<br>Lastuse 20070910 preserve">SourceValue<br>"20041001" Date 20041001 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage<br>False IsTruncated False Blanks False                                                                                                                                                                                                                                                                                      |             |
| Category 581 "20050101-20051231"<br>Parent 155 Levels 161 OrderBy Drill 155<br>Value "2005" Label "2005"<br>Lastuse 20070910 SourceValue "2005"<br>Date 20050101 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False<br>Category 583 "20050101-20050331"<br>Parent 581 Levels 167 OrderBy Drill 155<br>Value "20050101" Label "2005 Q 1"<br>Lastuse 20070910 SourceValue "20050101"<br>Date 20050101 Filtered False<br>Suppressed False Sign False<br>HideValue False<br>IsKeyOrphanage False<br>IsTruncated False Blanks False |             |
| Category 591 "20050401-20050630"<br>Parent 581 Levels 167 OrderBy Drill 155<br>Value "20050401" Label "2005 Q 2"<br>Lastuse 20070910 SourceValue "20050401"<br>Date 20050401 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                |             |
| Category 599 "20050701-20050930"<br>Parent 581 Levels 167 OrderBy Drill 155<br>Value "20050701" Label "2005 Q 3"<br>Lastuse 20070910 SourceValue "20050701"<br>Date 20050701 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                |             |
| Category 607 "20051001-20051231"<br>Parent 581 Levels 167 OrderBy Drill 155<br>Value "20051001" Label "2005 Q 4"<br>Lastuse 20070910 SourceValue "20051001"<br>Date 20051001 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                |             |

| Structured MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Description |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Category 683 "20060101-20061231"<br>Parent 155 Levels 161 OrderBy Drill 155<br>Value "2006" Label "2006"<br>Lastuse 20070910 SourceValue "2006"<br>Date 20060101 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False<br>Category 685 "20060101-20060331"<br>Parent 683<br>Levels 167 OrderBy Drill 155<br>Value "20060101"<br>Label "2006 Q 1" Lastuse 20070910<br>SourceValue "20060101"<br>Date 20060101 Filtered False<br>Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncatedFalse<br>Blanks False |             |
| Category 693 "20060401-20060630"<br>Parent 683 Levels 167 OrderBy Drill 155<br>Value "20060401" Label "2006 Q 2"<br>Lastuse 20070910 SourceValue "20060401"<br>Date 20060401<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                                  |             |
| Category 701 "20060701-20060930"<br>Parent 683<br>Levels 167<br>OrderBy Drill 155 Value "20060701"<br>Label "2006 Q 3" Lastuse 20070910<br>SourceValue "20060701"<br>Date 20060701 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                               |             |
| Category 709 "20061001-20061231"<br>Parent 683<br>Levels 167 OrderBy Drill 155<br>Value "20061001"<br>Label "2006 Q 4" Lastuse 20070910<br>SourceValue "20061001" Date 20061001<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                               |             |
| MapDrills MapDrill 155                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |
| ViewName 157 "All Categories" Type All ViewCustomView 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |             |
| ViewName 159 "Omit Dimension" Type Omit ViewCustomView 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |

| Structured MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Description |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Dimension 195 "Order method"<br>DimType Regular NewCatsLock False<br>ExcludeAutoPartitioning False<br>DimDefaultCategory 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| Categories Root 197 "Order method"<br>Inclusion Generate Lastuse 20070910<br>Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False<br>Blanks False Drill 199 "By Order method"<br>Inclusion Suppress Filtered False<br>Suppressed True<br>PrimaryDrill True HideValue False<br>Levels 205 "Order method"<br>Blanks "( Blank )" DateFunction None<br>Generate None<br>RefreshLabel False<br>RefreshDescription False<br>RefreshShortName False<br>NewCatsLock False<br>Timerank 0 UniqueCategories False<br>UniqueMove False Associations 207<br>"Order method code"<br>AssociationType Type_Query<br>AssociationRole Role_Source<br>AssociationReferenced<br>"Order method code" |             |
| Associations 209 "Order method"<br>AssociationType Type_Query<br>AssociationRole Role_Label<br>AssociationReferenced "Order method"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |
| Category 267 "7" Parent 199 Levels 205<br>Label "Sales visit" Lastuse 20070910<br>SourceValue "7"<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |
| Category 285 "4" Parent 199 Levels 205 Label "E-mail"<br>Lastuse 20070910 SourceValue "4"<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |             |
| Category 309 "5" Parent 199 Levels 205<br>Label "Web" Lastuse 20070910<br>SourceValue "5" Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |             |

| Structured MDL                                                                                                                                                                                                                | Description                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category 319 "2" Parent 199 Levels 205<br>Label "Telephone" Lastuse 20070910<br>SourceValue "2" Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False       |                                                                                                                                                                                                                                                                                                                           |
| Category 357 "1" Parent 199 Levels 205<br>Label "Fax" Lastuse 20070910<br>SourceValue "1" Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False             |                                                                                                                                                                                                                                                                                                                           |
| Category 437 "3" Parent 199 Levels 205<br>Label "Mail" Lastuse 20070910<br>SourceValue "3" Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False            |                                                                                                                                                                                                                                                                                                                           |
| Category 475 "8" Parent 199 Levels 205 Label "Special"<br>Lastuse 20070910 SourceValue "8"<br>Current Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False |                                                                                                                                                                                                                                                                                                                           |
| MapDrills MapDrill 199                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                           |
| <b>ViewName 201 "All Categories"</b><br><b>Type All ViewCustomView 0</b><br><b>ViewName 203 "Omit Dimension"</b><br><b>Type Omit ViewCustomView 0</b>                                                                         | These are the two standard views created for all dimensions.<br><br>If you do not manually create the two default dimension views required for each dimension ( <b>All Categories</b> and <b>Omit Dimension</b> ), you must use the ModelEnsureCompleteness script to have Cognos Transformer create them automatically.  |
| <b>ViewName 11555 "Authors~User View"</b><br><b>ViewCustomView 11529</b><br><b>Apex 197 Filter 319</b>                                                                                                                        | <b>ViewName 11555 "Authors~User View"</b> creates a customized dimension view.<br><br><b>ViewCustomView 11529</b> is a reference to the view that this custom view uses in the dimension.<br><br><b>Apex 197 Filter 319</b> is a list of the categories that have customization options set, such as apexing or cloaking. |
| ViewName 11557 "Sub Authors~User View"<br>ViewCustomView 11537 Apex 197 Filter 319                                                                                                                                            |                                                                                                                                                                                                                                                                                                                           |

| Structured MDL                                                                                                                                                                                                                                                                                                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measure 225 "Quantity" Rollup Sum<br>IgnoreMissingValue False Storage Float64<br>OutPutScale 0 Decimals 0<br>ReverseSign False<br>IsCurrency False IsFolder False<br>DrillThrough False EndList<br>Associations 227<br>"Quantity" AssociationType<br>Type_Query AssociationRole Role_Source<br>AssociationReferenced "Quantity" |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>CustomView 11529 "Authors"</b><br><b>DimensionView 149 "All Categories"</b><br><b>DimensionView 195 "Authors~User View"</b><br><b>MeasureInclude 225 Yes</b>                                                                                                                                                                 | <p><b>CustomView</b> indicates that a custom view has been defined.</p> <p><b>"Authors"</b> is the name of the custom view. Custom view names must be unique.</p> <p><b>DimensionView 149 "All Categories"</b> is a reference to a dimension ( <b>149</b> ) and the view that this custom view uses in that dimension, including all categories in the dimension.</p> <p>The second dimension, <b>DimensionView 195 "Authors~User View"</b> , is the customized dimension view used for this custom view.</p> <p><b>MeasureInclude 225 Yes</b> indicates that measure <b>225</b> is included in the custom view. <b>MeasureInclude</b> values are <b>Yes</b> or <b>No</b> .</p> |
| CustomView 11537 "Sub Authors"<br>DimensionView 149 "All Categories"<br>DimensionView 195<br>"Sub Authors~User View"                                                                                                                                                                                                            | This entry creates a second custom view.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>MeasureInclude 225 No</b>                                                                                                                                                                                                                                                                                                    | <b>MeasureInclude 225 No</b> indicates that measure <b>225</b> is excluded from this custom view.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>CustomViewChildList 11529</b><br><b>StartList 11537 EndList</b><br>CustomViewChildList 11537<br>StartList EndList                                                                                                                                                                                                            | <p><b>CustomViewChildList 11529 StartList 11537 EndList</b> defines the custom views that are descendents of the custom view "Authors".</p> <p>References to custom views may be unique identifiers or names.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>SecurityNameSpace 11533</b><br><b>"Cognos" SecurityNameSpaceCAMID</b><br><b>'CAMID(":")'</b>                                                                                                                                                                                                                                 | <b>SecurityNameSpace...</b> defines the namespace from which security objects are retrieved. In this example, <b>"Cognos"</b> is the name of the namespace in Content Manager.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

| Structured MDL                                                                                                                                                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SecurityObject</b> 11531 'CAMID(" :Authors")'<br>SecurityObjectDisplayName "Authors"<br>SecurityObjectType <b>SecurityType_Role</b><br><b>CustomViewList</b> 11529 <b>EndList</b>          | <p><b>SecurityObject</b> is the imported security object from the last defined namespace.</p> <p>'CAMID(" :Authors")' is the security control mechanism identifier for the security object from Content Manager.</p> <p><b>SecurityType_Role</b> indicates that the type of security object from Content Manager is a role. Possible values are SecurityType_Role, SecurityType_Group, and SecurityType_User.</p> <p><b>CustomViewList 11529 EndList</b> is a list of the custom views to which this security object is assigned.</p> <p>References to custom views may be unique identifiers or names.</p> |
| SecurityObject 11539<br>'CAMID(" :Analysis Users")'<br>SecurityObjectDisplayName<br>"Analysis Users"<br>SecurityObjectType SecurityType_Role<br>CustomViewList 11537 EndList                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>SecurityNamespace</b><br>11563 "GOnamespace"<br>SecurityNamespaceCAMID<br>'CAMID("GOnamespace")'                                                                                           | <p><b>SecurityNamespace</b> defines a second namespace from which security objects are retrieved.</p> <p>When multiple namespaces are defined in a custom view, they are organized by namespace, followed by the security objects from that namespace.</p>                                                                                                                                                                                                                                                                                                                                                  |
| SecurityObject 11561 'CAMID<br>("GOnamespace:r:authid=2589996611")'<br>SecurityObjectDisplayName<br>"Root User Class" SecurityObjectType<br>SecurityType_Role CustomViewList 11537<br>EndList |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



- Populate the model and create the PowerCube.

The following example shows the same model, created using an IBM Cognos data source, in verb MDL format.

**Note:** The Add form illustrates the verb that you use to define an object, to differentiate the syntax from that which Cognos Transformer uses when defining objects (the Make form). However, either form is acceptable. Also, you will note that each statement starts with the verb, followed by a lengthy series of options. For readability, you may wish to insert carriage returns between the keywords.

| Verb MDL                                                                                                                                                                                                                                                                                                                                                                                                                                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Make 103 "GO Sales and Retailers"</b><br><b>SourceType</b> Package <b>SourcePath</b><br>"/content/package[@name=<br>'GOSales and Retailers']" <b>PackageTimeStamp</b><br>"/content/package[@name='GOSales<br>and Retailers']/model[@name='model']"                                                                                                                                                                                             | <p><b>Make</b> is the verb used to create a package or report.</p> <p><b>"Go Sales and Retailers"</b> is the name of the IBM Cognos package. All packages and queries must have unique names.</p> <p><b>SourceType</b> defines the type of IBM Cognos data source. The type can be Package, Report, or CognosSourceQuery. In this example, SourceType defines a package data source type.</p> <p><b>SourcePath</b> is the path to the IBM Cognos package stored in Content Manager.</p> <p><b>PackageTimeStamp</b> is the version of the package last used in the model.</p> |
| <b>Make 11543</b><br>"QuantityReport" <b>SourceType</b><br>Report <b>SourcePath</b> "/content/package<br>[@name='GO Sales and Retailers']/report<br>[@name='QuantityReport']"<br><b>PackageTimeStamp</b><br>"/content/package[@name=<br>'GO Sales and Retailers']/report[@name=<br>'QuantityReport']"                                                                                                                                             | <p><b>Make</b> defines a second IBM Cognos package or report data source in the model.</p> <p>In this example, the <b>SourceType</b> defines a report data source type.</p>                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>DataSourceMake 105</b><br>"GO Sales and Retailers~1" Separator ","<br><b>SourceType</b> CognosSourceQuery<br><b>CharacterSet</b> Default <b>DecimalSep</b> "."<br><b>Thousandsep</b> "," <b>Columns</b> True<br><b>Timing</b> PopYesCreateDefault<br><b>PackageReportSource 103</b><br>"GOSales and Retailers"<br><b>AutoSummary</b> True <b>SetCurrent</b> True<br><b>ServerSource</b> False <b>Speed</b> False<br><b>Presummarized</b> False | <p><b>DataSourceMake</b> defines a query defined against a package or report SourceType.</p> <p><b>PackageReportSource 103 "GO Sales and Retailers"</b> is the reference to the package on which this query is defined.</p>                                                                                                                                                                                                                                                                                                                                                  |



| Verb MDL                                                                                                                                                                                                                                                                                                      | Description                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ColumnMake 107 "[gosales_goretailers].<br>[Orders].[Order number]"<br>DataSource 105 Origin Source Offset 0<br>Column "Order number" Storage Float64<br>Scale 0 Size 4 Decimals 0 InputScale 0<br>TimeArray Off Rollup CountAll                                                                               | <p>"[gosales_goretailers].<br/>[Orders].[Order number]" is the reference within the package or report to the query item or measure on which this column is defined.</p> <p>Following are more references to query items or measures on which the columns are defined.</p>   |
| ColumnMake 109 "[gosales_goretailers].<br>[Orders].[Retailer name]" DataSource 105<br>Origin Source Offset 1 Column "Retailer<br>name" Storage Text Scale 0 Size 102<br>Decimals 0 Class Description<br>InputScale 0 TimeArray Off                                                                            |                                                                                                                                                                                                                                                                             |
| ColumnMake 111 "[gosales_goretailers].<br>[Orders].[Order date]" DataSource 105<br>Origin Source Offset 2 Column "Order<br>date" Storage Int32 Scale 0 Size 12<br>Decimals 0 Class Date InputScale 0<br>TimeArray Off                                                                                         |                                                                                                                                                                                                                                                                             |
| ColumnMake 113 "[gosales_goretailers].<br>[Orders].[Order method]" DataSource 105<br>Origin Source Offset 3 Column "Order<br>method" Storage Text Scale 0 Size 102<br>Decimals 0 Class Description<br>InputScale 0 TimeArray Off                                                                              |                                                                                                                                                                                                                                                                             |
| ColumnMake 115 "[gosales_goretailers].<br>[Orders].[Order method code]"<br>DataSource 105 Origin Source Offset 4<br>Column "Order method code"<br>Storage Float64 Scale 0 Size 4 Decimals 0<br>InputScale 0 TimeArray Off Rollup CountAll                                                                     |                                                                                                                                                                                                                                                                             |
| ColumnMake 117 "[gosales_goretailers].<br>[Orders].[Product name]" DataSource 105<br>Origin Source Offset 5 Column "Product<br>name" Storage Text Scale 0 Size 102<br>Decimals 0 Class Description InputScale 0<br>TimeArray Off                                                                              |                                                                                                                                                                                                                                                                             |
| ColumnMake 119 "[gosales_goretailers].<br>[Orders].[Quantity]" DataSource 105<br>Origin Source Offset 6 Column "Quantity"<br>Storage Float64 Scale 0 Size 2 Decimals 0<br>Class Quantity InputScale 0 TimeArray Off<br>Rollup Sum FilterMake 11553 "Americas"<br>FilterRef "[gosales_goretailers].[Americas]" |                                                                                                                                                                                                                                                                             |
| FilterMake 11553 "Americas"<br>FilterRef<br>"[gosales_goretailers].[Americas]"                                                                                                                                                                                                                                | <p><b>FilterMake 115533 "Americas"</b> selects a filter from the data source and imports it into the query.</p> <p><b>FilterRef</b><br/>"[gosales_goretailers].[Americas]" is the reference within the package or report to the filter on which this column is defined.</p> |

| Verb MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Description                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DataSourceMake 11545 "QuantityReport~1"<br>Separator "," SourceType<br>CognosSourceQuery CharacterSet Default<br>DecimalSep "." Thousandsep ","<br>Columns True Timing PopYesCreateDefault<br>PackageReportSource 11543<br>"QuantityReport" AutoSummary False<br>SetCurrent True ServerSource False<br>Speed False Presummarized False                                                                                                                                                                                                                                                                                                                | <p><b>PackageReportSource 11543</b><br/> <b>"QuantityReport"</b> is a second query, defined against a second package.</p> <p>Following are more references to query items or measures on which the columns are defined.</p>                                                                                                                                                                                            |
| ColumnMake 11547 "[Report].[Query1.0].<br>[Product number]" Origin Source<br>Offset 0 Column "Product number"<br>Storage Float64 Scale 0 Size 1 Decimals 0<br>Class Quantity InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ColumnMake 11549 "[Report].[Query1.0].<br>[Production cost]" Origin Source Offset 1<br>Column "Production cost" Storage Float64<br>Scale 2 Size 1 Decimals 2 Class Quantity<br>InputScale 0 TimeArray Off                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| DimMake 149 "Order date" DimType Date<br>EarliestDate 19010101 LatestDate 21001231<br>ManualPeriods False DaysInWeek 127<br>NewCatsLock False<br>ExcludeAutoPartitioning False<br>DimDefaultCategory 0                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>RootCatMake 153</b><br>"Order date"<br>Dimension 149 Inclusion Generate<br>Lastuse 20070910 Date 0 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False<br><b>DrillCatMake 155</b> "By Order date"<br>Dimension 149 Root 153 Inclusion<br>Suppress Filtered False Suppressed<br>True PrimaryDrill True<br>HideValue False YearBegins 20070101<br>PartialWeek Split ExtraWeek None<br>WeekBegins Sunday LevelMake 161 "Year"<br>Drill 155 Parent 0 Blanks<br>"( blank )" Inclusion Generate<br>DateFunction Year Generate Need<br>RefreshLabel False<br>RefreshDescription False | <p>When you create any dimension using MDL, you must manually create both the root category and drill category for that dimension.</p> <p>The verbs <b>RootCatMake</b> and <b>DrillCatMake</b> are used in this example because there is no Add verb form for these objects. Also, you must set the inclusion property to Suppress for the drill category so that it does not display in the reporting components.</p> |
| RefreshShortName False<br>NewCatsLock False<br>CatLabFormat "YYYY" Timerank 10<br><b>UniqueCategories True</b> UniqueMove False<br>Associations 163 "Order date"<br>AssociationType Type_Query<br>AssociationRole Role_Source<br>AssociationReferenced "Order date"<br>Associations 165 "Order date"<br>AssociationContext 155<br>AssociationType Type_Query<br>AssociationRole Role_OrderBy<br>AssociationReferenced "Order date"<br>SortOrder Int16 SortAs Ascending                                                                                                                                                                                | <p><b>UniqueCategories True</b> indicates that the Year level is unique. This is necessary because the level is associated with columns from multiple queries.</p>                                                                                                                                                                                                                                                     |

| Verb MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Description |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| LevelMake 167 "Quarter" Drill 155<br>Parent 161<br>Blanks "( blank )" Inclusion<br>Generate DateFunction Quarter<br>Generate All RefreshLabel False<br>RefreshDescription False<br>RefreshShortName False<br>NewCatsLock False<br>CatLabFormat 'YYYY "Q" Q'<br>Timerank 20 UniqueCategories True<br>UniqueMove False<br>Associations 169 "Order date"<br>AssociationType Type_Query<br>AssociationRole Role_Source<br>AssociationReferenced "Order date"<br>Associations 171 "Order date"<br>AssociationContext 155<br>AssociationType Type_Query<br>AssociationRole Role_OrderBy<br>AssociationReferenced "Order date"<br>SortOrder Int16 SortAs Ascending |             |
| CatMake 233 "20040101-20041231"<br>Dimension 149 Drill 155<br>Levels 161 Parent 155 OrderBy Drill 155<br>Value "2004" Label "2004"<br>Lastuse 20070910 SourceValue "2004"<br>Date 20040101 Filtered False<br>Suppressed False Sign False<br>HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False<br>CatMake 235 "20040101-20040331"<br>Dimension 149 Drill 155<br>Levels 167 Parent 233 OrderBy Drill 155<br>Value "20040101" Label "2004 Q 1"<br>Lastuse 20070910<br>SourceValue "20040101" Date 20040101<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False  |             |
| CatMake 243 "20040401-20040630"<br>Dimension 149 Drill 155<br>Levels 167 Parent 233 OrderBy Drill 155<br>Value "20040401" Label "2004 Q 2"<br>Lastuse 20070910<br>SourceValue "20040401" Date 20040401<br>Filtered False Suppressed False<br>Sign False HideValueFalse<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                                                            |             |
| CatMake 251 "20040701-20040930"<br>Dimension 149 Drill 155<br>Levels 167 Parent 233 OrderBy Drill 155<br>Value "20040701" Label "2004 Q 3"<br>Lastuse 20070910 SourceValue "20040701"<br>Date 20040701 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                              |             |

| Verb MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Description |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| CatMake 259 "20041001-20041231"<br>Dimension 149 Drill 155 Levels 167<br>Parent 233 OrderBy Drill 155<br>Value "20041001" Label "2004 Q 4"<br>Lastuse 20070910 SourceValue "20041001"<br>Date 20041001 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                       |             |
| CatMake 581 "20050101-20051231"<br>Dimension 149 Drill 155 Levels 161<br>Parent 155 OrderBy Drill 155<br>Value "2005" Label "2005"<br>Lastuse 20070910 SourceValue "2005"<br>Date 20050101 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False<br>CatMake 583 "20050101-20050331"<br>Dimension 149 Drill 155 Levels 167<br>Parent 581 OrderBy Drill 155<br>Value "20050101" Label "2005 Q 1"<br>Lastuse 20070910 SourceValue "20050101"<br>Date 20050101 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False |             |
| CatMake 591 "20050401-20050630"<br>Dimension 149 Drill 155 Levels 167<br>Parent 581 OrderBy Drill 155<br>Value "20050401" Label "2005 Q 2"<br>Lastuse 20070910 SourceValue "20050401"<br>Date 20050401 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                       |             |
| CatMake 599 "20050701-20050930"<br>Dimension 149 Drill 155 Levels 167<br>Parent 581 OrderBy Drill 155<br>Value "20050701" Label "2005 Q 3"<br>Lastuse 20070910 SourceValue "20050701"<br>Date 20050701 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                       |             |
| CatMake 607 "20051001-20051231"<br>Dimension 149 Drill 155 Levels 167<br>Parent 581 OrderBy Drill 155<br>Value "20051001" Label "2005 Q 4"<br>Lastuse 20070910 SourceValue "20051001"<br>Date 20051001 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                       |             |

| Verb MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Description |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| CatMake 683 "20060101-20061231"<br>Dimension 149 Drill 155 Levels 161<br>Parent 155 OrderBy Drill 155<br>Value "2006" Label "2006"<br>Lastuse 20070910 SourceValue "2006"<br>Date 20060101 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False<br><br>CatMake 685 "20060101-20060331"<br>Dimension 149 Drill 155 Levels 167<br>Parent 683 OrderBy Drill 155<br>Value "20060101" Label "2006 Q 1"<br>Lastuse 20070910 SourceValue "20060101"<br>Date 20060101 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False |             |
| CatMake 693 "20060401-20060630"<br>Dimension 149 Drill 155 Levels 167<br>Parent 683 OrderBy Drill 155<br>Value "20060401" Label "2006 Q 2"<br>Lastuse 20070910<br>SourceValue "20060401" Date 20060401<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                                                        |             |
| CatMake 701 "20060701-20060930"<br>Dimension 149 Drill 155 Levels 167<br>Parent 683 OrderBy Drill 155<br>Value "20060701" Label "2006 Q 3"<br>Lastuse 20070910 SourceValue "20060701"<br>Date 20060701 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                           |             |
| CatMake 709 "20061001-20061231"<br>Dimension 149 Drill 155 Levels 167<br>Parent 683 OrderBy Drill 155<br>Value "20061001" Label "2006 Q 4"<br>Lastuse 20070910 SourceValue "20061001"<br>Date 20061001 Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                           |             |
| ViewMake 157 "All Categories"<br>Dimension 149<br>Type All ViewCustomView 0<br><br>ViewMake 159 "Omit Dimension"<br>Dimension 149<br>Type Omit ViewCustomView 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |
| DimMake 195 "Order method"<br>DimType Regular<br>NewCatsLock False<br>ExcludeAutoPartitioning False<br>DimDefaultCategory<br>0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |

| Verb MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Description |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| RootCatMake 197 "Order method"<br>Dimension 195<br>Inclusion Generate Lastuse 20070910<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False<br><br>DrillCatMake 199 "By Order method"<br>Dimension 195 Root 197 Inclusion<br>Suppress Filtered False Suppressed True<br>PrimaryDrill True HideValue False<br><br>LevelMake 205 "Order method" Drill 199<br>Parent 0 Blanks "( Blank )"<br>DateFunction None Generate None<br>RefreshLabel False<br>RefreshDescription False<br>RefreshShortName False NewCatsLock False<br>Timerank 0 UniqueCategories False<br>UniqueMove False<br>Associations 207 "Order method code"<br>AssociationType Type_Query<br>AssociationRole Role_Source<br>AssociationReferenced "Order method code"<br>Associations 209 "Order method"<br>AssociationType Type_Query<br>AssociationRole Role_Label<br>AssociationReferenced "Order method" |             |
| CatMake 267 "7" Dimension 195<br>Drill 199 Levels 205 Parent 199<br>Label "Sales visit" Lastuse 20070910<br>SourceValue "7" Filtered False<br>Suppressed False Sign False<br>HideValue False IsKeyOrphanage False<br>IsTruncated False Blanks False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |             |
| CatMake 285 "4" Dimension 195 Drill 199<br>Levels 205 Parent 199 Label "E-mail"<br>Lastuse 20070910 SourceValue "4"<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |             |
| CatMake 309 "5" Dimension 195 Drill 199<br>Levels 205 Parent 199 Label "Web"<br>Lastuse 20070910 SourceValue "5"<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |             |
| CatMake 319 "2" Dimension 195 Drill 199<br>Levels 205 Parent 199 Label "Telephone"<br>Lastuse 20070910 SourceValue "2"<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |             |

| Verb MDL                                                                                                                                                                                                                                                                                                                        | Description                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CatMake 357 "1" Dimension 195 Drill 199<br>Levels 205 Parent 199 Label "Fax"<br>Lastuse 20070910 SourceValue "1"<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                     |                                                                                                                                                                                                                                                                                                                                  |
| CatMake 437 "3" Dimension 195 Drill 199<br>Levels 205 Parent 199 Label "Mail"<br>Lastuse 20070910 SourceValue "3"<br>Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                                    |                                                                                                                                                                                                                                                                                                                                  |
| CatMake 475 "8" Dimension 195 Drill 199<br>Levels 205 Parent 199 Label "Special"<br>Lastuse 20070910 SourceValue "8"<br>Current Filtered False Suppressed False<br>Sign False HideValue False<br>IsKeyOrphanage False IsTruncated False<br>Blanks False                                                                         |                                                                                                                                                                                                                                                                                                                                  |
| <b>ViewMake 201 "All Categories"</b><br><b>Dimension 195 Type All ViewCustomView 0</b><br><b>ViewMake 203 "Omit Dimension"</b><br><b>Dimension 195 Type Omit</b><br><b>ViewCustomView 0</b>                                                                                                                                     | <p>These are the two standard views created for all dimensions.</p> <p>If you do not manually create the two default dimension views required for each dimension (<b>All Categories</b> and <b>Omit Dimension</b>), you must use the ModelEnsureCompleteness script to have Cognos Transformer create them automatically.</p>    |
| <b>ViewMake 11555 "Authors~UserView"</b><br>Dimension 195 ViewCustomView 11529<br><b>Apex 197 Filter 319</b>                                                                                                                                                                                                                    | <p><b>ViewMake 11555 "Authors~User View"</b> creates a customized dimension view.</p> <p><b>ViewCustomView 11529</b> is a reference to the view that this custom view uses in the dimension.</p> <p><b>Apex 197 Filter 319</b> is a list of the categories that have customization options set, such as apexing or cloaking.</p> |
| ViewMake 11557 "Sub Authors~User View"<br>Dimension 195 ViewCustomView 11537<br>Apex 197 Filter 319                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                  |
| MeasureMake 225 "Quantity" Rollup Sum<br>IgnoreMissingValue False<br>Storage Float64OutPutScale 0 Decimals 0<br>ReverseSign False IsCurrency False<br>IsFolder False DrillThrough False EndList<br>Associations 227 "Quantity"<br>AssociationType Type_Query<br>AssociationRole Role_Source<br>AssociationReferenced "Quantity" |                                                                                                                                                                                                                                                                                                                                  |

| Verb MDL                                                                                                                                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CustomViewMake 11529 "Authors"</b><br><b>DimensionView 149 "All Categories"</b><br><b>DimensionView 195 "Authors~User View"</b><br><b>MeasureInclude 225 Yes</b> | <p><b>CustomViewMake</b> is the verb used to define a custom view.</p> <p><b>"Authors"</b> is the name of the custom view. Custom view names must be unique.</p> <p><b>DimensionView 149 "All Categories"</b> is a reference to a dimension ( <b>149</b> ) and the view that this custom view uses in that dimension, including all categories in the dimension.</p> <p>The second dimension, <b>DimensionView 195 "Authors~User View"</b> , is the customized dimension view used for this custom view.</p> <p><b>MeasureInclude 225 Yes</b> indicates that measure <b>225</b> is included in the custom view. <b>MeasureInclude</b> values are <b>Yes</b> or <b>No</b> .</p> |
| CustomViewMake 11537 "Sub Authors"<br>DimensionView 149 "All Categories"<br>DimensionView 195<br>"Sub Authors~User View"                                            | This entry creates a second custom view.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>MeasureInclude 225 No</b>                                                                                                                                        | <p><b>MeasureInclude 225 No</b> indicates that measure <b>225</b> has been excluded from this custom view.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>CustomViewChildListUpdate 11529</b><br><b>StartList 11537 EndList</b><br>CustomViewChildList 11537<br>StartList EndList                                          | <p><b>CustomViewChildListUpdate</b> is the verb used to define the list of descendent custom views. There is only an Update version of this verb.</p> <p><b>CustomViewChildListUpdate 11529 StartList 11537 EndList</b> defines the custom views that are descendents of the custom view "Authors".</p> <p>References to custom views may be unique identifiers or names.</p>                                                                                                                                                                                                                                                                                                  |
| <b>SecurityNameSpaceMake 11533 "Cognos"</b><br><b>SecurityNameSpaceCAMID 'CAMID(":")'</b>                                                                           | <p><b>SecurityNameSpace 11533 "Cognos"</b><br/> <b>SecurityNameSpaceCAMID 'CAMID(":")'</b> is the namespace from which security objects are retrieved. In this example, <b>"Cognos"</b> is the name of the namespace in Content Manager.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                   |



| Verb MDL                                                                                                                                                                                                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SecurityObjectMake</b> 11531<br>' <b>CAMID</b> (":Authors")'<br><b>SecurityNameSpace</b> 11533<br>SecurityObjectDisplayName "Authors"<br>SecurityObjectType <b>SecurityType_Role</b><br><b>CustomViewList</b> 11529 <b>EndList</b>   | <p><b>SecurityObjectMake</b> is the verb used to define a security object.</p> <p><b>SecurityObject</b> is the imported security object from the last defined namespace.</p> <p><b>'CAMID(":Authors")'</b> is the security control mechanism identifier for the security object from Content Manager.</p> <p><b>SecurityNameSpace 11533</b> is the namespace that this security object comes from.</p> <p><b>SecurityType_Role</b> indicates that the type of security object from Content Manager is a role. Possible values are SecurityType_Role, SecurityType_Group and SecurityType_User.</p> <p><b>CustomViewList 11529 EndList</b> is a list of the custom views to which this security object is assigned.</p> <p>References to custom views may be unique identifiers or names.</p> |
| SecurityObjectMake 11539<br>' <b>CAMID</b> (":Analysis Users")'<br>SecurityNameSpace 11533<br>SecurityObjectDisplayName<br>"Analysis Users"<br>SecurityObjectType SecurityType_Role<br>CustomViewList 11537 EndList                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>SecurityNameSpaceMake</b> 11563<br>"GOnamespace" SecurityNameSpaceCAMID<br>' <b>CAMID</b> ("GOnamespace")'                                                                                                                           | <p><b>SecurityNameSpaceMake</b> defines a second namespace from which security objects are retrieved.</p> <p>When multiple namespaces are defined in a custom view, they are organized by namespace, followed by the security objects from that namespace.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| SecurityObjectMake 11561<br>' <b>CAMID</b> ("GOnamespace:r:authid=2589996611")'<br>SecurityNameSpace 11563<br>SecurityObjectDisplayName<br>"Root User Class"<br>SecurityObjectType<br>SecurityType_Role<br>CustomViewList 11537 EndList |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

| Verb MDL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Description                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CubeMake 11535 "Cube1" EncryptedPW<br>"DD32E203AA9AFC5C26233A515A4E83A1DD32<br>E203AA9AFC5C26233A515A4E83A1DD32E20"<br>"3AA9AFC5C26233A515A4E83DD32E203AA9AFC<br>5C26233A515A4E83A1DD32E203AA9AFC"<br>"5C26233A515A4E83A1DD32E203AA9AFC5C26<br>233A515A4E83A1DD32E203AA9AFC5C26233"<br>"A515A4E83A1DD32E203AA9AFC5C26233A515<br>A4E83A1DD32E203AA9AFC5C26233A515A4E"<br>"83A1DD32E203AA9AFC5C26233A515A4E83A1<br>DD32E203AA9AFC5C26233A515A4E83A1DD3"<br>"2E203AA9AFC5C26233A515A4E83A1DD32E20<br>3AA9AFC5C26233A515A4E83A1DD32E203AA"<br>"9AFC5C26233A515A4E83A1DD32E203AA9AFC<br>5C26233A515A4E83A1DD32E203AA9AFC5C2"<br>"6233A515A4E83"<br>Status New<br>CubeCreation On<br>Optimize Default<br>ConsolidatedRecords 10000000<br>PartitionSize 500000<br>PassesNumber 5<br>Compress False<br>DatabaseInfo "Local;"<br>IncrementalUpdate False<br>ServerCube False<br>CubeStamp 0<br>CubeCycle 0<br>BlockParentTotals False<br>Caching False<br>UseAlternateFileName False<br>DrillThrough False<br>EndList DataSourceSignon False<br>PublishEnable True<br>PublishStatus None<br>DimensionView 149 "All Categories"<br>DimensionView 195 "All Categories"<br>MeasureInclude 225 Yes | This section creates the PowerCube.                                                                                                                                                                                                                                                                      |
| <b>PowerCubeCustomViewListUpdate</b><br>Cube 11535 StartList 11537 EndList                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <p><b>PowerCubeCustomViewListUpdate</b> is the verb used to define the custom views assigned to the PowerCube. There is only an Update version of this verb.</p> <p>The list includes only the lowest custom views in the hierarchies. All ancestors are also considered to be assigned to the cube.</p> |
| AllocationAdd Measure 225 Type Default                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | After you add the required measures, you may want to specify how they will be allocated across the various dimensions in your model.                                                                                                                                                                     |

## Sample scripts

The following sample scripts are included for use as a starting point. You can modify them to perform some of the more common MDL scripting operations.

## Change data source types sample

This script changes a source file. It specifies the new file type (Excel) and the new file (Products.xls), and saves the model.

```
OpenPy "model.pyj" DataSourceUpdate
"Products (CSV)" SourceType ExcelCrossTab Source
"Products.xls" SavePy "model.pyj"
```

## Change data source sample

This script removes all categories in the Locations dimension and changes the source for this dimension to Locations.mdb, a Microsoft Access file. It then generates categories and creates the .mdc file. It does not save the changes to the model.

```
OpenMDL "c:\Outdoors.mdl"
CleanHouse Dimension "Locations" 20011231
DataSourceUpdate "Locations (CSV)" SourceType Access
Source "c:\Locations.mdb" DataRange "Locations"
PopulateFromQueries "Locations (CSV)"
CreateFiles
```

## Update selected cubes sample

This script deletes the measure Product Cost from two cubes and then updates the .mdc files for those cubes. It does not save the changes to the model.

```
OpenMDL "c:\Great Outdoors (Admin).mdl"
CubeUpdate "Americas" MeasureInclude "Product Cost"
No CubeUpdate "Europe" MeasureInclude "Product Cost" No
CreateFromCubes "Americas" "Europe"
```

## Update all cubes sample

This script deletes all the categories in the Channels dimension, changes the data source for Channels to Channels.dbf, and generates categories from the new source. It then creates the .mdc file. It does not save the changes to the model.

```
OpenMDL "c:\Outdoors.mdl"
CleanHouse Dimension "Channels" 20011231 DataSourceUpdate
"Channels (dBase 4.0)" Source "c:\Channels.dbf"
PopulateFromQueries "Channels (dBase 4.0)" CreateFiles
```

## Description samples

Every Cognos Transformer object can have a description up to 4,095 characters in length. However, in MDL the description must be divided into a series of smaller 256-character blocks, and all descriptions must be enclosed in quotation marks.

This example provides a description for the Products dimension and saves the model.

```
OpenMDL "c:\Outdoors.mdl"
DimUpdate "Products" DimInfo "This is
an example of a
'description' containing quotes." SaveMDL "c:\Outdoors.mdl"
```

## Add several descriptions sample

This script adds or changes a description for several objects and saves the model.

```
OpenMDL "c:\Outdoors.mdl" DimUpdate
"Products" DimInfo "Updating dimension description" ColumnUpdate "Product Line"
ColumnInfo "Updating column description"
LevelUpdate "Product Line" LevelInfo
"Updating level description" SaveMDL "c:\Outdoors.mdl"
```

## Change a cube output location sample

This script changes the output location of the national cube to c:\mdcdir\national.mdc, and saves the model.

```
OpenPy "model.pyj" CubeUpdate "national"
MDCFile "c:\mdcdir\national.mdc" SavePy "model.pyj"
```

## Change several cube output locations sample

This script changes the output location of several cubes and generates the .mdc files in the new location. It does not save the changes in the model.

```
OpenMDL "c:\Great Outdoors (Admin).mdl"
CubeUpdate "Great Outdoors Sales" MDCFile "c:\Great Outdoors"
CubeUpdate "All Regions" MDCFile "c:\All Regions"
CubeUpdate "Americas" MDCFile "c:\Americas"
CubeUpdate "Far East" MDCFile "c:\Far East"
CubeUpdate "Europe" MDCFile "c:\Europe"
CreateFiles
```

## Change the PowerCube output type sample

This script changes the file type of a PowerCube and saves the model.

```
OpenPy "model.pyj"
SignonMake "name" PromptForPassword False UserId "user" Password "mypassword"
PowerCubeUpdate "national" DatabaseInfo "Local;;"
" Database "name" SavePy "model.pyj"
```

## Change optimization setting sample

This script changes the optimization setting of several cubes to use the older Categories option in cases where autopartitioning is either not supported or not desired. It then generates the .mdc files without saving the changes.

```
OpenMDL "c:\Great Outdoors (Admin).mdl"
CubeUpdate "Great Outdoors Sales" Optimize Categories
CubeUpdate "All Regions" Optimize Categories
CubeUpdate "Americas" Optimize Categories
CubeUpdate "Far East" Optimize Categories
CubeUpdate "Europe" Optimize Categories
CreateFiles
```

## Automate CleanHouse sample

This script uses the MDL verb CleanHouse, which is equivalent to selecting the Clean House command on the **Tools** menu of the user interface, followed by a date in the format YYYYMMDD. This command removes all categories with a last use date less than the specified date.

**Tip:** To remove all categories in the model, specify a future date.

This script removes all categories in the Product dimension that have a last use date prior to November 1, 2006, and saves the model.

```
OpenPy "model.pyj"
CleanHouse Dimension "Product" 20061101 SaveMDL "model.mdl"
```

## Convert model file formats sample

This script converts a legacy format (\*.def) file into .mdl and then .pyj format.

```
OpenDef "\customer\defdat\01xbudgt.def"
SaveMDL "\customer\defdat\01xbudgt.mdl"
SavePy "\customer\defdat\01xbudgt.pyj"
```

## Create cubes based on dimension views sample

This script creates four dimension views, creates four PowerCubes based on the dimension views, and then creates the .mdc files. Each cube relates to one region, except for All Regions which has a drill through to all regions.

```
OpenMDL "c:\Outdoors.mdl"
ViewMake "Region Summary" Dimension "Locations" LevelSummary
Dimension "Locations" Drill "By Region" Levels "Region"Apex
"Region"
ViewMake "North America" Dimension "Locations"
Apex "Region"Summary "Europe"Summary "Far East"
ViewMake "Far East" Dimension "Locations"
Apex "Region"Summary "Europe"Summary "North America"
ViewMake "Europe" Dimension "Locations"
Apex "Region" Summary "Far East" Summary "North
America"
CubeMake "All Regions" MdcFile "c:\All Regions.mdc"
DrillThrough True "c:\NorthAmerica.mdc"
"" "c:\europe.mdc" "" "c:\fareast.mdc" "" EndList
DimensionView "Locations""Region Summary"
CubeMake "North America" MdcFile "c:\North America.mdc"
DimensionView "Locations""North America"
CubeMake "Far East" MdcFile "c:\Far East.mdc"
DimensionView "Locations" "Far East"
CubeMake "Europe" MdcFile "c:\Europe.mdc"
DimensionView "Locations" "Europe"
CreateFiles
```

## Update conversion rates sample

This script adds or changes the currency rates for German marks and French francs for November and December, 2006; that is, before these countries or regions entered the EMU.

```
OpenMDL "C:\Great Outdoors (Admin).mdl"
CurrencyUpdate "German Marks" Levels "Month" CurrencyRateList
EffectiveDate "20021101-20061130" ConversionRate 1.666
EffectiveDate "20021201-20061231" ConversionRate 1.777 EndList
CurrencyUpdate "French Francs" Levels "Month" CurrencyRateList
EffectiveDate "20021101-20061130" ConversionRate 1.666
EffectiveDate "20021201-20061231" ConversionRate 1.777 EndList
```

## Disable incremental update sample

This script disables incremental update for a cube and generates the .mdc file for that cube.

```
OpenMDL "C:\Great Outdoors (Admin).mdl"
CubeUpdate "Europe" IncrementalUpdate False CreateFromCubes "Europe"
```



---

## Chapter 4. Syntax conventions

The Cognos Transformer Developer Guide uses the following syntax and naming conventions:

- MDL verbs and keywords display in code or **bold** form. Verbs and keywords are not case-sensitive, but otherwise must be typed as is. For example, if the syntax includes `CatMake`, you can type `CatMake`, `catmake`, or `CATMAKE`.
- *Italicized* words are placeholders for things you must supply. If more than one placeholder can be supplied, the italicized word is plural, such as *objCats* in the following example:  
`StartList objCats EndList`
- Italicized words starting with *obj* are placeholders to identify an object. The identification must be an object name, object identifier, or both. For example, *objCat* is a placeholder for a category and might appear in the MDL file as 135 "Dishwashers", which identifies a category with object identifier 135 and object name Dishwashers.
- Square brackets [ ] indicate optional items. If only one of two or more optional items may be chosen, they are separated by a pipe (|). For example, [red | green] means that you can specify red or green, or neither. The syntax, [red][green] means that you can use either, neither, or both red and green.
- Braces { } indicate a set of choices, separated by a pipe, from which you must choose one. For example, {red|green} means that you must specify either red or green, but not both.

When the syntax is too long to fit on one line, it wraps at a space between characters.

---

### Data type conventions

The Cognos Transformer Developer Guide uses the following data type conventions.

| Data type | Description                                                                           |
|-----------|---------------------------------------------------------------------------------------|
| bignum    | 32-bit number between -2,147,483,648 and 2,147,483,647                                |
| number    | 16-bit number between -32,768 and 32,767                                              |
| uns       | unsigned number                                                                       |
| string    | character string, enclosed in single or double quotes, up to 256 characters in length |

---

### Syntax example

The following example uses the MDL verb `CatMake`.

You must type this verb and then the identification for a category on which it operates, but all other parameters are optional, as indicated by their enclosing square brackets.

```
CatMakeobjCat [Dimension  
objDim] [DrillobjDrillCat] [Levels  
objLevel] [ParentobjLevel] [  
catopts] [ParentListobjLevels] EndList
```

The following more complex example is based on the MDL keyword AllocationAdd. Options include Dimension, which must be followed by the dimension identifier, and Drill, which must be followed by a drill category identifier.

These mandatory parameters may be followed by one or more optional arguments:

- Levels, followed by the identification of a level
- Category, followed by the identification of a root category
- Category, followed by the identification of a regular category

You then type Measure followed by the identification of a measure, and Type followed by the measure type. Note that *type* does not have the prefix *obj*. This indicates that it is not a Cognos Transformer object.

Finally, you can optionally include AllocationMeasure and the identification of a measure.

```
AllocationAdd [DimensionobjDim] [Drill objDrillCat]  
[LevelsobjLevel] [CategoryobjRootCat] [CategoryobjCat] MeasureobjMeasureType  
[AllocationMeasureobjMeasure]
```

---

## Syntax requirements

You can have up to 256 characters on one line in an MDL file. You can include carriage returns between keywords to reduce the length of a line.

To create a remark or temporarily remove a line from an MDL file, type two slash marks (//) immediately before the text you want to remove or create as a remark.



---

## Chapter 5. MDL verbs

This section of the Developer Guide provides an alphabetical list of all the MDL verbs that you can use with IBM Cognos Transformer.

Before you begin, make sure you review Chapter 4, “Syntax conventions,” on page 59 and the topic that explains when to use object identifiers or category codes: “Locating objects uniquely” on page 11.

---

### Verb types

Most objects in MDL have four verb types associated with them.

The four verb types include Add, Delete, Make, and Update; for example, CatAdd, CatDelete, CatMake, and CatUpdate.

- Add verbs add the object to the model. An error is issued if the object already exists. Examples for this verb type show you how to use it to create an object and specify its required settings.
- Delete verbs remove the object from the model. An error is issued if the object does not exist.
- Make verbs add the object if it does not already exist, and update the object if it does exist. Make verbs combine the functionality of both the Add and Update verbs. Examples for this verb type show the object definitions that are generated by Cognos Transformer when you save a model as an .mdl file.
- Update verbs update existing objects. An error is issued if the object does not exist.

Below is a list of the Cognos Transformer objects and the verbs you can use with each one.

| Cognos Transformer objects | Associated verbs                                                                                                                                                   |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                      | NewModel                                                                                                                                                           |
| DataSource                 | DataSourceAdd, DataSourceDelete, DataSourceMake, DataSourceUpdate, SourceListUpdate, CognosPackageAdd, CognosPackageDelete, CognosPackageMake, CognosPackageUpdate |
| Filter                     | CognosPackageFilterAdd, CognosPackageFilterMake, CognosPackageFilterDelete, CognosPackageFilterUpdate                                                              |
| Prompt                     | PromptAdd, PromptDelete, PromptMake, PromptUpdate                                                                                                                  |
| Column                     | ColumnAdd, ColumnDelete, ColumnMake, ColumnUpdate, ColumnListUpdate                                                                                                |
| Dimension                  | DimAdd, DimDelete, DimMake, DimUpdate, DimensionListUpdate                                                                                                         |
| Subdimension               | SubDimRootMake, SubDimRootUpdate                                                                                                                                   |

| Cognos Transformer objects       | Associated verbs                                                                                                                                                                                                                                                                                               |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Root Category                    | RootCatMake, RootCatUpdate                                                                                                                                                                                                                                                                                     |
| Drill Category                   | DrillCatMake                                                                                                                                                                                                                                                                                                   |
| Level                            | LevelAdd, LevelDelete, LevelMake, LevelMoveAfter, LevelMoveBefore, LevelNewDrill, LevelUpdate                                                                                                                                                                                                                  |
| Category                         | CatAdd, CatDelete, CatJoin, CatMake, CatMorph, CatMoveLevel, CatMoveVertical, CatUpdate, FilterCat                                                                                                                                                                                                             |
| Special Category                 | SpecialCatAdd, SpecialCatDelete, SpecialCatMake, SpecialCatUpdate                                                                                                                                                                                                                                              |
| View                             | ApexCat, ViewAdd, ViewDelete, ViewMake, ViewUpdate, ViewListUpdate                                                                                                                                                                                                                                             |
| Custom View                      | CustomViewAdd, CustomViewMake, CustomViewDelete, CustomViewUpdate, CustomViewChildListUpdate, PowerCubeCustomViewListUpdate, SecurityNamespaceAdd, SecurityNamespaceDelete, SecurityNamespaceMake, SecurityNamespaceUpdate, SecurityObjectAdd, SecurityObjectDelete, SecurityObjectMake, SecurityObjectUpdate, |
| Measure                          | MeasureAdd, MeasureDelete, MeasureMake, MeasureListUpdate, MeasureUpdate, AllocationAdd                                                                                                                                                                                                                        |
| PowerCube                        | CubeAdd, CubeDelete, CubeMake, CubeUpdate, PowerCubeDelete, PowerCubeListUpdate, PowerCubeCustomViewListUpdate                                                                                                                                                                                                 |
| PowerCube Group                  | CubeGroupAdd, CubeGroupDelete, CubeGroupMake, CubeGroupUpdate, PowerCubeDelete, PowerCubeListUpdate                                                                                                                                                                                                            |
| PowerCube Group Cube             | CubeGroupCubeAdd, CubeGroupCubeDelete, CubeGroupCubeListUpdate, CubeGroupCubeMake, CubeGroupCubeUpdate                                                                                                                                                                                                         |
| Signon                           | SignonAdd, SignonListUpdate, SignonMake, SignonUpdate, SignonDelete, CognosPackageDatasourceConnectionAdd, CognosPackageDatasourceConnectionMake, CognosPackageDatasourceConnectionUpdate, CognosPackageDatasourceConnectionDelete                                                                             |
| Dimension Calculation Definition | DimCalcDefAdd, DimCalcDefDelete, DimCalcDefMake, DimCalcDefUpdate                                                                                                                                                                                                                                              |
| Currency Table                   | CurrencyTableAdd, CurrencyTableDelete, CurrencyTableMake, CurrencyTableUpdate                                                                                                                                                                                                                                  |
| Currency                         | CurrencyAdd, CurrencyDelete, CurrencyMake, CurrencyUpdate                                                                                                                                                                                                                                                      |

| Cognos Transformer objects | Associated verbs                                                                                                                                                                                                                                         |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Association                | AssociationAdd, AssociationDelete, AssociationMake, AssociationUpdate, CurrencyTableAdd, CurrencyTable Make, CurrencyTableUpdate, DimensionAdd, DimensionMake, DimensionUpdate, LevelAdd, LevelMake, LevelUpdate, MeasureAdd, MeasureMake, MeasureUpdate |

You can also use the following action verbs to manipulate Cognos Transformer objects.

- AutoDesign
- CatUpdateAll
- CleanHouse
- CreateColumns
- CreateFiles
- CreateFromCubes
- CreateFromQueries
- EventEnd
- EventStart
- MDCCheckServer
- MDCClear
- ModelEnsureCompleteness
- NewModel
- OpenDef
- OpenMDL
- OpenPY
- PopulateFromQueries
- PopulateModel
- ReportPartitions
- SaveMDL
- SavePY
- SummarizeCat
- SummarizeLevel
- UpdateForwardReference
- UpdatePowerCubes

---

## AllocationAdd

The AllocationAdd verb allocates summary data to a level, dimension, or category.

Its equivalent on the user interface is the **Allocation** tab on the **Level**, **Dimension**, and **Category** property sheets.

Only one of level, root category, or category can be specified.

Every measure in a model must have an AllocationAdd statement that contains the name of the measure and the option Type Default. Cognos Transformer creates

this statement if the measure is created on the user interface or if the verb `ModelEnsureCompleteness` is used. Otherwise, you must manually add the statement when you create a measure.

If a measure is allocated, then a second `AllocationAdd` statement defines the allocation.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

```
AllocationAdd [Dimension objDim][Drill objDrillCat]  
[Levels objLevel][Category objRootCat][Category objCat]  
Measure objMeasure Type type [AllocationMeasure objMeasure]
```

| Argument                                   | Description                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dimension</b> <i>objDim</i>             | Specifies the level, root category, or category. <i>objDim</i> can be the object name, object identifier, or both.                                                                                                                                                                                                         |
| <b>Drill</b> <i>objDrillCat</i>            | Specifies the level, root category, or category. <i>objDrillCat</i> can be the object name, object identifier, or both.                                                                                                                                                                                                    |
| <b>Levels</b> <i>objLevel</i>              | Indicates that the allocation should be done to a level, and specifies the level. <i>objLevel</i> can be the object name, object identifier, or both. This argument is optional.                                                                                                                                           |
| <b>Category</b> <i>objRootCat</i>          | Indicates that the allocation should be done to a dimension, and specifies the root category of the dimension. <i>objRootCat</i> can be the object name, object identifier, or both. This argument is optional.                                                                                                            |
| <b>Category</b> <i>objCat</i>              | Indicates that the allocation should be done to a category, and specifies the category. <i>objCat</i> can be the object name, object identifier, or both. This argument is optional.                                                                                                                                       |
| <b>Measure</b> <i>objMeasure</i>           | Specifies the measure that is being allocated. The measure can be identified by object name, object identifier, or both. This argument is mandatory.                                                                                                                                                                       |
| <b>Type</b> <i>type</i>                    | Specifies the type of allocation. <i>type</i> can be <code>Default</code> , <code>None</code> , <code>Constant</code> , or <code>Allocate</code> . The default is <code>Constant</code> if the allocation is to a dimension. For allocations to levels or categories it is <code>None</code> . This argument is mandatory. |
| <b>AllocationMeasure</b> <i>objMeasure</i> | Specifies the measure used as the basis for the allocation proportions. <i>objMeasure</i> can be the object name or object identifier. This argument is optional.                                                                                                                                                          |

## Example

This is an example of the `AllocationAdd` statement that Cognos Transformer requires for every measure.

```
AllocationAdd Measure "Revenue" Type Default
```

A second AllocationAdd statement exists for allocated measures. This example allocates forecast data in the Regions dimension (identified by its root category) according to the distribution of the Revenue measure.

```
AllocationAdd Category "Regions" Measure "Forecast" Type Allocate
AllocationMeasure "Revenue"
```

## ApexCat

The ApexCat verb makes the selected category the highest category in a view. In PowerCubes that are created using this view, users will see only the apex category and its descendants.

To invoke the equivalent command on the user interface, open the left pane of the category viewer for the selected view and category and, from the **Diagram** menu, click **Apex**.

You cannot apply this verb to special categories.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

```
ApexCat objView [Dimension objDim] {Category objCat |
Category objRootCat |Category objDrillCat}
```

| Argument                           | Description                                                                                                                                                                                                                |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ApexCat</b> <i>objView</i>      | Specifies the dimension view or custom security view <i>objView</i> in which the category is to be apexed. <i>objView</i> can be the object name, object identifier, or both.                                              |
| <b>Dimension</b> <i>objDim</i>     | Specifies the view. <i>objDim</i> can be the object name, object identifier, or both.                                                                                                                                      |
| <b>Category</b> <i>objCat</i>      | Specifies a regular category as the apex. <i>objCat</i> can be the object name, object identifier, or both. One of the regular, root, or drill categories must be specified.                                               |
| <b>Category</b> <i>objRootCat</i>  | Specifies the root category as the apex, which has the effect of removing the apex. <i>objRootCat</i> can be the object name, object identifier, or both. One of the regular, root, or drill categories must be specified. |
| <b>Category</b> <i>objDrillCat</i> | Specifies a drill category as the apex. <i>objDrillCat</i> can be the object name, object identifier, or both. One of the regular, root, or drill categories must be specified.                                            |

## Example

This example applies the verb to the Outdoor Products category in the dimension view View1.

```
ApexCat "View1" Dimension "Products" Category "Outdoor Products"
```

---

## AssociationAdd

The AssociationAdd verb adds an association to a measure, level, dimension, category, or currency conversion table.

Its equivalent is adding an association on the property sheet for a measure, level, dimension, category, or currency conversion table.

The syntax is as follows:

**AssociationAdd** *objAssoc assocopts*

| Argument                              | Description                                                                                                                                                                              |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AssociationAdd</b> <i>objAssoc</i> | Specifies the name of the association <i>objAssoc</i> that you want to create and associate with an existing object. <i>objAssoc</i> can be the object name, object identifier, or both. |
| <i>assocopts</i>                      | Specifies the type and details of the association <i>objAssoc</i> . For the complete list of options, see “assocopts” on page 167.                                                       |

### Example

This is an example of an AssociationAdd statement.

```
LevelMake 2979 "Branch Code" Drill 2969  
AssociationAdd 6391 "Branch Code" AssociationLevel 2979 AssociationType  
Type_Query AssociationRole Role_Source AssociationReferenced "Branch Code"
```

---

## AssociationDelete

The AssociationDelete verb removes the association from a measure, level, dimension, category, or currency conversion table.

Its user interface equivalent is deleting an association from the property sheet for a measure, level, dimension, category, or currency conversion table.

The syntax is as follows:

**AssociationDelete** *objAssoc*

| Argument                                 | Description                                                                                                                                                                             |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AssociationDelete</b> <i>objAssoc</i> | Specifies the name of the association <i>objAssoc</i> whose association you want to remove from an existing object. <i>objAssoc</i> can be the object name, object identifier, or both. |

### Example

This is an example of an AssociationDelete statement.

```
LevelMake 2979 "Branch Code" Drill 2969  
AssociationDelete 6391 "Branch Code"
```

---

## AssociationMake

The AssociationMake verb creates an association or updates an existing one.

Its user interface equivalent is creating or updating an association on the property sheet for a measure, level, dimension, category, or currency conversion table.

The syntax is as follows:

**AssociationMake** *objAssoc assocopts*

| Argument                               | Description                                                                                                                                                                                        |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AssociationMake</b> <i>objAssoc</i> | Specifies the name of the association <i>objAssoc</i> that you want to create or update and associate with an existing object. <i>objAssoc</i> can be the object name, object identifier, or both. |
| <i>assocopts</i>                       | Specifies the type and details of the association <i>objAssoc</i> . For the complete list of options, see “assocopts” on page 167.                                                                 |

### Example

This is an example of an AssociationMake statement.

```
LevelMake 2979 "Branch Code" Drill 2969
```

```
AssociationMake 6391 "Branch Code" AssociationLevel 2979 AssociationType Type_Query
```

```
AssociationRole Role_Source AssociationReferenced "Branch Code"
```

---

## AssociationUpdate

The AssociationUpdate verb updates an existing association.

Its user interface equivalent is updating an association on the property sheet for a measure, level, dimension, category, or currency conversion table.

The syntax is as follows:

**AssociationUpdate** *objAssoc assocopts*

| Argument                                 | Description                                                                                                                                                |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AssociationUpdate</b> <i>objAssoc</i> | Specifies the name of an existing association <i>objAssoc</i> that you want to update. <i>objAssoc</i> can be the object name, object identifier, or both. |
| <i>assocopts</i>                         | Specifies the type and details of the association <i>objAssoc</i> . For the complete list of options, see “assocopts” on page 167.                         |

### Example

This is an example of an AssociationUpdate statement.

## AutoDesign

The AutoDesign verb generates a preliminary model of dimensions and measures based on relationships that Cognos Transformer detects in a non-IBM Cognos data source.

In order to use the AutoDesign verb, your model must contain at least one data source and one column.

On the user interface, you may choose to run **AutoDesign** from the **New Model** wizard or the **Tools** menu. You can also set it to run automatically on model creation from the **Preferences** dialog box.

The syntax, which does not require any parameters, is as follows:

**AutoDesign**

## CatAdd

The CatAdd verb creates a category at the specified location in the model.

The equivalent on the user interface is to open the category viewer (diagram), click the right side of an existing category, and drag to the right to add a category at that same level.

The syntax is as follows:

**CatAdd** *objCat* [**Dimension** *objDim*] [**Drill** *objDrillCat*] **Levels**  
*objLevel* **Parent** *objCat* [*catopts*] [**ParentList** *objCats* **EndList**]

| Argument                        | Description                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CatAdd</b> <i>objCat</i>     | Creates the category <i>objCat</i> . <i>objCat</i> must be the object name and can include the object identifier.                                                                      |
| <b>Dimension</b> <i>objDim</i>  | Specifies a dimension for the category. <i>objDim</i> can be the object name, object identifier, or both.                                                                              |
| <b>Drill</b> <i>objDrillCat</i> | Specifies a drill category for the category. <i>objDrillCat</i> can be the object name, object identifier, or both.                                                                    |
| <b>Levels</b> <i>objLevel</i>   | Specifies a level for the category. <i>objLevel</i> can be the object name or object identifier. This argument is mandatory.                                                           |
| <b>Parent</b> <i>objCat</i>     | Specifies a parent category. <i>objCat</i> can be the object name or object identifier. This argument is mandatory.                                                                    |
| <i>catopts</i>                  | Optional parameters that describe the category in greater detail. Some options are set by default if you do not set them. For the complete list of options, see "catopts" on page 168. |



| Argument                         | Description                                                                                                                                                                                   |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ParentList</b> <i>objCats</i> | Specifies parents for the category if the category is at a convergence level. <i>objCats</i> is a list of one or more parent categories, each identified by object name or object identifier. |

For more information about creating categories, see “CatMake” on page 70.

## Example

This is an example of a CatAdd statement that creates the Back Packs category:

```
CatAdd "Back Packs" Dimension "Products" Drill "By Product Line"
Levels "Product Type" Parent "Outdoor Products" SourceValue "Back Packs"
IsKeyOrphanage False IsTruncated False Blanks False
```

---

## CatDelete

The CatDelete verb removes a category from the model.

The user interface equivalent is to select the category and, from the **Edit** menu, click **Delete**.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

**CatDelete** *objCat* [**Dimension** *objDim*]

| Argument                       | Description                                                                                                                      |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>CatDelete</b> <i>objCat</i> | Deletes the category <i>objCat</i> . <i>objCat</i> can be the object name, object identifier, or both.                           |
| <b>Dimension</b> <i>objDim</i> | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both. |

## Example

This is an example of a CatDelete statement that removes the Germany category.

```
CatDelete "Germany" Dimension "Locations"
```

---

## CatJoin

The CatJoin verb joins a category to its specified parent category. This verb is required when creating alternate drill-down paths, and is a useful means of making similar categories unique.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11. There is no user interface equivalent.

CatJoin is required when using alternate drill-down paths. It links a category in the convergence level with the parent in the alternate drill-down path.

The syntax is as follows:

**CatJoin** *objCat* [**Dimension** *objDim*] **Parent** *objCat*

| Argument                       | Description                                                                                                                       |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>CatJoin</b> <i>objCat</i>   | Specifies the category <i>objCat</i> that is to be joined. <i>objCat</i> can be the object name, object identifier, or both.      |
| <b>Dimension</b> <i>objDim</i> | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both.  |
| <b>Parent</b> <i>objCat</i>    | Specifies the parent that is to be joined. <i>objCat</i> can be the object name or object identifier. This argument is mandatory. |

## Example

This is an example of a CatJoin statement that joins the category 1014 to its parent, Canada.

CatJoin "1014" Dimension "Channels" Parent "Canada"

---

## CatMake

The CatMake verb creates a new category or updates an existing one.

The equivalent to create a category on the user interface is to open the category viewer (diagram), click the right side of an existing category, and drag to the right to add a category at that same level. The equivalent to modify an existing category is to change the settings on its property sheet, as required.

Category names cannot contain a tilde (~) or an at sign (@).

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

**CatMake** *objCat* [**Dimension** *objDim*] [**Drill** *objDrillCat* **Levels** [*objLevel*] [**Parent** *objLevel*] [*catopts*] [**ParentList** *objLevels* **EndList**]

| Argument                       | Description                                                                                                                                                                                              |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CatMake</b> <i>objCat</i>   | Creates the category <i>objCat</i> or modifies it if it exists. <i>objCat</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                |
| <b>Dimension</b> <i>objDim</i> | When creating a category, this specifies its dimension. When updating a category, this is used, if necessary, to uniquely identify it. <i>objDim</i> can be the object name, object identifier, or both. |

| Argument                         | Description                                                                                                                                                                                                                                                                                  |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Drill</b> <i>objDrillCat</i>  | When creating a category, this specifies its drill category. This argument is not necessary when updating a category. <i>objDrillCat</i> can be the object name, object identifier, or both.                                                                                                 |
| <b>Levels</b> <i>objLevel</i>    | When creating a category, this specifies its level. This argument is not necessary when updating a category. <i>objLevel</i> can be the object name or object identifier.                                                                                                                    |
| <b>Parent</b> <i>objCat</i>      | When creating a category, this specifies its parent category. This argument is not necessary when updating a category. <i>objCat</i> can be the object name, or object identifier.                                                                                                           |
| <i>catopts</i>                   | Optional parameters that describe the category in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “catopts” on page 168. If the category exists, previously set options are retained unless you change them with this command. |
| <b>ParentList</b> <i>objCats</i> | When creating a category that is at a convergence level, this specifies its parents. When updating a category, this can be used to add one or more new parents. <i>objCats</i> is a list of one or more parent categories, each identified by object name or object identifier.              |

## Example

This is an example of a CatMake statement that defines the category Back Packs.

```
CatMake "Back Packs" Dimension "Products" Drill "By Product Line"
Levels "Product Type" Parent "Outdoor Products" Lastuse 19971202
SourceValue "Back Packs" Filtered False Suppressed False Sign False
IsKeyOrphanage False IsTruncated False Blanks False
```

---

## CatMorph

The CatMorph verb changes the type of the specified category.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11. There is no user interface equivalent.

CatMorph exists so that MDL is a complete representation of a Cognos Transformer model when a category is changed. For example, when a leaf category acquires a child it changes (or “morphs”) into a parent. This is an internal operation and when the model is saved as an .mdl file, the CatMorph statement does not appear in the file.

The syntax is as follows:

```
CatMorph objCat [Dimension objDim] CatType type
```

| Argument                       | Description                                                                                                                      |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>CatMorph</b> <i>objCat</i>  | Specifies the category <i>objCat</i> that is to be changed. <i>objCat</i> can be the object name, object identifier, or both.    |
| <b>Dimension</b> <i>objDim</i> | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both. |
| <b>CatType</b> <i>type</i>     | Specifies the category type. The type can be Leaf, Special, Parent, Drill, or Root. The type is mandatory.                       |

## CatMoveVertical

The CatMoveVertical verb moves a category to a new position within a level.

The user interface equivalent is to open the category viewer and drag the category from one position to another within a level.

This verb does not change the object identifier of the category. Rather, it determines how the category displays in the dimension viewer and its position in the .mdc file, which affects how it is viewed in the reporting components.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

**CatMoveVertical** *objCat* [**Dimension** *objDim*] **Parent** *objLevel* **Sibling** *objCat*

| Argument                             | Description                                                                                                                                                                            |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CatMoveVertical</b> <i>objCat</i> | Specifies the category that is to be moved. <i>objCat</i> can be the object name, object identifier, or both.                                                                          |
| <b>Dimension</b> <i>objDim</i>       | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both.                                                       |
| <b>Parent</b> <i>objLevel</i>        | Specifies the parent level of the category in its new position. The parent must be specified even if it remains the same. <i>objLevel</i> can be the object name or object identifier. |
| <b>Sibling</b> <i>objCat</i>         | Specifies the sibling category that becomes the next category below the moved category. <i>objCat</i> can be the object name or object identifier. This argument is mandatory.         |

## Example

This is an example of a CatMoveVertical statement that moves the category Sunblock to the position above the category Tents.

CatMoveVertical "Sunblock" Dimension "Products" Parent "Outdoor Products"  
Sibling "Tents"

---

## CatUpdate

The CatUpdate verb updates an existing category.

Its user interface equivalent is to modify the required settings on the **Category** property sheet.

For more information about updating categories, see “CatMake” on page 70.

The syntax is as follows:

**CatUpdate** *objCat* [**Dimension** *objDim*] [*catopts*] [**ParentList** *objCats* **EndList**]

| Argument                         | Description                                                                                                                                                                                                   |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CatUpdate</b> <i>objCat</i>   | Specifies the category to update. <i>objCat</i> can be the object name, object identifier, or both.                                                                                                           |
| <b>Dimension</b> <i>objDim</i>   | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both.                                                                              |
| <i>catopts</i>                   | Optional parameters that describe the category in greater detail. For the complete list of options, see “catopts” on page 168. Previously set options are retained unless you change them with this command.  |
| <b>ParentList</b> <i>objCats</i> | Specifies parents of the category. This can be used to add one or more new parents for the category. <i>objCats</i> are the added parent categories, each identified by its object name or object identifier. |

---

## CatUpdateAll

The CatUpdateAll verb changes the last use value of all categories in the model to the current date. There is no user interface equivalent that allows you to globally change this setting on the **General** tab of all **Category** property sheets.

The syntax is as follows:

**CatUpdateAll**

---

## CleanHouse

The CleanHouse verb deletes categories with a last use date that is earlier than the date specified.

The equivalent on the user interface is the **Clean House** command on the **Tools** menu.

Each time a category is used, its last use value is set to the current system date. LastUse is a category option and can be found in CatMake statements in MDL or on the **Category** property sheet in the user interface.

The syntax is as follows:

**CleanHouse** [**Dimension** *objDim*] *date*

| Argument                       | Description                                                                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dimension</b> <i>objDim</i> | Specifies a dimension within which the appropriate categories should be deleted. <i>objDim</i> can be the object name, object identifier, or both. If the dimension is not specified, all dimensions are affected. |
| <i>date</i>                    | Specifies the date, in the format YYYYMMDD. To delete all categories, specify a future date.                                                                                                                       |

## Example

This example removes all categories in the **Products** dimension with a **Last Use** date prior to 20070101 (January 1, 2007).

CleanHouse Dimension "Products" 20070101

---

## CognosPackageAdd

The CognosPackageAdd verb creates a package or report data source definition in the model. The package or report definition is a reference to a package or report that is defined in IBM Cognos. You can then create a data source definition that has columns based on items that are selected from the package or report.

If you include a data source ID for the new package or report in the syntax, and the object already exists, you will receive an error message.

To insert a dimension from a package (the **Insert Dimension From Package** command on the **Edit** menu), you must first add the package and data source and then add a dimension from the data source. For more information about adding a dimension from a data source, see “DimAdd” on page 114.

The syntax for a query based on an IBM Cognos package or report is as follows:

**CognosPackageAdd** *objDataSource* [cognospackage\_opts]

| Argument                                     | Description                                                                                                                                           |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CognosPackageAdd</b> <i>objDataSource</i> | Creates the data source <i>objDataSource</i> . <i>objDataSource</i> must be the object name and can include the object identifier.                    |
| cognospackage_opts                           | Optional parameters that can describe the package or report in greater detail. For the complete list of options, see “cognospackageopts” on page 178. |

## Example

This example adds the IBM Cognos package data source Go Sales and Retailers to the model.

```
CognosPackageAdd 103 "GO Sales and Retailers" SourceType Package
SourcePath "/content/package[@name='GO Sales and Retailers']"
PackageTimeStamp "/content/package[@name='GO Sales and Retailers']
/model[@name='model']"
```

This example adds the IBM Cognos report database GSR\_rpt\_1 to the model.

```
CognosPackageAdd 115 "GSR_rpt_1" SourceType Report SourcePath "
/content/package[@name='GO Sales and Retailers']/report[@name='GSR_rpt_1']
"PackageTimeStamp"/content/package[@name='GO Sales and Retailers']
/report[@name='GSR_rpt_1']"
```

---

## CognosPackageDelete

The CognosPackageDelete verb removes a package or report data source from the model.

The user interface equivalent is to click **Delete** on the **Edit** menu when a data source is selected.

For more information about data sources, see the *Cognos Transformer User Guide* and the *Framework Manager User Guide*.

The syntax is as follows:

**CognosPackageDelete** *objDataSource*

| Argument                                        | Description                                                                                                             |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>CognosPackageDelete</b> <i>objDataSource</i> | Deletes the data source <i>objDataSource</i> . <i>objDataSource</i> can be the object name, object identifier, or both. |

### Example

This example deletes the All Staff Count (Excel) data source.

```
CognosPackageDelete "All Staff Count (Excel)"
```

---

## CognosPackageMake

The CognosPackageMake verb creates a package or report data source definition in the model. If one already exists, it is updated. If one does not exist, it is added. The package or report definition is a reference to a package or report that is defined in IBM Cognos. You can then create a data source definition which has columns based on items that are selected from the package or report.

**Note:** To insert a dimension from a package (the **Insert Dimension From Package** command on the **Edit** menu, you must first add the package and data source and then add a dimension from the data source. For more information about adding a dimension from a data source, see “DimAdd” on page 114.

The syntax for a query based on an IBM Cognos package or report is as follows:

**CognosPackageMake** *objDataSource* [cognospackage\_opts]

| Argument                                      | Description                                                                                                                                           |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CognosPackageMake</b> <i>objDataSource</i> | Creates the data source <i>objDataSource</i> . <i>objDataSource</i> must be the object name and can include the object identifier.                    |
| cognospackage_opts                            | Optional parameters that can describe the package or report in greater detail. For the complete list of options, see “cognospackageopts” on page 178. |

## Example

This example adds the IBM Cognos package data source Go Sales and Retailers to the model.

```
CognosPackageMake 103 "GO Sales and Retailers" SourceType
Package SourcePath "/content/package[@name='GO Sales
and Retailers']" PackageTimeStamp "/content/package[@name='GO Sales
and Retailers']/model[@name='model']"
```

This example adds the IBM Cognos report data base GSR\_rpt\_1 to the model.

```
CognosPackageMake 115 "GSR_rpt_1" SourceType Report SourcePath
"/content/package[@name='GO Sales and Retailers']/report[@name='GSR_rpt_1']"
PackageTimeStamp
"/content/package[@name='GOSales and Retailers']/report[@name='GSR_rpt_1']"
```

## CognosPackageUpdate

The CognosPackageUpdate verb modifies a package or report data source definition in the model. The package or report definition is a reference to a package or report that is defined in IBM Cognos. You can then create a data source definition which has columns based on items that are selected from the package or report.

### Note:

- If you include a data source ID for the new package or report in the syntax, and the object doesn't exist, you will receive an error message.
- To insert a dimension from a package (the **Insert Dimension From Package** command on the **Edit** menu, you must first add the package and data source and then add a dimension from the data source. For more information about adding a dimension from a data source, see “DimAdd” on page 114.

The syntax for a query based on an IBM Cognos package or report is as follows:

**CognosPackageUpdate** *objDataSource* [cognospackage\_opts]

| Argument                                        | Description                                                                                                                                           |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CognosPackageUpdate</b> <i>objDataSource</i> | Creates the data source <i>objDataSource</i> . <i>objDataSource</i> must be the object name and can include the object identifier.                    |
| cognospackage_opts                              | Optional parameters that can describe the package or report in greater detail. For the complete list of options, see “cognospackageopts” on page 178. |



## Example

This example modifies the IBM Cognos package data source Go Sales and Retailers.

```
CognosPackageUpdate 103 "GO Sales and Retailers" SourceType
Package SourcePath "/content/package[@name='GO Sales
and Retailers']" PackageTimeStamp "/content/package[@name='GO Sales
and Retailers']/model[@name='model']"
```

This example modifies the IBM Cognos report data base GSR\_rpt\_1.

```
CognosPackageUpdate 115 "GSR_rpt_1" SourceType Report SourcePath
"/content/package[@name='GO Salesand Retailers']/report[@name='GSR_rpt_1']"
PackageTimeStamp
"/content/package[@name='GO Sales and Retailers']/report[@name='GSR_rpt_1']"
```

---

## CognosPackageDatasourceConnectionAdd

The CognosPackageDatasourceConnectionAdd verb defines the data source signon to be used when the data source has an ambiguous signon: multiple connections, each with multiple signons.

## Example

The equivalent on the user interface is to define a Cognos Transformer data source signon when prompted.

The syntax is as follows:

```
CognosPackageDatasourceConnectionAdd "Content Store data source name"
CognosPackageConnection "connection" CognosPackageConnectionSignon
"ContentStoresignon name" Database Transformer data source ID
"Transformerdatasource signon name"
CognosPackageAlwaysUseTransformerSignon {True|False}
CognosPackagePowercubeSource {True|False}
```

| Argument                                                                         | Description                                                                                               |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>CognosPackageDatasourceConnectionAdd</b><br>"Content Store data source name"  | Specifies that a Cognos Transformer signon is added for the data source defined in Content Manager.       |
| <b>CognosPackageConnection</b> "connection"                                      | Specifies the connection to the data source defined in Content Manager.                                   |
| <b>CognosPackageConnectionSignon</b> "Content Store signon name"                 | Specifies the signon name defined in Content Manager.                                                     |
| <b>Database</b> Transformer data source ID "Transformer data source signon name" | Specifies the Cognos Transformer data source ID and new Cognos Transformer data source signon name.       |
| <b>CognosPackageAlwaysUseTransformerSignon</b> {True False}                      | Specifies whether queries use the new Cognos Transformer signon or the signon defined in Content Manager. |
| <b>CognosPackagePowercubeSource</b> {True False}                                 | Specifies whether the data source is a PowerCube.                                                         |

This example adds the Cognos Transformer signon "cogtr\_signon" for the oracle\_gosales data source with data source connection "connection1" and signon "signon1" defined in Content Manager. Queries will always use the "cogtr\_signon" signon. The data source is not an IBM Cognos PowerCube.

```
CognosPackageDatasourceConnectionAdd "oracle_gosales"  
CognosPackageConnection "connection1"  
CognosPackageConnectionSignon "signon1" Database 181 "cogtr_signon"  
CognosPackageAlwaysUseTransformerSignon True CognosPackagePowercubeSource False
```

---

## CognosPackageDatasourceConnectionDelete

The CognosPackageDatasourceConnectionDelete verb deletes a previously-created Cognos Transformer data source signon.

The equivalent on the user interface is to click **Delete Signon** on the edit menu when a signon is selected.

The syntax is as follows:

**CognosPackageDatasourceConnectionDelete** *"Content Store data source name"*

| Argument                                                                                  | Description                                                                                   |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>CognosPackageDatasourceConnectionDelete</b><br><i>"Content Store data source name"</i> | Specifies that a Cognos Transformer signon is deleted data source defined in Content Manager. |

### Example

This example deletes the Cognos Transformer signon "cogtr\_signon".

```
CognosPackageDatasourceConnectionDelete "oracle_gosales"
```

---

## CognosPackageDatasourceConnectionMake

The CognosPackageDatasourceConnectionMake verb creates the data source signon to be used when the data source has an ambiguous signon: multiple connections, each with multiple signons.

The equivalent on the user interface is to define a Cognos Transformer data source signon when prompted.

The syntax is as follows:

```
CognosPackageDatasourceConnectionMake "Content Store data source name"  
DataSource "Package ID or name"  
CognosPackageConnection "connection"  
CognosPackageConnectionSignon "ContentStore signon name"  
Database Transformer data source ID  
"Transformerdatasource signon name"  
CognosPackageAlwaysUseTransformerSignon {True|False}  
CognosPackagePowercubeSource {True|False}
```

| Argument                                                                                | Description                                                                                           |
|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| <b>CognosPackageDatasourceConnectionMake</b><br><i>"Content Store data source name"</i> | Specifies that a Cognos Transformer signon is created for the data source defined in Content Manager. |

| Argument                                                                                | Description                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DataSource</b> <i>"Package ID or name"</i>                                           | Specifies the ID or name of the package with which the object is associated.                                                                                                                              |
| <b>CognosPackageConnection</b> <i>"connection"</i>                                      | Specifies the connection to the data source defined in Content Manager.                                                                                                                                   |
| <b>CognosPackageConnectionSignon</b> <i>"Content Store signon name"</i>                 | Specifies the signon name defined in Content Manager.                                                                                                                                                     |
| <b>Database</b> <i>Transformer data source ID "Transformer data source signon name"</i> | Specifies the Cognos Transformer data source ID and the new Cognos Transformer signon name.<br><br>This argument is optional and appears when the package is associated with a Cognos Transformer signon. |
| <b>CognosPackageAlwaysUseTransformerSignon</b> {True   False}                           | Specifies whether queries use the new Cognos Transformer signon or the signon defined in Content Manager.                                                                                                 |
| <b>CognosPackagePowercubeSource</b> {True   False}                                      | Specifies whether the data source is a PowerCube.                                                                                                                                                         |

## Example

This example creates the Cognos Transformer signon "cogtr\_signon" for the oracle\_gosales data source with data source connection "connection1" and signon "signon1" defined in Content Manager. Queries will always use the "cogtr\_signon" signon. The data source is not a PowerCube.

```
CognosPackageDatasourceConnectionMake "oracle_gosales" DataSource "Package"
CognosPackageConnection "connection1"
CognosPackageConnectionSignon "signon1" Database 181 "cogtr_signon"
CognosPackageAlwaysUseTransformerSignon True
CognosPackagePowercubeSource False
```

This example creates the data source signon when no Cognos Transformer signon is specified.

```
CognosPackageDatasourceConnectionMake "great_outdoors_sales"
DataSource "Package"
CognosPackageConnectionSignon "great_outdoors_sales_2"
CognosPackageAlwaysUseTransformerSignon False
CognosPackagePowercubeSource False
```

This example creates the data source signon when Cognos Transformer signon is specified.

```
CognosPackageDatasourceConnectionMake "great_outdoors_sales"
DataSource "Package"
CognosPackageConnection "great_outdoors_sales"
CognosPackageConnectionSignon "great_outdoors_sales_2"
Database "TransformerSignon"
CognosPackageAlwaysUseTransformerSignon False
CognosPackagePowercubeSource False
```

---

## CognosPackageDatasourceConnectionUpdate

The CognosPackageDatasourceConnectionUpdate verb updates the data source signon created when the data source has an ambiguous signon: multiple connections, each with multiple signons.

The equivalent on the user interface is to modify the Cognos Transformer data source signon property sheet.

The syntax is as follows:

```
CognosPackageDatasourceConnectionUpdate "Content Store data source name"  
CognosPackageConnection "connection"  
CognosPackageConnectionSignon "ContentStore signon name"  
Database Transformer data source ID "Transformerdata source signon name"  
CognosPackageAlwaysUseTransformerSignon {True|False}  
CognosPackagePowercubeSource {True|False}
```

| Argument                                                                        | Description                                                                                               |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>CognosPackageDatasourceConnectionUpdate</b> "Content Store data source name" | Specifies that a Cognos Transformer signon is updated for the data source defined in Content Manager.     |
| <b>CognosPackageConnection</b> "connection"                                     | Specifies the connection to the data source defined in Content Manager.                                   |
| <b>CognosPackageConnectionSignon</b> "Content Store signon name"                | Specifies the signon name defined in Content Manager.                                                     |
| <b>Database</b> Transformer data source ID "Transformerdata source signon name" | Specifies the Cognos Transformer data source ID and Cognos Transformer data source signon name.           |
| <b>CognosPackageAlwaysUseTransformerSignon</b> {True False}                     | Specifies whether queries use the new Cognos Transformer signon or the signon defined in Content Manager. |
| <b>CognosPackagePowercubeSource</b> {True False}                                | Specifies whether the data source is a PowerCube.                                                         |

### Example

This example updates the Cognos Transformer signon "cogtr\_signon" for the oracle\_gosales data source with data source connection "connection1" and signon "signon1" defined in Content Manager. Queries will no longer always use the "cogtr\_signon" signon. The data source is not a PowerCube.

```
CognosPackageDatasourceConnectionUpdate "oracle_gosales"  
CognosPackageConnection "connection1"  
CognosPackageConnectionSignon "signon1"  
Database 181 "cogtr_signon"  
CognosPackageAlwaysUseTransformerSignon False  
CognosPackagePowercubeSource False
```

---

## CognosPackageFilterAdd

The CognosPackageFilterAdd verb imports filters defined within IBM Cognos package or report data sources.

The syntax is as follows:

```
CognosPackageFilterAdd "filter name"  
DATASOURCE data source ID  
CognosPackageFilterRef "filter reference ID"
```

| Argument                                            | Description                                                                           |
|-----------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>CognosPackageFilterAdd</b> "filter name"         | Specifies the name of the filter to be added in the Cognos Transformer model.         |
| <b>DATASOURCE</b> data source ID                    | Specifies the data source ID.                                                         |
| <b>CognosPackageFilterRef</b> "filter reference ID" | Specifies the reference ID of the filter to be added in the Cognos Transformer model. |

### Example

The following example adds the package filter "Tents1" in the Cognos Transformer model, using the IBM Cognos filter reference oracle\_gosales.Tents from the IBM Cognos data source with ID 105.

```
CognosPackageFilterAdd "Tents1" DATASOURCE 105  
CognosPackageFilterRef "[oracle_gosales].[Tents]"
```

---

## CognosPackageFilterDelete

The CognosPackageFilterDelete verb deletes filters imported with IBM Cognos package or report data sources.

The syntax is as follows:

```
CognosPackageFilterDelete "filter name"
```

| Argument                                       | Description                                                                       |
|------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>CognosPackageFilterDelete</b> "filter name" | Specifies the name of the filter to be deleted from the Cognos Transformer model. |

### Example

The following example deletes the filter "Tents1" from the Cognos Transformer model.

```
CognosPackageFilterDelete "Tents1"
```

---

## CognosPackageFilterMake

The CognosPackageFilterMakeverb imports filters defined within IBM Cognos package or report data sources.

The syntax is as follows:

```

CognosPackageFilterMake "filter name"
DATASOURCE data source ID
CognosPackageFilterRef "filter reference ID"

```

| Argument                                                   | Description                                                                           |
|------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>CognosPackageFilterMake</b> <i>"filter name"</i>        | Specifies the name of the filter to be added in the Cognos Transformer model.         |
| <b>DATASOURCE</b> <i>data source ID</i>                    | Specifies the data source ID.                                                         |
| <b>CognosPackageFilterRef</b> <i>"filter reference ID"</i> | Specifies the reference ID of the filter to be added in the Cognos Transformer model. |

## Example

The following example creates the package filter "Tents1" in the Cognos Transformer model, using the IBM Cognos filter reference `oracle_gosales.Tents` from the IBM Cognos data source with ID 105.

```

CognosPackageFilterMake "Tents1" DATASOURCE 105
CognosPackageFilterRef "[oracle_gosales].[Tents]"

```

---

## CognosPackageFilterUpdate

The `CognosPackageFilterUpdate` verb updates filters imported with IBM Cognos package or report data sources.

The syntax is as follows:

```

CognosPackageFilterUpdate "filter name"
DATASOURCE data source ID
CognosPackageFilterRef "filter reference ID"

```

| Argument                                                   | Description                                                                           |
|------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>CognosPackageFilterUpdate</b> <i>"filter name"</i>      | Specifies the name of the filter to be updated in the Cognos Transformer model.       |
| <b>DATASOURCE</b> <i>data source ID</i>                    | Specifies the data source ID.                                                         |
| <b>CognosPackageFilterRef</b> <i>"filter reference ID"</i> | Specifies the reference ID of the filter to be added in the Cognos Transformer model. |

## Example

The following example updates the filter "Tents1" to use the package filter `"[oracle_gosales].[Tents2]"`.

```

CognosPackageFilterUpdate "Tents1" DATASOURCE 105
CognosPackageFilterRef "[oracle_gosales].[Tents2]"

```

---

## ColumnAdd

The ColumnAdd verb adds a column to a data source.

Its user interface equivalent is the **Insert Column** command on the **Edit** menu.

For more information about creating columns, see “ColumnMake” on page 84.

The syntax is as follows:

```
ColumnAdd objCol [DataSource objDataSource]  
Origin origin Offset offset [colopts]
```

| Argument                               | Description                                                                                                                                                                                                                                    |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ColumnAdd</b> <i>objCol</i>         | Creates the column <i>objCol</i> . <i>objCol</i> must be the object name, and can include the object identifier.                                                                                                                               |
| <b>DataSource</b> <i>objDataSource</i> | Places the column within a data source. <i>objDataSource</i> can be the data source object name, object identifier, or both.                                                                                                                   |
| <b>Origin</b> <i>origin</i>            | Specifies the origin. <i>origin</i> must be one of Source, Generated, Calculated, or Manual. This argument is mandatory.                                                                                                                       |
| <b>Offset</b> <i>offset</i>            | Specifies the amount by which the column is offset. <i>offset</i> can be 0 or greater. This argument is mandatory.                                                                                                                             |
| <i>colopts</i>                         | Parameters that describe the column in greater detail. All are optional except Column <i>objCol</i> , which is mandatory. Some options are set by default if you do not set them. For the complete list of options, see “colopts” on page 179. |

### Example

This example adds the Branch Code column to the model.

```
ColumnAdd "Branch Code" DataSource "All Staff Count (Excel)" Origin Source  
Offset 1 Column "Branch Code"
```

---

## ColumnDelete

The ColumnDelete verb removes a column.

The user interface equivalent is to click **Delete** on the **Edit** menu when a column is selected.

The syntax is as follows:

```
ColumnDelete objCol [DataSource objDataSource]
```

| Argument                               | Description                                                                                                                              |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ColumnDelete</b> <i>objCol</i>      | Specifies the column that is to be deleted. <i>objCol</i> must be the object name, and can include its object identifier.                |
| <b>DataSource</b> <i>objDataSource</i> | Is specified, if necessary, to uniquely identify the column. <i>objDim</i> can be the dimension object name, object identifier, or both. |

## Example

This example deletes the column Branch Code.

```
ColumnDelete "Branch Code" DataSource "Locations (CSV)"
```

---

## ColumnListUpdate

The ColumnListUpdate verb reorders the columns in a data source.

The equivalent operation on the user interface is to drag and drop the columns as required.

The syntax is as follows:

```
ColumnListUpdate [DataSource objDataSource] StartList  
objCols EndList
```

| Argument                               | Description                                                                                                                                                                            |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DataSource</b> <i>objDataSource</i> | Specifies the data source to be reordered. <i>objDataSource</i> can be the data source object name, object identifier, or both.                                                        |
| <b>StartList</b> <i>objCols</i>        | Lists the columns in the desired order. If not all columns are listed, the listed ones move to the top of the list. The columns can be identified by object name or object identifier. |

## Example

This example reorders the columns in the Excel data source "All Staff Count" so that **Branch Code** is first, followed by **Time** and **Staff Count**.

```
ColumnListUpdate DataSource "All Staff Count (Excel)" StartList "Branch Code"  
"Time" "Staff Count" EndList
```

---

## ColumnMake

The ColumnMake verb creates a column or updates an existing one.

The user interface equivalent, if the column exists, is to modify its **Column** property sheet. For a new column, click **Insert Column** on the **Edit** menu.

Column names cannot contain an at sign (@).



The syntax is as follows:

**ColumnMake** *objCol* [**DataSource** *objDataSource*]  
**Origin** *origin* **Offset** *offset* [*colopts*]

| Argument                               | Description                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ColumnMake</b> <i>objCol</i>        | Creates the column <i>objCol</i> or modifies it if it exists. <i>objCol</i> can be the column object name, object identifier, or both. Include the object name if the column does not exist.                                                                                                                                                       |
| <b>DataSource</b> <i>objDataSource</i> | When creating a column, this specifies the data source and where it is to be placed. When updating a column this is used, if necessary, to uniquely identify it. <i>objDataSource</i> can be the object name, object identifier, or both.                                                                                                          |
| <b>Origin</b> <i>origin</i>            | Specifies the origin. <i>origin</i> must be one of Source, Generated, Calculated, or Manual. This argument is mandatory.                                                                                                                                                                                                                           |
| <b>Offset</b> <i>offset</i>            | Specifies the amount by which the column is offset. <i>offset</i> can be equal or greater than 0. This argument is mandatory.                                                                                                                                                                                                                      |
| <i>colopts</i>                         | Parameters that describe the column in greater detail. All are optional except Column <i>objCol</i> , which is mandatory. Some options are set by default if you do not set them. For the complete list of options, see “colopts” on page 179. If the column exists, previously set options are retained unless you change them with this command. |

## Example

This example defines the column Branch Code.

```
ColumnMake "Branch Code" DataSource "All Staff Count (Excel)" Origin Source  
Offset 1 Column "Branch Code" Storage Default Scale 0 Size 1 Decimals 0  
InputScale 0 TimeArray Off
```

---

## ColumnUpdate

The ColumnUpdate verb updates an existing column.

The equivalent action on the user interface is to modify the **Column** property sheet.

For more information about updating columns, see “ColumnMake” on page 84.

The syntax is as follows:

**ColumnUpdate** *objCol* [**DataSource** *objDataSource*] [*colopts*]

| Argument                          | Description                                                                                       |
|-----------------------------------|---------------------------------------------------------------------------------------------------|
| <b>ColumnUpdate</b> <i>objCol</i> | Specifies the column to update. <i>objCol</i> can be the object name, object identifier, or both. |

| Argument                               | Description                                                                                                                                                                                                |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DataSource</b> <i>objDataSource</i> | Is specified, if necessary, to uniquely identify the column. <i>objDataSource</i> can be the object name, object identifier, or both.                                                                      |
| <i>colopts</i>                         | Optional parameters that describe the column in greater detail. For the complete list of options, see “colopts” on page 179. Previously set options are retained unless you change them with this command. |

## Example

This example changes the date format of the Time column to the Year-Month form, and changes the degree level for the date to Month.

```
ColumnUpdate "Time" DataSource "Salesrep Plan (Excel)" Format YM DateLevel Month
```

---

## CreateColumns

The CreateColumns verb creates columns for data sources. There is no user interface equivalent because columns are created automatically in the **Data Sources** list on the user interface.

The CreateColumns verb does not work when the associated data source contains the setting Columns True.

The syntax is as follows:

**CreateColumns** *objQueries*

| Argument                               | Description                                                                                                                                         |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CreateColumns</b> <i>objQueries</i> | <i>objQueries</i> are one or more data sources for which columns are to be created. The list must be made up of object names or object identifiers. |

## Example

This example creates columns for the data source **Products (CSV)**.

```
CreateColumns "Products (CSV)"
```

---

## CreateFiles

The CreateFiles verb creates an .mdc file for each PowerCube in the model.

The user interface equivalent is the **Create PowerCube** toolbar button or the **Create PowerCubes** command on the **Run** menu.

For other ways to create and update .mdc files, see “CreateFromCubes” on page 87, “CreateFromQueries” on page 87, and “UpdatePowerCubes” on page 155.

The syntax is as follows:

**CreateFiles**

## Example

This example creates .mdc files for every cube in the model.

```
CreateFiles
```

---

## CreateFromCubes

The CreateFromCubes verb creates an .mdc file for each specified PowerCube.

The user interface equivalent is to click **Create Selected PowerCubes** on the **Run** menu when one or more PowerCubes are selected.

For other ways to create and update .mdc files, see “CreateFiles” on page 86, “CreateFromQueries,” and “UpdatePowerCubes” on page 155.

The syntax is as follows:

```
CreateFromCubes [objCubes]
```

| Argument        | Description                                                                                                                                |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <i>objCubes</i> | Specifies one or more PowerCubes for which .mdc files are to be created. PowerCubes can be identified by object name or object identifier. |

## Example

This example creates an .mdc file for the PowerCube **cube1**.

```
CreateFromCubes "cube1"
```

---

## CreateFromQueries

The CreateFromQueries verb creates an .mdc file for each PowerCube in the model by retrieving data from only specific data sources. There is no user interface equivalent.

If no data sources are specified, nothing happens.

If one or more of the specified data sources are not set for **PowerCube Creation** on the **General** tab of the **Data Source** property sheet in the user interface, an error is issued. This can occur with structural data sources because they do not contain transactional data.

For other ways to create and update .mdc files, see “CreateFromCubes,” “CreateFiles” on page 86, and “UpdatePowerCubes” on page 155.

The syntax is as follows:

```
CreateFromQueries [objQueries]
```

| Argument          | Description                                                                                                                                                   |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>objQueries</i> | Specifies one or more data sources that are used to create .mdc files for the PowerCubes. Data sources can be identified by object name or object identifier. |

## Example

This example creates .mdc files from the **All Staff Count (Excel)** data source.  
CreateFromQueries "All Staff Count(Excel)"

---

## CubeAdd

The CubeAdd verb creates the PowerCube object in the Cognos Transformer model.

To create or update an .mdc file, see “CreateFiles” on page 86.

The user interface equivalent is to select the **Insert** option on the **Edit** menu when the **PowerCubes** pane is selected.

For more information about creating PowerCubes, see “CubeMake” on page 97.

The syntax is as follows:

```
CubeAdd objCube [powercubeopts][ DimensionView objView]
[MeasureInclude objMeasure meaopt]
```

| Argument                                       | Description                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeAdd</b> <i>objCube</i>                  | Creates the PowerCube <i>objCube</i> . <i>objCube</i> must be the object name and can include the object identifier.                                                                                                                                                                                                   |
| <i>powercubeopts</i>                           | Optional parameters that describe the cube in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “powercubeopts” on page 214.                                                                                                                               |
| <b>DimensionView</b> <i>objDim objView</i>     | Specifies the dimension and dimension view. <i>objDim</i> can be the object name or object identifier. <i>objView</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple views, as in<br>DimensionView "Years" "All Categories"<br>DimensionView "Products" "All Categories" |
| <b>MeasureInclude</b> <i>objMeasure meaopt</i> | Specifies the measure. <i>objMeasure</i> can be the object name, object identifier, or both. <i>meaopt</i> must be one of Yes, Indirect, or No. Repeat this argument to specify multiple measures, as in<br>MeasureInclude 159 Yes<br>MeasureInclude 175 No                                                            |

## Example

This example creates the **Great Outdoors Company Sales** PowerCube object.  
CubeAdd "Great Outdoors Company Sales" MdcFile "c:\outdoors.mdc"

---

## CubeDelete

The CubeDelete verb removes the PowerCube object from the Cognos Transformer model.

The user interface equivalent is to click **Delete** on the **Edit** menu when a cube is selected.

The `CubeDelete` verb only deletes the PowerCube object, not the .mdc file.

The syntax is as follows:

**CubeDelete** *objCube*

| Argument                         | Description                                                                                               |
|----------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>CubeDelete</b> <i>objCube</i> | Specifies the PowerCube to be deleted. <i>objCube</i> can be the object name, object identifier, or both. |

## Example

This example deletes the PowerCube called Great Outdoors Company Sales.

```
CubeDelete "Great Outdoors Company Sales"
```

---

## CubeGroupAdd

The `CubeGroupAdd` verb creates the PowerCubeGroup object in the Cognos Transformer model.

To create or update an .mdc file, see “CreateFiles” on page 86.

The user interface equivalent is to select the **Insert** option from the **Edit** menu when the **PowerCubes** pane is selected, and then to specify a dimension and level on the **Cube Group** tab.

If you do not include the options `SegmenterLevel` and `SegmenterDimension`, the `CubeGroupAdd` verb creates a PowerCube rather than a PowerCubeGroupCube object. For more information, see “powercubeopts” on page 214.

For more information about updating cube groups, see “CubeGroupMake” on page 95.

The syntax is as follows:

**CubeGroupAdd** *objCubeGroup* [*powercubeopts*] [**DimensionView** *objDim objView*]  
[**MeasureInclude** *objMeasure meaopt*]

| Argument                                | Description                                                                                                                                                                              |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupAdd</b> <i>objCubeGroup</i> | Specifies the cube group that is to be created. <i>objCubeGroup</i> must be the object name, and can also be the object identifier.                                                      |
| <i>powercubeopts</i>                    | Optional parameters that describe the cube in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “powercubeopts” on page 214. |

| Argument                                       | Description                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimensionView</b> <i>objDim objView</i>     | Specifies the dimension and dimension view. <i>objDim</i> can be the object name or object identifier. <i>objView</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple views, as in<br>DimensionView "Years" "All Categories"<br>DimensionView "Products"<br>"All Categories" |
| <b>MeasureInclude</b> <i>objMeasure meaopt</i> | Specifies the measure. <i>objMeasure</i> can be the object name, object identifier, or both. <i>meaopt</i> must be one of Yes, Indirect or No. Repeat this argument to specify multiple measures, as in<br>MeasureInclude 159 Yes<br>MeasureInclude 175 No                                                                |

## Example

This example creates the cube group cubegroup1. Cubes within this group are created from the Products dimension and the Product Line level.

```
CubeGroupAdd "cubegroup1" MdcFile "c:\temp\outdoors1.mdc"
SegmenterDimension "Products" SegmenterLevel "Product Line"
```

---

## CubeGroupCubeAdd

The CubeGroupCubeAdd verb creates the PowerCube object for a PowerCubeGroup object in the Cognos Transformer model.

## Example

To create or update an .mdc file, see “CreateFiles” on page 86.

The user interface equivalent is to select the **Insert** option from the **Edit** menu when the **PowerCubes** pane is selected, and then to provide a dimension and level on the **Cube Group** tab.

In the user interface, a PowerCubeGroupCube object is created for every category under the Drill category in the dimension, unless some categories have been excluded, cloaked, or suppressed. In MDL, a separate statement must be included for every category under the Drill category.

For more information about creating cubes in cube groups, see “CubeGroupCubeMake” on page 92.

The syntax is as follows:

```
CubeGroupCubeAdd objCubeGroupCube
CubeGroup objCubeGroup [ Dimension objDim ]
Code objCat [ powercubeopts ]
```

| Argument                                    | Description                                                                                                                                                                              |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupCubeAdd</b> <i>objCubeGroup</i> | Creates the PowerCube group cube <i>objCubeGroupCube</i> . <i>objCubeGroupCube</i> must be the object name and can include the object identifier.                                        |
| <b>CubeGroup</b> <i>objCubeGroup</i>        | Specifies a cube group for the PowerCube. <i>objCubeGroup</i> can be the object name, object identifier, or both.                                                                        |
| <b>Dimension</b> <i>objDim</i>              | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both.                                                         |
| <b>Code</b> <i>objCat</i>                   | Specifies the category on which the PowerCube is based. <i>objCat</i> can be the object name, object identifier, or both. This argument is mandatory.                                    |
| <i>powercubeopts</i>                        | Optional parameters that describe the cube in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “powercubeopts” on page 214. |

This example creates the **Outdoor Products** cube within the cube group **cubegroup1**, based on the **Outdoor Products** category.

```
CubeGroupCubeAdd "Outdoor Products" CubeGroup "cubegroup1" Code "Outdoor Products"
```

---

## CubeGroupCubeDelete

The CubeGroupCubeDelete verb removes the PowerCube from a PowerCubeGroupCube object in the Cognos Transformer model. It does not delete the .mdc file.

### Example

The user interface equivalent is to click **Delete** on the **Edit** menu when a PowerCube in a cube group is selected.

This verb can only be used if the model contains a dimension view that apexes, cloaks, suppresses, or excludes the category at the apex of the cube.

A PowerCubeGroupCube object can only be deleted if it is suppressed in the dimension view that underlies the cube group. This means that you must first create a dimension view that apexes, cloaks, suppresses, or excludes the category that defines the PowerCubeGroupCube object.

The syntax is as follows:

```
CubeGroupCubeDelete objCubeGroupCube [ CubeGroup objCubeGroup ]
```

| Argument                                              | Description                                                                                                                         |
|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupCubeDelete</b><br><i>objCubeGroupCube</i> | Deletes the cube group <i>objCubeGroupCube</i> .<br><i>objCubeGroupCube</i> can be the object name, object identifier, or both.     |
| <b>CubeGroup</b> <i>objCubeGroup</i>                  | Specifies the cube group in which the PowerCube is located. <i>objCubeGroup</i> can be the object name, object identifier, or both. |

This example deletes the Environmental Line cube from cubegroup1. Before the deletion, a dimension view is created to suppress the category.

```
ViewMake "Environmental Line" Dimension "Products" ViewSecurity 0 Apex
"Product Line" Suppressed "Environmental Line" CubeGroupCubeDelete
"Environmental Line" CubeGroup "cubegroup1"
```

---

## CubeGroupCubeListUpdate

The CubeGroupCubeListUpdate verb reorders the PowerCubes in a PowerCubeGroup object.

The user interface equivalent is to drag PowerCubes into the appropriate cube group.

The syntax is as follows:

**CubeGroupCubeListUpdateCubeGroup** *objCubeGroup* [**StartList** *objCubeGroups* **EndList**]

| Argument                                                        | Description                                                                                                                                                                                                                             |
|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupCubeListUpdate CubeGroup</b><br><i>objCubeGroup</i> | Specifies the cube group. <i>objCubeGroup</i> can be the object name, object identifier, or both.                                                                                                                                       |
| <b>StartList</b> <i>objCubeGroupCubes</i>                       | Specifies the cube group cubes in the desired order. Each cube can be identified by object name or object identifier. If no cubes are specified, nothing happens. If some of the cubes are specified, they move to the top of the list. |

### Example

This example places the cubes GO Sport Line and Outdoor Products at the top of the list of cubes in cubegroup1.

```
CubeGroupCubeListUpdate CubeGroup "cubegroup1" StartList "GO Sport Line"
"Outdoor Products" EndList
```

---

## CubeGroupCubeMake

The CubeGroupCubeMake verb creates a PowerCube in a PowerCubeGroup object, or updates it if it exists. It does so by defining a PowerCube group cube object in the Cognos Transformer model.

To create or update an .mdc file, see “CreateFiles” on page 86.



The user interface equivalent, if the cube already exists within a cube group, is to modify the **Cube** property sheet. For a new cube in a cube group, select the **Insert** option on the **Edit** menu when the PowerCubes pane is selected, and then provide a dimension and level on the **Cube Group** tab.

The cube group must exist before you can create a PowerCube for the group.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

```
CubeGroupCubeMake objCubeGroupCube [
CubeGroup objCubeGroup] [Dimension objDim]
Code objCat [powercubeopts]
```

| Argument                                            | Description                                                                                                                                                                                                                      |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupCubeMake</b><br><i>objCubeGroupCube</i> | Creates the PowerCube group cube <i>objCubeGroupCube</i> or modifies it if it exists. <i>objCubeGroupCube</i> can be the object name, object identifier, or both. Include the object name if the cube group cube does not exist. |
| <b>CubeGroup</b> <i>objCubeGroup</i>                | When creating a cube in a cube group, this specifies the cube group. <i>objCubeGroup</i> can be the object name, object identifier, or both.                                                                                     |
| <b>Dimension</b> <i>objDim</i>                      | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both.                                                                                                 |
| <b>Code</b> <i>objCat</i>                           | Specifies the category on which the cube is based. <i>objCat</i> can be the object name, object identifier, or both.                                                                                                             |
| <i>powercubeopts</i>                                | Optional parameters that describe the cube in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “powercubeopts” on page 214.                                         |

## Example

This example defines the PowerCube group cube Outdoor Products.

```
CubeGroupCubeMake 6343 "Outdoor Products" CubeGroup "cubegroup1" Code 4807
Status OK CubeCreation Default Optimize Default Compress False
IncrementalUpdate False ServerCube False CubeStamp 886518687 CubeCycle 24
DrillThrough False EndList
```

---

## CubeGroupCubeUpdate

The CubeGroupCubeUpdate verb updates an existing PowerCube within a PowerCubeGroup object in the Cognos Transformer model. It does not modify existing .mdc files.

The user interface equivalent is to modify the **Cube Group** property sheet.

For more information about updating cubes in cube groups, see “CubeGroupCubeMake” on page 92.

The syntax is as follows:

**CubeGroupCubeUpdate** *objCubeGroupCube* [  
**CubeGroup** *objCubeGroup*] [*powercubeopts*]

| Argument                                              | Description                                                                                                                                                                                                    |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupCubeUpdate</b><br><i>objCubeGroupCube</i> | Specifies the cube group cube to update.<br><i>objCubeGroupCube</i> can be the object name, object identifier, or both.                                                                                        |
| <b>CubeGroup</b> <i>objCubeGroup</i>                  | Specifies the cube group. <i>objCubeGroup</i> can be the object name, object identifier, or both.                                                                                                              |
| <i>powercubeopts</i>                                  | Optional parameters that describe the cube in greater detail. For the complete list of options, see “powercubeopts” on page 214. Previously set options are retained unless you change them with this command. |

## Example

This example modifies the cube Outdoor Products from cubegroup1 by enabling drill-through.

```
CubeGroupCubeUpdate "Outdoor Products" CubeGroup "cubegroup1"  
DrillThrough True EndList DrillThrough True EndList
```

---

## CubeGroupDelete

The CubeGroupDelete verb removes a PowerCubeGroup object from the Cognos Transformer model. It does not delete the .mdc file.

The user interface equivalent is to click **Delete** on the **Edit** menu when a cube group is selected.

The syntax is as follows:

**CubeGroupDelete** *objCubeGroup*

| Argument                                      | Description                                                                                                                |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupDelete</b><br><i>objCubeGroup</i> | Specifies the cube group that is to be deleted.<br><i>objCubeGroup</i> can be the object name, object identifier, or both. |

## Example

This example deletes the PowerCube cubegroup1.

```
CubeGroupDelete "cubegroup1"
```

---

## CubeGroupMake

The CubeGroupMake verb creates a PowerCubeGroup object or updates an existing one, by defining the PowerCube object in the Cognos Transformer model.

To create or update an .mdc file, see “CreateFiles” on page 86.

The user interface equivalent, for an existing cube group, is to modify its **Cube Group** property sheet. For a new cube group, select the **Insert** option from the **Edit** menu when the **PowerCubes** pane is selected, and then provide a dimension and level on the **Cube Group** tab.

If you do not include the options SegmenterLevel and SegmenterDimension, the CubeGroupMake verb will create a PowerCube rather than a PowerCubeGroupCube object. For more information, see “powercubeopts” on page 214.

The syntax is as follows:

**CubeGroupMake** *objCubeGroup* [*powercubeopts*] [**DimensionView** *objDim objView*] [**MeasureInclude** *objMeasure meaopt*]

| Argument                                       | Description                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupMake</b> <i>objCubeGroup</i>       | Creates the cube group <i>objCubeGroup</i> or modifies it if it exists. <i>objCubeGroup</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                                                |
| <i>powercubeopts</i>                           | Optional parameters that describe the cube in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “powercubeopts” on page 214. If the cube exists, previously set options are retained unless you change them with this command.                             |
| <b>DimensionView</b> <i>objDim objView</i>     | Specifies the dimension and dimension view. <i>objDim</i> can be the object name or object identifier. <i>objView</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple views, as in<br>DimensionView "Years" "All Categories"<br>DimensionView "Products" "All Categories" |
| <b>MeasureInclude</b> <i>objMeasure meaopt</i> | Specifies the measure. <i>objMeasure</i> can be the object name, object identifier, or both. <i>meaopt</i> must be one of Yes, Indirect, or No. Repeat this argument to specify multiple measures, as in<br>MeasureInclude "Cost" Yes<br>MeasureInclude "Revenue" No                                                   |

### Example

This example defines the cube group cubegroup1. The cubes within this group are created from the Products dimension, at the Product Line level with a focus of Product Type.

```

CubeGroupMake "cubegroup1" MdcFile "c:\outdoors1.mdc" CubeCreation On
Optimize Default Compress False DatabaseInfo "Local;;" IncrementalUpdate False
ServerCube False DrillThrough False EndList SegmenterDimension "Products"
SegmenterLevel "Product Line" DetailLevel "Product Type" DimensionView
"Years" "All Categories" DimensionView "Products" "All Categories"
DimensionView "Locations" "All Categories" DimensionView
"Channels" "All Categories" DimensionView "Margin Ranges" "All Categories"
MeasureInclude "Revenue" Yes MeasureInclude "Product Cost" Yes
MeasureInclude "Product Plan" Yes MeasureInclude "Expense Plan" Yes
MeasureInclude "Quantity Sold" Yes MeasureInclude "Profit Margin %" Yes
MeasureInclude "Revenue/Employee" Yes MeasureInclude "SalesRep Plan" Yes
MeasureInclude "Staff Count" Yes MeasureInclude "SalesRep Count" Yes

```

## CubeGroupUpdate

The CubeGroupUpdate verb updates an existing PowerCubeGroup object by modifying the PowerCube in the Cognos Transformer model. It does not affect existing .mdc files.

The user interface equivalent is to modify the **Cube Group** property sheet.

For more information about updating cube groups, see “CubeGroupMake” on page 95.

The syntax is as follows:

```

CubeGroupUpdate objCubeGroup [powercubeopts] [DimensionView objDim objView]
[MeasureInclude objMeasure meaopt]

```

| Argument                                       | Description                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeGroupUpdate</b> <i>objCubeGroup</i>     | Specifies the PowerCube group to update. <i>objCubeGroup</i> can be the object name, object identifier, or both.                                                                                                                                                                                                           |
| <i>powercubeopts</i>                           | Optional parameters that describe the cube in greater detail. For the complete list of options, see “powercubeopts” on page 214. Previously set options are retained unless you change them with this command.                                                                                                             |
| <b>DimensionView</b> <i>objDim objView</i>     | Specifies the dimension and dimension view. <i>objDim</i> can be the object name or object identifier. <i>objView</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple views, as in<br><br>DimensionView "Years" "All Categories"<br>DimensionView "Products" "All Categories" |
| <b>MeasureInclude</b> <i>objMeasure meaopt</i> | Specifies the measure. <i>objMeasure</i> can be the object name, object identifier, or both. <i>meaopt</i> must be one of Yes, Indirect, or No. Repeat this argument to specify multiple measures, as in<br><br>MeasureInclude 159<br>Yes MeasureInclude 175 No                                                            |

## Example

This example modifies Cubegroup1 by changing the dimension view from Locations to Omit Dimension and by excluding the measure Product Cost from the view.

```
CubeGroupUpdate "Cubegroup1" DimensionView "Locations" "Omit Dimension"  
MeasureInclude "Product Cost" Indirect
```

---

## CubeMake

The CubeMake verb creates a PowerCube or updates an existing one by defining the PowerCube object in the Cognos Transformer model.

To create or update an .mdc file, see “CreateFiles” on page 86.

The user interface equivalent, if the cube exists, is to modify the **Cube** property sheet. For a new cube, when the **PowerCubes** pane is selected, select the **Insert** option on the **Edit** menu.

The syntax is as follows:

```
CubeMake objCube [powercubeopts] [DimensionView objDim objView][  
MeasureInclude objMeasuremeaopt]
```

| Argument                                       | Description                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeMake</b> <i>objCube</i>                 | Creates the PowerCube <i>objCube</i> or modifies it if it exists. <i>objCube</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                                                           |
| <i>powercubeopts</i>                           | Optional parameters that describe the cube in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “powercubeopts” on page 214. If the cube exists, previously set options are retained unless you change them with this command.                             |
| <b>DimensionView</b> <i>objDim objView</i>     | Specifies the dimension and dimension view. <i>objDim</i> can be the object name or object identifier. <i>objView</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple views, as in<br>DimensionView "Years" "All Categories"<br>DimensionView "Products" "All Categories" |
| <b>MeasureInclude</b> <i>objMeasure meaopt</i> | Specifies the measure. <i>objMeasure</i> can be the object name, object identifier, or both. <i>meaopt</i> must be one of Yes, Indirect, or No. Repeat this argument to specify multiple measures, as in<br>MeasureInclude 159 Yes<br>MeasureInclude 175 No                                                            |

## Example

This example defines the PowerCube Great Outdoors Company Sales.

```

CubeMake "Great Outdoors Company Sales" MdcFile "c:\outdoors.mdc" Status OK
CubeCreation On Optimize Categories Compress False DatabaseInfo "Local;;"
IncrementalUpdate False ServerCube False CubeStamp 886096730 CubeCycle 6
DrillThrough False EndList DimensionView "Years" "All Categories"
DimensionView "Products" "All Categories"
DimensionView "Locations" "All Categories"
DimensionView "Channels" "All Categories"
DimensionView "Margin Ranges" "All Categories" MeasureInclude "Revenue" Yes
MeasureInclude "Product Cost" Yes MeasureInclude "Product Plan" Yes
MeasureInclude "Expense Plan" Yes MeasureInclude "Quantity Sold" Yes
MeasureInclude "Profit Margin %" Yes MeasureInclude "Revenue/Employee" Yes
MeasureInclude "SalesRep Plan" Yes MeasureInclude "Staff Count" Yes
MeasureInclude "SalesRep Count" Yes

```

## CubeUpdate

The CubeUpdate verb updates an existing PowerCube by modifying the PowerCube object in the Cognos Transformer model.

To create or update an .mdc file, see “CreateFiles” on page 86.

The user interface equivalent is to modify the **PowerCube** property sheet.

For more information about updating PowerCubes, see “CubeMake” on page 97.

The syntax is as follows:

```

CubeUpdate objCube [powercubeopts] [DimensionView objDim
objView ] [MeasureInclude objMeasure meaopt]

```

| Argument                                       | Description                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CubeUpdate</b> <i>objCube</i>               | Specifies the PowerCube to update. <i>objCube</i> can be the object name, object identifier, or both.                                                                                                                                                                                                                  |
| <i>powercubeopts</i>                           | Optional parameters that describe the cube in greater detail. For the complete list of options, see “powercubeopts” on page 214. If the cube exists, previously set options are retained unless you change them with this command.                                                                                     |
| <b>DimensionView</b> <i>objDim objView</i>     | Specifies the dimension and dimension view. <i>objDim</i> can be the object name or object identifier. <i>objView</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple views, as in<br>DimensionView "Years" "All Categories"<br>DimensionView "Products" "All Categories" |
| <b>MeasureInclude</b> <i>objMeasure meaopt</i> | Specifies the measure. <i>objMeasure</i> can be the object name, object identifier, or both. <i>meaopt</i> must be one of Yes, Indirect, or No. Repeat this argument to specify multiple measures, as in<br>MeasureInclude 159 Yes<br>MeasureInclude 175 No                                                            |

## Example

This example modifies the PowerCube Great Outdoors Company Sales by enabling drill-through, changing the dimension view to Omit Dimension and excluding the Revenue measure.

```
CubeUpdate "Great Outdoors Company Sales" MdcFile "c:\outdoors.mdc"  
DrillThrough True EndList DimensionView "Products" "Omit Dimension"  
MeasureInclude "Revenue" Indirect
```

---

## CurrencyAdd

The CurrencyAdd verb adds a currency definition to the currency table for the model.

The user interface equivalent is to right-click a currency item in the currency table and then select **Add New Currency**.

The syntax is as follows.

```
CurrencyAdd objCurrency [Dimension objDim]  
[Drill objDrillCat] Levels objLevel [currencyrecordopts]  
CurrencyRateListEffectiveDate {objCat|0} ConversionRate rate  
[RateIsBySource {True|False}] [CurrencyTableType tabletype] EndList
```

| Argument                              | Description                                                                                                                                                                                                              |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyAdd</b> <i>objCurrency</i> | Adds the currency <i>objCurrency</i> to the list of currencies in the currency table. <i>objCurrency</i> must be the object name and can include the object identifier.                                                  |
| <b>Dimension</b> <i>objDim</i>        | Is specified, if necessary, to uniquely identify the level <i>objLevel</i> . <i>objDim</i> can be the object name, object identifier, or both.                                                                           |
| <b>Drill</b> <i>objDrillCat</i>       | Is specified, if necessary, to uniquely identify the date level <i>objLevel</i> . <i>objDrillCat</i> can be the drill category object name, object identifier, or both.                                                  |
| <b>Levels</b> <i>objLevel</i>         | Specifies the level of the date category <i>objCat</i> . This indicates the granularity of the rate data, such as daily or monthly. <i>objLevel</i> can be the object name or object identifier. The level is mandatory. |
| <i>currencyrecordopts</i>             | Optional parameters that describe the currency in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “currencyrecordopts” on page 188.                        |
| <b>CurrencyRateList</b>               | Indicates the start of conversion rates.                                                                                                                                                                                 |

| Argument                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EffectiveDate</b> { <i>objCat</i>   0} | Specifies conversion rates for the currency. This argument is repeated for each time period that has a conversion rate.<br><br>Each conversion rate specification starts with the keyword <b>EffectiveDate</b> . <i>objCat</i> indicates the date for each conversion rate; it is the date category and can be specified by object name, object identifier, or both. Zero (0) indicates that the country or region is part of the European Monetary Union (EMU). |
| <b>ConversionRate</b> <i>rate</i>         | <i>rate</i> is the exchange rate for that date. It can include decimals; for example, 3.42556.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>RateIsBySource</b> {True   False}      | RateIsBySource indicates whether the conversion rate is sourced from an external data source or was manually entered. The default is False.                                                                                                                                                                                                                                                                                                                      |
| <b>CurrencyTableType</b> <i>tabletype</i> | CurrencyTableType specifies the table type that applies to this currency record for the time period. <i>tabletype</i> can be one of BaseTable, EuroTable, or OtherTable. The default is BaseTable unless EffectiveDate is followed by zero (0), in which case the default is EuroTable.                                                                                                                                                                          |

## Example

This example adds a new currency to the currency table, and specifies conversion rates for three months.

```
CurrencyAdd "C$" Dimension "Years" Levels "Month" CountryCode "Can"
CurrencyRateList EffectiveDate "199601" ConversionRate 1.2
RateIsBySource False EffectiveDate "199602" ConversionRate 1.75
RateIsBySource False EffectiveDate "199603" ConversionRate 1.55
RateIsBySource False EndList
```

---

## CurrencyDelete

The CurrencyDelete verb removes a currency from the currency table.

The user interface equivalent is to manually remove a currency from the currency table.

The syntax is as follows:

**CurrencyDelete** *objCurrency*

| Argument                                 | Description                                                                                                      |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyDelete</b> <i>objCurrency</i> | Deletes the currency <i>objCurrency</i> . <i>objCurrency</i> can be the object name, object identifier, or both. |



## Example

This example deletes Canadian Dollars (C\$) from the currency table.

```
CurrencyDelete "C$"
```

---

## CurrencyMake

The CurrencyMake verb adds a currency to the currency table or updates an existing currency.

The user interface equivalent is to modify the property sheet for an existing currency. For a new currency, right-click a currency in the **Currency Table** property sheet and then select **Add New Currency**.

A currency table must exist before you can create currencies. To create a currency table, see “CurrencyTableMake” on page 104.

Currency conversions are only applied to measures if the measure definition contains the option IsCurrency True.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

```
CurrencyMake objCurrency [Dimension objDim]
[Drill objDrillCat] Levels objLevel [currencyrecordopts]
CurrencyRateListEffectiveDate {objCat|0} ConversionRate rate
[RateIsBySource {True|False}][ CurrencyTableType
tabletype] EndList
```

| Argument                               | Description                                                                                                                                                                                                                                      |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyMake</b> <i>objCurrency</i> | Adds the currency <i>objCurrency</i> to the list of currencies in the currency table or modifies it if it exists. <i>objCurrency</i> can be the object name, object identifier, or both. Include the object name if the currency does not exist. |
| <b>Dimension</b> <i>objDim</i>         | Is specified, if necessary, to uniquely identify the level <i>objLevel</i> . <i>objDim</i> can be the object name, object identifier, or both.                                                                                                   |
| <b>Drill</b> <i>objDrillCat</i>        | Is specified, if necessary, to uniquely identify the date level <i>objLevel</i> . <i>objDrillCat</i> can be the drill category object name, object identifier, or both.                                                                          |
| <b>Levels</b> <i>objLevel</i>          | Specifies the level of the date category <i>objCat</i> . This indicates the granularity of the rate data, such as daily or monthly. <i>objLevel</i> can be the object name or object identifier. The level is mandatory.                         |

| Argument                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>currencyrecordopts</i>                 | Optional parameters that describe the currency in greater detail. Some options are set by default if you do not set them. For the complete list of options, see "currencyrecordopts" on page 188. If the currency exists, previously set options are retained unless you change them with this command.                                                                                                                                                          |
| <b>CurrencyRateList</b>                   | Indicates the start of conversion rates.                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>EffectiveDate</b> { <i>objCat</i>   0} | Specifies conversion rates for the currency. This argument is repeated for each time period that has a conversion rate.<br><br>Each conversion rate specification starts with the keyword <b>EffectiveDate</b> . <i>objCat</i> indicates the date for each conversion rate; it is the date category and can be specified by object name, object identifier, or both. Zero (0) indicates that the country or region is part of the European Monetary Union (EMU). |
| <b>ConversionRate</b> <i>rate</i>         | <i>rate</i> is the exchange rate for that date. It can include decimals; for example, 3.42556.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>RateIsBySource</b> {True   False}      | <b>RateIsBySource</b> indicates whether each rate is sourced from the external data source or was manually entered. The default is False.                                                                                                                                                                                                                                                                                                                        |
| <b>CurrencyTableType</b> <i>tabletype</i> | <b>CurrencyTableType</b> specifies the table type that applies to the currency record for the time period. <i>tabletype</i> can be one of <b>BaseTable</b> , <b>EuroTable</b> , or <b>OtherTable</b> . The default is <b>BaseTable</b> unless <b>EffectiveDate</b> is followed by zero (0), in which case the default is <b>EuroTable</b> .                                                                                                                      |

## Example

This example defines a Canadian currency for the currency table. It provides conversion rates for 1996 only, so the rates for 1997 are set to the default, 1.00000.

```
CurrencyMake "Canadian Dollars" Dimension "Years" Drill "By Time" Levels "Month"
CountryCode "CAN" CurrencyCountryLabel "Canada" CurrencyFormatOverride False
CurrencySymbol "$" CurrencyDecimals 2 CurrencyRateList
EffectiveDate "19960101-19960131" ConversionRate 1.36545 RateIsBySource False
CurrencyTableType BaseTable EffectiveDate "19960201-19960229"
ConversionRate 1.37524 RateIsBySource False CurrencyTableType BaseTable
EffectiveDate "19960301-19960331" ConversionRate 1.36476 RateIsBySource False
CurrencyTableType BaseTable EffectiveDate "19960401-19960430"
ConversionRate 1.35955 RateIsBySource False CurrencyTableType BaseTable
EffectiveDate "19960501-19960531" ConversionRate 1.36957 RateIsBySource False
CurrencyTableType BaseTable EffectiveDate "19960601-19960630"
ConversionRate 1.367 RateIsBySource False CurrencyTableType BaseTable
EffectiveDate "19960701-19960731" ConversionRate 1.36826 RateIsBySource False
CurrencyTableType BaseTable EffectiveDate "19960801-19960831"
ConversionRate 1.37095 RateIsBySource False CurrencyTableType BaseTable
EffectiveDate "19960901-19960930" ConversionRate 1.369 RateIsBySource False
CurrencyTableType BaseTable EffectiveDate "19961001-19961031"
ConversionRate 1.34955 RateIsBySource False CurrencyTableType BaseTable
```

```
EffectiveDate "19961101-19961130" ConversionRate 1.3375 RateIsBySource False
CurrencyTableType BaseTable EffectiveDate "19961201-19961231"
ConversionRate 1.3635 RateIsBySource False CurrencyTableType BaseTable
```

---

## CurrencyTableAdd

The CurrencyTableAdd verb creates a currency table in your Cognos Transformer model.

The user interface equivalent is to select **Currency Table** from the **File** menu.

If you specify the option CurrencyTableType, the object name of the currency table is optional.

For more information about creating Currency Tables, see “CurrencyTableMake” on page 104.

The syntax is as follows:

**CurrencyTableAdd** [*objCurrencyTable*] [*currencytableopts*] **Associations** *assocopts*

| Argument                                        | Description                                                                                                                                                                                                                                       |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyTableAdd</b> <i>objCurrencyTable</i> | Creates the currency table <i>objCurrencyTable</i> . <i>objCurrencyTable</i> can be the object name, object identifier, or both. Include the name for clarity in your model.                                                                      |
| <i>currencytableopts</i>                        | Optional parameters that specify columns in an external data source. For the complete list of options, see “currencytableopts” on page 190. If the currency exists, previously set options are retained unless you change them with this command. |
| <b>Associations</b> <i>assocopts</i>            | Required parameters that specify associations for the currency table. For the complete list of options, see “assocopts” on page 167.                                                                                                              |

## Example

This example creates the base currency table.

```
CurrencyTableAdd 869 "CurrencyBaseTable" CurrencyTableType BaseTable
Associations 1315 "Country Code" AssociationType Type_Query
AssociationRole Role_CountryCode AssociationReferenced "Country Code"
Associations 1317 "Date" AssociationType Type_Query
AssociationRole Role_Date AssociationReferenced "Date"
Associations 1319 "Currency" AssociationType Type_Query
AssociationRole Role_Label AssociationReferenced "Currency"
Associations 1321 "Conversion Rate" AssociationType Type_Query
AssociationRole Role_Rate AssociationReferenced "Conversion Rate"
```

---

## CurrencyTableDelete

The CurrencyTableDelete verb removes an existing currency table from the model.

The user interface equivalent is the **Remove Currency Table** option on the **File** menu.

The syntax is as follows:

**CurrencyTableDelete** *objCurrencyTable*

| Argument                                              | Description                                                                                                                         |
|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyTableDelete</b><br><i>objCurrencyTable</i> | Deletes the currency table <i>objCurrencyTable</i> .<br><i>objCurrencyTable</i> can be the object name, object identifier, or both. |

## Example

This example deletes the base currency table from the Cognos Transformer model.

CurrencyTableDelete "CurrencyBaseTable"

---

## CurrencyTableMake

The CurrencyTableMake verb creates a currency table or updates an existing currency table.

The user interface equivalent is to modify the properties on the **Currency Table** property sheet.

On the Cognos Transformer user interface, the currency table has a single property sheet, even when Euro triangulation is in effect. In MDL, the Base Currency and Euro Currency tables display as two separate objects. Each has its own CurrencyTableMake statement.

The default object names for the two types of table are CurrencyBaseTable and CurrencyEuroTable. You can specify a different object name, but on the user interface, the default object always displays.

If you specify the option CurrencyTableType, the object name of the currency table is optional.

The syntax is as follows:

**CurrencyTableMake** [*objCurrencyTable*] [*currencytableopts*] **Associations**  
*assocopts*

| Argument                                         | Description                                                                                                                                                                                                                                       |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyTableMake</b> <i>objCurrencyTable</i> | Creates the currency table <i>objCurrencyTable</i> or modifies it if it exists. <i>objCurrencyTable</i> can be the object name, object identifier, or both. Include the object name if the currency table does not exist.                         |
| <i>currencytableopts</i>                         | Optional parameters that specify columns in an external data source. For the complete list of options, see "currencytableopts" on page 190. If the currency exists, previously set options are retained unless you change them with this command. |

| Argument                             | Description                                                                                                                           |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>Associations</b> <i>assocopts</i> | Optional parameters that specify associations for the currency table. For the complete list of options, see >"assocopts" on page 167. |

## Example

This example defines a currency table.

```
CurrencyTableMake 869 "CurrencyBaseTable" CurrencyTableType BaseTable
Associations 1315 "Country Code" AssociationType Type_Query
AssociationRole Role_CountryCode AssociationReferenced "Country Code"
Associations 1317 "Date" AssociationType Type_Query
AssociationRole Role_Date AssociationReferenced "Date"
Associations 1319 "Currency" AssociationType Type_Query
AssociationRole Role_Label AssociationReferenced "Currency"
Associations 1321 "Conversion Rate" AssociationType Type_Query
AssociationRole Role_Rate AssociationReferenced "Conversion Rate"
```

## CurrencyTableUpdate

The CurrencyTableUpdate verb updates an existing currency table in the model.

The user interface equivalent is to modify the properties on the **Currency Table** property sheet.

If you specify the option CurrencyTableType, the object name of the currency table is optional.

For more information about updating Currency Tables, see "CurrencyTableMake" on page 104.

The syntax is as follows:

**CurrencyTableUpdate** [*objCurrencyTable*] [*currencyopts*] **Associations** *assocopts*

| Argument                                              | Description                                                                                                                                                                                                                                       |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyTableUpdate</b><br><i>objCurrencyTable</i> | Updates the currency table <i>objCurrencyTable</i> . <i>objCurrencyTable</i> can be the object name, object identifier, or both.                                                                                                                  |
| <i>currencytableopts</i>                              | Optional parameters that specify columns in an external data source. For the complete list of options, see "currencytableopts" on page 190. If the currency exists, previously set options are retained unless you change them with this command. |
| <b>Associations</b> <i>assocopts</i>                  | Optional parameters that specify associations for the currency table. For the complete list of options, see "assocopts" on page 167.                                                                                                              |

## Example

This example modifies the currency table by changing its data source, which requires specifying different columns.

```
CurrencyTableMake 869 "Currency Base Table" CurrencyTableType BaseTable
Associations 1315 "Country Code" AssociationType Type_Query
AssociationRole Role_CountryCode AssociationReferenced "Country Code"
Associations 1317 "Date" AssociationType Type_Query
AssociationRole Role_Date AssociationReferenced "Date"
Associations 1319 "Currency" AssociationType Type_Query
AssociationRole Role_Label AssociationReferenced "Currency"
Associations 1321 "Conversion Rate" AssociationType Type_Query
AssociationRole Role_Rate AssociationReferenced "Conversion Rate"
```

---

## CurrencyUpdate

The CurrencyUpdate verb updates an existing currency in a currency table.

The user interface equivalent is to modify the properties on the **Currency Table** property sheet.

For more information about updating currencies, see “CurrencyMake” on page 101.

The syntax is as follows:

```
CurrencyUpdate objCurrency [Dimension objDim] [Drill objDrillCat]
Levels objLevel [currencyrecordopts] [CurrencyRateListEffectiveDate {objCat|0}
ConversionRate rate [RateIsBySource {True|False}] [
CurrencyTableType tabletype] EndList
```

| Argument                                 | Description                                                                                                                                                                                                              |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CurrencyUpdate</b> <i>objCurrency</i> | Modifies the currency <i>objCurrency</i> . <i>objCurrency</i> can be the object name, object identifier, or both.                                                                                                        |
| <b>Dimension</b> <i>objDim</i>           | Is specified, if necessary, to uniquely identify the level <i>objLevel</i> . <i>objDim</i> can be the object name, object identifier, or both.                                                                           |
| <b>Drill</b> <i>objDrillCat</i>          | Is specified, if necessary, to uniquely identify the date level <i>objLevel</i> . <i>objDrillCat</i> can be the drill category object name, object identifier, or both.                                                  |
| <b>Levels</b> <i>objLevel</i>            | Specifies the level of the date category <i>objCat</i> . This indicates the granularity of the rate data, such as daily or monthly. <i>objLevel</i> can be the object name or object identifier. The level is mandatory. |
| <i>currencyrecordopts</i>                | Optional parameters that describe the currency in greater detail. For the complete list of options, see “currencyrecordopts” on page 188. Previously set options are retained unless you change them with this command.  |
| <b>CurrencyRateList</b>                  | Indicates the start of conversion rates.                                                                                                                                                                                 |

| Argument                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EffectiveDate</b> { <i>objCat</i>   0}            | Specifies conversion rates for the currency. This argument is repeated for each time period that has a conversion rate.<br><br>Each conversion rate specification starts with the keyword <b>EffectiveDate</b> . <i>objCat</i> indicates the date for each conversion rate; it is the date category and can be specified by object name, object identifier, or both. Zero (0) indicates that the country or region is part of the European Monetary Union (EMU). |
| <b>ConversionRate</b> <i>rate</i>                    | <i>rate</i> is the exchange rate for that date. It can include decimals; for example, 3.42556.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>RateIsBySource</b> { <b>True</b>   <b>False</b> } | <b>RateIsBySource</b> indicates whether each rate is sourced from the external data source or was manually entered. The default is <b>False</b> .                                                                                                                                                                                                                                                                                                                |
| <b>CurrencyTableType</b> <i>tabletype</i>            | <b>CurrencyTableType</b> specifies the table type that applies to the currency record for the time period. <i>tabletype</i> can be one of <b>BaseTable</b> , <b>EuroTable</b> , or <b>OtherTable</b> . The default is <b>BaseTable</b> unless <b>EffectiveDate</b> is followed by zero (0), in which case the default is <b>EuroTable</b> .                                                                                                                      |

## Example

This example modifies the conversion rate for Canadian Dollars for December 1997.

```
CurrencyUpdate "Canadian Dollars" CurrencyRateList
EffectiveDate "19971201-19971231" ConversionRate 1.55 EndList
```

## CustomViewAdd

The **CustomViewAdd** verb creates a custom view in the model.

The user interface equivalent for creating a custom view is to select the **Create Custom View** command in the diagram.

The syntax is as follows:

```
CustomViewAdd "customview" DimensionView "All Categories"
DimensionView objView MeasureInclude objMeasure {Yes|No}
```

| Argument                              | Description                                                                                                      |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>CustomViewAdd</b> "custom view"    | Adds the custom view "custom view". "custom view" must be the object name and can include the object identifier. |
| <b>DimensionView</b> "All Categories" | Specifies that all categories are initially included in the custom view.                                         |

| Argument                                | Description                                                                                                                                                                                              |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimensionView</b> <i>objView</i>     | Specifies the dimension and dimension view. <i>objView</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple views.                                           |
| <b>MeasureInclude</b> <i>objMeasure</i> | Specifies the measure. <i>objMeasure</i> can be the object name, object identifier, or both. Repeat this argument to specify multiple measures, as in<br>MeasureInclude 159<br>Yes MeasureInclude 175 No |

### Example

```
CustomViewAdd "Authors" DimensionView 149 "All Categories" DimensionView
195 "Authors~User View" MeasureInclude 225 Yes
```

---

## CustomViewChildListUpdate

The CustomViewChildListUpdate verb defines the list of descendant custom views. You can only update the list of descendant custom views in MDL.

The syntax is as follows:

```
CustomViewChildListUpdate custom view ID StartList
custom view ID Endlist
```

### Example

```
CustomViewChildListUpdate 11529 StartList 11537 Endlist
CustomViewChildListUpdate 11537 StartList EndList
```

---

## CustomViewDelete

The CustomViewDelete verb deletes a custom view from the model.

The user interface equivalent for deleting a custom view is to right-click the custom view, and then click **Delete**.

The syntax is as follows:

```
CustomViewDelete "customview"
```

| Argument                                       | Description                                                                                                                           |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>CustomViewDelete</b> " <i>custom view</i> " | Deletes the custom view " <i>custom view</i> ". " <i>custom view</i> " must be the object name and can include the object identifier. |

### Example

```
CustomViewDelete "Authors"
```

---

## CustomViewMake

The CustomViewMake verb creates a custom view in the model.



The user interface equivalent for creating a custom view is to select the **Create Custom View** command in the diagram.

The syntax is as follows:

```
CustomViewMake "customview" DimensionView objView
MeasureInclude objMeasure {Yes|No}
```

| Argument                                  | Description                                                                                                                                                                                                                                        |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CustomViewMake</b> "custom view"       | Adds the custom view "custom view". "custom view" must be the object name and can include the object identifier.                                                                                                                                   |
| <b>DimensionView</b> objView              | Specifies the dimension and dimension view. objView must be the object name and object identifier. Repeat this argument to specify multiple views.                                                                                                 |
| <b>MeasureInclude</b> objMeasure {Yes No} | Specifies the measure. objMeasure can be the object name, object identifier, or both. Use Yes to include the measure or No to exclude it. Repeat this argument to specify multiple measures, as in<br>MeasureInclude 159 Yes MeasureInclude 175 No |

## Example

```
CustomViewMake "Authors" DimensionView 149 "All Categories" DimensionView
195 "Authors~User View" MeasureInclude 225 Yes
```

## CustomViewUpdate

The CustomViewUpdate verb modifies a custom view in the model.

The user interface equivalent for creating a custom view is to right-click the custom view, and then modify the custom view properties.

The syntax is as follows:

```
CustomViewUpdate "customview" DimensionView objView MeasureInclude
objMeasure {Yes|No}
```

| Argument                                  | Description                                                                                                                                                                                                                                        |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CustomViewUpdate</b> "custom view"     | Adds the data source "custom view". "custom view" must be the object name and can include the object identifier.                                                                                                                                   |
| <b>DimensionView</b> objView              | Specifies the dimension and dimension view. objView can be the object name, object identifier, or both. Repeat this argument to specify multiple views.                                                                                            |
| <b>MeasureInclude</b> objMeasure {Yes No} | Specifies the measure. objMeasure can be the object name, object identifier, or both. Use Yes to include the measure or No to exclude it. Repeat this argument to specify multiple measures, as in<br>MeasureInclude 159 Yes MeasureInclude 175 No |

## Example

```
CustomViewUpdate "Authors" DimensionView 149 "All Categories"  
DimensionView 195 "Authors~User View" MeasureInclude 225 No
```

---

## DataSourceAdd

The **DataSourceAdd** verb creates a data source other than a package or report in the model. This verb is not used to create a package or report data source.

For information about creating a package or report data source, see “**CognosPackageAdd**” on page 74.

The user interface equivalent for creating a data source is to select the **Insert** command on the **Edit** menu when a data source is selected.

The user interface equivalent for creating a query based on an IBM Cognos package or report data source is to select the **Add Query From Package or Report** command on the **Edit** menu when a data source is selected.

### Note:

- If you include a data source ID for the new data source in the syntax, and the object already exists, you will receive an error message.
- To insert a dimension from a package (the **Insert Dimension From Package** command on the **Edit** menu, you must first add the data source and then add a dimension from the data source. For more information about adding a dimension from a data source, see “**DimAdd**” on page 114.

For more information about creating data sources, see “**DataSourceMake**” on page 112.

The syntax for a query based on an IBM Cognos package or report is as follows:

```
DataSourceAdd objDataSource Sourcetype CognosSourceQuery PackageReportSource  
sourceID"source name" [appqueryopts] [OrgName objCol  
Origin {Source|Generated|Calculated|Manual} Offset offset] [colopts]
```

The syntax for all other data source types is as follows:

```
DataSourceAdd objDataSource [appqueryopts] [OrgName objCol  
Origin {Source|Generated|Calculated|Manual} Offset offset] [colopts]
```

| Argument                                  | Description                                                                                                                                                                              |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DataSourceAdd</b> <i>objDataSource</i> | Creates the data source <i>objDataSource</i> . <i>objDataSource</i> must be the object name and can include the object identifier.                                                       |
| <i>appqueryopts</i>                       | Optional parameters that describe the data source in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <i>appqueryopts</i> . |

| Argument                                                                                                                | Description                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>OrgName</b> <i>objCol</i> <b>Origin</b><br>{Source   Generated   Calculated   Manual}<br><b>Offset</b> <i>offset</i> | Specifies the original name of the column, the origin and the offset. Origin must be one of Source, Generated, Calculated, or Manual. <i>offset</i> can be 0 or greater. This allows you to take the structured definition of the column and append it to the data source definition. For more information about structured format, see "Structured MDL". |
| <i>colopts</i>                                                                                                          | Optional parameters that describe the columns in greater detail. Some options are set by default if you do not set them. For the complete list of options, see "colopts" on page 179.                                                                                                                                                                     |

## Examples

This example adds a query based on the IBM Cognos package data source Go Sales and Retailers to the model.

```
DataSourceAdd "GOSRQuery" SourceType CognosSourceQueryPackageReportSource
103 "GO Sales and Retailers" Separator "," CharacterSet Default
DecimalSep "." ThousandSep "," Columns True Timing PopYesCreateDefault
AutoSummary True SetCurrent True ServerSource False Speed False
Presummarized False
```

This example adds the data source Products (CSV) to the model.

```
DataSourceAdd "Products (CSV)" Source "c:\proinfo.csv"
SourceType FlatFileColNames
```

---

## DataSourceDelete

The DataSourceDelete verb removes a data source other than a package or report from the model. This verb does not delete package or report data sources.

For information about deleting package and report data sources, see "CognosPackageDelete" on page 75.

The user interface equivalent is to click **Delete** on the **Edit** menu when a data source is selected.

For more information about IBM Cognos data sources, see the Cognos Transformer *User Guide* and the Framework Manager *User Guide*.

The syntax is as follows:

**DataSourceDelete** *objDataSource*

| Argument                                     | Description                                                                                                             |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>DataSourceDelete</b> <i>objDataSource</i> | Deletes the data source <i>objDataSource</i> . <i>objDataSource</i> can be the object name, object identifier, or both. |

## Example

This example deletes the All Staff Count (Excel) data source.

```
DataSourceDelete "All Staff Count (Excel)"
```

---

## DataSourceMake

The DataSourceMake verb creates a data source other than a package or report or updates an existing one. This verb does not create package or report data sources.

For information about creating package and report data sources, see “CognosPackageMake” on page 75.

The user interface equivalent, if the data source exists, is to modify the **Data Source** property sheet. For a new data source, when the data source is selected, the equivalent is to select the **Insert** command on the **Edit** menu.

The syntax for a query based on an IBM Cognos package or report is:

```
DataSourceMake datasource ID objDataSource SourceType CognosSourceQuery  
PackageReportSource source ID "source name" [appqueryopts]
```

The syntax for all other data source types is as follows:

```
DataSourceMake datasourceID objDataSource [appqueryopts]
```

| Argument                                   | Description                                                                                                                                                                                                                                                                               |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DataSourceMake</b> <i>objDataSource</i> | Creates the data source <i>objDataSource</i> or modifies it if it exists. <i>objDataSource</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                |
| <i>appqueryopts</i>                        | Optional parameters that describe the data source in greater detail. Some options are set by default if you do not set them. For the complete list of options, see appqueryopts. If the data source exists, previously set options are retained unless you change them with this command. |

## Examples

This example adds the data source Go Sales and Retailers to the model.

```
DataSourceMake 103 "Go Sales and Retailers" SourceType Package  
SourcePath "/content/package[@name='GO Sales and Retailers']"  
PackageTimeStamp "/content/package[@name='GO Sales and  
Retailers200701011200']/model[@name='model']"
```

This example adds a query based on the data source Go Sales and Retailers to the model.

```
DataSourceMake 105 "Go Sales and Retailers~1" SourceType  
CognosSourceQuery  
PackageReportSource 103 "GO Sales and Retailers" Separator "," CharacterSet  
Default DecimalSep "." Thousandsep "," Columns True Timing PopYesCreateDefault  
AutoSummary True SetCurrent True ServerSource False Speed False  
Presummarized False
```

This example defines the data source All Staff Count.

```
DataSourceMake 106 "Products (CSV)" Separator "," SourceType FlatFile_ColNames
CharacterSet Multibyte DecimalSep "." Thousandsep "," Columns False
Timing PopYesCreateDefault Source "prodinfo.csv"
```

---

## DataSourceUpdate

The DataSourceUpdate verb updates an existing data source other than a package or report in the model. This verb does not update package or report data sources.

For information about creating package and report data sources, see “CognosPackageUpdate” on page 76.

The user interface equivalent is to modify the **Data Source** property sheet.

**Note:** If you include a data source ID for the updated data source in the syntax, and the object does not already exist, you will receive an error message.

The syntax is as follows:

**DataSourceUpdate** *objDataSource* [*appqueryopts*]

| Argument                                     | Description                                                                                                                                                                                            |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DataSourceUpdate</b> <i>objDataSource</i> | Specifies the data source to update. <i>objDataSource</i> can be the object name, object identifier, or both.                                                                                          |
| <i>appqueryopts</i>                          | Optional parameters that describe the data source in greater detail. For the complete list of options, see appqueryopts. Previously set options are retained unless you change them with this command. |

### Example

This example disables AutoSummary for the data source Go Sales and Retailers~1.

```
DataSourceUpdate 105 "Go Sales and Retailers~1" Separator
"," CharacterSet Default DecimalSep "." Thousandsep "," Columns
True Timing PopYesCreateDefault AutoSummary True SetCurrent True
ServerSource False Speed False Presummarized False
```

This example changes the source file for the data source All Staff Count (Excel) to bigstaff.asc, and changes the file format to ASCII.

```
DataSourceUpdate "All Staff Count (Excel)"
Source "c:installation_directory\bigstaff.asc"
SourceType FlatFile_ColNames
```

---

## DeletionListUpdate

The DeletionListUpdate verb updates the list of objects to be removed from the model.

The user interface equivalent in Cognos Transformer is to delete objects from the model by means of an incremental update.

Do not change this syntax in generated MDL, because this action could cause unexpected results in your model.

The syntax is as follows:

**DeletionListUpdate** *deletionsopts***Endlist**

| Argument                                       | Description                                                                                                                                                                                                                               |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DeletionListUpdate</b> <i>deletionsopts</i> | Deletes an object from the model by referring to its type and object identifier. <i>deletionsopts</i> are required parameters that describe the object to be deleted.<br><br>For the complete list of options, see <i>deletionsopts</i> . |

## Example

This example deletes the category with object identifier 1001.

```
DeletionListUpdate Category 1001 Endlist
```

---

## DimAdd

The DimAdd verb creates a dimension in the model.

The user interface equivalent is to select the **Insert** command on the **Edit** menu when a dimension is selected.

For more information about creating dimensions, see “DimMake” on page 119.

The syntax is as follows:

**DimAdd** *objDim* [*dimopts*] **Associations** *asscopts*

| Argument                            | Description                                                                                                                                                                       |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimAdd</b> <i>objDim</i>         | Creates the dimension <i>objDim</i> . <i>objDim</i> must be the object name and can include the object identifier.                                                                |
| <i>dimopts</i>                      | Optional parameters that describe the dimension in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <i>dimopts</i> . |
| <b>Associations</b> <i>asscopts</i> | Parameters that specify associations for the dimension. For the complete list of options, see “ <i>asscopts</i> ” on page 167.                                                    |

## Example

This example creates the Years dimension.

```
DimAdd 231 "Years" DimType Date EarliestDate 19000101 LatestDate 99991231  
ManualPeriods False DaysInWeek 127 NewCatsLock False ExcludeAutoPartitioning False  
Associations 1249 "Time Category Code" AssociationType Type_Query  
AssociationRole Role_Source AssociationReferenced "Time Category Code"
```

---

## DimCalcDefAdd

The DimCalcDefAdd verb creates a dimension calculation definition in the model.

The user interface equivalent is the **Add** command on the **Calculation** tab of the **Dimension** property sheet.

For more information about creating dimension calculation definitions, see “DimCalcDefMake” on page 116.

The syntax is as follows:

```
DimCalcDefAdd objDimCalcDef Dimension objDim [Calc expropts] [
GroupCalculateCategory {True|False}] [Set stringStartList objCats EndList]
```

| Argument                                                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimCalcDefAdd</b> <i>objDimCalcDef</i>                | Creates the dimension calculation definition <i>objDimCalcDef</i> . <i>objDimCalcDef</i> must be the object name and can also be the object identifier.                                                                                                                                                                                                                                                                                                                                                    |
| <b>Dimension</b> <i>objDim</i>                           | Specifies the dimension where the calculated category is to be located. <i>objDim</i> can be the object name, object identifier, or both.                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Calc</b> <i>expropts</i>                              | Specifies the calculation. <i>expropts</i> are a mixture of calculation keywords and objects. The calculation keywords that can be used are Average, Max, and Min, as well as the Cognos Transformer-specific functions Change, Percent-Growth and Share. The objects are specified as object name followed by an at sign (@), the object type, and, optionally, an at sign (@) and the object identifier. The object type can be Category, Level, or Drill. For example, "Go Water Bottle@Category@4805". |
| <b>GroupCalculateCategory</b> {True   False}             | Is an option specifying that calculated categories be grouped together in the dimension viewer. The equivalent in the user interface is the <b>Group Calculated Categories Together</b> check box, which displays in the <b>Category Calculation Definition</b> dialog box when you create a category definition. The default is False.                                                                                                                                                                    |
| <b>Set</b> <i>string</i> <b>StartList</b> <i>objCats</i> | Creates one or more sets and specifies the categories in each set. <i>string</i> is the set name, such as Set 1, Set 2, and so on. <i>objCats</i> can be the object name or the object identifier. This argument is repeated for each set; for example<br><br>Set "Set 1" StartList 4795 4797 EndList Set "Set 2" StartList 4799 EndList                                                                                                                                                                   |

## Example

This example adds a share calculation in the Productions dimension. The statement creates two objects: the dimension calculation definition and an associated category.

```
DimCalcDefAdd 'share ("Set 1", "GO Sport Line")' Dimension 2947 Calc share
("Set 1@Set", "GO Sport Line@Category@4789")
Set "Set 1" StartList 4793 4797 4801 4803 EndList
```

---

## DimCalcDefDelete

The DimCalcDefDelete verb removes a dimension calculation definition from the model.

The user interface equivalent is the **Remove** command on the **Calculation** tab of the **Dimension** property sheet.

The syntax is as follows:

**DimCalcDefDelete** *objDimCalcDef* [**Dimension** *objDim*]

| Argument                                     | Description                                                                                                                                  |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimCalcDefDelete</b> <i>objDimCalcDef</i> | Deletes the dimension calculation definition <i>objDimCalcDef</i> . <i>objDimCalcDef</i> can be the object name, object identifier, or both. |
| <b>Dimension</b> <i>objDim</i>               | Is specified, if necessary, to uniquely identify <i>objDimCalcDef</i> . <i>objDim</i> can be the object name, object identifier, or both.    |

### Example

This example deletes the dimension calculation definition that uses object identifier 27195.

DimCalcDefDelete 27195

---

## DimCalcDefMake

The DimCalcDefMake verb creates or updates a dimension calculation definition in the model.

The user interface equivalents are the **Add** and **Modify** commands on the **Calculation** tab of the **Dimension** property sheet.

There are two parts to a dimension calculation definition in MDL: a DimCalcDefMake or DimCalcDefAdd statement defining the calculation, and a CatMake or CatAdd statement defining the category.

The link between the two is an option in the CatMake or CatAdd statement that references the DimCalcDefMake or DimCalcDefAdd statement. For more information, see “DimCalcDefAdd” on page 114.

Calculated categories are defined as regular categories, not special categories.

The syntax is as follows:

**DimCalcDefMake** *objDimCalcDef* [**Dimension** *objDim*] **GroupCalculateCategory** {True|False}][**Calc** *expropts*] [**Set** *string* **StartList** *objCats* **EndList**]



| Argument                                                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimCalcDefMake</b> <i>objDimCalcDef</i>                                | Creates the dimension calculation definition <i>objDimCalcDef</i> or modifies it if it exists. Include the object name if the definition does not exist.                                                                                                                                                                                                                                                                                                                                                   |
| <b>Dimension</b> <i>objDim</i>                                            | Is specified, if necessary, to uniquely identify <i>objDimCalcDef</i> . <i>objDim</i> can be the object name, object identifier, or both.                                                                                                                                                                                                                                                                                                                                                                  |
| <b>GroupCalculateCategory</b> {True False}                                | Specifies that calculated categories be grouped together in the dimension viewer. The equivalent in the user interface is the <b>Group Calculated Categories Together</b> check box, which displays in the <b>Category Calculation Definition</b> dialog box when you create a category definition. The default is False.                                                                                                                                                                                  |
| <b>Calc</b> <i>expropts</i>                                               | Specifies the calculation. <i>expropts</i> are a mixture of calculation keywords and objects. The calculation keywords that can be used are Average, Max, and Min, as well as the Cognos Transformer-specific functions Change, Percent-Growth and Share. The objects are specified as object name followed by an at sign (@), the object type, and, optionally, an at sign (@) and the object identifier. The object type can be Category, Level, or Drill. For example, "Go Water Bottle@Category@4805". |
| <b>Set</b> <i>s string</i> <b>StartList</b> <i>objCats</i> <b>Endlist</b> | Creates one or more sets and specifies the categories in each set. <i>string</i> is the set name, such as Set 1, Set 2, and so on. <i>objCats</i> can be the object name or the object identifier. This argument is repeated for each set; for example<br><br>Set "Set 1" StartList 4795 4797 EndList<br>Set "Set 2" StartList 4799 EndList                                                                                                                                                                |

## Example

This example defines the dimension calculation Share ("Set 1", "GO Sport Line").

```
DimCalcDefMake 27195 'share("Set 1", "GO Sport Line")' Dimension 2947
GroupCalculateCategory True Calc share ("Set 1@Set", "GO Sport
Line@Category@4789") Set "Set 1" StartList 4793 4797 4801 4803 EndList
```

## DimCalcDefUpdate

The DimCalcDefUpdate verb modifies a dimension calculation definition in the model.

The user interface equivalent is the **Modify** command on the **Calculation** tab of the **Dimension** property sheet.

For more information about updating dimension calculation definitions, see “DimCalcDefMake” on page 116.

The syntax is as follows:

```
DimCalcDefUpdate objDimCalcDef [Dimension objDim]
[GroupCalculateCategory {True|False}][ Calc expropts][ Set string
StartList objCats EndList]
```

| Argument                                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimCalcDefUpdate</b> <i>objDimCalcDef</i>                            | Modifies the dimension calculation definition <i>objDimCalcDef</i> . <i>objDimCalcDef</i> can be the object name, object identifier, or both.                                                                                                                                                                                                                                                                                                                                                            |
| <b>Dimension</b> <i>objDim</i>                                          | Is specified, if necessary, to uniquely identify <i>objDimCalcDef</i> . <i>objDim</i> can be the object name, object identifier, or both.                                                                                                                                                                                                                                                                                                                                                                |
| <b>GroupCalculateCategory</b> {True False}                              | Is an option specifying that calculated categories be grouped together in the dimension viewer. The equivalent in the user interface is the <b>Group Calculated Categories Together</b> check box, which displays in the <b>Category Calculation Definition</b> dialog box when you create a category definition. The default is False.                                                                                                                                                                  |
| <b>Calc</b> <i>expropts</i>                                             | Specifies the calculation. <i>expropts</i> are mixture of calculation keywords and objects. The calculation keywords that can be used are Average, Max, and Min, as well as the Cognos Transformer-specific functions Change, Percent-Growth and Share. The objects are specified as object name followed by an at sign (@), the object type, and, optionally, an at sign (@) and the object identifier. The object type can be Category, Level, or Drill. For example, "Go Water Bottle@Category@4805". |
| <b>Set</b> <i>string</i> <b>StartList</b> <i>objCats</i> <b>EndList</b> | Creates one or more sets and specifies the categories in each set. <i>string</i> is the set name, such as Set 1, Set 2, and so on. <i>objCats</i> can be the object name or the object identifier. This argument is repeated for each set; for example<br><br>Set "Set 1" StartList 4795 4797 EndList<br>Set "Set 2" StartList 4799 EndList                                                                                                                                                              |

## Example

This example modifies dimension calculation Share ("Set 1", "GO Sport Line") by adding the category with object identifier 4789 into Set 1.

```
DimCalcDefUpdate 27195 'share("Set 1", "GO Sport Line")' Dimension 2947 Calc
share("Set 1@Set", "GO Sport Line@Category@4789")
Set "Set 1" StartList 4793 4795 4797 4801 4803 EndList
```

---

## DimDelete

The DimDelete verb removes a dimension from the model.

The user interface equivalent is to click **Delete** on the **Edit** menu when a dimension is selected.

The syntax is as follows:

**DimDelete** *objDim*

| Argument                       | Description                                                                                             |
|--------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>DimDelete</b> <i>objDim</i> | Deletes the dimension <i>objDim</i> . <i>objDim</i> can be the object name, object identifier, or both. |

### Example

This example deletes the dimension Products.

```
DimDelete "Products"
```

---

## DimensionListUpdate

The DimensionListUpdate verb reorders the list of dimensions in the model.

The user interface equivalent is to drag and drop dimensions into the required positions.

The syntax is as follows:

**DimensionListUpdate** *objDims* **EndList**

| Argument                                  | Description                                                                                                                                                                                           |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimensionListUpdate</b> <i>objDims</i> | Specifies the dimensions in the desired order. If not all dimensions are specified, the specified ones move to the top of the list. The list of dimensions can be object names or object identifiers. |

### Example

This example reorders the list so that Products and Years display as the first two dimensions.

```
DimensionListUpdate "Products" "Years" EndList
```

---

## DimMake

The DimMake verb creates a dimension or updates an existing one.

The user interface equivalent, if the dimension exists, is to modify the **Dimension** property sheet. For a new dimension, select the **Insert** option on the **Edit** menu when a dimension is selected.

Dimensions require a root category, a drill category and two default dimension views. These are created automatically when a dimension is added on the user interface, but they are only created in MDL if you use the verb `ModelEnsureCompleteness`.

The syntax is as follows:

**DimMake** *objDim* [*dimopts*] **Associations** *assocopts*

| Argument                             | Description                                                                                                                                                                                                                                                                                    |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimMake</b> <i>objDim</i>         | Creates the dimension <i>objDim</i> or modifies it if it exists. <i>objDim</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                                     |
| <i>dimopts</i>                       | Optional parameters that describe the dimension in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <code>dimopts</code> . If the dimension exists, previously set options are retained unless you change them with this command. |
| <b>Associations</b> <i>assocopts</i> | Parameters that specify associations for the dimension. For the complete list of options, see “ <code>assocopts</code> ” on page 167.                                                                                                                                                          |

## Example

This example defines the dimension Products.

```
DimMake "Products" DimType Regular NewCatsLock False DimInfo "Products
carried by Great Outdoors Company"
```

---

## DimUpdate

The `DimUpdate` verb updates an existing dimension.

The user interface equivalent is to modify the **Dimension** property sheet.

For more information about updating dimensions, see “`DimMake`” on page 119.

The syntax is as follows:

**DimUpdate** *objDim* [*dimopts*] [**Associations***assocopts*]

| Argument                       | Description                                                                                                                                                                                                   |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DimUpdate</b> <i>objDim</i> | Specifies the dimension to update. <i>objDim</i> can be the object name, object identifier, or both.                                                                                                          |
| <i>dimopts</i>                 | Optional parameters that describe the dimension in greater detail. For the complete list of options, see <code>dimopts</code> . Previously set options are retained unless you change them with this command. |

| Argument                             | Description                                                                                                                     |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Associations</b> <i>assocopts</i> | Optional parameters that specify associations for the dimension. For the complete list of options, see “assocopts” on page 167. |

## Example

This example changes the earliest and latest dates allowed in the Years dimension.  
DimUpdate "Years" EarliestDate 19900101 LatestDate 20100101

## DrillCatMake

The DrillCatMake verb creates or updates a drill category.

## Example

The user interface equivalent is to modify the **Drill Category** property sheet. Drill categories are created automatically when you build models on the user interface.

The syntax is as follows:

**DrillCatMake** *objDrillCat* [**Dimension** *objDim*]  
[**Root** *objRootCat*] [**JoiningLevel** *objLevel*] [*catopts*]

| Argument                               | Description                                                                                                                                                                                                                                                                                  |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DrillCatMake</b> <i>objDrillCat</i> | Creates the drill category <i>objDrillCat</i> or changes it if it exists. <i>objDrillCat</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                     |
| <b>Dimension</b> <i>objDim</i>         | When creating a drill category, this specifies its dimension. When updating a drill category this is used, if necessary, to uniquely identify it. <i>objDim</i> can be the object name, object identifier, or both.                                                                          |
| <b>Root</b> <i>objRootCat</i>          | When creating a drill category, this specifies its root category. <i>objRootCat</i> can be the object name, object identifier, or both.                                                                                                                                                      |
| <b>JoiningLevel</b> <i>objLevel</i>    | When creating a drill category, this specifies the convergence level. <i>objLevel</i> can be the object name or object identifier.                                                                                                                                                           |
| <i>catopts</i>                         | Optional parameters that describe the category in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “catopts” on page 168. If the category exists, previously set options are retained unless you change them with this command. |

This example defines the drill category By Product Line.

DrillCatMake "By Product Line" Dimension "Products" Root "Product Line"  
Inclusion Suppress Filtered False Suppressed True PrimaryDrill True  
YearBegins 19960101 PartialWeek Split ExtraWeek None WeekBegins Sunday

---

## EventEnd

The EventEnd verb signals the end of an update event that was started by the EventStart verb. The status of the PowerCubes involved in the event reverts to Free. There is no user interface equivalent for this verb.

In IBM Cognos, you do not specify a client/server platform type.

The syntax is as follows:

**EventEnd**

### Example

This example ends the current update event.

EventEnd

---

## EventStart

The EventStart verb signals the start of an update event. The status of the PowerCubes involved in the event is changed from Free to UpdateInProgress, and the event name is written to a log file. There is no user interface equivalent for this verb.

The log file is a file that is created whenever you run a Cognos Transformer model. It has the same root name as the Cognos Transformer model but with a .log extension.

In IBM Cognos, you do not specify a client/server platform type.

The syntax is as follows:

**EventStart** [*EventName*]

| Argument         | Description                                                                                |
|------------------|--------------------------------------------------------------------------------------------|
| <i>EventName</i> | The event name can be up to 256 characters in length. It cannot contain a carriage return. |

### Example

This example starts the Batch Update event.

EventStart "Batch Update"

---

## FilterCat

The FilterCat verb excludes (or filters out) a category from the specified dimension view. The user interface equivalent is the **Exclude** option on the **Diagram** menu.

Using FilterCat on an already-excluded category removes the filter.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

**FilterCat** *objView* [**Dimension** *objDim*] **Category** *objCat*

| Argument                        | Description                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FilterCat</b> <i>objView</i> | Specifies the dimension view containing the category to be excluded or filtered out. <i>objView</i> can be the object name, object identifier, or both. |
| <b>Dimension</b> <i>objDim</i>  | Is specified, if necessary, to uniquely identify the view. <i>objDim</i> can be the object name, object identifier, or both.                            |
| <b>Category</b> <i>objCat</i>   | Specifies the category to be excluded or filtered out. <i>objCat</i> can be the object name, object identifier, or both.                                |

## Example

This example excludes the Outdoor Products category for the dimension view View1.

FilterCat "View1" Dimension "Products" Category "Outdoor Products"

---

## LevelAdd

The LevelAdd verb creates a new level in the specified model dimension.

The user interface equivalent is to select the **Insert** option on the **Edit** menu when a level is selected.

For more information about creating levels, see “LevelMake” on page 125.

The syntax is as follows:

**LevelAdd** *objLevel* [**Dimension** *objDim*] [**Drill** *objDrillCat*]  
[**Parent** *objLevel*] [*levelopts*] [**DrillList** *objDrillCats*  
**EndList**] **Associations** *assocopts*

| Argument                        | Description                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>LevelAdd</b> <i>objLevel</i> | Creates the level <i>objLevel</i> . <i>objLevel</i> must be the object name and can include the object identifier. |
| <b>Dimension</b> <i>objDim</i>  | Specifies a dimension for the level. <i>objDim</i> can be the object name, object identifier, or both.             |
| <b>Drill</b> <i>objDrillCat</i> | Specifies a drill category for the level. <i>objDrillCat</i> can be the object name, object identifier, or both.   |
| <b>Parent</b> <i>objLevel</i>   | Specifies a parent for the level. <i>objLevel</i> can be the object name, or object identifier.                    |

| Argument                             | Description                                                                                                                                                                     |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>levelopts</i>                     | Optional parameters that describe the level in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <i>levelopts</i> . |
| <b>DrillList</b> <i>objDrillCats</i> | Specifies the multiple drill categories <i>objDrillCats</i> . <i>objDrillCats</i> is one or more drill categories, each identified by object name or object identifier.         |
| <b>Associations</b> <i>assocopts</i> | Parameters that specify associations for the level. For the complete list of options, see “ <i>assocopts</i> ” on page 167.                                                     |

## Example

This example creates the level Year.

```
LevelAdd 237 "Year" Blanks "(blank)" Inclusion Generate DateFunction Year
Generate Need RefreshLabel False RefreshDescription False
RefreshShortName False NewCatsLock False CatLabFormat "YYYY" Timerank 10
UniqueCategories True UniqueMove False Associations 1251 "Time"
AssociationType Type_Query AssociationRole Role_Source A
ssociationReferenced "Time" Associations 1253 "Time" AssociationContext 235
AssociationType Type_Query AssociationRole Role_OrderBy
AssociationReferenced "Time" SortOrder Default SortAs Ascending
```

## LevelDelete

The **LevelDelete** verb removes a level from the specified model dimension.

The user interface equivalent is to click **Delete** on the **Edit** menu when a level is selected.

The syntax is as follows:

**LevelDelete** *objLevel* [**Dimension** *objDim*] [**Drill** *objDrill*]

| Argument                           | Description                                                                                                                   |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>LevelDelete</b> <i>objLevel</i> | Deletes the level <i>objLevel</i> . <i>objLevel</i> can be the object name, object identifier, or both.                       |
| <b>Dimension</b> <i>objDim</i>     | Is specified, if necessary, to uniquely identify the level. <i>objDim</i> can be the object name, object identifier, or both. |
| <b>Drill</b> <i>objDrillCat</i>    | Is specified, if necessary, to uniquely identify the level. <i>objDrillCat</i> can be the object name or object identifier.   |

## Example

This example deletes the level Product Line.

```
LevelDelete "Product Line" Dimension "Products" Drill "By Product Line"
```



---

## LevelMake

The LevelMake verb creates a level or updates an existing one.

The user interface equivalent, if the level exists, is to modify the **Level** property sheet. For a new level, select the **Insert** option on the **Edit** menu when a level is selected.

Level names cannot contain an at sign (@).

The syntax is as follows:

```
LevelMake objLevel [Dimension objDim] [Drill objDrillCat]  
[Parent objLevel] [levelopts] [DrillList objDrillCats  
EndList] Associations assocopts
```

| Argument                             | Description                                                                                                                                                                                                                                                                           |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LevelMake</b> <i>objLevel</i>     | Creates the level <i>objLevel</i> or modifies it if it exists. <i>objLevel</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                            |
| <b>Dimension</b> <i>objDim</i>       | When creating a level, this specifies its dimension. When updating a level this is used, if necessary, to uniquely identify it. <i>objDim</i> can be the object name or object identifier.                                                                                            |
| <b>Drill</b> <i>objDrillCat</i>      | When creating a level, this specifies its drill category. When updating a level this is used, if necessary, to uniquely identify it. <i>objDrillCat</i> can be the object name, object identifier, or both.                                                                           |
| <b>Parent</b> <i>objLevel</i>        | When creating a level, this specifies its parent. When updating a level this is used, if necessary, to uniquely identify it. <i>objLevel</i> can be the object name or object identifier.                                                                                             |
| <i>levelopts</i>                     | Optional parameters that describe the level in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <i>levelopts</i> . If the category exists, previously set options are retained unless you change them with this command. |
| <b>DrillList</b> <i>objDrillCats</i> | Specifies the multiple drill categories <i>objDrillCats</i> . <i>objDrillCats</i> is one or more drill categories, each identified by object name or object identifier.                                                                                                               |
| <b>Associations</b> <i>assocopts</i> | Parameters that specify associations for the level. For the complete list of options, see “ <i>assocopts</i> ” on page 167.                                                                                                                                                           |

## Example

This example defines the level Year.

```
LevelMake 237 "Year" Blanks "(blank)" Inclusion Generate DateFunction Year  
Generate Need RefreshLabel False RefreshDescription False RefreshShortName  
False NewCatsLock False CatLabFormat "YYYY" Timerank 10 UniqueCategories True  
UniqueMove False Associations 1251 "Time" AssociationType Type_Query
```

```

AssociationRole Role_Source AssociationReferenced "Time Associations
1253 "Time" AssociationContext 235 AssociationType Type_Query
AssociationRole Role_OrderBy AssociationReferenced "Time" SortOrder Default
SortAs Ascending

```

---

## LevelMoveAfter

The LevelMoveAfter verb switches the positions of two levels.

The user interface equivalent is to drag and drop the level into the required position.

Using this verb does not change the object identifier for the level or its position in the .mdl file. It only affects the visual display of the level on the user interface and its position in the .mdc file, which affects how it is viewed in the reporting components.

The syntax is as follows:

**LevelMoveAfter** *objLevel* [**Dimension** *objDim*] [**Drill** *objDrill*] **Child** *objLevel*

| Argument                              | Description                                                                                                                        |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>LevelMoveAfter</b> <i>objLevel</i> | Specifies the level that is to be placed after. <i>objLevel</i> can be the object name, object identifier, or both.                |
| <b>Dimension</b> <i>objDim</i>        | Is specified, if necessary, to uniquely identify the level. <i>objDim</i> can be the object name, object identifier, or both.      |
| <b>Drill</b> <i>objDrillCat</i>       | Is specified, if necessary, to uniquely identify the level. <i>objDrillCat</i> can be the object name, object identifier, or both. |
| <b>Child</b> <i>objLevel</i>          | Specifies the level that is to be placed before. <i>objLevel</i> can be the object name or object identifier.                      |

### Example

This example moves the level Product Type after the level Product ID.

```
LevelMoveAfter "Product Type" Drill "By Product Line" Child "Product ID"
```

---

## LevelMoveBefore

The LevelMoveBefore verb switches the positions of two levels.

The user interface equivalent is to drag the level into the required position.

Using this verb does not change the object identifier for the level or its position in the .mdl file. It only affects the visual display of the level on the user interface and its position in the .mdc file, which affects how it is viewed in the reporting components.

The syntax is as follows:

**LevelMoveBefore** *objLevel* [**Dimension** *objDim*] [**Drill** *objDrill*]  
**Child** *objLevel*

| Argument                               | Description                                                                                                                          |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>LevelMoveBefore</b> <i>objLevel</i> | Specifies the level that is to be placed before. <i>objLevel</i> can be the object name, object identifier, or both.                 |
| <b>Dimension</b> <i>objDim</i>         | Is specified, if necessary, to uniquely identify the level. <i>objDim</i> can be the object name, object identifier, or both.        |
| <b>Drill</b> <i>objDrillCat</i>        | Is specified, if necessary, to uniquely identify the level. <i>objDrillCat</i> can be the object name, object identifier, or both.   |
| <b>Child</b> <i>objLevel</i>           | Specifies the level that is to be placed after. <i>objLevel</i> can be the object name or object identifier. The child is mandatory. |

## Example

This example moves the level Product Line before the level Product ID.

LevelMoveBefore "Product Line" Drill "By Product Line" Child "Product ID"

---

## LevelNewDrill

The LevelNewDrill verb creates a new drill path in a level.

The user interface equivalent is to drag levels and columns to form the new path.

The syntax is as follows:

**LevelNewDrill** *objLevel* [**Dimension** *objDim*] **Drill** *objDrillCat* **Drill** *objDrillCat* **Child** *objLevel*

| Argument                             | Description                                                                                                                   |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>LevelNewDrill</b> <i>objLevel</i> | Specifies the level that is to have a new drill path. <i>objLevel</i> can be the object name, object identifier, or both.     |
| <b>Dimension</b> <i>objDim</i>       | Is specified, if necessary, to uniquely identify the level. <i>objDim</i> can be the object name, object identifier, or both. |
| <b>Drill</b> <i>objDrillCat</i>      | Specifies the old drill category. <i>objDrillCat</i> can be the object name, object identifier, or both.                      |
| <b>Drill</b> <i>objDrillCat</i>      | Specifies the new drill category. <i>objDrillCat</i> can be the object name, object identifier, or both.                      |
| <b>Child</b> <i>objLevel</i>         | Specifies the joining level. <i>objLevel</i> can be the object name or object identifier.                                     |

## Example

This example adds a new drill path Territory in the level State with a joining level of City.

## LevelUpdate

The LevelUpdate verb updates an existing level.

The user interface equivalent is to modify the **Level** property sheet.

For more information about updating levels, see “LevelMake” on page 125.

The syntax is as follows:

**LevelUpdate** *objLevel* [**Dimension** *objDim*] [**Drill** *objDrillCat*]  
 [*levelopts*] [**DrillList** *objDrillCats* **EndList**]  
 [**Associations** *assocopts*]

| Argument                             | Description                                                                                                                                                                                   |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LevelUpdate</b> <i>objLevel</i>   | Specifies the level to update. <i>objLevel</i> can be the object name, object identifier, or both.                                                                                            |
| <b>Dimension</b> <i>objDim</i>       | Is specified, if necessary, to uniquely identify the level. <i>objDim</i> can be the object name, object identifier, or both.                                                                 |
| <b>Drill</b> <i>objDrillCat</i>      | Is specified, if necessary, to uniquely identify the level. <i>objDrillCat</i> can be the object name, object identifier, or both.                                                            |
| <i>levelopts</i>                     | Optional parameters that describe the level in greater detail. For the complete list of options, see levelopts. Previously set options are retained unless you change them with this command. |
| <b>DrillList</b> <i>objDrillCats</i> | Specifies the multiple drill categories <i>objDrillCats</i> . <i>objDrillCats</i> is one or more drill categories, each identified by object name or object identifier.                       |
| <b>Associations</b> <i>assocopts</i> | Optional parameters that specify associations for the level. For the complete list of options, see “assocopts” on page 167.                                                                   |

### Example

This example changes the inclusion property of level Product Type to Suppress. Because the object name does not uniquely identify the level, the dimension and drill category are specified.

```
LevelUpdate "Product Type" Dimension "Products" Drill "By Product Line"
Inclusion Suppress
```

## MDCClear

The MDCClear verb clears the processing status for the specified PowerCube. The default status is New.

There is no user interface equivalent, although the effects can be verified on the **Processing** tab of the **PowerCube** property sheet.

The syntax is as follows:

**MDCClear** *objCube*

| Argument                       | Description                                                                                                                          |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>MDCClear</b> <i>objCube</i> | Specifies the PowerCube that is to have its status flags cleared. <i>objCube</i> can be the object name, object identifier, or both. |

## Example

This example changes the status for the Great Outdoors Sales PowerCube from OK to New.

MDCClear "Great Outdoors Sales"

---

## MeasureAdd

The MeasureAdd verb adds a measure to the model. If the measure object already exists, an error message is issued.

The user interface equivalent is to click the **Insert** option on the **Edit** menu when a measure is selected.

Every measure requires an AllocationAdd statement that contains the measure name and the option TypeDefault.

Cognos Transformer creates this statement automatically when a measure is added in the user interface or when you use the verb ModelEnsureCompleteness. Otherwise, you must create the statement. For more information, see “AllocationAdd” on page 63.

For more information about creating measures, see “MeasureMake” on page 130.

The syntax is as follows:

**MeasureAdd** *objMeasure* [*meaopts***Associations**] *assocopts*

| Argument                             | Description                                                                                                                                                             |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MeasureAdd</b> <i>objMeasure</i>  | Creates the measure <i>objMeasure</i> . <i>objMeasure</i> must be the object name and can include the object identifier.                                                |
| <i>meaopts</i>                       | Optional parameters that describe the measure in greater detail. Some options are set by default if you do not set them. For the complete list of options, see meaopts. |
| <b>Associations</b> <i>assocopts</i> | Parameters that specify associations for the measure. For the complete list of options, see “assocopts” on page 167.                                                    |

## Example

This example adds the Staff Count measure from the Staff Count column.

MeasureAdd 863 "Staff Count" Missing N/A TimeStateRollup Average StorageFloat64  
OutPutScale 0 Decimals 0 ReverseSign False IsCurrency False WeightId 899  
DrillThrough False EndList Associations 1309 "Staff Count" AssociationType  
Type\_Query AssociationRole Role\_Source AssociationReferenced "Staff Count"

---

## MeasureDelete

The MeasureDelete verb removes a measure from the model.

The user interface equivalent is to click **Delete** on the **Edit** menu when a measure is selected.

The syntax is as follows:

**MeasureDelete** *objMeasure*

| Argument                               | Description                                                                                                    |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>MeasureDelete</b> <i>objMeasure</i> | Deletes the category <i>objMeasure</i> . <i>objMeasure</i> can be the object name, object identifier, or both. |

### Example

This example deletes the measure Profit Margin %.

MeasureDelete "Profit Margin %"

---

## MeasureListUpdate

The MeasureListUpdate verb reorders the items in the list of measures.

The user interface equivalent is to drag the measures into the required order.

The syntax is as follows:

**MeasureListUpdate** *objMeasures* **EndList**

| Argument                                    | Description                                                                                                                                                                                            |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MeasureListUpdate</b> <i>objMeasures</i> | Lists the measures in the desired order. If not all measures in the model are listed, those listed are moved to the top of the list. <i>objMeasures</i> can be the object names or object identifiers. |

### Example

This example changes the order of the list of measures, placing Product Cost and then Revenue at the top.

MeasureListUpdate "Product Cost" "Revenue" EndList

---

## MeasureMake

The MeasureMake verb creates a measure or updates an existing one.

The user interface equivalent, if the measure exists, is to modify the **Measure** property sheet. For a new measure, click the **Insert** option on the **Edit** menu when a measure is selected.

Every measure requires an `AllocationAdd` statement that contains the measure name and the option `Type Default`. Cognos Transformer creates this statement automatically when a measure is added on the user interface or when you use the verb `ModelEnsureCompleteness`. Otherwise, you must create the statement. For more information, see “`AllocationAdd`” on page 63.

Measure names cannot contain an at sign (@).

The syntax is as follows:

**MeasureMake** *objMeasure* [*meaopts*] **Associations** *assocopts*

| Argument                             | Description                                                                                                                                                                                                                                                                           |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MeasureMake</b> <i>objMeasure</i> | Creates the measure <i>objMeasure</i> or modifies it if it exists. <i>objMeasure</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                      |
| <i>meaopts</i>                       | Optional parameters that describe the measure in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <i>meaopts</i> . If the category exists, previously set options are retained unless you change them with this command. |
| <b>Associations</b> <i>assocopts</i> | Parameters that specify associations for the measure. For the complete list of options, see “ <i>assocopts</i> ” on page 167.                                                                                                                                                         |

## Example

The following statements were generated when a sample model created on the user interface was saved as an .mdl file.

This example creates or updates the `StaffCount` measure.

```
MeasureMake 863 "Staff Count" Missing N/A TimeStateRollup Average
Storage Float64 OutPutScale 0 Decimals 0 ReverseSign False IsCurrency False
WeightId 899 DrillThrough False EndList Associations 1309 "Staff Count"
AssociationType Type_Query AssociationRole Role_Source
AssociationReferenced "Staff Count"
```

This example creates or updates the calculated measure `Profit Margin %`.

```
MeasureMake "Profit Margin %" Calc ("Revenue@259" - "Product Cost@261") /
"Revenue@259" Missing N/A Timing After_Rollup Storage Float64 Scale 0
Decimals 1 Sign False Format "0%~1" MeasureInfo "Percent profit"
DrillThrough False EndList
```

This example creates or updates a Revenue measure that allows drill-through to an IBM Cognos Impromptu report (dt\_cust.imr).

```
MeasureMake "Revenue" Association "Revenue" Storage Default Scale 0
Decimals 0 Sign False Format "#,##0~0"
MeasureInfo "Gross revenue from product sales."
DrillThrough True "c:\dt_cust.imr" "" EndList
```

---

## MeasureUpdate

The MeasureUpdate verb updates an existing measure.

The user interface equivalent is to modify the **Measure** property sheet.

For more information about updating measures, see “MeasureMake” on page 130.

The syntax is as follows:

**MeasureUpdate** *objMeasure* [*meaopts*] [**Associations** *assocopts*]

| Argument                               | Description                                                                                                                                                                                                           |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MeasureUpdate</b> <i>objMeasure</i> | Specifies the measure to update. <i>objMeasure</i> can be the object name, object identifier, or both.                                                                                                                |
| <i>meaopts</i>                         | Optional parameters that describe the measure in greater detail. For the complete list of options, see meaopts. If the category exists, previously set options are retained unless you change them with this command. |
| <b>Associations</b> <i>assocopts</i>   | Optional parameters that specify associations for the measure. For the complete list of options, see “assocopts” on page 167.                                                                                         |

### Example

This example changes the timing of the Profit Margin % measure.

```
MeasureUpdate "Profit Margin %" Timing Before_Rollup
```

---

## ModelEnsureCompleteness

The ModelEnsureCompleteness verb scans all dimensions and cubes in the model and creates necessary default settings and objects, including root categories, drill categories, and default dimension views.

There is no user interface equivalent. This is done automatically by the Cognos Transformer component.

Using ModelEnsureCompleteness avoids the need to create Dimension views and associate them with PowerCubes and security objects in the model. Include this verb near the end of your user-defined models, to ensure that each .mdl file is valid.

The syntax is as follows:

**ModelEnsureCompleteness**

---

## NewModel

The NewModel verb creates, names, describes, and opens a Cognos Transformer model.

The user interface equivalent is to click the **New** option on the **File** menu.



Cognos Transformer saves the model file in the My Documents/Transformer/Models directory, unless a server path is specified.

Running `NewModel` will close previously opened files without saving them. If you want to save a file, you must use the verb `SaveMDL` or `SavePY` before you use the `NewModel` verb.

The syntax is as follows:

**NewModel** *objModel* [*appqueryopts*]

| Argument                        | Description                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NewModel</b> <i>objModel</i> | Specifies the model that is to be opened. <i>objModel</i> must be the model name.                                                                                                  |
| <i>appqueryopts</i>             | Optional parameters that describe the model in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <i>appqueryopts</i> . |

## Example

This example creates a model called PowerPlay® Sample, and provides a description.

```
NewModel "PowerPlay Sample" AppInfo "This model used the tutorial."
```

---

## OpenDef

Opens .def, .gen, and .dat files.

The user interface equivalent is the **Open** dialog box, in editions of Cognos Transformer where you can select **PowerPlay definition files (\*.def & \*.gen)**.

Support for this format was retained to ensure compatibility with earlier versions.

The syntax is as follows:

**OpenDef** *filename*

| Argument                       | Description                                         |
|--------------------------------|-----------------------------------------------------|
| <b>OpenDef</b> <i>filename</i> | Specifies the file name, including path if desired. |

## Example

This example opens the "file.def" PowerPlay definition file.

```
OpenDef "file.def"
```

---

## OpenMDL

The `OpenMDL` verb opens the specified .mdl file. Execution of the remaining MDL script continues after the file is opened.

The user interface equivalent is the **Open** dialog box, where you can select **Model files (\*.py? and \*.mdl)**.

You can only open one model at a time. Any model that was open before the OpenMDL command is issued will be closed without being saved.

To save an open model, you must use the SaveMDL or SavePY command before using the OpenMDL command.

The syntax is as follows:

**OpenMDL** *filename*

| Argument                       | Description                                                                                                              |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>OpenMDL</b> <i>filename</i> | Specifies the file name, including path if desired, for the current model. The file name should have the extension .mdl. |

## Example

This example opens the model outdoors.mdl, located in the root directory of the c: drive.

```
OpenMDL "c:\outdoors.mdl"
```

---

## OpenPY

The OpenPY verb opens the specified .py? file. Execution of the remaining MDL script continues after the file is opened.

The question mark in the extension .py? is replaced by the character that is used in your release of Cognos Transformer, such as .pyj.

You can only open one model at a time. Any model that was open before the OpenPY command is issued will be closed without being saved.

To save an open model, you must use the SaveMDL or SavePY command before the OpenMPY command.

The user interface equivalent is the **Open** dialog box, where you can select **Model files (\*.py? and \*.mdl)**.

The syntax is as follows:

**OpenPY** *filename*

| Argument                      | Description                                                                                                                                                                          |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>OpenPY</b> <i>filename</i> | Specifies the file name, including path if desired, for the current model. The file name should have the extension .py?, where ? is dependent on your version of Cognos Transformer. |

## Example

This example opens Model.pyj in the root directory of the c: drive and saves it as an .mdl file.

```
OpenPY "C:\Model.pyj" SaveMDL "C:\Model.mdl"
```

---

## PopulateFromQueries

The PopulateFromQueries verb populates the model with only those categories found in the specified data sources.

The user interface equivalent is to right-click one or more data sources and, from the **Run** menu, click **Generate Categories**.

The syntax is as follows:

**PopulateFromQueries** *objQueries*

| Argument          | Description                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------|
| <i>objQueries</i> | Specifies one or more data sources to be used. <i>objQueries</i> can be the object identifiers or object names. |

## Example

This example populates the model using only the All Staff Count (Excel) data source.

```
PopulateFromQueries "All Staff Count (Excel)"
```

---

## PopulateModel

The PopulateModel verb populates the model with categories using all data sources in the model.

The user interface equivalent is the **Generate Categories** option on the **Run** menu.

In IBM Cognos software, you do not specify the platform type.

The syntax is as follows:

**PopulateModel**

---

## PowerCubeCustomViewListUpdate

The PowerCubeCustomViewListUpdate verb defines the list of custom views assigned to a cube.

The syntax is as follows:

**PowerCubeCustomViewListUpdate** **Cube** *PowerCube ID StartList*  
*PowerCube ID Endlist*

## Example

```
PowerCubeCustomViewListUpdate Cube 11535 StartList 11537 Endlist
```

---

## PowerCubeDelete

The PowerCubeDelete verb removes the specified PowerCube or cube group by deleting the PowerCube objects from the model. This verb does not affect existing .mdc files.

The user interface equivalent is to click **Delete** on the **Edit** menu when a PowerCube or cube group is selected.

The syntax is as follows:

**PowerCubeDelete** {*objCube* | *objCubeGroup*}

| Argument                                                        | Description                                                                                                                                                                  |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PowerCubeDelete</b> { <i>objCube</i>   <i>objCubeGroup</i> } | Deletes the PowerCube <i>objCube</i> or the PowerCube group <i>objCubeGroup</i> . <i>objCube</i> and <i>objCubeGroup</i> can be the object name, object identifier, or both. |

### Example

This example deletes the PowerCube **Great Outdoors Sales**.

```
PowerCubeDelete "Great Outdoors Sales"
```

---

## PowerCubeListUpdate

The PowerCubeListUpdate verb reorders the PowerCubes and cube groups listed in the model.

The user interface equivalent is to drag PowerCubes and cube groups into the required order.

The syntax is as follows:

**PowerCubeListUpdate** [*objCubes*] [*objCubeGroups*] **EndList**

| Argument             | Description                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>objCubes</i>      | Lists the PowerCubes in the desired order. If not all cubes are specified, those specified move to the top of the list. The cubes can be identified by object name or object identifier.         |
| <i>objCubeGroups</i> | Lists the cube groups in the desired order. If not all groups are specified, those specified move to the top of the list. The cube groups can be identified by object name or object identifier. |

### Example

This example changes the order of the Great Outdoors Sales and cubegroup1 cubes.

```
PowerCubeListUpdate "cubegroup1" "Great Outdoors Sales" EndList
```

---

## PromptAdd

The PromptAdd verb imports prompts defined in IBM Cognos package and report data sources.

**PromptAdd** *promptname DataSource datasource ID promptopts*

| Argument                | Description                                                                                                                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>prompt name</i>      | Specifies the name of the prompt.                                                                                                                                                                                |
| <i>data source name</i> | Specifies the name of the IBM Cognos package, report, or query data source.                                                                                                                                      |
| <i>promptopts</i>       | Specifies the prompt type and prompt value. Simple-value, multi-value, and range prompts are type "xsdString"; Member Unique Name (MUN) prompts, for SAP and DMR data sources only, are type "memberUniqueName". |

### Example

This example adds a prompt named Product Name 1 with type xsdString and value BugShield Natural for the package 574942~1.

```
PromptAdd "Product Name1" DataSource "574942~1" PromptType "xsdString"  
PromptValue "BugShield Natural"
```

---

## PromptDelete

The PromptDelete verb deletes prompts defined in Cognos Transformer model.

**PromptDelete** *promptname*

| Argument           | Description                       |
|--------------------|-----------------------------------|
| <i>prompt name</i> | Specifies the name of the prompt. |

### Example

This example deletes the Product Name1 prompt from the model.

```
PromptDelete "Product Name1"
```

---

## PromptMake

The PromptMake verb creates prompts that are defined in IBM Cognos package and report data sources.

**PromptMake** *promptname DataSource datasource ID promptopts*

| Argument                | Description                                                                 |
|-------------------------|-----------------------------------------------------------------------------|
| <i>prompt name</i>      | Specifies the name of the prompt.                                           |
| <i>data source name</i> | Specifies the name of the IBM Cognos package, report, or query data source. |

| Argument          | Description                                                                                                                                                                                                      |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>promptopts</i> | Specifies the prompt type and prompt value. Simple-value, multi-value, and range prompts are type "xsdString"; Member Unique Name (MUN) prompts, for SAP and DMR data sources only, are type "memberUniqueName". |

## Example

This example creates a prompt named Product Name 1 with type xsdString and value BugShield Natural for the package 574942~1.

```
PromptMake "Product Name1" DataSource "574942~1" PromptType
"xsdString" PromptValue "BugShield Natural"
```

---

## PromptUpdate

The PromptUpdate verb updates prompts in the Cognos Transformer model.

## Example

**PromptUpdate** *promptname* **DataSource** *datasource* **ID** *promptopts*

| Argument                | Description                                                                                                                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>prompt name</i>      | Specifies the name of the prompt.                                                                                                                                                                                |
| <i>data source name</i> | Specifies the name of the IBM Cognos package, report, or query data source.                                                                                                                                      |
| <i>promptopts</i>       | Specifies the prompt type and prompt value. Simple-value, multi-value, and range prompts are type "xsdString"; Member Unique Name (MUN) prompts, for SAP and DMR data sources only, are type "memberUniqueName". |

This example updates a prompt named Product Name 1 with type xsdString and value SmallShield Artificial for the package 574942~1.

```
PromptUpdate "Product Name1" DataSource "574942~1" PromptType
"xsdString" PromptValue "SmallShield Artificial"
```

---

## ReportPartitions

The ReportPartitions verb writes a partition status report to the log file for a specified PowerCube. There is no user interface equivalent.

The syntax is as follows:

**ReportPartitions** *objCube*

| Argument                               | Description                                                                                |
|----------------------------------------|--------------------------------------------------------------------------------------------|
| <b>ReportPartitions</b> <i>objCube</i> | Specifies the PowerCube that is to have a partition status report written to its log file. |

## Example

This example writes a partition report to the log file for the Great Outdoors Sales PowerCube.

```
ReportPartitions "Great Outdoors Sales"
```

---

## RootCatMake

The RootCatMake verb creates a root category or updates an existing one.

The user interface equivalent is to modify the **Root Category** property sheet. Root categories are created automatically when modeling on the user interface.

The syntax is as follows:

```
RootCatMake objRootCat [Dimension objDim] [catopts]
```

| Argument                             | Description                                                                                                                                                                                                                                                                                  |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RootCatMake</b> <i>objRootCat</i> | Creates the category <i>objRootCat</i> or changes it if it exists. <i>objRootCat</i> can be the object name, object identifier, or both. Include the object name if the category does not exist.                                                                                             |
| <b>Dimension</b> <i>objDim</i>       | Specifies the dimension of a new root category or, if necessary, uniquely identifies an existing root category. <i>objDim</i> can be the object name, object identifier, or both.                                                                                                            |
| <i>catopts</i>                       | Optional parameters that describe the category in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “catopts” on page 168. If the category exists, previously set options are retained unless you change them with this command. |

## Example

The example defines the root category Product Line.

```
RootCatMake "Product Line" Dimension "Products" Inclusion Generate Lastuse 19971202  
Filtered False Suppressed False Sign False IsKeyOrphanage False IsTruncated False  
Blanks False
```

---

## RootCatUpdate

The RootCatUpdate verb updates an existing root category.

The user interface equivalent is to modify the **Root Category** property sheet.

For more information about updating root categories, see “RootCatMake.”

The syntax is as follows:

```
RootCatUpdate objRootCat Dimension [objDim] [catopts]
```

| Argument                               | Description                                                                                                                                                                                                  |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RootCatUpdate</b> <i>objRootCat</i> | Specifies the root category to update. <i>objRootCat</i> can be the object name, object identifier, or both                                                                                                  |
| <b>Dimension</b> <i>objDim</i>         | Required. Is specified to uniquely identify the root category. <i>objDim</i> can be the object name, object identifier, or both.                                                                             |
| <i>catopts</i>                         | Optional parameters that describe the category in greater detail. For the complete list of options, see “catopts” on page 168. Previously set options are retained unless you change them with this command. |

## Example

This example adds the description "Products carried by the Great Outdoors Company" to the Products root category.

```
RootCatUpdate "Products" Dimension "Products"
Catinfo "Products carried by the Great Outdoors Company."
```

---

## SaveMDL

The SaveMDL verb saves the current model as an .mdl file.

The user interface equivalent is to save the model with an .mdl extension.

The syntax is as follows:

**SaveMDL** *filename*

| Argument                       | Description                                                                                                              |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>SaveMDL</b> <i>filename</i> | Specifies the file name, including path if desired, for the current model. The file name should have the extension .mdl. |

## Example

This example opens a .py? file and saves it as an .mdl file.

```
OpenPY "C:\model.pyj" SaveMDL "C:\model.mdl"
```

---

## SavePY

The SavePY verb saves the current model as a .py? file, where the ? is replaced by the character that is used in your release of Cognos Transformer.

The user interface equivalent is to save the model with a .py? extension.

The syntax is as follows:

**SavePY** *filename*



| Argument                      | Description                                                                                                                                                                                                       |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SavePY</b> <i>filename</i> | Specifies the file name, including path if desired, for the current model. The file name should have the extension .py?, where ? is replaced by the character that is used in your release of Cognos Transformer. |

## Example

This example saves the open model in .py format in the root directory of c: drive, and calls it model.pyj.

```
SavePY "C:\model.pyj"
```

---

## SecurityNamespaceAdd

The SecurityNamespaceAdd verb defines the IBM Cognos namespace from which the IBM Cognos security objects (groups, roles, users) are retrieved.

The user interface equivalent is to click **Assign Security** in the **Custom View** dialog box.

The syntax is as follows:

```
SecurityNameSpaceAdd "namespace" SecurityNamespaceCAMID 'CAMID(":")'
```

| Argument                                     | Description                                                                                                                                |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SecurityNameSpaceAdd</b> "namespace name" | Specifies the namespace from which to retrieve the IBM Cognos security objects. The namespace name is defined in IBM Cognos Configuration. |
| <b>SecurityNamespaceCAMID</b> 'CAMID(":")'   | Defines the search path for the CAMID, or security object ID.                                                                              |

## Example

This example adds the namespace "authors" to the membership in the model.

```
SecurityNameSpaceAdd "authors" SecurityNamespaceCAMID 'CAMID(":")'
```

---

## SecurityNamespaceDelete

The SecurityNamespaceDelete verb deletes the IBM Cognos namespace from the model.

The user interface equivalent is to click **Unassign Security** in the **Custom View** dialog box.

The syntax is as follows:

```
SecurityNameSpaceDelete "namespace name"
```

| Argument                                               | Description                                                                                                  |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>SecurityNameSpaceDelete</b> <i>"namespace name"</i> | Specifies the namespace to be deleted from the model. The namespace name is defined in Cognos Configuration. |

## Example

This example deletes the namespace "authors" from the membership in the model.  
SecurityNameSpaceDelete "authors"

---

## SecurityNamespaceMake

The SecurityNamespaceMake verb defines the Cognos namespace from which the IBM Cognos security objects (groups, roles, users) are retrieved.

The user interface equivalent is to click **Assign Security** in the **Custom View** dialog box.

The syntax is as follows:

**SecurityNameSpaceMake** *"namespace name"* **SecurityNamespaceCAMID** *'CAMID(":")'*

| Argument                                             | Description                                                                                                                                |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SecurityNameSpaceMake</b> <i>"namespace name"</i> | Specifies the namespace from which to retrieve the IBM Cognos security objects. The namespace name is defined in IBM Cognos Configuration. |
| <b>SecurityNamespaceCAMID</b> <i>'CAMID(":")'</i>    | Defines the search path for the CAMID, or security object ID.                                                                              |

## Example

This example adds the namespace "authors" to the membership in the model.  
SecurityNameSpaceMake "authors" SecurityNamespaceCAMID 'CAMID(":")'

---

## SecurityNamespaceUpdate

The SecurityNamespaceUpdate verb updates the namespace from which the IBM Cognos security objects (groups, roles, users) are retrieved.

The user interface equivalent is to modify the assigned security membership in the **Custom View** dialog box.

The syntax is as follows:

**SecurityNameSpaceUpdate** *"namespace name"* **SecurityNamespaceCAMID** *'CAMID(":")'*

| Argument                                               | Description                                                                                                                                |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SecurityNameSpaceUpdate</b> <i>"namespace name"</i> | Specifies the namespace from which to retrieve the IBM Cognos security objects. The namespace name is defined in IBM Cognos Configuration. |
| <b>SecurityNamespaceCAMID</b> <i>'CAMID(":" )'</i>     | Defines the search path for the CAMID, or security object ID.                                                                              |

## Example

This example updates the authors namespace.

```
SecurityNameSpaceUpdate "authors" SecurityNamespaceCAMID'CAMID(":" )'
```

## SecurityObjectAdd

The SecurityObjectAdd verb defines a security object to be imported into the model from the last defined namespace.

The syntax is as follows:

```
SecurityObjectAdd securityobjectIDsecurity object name SecurityNamespace namespace
SecurityObjectDisplayName securityobject name
SecurityObjectType SecurityType_Group|SecurityType_Role|SecurityType_User
CustomViewList custom viewlist
```

| Argument                                                                                   | Description                                                                                               |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>SecurityObjectAdd</b> <i>security object ID security object name</i>                    | Specifies the security object to be imported into the model from the last defined namespace.              |
| <b>SecurityNamespace</b> <i>namespace</i>                                                  | Specifies the namespace where the security object exists. References can be the ID or the namespace name. |
| <b>SecurityObjectDisplayName</b> <i>security object name</i>                               | Specifies the security object name that is displayed in the model.                                        |
| <b>SecurityObjectType</b><br><i>SecurityType_Group SecurityType_Role SecurityType_User</i> | Specifies the security object type. Type can be a group, role, or user.                                   |
| <b>CustomViewList</b> <i>custom view list</i>                                              | Specifies the custom views to which the security object is assigned.                                      |

## Example

The following example adds the security role "Authors"(ID 11531) from the namespace 11533 and assigns it to custom view 11529.

```
SecurityObjectAdd 11531 'CAMID (":Authors")' SecurityNamespace 11533
SecurityObjectDisplayName "Authors" SecurityObjectType SecurityType_Role
CustomViewList 11529 EndList
```

---

## SecurityObjectDelete

The SecurityObjectDelete verb removes a security object from the model.

The syntax is as follows:

**SecurityObjectDelete** *securityobjectID security object name*

| Argument                                                                             | Description                                                 |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------|
| <b>SecurityObjectDelete</b> <i>security object ID</i><br><i>security object name</i> | Specifies the security object to be removed from the model. |

### Example

The following example removes the security role "Authors"(ID 11531) from the model.

```
SecurityObjectDelete 11531 'CAMID (":Authors")'
```

---

## SecurityObjectMake

The SecurityObjectMake verb defines a security object to be imported into the model from the last defined namespace.

The syntax is as follows:

**SecurityObjectMake** *securityobjectIDsecurity object name* **SecurityNamespace** *namespace*  
**SecurityObjectDisplayName** *securityobject name*  
**SecurityObjectType** *SecurityType\_Group|SecurityType\_Role|SecurityType\_User*  
**CustomViewList** *custom viewlist*

| Argument                                                                                   | Description                                                                                               |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>SecurityObjectMake</b> <i>security object ID</i><br><i>security object name</i>         | Specifies the security object to be imported into the model from the last defined namespace.              |
| <b>SecurityNamespace</b> <i>namespace</i>                                                  | Specifies the namespace where the security object exists. References can be the ID or the namespace name. |
| <b>SecurityObjectDisplayName</b> <i>security object name</i>                               | Specifies the security object name that is displayed in the model.                                        |
| <b>SecurityObjectType</b><br><i>SecurityType_Group SecurityType_Role SecurityType_User</i> | Specifies the security object type. Type can be a group, role, or user.                                   |
| <b>CustomViewList</b> <i>custom view list</i>                                              | Specifies the custom views to which the security object is assigned.                                      |

### Example

The following example imports the security role "Authors"(ID 11531) from the namespace 11533 and assigns it to custom view 11529.

```
SecurityObjectMake 11531 'CAMID (":Authors")' SecurityNamespace 11533
SecurityObjectDisplayName "Authors" SecurityObjectType SecurityType_Role
CustomViewList 11529 EndList
```

---

## SecurityObjectUpdate

The SecurityObjectUpdate verb updates a security object in the model.

The syntax is as follows:

```
SecurityObjectUpdate securityobjectIDsecurity object name
SecurityNamespace namespace SecurityObjectDisplayName securityobject name
SecurityObjectType SecurityType_Group|SecurityType_Role|SecurityType_User
CustomViewList custom viewlist
```

| Argument                                                                                | Description                                                                                               |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>SecurityObjectUpdate</b> <i>security object ID</i><br><i>security object name</i>    | Specifies the security object in the model to be updated.                                                 |
| <b>SecurityNamespace</b> <i>namespace</i>                                               | Specifies the namespace where the security object exists. References can be the ID or the namespace name. |
| <b>SecurityObjectDisplayName</b> <i>security object name</i>                            | Specifies the security object name that is displayed in the model.                                        |
| <b>SecurityObjectType</b><br>SecurityType_Group SecurityType_Role <br>SecurityType_User | Specifies the security object type. Type can be a group, role, or user.                                   |
| <b>CustomViewList</b> <i>custom view list</i>                                           | Specifies the custom views to which the security object is assigned.                                      |

## Example

The following example updates the security role "Authors"(ID 11531) from the namespace 11533 by assigning it to an additional custom view 11539).

```
SecurityObjectUpdate 11531 'CAMID (":Authors")' SecurityNamespace 11533
SecurityObjectDisplayName "Authors" SecurityObjectType SecurityType_Role
CustomViewList 11529 11539 EndList
```

---

## SignonAdd

The SignonAdd verb is used to add IBM Cognos or data source signon objects in the Cognos Transformer model.

The user interface equivalent is to click the **Insert Signon** option on the **Edit** menu, and follow the prompts to specify the **Signon** properties.

There is no order requirement to the syntax for SignonAdd.

The syntax is as follows:

```
SignonAdd "signonname" UserId "user name"
password "password" AutoLogon {True|False}
SignonNamespace "namespace id" SignonType"Cognos"
```

The syntax for a data source signon is as follows:

```
SignonAdd "signonname" PromptForPassword {False|True} UserId
"user name" password "password" SignonType"DataSource"
```

| Argument                          | Description                                                                                                                                                                              |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SignonAdd</b> <i>objSignon</i> | Adds the signon <i>objSignon</i> . <i>objSignon</i> must be the object name, and can include the object identifier.                                                                      |
| <i>signonopts</i>                 | Optional parameters that describe the signon object in greater detail. Some options are set by default if you do not set them. For the complete list of options, see <i>signonopts</i> . |

## Example

This example creates two signons and two data source signons:

- LDAP1 is an IBM Cognos signon with AutoLogon enabled.
- LDAP2 is an IBM Cognos signon with AutoLogon disabled.
- DataSource1 is a data source signon that does not prompt the user to enter a password.
- DataSource2 is a data source signon that prompts the user to enter a password.

```
SignonAdd "LDAP1" UserId "user1" password "pwd1" AutoLogon True
SignonNamespace "LDAP" SignonType "Cognos"
SignonAdd "LDAP2" UserId "user2" password "pwd2" AutoLogon False
SignonNamespace "LDAP2" SignonType "Cognos"
SignonAdd "DataSource1" PromptForPassword False UserId "gosales"
password "gosales" SignonType "DataSource"
SignonAdd "DataSource2" PromptForPassword True UserId "gosales"
password "gosales" SignonType "DataSource"
```

---

## SignonDelete

The SignonDelete verb deletes an IBM Cognos or data source signon from the model.

The user interface equivalent is to click **Delete** on the **Edit** menu when an object in the **Signon List** is selected.

The syntax is as follows:

```
SignonDelete objSignon
```

| Argument                             | Description                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>SignonDelete</b> <i>objSignon</i> | Specifies the signon that is to be deleted.<br><i>objSignon</i> can be the object name, object identifier, or both. |

## Example

This example deletes the signon I40\_DBASE\_NTV\_PP74\_SAMPLE.

```
SignonDelete "I40_DBASE_NTV_PP74_SAMPLE"
```

---

## SignonMake

The SignonMake verb is used to create IBM Cognos or data source signon objects.

The user interface equivalent is to click the **Insert Signon** option on the **Edit** menu, and follow the prompts to specify the **Signon** properties.

There is no order requirement to the syntax for SignonMake.

The syntax is as follows:

```
SignonMake "signonname" UserId "user name" password "password"  
AutoLogon {True|False} SignonNamespace "namespace id" SignonType "Cognos"
```

The syntax for a data source signon is as follows:

```
SignonMake "signonname" PromptForPassword {False|True} UserId "user name"  
password "password" SignonType "DataSource"
```

| Argument                           | Description                                                                                                                                                                      |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SignonMake</b> <i>objSignon</i> | Creates the signon <i>objSignon</i> . <i>objSignon</i> must be the object name, and can include the object identifier.                                                           |
| <i>signonopts</i>                  | Optional parameters that describe the signon object in greater detail. Some options are set by default if you do not set them. For the complete list of options, see signonopts. |

### Example

This example creates two IBM Cognos signons and two data source signons:

- LDAP1 is a Cognos signon with **AutoLogon** enabled.
- LDAP2 is a Cognos signon with **AutoLogon** disabled.
- DataSource1 is a data source signon that does not prompt the user to enter a password.
- DataSource2 is a data source signon that prompts the user to enter a password.

```
SignonMake "LDAP1" UserId "user1" password "pwd1" AutoLogon True  
SignonNamespace "LDAP" SignonType "Cognos"  
SignonMake "LDAP2" UserId "user2" password "pwd2" AutoLogon False  
SignonNamespace "LDAP2" SignonType "Cognos"  
SignonMake "DataSource1" PromptForPassword False UserId "gosales"  
password "gosales" SignonType "DataSource"  
SignonMake "DataSource2" PromptForPassword True UserId "gosales"  
password "gosales" SignonType "DataSource"
```

---

## SignonUpdate

The SignonUpdate verb updates IBM Cognos or data source signon objects in the model.

The user interface equivalent is to modify the **Signon** property sheet.

The syntax for a Cognos signon is as follows:

```
SignonUpdate "signonname" UserId "user name" password "password"  
AutoLogon {True|False} SignonNamespace "namespace id" SignonType "Cognos"
```

The syntax for a data source signon is as follows:

```
SignonUpdate "signonname" PromptForPassword {False|True} UserId "username"  
password "password" SignonType"DataSource"
```

| Argument                                  | Description                                                                                                                                                                                                  |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SignonListUpdate</b> <i>objSignons</i> | Lists the signon objects in the desired order. If not all signons are specified, the specified ones are moved to the top of the list. <i>objSignons</i> can be the object names or object identifiers.       |
| <i>signonopts</i>                         | Optional parameters that describe the database connection in greater detail. For the complete list of options, see signonopts. Previously set options are retained unless you change them with this command. |

## Example

This example updates the LDAP3 IBM Cognos signon object.

```
SignonUpdate "LDAP3" UserId "user3" password "pwd4" AutoLogon False  
SignonNamespace "LDAP" SignonType "Cognos"
```

---

## SourceListUpdate

The SourceListUpdate verb reorders the items in the list of data sources for the model.

The user interface equivalent is to drag the data source objects into the required position in the list.

The syntax is as follows:

```
SourceListUpdate objDataSources EndList
```

| Argument                                      | Description                                                                                                                                                                                                      |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SourceListUpdate</b> <i>objDataSources</i> | Lists the data sources in the desired order. If not all data sources are specified, the specified ones are moved to the top of the list. The data sources can be identified by object name or object identifier. |

## Example

This example reorders the list of data sources so that Locations, Products, and Main are the first three in the list.

```
SourceListUpdate "Locations (CSV)" "Products (CSV)" "MAIN (IQD)" EndList
```

---

## SpecialCatAdd

The SpecialCatAdd verb creates a special category in the specified dimension.

The user interface equivalent is to open the **Diagram**, click the right side of a root or special category, and drag the connection to the right.



For more information about creating special categories, see “SpecialCatMake” on page 150.

The syntax is as follows:

**SpecialCatAdd** *objSpecialCat* [**Dimension** *objDim*] **Parent** *objCat* [*catopts*]

| Argument                                  | Description                                                                                                                                                                            |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SpecialCatAdd</b> <i>objSpecialCat</i> | Creates the special category <i>objSpecialCat</i> . <i>objSpecialCat</i> must be the object name and can include the object identifier.                                                |
| <b>Dimension</b> <i>objDim</i>            | Specifies a dimension <i>objDim</i> for the special category. <i>objDim</i> can be the object name, object identifier, or both.                                                        |
| <b>Parent</b> <i>objCat</i>               | Specifies the parent category <i>objCat</i> . <i>objCat</i> can be the object name or object identifier.                                                                               |
| <i>catopts</i>                            | Optional parameters that describe the category in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “catopts” on page 168. |

## Example

This example creates the special category Current Month.

```
SpecialCatAdd "Current Month" Parent "Time"
```

---

## SpecialCatDelete

The SpecialCatDelete verb removes a special category from the model.

The user interface equivalent is to click **Delete** on the **Edit** menu when a special category is selected.

If a special category has children, the children must be deleted before the special category is deleted or else an error message is issued. This is different from the user interface, where deleting a special category automatically deletes its children.

The syntax is as follows:

**SpecialCatDelete** *objSpecialCat* [**Dimension** *objDim*]

| Argument                                     | Description                                                                                                                      |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>SpecialCatDelete</b> <i>objSpecialCat</i> | Deletes the special category <i>objSpecialCat</i> . <i>objSpecialCat</i> can be the object name, object identifier, or both.     |
| <b>Dimension</b> <i>objDim</i>               | Is specified, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both. |

## Example

This example deletes the special category Current Month.

```
SpecialCatDelete "Current Month"
```

---

## SpecialCatMake

The SpecialCatMake verb creates a special category or updates an existing one.

The user interface equivalent, if the special category exists, is to modify the **Special Category** property sheet. For a new special category, open the **Diagram**, click the right side of the root or special category, and drag the connection to the right.

Calculated categories are defined as regular categories, not special categories, in MDL. For more information, see “DimCalcDefMake” on page 116.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

```
SpecialCatMake objSpecialCat [Dimension objDim][Parent objLevel][catopts]
```

| Argument                                   | Description                                                                                                                                                                                                                                                                                  |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SpecialCatMake</b> <i>objSpecialCat</i> | Creates the category <i>objSpecialCat</i> or modifies it if it exists. <i>objSpecialCat</i> can be the object name, object identifier, or both. Include the object name if the special category does not exist.                                                                              |
| <b>Dimension</b> <i>objDim</i>             | When creating a special category, this specifies the dimension in which the category is to be placed. When updating a category, this is used, if necessary, to uniquely identify the category. <i>objDim</i> can be the object name, object identifier, or both.                             |
| <b>Parent</b> <i>objLevel</i>              | When creating a category, this specifies its parent and is mandatory. This argument is not needed when updating a category. <i>objLevel</i> can be object name or object identifier.                                                                                                         |
| <i>catopts</i>                             | Optional parameters that describe the category in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “catopts” on page 168. If the category exists, previously set options are retained unless you change them with this command. |

## Example

This example defines the special category Current Month.

```
SpecialCatMake "Current Month" Parent "Time" Lastuse 19970425 Rollup True  
TimeAggregate Single RunningPeriods 0 TargetOffset 0 TargetLevel "Month"  
ContextOffset 0 DateDrill 5237 SplitWeek False Primary 5897 Filtered False  
Suppressed False Sign False IsKeyOrphanage False IsTruncated False  
Blanks False
```

---

## SpecialCatUpdate

The `SpecialCatUpdate` verb updates an existing special category.

The user interface equivalent is to modify the **Special Category** property sheet.

For more information about updating special categories, see “`SpecialCatMake`” on page 150.

The syntax is as follows:

**SpecialCatUpdate** *objSpecialCat* [**Dimension** *objDim*] [*catopts*]

| Argument                                     | Description                                                                                                                                                                                                           |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SpecialCatUpdate</b> <i>objSpecialCat</i> | Updates the special category <i>objSpecialCat</i> . <i>objSpecialCat</i> can be the object name, object identifier, or both.                                                                                          |
| <b>Dimension</b> <i>objDim</i>               | Is specified, if necessary, to uniquely identify the special category. <i>objDim</i> can be the object name, object identifier, or both.                                                                              |
| <i>catopts</i>                               | Optional parameters that describe the category in greater detail. For the complete list of options, see “ <i>catopts</i> ” on page 168. Previously set options are retained unless you change them with this command. |

### Example

This example turns off the RollUp attribute for the special category Current Month.

```
SpecialCatUpdate "Current Month" RollUp False
```

---

## SubDimRootMake

The `SubDimRootMake` verb creates a subdimension or updates the category at the root of an existing subdimension.

The user interface equivalent, if the subdimension exists, is to modify the **Category** property sheet of the category that is at the root of the subdimension. For a new dimension, click the **Create/Delete Subdimension** option on the **Diagram** menu when a category is selected.

The category acting as the root category of the subdimension is a regular category, and has the attributes of a regular category.

If you create a subdimension in the user interface and save the model as an .mdl file, when the MDL is generated for the subdimension, the following changes occur:

- A new `SubDimRootMake` statement replaces the `CatMake` statement for the category.
- New `DrillCatMake` and `LevelMake` statements are created and placed immediately after the `SubDimRootMake` statement.
- All of the categories in the subdimension remain but have new parents, drills, and levels.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

**SubDimRootMake** *objCat* [**Dimension** *objDim*] [**Parent** *objLevel*] [**Drill** *objDrillCat*] [**Levels** *objLevel*] [*catopts*]

| Argument                            | Description                                                                                                                                                                                                                                                                                   |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SubDimRootMake</b> <i>objCat</i> | Specifies the category that is to be at the root of the subdimension. <i>objCat</i> can be the object name, object identifier, or both.                                                                                                                                                       |
| <b>Dimension</b> <i>objDim</i>      | When creating a subdimension or updating the root category of a subdimension, this argument is used if necessary, to uniquely identify it. <i>objDim</i> can be the object name, object identifier, or both.                                                                                  |
| <b>Parent</b> <i>objLevel</i>       | When creating a subdimension, this specifies the parent and must be included. <i>objLevel</i> can be object name or object identifier.                                                                                                                                                        |
| <b>Drill</b> <i>objDrillCat</i>     | When creating a subdimension, this specifies the drill category and is optional. <i>objDrillCat</i> can be the drill category object name, object identifier, or both.                                                                                                                        |
| <b>Levels</b> <i>objLevel</i>       | When creating a subdimension, this specifies its level and must be included. <i>objLevel</i> can be the object name or object identifier.                                                                                                                                                     |
| <i>catopts</i>                      | Optional parameters that describe <i>objCat</i> in greater detail. Some options are set by default if you do not set them. For the complete list of options, see “catopts” on page 168. If the category exists, previously set options are retained unless you change them with this command. |

## Example

This example defines the root category 2006 for the subdimension Years.

```
SubDimRootMake "2006" Dimension "Years" Parent "By Time" Drill "By Time"
Levels "Year" Label "2006"
```

---

## SubDimRootUpdate

The SubDimRootUpdate verb updates the category at the root of an existing subdimension.

The user interface equivalent is to modify the property sheet of the category that is at the root of the subdimension.

For more information about subdimensions, see “SubDimRootMake” on page 151.

The syntax is as follows:

**SubDimRootUpdate** *objCat***Dimension** *objDim* [*catopts*]

| Argument                              | Description                                                                                                                                                                                                  |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SubDimRootUpdate</b> <i>objCat</i> | Updates the category that is at the root of the subdimension. <i>objCat</i> can be the object name, object identifier, or both.                                                                              |
| <b>Dimension</b> <i>objDim</i>        | Specifies the dimension in which the subdimension is located. <i>objDim</i> can be the object name, object identifier, or both. This argument is mandatory.                                                  |
| <i>catopts</i>                        | Optional parameters that describe the category in greater detail. For the complete list of options, see “catopts” on page 168. Previously set options are retained unless you change them with this command. |

## Example

This example modifies the category Sport Wear, which is at the root of a subdimension, by adding the description "Sports clothing".

```
SubDimRootUpdate "Sport Wear" Dimension "Products" Parent "GO Sport Line"
Drill "By Product Line" Levels "Product Type" CatInfo "Sports clothing"
```

---

## SummarizeCat

The SummarizeCat verb summarizes the data for the descendants of a specified category in any PowerCube that is created using the specified dimension view.

The user interface equivalent is to click the **Summarize** option on the **Diagram** menu when a category is selected.

Using SummarizeCat on an already-excluded category removes the filter.

**Note:** Category object names differ between MDL and the user interface. MDL uses the category code as the object name. For more information, see “Locating objects uniquely” on page 11.

The syntax is as follows:

**SummarizeCat** *objView* [**Dimension** *objDim*] **Category** *objCat*

| Argument                           | Description                                                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>SummarizeCat</b> <i>objView</i> | Specifies the dimension view. <i>objView</i> can be the object name, object identifier, or both.                                        |
| <b>Dimension</b> <i>objDim</i>     | Must be specified if the view is not referenced by object identifier. <i>objDim</i> can be the object name, object identifier, or both. |
| <b>Category</b> <i>objCat</i>      | Specifies the category to be summarized. <i>objCat</i> can be the object name, object identifier, or both.                              |

## Example

This example summarizes the Belgium category in the Europe dimension view.  
SummarizeCat "Europe" Dimension "Locations" Category "Belgium"

---

## SummarizeLevel

The SummarizeLevel verb summarizes the data values for the specified level in a view.

The user interface equivalent is to click the **Summarize** option on the **Diagram** menu when a level is selected.

The syntax is as follows:

**SummarizeLevel** *objView* [**Dimension** *objDim*][**Drill** *objDrill*] **Levels** *objLevel*

| Argument                             | Description                                                                                                                             |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>SummarizeLevel</b> <i>objView</i> | Specifies the view. <i>objView</i> can be the object name, object identifier, or both.                                                  |
| <b>Dimension</b> <i>objDim</i>       | Must be specified if the view is not referenced by object identifier. <i>objDim</i> can be the object name, object identifier, or both. |
| <b>Drill</b> <i>objDrill</i>         | Is specified, if necessary, to uniquely identify the view. <i>objDrill</i> can be the object name, object identifier, or both.          |
| <b>Levels</b> <i>objLevel</i>        | Specifies the level to be summarized. <i>objLevel</i> can be the object name, object identifier, or both.                               |

## Example

This example summarizes the Branch Code level in the Europe dimension view.  
SummarizeLevel "Europe" Dimension "Locations" Drill "By Region" Levels "Branch Code"

---

## UpdateForwardReference

The UpdateForwardReference verb may be used to resolve forward-referencing problems that can occur when you change a model by using a new verb in the model definition file. There is no user interface equivalent.

For more information about setting the VerbOutput option, see “Cognos Transformer and verb MDL” on page 5.

Processing times may be slower when you use the UpdateForwardReference verb.

The syntax is as follows:

**UpdateForwardReference**

---

## UpdatePowerCubes

The UpdatePowerCubes verb allows you to update the metadata in the .mdc files for existing PowerCubes without updating the data.

The user interface equivalents are the **Update PowerCubes** and **Update Selected PowerCubes** options on the **Run** menu.

The syntax is as follows:

```
UpdatePowerCubes [objCube] [updatepowercubeopts]
```

| Argument                               | Description                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UpdatePowerCubes</b> <i>objCube</i> | Updates the PowerCube <i>objCube</i> . <i>objCube</i> can be the object name, object identifier, or both. If no PowerCube is specified, all are updated.                                                                                                                                                                                                                                                         |
| <i>updatepowercubeopts</i>             | Optional parameters that describe the PowerCube in greater detail. These parameters are:<br>DrillThrough {True False}<br>Objects {True False}<br>UserClasses {True False}<br>CurrencyConversion {True False}<br><br>DrillThrough updates the drill through targets into the Cube. Objects updates the object names. UserClasses updates the security. CurrencyConversion updates the Currency Conversion tables. |

### Example

This example updates the metadata in the cube1.mdc file.

```
UpdatePowerCubes mycube.mdc UserClasses True
```

---

## ViewAdd

The ViewAdd verb adds a dimension view. If the object already exists in the model, an error message is issued.

The user interface equivalent is to click **Add New View** in the menu option that is accessed by right-clicking the relevant portion of the view pane (**Diagram**).

The syntax is as follows:

```
ViewAdd objView [ Dimension objDim] [ Type viewtype] [viewopts]
```

| Argument                       | Description                                                                                                                     |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>ViewAdd</b> <i>objView</i>  | Adds the dimension view <i>objView</i> . <i>objView</i> must be the object name and can include the object identifier.          |
| <b>Dimension</b> <i>objDim</i> | Is specified to locate the dimension view within a dimension. <i>objDim</i> can be the object name, object identifier, or both. |

| Argument                    | Description                                                                                                                                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Type</b> <i>viewtype</i> | Specifies the type of view. <i>viewtype</i> can be All, Omit or Custom. If not specified, the default is Custom.                                                      |
| <i>viewopts</i>             | Optional parameters that describe the view in greater detail. Some options are set by default if you do not set them. For the complete list of options, see viewopts. |

## Example

This example creates a Europe view for the Locations dimension and applies the Apex action. The ViewSecurity argument is blank (null), indicating that this is a dimension view.

```
ViewAdd "Europe" Dimension "Locations" ViewSecurity "" Apex "Europe"
```

For examples of custom views that use IBM Cognos security objects rather than user classes, see the security chapter in the *IBM Cognos Transformer User Guide*.

---

## ViewDelete

The ViewDelete verb removes a dimension view from the model.

The user interface equivalent is to click **Delete** in the menu that is accessed by right-clicking a dimension view.

You cannot delete a default view.

The syntax is as follows:

```
ViewDelete objView [Dimension objDim]
```

| Argument                         | Description                                                                                                                             |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>ViewDelete</b> <i>objView</i> | Deletes the dimension view <i>objView</i> . <i>objView</i> can be the object name, object identifier, or both.                          |
| <b>Dimension</b> <i>objDim</i>   | Must be specified if the view is not referenced by object identifier. <i>objDim</i> can be the object name, object identifier, or both. |

## Example

This example deletes the dimension view Europe.

```
ViewDelete "Europe" Dimension "Locations"
```

---

## ViewListUpdate

The ViewListUpdate verb reorders a dimension view list.

The user interface equivalent is to drag the dimension views into the required order in the list.



You cannot move the default views. All Categories and Omit Dimensions always display as the first and second items in the list.

The syntax is as follows:

**ViewListUpdate** [**Dimension** *objDim*] **StartList** *objViews* **EndList**

| Argument                         | Description                                                                                                                               |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dimension</b> <i>objDim</i>   | Must be specified if the views are not referenced by object identifier. <i>objDim</i> can be the object name, object identifier, or both. |
| <b>StartList</b> <i>objViews</i> | Lists the dimension views in the desired order. The dimension views can be identified by object name or object identifier.                |

## Example

This example moves the views Far East and Europe to the top of the custom views in the dimension view list. The default views still always display first.

ViewListUpdate Dimension "Locations" StartList "Far East" "Europe" EndList

---

## ViewMake

The ViewMake verb creates a dimension view or updates an existing one.

The user interface equivalent, when an existing view is selected, is to click **Options** on the **Diagram** menu. For a new view, click the **Add New View** option in the menu that is accessed by right-clicking a dimension view.

The syntax is as follows:

**ViewMake** *objView* [**Dimension** *objDim*] [**Type** *viewtype*] [*viewopts*]

| Argument                       | Description                                                                                                                                                                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ViewMake</b> <i>objView</i> | Creates the dimension view <i>objView</i> or modifies it if it exists. <i>objView</i> can be the object name, object identifier, or both. Include the object name if the dimension view does not exist.                                                                 |
| <b>Dimension</b> <i>objDim</i> | When creating a dimension view, this specifies the dimension in which it is placed. When updating a view, this must be specified if the view is not referenced by object identifier. <i>objDim</i> can be the object name, object identifier, or both.                  |
| <b>Type</b> {All Omit Custom}  | Specifies the type of view. Type can be All, Omit, or Custom. If the view does not exist, the default is Custom.                                                                                                                                                        |
| <i>viewopts</i>                | Optional parameters that describe the view in greater detail. Some options are set by default if you do not set them. For the complete list of options, see viewopts. If the view exists, previously set options are retained unless you change them with this command. |

## Example

This example defines a Europe view, which shows only the data for that region. The ViewSecurity argument is blank (null), indicating that this is a dimension view.

```
ViewMake "Europe" Dimension "Locations" ViewSecurity 0 Apex "Europe"
```

This example shows the two default views for the Products dimension. Cognos Transformer creates these default views for each dimension in the model. Again, ViewSecurity is blank or null.

```
ViewMake "All Categories" Dimension "Products" Type All ViewSecurity 0  
ViewMake "Omit Dimension" Dimension "Products" Type Omit ViewSecurity 0
```

---

## ViewUpdate

The ViewUpdate verb updates an existing dimension view.

The user interface equivalent is to click **Options** on the **Diagram** menu when an existing view is selected.

You cannot update the default views that Cognos Transformer creates for each dimension (Omit Dimension and All Categories).

For more information about updating views, see “ViewMake” on page 157.

The syntax is as follows:

```
ViewUpdate objView [Dimension objDim] [Type viewtype] [viewopts]
```

| Argument                         | Description                                                                                                                                                                                 |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ViewUpdate</b> <i>objView</i> | Specifies the view to update. <i>objView</i> can be the object name, object identifier, or both.                                                                                            |
| <b>Dimension</b> <i>objDim</i>   | Must be specified if the view is not referenced by object identifier. <i>objDim</i> can be the object name, object identifier, or both.                                                     |
| <b>Type</b> <i>viewtype</i>      | Specifies the type of view. <i>viewtype</i> can be All, Omit, or Custom. If not specified, the existing view type is retained.                                                              |
| <i>viewopts</i>                  | Optional parameters that describe the view in greater detail. For the complete list of options, see viewopts. Previously set options are retained unless you change them with this command. |

## Example

This example applies a summarize operation to the Belgium category in the Europe dimension view.

```
ViewUpdate "Europe" Dimension "Locations" Summary "Belgium"
```

---

## Chapter 6. MDL options

This section describes the Model Definition Language (MDL) options you can use with IBM Cognos Transformer to define and manipulate objects.

Each grouping applies to one or more Cognos Transformer verbs and the objects on which they operate. The option descriptions include some or all of the following:

- Purpose of the option group
- The location of the equivalent functionality on the Windows interface (UI)
- Verb syntax
- Notes
- Examples

Before you begin, please review the Chapter 4, “Syntax conventions,” on page 59 and the topic that explains when to use object identifiers or category codes: “Locating objects uniquely” on page 11.

For more information about Cognos Transformer features and functionality, see the *IBM Cognos Transformer User Guide*.

---

### appqueryopts

Use `appqueryopts` to set the options that apply to the following MDL verbs:

`DataSourceAdd`, `DataSourceMake`, `DataSourceUpdate`, and `NewModel`.

You can use MDL to specify a package, report, or query from an IBM Cognos data source and, optionally, any filter references.

### AppInfo

The `AppInfo` option allows you to add a description that provides details about the query.

The syntax is as follows:

**AppInfo** *string* [*string*...]

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

#### Example

`AppInfo "This model created by DBX for HHY."`

### CharacterSet

The `CharacterSet` option specifies the type of character set used in the query.

The syntax is as follows:

**CharacterSet** *charset*

where *charset* is one of `Default`, `ANSI`, `OEM`, `Unicode` or `Multibyte`.

## Example

CharacterSet Multibyte

## CognosSource

The CognosSource option specifies an IBM Cognos package or report data source in the model. All package or report definitions are added before query definitions.

The syntax is as follows:

**CognosSource** id "*name*"

where *name* is the name of the package in the Cognos Transformer model. All packages, reports, and queries must have unique names.

## Example

CognosSource 103 "Go Sales and Retailers"

## Columns

The Columns option adds information about the type of column used by the data source.

This option relates to the structure of the source data and should not be manually set.

The syntax is as follows:

**Columns** {True|False}

where False indicates that the data is fixed length.

## Example

Columns True

## DataRange

The DataRange option adds information about the table ranges used from the source data.

This option applies only to queries made against Excel databases.

The syntax is as follows:

**DataRange** *string*

where *string* is the name of the Excel data range.

## Example

DataRange "reptotal\_rng"

## DecimalSep

The DecimalSep option specifies the character used as the decimal separator for the data values.

The syntax is as follows:

**DecimalSep** *string*

where *string* is the decimal separator.

### Example

`DecimalSep "."`

## ImrName

The `ImrName` option specifies the drill-through target for an IQD data source.

This option is required for drill-through to an Impromptu report from an IQD data source.

The syntax is as follows:

**ImrName** *string*

where *string* is a file name and optional path.

### Example

`ImrName "C:installation_directory\PowerCubes and Reports\bsc_msrs.imr"`

## Isolation

The `Isolation` option provides information about the IQD data source.

This option applies only to IQD data sources.

The syntax is as follows:

**Isolation** *number*

where *number* is a number from 0 to 6 that corresponds to the following list:

| Isolation level    | Number |
|--------------------|--------|
| Default            | 0      |
| Read Uncommitted   | 1      |
| Read Committed     | 2      |
| Cursor Stability   | 3      |
| Reproducible Read  | 4      |
| Phantom Protection | 5      |
| Serializable       | 6      |

### Example

`Isolation 2`

## ModelStamp

The `ModelStamp` option assigns a numeric code to the model.

This option is for internal use only.

The syntax is as follows:

**ModelStamp** *bignum*

## Example

ModelStamp 827358629

## PackageReportSource

The PackageReportSource option specifies a reference to the package on which an IBM Cognos query is defined.

The syntax is as follows:

**PackageReportSource** *source ID "source name"*

## Example

PackageReportSource 103 "Go Sales and Retailers"

## PackageTimeStamp

The PackageTimeStamp option specifies the version of the package last used.

The syntax is as follows:

**PackageTimeStamp** *"pathandtime stamp"*

## Examples

PackageTimeStamp "/content/package[@name='GO Sales and Retailers200701011200']/model[@name='model']"

PackageTimeStamp "/content/package[@name='Go Sales']/model[@name='2008-04-16T15:41:14.078Z']"

## PreSummarized

The PreSummarized option specifies whether measures are externally rolled up before they are brought into the model.

The syntax is as follows:

**PreSummarized** {True|False}

## Example

PreSummarized False

## SegmenterPrompt

The SegmenterPrompt option specifies the prompt used to segment a SAP BW fact query during stream extract.

The syntax is as follows:

**SegmenterPrompt** *string*

where *string* is the name of the prompt used for segmenting the query.

## Example

SegmenterPrompt "WhichBrand"

## SegmenterPromptEnabled

The SegmenterPromptEnabled option specifies whether stream extract is to be used for eligible SAP BW fact queries.

The syntax is as follows:

**SegmenterPromptEnabled** {True|False}

### Example

SegmenterPromptEnabled True

## Separator

The Separator option specifies the character used to separate character-delimited fields in the data source.

This option applies only to sources that use delimited-field text or delimited-field text with column titles.

The syntax is as follows:

**Separator** *string*

### Example

Separator ",",

## SetCurrent

The SetCurrent option specifies whether the source data sets the current date in the time dimension for the model.

The syntax is as follows:

**SetCurrent** {True|False}

### Example

SetCurrent False

## Source

The Source option specifies the name and location of the source file for the model.

The syntax is as follows:

**Source** *string*

where *string* is a file name and optional path.

### Example

Source "c:installation\_directory\cubes and reports\proinfo.csv"

## SourceInfo

The SourceInfo option specifies additional descriptive information about the source file for the model.

The syntax is as follows:

**SourceInfo** *string* [*string*...]

where each string may be up to 256 characters, and the total description may be up to 4,095 characters.

### Example

SourceInfo "This data source created by DBX."

## SourcePath

The SourcePath option specifies the path to the IBM Cognos package or report within Content Manager.

The syntax is as follows:

**SourcePath** *"path"*

### Example

```
SourcePath "/content/package [@name='Go Sales and Retailers']"
```

## SourceSignonList

The SourceSignonList option specifies the signons that apply to the data source.

The syntax is as follows:

**SourceSignonList** *signonlist* **EndList**

where *signonlist* is the list of signons for a data source, where these are required. Signons can be the object name, object identifier, or both.

### Example

```
SourceSignonList 105 EndList
```

## SourceType

The SourceType option allows you to specify any supported data source for the model.

For an IQD data source, the keyword is DataSource. However, for an IBM Cognos single query, this keyword must be qualified by specifying SourceType CognosSourceQuery.

Similarly, the keyword for an IBM Cognos package or report is CognosSource. It must be qualified by specifying SourceType package or SourceType report.

The syntax is as follows:

**SourceType** *sourcetype*

where *sourcetype* is one of FlatFileColNames, FlatFile, DataSource, Access, AccessQuery, ExcelCrosstab, ExcelDatabase, PowerHousePortable, FixedASCII, FixedASCII\_NoCrLf, Dictionary or, for IBM Cognos data sources, one of either CognosSourceQuery, package, or report.

### Example

The following example specifies an IBM Cognos package as the source type:

```
CognosSource 103 "GO Sales" SourceType package SourcePath  
"/content/package[@name='GO Sales']"
```

The following example specifies an IBM Cognos report as the source type:

```
CognosSource 104 "GO Sales" SourceType report SourcePath "/content/  
package[@name='GO Sales']/report[@name='GO SalesReport']"
```

The following example specifies a single query created using an IBM Cognos report as the source:



```
DataSource 116 "Time" Separator "," SourceType CognosSourceQuery CharacterSet
Default DecimalSep "." ThousandSep "," ColumnsTrueTiming PopYesCreateDefault
PackageReportSource104 "GO Sales Report" SetCurrent True Speed False
Presummarized False
```

## Speed

The Speed option allows you to specify whether query optimization or uniqueness verification checks are enabled for your model.

The syntax is as follows:

**Speed** {True|False}

where True enables the Maximize Data Access Speed processing option. False enables the Verify Category Uniqueness processing option.

### Example

Speed False

## SQL

The SQL option represents the query as a Structured Query Language (SQL) string.

This option cannot be changed by the user. Any changes must be made in the source.

The apostrophe (') is the delimitation character for any SQL statement. It must appear at the beginning and end of every line of SQL.

The maximum number of characters on any line is 256.

The syntax is as follows:

**SQL** ' *string* [*string*...]'

### Example

The following represents the SQL for the Main IQD data source:

```
SQL 'select T1."ORDER_DT" as c1,' T2."PROD_NO" as c2, T1."REP_NO" as c3,'T1.
"CUST_NO" as c4, T2."QTY" as c5,'(T2."QTY" * T2."PRI' 'CE") as c6,'
(T2."QTY" * T3."PROD_COST") as c7,'(CASE ' 'WHEN (((T2."QTY" * T2."PRICE") - '
(T2."QTY" * T3."PROD_COST"))/(T2."QTY" * 'T2."PRICE"))
<= 0.19) ' 'THEN ("Under 20%') 'WHEN (((T2."QTY" * T2."PRICE") - '
(T2."QTY" * T3."PROD_COST")) / ' '(T2."QTY" * T2."PRICE")) BETWEEN 0.2
AND ' '0.65)' 'THEN ("20% - 65%') 'WHEN (((T2."QTY" * T2."PRICE") - '
(T2."QTY" * T3."PROD_COST"))' / (T2."QTY" * T2."PRICE")) >= 0.66)
' 'THEN ( ' "Over 65%') 'ELSE ('ERROR') 'END) as c10 from "ORDER"
T1,'("PRODUCT" T3 left outer join "ORDRDETL" T2 ' 'on T2."PROD_NO" =
T3."PROD_NO") where'(T2."ORDER_NO" = T1."ORDER_NO")' 'order by
c1 asc,c3 asc,c4 asc,c2 asc'
```

## Stamp

The Stamp option assigns a numeric code to the model for internal use.

This option is for internal use only.

The syntax is as follows:

**Stamp** *number*

## Example

Stamp 890332424

## StreamExtractSize

The StreamExtractSize option specifies the size of the stream extract buffer used for an SAP BW fact query.

The syntax is as follows:

**StreamExtractSize***number*

where *number* is the size in MB of the stream extract buffer, or 0. The number 0 disables stream extracts for the query.

## Example

StreamExtractSize 10

## SuppressNull

The SuppressNull option specifies whether to suppress null values in IBM Cognos packages based on a SAP BW data source.

The syntax is as follows:

**SuppressNull***suppressnull*

where *suppressnull* is one of SuppressNullYes, SuppressNullNo, or SuppressNullModel.

## Example

SuppressNull SuppressNullYes

## ThousandSep

The ThousandSep option specifies which character demarcates numbers in the thousands, or larger.

The syntax is as follows:

**ThousandSep** *string*

## Example

ThousandSep ", "

## Timing

The Timing option specifies when categories are generated during cube-building.

The syntax is as follows:

**Timing***datasourcetiming*

where *datasourcetiming* is one of PopNoCreateNo, PopYesCreateNo, PopNoCreateDefault, PopYesCreateDefault, PopNoCreateYes, PopYesCreateYes. These, in turn, relate to the following Windows interface settings:

| <i>datasourcetiming</i> | Windows interface setting                  |
|-------------------------|--------------------------------------------|
| PopNo                   | <b>Generate Categories</b> is not selected |
| PopYes                  | <b>Generate Categories</b> is selected     |

|                         |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| <i>datasourcetiming</i> | <b>Windows interface setting</b>                                    |
| Create Default          | <b>PowerCube Creation and Default</b> are selected                  |
| CreateYes               | <b>PowerCube Creation and Create the PowerCubes</b> are selected    |
| CreateNo                | <b>PowerCube Creation and Generate Categories Only</b> are selected |

### Example

Timing PopYesCreateNo

## UpdateCycle

The UpdateCycle option is set by Cognos Transformer for internal use only.

The syntax is as follows:

**UpdateCycle**  
*bignum*

## Version

The Version option is set by Cognos Transformer. It should not be set manually.

The syntax is as follows:

**Version** *string*

### Example

Version "7.4 1012"

---

## assocopts

Use assocopts to set the options that apply to the following MDL verbs: AssociationAdd, AssociationMake, AssociationUpdate, CurrencyTableAdd, CurrencyTable Make, CurrencyTableUpdate, DimensionAdd, DimensionMake, DimensionUpdate, LevelAdd, LevelMake, LevelUpdate, MeasureAdd, MeasureMake, and MeasureUpdate.

## AssociationContext

The AssociationContext option specifies the context for an object in the overall model.

The syntax is as follows:

**AssociationContext** *objcontext*

where *objcontext* can be the object name or object identifier or both.

### Example

AssociationContext 2979 "Branch Code"

## AssociationReferenced

The AssociationReferenced option specifies the reference used for the association.

The syntax is as follows:

**AssociationReferenced** *objref*

where *objref* is the name of the association

### Example

AssociationReferenced "Branch Code"

## AssociationRole

The AssociationRole option specifies the role played by the associated object in the model.

The syntax is as follows:

**AssociationRole** *objrole*

where *objrole* is one of Role\_Catcode, Role\_Description, Role\_Drillthrough, Role\_Label, Role\_Orderby, Role\_Source, or Role\_Tag.

For Currency tables, *objrole* is one of Role\_CountryCode, Role\_Date, Role\_Label, or Role\_Rate.

### Example

AssociationRole Role\_Label

## AssociationType

The AssociationType option specifies the type of object represented by the association.

The Type\_Query option is used for Impromptu Query Definition (IQD) data sources.

The syntax is as follows:

**AssociationType** *objtype*

where *objtype* is one of Type\_PowerCube or Type\_Query.

### Example

AssociationType Type\_PowerCube

---

## catopts

Use catopts to set the options that apply to the following MDL verbs: CatAdd, CatMake, CatUpdate, SpecialCatAdd, SpecialCatMake, SpecialCatUpdate, DrillCatMake, RootCatMake, RootCatUpdate, SubDimRootMake, and SubDimRootUpdate.

## Blanks

The Blanks option indicates the presence of missing values for regular categories.

For more information about how null and missing values are treated in the supported IBM Cognos reporting applications, see the Measures chapter of the Cognos Transformer *User Guide*.

This option applies to regular categories only.

The syntax is as follows:

**Blanks** {True|False}

where true means the category is blank (has missing values).

### Example

Blanks False

## Calc

The Calc option specifies a calculation and the model objects to which it applies.

The Calculation keywords supported by Cognos Transformer are as follows:

| Calculation keyword | Type                       | Description                                                                    |
|---------------------|----------------------------|--------------------------------------------------------------------------------|
| /                   | Number                     | Divides.                                                                       |
| -                   | Date or Number             | Subtracts.                                                                     |
| +                   | Character, Date, or Number | Adds.                                                                          |
| ^                   | Number                     | Returns a number raised to the power of a second number.                       |
| Accumulate          | Number                     | Computes the running total.                                                    |
| AccPOB              | Number                     | Computes the running total as a percentage of the total.                       |
| Average             | Number                     | Averages.                                                                      |
| Max                 | Number                     | Represents a maximum instance.                                                 |
| Min                 | Number                     | Represents a minimum instance.                                                 |
| *                   | Number                     | Multiplies.                                                                    |
| Percent-Growth      | Number                     | Computes the percentage change that parameter 2 is, relative to parameter 1.   |
| Share               | Number                     | Computes the share that parameter 2 is, relative to parameter 1.               |
| Change              | Number                     | Computes the difference between two parameters (parameter 2 minus parameter 1) |

The syntax is as follows:

**Calc**  
*calculation*

where *calculation* is a combination of *objects* and *keywords*.

*objects* consist of the object name followed by the at sign (@), the object type and, optionally, the object identifier. The object type can be Category, Level, or Drill, such as G0 Water Bottle@Category@4805.

## Example

The following examples represent two commonly encountered calculation specifications:

```
Calc Percent-Growth ("Prior YTD","YTD")
```

```
Calc Share ("G0 Water Bottle@Category@4805, "Sport Wear@Category@4799")
```

## CalcDef

The CalcDef option references a calculation defined elsewhere in the model.

The CalcDef option can serve as a forward reference for the DimCalcDef object. A CatMake statement that references a calculation can appear in the MDL file before the calculation object is defined using the DimCalcDefMake statement.

The syntax is as follows:

```
CalcDef objDimCalcDef
```

where *objDimCalcDef* can be the object name or object identifier.

## Example

```
CalcDef 6375
```

## CatInfo

The CatInfo option adds a category description to the model.

The CatInfo option describes regular, special, drill, and root categories.

The syntax is as follows:

```
CatInfo string [string...]
```

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

## Example

```
CatInfo "Exceptional money-makers! Determine why these items are profitable  
and use the information to improve the performance of others in the group."
```

## ContextLevel

The ContextLevel option specifies the level on which a relative time period is based, establishing the context for the target period.

The *string* parameter is context-sensitive.

The syntax is as follows:

```
ContextLevel string
```

where *objDimCalcDef* can be the object name or object identifier.

### Example

ContextLevel "Quarter"

## ContextOffset

The ContextOffset option specifies the number of periods by which the relative time period is offset (or removed) from the current period, where 0 corresponds to the current period. For grouped categories, this value defined the range of relative time categories in the group.

The syntax is as follows:

**ContextOffset** *number*

### Example

ContextOffset -1

## Current

The Current<sup>®</sup> option specifies the date category that will serve as the current period.

The syntax is as follows:

**Current**

### Example

Current

## Date

The Date option specifies the start date for a date category. This option is required.

The syntax is as follows:

**Date** *date*

where *date* is the start of the date period.

### Example

Date 19990101

## DateDrill

The DateDrill option specifies the drill category for the time dimension.

The syntax is as follows:

**DateDrill** *objDrillCat*

where *objDrillCat* is the object name or object identifier.

### Example

DateDrill "By Time"

## ExtraWeek

The ExtraWeek option specifies the conditions under which Cognos Transformer adds extra days as a separate week, to resynchronize a lunar quarter or year with

the regular calendar. You can specify that an extra week never be added, or only added if there are exactly 7 extra days. Or, you can specify some other condition that will trigger the addition of an extra week, such as 4 or more remainder days.

The syntax is as follows:

**ExtraWeek** *extrawEEK*

where *extrawEEK* is one of None, 7only, , 6orMore 5orMore, or 4orMore.

### Example

ExtraWeek 4orMore

## Filtered

The Filtered option specifies whether categories are excluded from the model.

The syntax is as follows:

**Filtered** {True|False}

### Example

Filtered True

## Format

The Format option specifies the number of decimal places in a numeric measure.

The syntax is as follows:

**Format** *string*

where *string* is the format, followed by a tilde (~) and the number of decimal places.

### Example

This example sets the format to #,##0 and sets the decimal places to 2:

Format "#,##0~2"

## Inclusion

The Inclusion option specifies whether categories are included or suppressed.

This parameter applies to regular, special, and drill categories.

The syntax is as follows:

**Inclusion***inclusion*

where *inclusion* is one of Default, Generate, Suppress, Retain, or Filtered.

The Windows interface equivalents of these are as follows:

- **Default** (when needed)
- **Always Include**
- **Suppress** (on the **Diagram** menu)
- **Include When Needed** or **Suppress Blank Categories**
- **Exclude** (on the **Diagram** menu)



## Example

This example suppresses the specified category:

```
Inclusion Suppress
```

## IsKeyOrphanage

The `IsKeyOrphanage` option specifies whether the category in a manual level is a placeholder that will serve as the parent category for any newly generated categories that display in the next lower source level.

Only one orphanage is allowed in a lower manual level for each source level category.

For easier reference, you can specify that the category code of the orphanage be shown for a particular category.

The syntax is as follows:

```
IsKeyOrphanage {True|False}
```

## Example

```
IsKeyOrphanage False
```

## IsTruncated

The `IsTruncated` option specifies whether an overly long category identifier has been truncated.

The syntax is as follows:

```
IsTruncated {True|False}
```

## Example

```
IsTruncated True
```

## Label

The `Label` option adds a descriptive name to clearly identify a category.

The syntax is as follows:

```
Label stringwithnewline
```

## Example

```
Label "Day Tripper"
```

## LastUse

The `LastUse` option specifies the date when a category was created or last updated in the model.

The syntax is as follows:

```
LastUse date
```

where *date* is in the format YYYYMMDD.

## Example

```
Lastuse 20070324
```

## NewPartition

The NewPartition option specifies the partition level for a category.

The syntax is as follows:

**NewPartition** *uns*

where *uns* is an unsigned number that represents the partition level of that category.

### Example

NewPartition 1

## HideValue

The HideValue option hides meaningless measure values, either at the root or at any other category level in a scenario dimension.

Use this option with DimDefaultCategory to specify a new default category at a lower level, having meaningful measure values, where you want the cube to open.

The syntax is as follows:

**HideValue** {True|False}

### Example

RootCatUpdate "Products" Dimension "Products" Inclusion Generate ... HideValue True

## Orphanage

The Orphanage option is automatically set by Cognos Transformer when a manual category is added. It is for internal use only.

The syntax is as follows:

**Orphanage**

### Example

Orphanage

## PartialWeek

The PartialWeek option specifies how partial-week categories are to be allocated or split when they span two higher-level time periods.

The syntax is as follows:

**PartialWeek** *partialweek*

where *partialweek* is one of First, Last, Largest, Split, SplitIfGreater, or None. The None parameter does not have a Windows interface equivalent. The Windows interface equivalents of the other parameters are as follows:

- **First Period**
- **Last Period**
- **Largest Period**
- **Always Split**
- **Split > 1 Day**

## Example

This example splits the categories into two weeks if there is more than one day in the extra partial week:

```
PartialWeek SplitIfGreater
```

## Primary

The Primary option specifies the primary drill category for a set of categories.

The syntax is as follows:

```
Primary objCat
```

where *objCat* can be the object name or object identifier.

## Example

```
Primary "20071201-20071231"
```

## PrimaryDrill

The PrimaryDrill option specifies whether the category is in the primary drill path.

The syntax is as follows:

```
PrimaryDrill {True|False}
```

## Example

```
PrimaryDrill True
```

## Rollup

The Rollup option specifies whether the measure values from the category should be rolled up, or summarized.

The syntax is as follows:

```
Rollup {True|False}
```

## Example

```
Rollup True
```

## RunningPeriods

The RunningPeriods options specifies the number of relative time periods for an N-period running total.

The syntax is as follows:

```
RunningPeriods uns
```

where *uns* is the number of running periods to include.

## Example

```
RunningPeriods 0
```

## Share

The Share option applies a Cognos Transformer-specific calculation that computes the proportionate share of an item relative to its parent category.

For more information, see the Cognos Transformer *User Guide*.

The syntax is as follows:

**Share** *objCat*

where *objCat* is the object name or object identifier.

### Example

Share "Back Packs"

## ShortName

The ShortName option specifies a shorter name for the category.

You can use this option with regular, special, drill, and root categories.

The syntax is as follows:

**ShortName** *string*

### Example

ShortName "ENV"

## Sign

The Sign option specifies whether the sign of a measure value associated with a category is to be reversed, changing it from a negative to a positive number, or from a positive to a negative number.

This option is useful if you need to convert values into the form required by specific financial reports, such as debits and credits, or assets and liabilities.

You can use this option with regular and special categories.

The syntax is as follows:

**Sign** {True|False}

where True means that the sign is reversed.

### Example

Sign True

## SourceValue

The SourceValue option specifies the name by which a source column is identified.

This option applies to regular categories only.

The syntax is as follows:

**SourceValue** *stringwithnewline*

### Example

SourceValue "Environmental Line"

## SplitWeek

The SplitWeek option specifies whether extra days should be divided between two weeks.

This option is for internal use only.

The syntax is as follows:

**SplitWeek** {True|False}

### Example

SplitWeek False

## Suppressed

The **Suppressed** option specifies whether the category should have its values suppressed (hidden).

You can use this option with regular and special categories.

The syntax is as follows:

**Suppressed** {True|False}

where True means that the category values are suppressed (hidden).

### Example

Suppressed True

## TargetLevel

The **TargetLevel** option specifies the target category for a relative time definition or, for to-date or N-period running totals, the granularity of periods that you set to compute the totals.

The syntax is as follows:

**TargetLevel** *string*

### Example

TargetLevel "Month"

## TargetOffset

The **TargetOffset** option sets the number of periods by which the relative time category is offset (or removed) from the current period. The effect of your selection depends on whether you are creating a relative time category for a Single Category, a Period To-Date, or an N-Period Running Total.

The syntax is as follows:

**TargetOffset** *number*

### Example

TargetOffset -1

## TimeAggregate

The **TimeAggregate** option specifies the type of relative time, such as To-Date, Running Total, or a grouped version of these.

The syntax is as follows:

**TimeAggregate** *timeaggregate*

where *timeaggregate* is one of None, Single, ToDate, ToDate\_Grp, Running, or Running\_Grp.

### Example

TimeAggregate ToDate

## ToDateLevel

The ToDateLevel option specifies the level to which the Period To-Date relative time category applies.

The syntax is as follows:

**ToDateLevel** *objLevel*

where *objLevel* is the object name.

### Example

ToDateLevel "Quarter"

## WeekBegins

The WeekBegins option specifies the day that each week in the model begins.

The syntax is as follows:

**WeekBegins** *day*

where *day* is one of Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, or Saturday.

### Example

WeekBegins Sunday

## YearBegins

The YearBegins option specifies the date that the fiscal year begins, where this differs from the start of the calendar year.

The syntax is as follows:

**YearBegins** *date*

where *date* is in the format YYYYMMDD

### Example

YearBegins 20070401

---

## cognospackageopts

Use cognospackageopts to set the options that apply to the following MDL verbs: CognosPackageAdd, CognosPackageMake, and CognosPackageUpdate.

## Description

The Description option adds a description of the source column associated with the package.

The syntax is as follows:

**Description** *objCol*

where *objCol* is the object name of a column.

### Example

Description "Product types"

## PackageTimeStamp

The PackageTimeStamp option specifies the version of the package last used.

The syntax is as follows:

**PackageTimeStamp** "*pathandtime stamp*"

### Examples

```
PackageTimeStamp "/content/package[@name='GO Sales and  
Retailers200701011200']/model[@name='model']"
```

```
PackageTimeStamp "/content/package[@name='Go Sales']  
/model[@name='2008-04-16T15:41:14.078Z']"
```

## SourcePath

The SourcePath option specifies the path to the IBM Cognos package or report within Content Manager.

The syntax is as follows:

**SourcePath** "*path*"

### Example

```
SourcePath "/content/package [@name='Go Sales and Retailers']"
```

## SourceType

The SourceType option specifies which type of metadata source is being referenced in Content Manager. The valid values are package or report.

The syntax is as follows:

**SourceType***sourcetype*

where *sourcetype* is one of package or report.

### Example

The following example specifies an IBM Cognos package as the source type:

```
CognosSource 103 "GO Sales" SourceType package SourcePath "/content/  
package[@name='GO Sales']"
```

The following example specifies an IBM Cognos report as the source type:

```
CognosSource 104 "GO Sales" SourceType report SourcePath "/content/  
package[@name='GO Sales']/report@name='GO SalesReport'"
```

---

## colopts

Use colopts to set the options that apply to the following MDL verbs: ColumnAdd, ColumnMake, ColumnUpdate, DataSourceAdd, DataSourceMake, DataSourceUpdate, SourceAttributeAdd, SourceAttributeMake, and SourceAttributeUpdate.

## Calc

The Calc column option defines the calculation and the objects involved in the calculation.

The syntax is as follows:

*Calc* *keywords* *objects*

where *objects* are the object name followed by the at sign (@) and the object identifier; for example, "Revenue@259"

The keywords used with the Calc column option are as follows:

| Calculation keyword | Type                       | Description                                                         |
|---------------------|----------------------------|---------------------------------------------------------------------|
| /                   | Number                     | Divided by                                                          |
| =                   | Boolean                    | Equals                                                              |
| >                   | Boolean                    | Greater than                                                        |
| >=                  | Boolean                    | Greater than or equal to                                            |
| <                   | Boolean                    | Less than                                                           |
| <=                  | Boolean                    | Less than or equal to                                               |
| (                   |                            | Left parenthesis                                                    |
| -                   | Date or Number             | Minus                                                               |
| *                   | Number                     | Multiplied by                                                       |
| +                   | Character, Date, or Number | Adds numbers or concatenates strings                                |
| ^                   | Number                     | Returns a number raised to the power of a second number             |
| )                   |                            | Right parenthesis                                                   |
| Absolute            | Number                     | Converts numbers to their unsigned value                            |
| Add-Days            | Date                       | Returns the date resulting from adding a number of days to a date   |
| Add-Months          | Date                       | Returns the date resulting from adding a number of months to a date |



| Calculation keyword         | Type                       | Description                                                                                         |
|-----------------------------|----------------------------|-----------------------------------------------------------------------------------------------------|
| Add-Years                   | Date                       | Returns the date resulting from adding a number of years to a date                                  |
| Age                         | Date                       | Age                                                                                                 |
| Ceiling                     | Number                     | Returns a number rounded to the next highest integer                                                |
| Char-Length                 | Number                     | Returns the number of characters in a string                                                        |
| Date-To-Days-From-1900      | Number                     | Returns the number of days from January 1, 1900 inclusive                                           |
| Day                         | Number                     | Returns the day of the month (1-31) from a date                                                     |
| Days-From-1900-To-Date-Time | Date                       | Returns the date obtained from converting a number of days from January 1, 1900 inclusive to a date |
| Days-To-End-Of-Month        | Date                       | Returns the number of days to the last day of the month represented by a date                       |
| Else                        | Boolean                    | Else                                                                                                |
| First-Of-Month              | Date                       | Returns the first day of a month from a date or datetime                                            |
| First-Word                  | Character                  | Returns the first word of a string                                                                  |
| Floor                       | Number                     | Returns a number rounded down to the next lowest integer                                            |
| If                          | Boolean                    | If                                                                                                  |
| Integer-Divide              | Number                     | Returns the integer obtained by truncating the result of an integer divided by a second integer     |
| IsNull                      | Character, Date, or Number | Is null                                                                                             |
| Last-Of-Month               | Date                       | Returns the last day of a month from a date or datetime                                             |

| Calculation keyword | Type      | Description                                                                  |
|---------------------|-----------|------------------------------------------------------------------------------|
| Left                | Character | Returns a specific number of characters, starting at the left of the string  |
| Lower               | Character | Converts uppercase characters to lowercase                                   |
| Mod                 | Number    | Returns the remainder (modulus) of an integer divided by a second integer    |
| Month               | Number    | Returns the month number from a date, datetime, or interval                  |
| Months-Between      | Number    | Returns the integer number of months from a date to a second date            |
| Not                 | Boolean   | Not                                                                          |
| Number-To-String    | Character | Returns the string representation of a number rounded to the next integer    |
| Or                  | Boolean   | Or                                                                           |
| Position            | Number    | Returns the starting position of a string in a second string                 |
| Reverse             | Character | Returns a string with the order of the characters reversed                   |
| Right               | Character | Returns a specific number of characters, starting at the right of the string |
| Round-Down          | Number    | Returns a number rounded down                                                |
| Round-Near          | Number    | Returns a number rounded to the nearest integer                              |
| Round-Up            | Number    | Returns a number rounded up                                                  |
| Round-Zero          | Number    | Returns a number rounded towards zero                                        |
| SqRt                | Number    | Returns the square root of a number                                          |

| Calculation keyword | Type      | Description                                               |
|---------------------|-----------|-----------------------------------------------------------|
| String-To-Number    | Number    | Converts a string to a number                             |
| SubString           | Character | Returns a substring from a string                         |
| Then                | Boolean   | Then                                                      |
| Today               | Date      | Returns the current date according to your computer clock |
| Trim-Leading        | Character | Returns a string with leading spaces removed              |
| Trim-Trailing       | Character | Returns a string with trailing spaces removed             |
| Upper               | Character | Converts lowercase characters to uppercase                |
| Year                | Number    | Returns the year from the date                            |
| Years-Between       | Number    | Returns the number of years from a date to another date   |

### Example

Calc "Order Qty" \* "Price"

## Class

The Class option specifies the data class associated with the column.

The syntax is as follows:

**Class** [*dataclass*]

where *dataclass* is one of Default or no setting, Description, Date, Quantity, Ignore, or Member. The Windows interface equivalents are:

- **Unspecified**
- **Text**
- **Date**
- **Numeric**
- **Ignore**
- **Array Member**

### Example

Class Quantity

## ColSrcType

The ColSrcType option defines the type of data source for the column.

This option is for internal use only.

The syntax is as follows:

**ColSrcType** *colsrcotype*

where *colsrcotype* is one of SAPMeasure, SAPBusinessKey, SAPLevelKey, SAPOther, RLDimensional, OLAPDIMENSIONAL, or SAPCalcmeasure.

### Example

ColSrcType RLDimensional

## Column

The Column option specifies the original name for the column in the data source.

You must specify the column.

If you change a column name in MDL, the object name may differ from the one on the Windows interface. This is because MDL takes the object name from the **Original Name** box on the Column property sheet, whereas Cognos Transformer takes the object name from the **Column Name** box of the Column property sheet.

The syntax is as follows:

**Column** *objCol*

where *objCol* is the object name.

### Example

Column "Product ID"

## ColumnInfo

The ColumnInfo option provides a description of the column in the model.

The syntax is as follows:

**ColumnInfo** *string* [*string*...]

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

ColumnInfo "Gross revenue from product sales"

## Dateconstant

The Dateconstant option must be inserted before any date constant used in a calculation.

The syntax is as follows:

**Dateconstant** '*date*'

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

`months-between (dateconstant '2007-01-01', today)`

## DateLevel

The `DateLevel` option specifies the level of the time dimension associated with the column.

The syntax is as follows:

**DateLevel** *datelevel*

where *datelevel* is one of None, Year, Quarter, Month, Week, or Day.

### Example

`DateLevel Day`

## Decimals

The `Decimals` option specifies the number of decimal spaces in the source data.

You should set this option to the actual value in the data source.

You can also set this option on the Windows interface, by using the **Decimal Places** box on the **Format** tab of the Measure property sheet.

The syntax is as follows:

**Decimals** *uns*

### Example

`Decimals 2`

## Detail

The `Detail` option specifies the degree of detail for the column.

You can select from a context-sensitive list of valid codes in the Windows interface.

For example, if you do not want to include all of the categories in a level, you can set the lowest level of detail to include. That way, you can avoid unwanted entries or duplicate names that need to be qualified by the name of their owning category, such as Brand (OF Tents).

The syntax is as follows:

**Detail** *string*

where *string* can be "Unspecified"

### Example

`Detail "Unspecified"`

## Format

The `Format` option specifies the date input format used by the date values in the column that populates the time dimension.

The syntax is as follows:

**Format** [*dateformat*]

where *dateformat* is one of PreDefined, YMD, DMY, MDY, YM, MY, Y, Q, M, W, or D.

### Example

Format YMD

## InputScale

The InputScale option specifies the number used to scale the data values in the column.

The syntax is as follows:

**InputScale** *number*

where *number* is not greater than 16.

### Example

InputScale 1

## Offset

The Offset option specifies the number by which the column position is offset.

The syntax is as follows:

**Offset** *uns*

### Example

Offset 2

## Origin

The Origin option specifies the type of data source used for the column.

You should not manually set this option.

The syntax is as follows:

**Origin** {*Source*|*Generated*|*Calculated*|*Manual*}

where Generated is the default; Source specifies an IQD data source; Calculated specifies a calculated column; and Manual specifies a manually created column in the model.

### Example

Origin Generated

## Scale

The Scale column option specifies the output scale.

This option is either read directly from the data source or specified in the measure definition. For more information, see “Scale” on page 211.

The syntax is as follows:

**Scale** *uns*

where *uns* is an unsigned number that specifies the output scale.

### Example

Scale 0

## Size

The Size column option specifies the size of certain types of data source.

This column option only applies when the `SourceType` of the associated data source is `PowerHousePortable`, `FixedASCII`, or `FixedASCII_NoCrLf`.

The syntax is as follows:

**Size** *uns*

### Example

Size 1

## Storage

The Storage option specifies the actual storage type used by the source data for the column.

This column option relates directly to the source data.

The syntax is as follows:

**Storage***storage\_type*

where *storage\_type* is one of `Default`, `Int8`, `Int16`, `Int32`, `Float64`, `Text`, `Character`, or `LongText`.

### Example

Storage Int32

## TimeArray

The TimeArray option specifies the type of array used to group items for the time dimension.

The syntax is as follows:

**TimeArray** *timearray*

where *timearray* is one of `Off`, `Quarter`, `Month`, `Month13`, `Quarter6`, `Month18`, `Quarter8`, or `Month24`.

### Example

TimeArray Month13

## TimeArrayCol

The TimeArrayCol option specifies the name of the array used to group items for the time dimension.

The syntax is as follows:

**TimeArrayCol** *string*

### Example

TimeArrayCol "Time"

## TimeArrayMonth

The TimeArrayMonth option specifies the month number on which the time array is based.

The syntax is as follows:

**TimeArrayMonth** *uns*

### Example

TimeArrayMonth 2

---

## currencyrecordopts

Use currencyrecordopts to set the options that apply to the following MDL verbs: CurrencyAdd, CurrencyMake, and CurrencyUpdate.

## BaseCurrency

The BaseCurrency option defines the default currency stored in the Currency Table for the model.

The syntax is as follows:

**BaseCurrency**

where the Windows interface equivalent is to specify a <Base Default> name in the **Currency Record** dialog box, accessible by clicking the **Properties** button on the **Currency Table** dialog box.

### Example

BaseCurrency

## CountryCode

The CountryCode option specifies the 3-character international code used to represent each country or region listed in the Currency Table.

The syntax is as follows:

**CountryCode** *code*

where *code* is a unique identifier for a country or region.

### Example

CountryCode "USA"

## CurrencyCountryLabel

The CurrencyCountryLabel option specifies the name used to uniquely identify each country or region listed in the Currency Table.

The syntax is as follows:

**CurrencyCountryLabel** *label*

where *label* is a unique identifier for a country or region.

### Example

CurrencyCountryLabel "Canada"



## CurrencyDecimals

The `CurrencyDecimals` option specifies the number of decimal places used when displaying the converted currency values for each country or region listed in the Currency Table. However, this value may not be the same as the decimal place setting used in your reporting application. Depending on your implementation, it may be overridden from the Measure property sheet, or at run time.

The syntax is as follows:

**CurrencyDecimals** *decimals*

where *decimals* can be a number from 0 to 9. The default used with the Great Outdoors.mdl sample is 0. The Cognos Transformer Currency Table default is 2.

### Example

CurrencyDecimals 5

## CurrencyFormatOverride

The `CurrencyFormatOverride` option specifies whether the currency format settings can be overridden elsewhere in the IBM Cognos modeling or reporting applications.

The syntax is as follows:

**CurrencyFormatOverride** {True|False}

### Example

CurrencyFormatOverride True

## CurrencyIsEMU

The `CurrencyIsEMU` option specifies whether the country or region is a member of the European Monetary Union (EMU) and therefore uses the euro rather than a national currency.

The syntax is as follows:

**CurrencyIsEmu** {True|False}

### Example

CurrencyIsEmu True

## CurrencySymbol

The `CurrencySymbol` option specifies the symbol used with each currency listed in the Currency Table.

The syntax is as follows:

**CurrencySymbol** *symbol*

where the default *label* is \*.

### Example

CurrencySymbol "\$"

## EmuEntryDate

The EMUEntryDate option specifies the date when the country or region became a member of the European Monetary Union (EMU) and started using the euro rather than a national currency.

The syntax is as follows:

**EmuEntryDate** *date*

where *date* is in YYYYMMDD format

### Example

EmuEntryDate 19990101

## EuroBaseCurrency

The EuroBaseCurrency option establishes the euro as the base currency in the Currency Table for this model.

The syntax is as follows:

**EuroBaseCurrency**

### Example

EuroBaseCurrency

---

## currencytableopts

Use currencytableopts to set the options that apply to the following MDL verbs: CurrencyTableAdd, CurrencyTableMake, CurrencyTableUpdate, and CurrencyTableDelete.

## CurrencyCountryCodeColumn

The CurrencyCountryCodeColumn option specifies the source column that provides the country or region code used in the Currency Table.

The syntax is as follows:

**CurrencyCountryCodeColumn** *objCol*

where *objCol* is the object name and you must specify CurrencyCountryCodeColumn, CurrencyLabelColumn, or both.

### Example

CurrencyCountryCodeColumn "Country\_Code"

## CurrencyDateColumn

The CurrencyDateColumn option specifies the source column that provides the effective date for the conversion rate. It is a mandatory parameter when converting currencies based on information in the Currency Table.

The syntax is as follows:

**CurrencyDateColumn** *objCol*

where *objCol* is the object name.

### Example

CurrencyDateColumn "Currency Date"

## CurrencyLabelColumn

The CurrencyLabelColumn option specifies the source column that provides the currency label used in the Currency Table.

The syntax is as follows:

**CurrencyLabelColumn** *objCol*

where *objCol* is the object name and you must specify CurrencyCountryCodeColumn, CurrencyLabelColumn, or both.

### Example

CurrencyLabelColumn "Currency\_Label"

## CurrencyRateColumn

The CurrencyRateColumn option specifies the source column that provides the conversion rates. It is a mandatory parameter when converting currencies based on information in the Currency Table.

The syntax is as follows:

**CurrencyRateColumn** *objCol*

where *objCol* is the object name.

### Example

CurrencyRateColumn "Conversion\_Rate"

## CurrencyTableType

The CurrencyTableType option specifies the type of Currency Table used in the model.

The syntax is as follows:

**CurrencyTableType** *type*

where *type* is one of BaseTable, EuroTable, or OtherTable.

### Example

CurrencyTableType BaseTable

---

## deletionopts

Use deletionopts to set the options that apply to the MDL verb DeletionListUpdate.

## CalcDef

The CalcDef option specifies a calculation definition used in the dimension.

The syntax is as follows:

**CalcDef** *objDimCalcDef*

where *objDimCalcDef* is the object identifier.

### Example

CalcDef 6375

## Column

The Column option specifies a column used in the dimension.

The syntax is as follows:

**Column** *objCol*

where *objCol* is the object identifier.

### Example

Column 1092

## Cube

The Cube option specifies a cube used in the model.

The syntax is as follows:

**Cube** *objCub*

where *objCub* is the object identifier.

### Example

Cube 1601

## DataSource

The DataSource option specifies a data source used for the model.

The syntax is as follows:

**DataSource** *objDataSource*

where *objDataSource* is the object identifier.

### Example

DataSource 4213

## Dimension

The Dimension option specifies a dimension used in the model.

The syntax is as follows:

**Dimension** *objDim*

where *objDim* is the object identifier.

### Example

Dimension 1844

## Levels

The Level option specifies a level in a dimension used in the model.

The syntax is as follows:

**Levels** *objLev*

where *objLev* is the object identifier.

### Example

Levels 1385

## Measure

The Measure option specifies a measure used in the model.

The syntax is as follows:

**Measure** *objMeasure*

where *objMeasure* is the object identifier.

### Example

Measure 1500

## Signon

The Signon option specifies a signon used in the model.

The syntax is as follows:

**Signon** *objSignon*

where *objSignon* is the object identifier.

### Example

Signon 9876

## View

The View option specifies a dimension or security view used in the model.

For more information about custom views based on IBM Cognos security objects, see the security chapter of the Cognos Transformer *User Guide*.

The syntax is as follows:

**View** *objView*

where *objView* is the object identifier.

### Example

View 1092

---

## dimopts

The dimopts options apply to the following MDL verbs: DimAdd, DimMake, and DimUpdate.

## Association

The Association option specifies the associated column from the data source.

The syntax is as follows:

**Association** *objCol*

where *objCol* is the object name.

## Example

Association "Time Category Code"

## DaysInWeek

The DaysInWeek option specifies each day in the week as a unique, but non-sequential number.

To specify the number of days in each week, add the appropriate day codes. For example, a Monday-to-Friday week is represented by  $(2+4+8+16+32) = 62$ . A seven-day Sunday-to-Saturday week (the default) is represented by the number 127.

The syntax is as follows:

**DaysInWeek** *bignum*

where *bignum* is based the sum of the bit representations for the days in the week, as follows:

- Sunday = 1
- Monday = 2
- Tuesday = 4
- Wednesday = 8
- Thursday = 16
- Friday = 32
- Saturday = 64

## Example

DaysInWeek 62

## DimDefaultCategory

The DimDefaultCategory option specifies a new default category, at a lower level in the cube, where a scenario dimension opens, to show report users meaningful data values.

The syntax is as follows:

**DimDefaultCategory** *objDimDefaultCategory*

where *objobjDimDefaultCategory* is the object identifier.

## Example

DimUpdate Dimension 185 "Products" DimType Regular NewCatsLock False  
ExcludeAutoPartitioning False DimDefaultCategory 293

## DimInfo

The DimInfo option provides additional information about the dimension.

The syntax is as follows:

**DimInfo** *string* [*string...*]

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

`DimInfo "Products carried by the Great Outdoors Company."`

## DimType

The `DimType` option specifies the dimension type. Note that time dimensions are defined as a specific type (`Date`) but scenario dimensions are not.

The syntax is as follows:

**DimType** {`Regular`|`Date`|`NonStandard`}

where `NonStandard` is only used for time dimensions in which the associated data source has `PreSummarized` set to `True`, and the `Association` option is either blank or not set.

### Example

`DimType Date`

## EarliestDate

The `EarliestDate` option specifies the earliest valid date for the model.

The syntax is as follows:

**EarliestDate** *date*

where *date* is in the format `YYYYMMDD`. The default is `19000101`.

### Example

`EarliestDate 19000101`

## ExcludeAutoPartitioning

The `ExcludeAutoPartitioning` option specifies whether auto-partitioning will be used as a model optimization strategy.

The syntax is as follows:

**ExcludeAutoPartitioning** {`True`|`False`}

where the default is `False`.

### Example

`ExcludeAutoPartitioning True`

## LatestDate

The `LatestDate` option specifies the latest valid date for the model.

The syntax is as follows:

**LatestDate** *date*

where *date* is in the format `YYYYMMDD`. The default is `99991231`.

### Example

`LatestDate 99991231`

## ManualPeriods

The ManualPeriods option specifies whether the current time period will be manually or automatically set.

The syntax is as follows:

**ManualPeriods** {True|False}

where the default is False, which is equivalent to selecting the **Automatically Set Current Time Period** option on the Windows interface. True means that the current time period will be manually set.

### Example

ManualPeriods False

## NewCatsLock

The NewCatsLock option specifies whether new categories will be automatically created in the dimension as they are encountered in the data source.

The syntax is as follows:

**NewCatsLock** {True|False}

where the default is False. True means that the dimension is locked.

### Example

NewCatsLock False

---

## filteropts

Use filteropts to set the options that apply to the following MDL verbs: CognosPackageFilterAdd, CognosPackageFilterDelete and CognosPackageFilterUpdate.

## CognosPackageFilterRef

The CognosPackageFilterRef option specifies a valid filter reference in an IBM Cognos package or report data source.

**CognosPackageFilterRef** *filter reference*

### Example

CognosPackageFilterRef "[gosales\_goretailers].[Asia Pacific]"

## DATASOURCE

The DATASOURCE option specifies the ID of the IBM Cognos package or report data source.

**DATASOURCE** *datasourceID*

### Example

DATASOURCE 103

## CognosPackageFilterDelete

The CognosPackageFilterDelete option is used to delete filters from the MDL script.



The syntax is as follows:

**CognosPackageFilterDelete** *filter\_name*

### Example

CognosPackageFilterDelete "Tents1"

## CognosPackageFilterUpdate

The CognosPackageFilterUpdate option is used to update filters that are part of the MDL script.

The syntax is as follows:

**CognosPackageFilterUpdate** "*filter\_name*" DATASOURCE *query\_id*  
Cognos PackageFilterRef "*package\_reference\_name*"

where *query\_id* is the object id of the query that is based on the package and *package\_reference\_name* is the name of the package followed by the name of the filter. The package that is in the *package\_reference\_name* must be in the data source that is being queried.

### Example

CognosPackageFilterUpdate "Tents2" DATASOURCE 105 CognosPackageFilterRef "  
[oracle\_gosales].[Tents]"

## ExpMark

The ExpMark option specifies the start of the SQL string used to query the column in the data source. The end of the string is denoted by ExpMarkEnd.

The syntax is as follows:

**ExpMark** *SQLstring* **ExpMarkEnd**

## FilterDescription

The FilterDescription option adds a description to explain the filter used when querying a column in the data source.

The syntax is as follows:

**Description** *string* [*string...*]

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

Description "Filters out managers located in North America."

---

## levelopts

Use levelopts to set the options that apply to the following MDL verbs: LevelAdd, LevelMake, and LevelUpdate.

## Association

The Association option defines the connection between a level and columns in a data source.

The syntax is as follows:

**Association** *objCol*

where *objCol* is the object name.

### Examples

Association "Time Category Code"

## Blanks

The Blanks option indicates how missing values are represented within that level.

For more information about how null and missing values are treated in the supported IBM Cognos reporting applications, see the Measures chapter of the *Cognos Transformer User Guide*.

The syntax is as follows:

**Blanks** *string*

where "N/A" represents missing values, or those which are "Not Available".

### Example

Blanks "N/A"

## CategoryCode

The CategoryCode option specifies the code used to uniquely identify a category at that level.

The syntax is as follows:

**CategoryCode** *objCol*

where *objCol* is the object name.

### Example

CategoryCode "Product Line"

## CatLabFormat

The CatLabFormat option specifies the format used for the date category labels at that level.

The syntax is as follows:

**CatLabFormat** *string*

where *string* is the desired format.

### Example

The following format string produces the label 2006 Q3

CatLabFormat 'YYYY "Q"Q'

## DateFunction

The DateFunction option specifies the time period calculation used to generate that level in the time dimension.

The syntax is as follows:

**DateFunction** *datefunction*

where *datefunction* is one of None, Year, LunarYear, Quarter, LunarQuarter, Month, LunarMonth, LunarMonth445, LunarMonth454, LunarMonth544, Week, or Day

### Example

The following date function generates lunar months, where each 13-week lunar quarter consists of a 4-week month, a 4-week month, and a 5-week month:

```
CDateFunction LunarMonth445
```

## Description

The Description option adds a description of the source column associated with the level.

The syntax is as follows:

**Description** *objCol*

where *objCol* is the object name of a column.

### Example

```
Description "Product types"
```

## Filtered

The Filtered option specifies whether the categories in the level are excluded (hidden).

The syntax is as follows:

**Filtered** {True|False}

### Example

```
Filtered True
```

## Format

The Format option specifies the date format used for the time categories in the level.

The syntax is as follows:

**Format** *string*

where *string* is a recognized date format code, such as YMD.

### Example

```
Format "YMD"
```

## Generate

The Generate option specifies the generation date to use when determining which categories to generate.

The syntax is as follows:

**Generate** *generatedate*

where *generatedate* is one of Default, All, or Need. On the Windows interface, selecting the check box generates all categories in the period. Clearing the check box is equivalent to the Need setting.

### Example

Generate All

## Inclusion

The Inclusion option specifies how the categories in a level display in the model and in the resulting cubes and reports.

The syntax is as follows:

**Inclusion** *inclusion*

where *inclusion* is one of Default, Generate, Suppress, Retain, or Filtered.

On the Windows interface, equivalents display on the **Inclusion** or **Diagram** menus. Note that Generate equates to **Always Include**, Retain equates to **Include When Needed** or **Suppress Blank Categories**, and Filtered equates to **Exclude**.

### Example

Inclusion Suppress

## LevelInfo

The LevelInfo option adds a description for the level.

The syntax is as follows:

**LevelInfo** *string* [*string*...]

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

LevelInfo "The reseller type influences the amount of sales."

## Label

The Label option specifies a label for the level.

The syntax is as follows:

**Label** *objCol*

where *objCol* is the object name.

### Example

Label "Customer Name"

## NewCatsLock

The NewCatsLock option specifies whether new categories will be automatically created in the level as they are encountered in the data source.

The syntax is as follows:

**NewCatsLock** {True|False}

where the default is False. True means that the dimension is locked.

### Example

```
NewCatsLock False
```

## OrderBy

The OrderBy option specifies the value to use as the basis for ordering categories, within the specified drill category.

The syntax is as follows:

```
OrderBy Drill objDrillCat Value  
string
```

where *objDrillCat* can be the object name, object identifier, or both; and *string* is what displays in the **Order Value** box on the Windows interface.

### Example

```
OrderBy Drill 6881 Value "200712"
```

## SortOrder

The SortOrder option specifies the type of data used as the basis for ordering the categories, such as text. It is followed by the SortAs option, which determines the sorting sequence, which can be in either ascending or descending order.

If the data is alphanumeric, use the Character storage type. If the data is purely numeric, use the Float64 storage type.

The syntax is as follows:

```
SortOrder Drill objDrillCat Column objCol SortOrder storageType  
SortAs {Ascending|Descending}
```

where *objDrillCat* and *objCol* can be the object name, object identifier, or both; and *storageType* is one of Default, Int8, Int16, Int32, Float64, Text, Character, or Longtext.

### Example

```
SortOrder Character
```

## SortAs

The SortAs option determines the sorting sequence, which can be in either ascending or descending order. It follows the SortOrder option, which specifies the type of data used as the basis for sorting.

If the data is alphanumeric, use the Character storage type. If the data is purely numeric, use the Float64 storage type.

The syntax is as follows:

```
SortOrder Drill objDrillCat Column objCol SortOrder storageType  
SortAs {Ascending|Descending}
```

where *objDrillCat* and *objCol* can be the object name, object identifier, or both; and *storageType* is one of Default, Int8, Int16, Int32, Float64, Text, Character, or Longtext.

### Example

SortAs Ascending

## Partition

The Partition option specifies the partition number assigned to that level.

The syntax is as follows:

**Partition** *uns*

where *uns* is an unsigned number from 0 to 15.

### Example

Partition 3

## RefreshLabel

The RefreshLabel option specifies whether to refresh the label for the level.

The syntax is as follows:

**RefreshLabel** {True|False}

### Example

RefreshLabel True

## RefreshDescription

The RefreshDescription option specifies whether to refresh the description for the level.

The syntax is as follows:

**RefreshDescription** {True|False}

### Example

RefreshDescription False

## RefreshShortName

The RefreshShortName option specifies whether to refresh the short name for the level.

The syntax is as follows:

**RefreshShortName** {True|False}

### Example

RefreshShortName False

## Share

The Share option specifies the ancestor level with which the current level has a shared, or proportional, relationship.

The Share function computes the share that an item is, relative to its parent. For more information about this Cognos Transformer-specific function, see the Cognos Transformer *User Guide*.

The syntax is as follows:

**Share** *objLevel*

where *objLevel* can be the object name or object identifier. *objLevel* must be an ancestor in the same dimension.

### Example

Share "Product Line"

## ShortName

The ShortName option specifies the short name that identifies the level.

The syntax is as follows:

**ShortName** *objCol*

where *objCol* is the object name.

### Example

ShortName "CUST\_SHRTN"

## Source

The Source option specifies the data column that serves as the source for this level.

The syntax is as follows:

**Source** *objCol*

where *objCol* is the object name.

### Example

Source "Customer Number"

## Suppressed

The Suppressed option specifies whether data is to be suppressed (hidden) for this level.

The syntax is as follows:

**Suppressed** {True|False}

### Example

Suppressed True

## TimeRank

The TimeRank option specifies the relative ranking of user-defined levels in the time dimension.

Normally this value is automatically set by Cognos Transformer to remove ambiguities that can arise, for example, in relative time calculations. It is the value relative to other date value ranks rather than the absolute value, that is important. The Windows interface equivalent is the **Time Level Ranking** field.

The syntax is as follows:

**TimeRank** *uns*

where *uns* is an unsigned number representing the time-level ranking.

### Example

TimeRank 10

## UniqueCategories

The UniqueCategories option specifies whether the categories in this level are unique.

The syntax is as follows:

**UniqueCategories** {True|False}

### Example

UniqueCategories True

## UniqueMove

The UniqueMove option specifies whether the moved categories are unique.

The syntax is as follows:

**UniqueMove** {True|False}

### Example

UniqueMove True

---

## meaopts

Use meaopts to set the options that apply to the following MDL verbs: MeasureAdd, MeasureMake, and MeasureUpdate.

## ActivityMeasure

The ActivityMeasure option specifies the criteria used to determine the category count.

By default, the non-zero-value categories associated with all measures in the model are counted.

To create a Category Count, you can also use the Dimension or Rollup options. For more information about these alternatives, see “Dimension” on page 207 and “Rollup” on page 211.

The syntax is as follows:

**ActivityMeasure** *objMeasure*

where *objMeasure* is the object name. The default, when no ActivityMeasure is specified but one or more measures exist for a category, is to return a count.

### Example

The scope of this category count is any existing measure:

```
MeasureMake 159 "Revenue" Levels 139 RollupCategoryCount Storage DefaultScale  
0 Decimals 0 Sign False IsCurrency False DrillThrough False EndList
```

The following category count is for the specific measure referenced using ActivityMeasure:



```
Measure 111 "Cost" Levels 117 ActivityMeasure "Sales"
Rollup CategoryCount Storage Default Scale 0 Decimals 0 Sign False
IsCurrency False DrillThrough False EndList
```

## Allocation

The Allocation option specifies the type of allocation and a measure to which it applies.

The syntax is as follows:

```
Allocation allocation {AllocationMeasure objMeasure}
```

where *allocation* is one of Default, None, Constant, or Allocate. *objMeasure* specifies the measure and is the object name or object identifier.

### Example

```
Allocation None
```

## Association

The Association option specifies the source column associated with this measure.

The syntax is as follows:

```
Association objCol
```

where *objCol* is the column name.

### Example

```
Association "Cost"
```

## Calc

The Calc option specifies a calculation and the measure(s) to which it applies.

The syntax is as follows:

```
Calc keywords objects
```

where *calc* is a mixture of *objects* and *keywords*.

*objects* consist of the object name, optionally followed by the at sign (@) and the object identifier, such as "Revenue@259". If object identifiers are suppressed, *objects* are identified by their object names only.

The measure calculation keywords supported by Cognos Transformer are as follows:

| Calculation keyword | Type | Description                 |
|---------------------|------|-----------------------------|
| ISNULL              | N/A  | zero                        |
| IF                  | N/A  | conditional IF expression   |
| THEN                | N/A  | conditional THEN expression |
| ELSE                | N/A  | conditional ELSE expression |

| Calculation keyword | Type                       | Description                                              |
|---------------------|----------------------------|----------------------------------------------------------|
| AND                 | N/A                        | both                                                     |
| OR                  | N/A                        | either                                                   |
| NULL                | N/A                        | does not exist                                           |
| !=                  | N/A                        | not equal to                                             |
| =                   | N/A                        | equal to                                                 |
| <                   | N/A                        | less than                                                |
| <=                  | N/A                        | less than or equal to                                    |
| >                   | N/A                        | greater than                                             |
| >=                  | N/A                        | greater than or equal to                                 |
| /                   | Number                     | divided by                                               |
| -                   | Date or Number             | minus                                                    |
| *                   | Number                     | multiplied by                                            |
| +                   | Character, Date, or Number | plus                                                     |
| ^                   | Number                     | Returns a number raised to the power of a second number. |
| Absolute            | Number                     | Converts numbers to their unsigned value.                |
| Average             | Number                     | Creates an arithmetic mean.                              |
| -                   | Date or Number             | minus                                                    |
| *                   | Number                     | multiplied by                                            |
| +                   | Character, Date, or Number | plus                                                     |
| Max                 | Number                     | maximum instance                                         |
| Min                 | Number                     | minimum instance                                         |
| Percent             | Number                     | Computes the percentage.                                 |

## Example

The following example represents an if-then-else calculation definition for "Revenue":

```
Measure 173 "Revenue" calc IF (ISNULL("Cost@177"+"Quantity@181"))  
THEN ("Cost@177") ELSE ("Quantity@181")
```

## Decimals

The Decimals option specifies the number of decimal spaces in the source data.

You should set this option to the actual value in the data source.

You can also set this option on the Windows interface by using the **Decimal Places** box on the **Format** tab of the Measure property sheet.

The syntax is as follows:

**Decimals** *uns*

## Example

Decimals 2

## Dimension

The Dimension option specifies the drill category, levels, and/or dimension to which the measure applies.

If the measure is a Category Count, you can also use the ActivityMeasure or Rollup options. For more information about these alternatives, see “ActivityMeasure” on page 204 and “Rollup” on page 211.

The syntax is as follows:

**Dimension** *objDim Drill objDrillCat Levels objLevel*

where *objDim*, *objDrillCat*, and *objLevel* are the relevant object identifiers.

## Example

Dimension "Products" Levels "Product ID"

## DrillThrough

The DrillThrough option specifies whether drill-through actions are enabled and lists the supported target reports, such as the relevant .imr file for Impromptu Query Definition (IQD) data sources.

The syntax is as follows:

**DrillThrough** {True|False} [ *string*] [*string*...] **EndList**

where *string* is a report name with optional path.

## Example

In this example, the drill-through operation is not selected:

DrillThrough False EndList

In this example, the drill-through operation is enabled to the specified .imr report:

```
DrillThrough True "c:installation_directory\bsc_msrs.imr"EndList
```

## DuplicateRollup

The `DuplicateRollup` option specifies how records with duplicate values will be rolled up or summarized.

The syntax is as follows:

```
DuplicateRollupduplicatesrollup
```

where *duplicatesrollup* is one of Default, Sum, Minimum, Maximum, Average, First, or Last.

### Example

In this example, the rollup function is explicitly set to add (sum) all duplicate records:

```
DuplicateRollup Sum
```

## DuplicateWeight

The `DuplicateWeight` option, along with the time state, specifies the weighting factors and functions used to obtain the weighted average of duplicate records for a measure.

The syntax is as follows:

```
DuplicateWeight objMeasure
```

where *objMeasure* is the object name.

### Example

In this example, the **Revenue** measure is the weighting factor to use when determining the average rollup value of a set of duplicate records:

```
DuplicateWeight "Revenue"
```

## Exclude

The `Exclude` option, followed by a list of excluded objects, restricts the scope of drill-through options so that only the non-excluded level(s) can serve as a starting point for drill-through operations. Use with the `DrillThrough` option to ensure that report users navigate directly to the relevant portion of the cube before they begin a drill-through operation.

For each or cube or measure for which you want to restrict drill-through by level, you must specify the relevant dimension and levels, and any drill-through targets to which the restriction applies.

You must use MDL if you want to exclude levels in a sub-dimension, because these are not displayed on the Dimension map of the Windows interface.

The syntax is as follows:

```
Exclude [Dimension objDim] [Drill objDrill] [Levels objLevel]
```

where *objDim*, *objLevels*, and *objDrill* can be the unique object identifiers, names, or both.

## Example

In this example, the **State** and **Market** levels in the **Region** and **Sales** dimensions are excluded for the specified cube drill-through operations:

```
DrillThrough True ... "C:\path_to_cube.mdc" "Description text" Exclude Dimension
"Region" Exclude Levels 219 "State" Exclude Dimension "Sales" Exclude Levels
"Market" EndExclude "C:\path_to_cube2.mdc" "Description text2" EndList
```

## Format

The **Format** option specifies the measure format and the number of decimal places to use.

The syntax is as follows:

**Format** *string*

where *string* is the format, followed by a tilde (~), and the number of decimal places.

## Example

In this example, the measure format is `#,##0` and the number of decimal places is set to 2:

```
Format "#,##0~2"
```

## IgnoreMissingValue

The **IgnoreMissingValue** option specifies whether to ignore null and missing (NA) values when performing certain kinds of time-state rollup (Average and Weighted Average). If you do not specify the option when you create, make, or update a measure, the default setting (include these values) applies.

You cannot use the **IgnoreMissingValue** option with time-state rollups of type **None**, **First Period**, **Last Period**, or **Current Period**. Null and missing values are always included when aggregating or calculating these kinds of rollup.

Null and missing data values are always excluded from **Min** and **Max** calculations for rollups, whether they are set by Cognos Transformer to display as 0 or na (the NA setting).

If you do not specify this option, its value is assumed to be **False**.

For more information about specifying measures, see “**MeasureMake**” on page 130.

The syntax is as follows:

**TimeStateRollup** *type*

where *type* is one of **Average** or **Weighted Average**.

## Example

This example uses structured MDL to ignore missing values for a **Weighted Average** time state rollup:

```
Measure 173 "Cost" TimeStateRollup Average TimeStateWeight "Outlet"
IgnoreMissingValue True Storage Default OutPutScale 0 Decimals
0 ReverseSign False IsCurrency False IsFolder False
```

```
WeightId 243 DrillThrough False EndList Associations 175
"Revenue" AssociationType Type_Query
AssociationRole Role_Source AssociationReferenced "Revenue"
```

This example uses verb MDL to ignore missing values for an Average time state rollup:

```
MeasureCreate 173 "Profit" TimeStateRollup Average IgnoreMissingValue
True Storage Default OutPutScale 0 Decimals 0 ReverseSign False
IsCurrency False IsFolder False WeightId 243 DrillThrough
False EndList Associations 175 "Revenue" AssociationType Type_Query
AssociationRole Role_Source AssociationReferenced "Revenue"
```

## IsCurrency

The IsCurrency option specifies whether the measure is a currency value.

The syntax is as follows:

```
IsCurrency {True|False}
```

### Example

```
IsCurrency True
```

## IsFolder

The IsFolder option specifies whether the measure is a folder that groups several measures.

The syntax is as follows:

```
IsFolder {True|False}
```

### Example

```
IsFolder True
```

## Label

The Label option specifies the label used for the measure.

The syntax is as follows:

```
Label string
```

### Example

```
Label "Qty"
```

## MeasureInfo

The MeasureInfo option provides a description of the measure.

The syntax is as follows:

```
MeasureInfo string [string...]
```

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

```
MeasureInfo "Cost to purchase products"
```

## Missing

The Missing option specifies how records with missing or null values are to be represented in the reporting components.

The syntax is as follows:

**Missing** [*missingvalue*]

where *missingvalue* is one of Default, Zero, or NA (reports show na).

### Example

Missing Zero

## Rollup

The Rollup option specifies how measure values are summarized or rolled up, across each reporting time period.

The External rollup option indicates that the measure was rolled-up before it was imported into Cognos Transformer, and so retains the summarization method established in the data source.

For a Category Count measure, you can also use the ActivityMeasure or Dimension options. For more information about these alternatives, see “ActivityMeasure” on page 204 and “Dimension” on page 207.

The syntax is as follows:

**Rollup** [*rollup*]

where *rollup* is one of CategoryCount, Default, Sum, Minimum, Maximum, Average, Count, CountAll, Any, None, or External.

### Example

Rollup Average

## Parent

The Parent option uniquely identifies the parent object of the measure, where the model contains a hierarchy of measures.

The syntax is as follows:

**Parent** *objMeasure*

where *objMeasure* is the unique identifier of the parent.

### Example

Parent 4719

## Scale

The Scale option specifies the output scale for the measure.

The syntax is as follows:

**Scale** *uns*

where *uns* is an unsigned number and zero (0) signifies no change in scale.

### Example

Scale 0

## ShortName

The ShortName option specifies the short name used to represent the measure.

The syntax is as follows:

**ShortName** *string*

### Example

ShortName "QtySold"

## Sign

The Sign option specifies whether the sign of a measure value is to be reversed, changing its value from a negative to a positive number, or from a positive to a negative number. Use this option to convert values into the form required by specific financial reports, such as debits and credits, or assets and liabilities.

The syntax is as follows:

**Sign** {True|False}

### Example

Sign False

## Storage

The Storage option specifies the data type used to store the source values for this measure.

The syntax is as follows:

**StorageType** [*storagetype*]

where *storagetype* is one of Default, Int8, Int16, Int32, Float64, Text, Character, or LongText.

### Example

Storage Float64

## TimeStateRollup

The TimeStateRollup option specifies the function used to summarize or roll up measure values for a specific time period.

**Note:** Time-state rollups only occur at run time. This is why External can be specified as a rollup parameter, but not as a timerollup parameter.

The syntax is as follows:

**TimeStateRollup** [*timerollup*]

where *timerollup* is one of Default, Minimum, Maximum, First, Last, Current, Average, or Summary.



## Example

This example uses verb MDL to create an Average time state rollup for the Profit measure, and ignore any missing values:

```
MeasureCreate 173 "Profit" TimeStateRollup Average IgnoreMissingValue True
Storage Default OutPutScale 0 Decimals 0 ReverseSign False IsCurrency False IsFolder False
WeightId 243 DrillThrough False EndList Associations 175 "Revenue" AssociationType Type_Query
AssociationRole Role_Source AssociationReferenced "Revenue"
```

## TimeStateWeight

The `TimeStateWeight` option specifies the object used to obtain the weighting for a time state rollup. Note that the `TimeStateRollup` option must be explicitly set to Average.

The syntax is as follows:

```
TimeStateWeight objMeasure
```

where *objMeasure* is the object name.

## Example

This example uses structured MDL to create an average Cost measure, weighted by, or in proportion to, the measures associated with the Outlet object. Missing values are ignored.

```
Measure 173 "Cost" TimeStateRollup Average TimeStateWeight "Outlet"
IgnoreMissingValue True Storage Default OutPutScale 0 Decimals 0 ReverseSign False
IsCurrency False IsFolder False WeightId 243 DrillThrough False EndList
Associations 175 "Revenue" AssociationType Type_Query AssociationRole Role_Source
AssociationReferenced "Revenue"
```

## Timing

The `Timing` option specifies the timing that applies to the measure; that is, before or after roll-up.

The syntax is as follows:

```
Timing [measuretiming]
```

where *measuretiming* is one of Default, Before\_Rollup, or After\_Rollup.

## Example

```
Timing After_Rollup
```

## Weight

The `Weight` option specifies the measure to use for weighting the time-state rollup. This option requires an object name, whereas the `WeightID` option uses the object identifier. For both, the `TimeStateRollup` option must be set to Average.

The syntax is as follows:

```
Weight objMeasure
```

where *objMeasure* is the object name.

## Example

```
Weight "Revenue"
```

## WeightID

The **WeightID** option specifies the measure to use for weighting the time-state rollup. This option requires an object identifier, whereas the **Weight** option uses the object name. For both, the **TimeStateRollup** option must be set to **Average**.

The syntax is as follows:

**WeightID** *objMeasure*

where *objMeasure* is the object identifier.

### Example

Weight 259

---

## powercubeopts

Use **powercubeopts** to set the options that apply to the following MDL verbs: **CubeAdd**, **CubeMake**, **CubeUpdate**, **CubeGroupAdd**, **CubeGroupMake**, **CubeGroupUpdate**, **CubeGroupCubeAdd**, **CubeGroupCubeMake**, and **CubeGroupCubeUpdate**.

## BlockParentTotals

The **BlockParentTotals** option specifies whether the total values for parent categories are included or hidden for the specified cube or cube group.

Use this option to display the word "denied" in the reporting component, rather than a total value that would represent an inaccurate rollup of only non-excluded categories. The Windows equivalent is to select the **Block Total Values for Parent Categories with Excluded Children** option when categories have been excluded from a custom view. For this to work properly, you must ensure that the appropriate security objects have been enabled.

The syntax is as follows:

**BlockParentTotals** {True|False}

where **False** is the default.

### Example

BlockParentTotals True

## Caching

The **Caching** option specifies whether crosstab caching is enabled. The option sets a flag in the .mdc cube file.

The syntax is as follows:

**Caching** {True|False}

### Example

Caching True

## Compress

The **Compress** option specifies whether the cube is compressed. This option may appear in legacy cubes but is not supported as an optimization technique for IBM Cognos.

The syntax is as follows:

**Compress** {True|False}

### Example

Compress False

## Consolidate

The Consolidate option specifies the record consolidation method used for the cube or cube group.

The syntax is as follows:

**Consolidate***consolidate*

where *consolidate* is one of Default, Yes, No, or PreSorted.

### Example

Consolidate Yes

## ConsolidatedRecords

The ConsolidatedRecords option specifies the number of records consolidated during each partitioning pass.

The syntax is as follows:

**ConsolidatedRecords** *bignum*

where the default is 10,000,000 records.

### Example

ConsolidatedRecords 10,000,000

## CubeCreation

The CubeCreation option enables or disables the creation of specific cubes in the model.

The syntax is as follows:

**CubeCreation***makecube*

where *makecube* is one of Default, Implicit, On, or Off.

### Example

CubeCreation On

## CubeCycle

The CubeCycle option is related to internal Cognos Transformer processing and should not be set.

The syntax is as follows:

**CubeCycle** *bignum*

### Example

CubeCycle 604

## CubeStamp

The CubeStamp option is related to internal Cognos Transformer processing and should not be set.

The syntax is as follows:

**CubeStamp** *bignum*

### Example

CubeStamp 861985194

## CubeUpdateLock

The CubeUpdateLock option specifies whether no cubes or all cubes are locked for update.

The syntax is as follows:

**CubeUpdateLock** {None|All}

### Example

CubeUpdateLock None

## Database

The Database option specifies the database providing the source data for a cube or cube group. For example, you can use this option to identify the source for an IQD signon.

The syntax is as follows:

**DataBase** *objSignon*

where *objSignon* can be the object name, object identifier, or both.

### Example

Database 6317

## DatabaseInfo

The DatabaseInfo option provides information about the type of database used with the cube or cube group.

The syntax is as follows:

**DatabaseInfo** *string*

where the database type and settings are separated by semi-colons.

### Example

DatabaseInfo "Local;;"

## DataSource

The DataSource option specifies a main Impromptu Query Definition (IQD) data source and one or more alternate data sources, with their associated options.

For more information on IBM Cognos data sources and options, see “appqueryopts” on page 159.

The syntax is as follows:

```
DataSource objDataSource AlternateSource filename [altdatasourceopts]
```

where *objDataSource* is the object name and *altdatasourceopts* is one or more of the following:

- *Isolationnumber*
- *DmsSignonobjSignon*
- *IMRNamestring*
- *SourceSignonList signon signons...*] **EndList**
- *SQLstring*
- *Stampnumber*

## Example

The following example shows the SQL for an Impromptu Query Definition (IQD) data source:

```
DataSourceMake 103 "Report1" Separator " " SourceType DataSource DecimalSep "  
"Thousandsep " " Columns True Timing PopYesCreateDefault Source "C:\Report1.iqd"  
SQL 'select T1."PROD_TYPE" as c1,' 'T1."PROD_LINE" as c2, T1."PRODUCT" ' as c3, T1.  
"PROD_COST" as c4,' 'T2."ORDER_DT" as c5 from "ORDRDETL" T3,' ' "PRODUCT" T1,"ORDER"  
T2' 'where (T3."PROD_NO" = T1."PROD_NO")' 'and (T2."ORDER_NO" = T3."ORDER_NO") and' '  
(T1."PROD_TYPE" = "Outdoor Products)' " Isolation 0 SourceSignonList 105 1105  
EndList ImrName "C:\Report1.imr" Stamp 930750524 Speed False SetCurrent True  
ServerSource False Presummarized False
```

## DeployLocations

The **DeployLocations** option specifies a list of deployment locations for the PowerCube.

The syntax is as follows:

```
DeployLocations  
value Endlist
```

## Example

```
DeployLocations "C:\Cubes" Endlist
```

## DeployType

The **DeployType** option specifies the type of PowerCube deployment strategy to use for the PowerCube.

The syntax is as follows:

```
DeployTypedeploytype
```

where *deploytype* is one of **DeployNone**, **DeploySwapTogether**, or **DeploySwapSingle** (not available in this release).

## Example

```
DeployType DeploySwapTogether
```

## DetailLevel

The `DetailLevel` option identifies the level that contains the categories on which individual cubes in a cube group are based. Use to create a cube for each category in the level. Duplicate level names in the list are qualified by the name of the owning category, as in Brand (OF Tent).

The syntax is as follows:

```
DetailLevel objLevel
```

where *objLevel* can be the object name.

### Example

```
DetailLevel "Product Type"
```

## DrillThrough

The `DrillThrough` option specifies whether drill-through action is enabled for the cube or cube group, and lists the target report objects.

The syntax is as follows:

```
DrillThrough [True|False] reportnames EndList
```

where *reportnames* are the reports, as listed in the **Custom Reports** and **Report Description** boxes on the Windows interface.

### Example

In this example, drill through is enabled for the specified .mdc cube file:

```
DrillThrough True "c:installation_directory\all_regions.mdc"EndList
```

## Exclude

The `Exclude` option is used, followed by a list of excluded objects, to restrict the scope of drill-through activity to targets related to a specific non-excluded drill category or dimension level. By so doing, the modeler can ensure that users navigate directly to the relevant portion of the cube before they begin their drill-through operation.

For each or cube or measure for which to want to restrict drill-through activity by level, you must specify the relevant dimension and levels, and any drill-through targets to which the restriction applies.

You must use MDL if you want to exclude levels in a sub-dimension, because these are not displayed on the **Dimension Map** of the Windows interface.

The syntax is as follows:

```
Exclude [Dimension objDim] [Drill objDrill] Levels objLevel
```

where *objDim*, *objLevels*, and *objDrill* can be the unique object identifiers, names, or both.

### Example

In this example, the State and Market levels in the Region and Sales dimensions are excluded for the specified cube drill-through operations:

```
DrillThrough True ... "C:\path_to_cube.mdc" "Description text" Exclude Dimension
"Region" Exclude Levels 219 "State" Exclude Dimension "Sales" Exclude Levels
"Market" EndExclude "C:\path_to_cube2.mdc" "Description text2"EndList
```

## IncrementalUpdate

The `IncrementalUpdate` option specifies whether incremental updates are enabled for this cube or cube group.

An object identifier is automatically assigned when the cube is incrementally updated.

The syntax is as follows:

```
IncrementalUpdate {True|False}
```

### Example

```
IncrementalUpdate True
```

## Information

The `Information` option provides a description of the cube or cube group.

The syntax is as follows:

```
Information string [string...]
```

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

```
Information "GO Sales Sample PowerCube."
```

## MDCFile

The `MDCFile` option specifies the path and file name used for the .mdc cube file.

The syntax is as follows:

```
MDCFile string
```

### Example

```
MDCFile "c:\Temp\outdoors.mdc"
```

## MeasureName

The `MeasureName` option specifies the name used for a cube measure or group of measures.

The syntax is as follows:

```
MeasureName string
```

### Example

```
MeasureName "Basic Measures"
```

## Optimize

The `Optimize` option specifies the optimization strategy applied to the cube or cube group. For more information about optimizing cube build times, see the Cognos Transformer User Guide.

The syntax is as follows:

**Optimize** *cubeoptimize*

where *cubeoptimize* is one of Default, Categories, Datapasses, DirectCreate, PriorMarking, or AutoPartition.

### Example

Optimize Categories

## PartitionSize

The PartitionSize option specifies the number of records included in each partition.

The syntax is as follows:

**PartitionSize** *bignum*

### Example

PartitionSize 500,000

## PassesNumber

The PassesNumber option specifies the number of partitioning passes to run.

The syntax is as follows:

**PassesNumber** *bignum*

where *bignum* is any number; the default is 5.

### Example

PassesNumber 4

## Password

The Password option specifies an unencrypted cube password.

The syntax is as follows:

**Password** *string*

### Example

Password "mypasswd"

## PublishAllowAccessToSuppressionOptions

The PublishAllowAccessToSuppressionOptions option specifies whether the package published from Cognos Transformer allows the user to access null suppression options in the Web studios.

The syntax is as follows:

**PublishAllowAccessToSuppressionOptions** {True|False}

### Example

PublishAllowAccessToSuppressionOptions False



## PublishAllowMultiEdgeSuppression

The `PublishAllowMultiEdgeSuppression` option specifies whether the package published from Cognos Transformer allows the user to enable multi-edge suppression in the Web studios.

The syntax is as follows:

```
PublishAllowMultiEdgeSuppression {True|False}
```

### Example

```
PublishAllowMultiEdgeSuppression False
```

## PublishAllowNullSuppression

The `PublishAllowNullSuppression` option specifies whether the package published from Cognos Transformer allows the user to control null suppression in the Web studios.

The syntax is as follows:

```
PublishAllowNullSuppression {True|False}
```

### Example

```
PublishAllowNullSuppression False
```

## SegmenterDimension

The `SegmenterDimension` option specifies the name of the dimension on which a cube group is based or partitioned.

The syntax is as follows:

```
SegmenterDimension objDim
```

where *objDim* is the object name.

### Example

```
SegmenterDimension "Products"
```

## SegmenterLevel

The `SegmenterLevel` option specifies the name of the level on which a cube group is based or partitioned.

The syntax is as follows:

```
SegmenterLevel objLevel
```

where *objLevel* is the object name.

### Example

```
SegmenterLevel "Product Line"
```

## ServerCube

The `ServerCube` option specifies whether the cube is located on the server, which is relevant in versions of Cognos Transformer that support client/server processing.

The syntax is as follows:

```
ServerCube {True|False}
```

where True is equivalent to selecting **On the Server** in Cognos Transformer version 7.x. Client-server processing is not supported in Cognos Transformer version 8.x.

### Example

ServerCube False

## Status

The Status option specifies the processing status of the cube or cube group.

The syntax is as follows:

**Status** [*cubestatus*]

where *cubestatus* is one of New, OK, Inactive, Warnings, Invalid, Failed, Busy, or Missing.

### Example

Status Inactive

## SummaryLevel

The SummaryLevel option specifies the level at which category values are summarized.

The Windows interface equivalent is the **Summarize all external categories in the level** option on the **Cube Group** tab of the **Cube** property sheet.

The syntax is as follows:

**SummaryLevel** *string*

### Example

SummaryLevel "Product Type"

## UseAlternateFilename

The UseAlternateFilename option specifies whether to use an alternate file name for the cube.

The syntax is as follows:

**UseAlternateFilename** {True|False}

### Example

UseAlternateFilename True

## TimeBasedPartitionedCube

The TimeBasedPartitionedCube option specifies whether time-based partitioning is enabled for the cube.

The syntax is as follows:

**TimeBasedPartitionedCube** {True|False}

### Example

TimeBasedPartitionedCube True

---

## promptopts

Use `promptopts` to set the options that apply to data source prompts and the following MDL verbs: `PromptAdd`, `PromptMake`, and `PromptUpdate`.

### PromptType

For data source prompts, the `PromptType` option specifies the type of prompt to be imported into the Cognos Transformer model.

The syntax is as follows:

**PromptType** {xsdString|memberUniqueName}

Use "xsdString" as the prompt type for simple-value prompts, multi-value prompts, and range prompts.

#### Examples

`PromptType "xsdString" PromptType "memberUniqueName"`

### PromptValue

For data source prompts, the `PromptValue` option specifies the value of the prompts imported into the Cognos Transformer model.

The syntax is as follows:

**PromptValue** *value*

#### Examples

The following example specifies a prompt value of 2 for a simple-value prompt.

`PromptValue 2`

The following example specifies prompt values of 0, 1, and 2 for a multi-value prompt.

`PromptValue StartList "0""1""2" EndList`

The following example specifies prompt values of 1 through 22 for a range prompt.

`PromptValue StartRange "1""22" EndRange`

The following example specifies the prompt value for a Member Unique Name prompt.

`PromptValue StartList "[ZQ1AUTCTY WORLD].[AMERICA ZQ1AUTCNT]"EndList`

---

## signonopts

Use `signonopts` to set the options that apply to data sources and the following MDL verbs: `SignonAdd`, `SignonMake`, and `SignonUpdate`.

### PromptForPassword

For data source signons, the `PromptForPassword` option specifies whether the user is prompted to enter their signon password.

The syntax is as follows:

**PromptForPassword** {True|False}

### Example

PromptForPassword True

## UserId

The UserId option specifies the user ID portion of the signon.

The syntax is as follows:

**UserId** *"user name"*

### Example

UserID "corpadm"

## password

The password option specifies the signon password in unencrypted form.

The syntax is as follows:

**password** *"password"*

### Example

password "my\_pass"

## AutoLogon

For IBM Cognos signons, the AutoLogon option specifies whether to prompt for credentials as part of the logon process.

The syntax is as follows:

**AutoLogon** {True|False}

### Example

AutoLogon True

## SignonNamespace

For IBM Cognos signons, the SignonNamespace option specifies the ID of namespace for the signon.

The syntax is as follows:

**SignonNamespace** *"namespace id"*

### Example

SignonNamespace "Cognos"

SignonNamespace "LDAP"

## SignonType

The SignonType option specifies whether the signon is an IBM Cognos or data source signon.

The syntax is as follows:

**SignonType** {Cognos|DataSource}

### Example

SignonType Cognos

## SignonInfo

The SignonInfo option provides a description of the signon.

The syntax is as follows:

**SignonInfo** *description* [*description...*]

where each string may be up to 256 characters and the total description may be up to 4,095 characters.

### Example

SignonInfo "The logical database name that contains the source data for the IBM Cognos data source."

---

## viewopts

Use viewopts to set the options that apply to the following MDL verbs: ViewAdd, ViewMake, and ViewUpdate. These act on dimension views and custom security views. For more information about the latter, see the Security section of the Cognos Transformer User Guide.

## Apex

The Apex option specifies which category is to be apexed and become the top level. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

**Apex** *objCat*

where *objCat* specifies the category and is the object name, object identifier, or both.

### Example

Apex "Europe"

## Cloak

The Cloak option specifies which category is to be cloaked or hidden. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

**Cloak** *objCat*

where *objCat* specifies the category and is the object name, object identifier, or both.

### Example

Cloak "Far East"

## Filter

The Filter option specifies which category is to be excluded, or filtered, from the cube. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

**Filter** *objCat*

where *objCat* specifies the category and is the object name, object identifier, or both.

## Example

Filter "Europe"

## LevelCloak

The LevelCloak option specifies which level and drill category are to be cloaked or hidden.

The syntax is as follows:

**LevelFilter** [**Dimension** *objDimension*][**Drill** *objDrill*] **Levels** *objLevel*

where *objDimension* specifies the dimension and is the object name, object identifier or both; *objDrill* specifies the drill and is the object name, object identifier, or both; *objLevel* specifies the level and is the object name, object identifier or both. Drill is needed if the level name is not unique in the entire model. Dimension is needed if the Drill is needed and the Drill name is not unique in the entire model.

For more information, see the *IBM Cognos Transformer User Guide*.

LevelCloak Dimension "Location" Drill "By Location" Levels "Division"

LevelCloak Dimension "Office" Drill "By Office" Levels "Division"

## LevelFilter

The LevelFilter option specifies which level and drill category are to be excluded, or filtered, from the cube.

The syntax is as follows:

**LevelFilter** [**Dimension** *objDimension*][**Drill** *objDrill*] **Levels** *objLevel*

where *objDimension* specifies the dimension and is the object name, object identifier or both; *objDrill* specifies the drill and is the object name, object identifier, or both; *objLevel* specifies the level and is the object name, object identifier or both. Drill is needed if the level name is not unique in the entire model. Dimension is needed if the Drill is needed and the Drill name is not unique in the entire model.

For more information, see the *IBM Cognos Transformer User Guide*.

## Example

LevelFilter Dimension "Location" Drill "By Location" Levels "Division"

LevelFilter Dimension "Office" Drill "By Office" Levels "Division"

## LevelSummary

The LevelSummary option specifies which level and drill category are to be summarized.

The syntax is as follows:

**LevelFilter** [**Dimension** *objDimension*][**Drill** *objDrill*] **Levels** *objLevel*

where *objDimension* specifies the dimension and is the object name, object identifier or both; *objDrill* specifies the drill and is the object name, object identifier, or both; *objLevel* specifies the level and is the object name, object identifier or both. Drill is needed if the level name is not unique in the entire model. Dimension is needed if the Drill is needed and the Drill name is not unique in the entire model.

For more information, see the *IBM Cognos Transformer User Guide*.

## Example

```
LevelSummary Dimension "Location" Drill "By Location" Levels "Division"  
LevelSummary Dimension "Office" Drill "By Office" Levels "Division"
```

## LevelSuppressed

The LevelSuppressed option specifies which level is to be suppressed.

The syntax is as follows:

```
LevelFilter [Dimension objDimension][Drill objDrill] Levels objLevel
```

where *objDimension* specifies the dimension and is the object name, object identifier or both; *objDrill* specifies the drill and is the object name, object identifier, or both; *objLevel* specifies the level and is the object name, object identifier or both. Drill is needed if the level name is not unique in the entire model. Dimension is needed if the Drill is needed and the Drill name is not unique in the entire model.

For more information, see the *IBM Cognos Transformer User Guide*.

## Example

```
LevelSuppressed Dimension "Location" Drill "By Location" Levels "Division"  
LevelSuppressed Dimension "Office" Drill "By Office" Levels "Division"
```

## Name

The Name option specifies a name for the view.

The syntax is as follows:

```
Name objView
```

where *objView* is the object name.

## Example

```
Name "Europe"
```

## NotCloak

The NotCloak option specifies which category is not to be cloaked or hidden. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

```
NotCloak objCat
```

where *objCat* specifies the category and is the object name, object identifier, or both.

## Example

```
NotCloak "Far East"
```

## NotFilter

The NotFilter option specifies which category is not to be excluded, or filtered, from the cube. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

```
NotFilter objCat
```

where *objCat* specifies the category and is the object name, object identifier, or both.

### Example

NotFilter "Customer Type"

## NotSummary

The NotSummary option specifies which category is not to be summarized. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

**NotSummary** *objCat*

where *objCat* specifies the category and is the object name, object identifier, or both

### Example

NotSummary "Region"

## NotSuppressed

The NotSuppressed option specifies which category is not to be suppressed. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

**NotSuppressed**  
*objCat*

where *objCat* specifies the category and is the object name, object identifier, or both.

### Example

NotSuppressed "Region"

## Summary

The Summary option specifies which category is to be summarized. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

**Summary** *objCat*

where *objCat* specifies the category and is the object name, object identifier, or both

### Example

Summary "Europe"

## Suppressed

The Suppressed option specifies which category is to be suppressed. For more information, see the Cognos Transformer User Guide.

The syntax is as follows:

**Suppressed** *objCat*

where *objCat* specifies the category and is the object name, object identifier, or both.

### Example

Suppressed "Far East"



---

## Chapter 7. Structured MDL

There are two forms of MDL: verb MDL, which is the main focus of the Developer Guide, and structured MDL, which is briefly described in this section, under the following topics:

- “History of MDL”
- “Comparison of structured and verb keywords”
- “Using structured MDL” on page 231

Like verb MDL, the structured form of MDL can provide a complete and functionally independent definition of any Cognos Transformer model.

---

### History of MDL

Model Definition Language (MDL) was created to store Cognos Transformer models so they could be opened in future versions of Cognos Transformer or related IBM Cognos modeling components. In its original form, MDL contained statements that defined the model in a fixed order: that is, structured MDL.

Verbs were added to enhance the functionality of the language and to support software developers by providing an independent, parallel, workable format: that is, verb MDL.

To maintain compatibility between product versions, structured MDL continues to be the default form. However, if you are building models using MDL, add the `cogtr.ini` setting `VerbOutput=1`, so that Cognos Transformer automatically generates verb output.

For more information about global preference settings, see the *Cognos Transformer User Guide*.

---

### Comparison of structured and verb keywords

The following table lists Cognos Transformer objects. Beside each object is the structured keyword that is used in MDL models to define the object, and the verbs that define and manipulate the object.

**Note:** Most but not all of the currently-supported verbs are included in this list.

| Cognos Transformer object | Structured keyword          | Verbs                                                                                     |
|---------------------------|-----------------------------|-------------------------------------------------------------------------------------------|
| Model                     | Name                        | NewModel                                                                                  |
| Data Source               | DataSource,<br>CognosSource | DataSourceAdd, DataSourceDelete,<br>SourceListUpdate, DataSourceMake,<br>DataSourceUpdate |

| Cognos Transformer object | Structured keyword         | Verbs                                                                                                                                                                                                                                                                                                         |
|---------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Filter                    | Filter, FilterRef          | CognosPackageFilterAdd, CognosPackageFilterMake, CognosPackageFilterDelete, CognosPackageFilterUpdate                                                                                                                                                                                                         |
| Prompt                    | Prompt                     | PromptAdd, PromptDelete, PromptMake, PromptUpdate                                                                                                                                                                                                                                                             |
| Column                    | OrgName                    | ColumnAdd, ColumnDelete, ColumnListUpdate, ColumnMake, ColumnUpdate                                                                                                                                                                                                                                           |
| Dimension                 | Dimension                  | DimAdd, DimDelete, DimMake, DimUpdate, DimensionListUpdate                                                                                                                                                                                                                                                    |
| Subdimension              | SubDimCat                  | SubDimRootMake, SubDimRootUpdate                                                                                                                                                                                                                                                                              |
| Root Category             | Root                       | RootCatMake, RootCatUpdate                                                                                                                                                                                                                                                                                    |
| Drill Category            | Drill                      | DrillCatMake                                                                                                                                                                                                                                                                                                  |
| Level                     | Levels                     | LevelAdd, LevelDelete, LevelMake, LevelMoveAfter, LevelMoveBefore, LevelNewDrill, LevelUpdate, FilterLevel                                                                                                                                                                                                    |
| Category                  | Category                   | CatAdd, CatDelete, CatJoin, CatMake, CatMorph, CatMoveLevel, CatMoveVertical, CatUpdate, FilterCat                                                                                                                                                                                                            |
| Special Category          | SpecialCategory            | SpecialCatAdd, SpecialCatDelete, SpecialCatMake, SpecialCatUpdate                                                                                                                                                                                                                                             |
| Dimension View            | ViewName, DimensionView    | ApexCat, ViewAdd, ViewDelete, ViewListUpdate, ViewMake, ViewUpdate, CustomViewChildListUpdate                                                                                                                                                                                                                 |
| Custom View               | ViewCustomView, CustomView | CustomViewAdd, CustomViewMake, CustomViewDelete, CustomViewUpdate, CustomViewChildListUpdate, PowerCubeCustomViewListUpdate, SecurityNamespaceAdd, SecurityNamespaceDelete, SecurityNamespaceMake, SecurityNamespaceUpdate, SecurityObjectAdd, SecurityObjectDelete, SecurityObjectMake, SecurityObjectUpdate |
| Measure                   | Measure                    | MeasureAdd, MeasureDelete, MeasureMake, MeasureListUpdate, MeasureUpdate                                                                                                                                                                                                                                      |
| PowerCube                 | Cube                       | CubeAdd, CubeDelete, CubeMake, CubeUpdate, PowerCubeDelete, PowerCubeListUpdate, PowerCubeSecurityListUpdate                                                                                                                                                                                                  |

| Cognos Transformer object        | Structured keyword                   | Verbs                                                                                                                                                                                                                              |
|----------------------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PowerCube Group                  | CubeGroup                            | CubeGroupAdd, CubeGroupDelete, CubeGroupMake, CubeGroupUpdate, PowerCubeDelete, PowerCubeListUpdate                                                                                                                                |
| PowerCube Group Cube             | CubeGroupCube                        | CubeGroupCubeAdd, CubeGroupCubeDelete, CubeGroupCubeListUpdate, CubeGroupCubeMake, CubeGroupCubeUpdate                                                                                                                             |
| Signon                           | Signon                               | SignonAdd, SignonDelete, SignonListUpdate, SignonMake, SignonUpdate, CognosPackageDatasourceConnectionAdd, CognosPackageDatasourceConnectionMake, CognosPackageDatasourceConnectionUpdate, CognosPackageDatasourceConnectionDelete |
| Dimension Calculation Definition | DimCalcDef                           | DimCalcDefAdd, DimCalcDefDelete, DimCalcDefMake, DimCalcDefUpdate                                                                                                                                                                  |
| Currency Table                   | CurrencyTable                        | CurrencyTableAdd, CurrencyTableDelete, CurrencyTableMake, CurrencyTableUpdate                                                                                                                                                      |
| Currency                         | CurrencyRecord                       | CurrencyAdd, CurrencyDelete, CurrencyMake, CurrencyUpdate, CurrencyTableAdd                                                                                                                                                        |
| Security View                    | SecurityNameSpace and SecurityObject | NameSpaceMake, SecurityObjectMake                                                                                                                                                                                                  |

## Using structured MDL

Structured MDL requires that object definitions appear in a specific order or structure. For example, after a data source definition, all the columns in the data source must be defined. Then the associated dimensions are defined, followed by the root category, drill category, levels, and categories.

This structure provides information about the location of each object. For example, to uniquely identify a category in verb MDL, you may need to specify its parents, level, drill category, and dimension. In structured MDL, all this information is supplied by the placement of the category definition in the structured MDL file.

Verb statements can be used independently or in conjunction with structured statements, as long as the verb statements are at the end of the model. After a verb statement, no structured statements can be used.

## Example

The following is an example of a model in structured MDL format:

```
Name "New Model" ModelCodePage "windows-1252" AutoAccess False
SynchroCycle 0 SynchroStamp 0 UpdateCycle 1 ModelStamp 1189458791
ClientStamp 1189458791 ServerStamp 0 Version "8.3.790.0"
ModelCategoryOrderDefault OrderUsePreference ModelOrderedByDefault False
CognosSource 103 "GO Sales and Retailers" SourceType Package
```

```

SourcePath "/content/package[@name='GO Sales and Retailers']"
PackageTimeStamp
"/content/package[@name='GO Sales and Retailers']/model[@name='model']"
CognosSource 11543 "QuantityReport" SourceType Report
SourcePath "/content/package[@name=
'GO Sales and Retailers']/report[@name='QuantityReport']"
PackageTimeStamp "/content/package[@name=
'GO Sales and Retailers']/report[@name='QuantityReport']"
DataSource 105 "GO Sales and Retailers~1" Separator ","
SourceType CognosSourceQuery
CharacterSet Default DecimalSep "." Thousandsep "," Columns True
Timing PopYesCreateDefault
PackageReportSource 103 "GO Sales and Retailers" AutoSummary True
SetCurrent True ServerSource False Speed False Presummarized False
OrgName 107 "[gosales_goretailers].[Orders].[Order number]"
Origin Source Offset 0 Column "Order number" Storage Float64 Scale 0
Size 4 Decimals 0 InputScale 0 TimeArray Off Rollup CountAll
OrgName 109 "[gosales_goretailers].[Orders].[Retailer name]"
Origin SourceOffset 1 Column "Retailer name" Storage Text Scale 0
Size 102 Decimals 0 Class Description InputScale 0 TimeArray Off
OrgName 111 "[gosales_goretailers].[Orders].[Order date]"
Origin Source Offset 2 Column "Order date" Storage Int32 Scale 0
Size 12 Decimals 0 Class Date InputScale 0 TimeArray Off
OrgName 113 "[gosales_goretailers].[Orders].[Order method]"
Origin Source Offset 3 Column "Order method" Storage TextScale 0
Size 102 Decimals 0 Class Description InputScale 0 TimeArray Off
OrgName 115 "[gosales_goretailers].[Orders].[Order method code]"
Origin Source Offset 4 Column "Order method code" Storage Float64 Scale 0
Size 4 Decimals 0 InputScale 0 TimeArray Off Rollup CountAll
OrgName 117 "[gosales_goretailers].[Orders].[Product name]"
Origin Source Offset 5 Column "Product name" Storage Text Scale 0
Size 102 Decimals 0 Class Description InputScale 0 TimeArray Off
OrgName 119 "[gosales_goretailers].[Orders].[Quantity]"
Origin Source Offset 6 Column "Quantity" Storage Float64 Scale 0
Size 2 Decimals 0 Class Quantity InputScale 0 TimeArray Off
Rollup Sum Filter 11553 "Americas" FilterRef
"[gosales_goretailers].[Americas]" DataSource 11545
"QuantityReport~1" Separator "," SourceType CognosSourceQuery
CharacterSet Default DecimalSep "." Thousandsep "," Columns True
Timing PopYesCreateDefault PackageReportSource 11543"QuantityReport"
AutoSummary False SetCurrent True ServerSource False
Speed False Presummarized False
OrgName 11547 "[Report].[Query1.0].[Product number]"
Origin Source Offset 0 Column "Product number" Storage Float64 Scale 0
Size 1 Decimals 0 Class Quantity InputScale 0 TimeArray Off
OrgName 11549 "[Report].[Query1.0].[Production cost]"
Origin Source Offset 1 Column "Production cost" Storage Float64 Scale 2
Size 1 Decimals 2 Class Quantity InputScale 0 TimeArray Off
Dimension 149 "Order date" DimType Date
EarliestDate 19010101 LatestDate 21001231 ManualPeriods False
DaysInWeek 127 NewCatsLock False ExcludeAutoPartitioning False
DimDefaultCategory 0 Categories Root 153 "Order date"
Inclusion Generate Lastuse 20070910 Date 0 Filtered False
Suppressed False Sign False HideValue False IsKeyOrphanage False
IsTruncated False Blanks False
Drill 155 "By Order date" Inclusion Suppress
Filtered False Suppressed True PrimaryDrill True HideValue False
YearBegins 20070101 PartialWeek Split ExtraWeek None
WeekBegins Sunday Levels 161 "Year" Blanks "( blank )"
Inclusion Generate DateFunction Year Generate Need
RefreshLabel False RefreshDescription False RefreshShortName False
NewCatsLock False CatLabFormat "YYYY" Timerank 10
UniqueCategories True UniqueMove False Associations 163 "Order date"
AssociationType Type_Query AssociationRole Role_Source
AssociationReferenced "Order date" Associations 165 "Order date"
AssociationContext 155 AssociationType Type_Query
AssociationRole Role_OrderBy

```

AssociationReferenced "Order date"  
 SortOrder Int16 SortAs Ascending Levels 167 "Quarter" Blanks "(  
 blank )" Inclusion Generate DateFunction Quarter Generate All  
 RefreshLabel False RefreshDescription False RefreshShortName False  
 NewCatsLock False CatLabFormat 'YYYY "Q" Q' Timerank 20  
 UniqueCategories True UniqueMove False  
 Associations 169 "Order date" AssociationType Type\_Query  
 AssociationRole Role\_Source AssociationReferenced "Order date"  
 Associations 171 "Order date" AssociationContext 155  
 AssociationType Type\_Query AssociationRole Role\_OrderBy  
 AssociationReferenced "Order date" SortOrder Int16 SortAs Ascending  
 Category 233 "20040101-20041231" Parent 155 Levels 161  
 OrderBy Drill 155 Value "2004" Label "2004" Lastuse 20070910  
 SourceValue "2004" Date 20040101 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 235 "20040101-20040331" Parent 233 Levels 167  
 OrderBy Drill 155 Value "20040101" Label "2004 Q 1" Lastuse 20070910  
 SourceValue "20040101" Date 20040101 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 243 "20040401-20040630" Parent 233 Levels 167  
 OrderBy Drill 155 Value "20040401" Label "2004 Q 2" Lastuse 20070910  
 SourceValue "20040401" Date 20040401 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 251 "20040701-20040930" Parent 233 Levels 167  
 OrderBy Drill 155 Value "20040701" Label "2004 Q 3" Lastuse 20070910  
 SourceValue "20040701" Date 20040701 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 259 "20041001-20041231" Parent 233 Levels 167  
 OrderBy Drill 155 Value "20041001" Label "2004 Q 4" Lastuse 20070910  
 SourceValue "20041001" Date 20041001 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 581 "20050101-20051231" Parent 155 Levels 161  
 OrderBy Drill 155 Value "2005" Label "2005" Lastuse 20070910  
 SourceValue "2005" Date 20050101 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 583 "20050101-20050331" Parent 581 Levels 167  
 OrderBy Drill 155 Value "20050101" Label "2005 Q 1" Lastuse 20070910  
 SourceValue "20050101" Date 20050101 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 591 "20050401-20050630" Parent 581 Levels 167  
 OrderBy Drill 155 Value "20050401 " Label "2005 Q 2" Lastuse 20070910  
 SourceValue "20050401" Date 20050401 Filtered False Suppressed False  
 Sign False HideValueFalse IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 599 "20050701-20050930" Parent 581 Levels 167  
 OrderBy Drill 155 Value "20050701" Label "2005 Q 3" Lastuse 20070910  
 SourceValue "20050701" Date 20050701 Filtered False Suppressed False  
 Sign False HideValue FalseIsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 607 "20051001-20051231" Parent 581 Levels 167  
 OrderBy Drill 155 Value "20051001" Label "2005 Q 4" Lastuse 20070910  
 SourceValue "20051001" Date 20051001 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 683 "20060101-20061231" Parent 155 Levels 161  
 OrderBy Drill 155 Value "2006" Label "2006" Lastuse 20070910  
 SourceValue "2006" Date 20060101 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 685 "20060101-20060331" Parent 683 Levels 167

OrderBy Drill 155 Value "20060101" Label "2006 Q 1" Lastuse 20070910  
 SourceValue "20060101" Date 20060101 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False  
 Category 693 "20060401-20060630" Parent 683 Levels 167  
 OrderBy Drill 155 Value "20060401" Label "2006 Q 2" Lastuse 20070910  
 SourceValue "20060401" Date 20060401 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 701 "20060701-20060930" Parent 683 Levels 167  
 OrderBy Drill 155 Value "20060701" Label "2006 Q 3" Lastuse 20070910  
 SourceValue "20060701" Date 20060701 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False  
 Category 709 "20061001-20061231" Parent 683 Levels 167  
 OrderBy Drill 155 Value "20061001" Label "2006 Q 4" Lastuse 20070910  
 SourceValue "20061001" Date 20061001 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False MapDrills MapDrill 155  
 ViewName 157 "All Categories" Type All ViewCustomView 0  
 ViewName 159 "Omit Dimension" Type Omit ViewCustomView 0 Dimension 195  
 "Order method" DimType Regular NewCatsLock False  
 ExcludeAutoPartitioning False DimDefaultCategory 0 Categories Root 197  
 "Order method" Inclusion Generate  
 Lastuse 20070910 Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False  
 IsTruncated False Blanks False Drill 199 "By Order method" Inclusion  
 Suppress Filtered False Suppressed True  
 PrimaryDrill True HideValue False Levels 205  
 "Order method" Blanks "( Blank )" DateFunction None Generate None  
 RefreshLabel False RefreshDescription False  
 RefreshShortName False NewCatsLock False Timerank 0  
 UniqueCategories False UniqueMove False Associations 207  
 "Order method code" AssociationType Type\_Query  
 AssociationRole Role\_Source  
 AssociationReferenced "Order method code"  
 Associations 209 "Order method" AssociationType Type\_Query  
 AssociationRole Role\_Label AssociationReferenced "Order method"  
 Category 267 "7" Parent 199 Levels 205 Label "Sales visit"  
 Lastuse 20070910 SourceValue "7" Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False Category 285 "4" Parent 199 Levels 205  
 Label "E-mail" Lastuse 20070910  
 SourceValue "4" Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False Category 309 "5" Parent 199 Levels 205 Label "Web"  
 Lastuse 20070910 SourceValue "5" Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False Category 319 "2" Parent 199 Levels 205 Label "Telephone"  
 Lastuse 20070910 SourceValue "2" Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False Category 357 "1" Parent 199 Levels 205 Label "Fax"  
 Lastuse 20070910 SourceValue "1" Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False  
 Category 437 "3" Parent 199 Levels 205 Label "Mail" Lastuse 20070910  
 SourceValue "3" Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False  
 Category 475 "8" Parent 199 Levels 205 Label "Special" Lastuse 20070910  
 SourceValue "8" Current Filtered False Suppressed False  
 Sign False HideValue False IsKeyOrphanage False IsTruncated False  
 Blanks False MapDrills MapDrill 199  
 ViewName 201 "All Categories" Type All  
 ViewCustomView 0 ViewName 203 "Omit Dimension" Type Omit  
 ViewCustomView 0 ViewName 11555 "Authors~User View"  
 ViewCustomView 11529 Apex 197 Filter 319

```

ViewName 11557 "Sub Authors~User View"
ViewCustomView 11537 Apex 197 Filter 319 Measure 225 "Quantity"
Rollup Sum IgnoreMissingValue False Storage Float64 OutPutScale 0
Decimals 0 ReverseSign False
IsCurrency False IsFolder False DrillThrough False EndList
Associations 227 "Quantity" AssociationType Type_Query
AssociationRole Role_Source
AssociationReferenced "Quantity" CustomView 11529 "Authors" DimensionView
149 "All Categories"
DimensionView 195 "Authors~User View" MeasureInclude 225 Yes CustomView
11537 "Sub Authors"
DimensionView 149 "All Categories" DimensionView 195 "Sub Authors~User
View" MeasureInclude 225 Yes
CustomViewChildList 11529 StartList 11537 EndList
CustomViewChildList 11537 StartList EndList
SecurityNameSpace 11533 "Cognos" SecurityNameSpaceCAMID 'CAMID(":")'
SecurityObject 11531
'CAMID(":Authors")' SecurityObjectDisplayName "Authors"SecurityObjectType
SecurityType_Role CustomViewList 11529 EndList
SecurityObject 11539 'CAMID(":Analysis Users")'
SecurityObjectDisplayName "Analysis Users"
SecurityObjectType SecurityType_Role CustomViewList 11537 EndList
SecurityNameSpace 11563 "GOnamespace"
SecurityNameSpaceCAMID 'CAMID("GOnamespace")'
SecurityObject 11561 'CAMID("GOnamespace:r:authid=2589996611")'
SecurityObjectDisplayName "Root User Class"
SecurityObjectType SecurityType_Role CustomViewList 11537 EndList
Cube 11535 "Cube1" EncryptedPW
"DD32E203AA9AFC5C26233A515A4E83A1DD32E203AA9AFC5C26233A515A4E83A1DD32E20"
"3AA9AFC5C26233A515A4E83A1DD32E203AA9AFC5C26233A515A4E83A1DD32E203AA9AFC"
"5C26233A515A4E83A1DD32E203AA9AFC5C26233A515A4E83A1DD32E203AA9AFC5C26233"
"A515A4E83A1DD32E203AA9AFC5C26233A515A4E83A1DD32E203AA9AFC5C26233A515A4E"
"83A1DD32E203AA9AFC5C26233A515A4E83A1DD32E203AA9AFC5C26233A515A4E83A1DD3"
"2E203AA9AFC5C26233A515A4E83A1DD32E203AA9AFC5C26233A515A4E83A1DD32E203AA"
"9AFC5C26233A515A4E83A1DD32E203AA9AFC5C26233A515A4E83A1DD32E203AA9AFC5C2"
"6233A515A4E83" Status New CubeCreation On Optimize Default
ConsolidatedRecords 10000000
PartitionSize 500000 PassesNumber 5 Compress False DatabaseInfo "Local;"
IncrementalUpdate False ServerCube False CubeStamp 0 CubeCycle 0
BlockParentTotals False Caching False UseAlternateFileName False
DrillThrough False EndList DataSourceSignon False PublishEnable
True PublishStatus None
DimensionView 149 "All Categories" DimensionView 195 "All Categories"
MeasureInclude 225 Yes
PowerCubeCustomViewList 11537 EndList
AllocationAdd Measure 225 Type Default

```





---

## Notices

This information was developed for products and services offered worldwide.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, NY 10504-1785  
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing  
Legal and Intellectual Property Law  
IBM Japan Ltd.  
1623-14, Shimotsuruma, Yamato-shi  
Kanagawa 242-8502 Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Software Group  
Attention: Licensing  
3755 Riverside Dr  
Ottawa, ON K1V 1B7  
Canada

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

---

## Trademarks

IBM, the IBM logo, ibm.com, Impromptu, PowerPlay, and Cognos are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at “ Copyright and trademark information ” at [www.ibm.com/legal/copytrade.shtml](http://www.ibm.com/legal/copytrade.shtml).

The following terms are trademarks or registered trademarks of other companies:

- Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.
- Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.
- Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.
- UNIX is a registered trademark of The Open Group in the United States and other countries.



---

# Index

## Special characters

- .dat files
  - OpenDef 133
- .def files
  - OpenDef 133
- .gen files
  - OpenDef 133

## A

- ActivityMeasure 204
- adding associations
  - AssociationAdd 66
- allocating
  - measure allocation options 205
- allocating measures
  - AllocationAdd 63
- Allocation 205
- allocations
  - creating 17
- Apex 225
- apexing categories
  - ApexCat 65
- AppInfo 159
- appqueryopts 159
- archiving models 3
- Association 193, 197, 205
- AssociationContext 167
- AssociationReferenced 167
- AssociationRole 168
- associations
  - adding 66
  - AssociationContext 167
  - AssociationUpdate 67
  - creating or updating using AssociationMake 67
  - deleting 66
  - MDL options 167
- AssociationType 168
- assocopts 167
- auto-partitioning
  - ConsolidatedRecords 215
  - PassesNumber 220
- AutoDesign 68
- AutoLogon 224

## B

- BaseCurrency 188
- binary files
  - models in .py? format 1
- Blanks 168, 198
- BlockParentTotals 214
- buffers
  - StreamExtractSize 166

## C

- Caching 214
- Calc 169, 205

- Calc column option 180
- CalcDef 170, 191
- calculated categories
  - Calc 169
  - CalcDef 170
  - dimension calculation definitions 116
  - Share 176
- calculated columns 180
- calculated measures 205
- calculation definitions
  - CalcDef 191
  - DimCalcDefAdd 115
  - DimCalcDefMake 116
  - DimCalcDefUpdate 118
  - DimCalDefDelete 116
- categories
  - apexed 225
  - apexing 65
  - Calc 169
  - CalcDef 170
  - CatAdd 68
  - CatDelete 69
  - CatJoin 69
  - CatMake 70
  - CatMorph 71
  - CatMoveVertical 72
  - CatUpdate 73
  - CatUpdateAll 73
  - cloaked 225
  - current time period 171
  - date 171
  - DateDrill 171
  - default cube-open level for scenario dimensions 194
  - descriptions 170
  - exlcuding (filtering) 225
  - ExtraWeek 172
  - FilterCat 122
  - filters 172
  - generate all in period 199
  - hiding meaningless values in scenario dimensions 174
  - Inclusion 172
  - IsTruncated 173
  - Label 173
  - LastUse 173
  - lowest detail level 218
  - missing values 168
  - naming 9
  - NewPartition 174
  - options 168
  - order values 174
  - orphanages 173
  - PartialWeek 174
  - PopulateFromQueries 135
  - PopulateModel 135
  - Primary 175
  - PrimaryDrill 175
  - prohibit automatic creation of new categories 196, 200
  - relative time target level 177
  - reversing the sign of measure values 176
  - Rollup 175
  - RootCatMake 139

- categories *(continued)*
  - RootCatUpdate 139
  - RunningPeriods 175
  - setting global sorting preferences 12
  - Share 176
  - ShortName 176
  - SourceValue 176
  - SpecialCatAdd 148
  - SpecialCatDelete 149
  - SpecialCatMake 150
  - SpecialCatUpdate 151
  - SplitWeek 177
  - SummarizeCat 153
  - Suppressed 177
  - TargetOffset 177
  - TimeAggregate 177
  - ToDateLevel 178
  - unique moves 204
  - uniqueness 204
  - WeekBegins 178
  - YearBegins 178
- Category 229
- category count measures 207
- category counts
  - ActivityMeasure 204
  - Rollup 211
- category generation
  - Timing 166
- category names 9
- CategoryCode 198
- CatInfo 170
- CatLabFormat 198
- catopts 168
- CharacterSet 159
- Class 183
- CleanHouse 73
  - automating 56
- Cloak 225
- CognosPackageAdd 74
- CognosPackageDataSourceConnectAdd 77
- CognosPackageDataSourceConnectDelete 78
- CognosPackageDataSourceConnectMake 78
- CognosPackageDataSourceConnectUpdate 80
- CognosPackageDelete 75
- CognosPackageFilterAdd 81, 197
- CognosPackageFilterDelete 81
- CognosPackageFilterMake 81
- CognosPackageFilterRef 196
- CognosPackageFilterUpdate 82, 197
- CognosPackageMake 75
- cognospackageopts 178
- CognosPackageUpdate 76
- CognosSource 160
- colopts 180
- ColSrcType 184
- Column 184, 192
- ColumnInfo 184
- columns
  - array type 187
  - calculated 180
  - ColumnAdd 83
  - ColumnDelete 83
  - ColumnListUpdate 84
  - ColumnMake 84
  - ColumnUpdate 85
  - CreateColumns 86
  - data class 183

- columns *(continued)*
  - date 184
  - date input formats 185
  - DateLevel 185
  - decimal places 185
  - degree of detail 185
  - descriptions 184
  - input scales 186
  - labels 200
  - naming 9
  - Offset 186
  - options 180
  - Origin 186
  - original name 184
  - Scale 186
  - Size 187
  - storage type 187
  - TimeArrayMonth 188
- Columns 160
- compatibility
  - migrating between versions using .mdl-format models 1
- Compress 215
- Consolidate 215
- ConsolidatedRecords 215
- ContextLevel 170
- ContextOffset 171
- conventions
  - used for data types 59
- conversion rates
  - updating 57
- corruption 3
- CountryCode 188
- Cube 192, 229
- cube groups
  - CubeGroupAdd 89
  - CubeGroupCubeAdd 90
  - CubeGroupCubeDelete 91
  - CubeGroupCubeListUpdate 92
  - CubeGroupCubeMake 92
  - CubeGroupCubeUpdate 93
  - CubeGroupDelete 94
  - CubeGroupMake 95
  - CubeGroupUpdate 96
  - naming 9
  - SegmenterDimension 221
  - SegmenterLevel 221
- cube updates
  - EventEnd 122
  - EventStart 122
- CubeCreation 215
- CubeCycle 215
- CubeGroup 229
- CubeGroupCube 229
- cubes
  - auto-partitioning record consolidation 215
  - BlockParentTotals 214
  - Caching 214
  - Compress 215
  - Consolidate 215
  - CubeCreation 215
  - CubeCycle 215
  - CubeDelete 89
  - CubeMake 97
  - CubeStamp 216
  - CubeUpdate 98
  - CubeUpdateLock 216
  - database signons 216

- cubes (*continued*)
  - descriptions 219
  - drill through 218
  - file name 219
  - generating in .mdc-format using CreateFiles 86
  - generating in .mdc-format using CreateFromCubes 87
  - generating in .mdc-format using CreateFromQueries 87
  - IncrementalUpdate 219
  - lowest detail level 218
  - measure names 219
  - optimization 220
  - output types 216
  - partitioning passes 220
  - partitioning status report 138
  - PartitionSize 220
  - passwords 220
  - PowerCubeDelete 136
  - PowerCubeListUpdate 136
  - powercubeopts 214
  - processing status 222
  - revert to default status using MDCClear 128
  - ServerCube 221
  - source files 216
  - summarizing external category values 222
  - time-based partitioning 222
  - UpdatePowerCubes 155
  - using Exclude to restrict drill-through scope 218
  - using temporary filenames 222
- CubeStamp 216
- CubeUpdateLock 216
- currencies
  - naming 9
- currency conversions
  - base currencies 188
  - country or region code override 189
  - country or region codes 188, 190
  - country or region labels 188
  - currency symbols 189
  - CurrencyAdd 99
  - CurrencyDelete 100
  - CurrencyMake 101
  - CurrencyTableAdd 103
  - CurrencyTableDelete 104
  - CurrencyTableMake 104
  - CurrencyTableUpdate 105
  - CurrencyUpdate 106
- dates 190
- decimal places 189
- EMU entry date 190
- euro 190
- European Monetary Union setting 189
- labels 191
- options 188, 190
- rates 191
- table types 191
- currency records
  - IsCurrency 210
- CurrencyCountryCodeColumn 190
- CurrencyCountryLabel 188
- CurrencyDateColumn 190
- CurrencyDecimals 189
- CurrencyFormatOverride 189
- CurrencyIsEMU 189
- CurrencyLabelColumn 191
- CurrencyRecord 229
- currencyrecordopts 188
- CurrencySymbol 189

- CurrencyTable 229
- currencytableopts 190
- CurrencyTableType 191
- Current 171
- current periods
  - SetCurrent 163
- CustomViewAdd 107
- CustomViewChildListUpdate 108
- CustomViewDelete 108
- CustomViewMake 109
- CustomViewUpdate 109

## D

- data classes 183
- data files
  - Source 163
- data source types
  - changing 55
  - ColSrcType 184
- data sources
  - changing 55
  - DataSourceAdd 110
  - DataSourceDelete 111
  - DataSourceMake 112
  - DataSourceUpdate 113
  - naming 9
  - query types and options 159
  - SourceListUpdate 148
- Database 216
- database sources
  - SourceType 164, 179
- DatabaseInfo 216
- databases
  - output types 216
- DataRange 160
- DataSource 192, 216
- Date 171
- date dimensions
  - DimType 195
- date formats 198
- date input formats 185, 199
- Dateconstant 184
- DateDrill 171
- DateFunction 198
- DateLevel 185
- DaysInWeek 194
- decimal places
  - Format 172
- decimal separators
  - DecimalSep 160
- Decimals 185, 207
- DecimalSep 160
- degree of detail 185
- deleting associations
  - AssociationDelete 66
- deletion options
  - CalcDef 191
  - Column 192
  - Cube 192
  - DataSource 192
  - Dimension 192
  - Levels 192
  - Measure 193
  - Signon 193
  - View 193
- DeletionListUpdate 113

- deletionopts 191
- deletions
  - options 191
  - updating list 113
- DeployLocations 217
- deployment
  - DeployLocations 217
  - DeployType 217
- DeployType 217
- Description 178, 199
- descriptions
  - adding 55
  - category 170
  - column 184
  - dimension 194
  - measure 210
  - PowerCubes and cube groups 219
  - query 159
  - signon 225
- Detail 185
- DetailLevel 218
- DimCalcDef 229
- DimDefaultCategory
  - opening level for scenario dimensions 194
- Dimension 192, 207, 229
- dimension views
  - Apex 225
  - Cloak 225
  - Exclude or Filter 225
  - names 227
  - options 225
  - use as the basis for new PowerCubes 57
  - ViewAdd 155
  - ViewDelete 156
  - ViewListUpdate 156
  - ViewMake 157
  - ViewUpdate 158
- dimensions
  - Association 193
  - cube-open category 194
  - DaysInWeek 194
  - descriptions 194
  - DimAdd 114
  - DimDelete 119
  - DimensionListUpdate 119
  - DimMake 120
  - DimType 195
  - DimUpdate 120
  - EarliestDate 195
  - ExcludeAutoPartitioning 195
  - LatestDate 195
  - ManualPeriods 196
  - naming 9
  - options 193
  - prohibit automatic creation of new categories 196
  - SubDimRootMake 151
  - SubDimRootUpdate 152
  - ViewAdd 155
  - ViewDelete 156
  - ViewListUpdate 156
  - ViewMake 157
  - ViewUpdate 158
- DimensionView 229
- DimInfo 194
- dimopts 193
- DimType 195

- documentation scope
  - supported functionality xi
- Drill 229
- drill categories
  - DrillCatMake 121
  - JoiningLevel argument 121
- drill through
  - restrictions using Exclude 208
  - using Exclude to restrict scope 218
- drill-through to IQD option
  - ImrName 161
- DrillThrough 207, 218
- DuplicateRollup 208
- DuplicateWeight 208

## E

- EarliestDate 195
- EmuEntryDate 190
- euro
  - European Monetary Union setting 189
- EuroBaseCurrency 190
- EventEnd 122
- EventStart 122
- Exclude 208, 218
- ExcludeAutoPartitioning 195
- ExpMark 197
- ExtraWeek 172

## F

- field delimiters
  - Separator 163
- file formats
  - converting 56
- Filter 225
- FilterDescription 197
- Filtered 172, 199
- filteropts 196
- filters
  - CognosPackageFilterAdd 197
  - CognosPackageFilterUpdate 197
  - ExpMark 197
  - FilterDescription 197
  - options 196
- Format 172, 185, 199, 209
- fragmentation 3

## G

- Generate 199

## H

- HideValue 174

## I

- IgnoreMissingValue 209
- IMRName 161
- inclusion
  - levels 200
- Inclusion 172, 200
- incremental updates
  - disabling 57



- IncrementalUpdate 219
- Information 219
- InputScale 186
- IQD drill-through targets
  - ImrName 161
- IsCurrency 210
- IsFolder 210
- IsKeyOrphanage 173
- Isolation 161
- IsTruncated 173

## L

- Label 173, 200, 210
- Last Use 173
- LatestDate 195
- LevelCloak 226
- LevelFilter 226
- LevelInfo 200
- levelopts 197
- levels
  - associations 197
  - blank substitutions 198
  - category code columns 198
  - cloaking 226
  - date formats 198
  - date functions 198
  - date input formats 199
  - descriptions 200
  - DetailLevel 218
  - filtering 226
  - filters 199
  - generate all categories in period 199
  - inclusion 200
  - LevelAdd 123
  - LevelDelete 124
  - LevelMake 125
  - LevelMoveAfter 126
  - LevelMoveBefore 126
  - LevelNewDrill 127
  - LevelUpdate 128
  - naming 9
  - options 197
  - order by 201
  - ordering categories 201
  - partitions 202
  - prohibit automatic creation of new categories 200
  - refresh 202
  - share objects 202
  - short names 203
  - SortAs 201
  - source column description 178, 199
  - source columns 203
  - SummarizeLevel 154
  - summarizing 226
  - suppress 203
  - suppressed 227
  - time-level ranking 203
  - unique moves 204
  - using Exclude to restrict drill-through 208
  - using Exclude to restrict drill-through scope 218
- Levels 192, 229
- LevelSummary 226
- LevelSuppressed 227
- line length
  - maximum 60

## M

- ManualPeriods 196
- MDCClear 128
- MDCFile 219
- MDL statements
  - description and purpose 1
- meaopts 204
- Measure 193, 229
- measure values
  - hiding in scenario dimensions 174
- MeasureInfo 210
- MeasureName 219
- measures
  - allocating 63
  - allocation options 205
  - calculated 205
  - category count 204, 207, 211
  - decimal place format 172
  - decimal places 207
  - descriptions 210
  - drill through 207
  - duplicate rollup 208
  - duplicate weight rollups 208
  - format 209
  - ignoring missing values for specific rollup types 209
  - IsCurrency 210
  - isFolder 210
  - label 210
  - MeasureAdd 129
  - MeasureDelete 130
  - MeasureListUpdate 130
  - MeasureMake 131
  - MeasureUpdate 132
  - naming 9
  - null or missing values 211
  - options 204
  - output scale 211
  - parent 211
  - regular (from a column) 205
  - reversing the sign 212
  - Rollup 211
  - short names 212
  - storage types 212
  - time-state rollups 212
  - time-state weighting 213
  - Timing 213
  - using Exclude to restrict drill-through 208
  - Weight 213
  - WeightID 214
- migrating models 3
- Missing 211
- missing values
  - Blanks 168
  - ignoring for specified rollup types 209
  - NA option 211
- model objects
  - AssociationContext 167
  - deletion options 191
- ModelEnsureCompleteness 132
- models
  - create using NewModel 132
  - files in .py? and .mdl format 1
  - ModelEnsureCompleteness 132
  - ModelStamp 161
  - open using OpenMDL 134
  - open using OpenPY 134
  - options 159

- models (*continued*)
  - PopulateFromQueries 135
  - PopulateModel 135
  - SaveMDL 140
  - SavePY 140
  - setting global processing options 12
  - Stamp 165
- ModelStamp 161
- modifying models
  - directly 4
  - with a script 4
  - within the model 4
- multi-edge suppression
  - PublishAllowMultiEdgeSuppression 221

## N

- Name 227, 229
- new features version 6.5
  - category count measure 207
- NewCatsLock 196, 200
- NewPartition 174
- NotFilter 227
- NotSummary 228
- NotSuppressed 228
- null suppression
  - PublishAllowAccessToSuppressionOptions 220
  - PublishAllowNullSuppression 221
- null values
  - ignoring for specified rollup types 209
  - NA option 211

## O

- object identifiers
  - creating 8
  - excluding 8
- object names
  - rules governing 8
  - uniqueness 9
- object types 7
- objects
  - AssociationContext 167
- Offset 186
- OpenDef 133
- OpenMDL 134
- OpenPY 134
- optimization
  - ExcludeAutoPartitioning option 195
  - PassesNumber 220
- Optimize 220
- optimizing
  - query speed 165
- OrderBy 201
- OrgName 229
- Origin 186
- original names 184
- Orphanage 174
- orphanages
  - IsKeyOrphanage 173

## P

- PackageReportSource 162
- PackageTimeStamp 162, 179
- Parent 211

- PartialWeek 174
- Partition 202
- partitioning
  - ConsolidatedRecords 215
  - NewPartition 174
  - PassesNumber 220
- partitioning status
  - ReportPartitions 138
- PartitionSize 220
- PassesNumber 220
- password 224
- Password 220
- passwords
  - unencrypted 224
- performance 3
- PopulateFromQueries 135
- PopulateModel 135
- PowerCube groups
  - CubeGroupAdd 89
  - CubeGroupCubeAdd 90
  - CubeGroupCubeDelete 91
  - CubeGroupCubeListUpdate 92
  - CubeGroupCubeMake 92
  - CubeGroupCubeUpdate 93
  - CubeGroupDelete 94
  - CubeGroupMake 95
  - CubeGroupUpdate 96
- PowerCubeCustomViewListUpdate 135
- powercubeopts 214
- PowerCubes
  - auto-partitioning record consolidation 215
  - BlockParentTotals 214
  - Caching 214
  - changing optimization setting 56
  - changing output locations 56
  - changing output types 56
  - Compress 215
  - Consolidate 215
  - CubeAdd 88
  - CubeCreation 215
  - CubeCycle 215
  - CubeDelete 89
  - CubeMake 97
  - CubeStamp 216
  - CubeUpdate 98
  - CubeUpdateLock 216
  - database signons 216
  - descriptions 219
  - drill through 218
  - file name 219
  - generating in .mdc-format using CreateFiles 86
  - generating in .mdc-format using CreateFromCubes 87
  - generating in .mdc-format using CreateFromQueries 87
  - IncrementalUpdate 219
  - lowest detail level 218
  - measure names 219
  - naming 9
  - optimization 220
  - output types 216
  - partitioning passes 220
  - partitioning status report 138
  - PartitionSize 220
  - passwords 220
  - PowerCubeDelete 136
  - PowerCubeListUpdate 136
  - powercubeopts 214
  - processing status 222

- PowerCubes *(continued)*
  - revert to default status using MDCClear 128
  - SegmenterDimension 221
  - SegmenterLevel 221
  - ServerCube 221
  - source files 216
  - summarizing external category values 222
  - time-based partitioning 222
  - UpdatePowerCubes 155
  - updating all in model 55
  - updating selected 55
  - using Exclude to restrict drill-through scope 218
  - using temporary filenames 222
- precision 207
- preferences
  - global processing options 12
  - running AutoDesign by default 68
- PreSummarized 162
- Primary 175
- PrimaryDrill 175
- processing
  - revert to default status using MDCClear 128
- PromptAdd 137
- PromptDelete 137
- PromptForPassword 223
- PromptMake 137
- promptopts 223
- PromptType 223
- PromptUpdate 138
- PromptValue 223
- PublishAllowAccessToSuppressionOptions 220
- PublishAllowNullSuppression 221
- PwerCube updates
  - EventEnd 122
  - EventStart 122

## Q

- queries
  - character sets 159
  - DataRange 160
  - decimal separators 160
  - descriptions 159
  - drill-through to IQD 161
  - isolation level 161
  - naming 9
  - options 159
  - PackageReportSource 162
  - PreSummarized 162
  - Source 163
  - SourceType 164, 179
  - Speed 165
  - SQL string 165
  - Timing 166
- Query 229

## R

- ranges
  - DataRange 160
- RefreshDescription 202
- RefreshLabel 202
- RefreshShortName 202
- relative time
  - context offset 171
  - context period 170

- relative time *(continued)*
  - drill categories 171
  - number of running periods 175
  - TargetLevel 177
  - TargetOffset 177
  - TimeAggregate 177
  - ToDateLevel 178
- remarks
  - creating in MDL file 60
- ReportPartitions 138
- restricted characters
  - in category names 9
  - in column names 10
  - in measure names 131
- reversing the sign
  - financial reporting 212
  - financial reporting option 176
- Rollup 175, 211
- rollups
  - average weighting 213, 214
  - duplicate 208
  - duplicate weights 208
  - external 211
  - ignoring missing values for specific types 209
  - PreSummarized 162
  - regular 211
  - regular timing 213
  - time-state 212
  - time-state weighting 213
- Root 229
- root categories
  - RootCatMake 139
  - RootCatUpdate 139
- RunningPeriods 175

## S

- SaveMDL 140
- SavePY 140
- Scale 186, 211
- scaling
  - measure output 211
- scenario dimensions
  - cube-open category 194
- SecurityNamespaceAdd 141
- SecurityNamespaceDelete 141
- SecurityNamespaceMake 142
- SecurityNamespaceUpdate 142
- SecurityObjectAdd 143
- SecurityObjectDelete 144
- SecurityObjectMake 144
- SecurityObjectUpdate 145
- SegmenterDimension 221
- SegmenterLevel 221
- SegmenterPrompt 162
- SegmenterPromptEnabled 162
- senario dimensions
  - HideValue 174
- Separator 163
- separators
  - ThousandSep 166
- ServerCube 221
- SetCurrent 163
- setting
  - global processing preferences 12
- Share 176, 202
- ShortName 176, 203, 212

- Sign 176, 212
- Signon 193, 229
- SignonAdd 145
- SignonDelete 146
- SignonInfo 225
- SignonMake 147
- SignonNamespace 224
- signonopts 223
- signons
  - creating 17
  - database specification 216
  - descriptions 225
  - prompt for passwords 223
  - unencrypted passwords 224
- SignonType 224
- SignonUpdate 147
- Size 187
- SortAs 201
- sorting
  - setting global preferences 12
- Source 163, 203
- source columns 203
- source files 216
- SourceInfo 163
- SourceSignonList 164
- SourceType 164, 179
- SourceValue 176
- special categories
  - SpecialCatAdd 148
  - SpecialCatDelete 149
  - SpecialCatMake 150
  - SpecialCatUpdate 151
- SpecialCategory 229
- Speed 165
- SplitWeek 177
- SQL 165
- Stamp 165
- status
  - revert to defaults using MDCClear 128
- Status 222
- Storage 187, 212
- stream extract
  - SegmenterPrompt 162
  - SegmenterPromptEnabled 162
- StreamExtractSize 166
- structured MDL
  - introduction 229
- SubDimCat 229
- subdimensions
  - naming 9
  - SubDimRootMake 151
  - SubDimRootUpdate 152
- SubDimRootMake 151
- SubDimRootUpdate 152
- SummarizeCat 153
- SummarizeLevel 154
- summarizing
  - external category values 222
- Summary 228
- SummaryLevel 222
- Suppressed 177, 203, 228
- suppression
  - PublishAllowAccessToSuppressionOptions 220, 221
  - PublishAllowMultiEdgeSuppression 221
  - PublishAllowNullSuppression 221
- SuppressNull 166
- syntax conventions 59

## T

- tables
  - DataRange 160
- TargetLevel 177
- TargetOffset 177
- ThousandSep 166
- time categories
  - Date 171
- time dimensions
  - automatically set current period 196
  - DimType 195
  - EarliestDate 195
  - LatestDate 195
  - manually set current period 196
- time periods
  - Current 171
- time-state rollups
  - average weighting 213, 214
- TimeAggregate 177
- TimeArray 187
- TimeArrayCol 187
- TimeArrayMonth 188
- TimeRank 203
- TimeStateRollup 212
- TimeStateWeight 213
- Timing 166, 213
- TmeBasedPartitionedCube 222
- ToDateLevel 178

## U

- UniqueCategories 204
- UniqueMove 204
- uniqueness
  - rules for naming objects 11
- UpdateCycle 167
- UpdateForwardReference 154
- UpdatePowerCubes 155
- UseAlternateFilename 222
- UserId 224

## V

- values
  - SuppressNull 166
- verb MDL 5
- Version 167
- versions
  - supported by this documentation xi
- View 193
- View names 10
- ViewAdd 155
- ViewDelete 156
- ViewListUpdate 156
- ViewMake 157
- ViewName 229
- viewopts 225
- views
  - Apex 225
  - Cloak 225
  - Exclude or Filter 225
- ViewUpdate 158

## W

week categories

ExtraWeek 172

WeekBegins 178

weeks

DaysInWeek option 194

PartialWeek 174

Weight 213

WeightID 214

## Y

YearBegins 178