



TOKEN ELECTRONICS IND. CO., LTD.

HONESTY PERFECTION SHARING

陶瓷陷波器电视机录像机用 XTMB 系列

✓ Trap Filters for TV/VCR Stage - XT MB Series

✉ Inquiry: rfq@tokenonline.net

Taiwan: No. 137, Sec. 1, Chung Shin Rd., Wu Ku Hsiang, Taipei Hsien, Taiwan, R.O.C
TEL: 886-2-2981 0109; FAX: 886-2-2988 7487

China: 3F South, Zhongxing Industry Bld., Changye Rd., Nanshan District, Shenzhen, Guangdong
TEL: 86-755-2605 5363, 2605 5364; FAX: 86-755-2605 5365




XT MB Series of Ceramic Trap (4.5-6.5MHz) (Compatible to Murata SFE MB)


Token XT MJ/MB lines of ceramic traps are band reject filters used for video and sound IF attenuation. The 3terMin.al XT MB Series contains 2 trap elements on one substrate for additional attenuation. This line of traps can be used in the sound IF of CATV/VCR receivers.

TECHNICAL CHARACTERISTICS			
Part Number	Center Frequency (fo1)(MHz)	Attenuation (at fo1)(dB)min	30dB Attenuation BW (fo1)(kHz)min
XT3.58MB	3.580	25	40(25dB Att.BW)
XT4.43MB	4.430	30	50
T4.5MB	4.500	35	70
T5.5MB	5.500	35	90
XT5.74MB	5.742	35	90
XT6.0MB	6.000	35	90
T6.5MB	6.500	35	90

* The level at 1MHz shall be made for a reference (0dB)

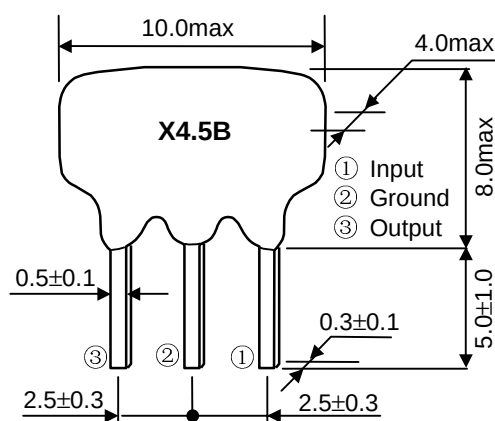

XT4.5MB TEST CIRCUIT

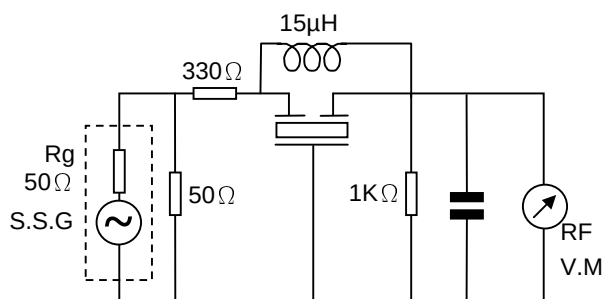

XT4.5MB

