

AUKIO – ARCHITECTURAL SUSPENDED FLUORESCENT

1 or 2 lamps



Approvals:

CSA certified to C22.2 #250.0-08

DESCRIPTION

The Aukio collection offers a wide variety of styles that are ideal for illuminating and enhancing offices or commercial environments. The Aukio series allows you to achieve a consistently simple and elegant look throughout a space, without compromising the efficiency.

POWER RANGE

- 28W T5 lamp
- 54W T5HO lamp

HOUSING AND FINISHING

The body is made of extruded aluminum, thermo-static painted with a silver-grey finish.

MOUNTING


Comes with 6' of aircraft cable, power cable and a canopy. For power cable and canopy colours, please refer to the ordering guide. Various lengths of aircraft cable available as options.

BALLAST


Available with high efficiency program start electronic ballasts. Dimming ballasts and other ballast types are optional.

LENS AND DIFFUSER

Opal, blades or louver.

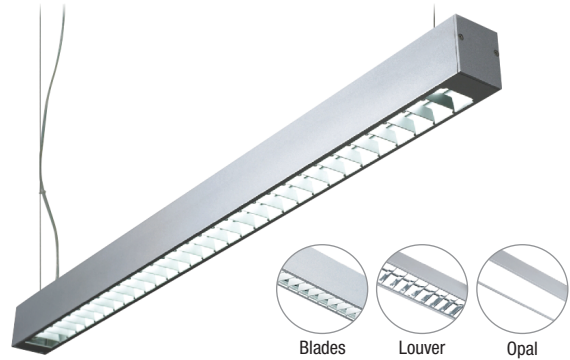

DIMENSIONS

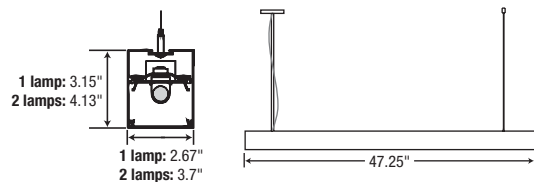

WIRING SCHEMATIC 1

Standard line voltage mounting configuration for DIM1, DIM2 options



1. Aircraft cable, power cable and 0-10V cable.
2. Aircraft cable.


WIRING SCHEMATIC 2

Configuration for DIM1A option



1. Aircraft cable and power cable.
2. Aircraft cable and 0-10V.

POLAR CANDELA DISTRIBUTION

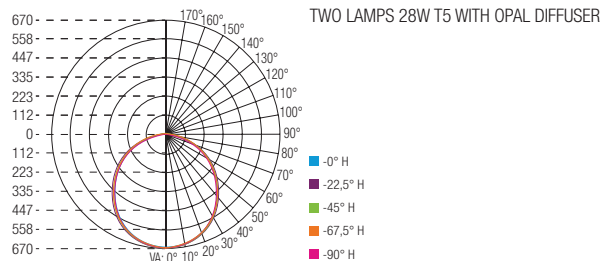

ORDERING GUIDE

AUK — — — — — — — — — —									
Series	Lens	Nbr of lamps	Lamp type	Wattage	Voltage	Fixture colour	Power cable colour	Canopy colour	Options
AUK	O - Opal B* - Blades V - Louver	1 - 1 lamp	T5	28 - 28W	4 - 120V	S - Silver grey (standard) W - White B - Black	S - Silver grey W - White B - Black	S - Silver grey W - White B - Black	DIM1 - 0-10VDC dimming ballast 120V, 120-277V (schematic 1) DIM1A - Same as DIM1 but schematic 2 DIM2 - Line voltage dimming, ballast 120V, 120-277V DALI1 - Digital adressable lighting interface driver (Not available in 347V) (schematic 1) PSP - Program start parrallel ballast L_____ - Aircraft cable (6' standard)
		2 - 2 lamps	T5HO	54 - 54W	8 - 347V 2 - 120-277V				

* The option for blades lens is available only with silver grey fixture colour.

Note: Due to the fact that not all lamp/ballast combinations are compatible, please consult factory.