

LCD TV

LS15S13C

Owner's Instructions

Before operating the unit, please read this manual thoroughly, and retain it for future reference.

ON-SCREEN MENUS
TELETEXT
PICTURE IN PICTURE

Information in this document is subject to change without notice. © 2002 Samsung Electronics Co., Ltd. All rights reserved.


Reproduction in any manner whatsoever without the written permission of Samsung Electronics Co., Ltd. is strictly forbidden.

Samsung Electronics Co., Ltd. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.


The *Samsung logo* is the registered trademarks of Samsung Electronics Co., Ltd.; *VESA, DPMS* and *DDC* are registered trademarks of Video Electronics Standard Association; the *Energy Star* name and logo are registered trademarks of the U.S. Environmental Protection Agency (EPA). As an Energy Star Partner, Samsung Electronics Co., Ltd. has determined that this product meets the *Energy Star* guidelines for energy efficiency. All other product names mentioned herein may be the trademarks or registered trademarks of their respective owners.

Safety Instructions

These illustrations represent precautions concerning your TV.



Do NOT expose the TV to extreme temperature conditions (below 5°C and above 35°C) or to extreme humidity conditions (less than 10% and more than 75%).



Do NOT expose the TV to direct sunlight.




Do NOT expose the TV to any liquids.



If the TV is broken, do not try to repair it yourself. Contact qualified service personnel.



During a storm conditions (especially when there is lightning) unplug the TV from the mains socket and aerial.



If the remote control is not used for a long period of time, remove the batteries and store it in a cool, dry place

THIS DEVICE IS NOT FOR USE IN INDUSTRIAL ENVIRONMENTS

Caution



CAUTION

RISK OF ELECTRIC SHOCK DO NOT OPEN



CAUTION: TO PREVENT ELECTRICAL SHOCK, DO NOT REMOVE REAR COVER, NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The main voltage is indicated on the rear of the TV set and the frequency is 50 or 60Hz. The lightning flash and arrow head within the triangle is a warning sign alerting you of "dangerous voltage" inside the product.



The exclamation point within the triangle is a warning sign alerting you of important instructions accompanying the product.



WARNING: TO PREVENT DAMAGE WHICH MAY RESULT IN FIRE OR SHOCK HAZARD. DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

Mode	System
CW/WS	PAL-B/G, D/K, I, SECAM-B/G,D/K, I, L/L', NTSC4.43
CS	PAL-B/G, D/K, I, SECAM-B/G,D/K, I, NTSC4.43/3.58

Thank you for buying a SAMSUNG TV.

Please take the time to read these instructions, as they will help you to operate your TV with ease.


Contents

•	Foreword	
	Safety Instructions	3
	■ Caution	3
	Company of Description Volta Telephone	
•	CONNECTING AND PREPARING YOUR TELEVISION Control Panels	,
	Connection Panel Infrared Barrata Control	
	■ Infrared Remote Control	
	Connecting to an Aerial or Cable Television Network	
	Connecting a Satellite Receiver	
	■ Connecting a Decoder	
	■ Inserting the Batteries in the Remote Control	
	Switching Your Television On and Off	
	■ Placing Your Television in Standby Mode	
	Becoming Familiar with the Remote Control	
	Plug and Play Feature	
	Choosing Your Language	15
	SETTING THE CHANNELS	
•	Automatic Storing of Channels	16
	Sorting the Stored Channels	
	Manual Storing of Channels Assigning Names to Channels	
	Assigning Names to Channels	
	Skipping Unwanted Channels Size Trainer Channels	
	■ Fine Tuning Channels	22
٠	SETTING THE PICTURE	
•	Adjusting the Picture Standard	29
	Adjusting the Picture Settings	
	Selecting the Picture Format (DTV Mode only)	
	Freezing the Picture	
		_
•	SETTING THE SOUND	
	Adjusting the Volume	25
	Switching the Sound Off Temporarily	
	Selecting the Sound Standard	
	Selecting the Sound Settings	
	Selecting the Sound Mode	
	Selecting the Melody Sound	
	■ Virtual Dolby	
	Adjusting the Volume Automatically	
	Connecting the Headphones	
	Selecting the Sound	

Contents

■ F	THE PIP Picture In Picture Feature Selecting the Blue Screer			
■ S	A THE TIME Setting the Sleep Timer Setting and Displaying the Switching the Television (e Current Time		33
■ A ■ C	THE PC Connecting to the PC Inpode Adjusting the Screen Quant Changing the Screen Post Changing the Screen Colon Adjusting the Screen Colon Colo	llity sitionour Standard		36 36 37
■ T ■ E ■ S	THE TELETEXT FEATURE Teletext Decoder Displaying the Teletext In Selecting a Specific Telet Using FLOF to Select a Telets Tel	formationext Page eletext Page		38 39 40
CCVTEFKS	ATION ON CONNECTIONS Connecting to the Compo Connecting to the RCA In Connecting to the S-Vider /iewing Pictures From Ex Troubleshooting: Before (Display Modes	nent Input/Outputs put o Input tternal Sources Contacting Service	Personnel	
		Symbols		
	\bigwedge			>
Press	Push	Hold down	Important	Note

Control Panels

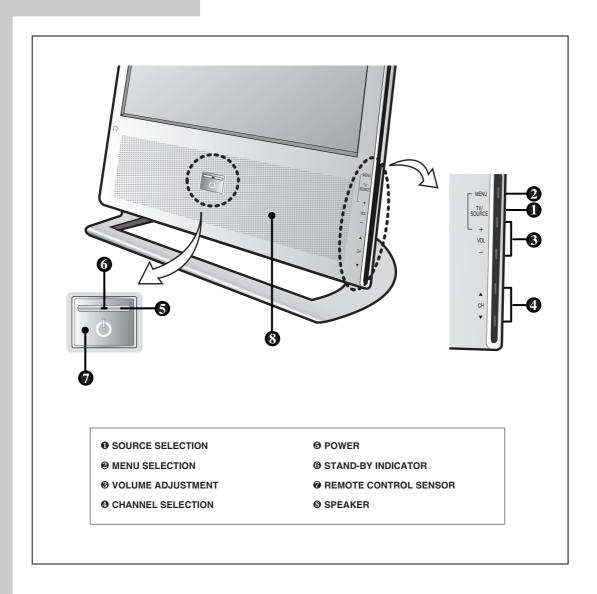


Using the Buttons on the Panel


If the remote control no longer works or you have lost it, you can use controls on the panel of the TV to:

- lacktriangle Switch on the TV when it is in Standby mode and select channels (lacktriangle CH lacktriangle)
- ◆ Access the local menu (**MENU**)
- ◆ Adjust the volume (+ VOL)
- ◆ Switch among Video input modes (**SOURCE**; Press the Menu and Volume up buttons simultaneously to change the source.)

Connection Panels

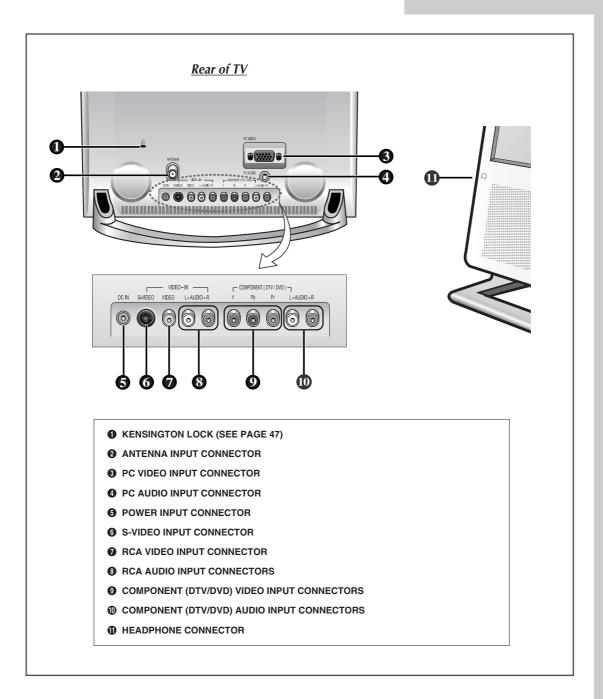

Infrared Remote Control

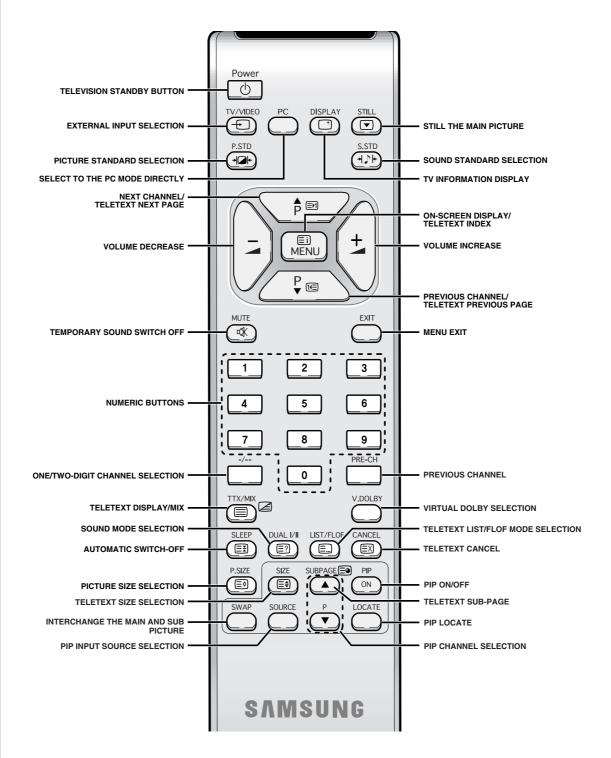

It is possible that the work of the transmitter is dull or not operated normally if the light of the Bulb is on around the TV set.

Connecting to an Aerial or Cable Television Network

To view TV channels correctly, a signal must be received by the set from one of the following sources:


- ♦ An outdoor aerial
- ◆ A cable TV network
- ♦ A satellite network (see page 10 for further details)
- 1 In the first three cases, connect the aerial or network input cable to the 75Ω coaxial socket on the rear of the TV.
- 2 If you are using an indoor aerial, you may need to turn it when tuning your TV until you obtain a picture that is both sharp and

For further details, refer to:


- "Automatic Storing of Channels" on page 16
- ◆ "Manual Storing of Channels" on page 18



If you wish to subscribe to a cable network, contact your local dealer.

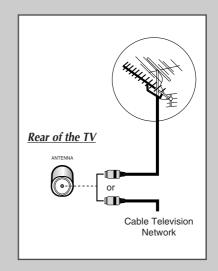

Connecting a Satellite Receiver

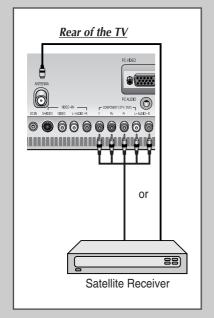

In order to watch TV programmes broadcast via a satellite network, you must connect a satellite receiver to the TV set.



If you wish to connect both a satellite receiver and a VCR, you should connect the:

- ◆ Receiver to the VCR
- ♦ VCR to the TV (see pages 41~42 for further details)


Otherwise, connect the receiver directly to the TV.

Using a coaxial cable

Connect a coaxial cable to the:

- ◆ Receiver output sockets.
- ◆ Television aerial input socket.

Connecting a Decoder

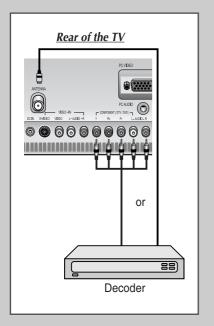

In order to descramble a coded transmission signal, you must connect a decoder to the TV set.



If you wish to connect both a decoder and a VCR, you should connect the:

- Decoder to the VCR
- ◆ VCR to the TV (see pages 42~42 for further details)

Otherwise, connect the decoder directly to the TV.

Using a coaxial cable

Connect a coaxial cable to the:


- Receiver output sockets.
- ◆ Television aerial input socket.


English-10


Inserting the Batteries in the Remote Control

You must insert or replace the batteries in the remote control when you:


- ◆ Purchase the TV
- Find that the remote control is no longer operating correctly
- 1 Remove the cover on the rear of the remote control by pressing the symbol downwards and then pulling firmly to remove it.
- Insert two R03, UM4, "AAA" 1.5V or equivalent batteries taking care to respect the polarities:
 - + on the battery against + on the remote control
 - - on the battery against on the remote control
- 3 Replace the cover by aligning it with the base of the remote control and pressing it back into place.
- Do not mix battery types, i.e. alkaline and monganese.








Switching Your TV On and Off





The mains lead is attached to the rear of your TV.




The main voltage is indicated on the rear of the TV and the frequency is 50 or 60Hz.


- 1 Plug the mains lead into an appropriate socket.
 - Result: The Standby indicator lights up on the front panel.
- 2 Press the **POWER** button (\circlearrowleft) to switch the TV on.

Result: The programme that you were watching last is reselected automatically.

- When you switch the TV on for the very first time, you will be asked to choose the language in which the menus are to be displayed (see page 14).
- 3 To switch your TV off, press the **POWER** button (\circlearrowleft) again.

Placing Your Television in Standby Mode






English-12

Your TV can be placed in Standby mode, in order to reduce the Power consumption.

The Standby mode can be useful when you wish to interrupt viewing temporarily (during a meal, for example).

- 1 Press the **POWER** button (\bigcirc).
 - Result: The screen is turned off and a green Standby indicator appears on the front of the TV.
- **2** To switch the TV back on, simply press the **POWER** button (也) again or a number button.




Becoming Familiar with the Remote Control

The remote control is used mainly to:


- ♦ Change channels and adjust the volume
- ♦ Set up the TV using the on-screen menu system


The following table presents the most frequently used buttons and their functions.


Button	Viewing Function	Menu Function	
P▲	Used to display the next stored channel.	-	
P▼	Used to display the previous stored channel.	-	
	pushed immediately	nnels, the second digit must be after the first. Failure to do this digit channel being displayed.	
	Used to reduce the volume.	Used to confirm your choice.	
+	Used to increase the volume.	Used to confirm your choice.	
\$100 th	-	Used to: ◆ Display a submenu containing selections for the current menu option ◆ Search forwards/backwards manually for channels ◆ Increase/reduce a menu option value	
MENU	Used to display the on-screen menu system.	Used to return to the previous menu or normal viewing.	
0 to 9	Used to display the corresponding channels.	Used to display the corresponding channel directly.	

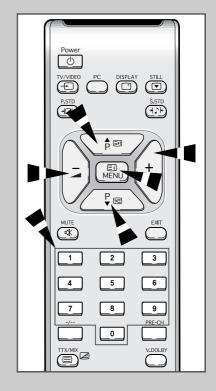

Plug and Play Feature







When the TV is initially powered ON, two basic customer settings proceed automatically and subsequently. The following settings are available.

1 If the TV is in Standby mode, press the **POWER** button (也) on the remote control.

Result: The message Plug & Play is displayed. It flickers for a little while, and then the Language menu is automatically displayed.

- 2 Select the appropriate language by pressing the ▲P or ▼P button
- 3 Press MENU button to confirm your choice.

Result: The **Time** menu is automatically displayed.

- Press the the

 or

 to move to the hour or minute.

 Set the hour minute by pressing the

 P or

 P button.

 (refer to "Setting to clock" on page 33)
- When it has finished, the message Enjoy your watching is displayed, and then the channel which has been stored will be activated.

Plug and Play Feature

If you want to reset this feature...

1 Press the **MENU** button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the **Function**. Press the ★ or ➡ button.

Result: The options available in the **Function** group are displayed.

3 Press the ▲P or ▼P button to select the Plug & Play.

1 Press the 🛨 or 🚄 button.

Result: The message Plug & Play is displayed.

5 For further details on how to set, refer to the opposite page.



Choosing Your Language

When you start using your TV for the first time, you must select the language which will be used for displaying menus and indications.

1 Press the **MENU** button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the Function. Press the ★ or → button.


Result: The options available in the **Function** group are displayed. The **Language** is selected.

3 Press the $\frac{1}{2}$ or $\frac{1}{2}$ button again.

Result: The languages available are listed.

4 Press the ▲P or ▼P button to select appropriate language.

5 When you are satisfied with your choice, press the MENU button to return to normal viewing.






English-15


Automatic Storing of Channels

4


Result:











You can scan for the frequency ranges available to you, (availability depends on your country). Automatically allocated programme numbers may not correspond to actual or desired programme numbers. However you can sort numbers manually and clear any channels you do not wish to watch (see pages 17~19 for further details).

1 Press the **MENU** button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the **Channel**.

Press the ★ or ➤ button.

Result: The options available in the **Channe1** group are displayed.

3 Press the ▲P or ▼P button to select the **Auto store**. Press the + or - button.

Result: The options available in the **Auto store** group are displayed.

- Press the ▲P or ▼P button to select the **Country**.
- Press the $\frac{1}{2}$ or $\frac{1}{2}$ to select your country. If you have selected the Others option but do not wish to scan the PAL frequency range, store the channels manually (see page 18).
- Press the ▲P or ▼P button to select the Search.
 Press the ★ or ➡ button.

The search will end automatically. Channels are sorted and stored in an order which reflacts their position in the frequency range, (with lowest first and highest last). The programme originally selected is then displayed.

- To stop the search before it has finished, press the **MENU** button.
- 7 When the channels have been stored, you can:
 - Sort them in the order required (see page 17)
 - ◆ Fine-tune channel reception if necessary (see page 22)
 - Assign a name to the stored channels (see page 20)

Sorting the Stored Channels

The Sort operation allows you to change the programme numbers of stored channels. This operation may be necessary after using ATM. You can delete those channels you do not want to keep.

1 Press the **MENU** button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the Channel.
Press the ★ or ➤ button.


3 Press the ▲P or ▼P button to select the **Sort**. Press the ★ or ➤ button.

Result: The **Sort** menu is displayed.

- 4 Press the ▲P or ▼P to select the **From**.
- 5 Press the \pm or $\overline{}$ to select the channel that you wish.
- 6 Press the ▲P or ▼P button to select the **To**.
- 7 Press the $\frac{1}{2}$ or $\frac{1}{2}$ to select the number of the programme to which the channel os to be moved.
- 8 Press the ▲P or ▼P button to select the **Store**.
- 9 Press the $\frac{1}{2}$ or $\frac{1}{2}$ button to select the **o**k.

Result: The channel is moved to its new position and all other channels are shifted accordingly.

10 Repeat Steps 6 to 11 until you have moved all the channels to the required programme numbers.














Manual Storing of Channels











You can store up to 100 TV channels, including those received via cable networks.

When storing channels manually, you can choose:

- ♦ Whether or not to store each of the channels found
- The programme number by which you wish to identify each stored channel
- 1 Press the **MENU** button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the **Channel**.

Press the ★ or ➤ button.

3 Press the ▲P or ▼P button to select the Manual store. Press the + or - button.

Result: The Manual store menu is displayed.

4 If necessary, indicate the broadcasting standard required by Pressing the ▲P or ▼P to select the **Color system**, followed by

Press the $\frac{1}{2}$ or $\frac{1}{2}$ button. The color standards are displayed in the following order:


$$\rightarrow$$
 AUTO \rightarrow PAL \rightarrow SECAM \rightarrow NT4.43 \rightarrow NT3.58 $-$


Select the Sound system by pressing the ▲P or ▼P button, and followed by pressing the ★ or ▼. The sound standards are displayed in the following order.:

$$\stackrel{\longrightarrow}{\longrightarrow} BG \longrightarrow DK \longrightarrow I \longrightarrow M \longrightarrow$$

- **6** Press the ▲P or ▼P button to select the **Store**.
- 7 Press the $\frac{1}{2}$ or $\frac{1}{2}$ button to select the **o**K.

Manual Storing of Channels

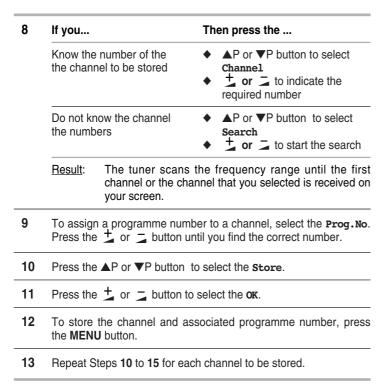











Assigning Names to Channels









Channel names will be assigned automatically when channel information is broadcast. These names can be changed, allowing you to assign new names.

1 Press the **MENU** button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the **Channel**.

Press the ★ or ▼ button.

Result: The options available in the **Channel** group are displayed.

3 Press the ▲P or ▼P button to select the Name. Press the ★ or ➡ button.

Result: The Name menu is displayed with the current channel automatically selected.

4 If necessary, select the channel to be assigned a new name by Pressing the ▲P or ▼P button.

5 Press the \pm or \equiv button.

6

To...

Result: Arrow indications are displayed around the name box.

Select a letter, number or symbol

Then press the...

▲P or ▼P button

Move on the next letter

t button

Move back the previous letter

_ button

The characters available are:

- ◆ Letters of the alphabet (A ... Z)
- ♦ Numbers (0 ... 9)
 - Special characters (_, -, space)

7 You can have each channel newlynamed.

When you have finished entering the name, press the MENU button to confirm the name.

Skipping Unwanted Channels

You can exclude the channels of your choice from the channel scan operation. When you scan through the stored channels, those you have chosen to skip are not displayed.

All channels that you do not specifically choose to skip are displayed during scanning.

1 Press the **MENU** button.

Result: The main menu is displayed.


Press the ▲P or ▼P button to select the Channel.
Press the ♣ or ➡ button.

Result: The options available in the **Channel** group are displayed. The **Channel** menu is displayed.


3 Press the ▲P or ▼P button to select the Add/Erase. Press the ★ or ➤ button.


Result: The Add/Erase menu is displayed.

- 4 Press the ▲P or ▼P button to select the required channel.
- 5 To add or erase the desired channel by pressing the \pm or $\overline{}$ button.
- When you have finished adding and erasing channels, press the MENU button repeatedly to return to normal viewing.










Fine Tuning Channels











Use fine tuning to manually adjust a particular channel for optimal reception.

- 1 Press the **MENU** button Result: The main menu is displayed. Press the \blacktriangle P or \blacktriangledown P button to select the **Channel**. Press the $\frac{\bot}{}$ or $\overline{\ }$ button. 2 Result: The options avaliable in the Channel group are displayed. Press the $\triangle P$ or ∇P button to select the **Fine Tune**. Press the $\stackrel{\bot}{+}$ or $\stackrel{\smile}{-}$. Press the \pm and $\overline{}$ button to adjust the fine tuning. 4 5 Press the $\triangle P$ or $\blacktriangledown P$ button to select the **Store**. 6 Press the $\frac{1}{2}$ or $\frac{1}{2}$ button to select the **o**k.
- 7 To reset the fine tuning.

 Press the ▲P or ▼P button to select the Erase, then press the

 † or ¬ to select the OK.

Changing the Picture Standard

You can use your remote control to select the type of picture which best corresponds to your viewing requirements. The following picture effects are available:

◆ Custom, Standard, Dynamic, Movie, Mild.

To select the required picture effect, simply press the $\textbf{P.STD}(\neg | \square \vdash)$ button on the remote control.



You can also set these options via the **Adjust** option in the **Picture** group. If you change the **Contrast**, **Brightness**, **Sharpness**, **Colour**, **Tint** (NTSC only) or **Colour tone** settings on the **Picture** menu, the **Custom** option is selected automatically.



Adjusting the Picture Settings

Your TV has several settings which allow you to control picture quality:

- ◆ Contrast, Brightness, Sharpness, Colour, Tint (NTSC only), Colour tone
- 1 Press the MENU button.


Result: The options available in the **Picture** group are displayed.

- 2 Press the $\frac{1}{2}$ or $\frac{1}{2}$ button.
- 3 Press the ▲P or ▼P button to select the required item you want change.
 - When select the Mode to Custom, the Adjust menu is displayed.
- 4 To adjust the... Press the...


 - Brightness
- Result: The horizontal bar is displayed.
- ♦ Sharpness
- ◆ Colour
- ◆ Tint (NTSC only)
- ◆ Colour tone ◆ [±] or [±] button.

Result: You select the required option (Normal, Warm, Cool).


When you are satisfied with the settings, press the MENU button repeatedly to return to normal viewing.




Selecting the Picture Format (DTV Mode only)



You can select the picture format which best corresponds to your viewing requirements by simply pressing the "P.SIZE" button.

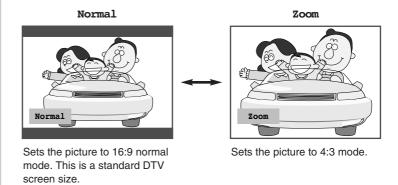

Freezing the Picture




Press the STILL button to freeze a moving picture into a still one. Press the again to cancel.


This function will not operate in the PC Mode. NT4.43 is not supported in the sub-display.


Adjusting the Volume

You can adjust the volume using your remote control.

То	hold down the
Increase the volume	± button.
	Result: A horizontal bar is displayed and the volume increases until you release the button. The cursor moves to the right to indicate the volume.
Decrease the volume	button.
	Result: A horizontal bar is displayed and the volume decreases until you release the button. The cursor moves to the left to indicate the volume.
	·








Switching the Sound Off Temporarily


You can switch the sound off temporarily.

<u>Example</u>: You wish to answer the telephone.

- 1 Press the MUTE(♥) button.
 - Result: The sound is switched off and "Mute" is displayed.
- When you wish to turn the sound back on, press the **MUTE** (♥)button again or either of the volume buttons.
 - Result: The sound comes back on at the same volume as before and the "Mute" indication disappears.



Selecting the Sound Standard



You can use your remote control to select the type of special sound effect to be used when watching a given broadcast. The following sound effects are available:


◆ Custom, Standard, Music, Movie, Speech.


To select the required sound effect, simply press the S.STD(+)+)button on the remote control.



You can also set these options via the **Equalizer** in the Sound group.

Adjusting the Sound Settings





The following settings can be adjusted to suit your personal preferences. The following settings are available:

1 Press the **MENU** button.

> Result: The main menu is displayed.

2 Press the ▲P or ▼P button to select the **Sound**.. Press the $\frac{1}{2}$ or $\frac{1}{2}$ button.

The options available in the **Sound** group are displayed.

- 3 Press the $\triangle P$ or ∇P button to select the **Equalizer**. When select the mode to ${\tt Custom}$, the ${\tt Equalizer}$ menu is
- Press the \pm or \equiv button.

Result: The Equalizer menu is displayed.

То	Pree the
Change a setting	▲P or ▼P button
Move to the next setting	† button
Move to the previous setting	button
When you are satisfied with t	the settings,press the MENU button

5 repeatedly to return to normal viewing.




If you make any changes to the **Equalizer** settings, the sound standard is automatically switched to Custom.

Selecting the Sound Mode

You can set the Audio mode by using DUAL I/II. When you press this button, current sound mode is displayed on the upper right corner of the screen.

	Audio Type	DUAL I/II	Default
	Mono	Mono	Automatic
FM Stereo	Stereo	Stereo ↔ Mono	Change
	Dual	Dual1 ↔ Dual2	Dual1
	Mono	Mono	Automatic
NICAM	Stereo	Mono ↔ Stereo	Change
	Dual	Mono → Dual1 → Dual2	Dual1



- If the receiving conditions deteriorate, listening will be easier if the mode is set to the "Mono" position using the DUAL I/II button.
- If the stereo signal is weak (or if intermittent Stereo-Mono) and automatic switching occurs, then switch to the "Mono" mode.
- ◆ When receiving mono sound in the AV mode, connect to the "L" input jack on the panels. If the mono sound comes out only from the left speaker, then press the **DUAL I/II** button.

Selecting the Melody Sound

You can hear clear melody sound when the TV is powered ON or OFF.


1 Press the **MENU** button.

Result: The main menu is displayed.


Press the ▲P or ▼P button to select Sound.
Press the ★ or ➤ button.

Result: The options available in the **Sound** group are displayed.

- 3 Press the ▲P or ▼P button to select the Melody.
- 4 Select the required option by pressing the \pm or \pm button.
- 5 Press the **MENU** button to return to normal viewing.



Virtual Dolby



This feature allows the TV's L/R speakers to provide a home Theater-like Dolby effect. The center and surround sounds are mixed into the L/R speakers.

1	Press the MENU button.
	Result: The main menu is displayed.
2	Press the ▲P or ▼P button to select the sound . Press the ★ or ➤ button.
	Result: The options available in the sound group are displayed.
4	Press the ▲P or ▼P button to select the Virtual Dolby .
5	Select the required option by pressing the \pm or $\overline{}$ button.
6	Press the MENU button to return to normal viewing.

Adjusting the Volume Automatically



Each broadcasting station has its own signal conditions, and so it is not easy for you to adjust the volume every time the channel is changed. Auto volume lets you automatically adjust the volume of the desired channel by lowering the sound output when the modulation signal is high or by raising the sound output when the modulation signal is low.

1	Press the MENU button.
	Result: The main menu is displayed.
2	Press the ▲P or ▼P button to select sound . Press the ★ or ➡ button.
	Result: The options available in the Sound group are displayed.
3	Press the ▲P or ▼P button to select the Auto volume.
4	Select the required option by pressing the 👲 or 🚄 button.
5	Press the MENU button to return to normal viewing.

Connecting Headphones

You can connect a set of headphones to your TV if you wish to watch a TV programme without disturbing the other people in the room.

Plug a set of headphones into the 3.5 mm mini-jack socket on the panel of the TV. $\,$


Result: The sound is heard through the headphones.

- For further details on how to set your headphone preferences, refer to the section below.
- Prolonged use of headphones at a high volume may damage your hearing.
- You will not receive sound from the speakers when you connect headphones to the system.



Selecting the Sound





Press the MENU button.

Result: The main menu is displayed.


Press the ▲P or ▼P button to select Sound.
Press the ★ or ➤ button.

Result: The options available in the **Sound** group are displayed.

- 3 Press the ▲P or ▼P button to select the **Sound select**.
- 4 Select the required option by pressing the $\frac{1}{2}$ or $\frac{1}{2}$ button.
- 5 Press the **MENU** button to return to normal viewing.
 - The sound of subscreen can be selected only while the PIP functions is operating.

Picture in Picture Feature





You can display a "Picture-in-Picture screen" within the main picture of TV programme or Video input. In this way you can watch or monitor TV programme or the Video input from any connected equipment while watching TV or other Video input. For information about connection of other equipment, refer to pages 41 and 42.

1 Press the MENU button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select Function.

Press the ★ or ¬ button.

Result: The options available in the **Function** group are displayed.

3 Press the ▲P or ▼P button to select PIP. Press the + or - button.

Result: The options available in the PIP group are displayed.

To activate the PIP feature, set the PIP to On by pressing the or button.

English-30

Picture in Picture Feature (continued)

Press the ▲P or ▼P button to select **TV/VIideo**.

Then, select a source of the sub picture by pressing the
button. The sources are displayed in the following order:



- To interchange the main picture and the sub picture, select the \mathbf{Swap} option and press the $\overset{+}{\mathbf{\bot}}$ or $\overset{-}{\mathbf{\bot}}$ button.
- 7 Press the ▲P or ▼P button to select Prog.No. You can select the channel that you want to view through sub picture by pressing the

 details or □ button.
- **8** To return to normal viewing, press the **MENU** button.


Remote-control functions while "PIP" is "On":

Features	Description	
PIP ON	Used to operate ON/OFF function of PIP directly.	
SWAP	Used to interchange the main picture and the sub picture.	
	When the main picture is in the Video mode and the sub picture is in the TV mode, you might not hear the sound of main picture when pressing the SWAP button after changing the sub picture channel. At this time, reselect the main picture channel.	
	> The swap function will not operate in PC Mode.	
SOURCE	Used to assign a source of sub picture (TV, VIDEO, S-VIDEO, COMP).	
P ▼/▲	Used to select the channel of sub picture.	
LOCATE	Used to move the sub picture counterclockwise.	









Setting the Blue Screen Mode




If no signal is being received or the signal is very weak, a blue screen automatically replaces the noisy picture background.

If you wish to continue viewing the poor picture, you must set the "Blue screen" mode to "Off".

1	Press the MENU button.
	Result: The main menu is displayed.
2	Press the ▲P or ▼P button to select the Function . Press the ★ or ★ button.
	Result: The options available in the Function group are displayed
3	Press the ▲P or ▼P button to select the Blue screen .
4	Select the required option by pressing the $\stackrel{+}{\beth}$ or $\stackrel{-}{\beth}$ button.
5	Press the MENU button repeatedly to return to normal viewing.

Setting the Sleep Timer



Sleep Timer 30

You can select a time period of between 30 and 180 minutes after which the television automatically switches to Standby mode by pressing the "SLEEP" button.

1 Press the **SLEEP** button on the remote control.

Result:

If the sleep timer is	The screen displays
Already set	Time remaining before the television will be placed in standby mode.
Not yet set	Word "Off".

2 Press the **SLEEP** button repeatedly and cycle through the preset time intervals (30, 60, 90, 120, 150, 180).

Result: The TV automatically switches to standby mode when the timer reaches 0.

3 To cancel the sleep timer function, press the SLEEP button repeatedly and select "Off".

Setting and Displaying the Current Time

You can set the TV's clock so that the current time is displayed when you press the "DISPLAY" button.

You must also set the time if you wish to use the automatic On/Off timers.

If you disconnect the power cord and re-connect it, the clock will be reset to the default value.

1 Press the MENU button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the **Function**. Press the + or → button.

Result: The options available in the **Function** group are displayed

3 Press the ▲P or ▼P button to select the Time. Press the + or → button.

Result: The "Time" menu is displayed with the 'Clock' selected.

4	То	Press the
	Move to the hour or minute	or button.
	Set the hour or minute	▲P or ▼P button.

- When you have finished, press the MENU button or, press the MENU button repeatedly to return to normal viewing.
- 6 To display the... Press the "DISPLAY" button...

 Channel information Once.


 Current time Twice.
- 7 To remove the display, press the **DISPLAY** button again.








Switching the Television On and Off Automatically











You can set the On/Off timers so that the TV will:

- ♦ Switch on automatically and tune to the channel of your choice at the time you select
- ♦ Switch off automatically at the time you select
- The first step is to set the TV's clock (refer to "Setting and Displaying the Current Time" on the previous page).
- 1 Press the **MENU** button.

Result: The main menu is displayed.

Press the ▲P or ▼P button to select the Function. Press the + or - button.

Result: The options available in the **Function** group are displayed.

Press the ▲P or ▼P button to select the Time.
Press the ★ or ➤ button.

Result: The **Time** menu is displayed.

- 4 Press the ▲P or ▼P button to select the **On time**.
- **5** Set the time at which you wish the TV to be switched On.


То	Press the
Move to the hour or minute	+ or - button
Adjust the hour or minute	▲P or ▼P button.
Move to the Off	+ or - button
Set the On or Off	▲P or ▼P button.

- 6 In the same way, set the time at which you wish the TV to be switched Off.
- 7 If you want set the channel when the TV turns on, press the ▲P or ▼P button to select the **On Prog.No**. Press the

 or button to select channel.
- 8 If you want set the volume level when the TV turns on, press the ▲P or ▼P button to select the **On time volume**. Press the ★ or ➡ button to adjust volume level.
- When you have finished setting the On/Off time, On Prog. No or On time volume, press the MENU button repeatedly to return to normal viewing.

Connecting to the PC Input

The PC(VIDEO/AUDIO-ST) connectors are used for interfacing with your PC.

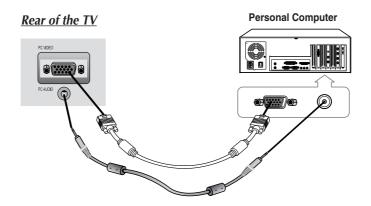

➤ How to Set up Your PC Software (Based on Windows 98)

The Windows display-settings for a typical computer are shown below. But the actual screens on your PC will probably be different, depending upon your particular version of Windows and your particular video card. But even if your actual screens look different, the same, basic set-up information will apply in almost all cases. (If not, contact your computer manufacturer or Samsung Dealer.)








First, click on "Settings" on the Windows start menu.

While "Settings" is highlighted, move the cursor so that "Control Panel" is highlighted.

When the control panel screen appears, click on "Display" and a display dialog-box will appear.

Navigate to the "Settings" tab on the display dialog-box.




The correct setting of size (resolution) is "1024 x 768pixels".

If a vertical-frequency option exists on your display settings dialog box, the correct value is "60" or "60 Hz". Otherwise, just click "OK" and exit the dialog box.

Only black signal is output from a monitor in PC mode.

Adjusting the Screen Quality








The propose of picture quality adjustment is to remote or reduce picture noise. If the noise is not removed by fine tuning alone, then do the frequency adjustments to the utmost and fine tune again. After the noise has been reduced, re-adjust the picture so that it is aligned on the center of screen.

Preset to the PC mode by using the PC button.

- 1 Press the **MENU** button.
 - Result: The main menu is displayed.
- Press the ▲P or ▼P button to select the PC. Press the + or - button.
 - Result: The options available in the PC group are displayed
- 3 Press the ▲P or ▼P button to select the **Coarse** or **Fine**.
- 4 Press the $\frac{1}{2}$ or $\frac{1}{2}$ button to adjust the screen quality, vertical stripes appears or the picture may be blurry.
- When you are satisfied with the settings, press the MENU button repeatedly to return to normal viewing.

Changing the Screen Position









English-36

Preset to the PC mode by using the PC button.

- 1 Press the MENU button.
 - Result: The main menu is displayed.
- Press the ▲P or ▼P button to select PC. Press the + or - button.
 - Result: The options available in the PC group are displayed.
- 3 Press the ▲P or ▼P button to select the H-Position or V-Position.
- 4 Press the $\frac{1}{2}$ or $\frac{1}{2}$ button to adjust the required position.
- 5 Press the **MENU** button repeatedly to return to nomal viewing.

To initialize the image adjustment.

- 1 After steps 1~2 above are completed, press the ▲P or ▼P button to select the Image Recall.
- 2 Press the \(\frac{1}{2}\) or \(\frac{1}{2}\) button to initialize the image adjustment.

Changing the Screen Colour Standard

Preset to the PC mode by using the PC button.

1 Press the MENU button.

> Result: The main menu is displayed.

2 Press the $\triangle P$ or ∇P button to select **PC**.


Press the $\frac{1}{2}$ or $\frac{1}{2}$ button.

The options available in the PC group are displayed. Result:

Press the $\triangle P$ or ∇P button to select the **Colour Adjust**, then press the $\frac{1}{2}$ or $\frac{1}{2}$ button. 3

Result: You can select Costom, Colour1, Colour2 or

Press the **MENU** button repeatedly to return to normal viewing.





Adjusting the Screen Colour Settings

Preset to the PC mode by using the PC button.

1 Press the **MENU** button.

The main menu is displayed.

Press the \blacktriangle P or \blacktriangledown P button to select **PC**. Press the \dotplus or \beth button. 2

The options available in the PC group are displayed.

- Press the $\triangle P$ or ∇P button to select the **Colour Adjust**, then press the $\frac{1}{2}$ or $\frac{1}{2}$ button. 3
- 4 Press the ▲P or ▼P button to select the required item you want

5 To adjust the... Press the...


G


or button.


Press the MENU button repeatedly to return to nomal viewing.

To initialize the Colour adjustment.

- 1 After steps 1~2 above are completed, press the ▲P or ▼P button to select the Colour Recall.
- Press the $\stackrel{+}{\beth}$ or $\stackrel{-}{\beth}$ button to initialize the Colour adjustment. 2








English-37

Teletext Decoder

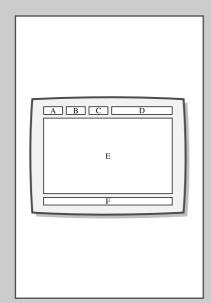


Most TV channels carry "teletext," pages of written information that provide information such as:


- **♦** Television programme times
- News bulletins
- Weather forecasts
- Sports results
- Subtitles for the hard of hearing

The teletext pages are organized according to six categories:

Part	Contents
Α	Selected page number.
В	Broadcasting station identity.
С	Current page number or search status.
D	Date and time.
E	Text.
F	Status information.

Displaying Teletext Information





You can display teletext information at any time, but signal reception must be good. Otherwise:

- Information may be missing
- Some pages may not be displayed

To activate the teletext mode and display the contents page:

- 1 Using the ▲ (🗐) or ▼ (📵) button, select the channel providing the teletext service.
- 2 Press the TTX/MIX () button to activate the teletext mode.

Result: The contents page (page 100) is displayed. It can be redisplayed at any time by pressing the (index) button.

- **3** To display the actual broadcast simultaneously with the teletext page, press the **TTX/MIX** ((■ / ∠) button.
- 4 To return to normal viewing press the **CANCEL** (♠) button.
- Press the TTX/MIX ((□ / (□)) button again to exit from the TTX display.



If any broken character appears while TTX is being viewed, make sure that the TTX language is identical with the language in the "Function" menu mode. If both languages are different, select the same language with the TTX language on the "Function" menu.

Selecting a Specific Teletext Page


Press the number buttons on the remote control to enter the page number directly:

1 Enter the three-digit page number listed in the contents by pressing the corresponding numeric buttons.


Result: The current page counter is incremented and the page is then displayed.

- 2 If the selected page is linked with several secondary pages, the secondary pages are displayed in sequence. To freeze the display on a given page, press the (a) (hold). Press the (b) (hold) button again to resume.
- **3** Using the various display options:

To display	Press the
 Both teletext information and the normal broadcast 	TTX/MIX (■/ 🚄)
 Hidden text (answers to quiz games, for example) 	(reveal)
◆ The normal screen	(reveal) again
 A secondary page, by entering its 4-digit number 	SUBPAGE (
◆ The next page	(page up)
◆ The previous page	(page down)
Double-size letters in the:Upper half of the screenLower half of the screen	SIZE (■) ◆ Once ◆ Twice
◆ Normal screen	◆ Three times

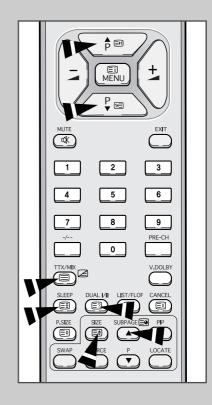

Using FLOF to Select a Teletext Page




The various topics included in the teletext pages are color-coded, and can be selected by pressing the colored buttons on the remote control.

- Press the colored button corresponding to the topic that you wish to select (The available topics are listed on the status information line).

Result: The page is displayed with additional color-coded information that can be selected in the same way.

3	To display the:	Press the:
	Previous page	Red button.
	Next page	Green button.
4	When you have finished, press the to the normal broadcast.	CANCEL() button to return

Storing Teletext Pages




Up to four teletext pages can be stored.

- 1 Select the LIST mode.
 - Result: Four 3-digit numbers are displayed in different colors at the bottom of the screen.
- Press the colored button corresponding to the page that will be replaced.
- **3** Enter the new page number using the numeric buttons.
- 4 Repeat steps 2 and 3 for each page to be stored, using a different colored button each time.
- **5** Press the (store) button until the corresponding blocks blink.
 - The **LIST/FLOF** () button is used to switch between:
 - ◆ LIST mode
 - ◆ FLOF mode


English-40

Connecting to the Component Input/Outputs

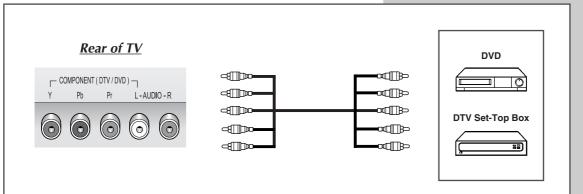

- Connect the RCA Cable to "L" and "R" on the rear of your television and the other end to "Audio Out" connector of the DVD player or DTV Set-Top Box. Connect the RCA Cable to "Y", "Pb", and "Pr" on the rear of your television and the other end to the "Component Video Out (Y, Pb, Pr)" connectors of the DVD player or DTV Set-Top Box.
 - If you wish to connect both the DTV Set-Top Box and DVD, you should connect the DTV Set-Top Box to the DVD (or VCR) and connect the DVD (or VCR) to your television.

Connecting to the RCA Input

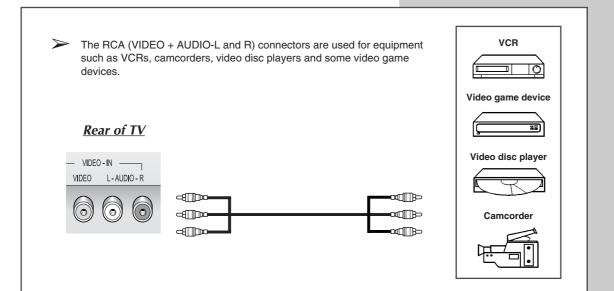



Connecting to the S-Video Input

The S-VIDEO/RCA(AUDIO-L+R) connectors are used for equipment with an S-Video output, such as a camcorder or VCR.

Rear of TV








① To playback pictures and sound both the S-VIDEO and the RCA (AUDIO-L+R) connections must be used.

Viewing Pictures From External Sources

Once you have connected up your various audio and video systems, you can view the different sources by selecting the appropriate input.

- 1 Check that all the necessary connections have been made.
- Switch the television on and if necessary, press the TV/VIDEO (-) button one or more times until the required input is displayed.
 - Depending on the source selected, the pictures may appear automatically.





Troubleshooting: Before Contacting Service Personnel

Before contacting Samsung after-sales service, perform the following simple checks.

If you cannot solve the problem using the instructions below, note the model and serial number of the television and contact your local dealer.

No sound or picture	 ◆ Check that the mains lead has been connected to a wall socket. ◆ Check that you have pressed the POWER button (ம). ◆ Check the picture contrast and brightness settings. ◆ Check the volume.
Normal picture but no sound	◆ Check the volume. ◆ Check whether the MUTE (□※) button has been pressed on the remote control.
No picture or black and white picture	 Adjust the colour settings. Check that the broadcast system selected is correct.
Sound and picture interference	 Try to identify the electrical appliance that is affecting the television and move it further away. Plug your television into a different mains socket.
Blurred or snowy picture, distorted sound	 Check the direction, location and connections of your aerial. This interference is often due to the use of an indoor aerial.
Remote control malfunctions	 Replace the remote control batteries. Clean the upper edge of the remote control (transmission window). Check the battery terminals.
"Check Signal Cable" message.	 Ensure that the signal cable is firmly connected to the PC or video sources. Ensure that the PC or video sources are turned on.
"Not Supported Mode!" message.	 Check the maximum resolution and the frequency of the video Adapter. Compare these values with the data in the Display Modes Timing Chart.
The image is too light or too dark.	◆ Adjust the Brightness and Contrast.
Horizontal bars appear to flicker, jitter or shimmer on the image.	 Adjust the Fine function. Adjust the Coarse function and then adjust the Fine function.
Vertical bars appear to flicker, jitter or shimmer on the image.	 The TV is using its power management system. Move the computer's mouse or press a key on the keyboard.
Screen is black and power indicator light is steady blinks 1 second.	 Check that the display resolution and frequency from your PC or video board is an available mode for your TV. On your computer check: Control Panel, Display, Settings.
 _	

Image is not stable and may appear to vibrate.	If the setting is not correct, use your computer utility programme to change the display settings.		
	NOTE: Your TV supports multiscan display functions within the following frequency domain:		
	◆ Horizontal frequency: 30 kHz ~ 61 kHz		
	◆ Vertical frequency: 56 Hz ~ 75 Hz		
	◆ Maximum refresh rate: 1024 x 768 @ 75 Hz		
Image is not centered on the screen.	◆ Adjust the horizontal and vertical position.		
You need the Monitor driver software.	 Download the driver from WWW pages: http://www.samsung-monitor.com http://www.samsungusa.com/monitor (USA Only) 		

Display Modes

If the signal from the system equals to the standard signal mode, the screen is adjusted automatically. If the signal from the system doesn't equal to the standard signal mode, adjust the mode with refering to the Videocard user guide because the screen might not display or only the power LED might be on. For the display modes listed below, the screen image has been optimized during manufacture.

Mode	Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Pixel Clock Frequency (MHz)	Sync Polarity (H/V)
	640×480	31.469	59.940	25.175	-/-
MAC	640×480	35.000	66.667	30.240	-/-
	800×600	49.726	74.551	57.284	-/-
IBM	720×400	31.469	70.087	28.322	-/+
VESA	640×480	37.861	72.809	31.500	-/-
	640×480	37.500	75.000	31.500	-/-
	800×600	37.879	60.317	40.000	+/+
	800×600	48.077	72.188	50.000	+/+
	800×600	46.875	75.000	49.500	+/+
	1024×768	48.363	60.004	65.000	-/-
	1024×768	56.476	70.069	75.000	-/-
	1024×768	60.023	75.029	78.750	+/+


Retractable Stand

The maximum tilt angle is 15 degree to the backward direction. Please do not tilt the TV other than specified range. Excessive force to tilt the TV other than specified range may give permanent damage to the mechanical part of the stand.





Kensington Slot

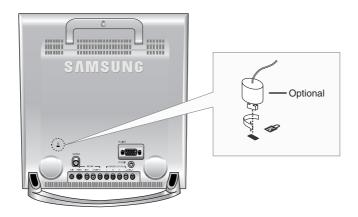


The Kensington lock is a device used to physically fix the system when using it in a public place. The locking device has to be purchased separately. The appearance and locking method may differ from the illustration depending on the manufacturer. Please refer to the manual provided with the Kensington lock for proper use.

Specifications

LS15S13C		
Panel	Size Display Size Type Pixel Pitch Viewing Angle	15" Diagonal 304.1(H) x 228.1(V)mm a-si TFT active matrix 0.297(H) x 0.297(V)mm 70/70/55/60 (L/R/U/D)
Frequency	Horizontal Vertical	30 ~ 61 kHz 56 ~ 75 Hz
Display Colour		16,772,216 colours
Resolution	Optimum Mode Maximum Mode	1024 x 768 @ 60 Hz 1024 x 768 @ 75 Hz
Input Signal	Sync. Video signal	H/V Separate, TTL, P. or N. 0.7 Vp-p @ 75 ohm
TV	Color system Sound system	PAL, SECAM, NTSC 3.58, NTSC 4.43 B/G, D/K, I, M
Video	Color system Video system	PAL/NTSC/SECAM CVBS, S-VHS, RGB
Component	DTV DVD Video Input Audio Input	YPbPr Composite sync, 480p, 720p, 1080i YPbPr Composite sync, 480i 1.0 Vp-p @ 75 ohm 500mVrms
Power Supply	Input Output	AC 90 ~ 264 V, 1.3 ~ 0.6A (50Hz / 60Hz) DC 14V/3.5A
Power Consumption	Maximum Power Saving	43 W < 1.5 W
Dimension (W X D X H) Weight	With stand With stand	346 x 169 x 362 mm 2.9 kg
Environmental Considerations	Operating Temperature Operating Humidity Storage Temperature Storage Humidity	10°C to 40°C (50°F to 104°F) 10% to 80%, Non-condensing -20°C to 45°C (-4°F to 113°F) 5% to 95%, Non-condensing
Accessory		Remote Control / Battery (AAA type) / Owner's Instructions / Adapter / D-Sub Cable (15Pin) / PC Audio Cable / Power Cord

> Referring to Preset timing modes, page 46.

Pin Assignments (Pin D-Sub Connection)



Pin	Separate H/V
1	Red (R)
2	Green (G)
3	Blue (B)
4	Grounding
5	Grounding (DDC)
6	Red (R) Grounding
7	Green (G) Grounding
8	Blue (B) Grounding
9	No connection
10	Sync Grounding
11	Grounding
12	Data (DDC)
13	Horizontal sync.
14	Vertical sync.
15	Clock (DDC)

Memo English-50

Memo

THIS APPLIANCE IS DISTRIBUTED BY:

