
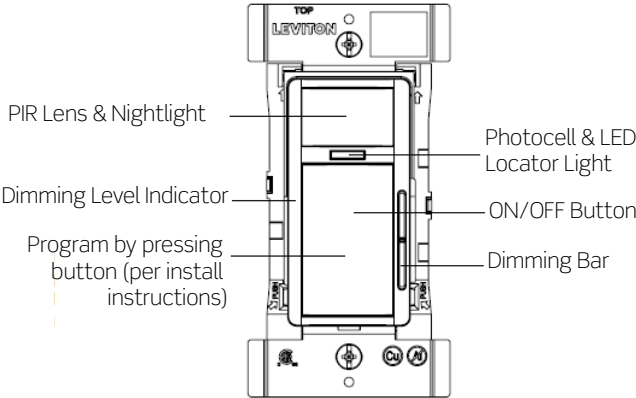


Smart PIR 0-10V Dimming Wallbox Sensor

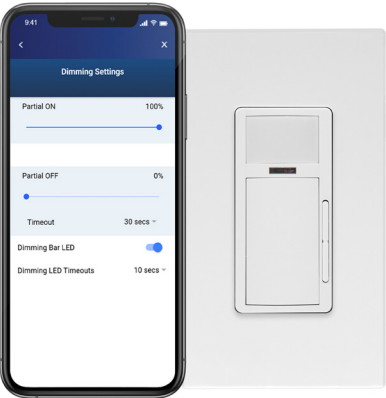

Description

The Leviton Smart Dimming Wallbox Sensor (ODD10-IDx) is designed for use with 0-10V ballasts and uses Passive Infrared (PIR) detection technology to monitor a room for occupancy using a segmented, tamper resistant lens. A specialized lens divides the field-of-view into sensor zones. When a person passes in or out of a sensor zone the sensor detects motion and switches the lights ON. The lights will remain ON as long as an occupant moves through the sensor zones and after the timeout expires. The ODD10-IDx features a vacancy mode for Manual-ON/Auto-OFF operation, ideal for installations where manual-ON switching is required for energy code applications. Lighting levels can be adjusted using the dimming bar next to the switch.

A “minor motion” zone detects small body movements. This detection allows the lights to remain ON when individuals in the space are more stationary. The “major motion” zone exhibits a lesser degree of sensitivity requiring larger movements.

Configuration of ODD10-IDx is made using the Leviton Smart Sensor App from a smartphone or other Bluetooth® enabled Android or iOS device. Simple configuration can also be applied using pushbutton setup for several common pre-configured options. The ODD10-IDx integrates a photocell for daylighting hold-OFF which can be programmed using the Leviton Smart Sensor App.

Applications

- Office
- Small Lobbies
- Meeting Rooms

Features

- Can be used to comply with IECC, ASHRAE 90.1, and 2019 Title 24, Part 6 occupancy/vacancy sensing, and dimming requirements
- Fits in a standard wallbox and gangable with other units
- Controls LED lighting loads up to 8A
- One relay module for single-level switching

Features (continued)

- 180° field-of-view provides approximately 1,100 square feet of coverage Maximum sensing distance in front of the sensor is 30-40 feet and 15-20 feet on either side
- Latest PIR technology accurately detects minor motion up to 400sq ft and major motion up to 1,100 sq ft
- Integrated photocell for daylighting hold-OFF
- Add a Power Pack and Controlled Receptacles for plug load control
- Use the Leviton Push to Pair (P2P) process to create a multi-way system for up to 5 devices
- Advanced configuration can be performed using the Leviton Smart Sensor App on any Bluetooth enabled Android or iOS device:
 - Set operating mode to Occupancy (auto-ON/auto-OFF) or Vacancy (manual-ON/auto-OFF)
 - Adjust sensitivity and timeouts
 - Set up partial-ON and partial-OFF levels and partial-OFF timeouts
 - Enable the integrated photocell for daylighting hold-OFF and select target daylighting hold-OFF levels
 - Activate the nightlight and select nightlight colors
 - Set a security code to lock configuration settings
- Out-of-the-box configuration default mode:
 - Auto-ON/auto-OFF with 20-minute time out
 - Sensitivity set to 75%
 - Nightlight and daylighting disabled
- Convenient pushbutton hold configuration for installers—no smart device needed*:

Pushbutton Hold Configuration



Button (#)	Operating Mode	Sensitivity (%)	Time Out (mins)
1	Auto-ON/ Auto-OFF	75	10
2			20
3		100	10
4			20
5	Manual-ON/ Auto-OFF	75	10
6			20
7		100	10
8			20

*Requires removal of front face cover


Product Data

ODD10-IDx


Wiring Diagrams

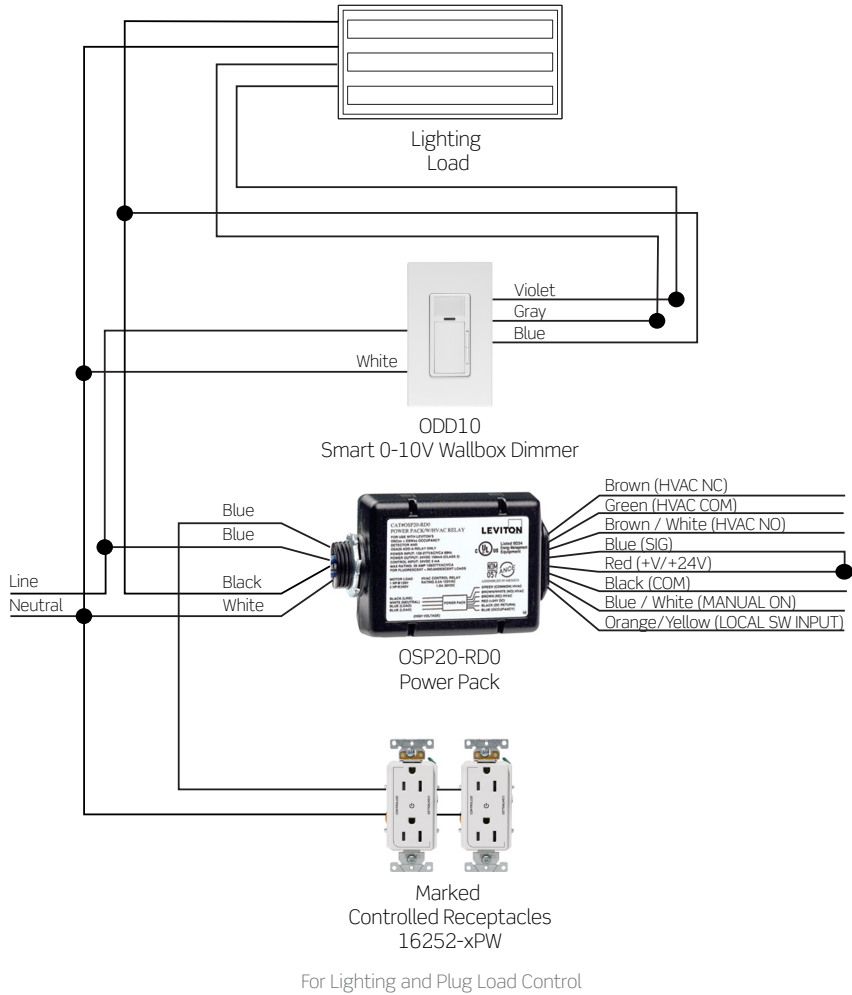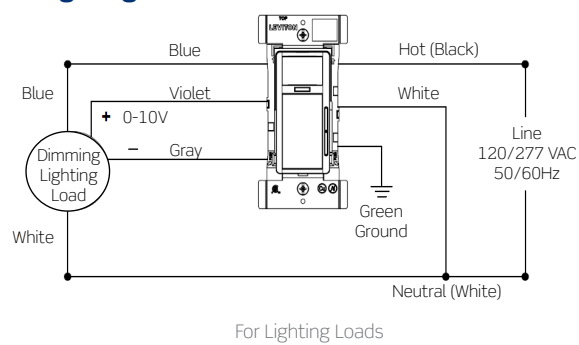

Dimensions Diagram

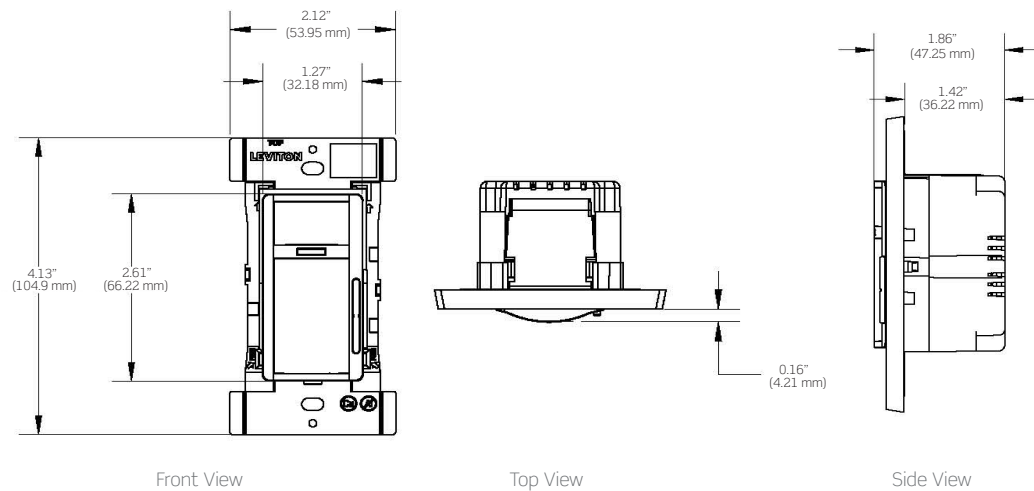

Field of View Diagram

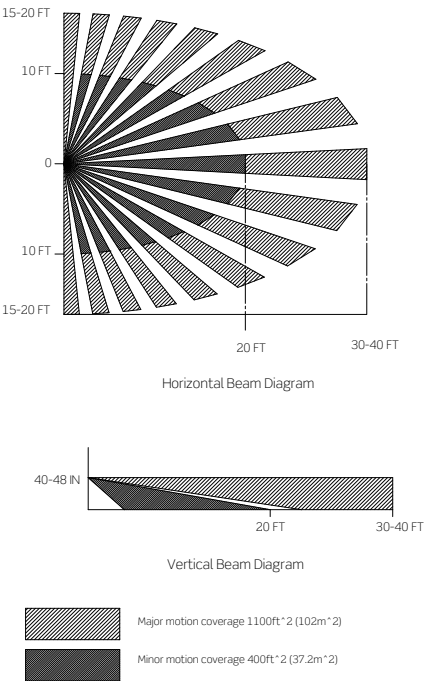

Specifications

Electrical	
Input Voltage/Frequency	120-277VAC, 50/60Hz
Input Current	
120V	Standby: 0.2W Max: 0.5W+Load Current
277V	Standby: 0.3W Max: 0.6W+Load Current
Load Ratings	
General Purpose @ 120V	10A
General Purpose @ 277V	10A
LED/Electronic Ballast @ 120V	8A
LED/Electronic Ballast @ 277V	5A
Standard Ballast @ 120V	10A
Standard Ballast @ 277V	
Tungsten @ 120V	6.67A
Tungsten6f7276@ 277V	
Motor @ 120V	1/4HP (FLA 5.8A)
Motor @ 277V	1/3HP (FLA 3.0A)
IP Rating	IP10
Network Connections	BLE 4.2, BLE 5.0
Environmental	
Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	-40 to 185°F (-40 to 85°C)
Physical	
Dimensions	4.13" x 2.12" x 1.86" (104.90mm x 53.95mm x 47.25mm)
Other	
Energy Codes	Can be used to comply with ASHRAE 90.1, IECC and 2019 Title 24, Part 6 occupancy/vacancy sensing, dimming, and manual-ON/auto-OFF requirements
Listings	IECC, UL and cUL Listed
Certifications	FCC, ICC
Warranty	Limited five-year warranty

Ordering Information

Smart Wallbox Sensors	
Cat. No.	Description
ODD10-IDW	Smart PIR 0-10V Dimming Wallbox Sensor, App configurable; Auto-ON/Auto-OFF or Manual-ON/Auto-OFF, neutral wire required, 120/208/220/230/240/277VAC, 50/60Hz; White
ODD10-IDI	Smart PIR 0-10V Dimming Wallbox Sensor, App configurable; Auto-ON/Auto-OFF or Manual-ON/Auto-OFF, neutral wire required, 120/208/220/230/240/277VAC, 50/60Hz; Ivory
ODDKT-00E	Smart Dimming Wallbox Sensor Color Change Kit, Black
ODDKT-00R	Smart Dimming Wallbox Sensor Color Change Kit, Red
ODDKT-00G	Smart Dimming Wallbox Sensor Color Change Kit, Gray
ODDKT-00I	Smart Dimming Wallbox Sensor Color Change Kit, Ivory
ODDKT-00T	Smart Dimming Wallbox Sensor Color Change Kit, Light Almond
ODDKT-00W	Smart Dimming Wallbox Sensor Color Change Kit, White

Leviton Manufacturing Co., Inc. Lighting & Controls

20497 SW Teton Avenue, Tualatin, OR 97062 **tel** 800-736-6682 **tech line** (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 **tel** 800-323-8920 **tech line** (8:30AM-7:00PM ET Mon-Fri) 800-824-3005

Visit our Website at: www.leviton.com/smartsensors

©2021 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.