

ROTARY SLOPE MOWER



Operation manual Spider ILD01G (SN 998-)

original Operation manual

revize 05-27-07-2015



Product serial number:

Engine type:

Engine serial number:

Tel: +420 569 425 767

Fax: +420 569 429 239

Mail: info@spider-cz.com

Web: www.spider-cz.com

DVOŘÁK – svahové sekačky, s.r.o.

Pohled 277, 582 21 Pohled

Czech Republic

1 CONTENTS

1 CONTENTS.....	2
2 INTRODUCTION.....	4
2.1 IMPORTANT.....	4
2.2 MACHINE USAGE.....	5
2.3 PROHIBITED USE.....	6
2.4 PRODUCT IDENTIFICATION.....	7
2.5 GUIDELINES FOR THE DISPOSAL OF SCRAP PRODUCTS.....	8
3 SAFETY INSTRUCTIONS.....	9
4 SPECIFICATION.....	12
4.1 SPECIFICATION.....	12
4.2 NOISE EMISSIONS.....	12
4.3 CONFORMITY CERTIFICATES.....	13
5 SAFETY DECALS.....	14
5.1 INSTRUCTION DECALS.....	16
5.1 RECOMMENDED METODS OF OPERATION.....	17
6 CONTROLS.....	19
6.1 REMOTE RADIO CONTROLLER.....	19
6.3 MOWER CONTROLS.....	20
7 DISPLAYS.....	21
7.1 RADIO CONTROL DISPLAYS.....	21
7. MOWER DISPLAYS.....	21
8 SAFETY SYSTEMS.....	22
8.1 MOWER SAFETY SYSTEMS.....	22
9. PREPARING THE MACHINE.....	23
9.1 MACHINE DELIVERY TO A DEALER OR RETAILER.....	23
9.2 GEAR-BOX BY-PASS.....	24
9.3 CHECKING ENGINE OIL LEVEL.....	24
9.4 CHECKING HYDRAULIC DRIVE OIL LEVEL.....	25
9.5 PREPARING THE BATTERY.....	25
9.6 FUEL TANK.....	26
9.7 PREPARING THE REMOTE RADIO CONTROLLER.....	26
9.8 CHARGING THE REMOTE RADIO CONTROLLER BATTERY.....	26
10 OPERATION.....	27
10.1 TRANSPORTING THE MOWER.....	27
10.2 STARTING THE ENGINE OF THE MOWER.....	28
10.3 SHUTTING OFF THE ENGINE.....	29
10.4 EMERGENCY SHUTTING OFF OF THE ENGINE.....	29
10.5 ENGAGING THE MOVING BLADES.....	30
10.6 DISENGAGING THE BLADES.....	30
10.7 HEIGHT OF CUT ADJUSTMENT.....	30
10.8 MULCHING COVER (OPTIONAL ATTACHMENT).....	31
10.9 DRIVING THE MACHINE.....	32
10.10 DRIVING SPEED OF THE MOWER.....	32
10.11 DRIVING ON SLOPES.....	33
10.12 STOPPING THE MACHINE ON A SLOPE.....	33
11 MAINTENANCE AND LUBRICATION.....	34
11.1 MAINTENANCE CAHRT - MOWER.....	34
11.2 MAINTENANCE CHART - ENGINE.....	35
11.3 ENGINE MAINTENANCE.....	36
11.4 CLEANING THE FUEL TANK.....	36
11.5 MAINTAINING THE HYDRAULIC DRIVE.....	37
11.6 CHECKING AND REFILLING OIL.....	37
11.7 ADJUSTMENT OF THE NEUTRAL POSTION OF THE HYDRAULIC DRIVE.....	37
11.8 DRIVE V-BELTS.....	38
11.9 GEOMETRY ADJUSTMENT.....	38
11.10 FINAL GEAR DRIVE TO WHEELS.....	39
11.11 MAINTAINING ELECTRIC CIRCUITS AND DEVICES, TRANSMITTER.....	39
11.12 ADJUSTING BLADE DECELERATION.....	39
11.13 CHAINS.....	39
11.14 FUSES.....	40
11.15 MOWING BLADE.....	41
11.16 CHANGING THE WHEEL.....	42
11.17 TYRE PRESSURE.....	42

Operation manual - Spider ILD01G

11.18 MOWING HEIGHT ADJUSTMENT MECHANISM.....	42
11.19 LUBRICATION	43
11.20 CLEANING THE MACHINE	44
11.21 TORQUE CHART	44
11.22 OIL VISCOSITY	44
11.23 TECHNICAL PLATE	45
11.24 TOOLS.....	45
12 TROUBLESHOOTING	46
13 MAINTENANCE AFTER SEASON.....	47
14 WARRANTY CONDITIONS.....	48
15 SERVICE RECORDS.....	50

2 INTRODUCTION

2.1 IMPORTANT



This is a precision machine and the service obtained from it depends on the way it is operated and maintained.

This OPERATION MANUAL should be regarded as part of the machine and should always be present at the machine and available to the operator. Suppliers of both new and second-hand machines are advised to retain documentary evidence that this manual was provided with the machine.

This machine is designed solely for use in customary grass cutting operations. Use in any other way is considered as contrary to the intended use. Compliance with and strict adherence to the conditions of operation, service and repair as specified by the manufacturer, also constitute essential element of the intended use.

Before attempting to operate this machine, **ALL** operators **MUST** go through a practical training in machine usage, read through this manual and make themselves thoroughly conversant with Safety Instructions, controls, lubrication and maintenance. The machine may be operated with additional accessories specifically designed for this purpose. Operating and Safety Instructions of such accessories must be strictly adhered to.

Accident prevention regulations, all other generally recognized regulations on safety and occupational medicine, and all road traffic regulations shall be observed at all times.

Any arbitrary modifications carried out on this machine as well as non-adherence to this OPERATION MANUAL may relieve the manufacturer of liability for any resulting damage or injury.

In several places this Manual contains instructions for safe work. If the text includes such an instruction, then the instruction is marked by the following WARNING symbol:



Warning against a highly probable danger of severe injury or life threat if appropriate instructions are not followed.













other symbols:



Provides useful information.

2.2 MACHINE USAGE

The machine is designed for the mowing of grass on level as well as extremely steep terrain. Any other use is prohibited. The maximum slope on which the machine may be used depends on the type of area to be mowed, on the current condition of the area and on the method of mowing:

DRY CONDITIONS:

<i>On well-maintained lawns and gardens:</i>	Maximum slope is 24°
<i>On unkempt and agricultural areas:</i>	
Cutting across a slope:	Maximum slope is 30°
Cutting up and down a slope:	Maximum slope is 35°
Cutting across a slope with mower positioned diagonally:	Maximum slope is 40°

WET CONDITIONS:

<i>For all areas and applications:</i>	Maximum slope is 20°
--	----------------------

The Spider is a mulching mower designed for mowing of well-maintained, but also unkempt or only occasionally mowed areas. The mower is operated by one person using radio control.

The mower may only be operated by authorized persons over 18 years of age both mentally and physically fit, who are familiar with this Safety, Operator’s and Maintenance Manual and all applicable regulations and laws pertaining to work health and safety that need to be observed while operating the mulching mower Spider.

2.3 PROHIBITED USE

- The mower may not be used for other purpose than for which it was designed and which is described in chapter 2.2.
- The mower may not be used on surfaces littered by glass, loose stones, pieces of iron and other foreign objects that can either be thrown by the blades during mowing or damage the mower.
- The mower may not be used on slopes exceeding 20 degrees when wet or foggy as the climbing ability and mower stability are adversely influenced by poor ground adhesion, regardless of the type of area to be mowed.
- The mower may not be used where other people, children or animals can be found within 3m (10 ft.) from the mower/mowed area.
- Never use the mower unless you are properly acquainted with the terrain and mainly with the occurrence of undesired terrain irregularities, stumps, swamps, pits, unstable and poor load bearing soil etc.
- The mower may not be used on slopes with incline exceeding the values stated in chapter 2.2.
- The mower may not be used as a towing/transporting device or as means of transporting persons.
- It is prohibited to drive the mower on public thoroughfares.
- It is prohibited to increase the engine revolutions or the engine performance above the limits specified by the manufacturer. It is also prohibited to make any other modifications to the machine construction or to the engine setup. The manufacturer does not bear any liability for damage or injury resulting from such modifications.
- It is prohibited to use the mower under the influence of alcohol or drugs
- It is prohibited to drive the mower into heaps of sand, gravel or similar material, on stumps, rocks, construction elements or any other obstacle, which may compromise the stability of the machine
- It is prohibited to use the machine under low visibility (dusk, fog, heavy rain etc.)


2.4 PRODUCT IDENTIFICATION

The machine can be identified by the serial number, which can be found on the factory label on the front of the machine beside the exhaust pipe.

On the internal engine you can also find a factory label placed there by the engine manufacturer.



Engine factory label location

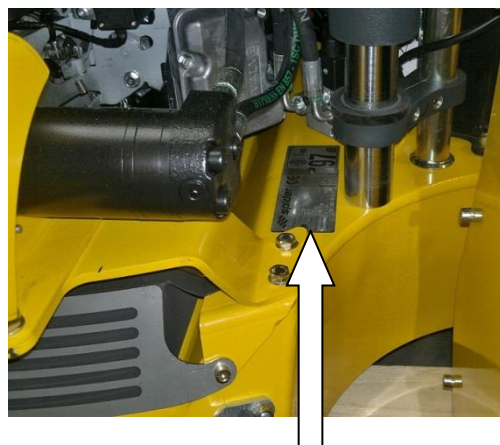

Mower factory label location

2.5 GUIDELINES FOR THE DISPOSAL OF SCRAP PRODUCTS

When it has been identified that a turf care product has no further functional value and requires disposal, the following actions should be taken.

These guidelines should be used in conjunction with Health, Safety and Environmental legislation and use of approved local facilities for waste disposal and recycling.

- Position the machine in a suitable location for any necessary lifting equipment to be used.
- Use appropriate tools and Personal Protective Equipment (PPE) and take guidance from the technical manuals applicable to the machine.
- Remove and store appropriately:
 1. Batteries
 2. Fuel Residue
 3. Oils

Disassemble the structure of the machine referring to the technical manuals where appropriate. Special attention should be made for dealing with “stored energy” within pressurized elements of the machine or tensioned springs.

Any items that still have a useful service life as second hand components or can be re-serviced should be separated and returned to the relevant centre.

Other worn out items should be separated into material groups for recycling and disposal consistent with available facilities. More common separation types are as follows:

- Steel
 - Non ferrous metals
 - Aluminium
 - Brass
 - Copper
- Plastics
 - Identifiable
 - Recyclable
 - Non recyclable
 - Non identified
- Rubber
- Electrical and electronic components
- Items that cannot be separated economically into different material groups should be added to the “General waste” area.
- Do not incarnate waste.

Finally update machinery records to indicate that the machine has been taken out of service and scrapped.

3 SAFETY INSTRUCTIONS



This safety symbol indicates important safety messages in this manual. When you see this symbol, be alert to the possibility of injury, carefully read the message that follows, and inform other operators.

Safety Checks

- Do not enter or reach under the machine if it is lifted and not sufficiently supported. The machine should be supported on places marked by the symbol of a lifting jack.
- The mower should only be transported in a container or on a trailer.
- Check bolt torques at regular intervals. The first check should be done after 8 operating hours. Pay attention to the attachment of the cutting blade and the proper bolt torque. Use a torque wrench and a specified torque. See 11.21.
- The attaching flange of the blades or the bolts must not show sign of damage or wear. The bolts must be complete. The blade must be undamaged, evenly worn and adequately sharp.
- If you are driving the machine outside the working area, always turf off the mowing blade and set the maximum mowing height, otherwise the blade may get damaged.
- Keep the product clean after use. Do not use gasoline or similar oil products for cleaning.
- Do not reach into the space under the mower with your hands or feet. Do not reach under the engine cover or into the gear mechanism.
- If you are forced to reach under the machine, wait until all rotating parts stop. Attention, it takes some time before blade runs down! The run-down time depends on the state and wear of the brake/clutch. Have the brake checked at regular intervals at an authorised servicing facility.
- While operating, wear closed shoes and work clothing. Do not wear loose clothes that could get caught by the machine, short trousers or light shoes.
- It is strictly prohibited for the operator to wear loose clothing.
- A local risk assessment should determine the need for a face shield.
- Do not operate the machine after drinking alcohol or using medication influencing perception.
- Before starting the engine, make sure that the mower blade is disengaged. If the blade switch is in the ON position, the machine cannot be started. When engaging the mower blade, step aside far enough to be protected against object accidentally thrown from the mower and to be able to stop the mower in case of an emergency. Do not enter the path of the mower.
- While operating the mower make sure that the

mower is clearly visible at all times and within the range of the remote control unit and that you can clearly recognize dangerous situations and react to them properly. Do not abuse the maximum reach of the remote control.

- When using the mower, follow all general work safety regulations.
- Work with the mower may only be started if the mower is not damaged by previous operation.
- Do not change the engine tuning, especially the engine speed regulator. Do not modify the exhaust pipe.
- Do not use the mower if there is less than 30% of fuel in the fuel tank.
- Do not move the mower by means of towing it behind another machines.

Operating Environment

- The machine should only be used by persons over 18 years of age, who have been acquainted with the machine and the user's manual. The remote control (further referred to as "RC") is considered a part of the machine.
- The user's manual must be stored in a place permanently accessible to the operator and must be available to him at all times.
- Do not allow children or unauthorised persons use the product.
- Before starting to operate the machine, you have to be familiar with all the symbols next to the controls and indicators used on the mower and the RC.
- Pay special attention to the stopping and shutting-off of the engine and to the emergency shutting-off of the mower.
- Before using the mower on a slope, make sure you test and practice your mower-control skills on flat and level ground, which is sufficiently free and spacious. Master how to control the movement on a surface, to mow around bushes, trees and other terrain elements and obstacles.
- When operating the mower on slope, make sure that the engine revolutions are set to maximum speed. If you stop the mower on a slope, position the wheels across the slope.
- While operating or transporting the mower, the operator must always have the mower in their view. The maximum distance between the operator and the mower is 50 m (164 ft).
- While using the mower follow all safety regulations given in this manual and respect local regulations and provisions concerning noise-emissions, especially when using in hospitals, spas and other sensitive areas.
- The operator must pay attention to the area into which the mulched grass may be thrown. Neither the operator, nor any other persons, children or animals should be allowed to enter this area. If mowing uneven terrain the ejection and throwing of undesirable objects becomes more probable due to the displacement of the mowing device (tilt of one side of the machine)

while crossing the edges of different terrain.

- The operator of the machine may be responsible for any damage caused to third parties by operating the machine. The mower may be used on dry surface on slopes listed in chapter 2.2. On wet or moist surfaces the mowed slope should not exceed 20 degrees.
- Before operating the machine, make sure you remove from the mowing area all loose stones, sticks, glass, wire, bones, branches and all other objects that can be picked up by the blades and thrown or that could damage the mower.
- While operating the mower avoid obstacles, do not drive over higher obstacles (such as stones, stumps, brick), near precipices, on unstable soil or in places where the mower could fall down or flip over.
- When operating pay attention to electric power lines especially when driving beneath electric wires where the radio signal may be lost. In such case the mower immediately shuts off the internal combustion engine and stops all movements.
- When using the machine near busy thoroughfares make sure that the mower does not endanger (by throwing undesirable objects) passers-by or their property. Choose a suitable working procedure (see chapter: Operation).
- The operator/user is responsible for the safety of persons that enter the working area of the machine. Stop your work if these persons enter the working area.
- The transportation of persons, animals or loads on the mower is prohibited.
- Do not place any objects or tools on the product.
- While operating, especially in windy conditions, choose the operator's position carefully so as to keep the operator away from the stream of exhaust gas, dust or mulched grass.
- Stop work and clean the machine and its cooling surfaces several times while working in dusty conditions to avoid over-heating during operation. If necessary, clean the machine and its cooling surfaces several times while working. The dust layer must not exceed 1m (3 ft).
- Refuel only when the machine is off – before operating, if possible – and the fuel tank is cold. Always keep at least 30% of the fuel in the tank. If you need to refuel during your work, do not fill the fuel into a hot tank or while the engine is still hot. Let the machine cool down.
- Before refuelling push the STOP button on the control panel of the mower.
- Never refuel while the engine is running.
- Do not start the engine if you find spilled fuel, open vessels with fuel or other combustible objects or gases in the immediate proximity of the mower.
- Do not refuel near open fire.
- Do not place this product near open fire or other sources of heat.
- While operating or immediately after shutting the

machine off do not touch those parts of the machine that heat up during operation. This concerns mainly the engine exhaust pipe, metal parts of the hydraulic drive and metal parts of the internal combustion engine.

- While operating do not touch the highvoltage conductor leading to the sparking plug.
- After starting the engine, test the correct functioning of the emergency engine stop on the radio transmitter. This function should be checked at least once during every shift and every time you enter a new area for mowing or mulching.
- Before starting your work test the correct functioning of the safety components (EMERGENCY STOP...) on the mower and the RC.
- Never leave the engine running without supervision.
- If the engine is running, do not put aside the transmitter and do not touch or move any parts of the machine.
- Always stop the engine when leaving the machine, secure it against starting by pushing the red EMERGENCY STOP button on the control panel of mower and by removing the key. Never leave the transmitter next to the mower, but put it in a different, properly secured place inaccessible to third persons.
- Do not engage the mowing blade until immediately before mowing.
- Turn off the mowing mechanism, shut off the engine and remove the from the ignition every time:
- You clean the machine
- You remove dirt from the mowing mechanism (grass or debris).
- You run over an unknown object and need to check for possible damage or to repair it
- The machine unusually intensively vibrates and you need to find the cause
- You repair the engine or other parts of the mower (also unplug cables from sparking plugs)
- While operating, avoid mole-hills, concrete bases, guard-stones, stumps, loose stones and curbs. These must not come into direct contact with the blade as they could cause serious damage. These may also compromise the mower stability.
- Do not drive the mower into heaps of sand, gravel or similar materials
- The mower may only be operated during daylight or under very good artificial light conditions.
- Do not use the mower in limited visibility (dusk, fog, heavy rain etc.)
- Do not let the engine run in enclosed spaces. The exhaust gases contain CO, they damage health and can ultimately cause death.

- The engine should only be started and operating in open spaces. If the engine is started and operated in enclosed spaces, the exhaust gases must be conducted away by the means of prolonging the exhaust pipe outside the enclosed space. Proper ventilation and fresh air supply must be secured in order to prevent the accumulation of CO.
- Before storing the machine in a closed space, let the engine and the hydraulic drive of the machine cool properly.
- Regularly remove all combustible objects (dry grass, leaves...) from the areas around the exhaust pipe, engine, and battery.
- Always control the machine from a working station, which gives you a perfect view of the whole working area and of the machine.
- While working, change your working position to have a perfect view of the mower at all times.
- When operating the mower on slopes never enter the space directly below or above the mower.
- The working position should be far enough (maximum 50 meters) to prevent the operator from getting hit by objects that may be accidentally thrown by the mower.
- Do not operate the mower if you cannot see it (behind terrain obstacles, corners of buildings, hidden in grass etc.)

Safety Decals

- Before starting the mower, check the state of the safety labels. If any labels are damaged or missing, contact your dealer and replace such labels on the machine. Get thoroughly acquainted with these labels. The placement of the labels on the machine is obligatory.
- Do not remove or damage any of the safety labels.
- Do not remove any covers or safety elements. They are for your protection.
- Do not use the machine if any of the protecting devices or covers are damaged or missing.
- Keep the machine and its accessories clean and in a good technical condition at all times.
- It is strictly prohibited to make any changes or modifications to the machine that were not previously approved by the manufacturer. Any modification to the machine may lead to a hazardous situation or injury. If these instructions are not followed, the manufacturer does not bear any liability for the machine and the terms of warranty may be invalidated..
- The machine must always be equipped with all covers and protective elements.

4 SPECIFICATION

4.1 SPECIFICATION

TECHNICAL DESCRIPTION

The mower is a self-propelled machine with four-wheel drive, controlled by the transmitter (remote radio controller) signal. Its unique wheel-steering technology ensures a high manoeuvrability both on level ground and on slopes.

The basic part of the machine is formed by a square solid frame, which is connected with a sliding frame. The middle part of the sliding frame carries all transmission parts such as the engine, the hydraulic pump, the oil cooler and the control unit. A cutter blade is attached to the bottom part of the frame. An electromagnetic clutch is placed between the blade carrier and the engine.

Transmission is by chains and gears on all four wheels. The wheels are driven centrally by the hydraulic drive through V-belts. The wheels are steered by an electric motor.

The control unit is situated in a box above the cover of the gel battery. The mower is controlled by a multi-channel transmitter.

Parametr	Unit	Value
Length/Width	mm (inch)	1300×1300 (51,2×51,2)
Height	mm (inch)	850 (33,47)
Mowing width	mm (inch)	800 (31,52)
Mowing blade height	mm (inch)	60 - 110 (2,36 – 4,33); 30 - 80 (1,18 - 3,14) continuous regulation
Weight	Kg (pound)	245 (540)
Driving speed	km/h (mph)	0 – 3, 0 – 7 (0-2, 0-4,5)
Mowing mechanism	-	Single-balde with a fixed balde attached by the flange into the middle
Mowing clutch	-	Electromagnetic with a friction brake
Hydraulic pump		Hydro Gear BDP 21L
Hydraulic motor	-	Sauer Danfoss OMP 40
Propelled wheels	-	4 x 4
Travel wheel	inch	16x6,5 - 8 with and arrow (V) tread pattern
Battery		12 V, 18 Ah, gel
Fuel	-	unleaded gasoline
Fuel tank capacity	L (galon)	11 (2,9)
Engine		Air-cooled four-stroke two cylinder Kawasaki FS541V
Cylinder volume	cm ³	603
Performance	kW/min-1	13,4/3600
Torque	N . m/min-1	46/2200
Ignition		Electronic
Starter		Electric
Frequency range of the Remote controller NBB for EU and USA	MHz	433.100 - 434.750

4.2 NOISE EMISSIONS

The mower emits the following noise:

Sound pressure level	$L_{WA} = 96,0$ dB
Guaranteed Sound pressure level	$L_{WA} = 97,0$ dB

The measuring was carried out in conformity with EN ISO 3744

Noise at the operator's station (ear): $L = 77,9$ dB (A) L_{eq} – Measured in the distance of 3m from the machine according to EN 11201

4.3 CONFORMITY CERTIFICATES**EC DECLARATION OF CONFORMITY**

We manufacturer

DVOŘÁK - svahové sekačky s.r.o.
Kyjov - Dvorce 62
580 01 Havlíčkův Brod
VAT ID: CZ26013797

declare that the product name: **Slope applicable rotary mower**model: **SPIDER ILD 01 G**designed for: **mowing of grass areas**

serial number:

fulfils all the relevant provisions of Directives

Directive 2006/42/EC – machinery**Directive 2004/108/EC - EMC****Directive 2000/14/EC - noise****Directive 2002/88/EC, 97/68/EC**

List of technical standards, specification and harmonised norms used for review of its conformity:

EN ISO 5395-1, EN ISO 5395-3, EN ISO 12100, EN ISO 13850, EN ISO 13732-1, EN ISO 4254-1, EN ISO 4254-12, EN ISO 4413, EN 953+A1, EN ISO 13849-1, EN 1005-3+A1, EN ISO 3744, EN ISO 11 201, EN ISO 3767-1,3, EN 13478+A1, EN 55012 ed.2, EN 1175-2+A1, EN 60215, EN 300-220-03, EN 300-220-2, ISO 11 684

Description, basic technical specification

Parameter	Unit	Value
mowing width	mm	800
weight	kg	245
driving speed	kmph	0 - 7
engine	-	KAWASAKI FS541V
performance	kW	13,4
engine speed	rpm	2700

Conformity assessment in accordance with directives **2000/14/EC, art 14, point 1**

The person participating in this conformity assessment in accordance with directives 2000/14/EC:

NB 1017, TÜV SÜD Czech s.r.o., Novodvorská 994, CZ – 142 21 Praha 4

Measured sound pressure emission level

L_{WA} = 96,0 dB

Guaranteed sound pressure emission level

L_{WA} = 97,0 dB

The person authorised to compile the technical file

Jakub Trachtulec**DVOŘÁK - svahové sekačky s.r.o.****Kyjov - Dvorce 62****CZ - 580 01 Havlíčkův Brod**


In Dvorce on 13.3.2015

.....


Lubomír Dvořák, CEO

5 SAFETY DECALS


Attention! This machine may be dangerous. Incorrect and negligent use may result in damage, serious injuries or death. This chapter is devoted to the safety symbols (pictograms) used on the product, their placement and meaning. Safety labels inform the operator about risks while using the product. Understanding their meaning will make the use of this product safe.

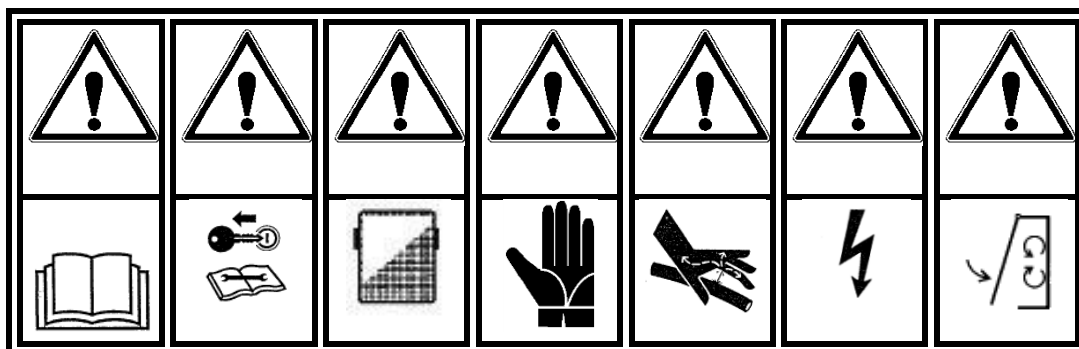


1	2	3	4	5	6	7
Read the user's manual before use	While maintaining, repairing or adjusting the mower, follow the user's manual and remove the key from the ignition	Use protective work aids; face shield	Attention, use protective gloves when changing the mowing blades	Attention, the device uses hydraulic energy drive, danger of injury caused by the squirting hydraulic oil	Attention, electric accumulator	Before starting close all protective covers

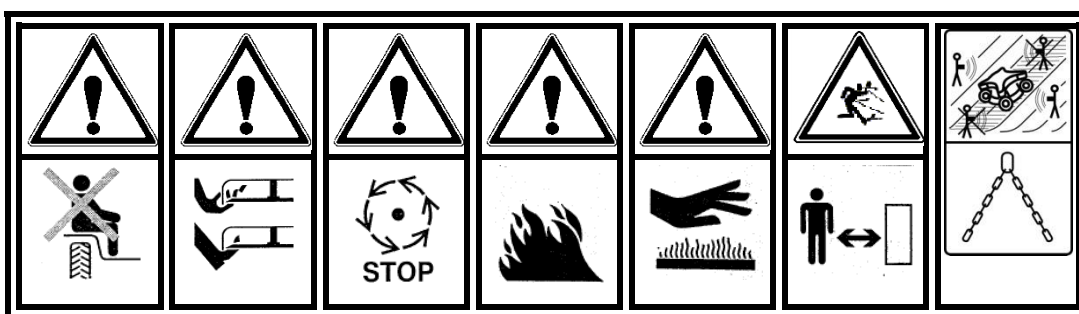


8	9	10	11	12	13	14
Transportation of persons on the machine is prohibited	Attention, danger of hand or feet injury caused by rotating blades	Attention, rotating parts are decelerating after they were turned off	Attention, combustible substance, danger of fire	Danger of getting burned by hot parts	Attention, danger of getting hit by flying object. Keep safe distance.	On slope never enter the area below or directly above the machine. Slings point

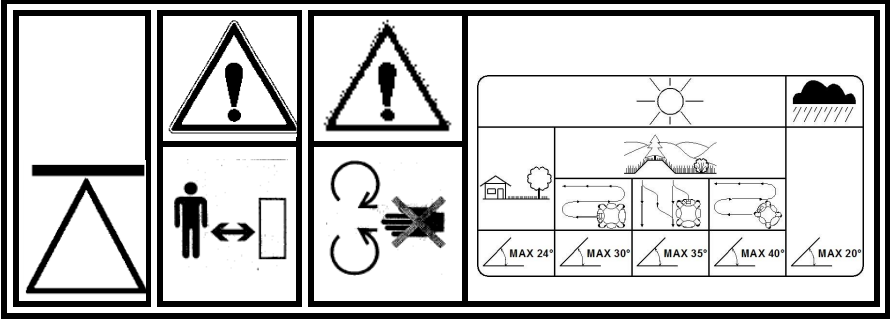

15	16	17	18
Lifting jack support point	Keep safe distance from the machine when it is moving	Attention, rotating parts	Maximum permissible slope with regards to machine application and climatic conditions.

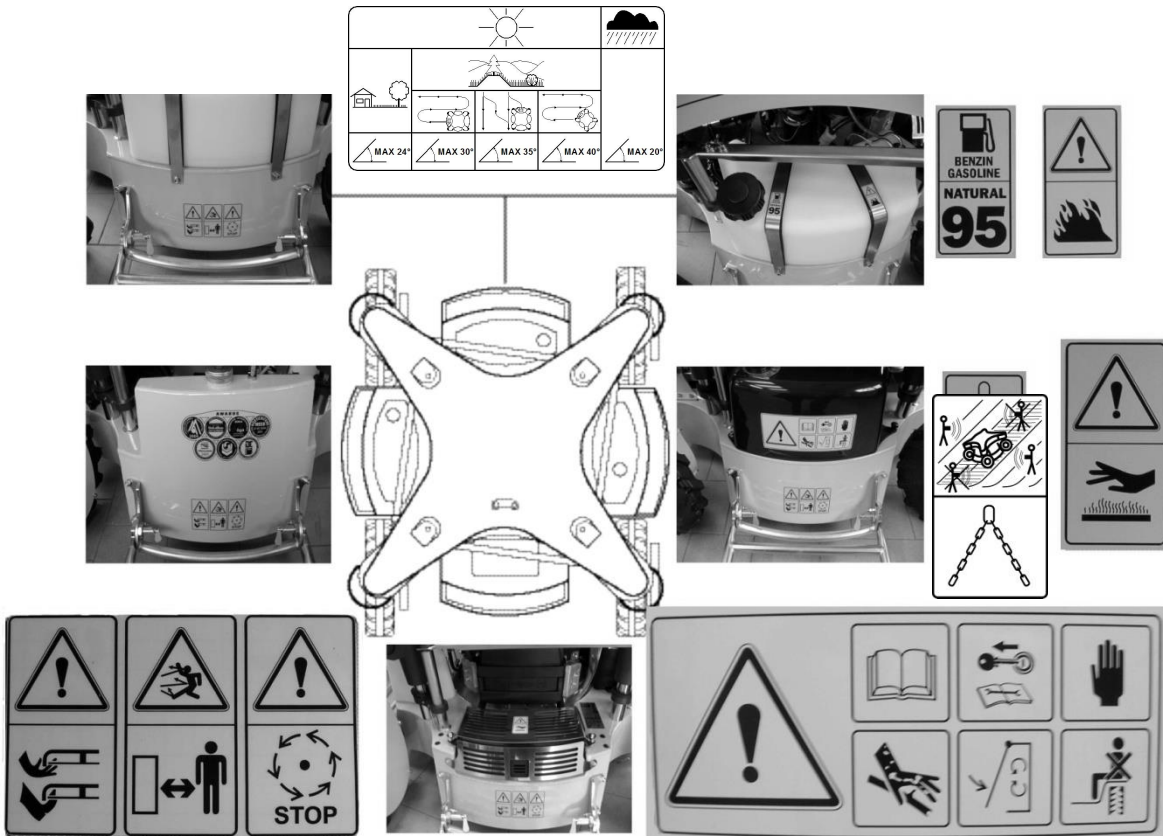

5.1 INSTRUCTION DECALS

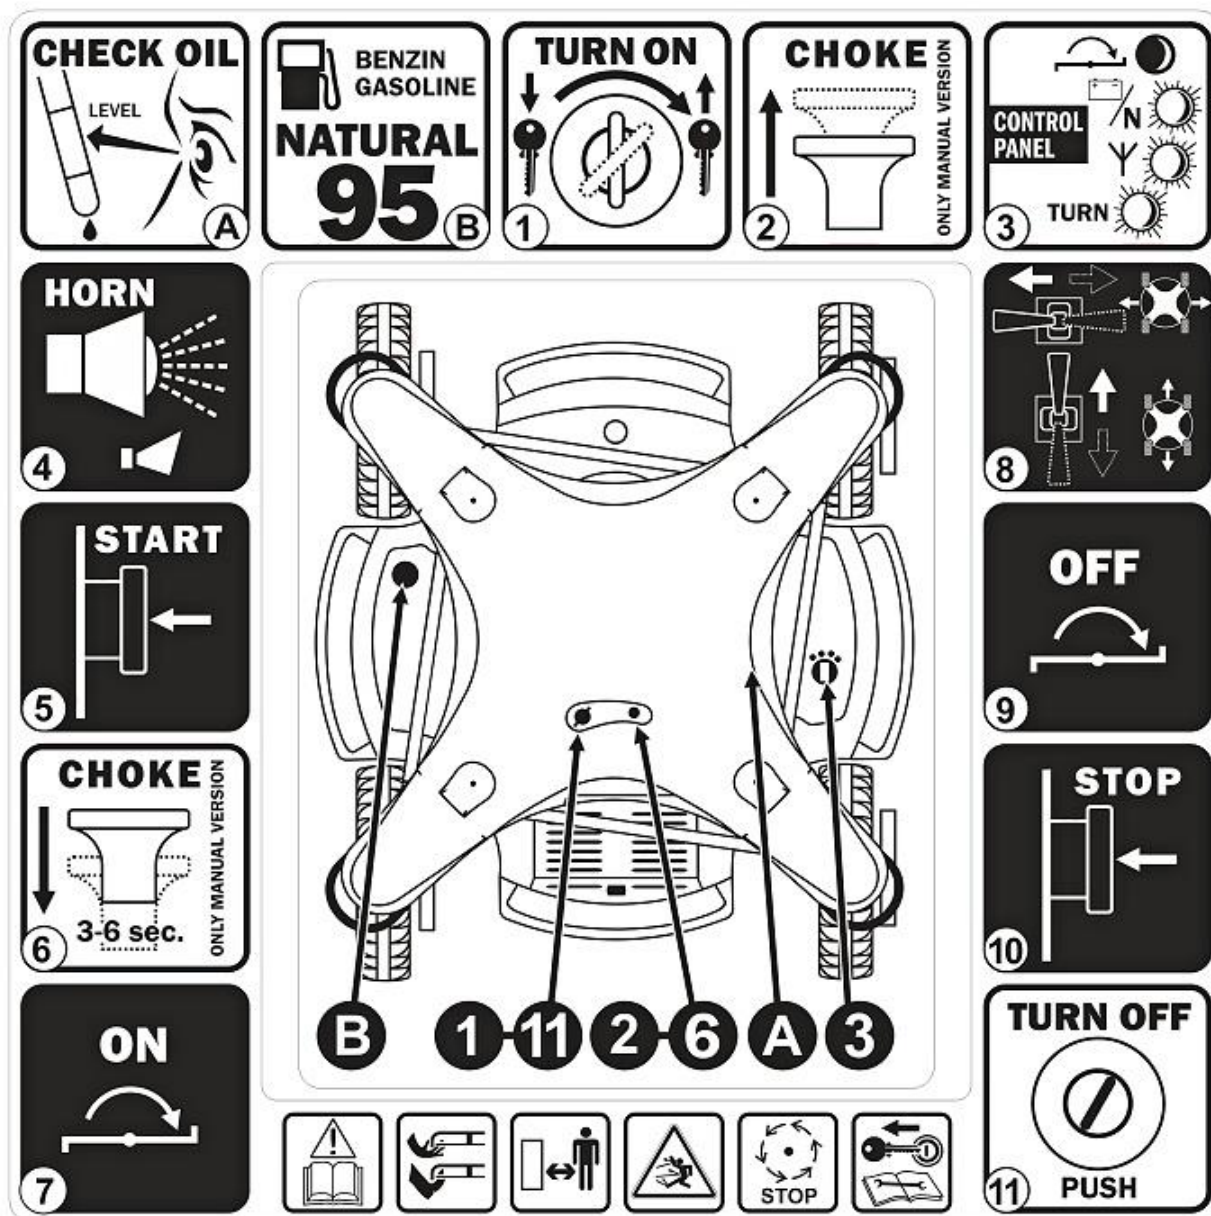

5.1 RECOMMENDED METODS OF OPERATION

This chart shows basic information about recommended methods of cutting grass in various types of terrain. It also describes the correct procedure of anchoring the hydrostatic stabilizing winch. However current terrain and climatic conditions may require different methods of operation than those shown in this chart. The operator is always responsible for choosing the most suitable method of operation especially with regards to safety. In any case it is always absolutely necessary to comply with all safety instructions listed in this Manual.

Chart of recommended methods of operation is placed together with the basic set of tools on the machine. See chapter 11.24 Tools.


<p>Mower check</p> <p>MAX: 300 kPa 3.0 bar 43 PSI</p>		<p>FUEL LEVEL</p>	
<p>Always keep the tyres inflated to the recommended pressure. Other values may unfavourably influence the driving characteristics. Maximum pressure – 300kPa/3,0bar/43PSI</p>	<p>Check the blades. Blades must be properly tightened. Blades must not be bent and the edges must not be damaged.</p>	<p>Check the fuel level</p>	<p>Check the overall condition of the winch. The rope and the snap hook must not be damaged.</p>
<p>1 Technique</p>	<p>2</p>		
<p>On slopes never enter the area below or directly above the machine.</p>	<p>Recommended method of cutting on slopes up to 20 degrees provided the operator is well acquainted with the terrain and there is no risk of tipping the machine over.</p>	<p>Recommended method of cutting on slopes up to 35 degrees provided the operator is well acquainted with the terrain and there is no risk of tipping the machine over.</p>	<p>On slopes exceeding 35 degrees always use the stabilizing winch. On slopes never enter the area below or directly above the machine.</p>
<p>3</p>		<p>4</p>	
<p>Recommended method of cutting around trees on slopes up to 35 degrees.</p>	<p>Recommended method of cutting around trees on slopes exceeding 35 degrees. On slopes exceeding 35 degrees always use the stabilizing winch.</p>	<p>Recommended method of cutting bushes on slopes up to 35 degrees.</p>	<p>Recommended method of cutting bushes on slopes exceeding 35 degrees. On slopes exceeding 35 degrees always use the stabilizing winch.</p>
<p>5</p>			
<p>Recommended method of cutting along roads. Never enter the area below or directly above the machine. Danger of getting injured by objects thrown by the blades. Carefully check the terrain in front of the mower.</p>	<p>Position of important components on the machine (air filter, spark plugs, hydraulic by-pass allowing the disengagement of hydraulics and consequent towing of the machine, fuse box, battery, tools)</p>		

Instructions for turning on and off the hydrostatic winch

<p>Winch ON</p>	<p>90°</p>	<p>OFF</p>	<p>MIN</p> <p>$\frac{x}{min.}$</p>
<p>Rotate the machine so that the winch is facing up the hill toward the expected anchoring point.</p>	<p>Turn the wheels so that they are orientated across the slope (along the slope contours)</p>	<p>Turn off the blades</p>	<p>Reduce the engine RPM to minimum (idling speed)</p>
<p>ON</p>		<p>MAX</p> <p>$\frac{x}{min.}$</p>	
<p>On the control panel on the machine turn on the hydrostatic winch by the ON-OFF switch.</p>	<p>By pushing the driving joystick slightly backward the rope will begin to unwind. Fasten the rope properly to the anchoring point.</p>	<p>Increase the engine RPM to maximum</p>	<p>Tighten the winch rope by pushing the driving joystick slightly in the forward direction.</p>
<p>ON</p>			
<p>Turn on the blades</p>	<p>Leave the anchoring position of the mower by pushing the driving joystick forward and by driving up the slope.</p>	<p>Method of cutting up and down a slope: driving up the slope – push the joystick forward, driving down the slope – push the joystick backward</p>	<p>Method of cutting across the slope: Drive according to the picture. The joystick should always be pushed in the forward direction..</p>
<p>Winch OFF</p>	<p>90°</p>	<p>OFF</p>	<p>MIN</p> <p>$\frac{x}{min.}$</p>
<p>Place the mower at the bottom of the slope</p>	<p>Turn the wheels across the slope, perpendicular to the anchoring point</p>	<p>Turn off the blades</p>	<p>Reduce the engine RPM to minimum (idling speed)</p>
		<p>OFF</p>	
<p>Loosen the winch rope by pushing the drive joystick slightly backward.</p>	<p>Untie the rope from the anchoring point. Wind the rope back onto the winch drum by pushing the drive joystick slightly forward.</p>	<p>On the control panel on the machine turn off the hydrostatic winch by the ON-OFF switch.</p>	<p>Check the overall condition of the winch. The rope and the snap hook must not be damaged.</p>

6 CONTROLS


6.1 REMOTE RADIO CONTROLLER

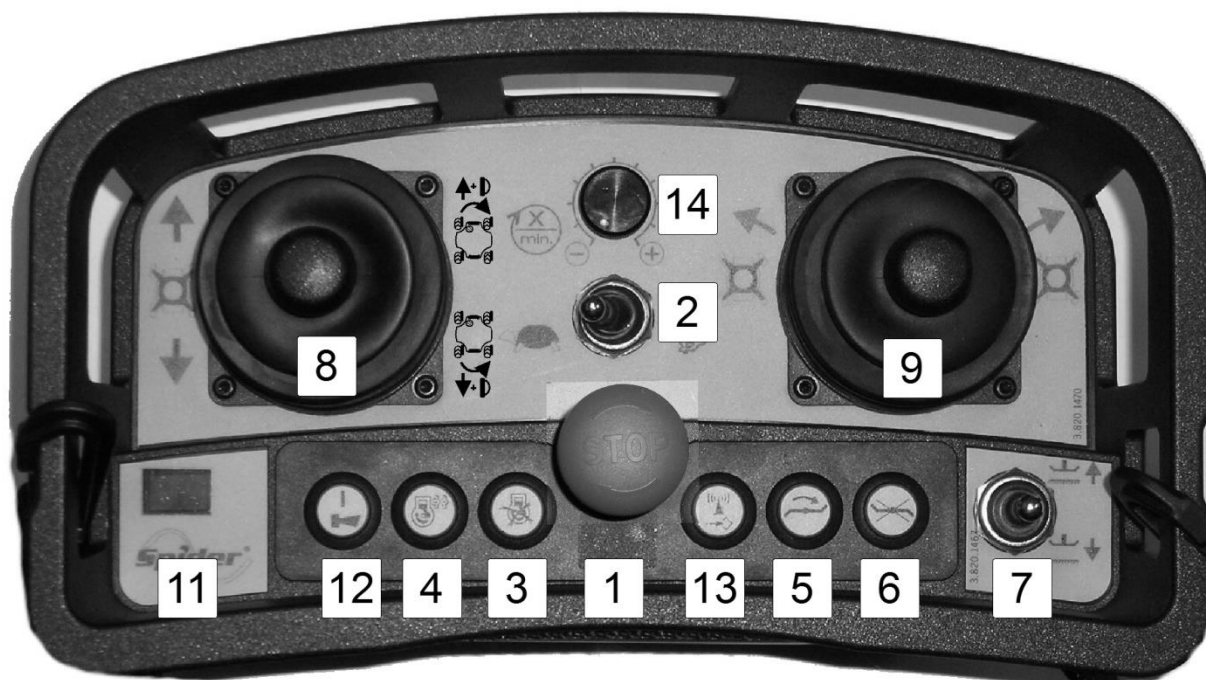

- 1 Main Switch / EMERGENCY STOP button
- 2 Driving speed controller H/L
- 3 Engine stop switch
- 4 Engine starter switch
- 5 Mowing blades ON switch
- 6 Mowing blades OFF switch
- 7 Height of cut adjustment
- 8 Joystick for driving forward / backward
- 9 Joystick for steering left / right
- 10 Skid steering switch – for ILD01 inaktiv
- 11 Remote controller power display
- 12 Operator's preparedness confirmation / Horn
- 13 Frequency check / change button
- 14 Engine speed controller

6.3 MOWER CONTROLS

On the body of the mower there are two controls for operating the mower. Additional controls may be added in case of attaching optional accessories. The function of controls pertaining to these accessories is explained in the user's manuals of these devices.

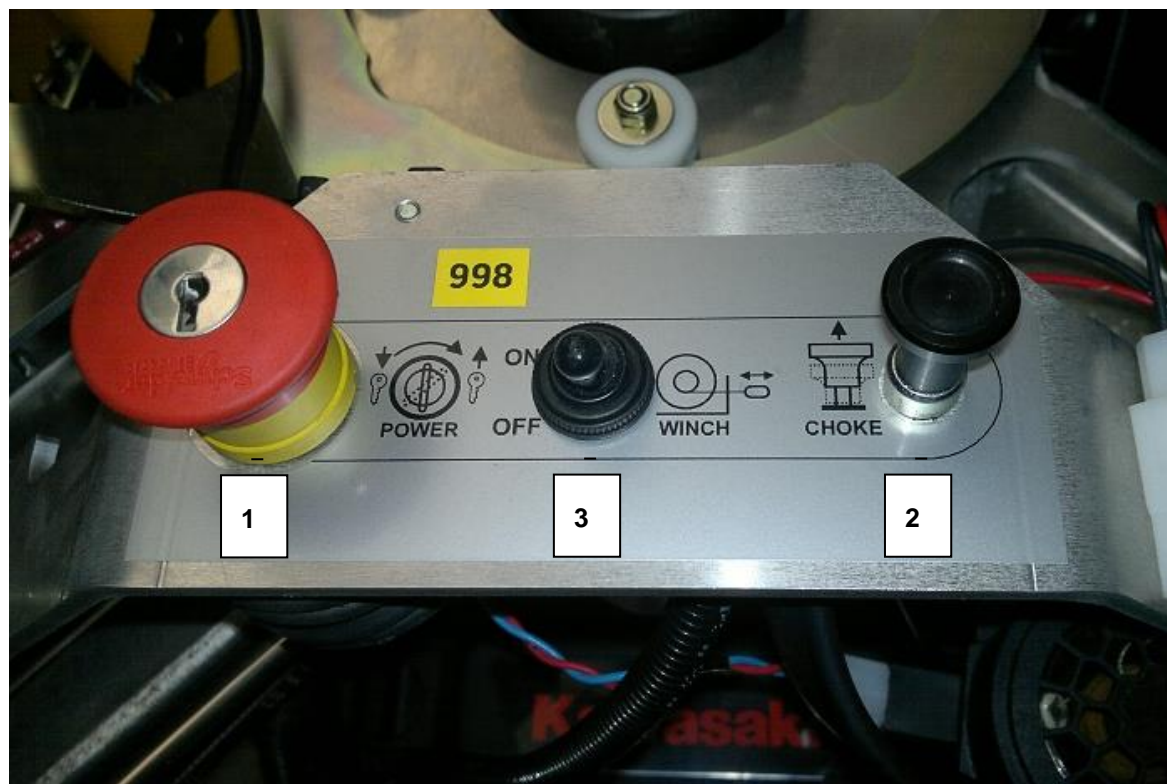

- 1 Lockable EMERGENCY STOP button / Ignition switch
- 2 Choke for cold start
- 3 Hydrostatic winch switch

7 DISPLAYS

7.1 RADIO CONTROL DISPLAYS

Indicator (11) flasher - Radio Control power on indicator
Radio controll emits a high pitch tone - Radio Control battery low voltage warning



7. MOWER DISPLAYS

	1. Power indicator
	2. Signal Reception
	3. Neutral
	4. Blade

On the cover of the battery there are a number of warning LEDs and an hour meter. Identify the version you have.

The displays signal the following states:

- Power Indicator: Illuminated green when the EMERGENCY STOP on the top of the mower is unlocked.
Beacon is flashing when the EMERGENCY STOP on the top of the mower is unlocked.
- Signal Reception Illuminated green when the radio link between the RC and the receiver is established and correct.
- Neutral: Illuminated green when the transmission is in a neutral position.
- Blade: Illuminated red when the blade is engaged.

After the power supply is turned on, indicator lamp 1 will be illuminated. It will flash for seven seconds, during this period the following actions take place:

- Initialisation of the processor, check of radio connection and check the communication with the hydraulic pump servo-motor. If the checks are successful lamp 1 will illuminate. If a malfunction is detected lamp 1 will flash.
- When there is communication between the machine and the radio control unit, lamp 2 flashes. If there is a break in communication lamp 2 dims.
- Lamp 3 is illuminated when the drive servomotor is in a neutral position.
- Lamp 4 is illuminated while the blade is engaged. The mower cannot be started while this lamp is illuminated.

8 SAFETY SYSTEMS

8.1 MOWER SAFETY SYSTEMS

The product is controlled by a remote radio controller. This means that the operator is not close to the mower at all times and cannot use controls on the mower. For the safety of the operator and other persons the following table lists various situations and actions:

The mower is out of the signal range.	The EMERGENCY STOP command is automatically generated.
Radio signal failure.	The EMERGENCY STOP command is automatically generated
Another machine with the same frequency is working in the vicinity.	The EMERGENCY STOP command is automatically generated.
Emergency situations - shutting off by the emergency stop button.	Push the EMERGENCY STOP button on the radio controller.
	Push the EMERGENCY STOP button on the body of the mower.
Safety Interlocks prevent the engine from starting.	If the mowing blade clutch is engaged.
	If the transmission is not set to a neutral position.
	If the radio connection is not established properly.

The EMERGENCY STOP command (automatic or manual) has the following effects:

1. Engine stops
2. Steering of wheels is blocked
3. Travelling is blocked
4. Starter is blocked
5. Mowing blade clutch disengages
6. Ignition is turned off

9. PREPARING THE MACHINE

9.1 MACHINE DELIVERY TO A DEALER OR RETAILER



From the manufacturer the machine is delivered filled with engine oil and hydraulic oil but without gasoline in the tank.

The training of the operator should take place during the installation of the product.

The mower may be delivered on a wooden pallet or in a crate.

To take the mower off the pallet

- Place the palette with the mower on a level surface
- Carefully remove the upper boards of the crate and take out all accessories & the remote control Disassemble the side boards of the crate
- Release the attachment fastening the mower to the pallet, remove transportation wrapping. Recycle these wraps.
- Thoroughly examine the mower for possible damage and missing parts from the delivery. If necessary, contact the transporting company with your claim.
- Before driving down from the pallet raise the mowing mechanism to the upper position (this can be done without starting the engine)
- Place boards in front of the wheels in the direction, in which you expect to drive the mower from the pallet to the ground. Put at least 5 litres of fuel to the tank and attach cables onto the battery. While starting, follow instructions in chapter 5.
- The aerial must be attached to the mower
- After starting the engine set the speed controller on the transmitter to the (L) symbol – lower driving speed
- Slowly move the forward/reverse joystick to correspond with the direction you want to move the mower. The arrow on the wheel legs indicates forward.
- Slowly drive down to the ground and stop the engine
- While unpacking, assembling and preparing the mower, do not engage the mower blade.

- SPIDER mower
- Mower ignition key (X2)
- Gel battery (12v starting)
- Remote control including 2 batteries
- Remote control battery charger (12v – 12v)
- Operation manual
- Radio controller key (X2)
- Engine user's and maintenance manual
- RC instruction manual
- Copy of the EC declaration of conformity
- Copy of the EC declaration of konformity for Remote controller NBB



If you have a lifting device with a sufficient lifting capacity available, place the lifting hooks/eyes on spots marked with the symbols of chain, lift the load by about 0,15 m (6inch), move the pallet away from the mower and lower the machine to the ground.



There may not be enough fuel in the fuel system when starting for the first time and you may need to repeat the starting several times. Starting period must not exceed 3 seconds. There must be a pause of at lest 20 seconds between all attempts to start the engine.

9.2 GEAR-BOX BY-PASS

The By-pass is used to disable the hydraulic drive and to engage the oil bypass for manual handling (engine not running) of the machine on flat surfaces. The by-pass should only be used when the hydraulic drive is not functional. For normal hydraulic drive it is necessary to have the bolt on the pump tightened. For manual handling loosen this bolt by two revolutions.



Before starting, check the bolt tightness. If loose, it will disable the hydraulic drive.



Insufficient tightening may result in undesirable behaviour of the mower on slopes. It may uncontrollably drive down a slope.



9.3 CHECKING ENGINE OIL LEVEL



Attention! Before checking or refilling oil stop the engine and let it cool down.

The oil level of the machine standing on a level surface must be between the limit marks on the dipstick (see the engine user's manual). Check oil according to the engine user's manual as follows:


- 1) Place the machine on a level surface.
- 2) Remove the upper body
- 3) Unscrew the dipstick and wipe off oil.
- 4) Without screwing inset the dipstick back into the filler as far as you can.
- 5) If the oil level is close or under the lower limit mark (ADD), fill with recommended oil up to the upper limit mark (FULL).
- 6) Refit the dipstick.



Running the engine with insufficient oil may cause serious damage to the engine.

Check the engine oil level on a level surface and only when the engine is off.

Use only oil recommended by the engine manufacturer.

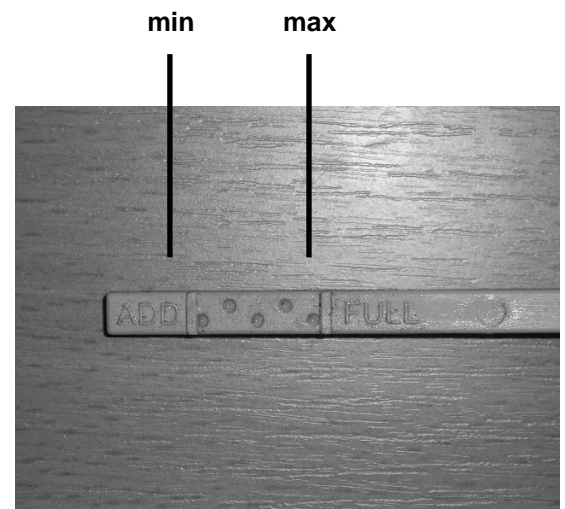

9.4 CHECKING HYDRAULIC DRIVE OIL LEVEL

Oil level should only be checked when the oil is cold.


Clear debris from around the cap, unscrew the cap on the hydraulic oil tank on the side of the mower.

Using the dipstick check the oil level. It must be between the limit marks.

If the level is above this range, the oil may overflow from the breather pipe in the tank when hot. If the level is below the lower limit, the hydraulic drive may be damaged.

Refill with oil if necessary (HM 68 according to ISO 6743 or HLP 68, CLP 68 according to DIN 51502).

When finished, refit the cap back on the oil tank.

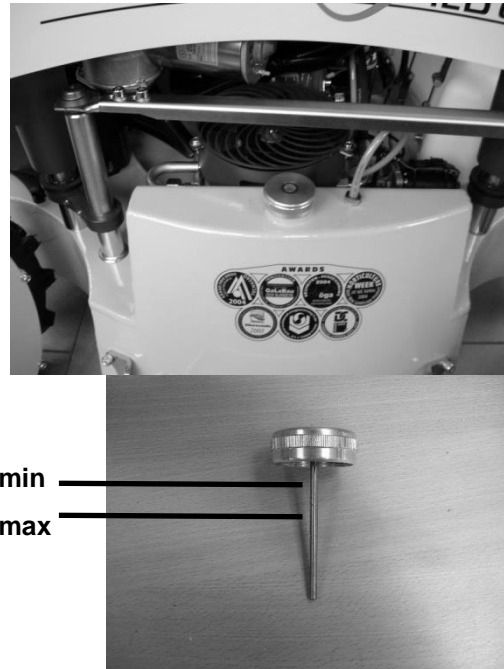

9.5 PREPARING THE BATTERY

SPIDER ILD – 01 mower uses a gel battery model 6E12, 12 V, 18 Ah



Do not fill the battery with electrolyte! The machine construction uses a dry type of battery. If recharging, use a maximum electric current of 1,4 A.

Unscrew the thumb wheel (A) and move aside the battery cover (see the figure).


Remove/insert and fasten the battery

Attach the terminal connectors according to polarity. First (+) then (-).

Secure the battery against movement with a belt.

Screw back the battery cover.

When disconnecting and removing the battery, proceed in reversed order.

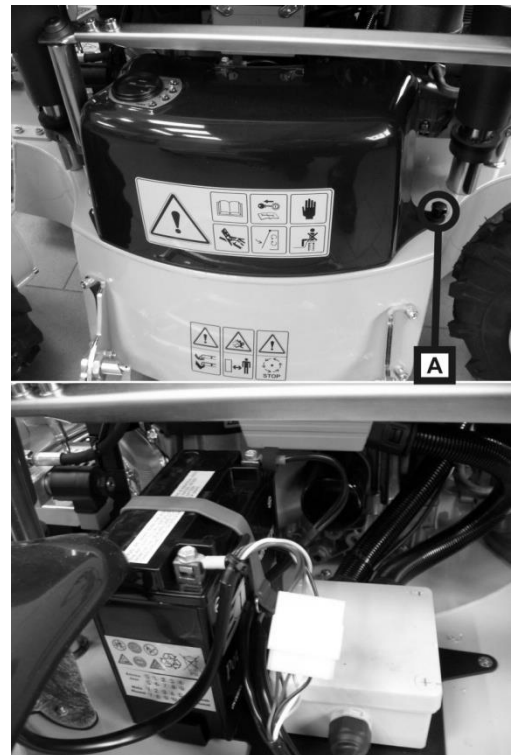

NEVER START THE MOWER WHEN A CHARGER IS CONNECTED TO THE BATTERY. FOR CHARGING USE ONLY SPECIAL CHARGERS PREVENTING THE EXCESS OF THE GASSING VOLTAGE. WHEN CHARGING THE BATTERY, MAKE SURE THAT CABLES CONNECTING THE BATTERY TO THE MOWER ARE DISCONNECTED.

9.6 FUEL TANK

The plastic fuel tank is placed on top of the mower deck, to one side of the mower. The tank has a screw-on cap A.

Before refuelling always stop the engine. Do not smoke or approach open flames or sources of sparks when manipulating with gasoline.

Use unleaded 95-octane gasoline without any additives. The operator is responsible for all engine or fuel system damage resulting from the use of wrong, low-class, old or contaminated fuel. The warranty does not extend to such damage.

Do not fill the tank near open flames or sources of ignition. Do not smoke.

Do not open the tank while it is hot.

Do not fill/empty the tank in enclosed areas.



9.7 PREPARING THE REMOTE RADIO CONTROLLER

Insert the original battery (Ni-Cd 7.2V, 1500 mAh) into the remote radio controller. If the power indicator flashes, the battery is charged.

Discharge signal – if the voltage of the remote radio controller is too low, then the RC will emit a high pitch sound. Move the mower to a safe place and replace the battery. After the low voltage is indicated, you have about 15 minutes to move the mower to a safe place. After 15 minutes the remote radio controller will be turned off permanently. If the battery is exhausted, replace it with a reserve battery.



The transmitter (remote radio controller) and the receiver (control unit) were adjusted and set-up by the manufacturer. Do not make any modifications to these devices. They are a matched pair.

9.8 CHARGING THE REMOTE RADIO CONTROLLER BATTERY

To charge the battery:

Connect the charger to the electric power outlet in your car. Insert the battery into the charger (orange lamp is illuminated and the battery charging starts).

When the battery is fully charged, the orange lamp flashes quickly.

Leave the battery in the charger as long as necessary (the charger controls the charge level and does not overcharge the battery)

10 OPERATION

10.1 TRANSPORTING THE MOWER

The mower should be transported to the mowing area on a trailer or other suitable transport vehicle.

Transporting the mower on thoroughfares on its own wheels is prohibited

When loading/unloading a trailer, make sure that the edge - formed by the floor of the trailer and the ramps – is not an obstacle for the mower. Otherwise you need to use longer ramps.

When loading, do not allow any person to stand by the ramps or under the hanging mower if it is lifted. It may only be hung up on places marked by the chain symbol. The loading capacity of the lifting eyes/ hooks must be suitable for the weight of the machine as quoted on the serial plate.

After placing the mower on the transport, make sure it is properly secured. Attach fastening devices to the eyes marked by the chain symbol on the mower.

10.2 STARTING THE ENGINE OF THE MOWER

- Check the gasoline in the fuel tank, refuel with unleaded gasoline BA95 if necessary.
- Check the forward/reverse control joystick (8 on the remote radio controller and leave it the neutral position.
- Switch ON the remote radio controller power switch (1) by turning clockwise.
- A red lamp (11) will illuminate on the RC.



Unless button (1) is in the ON position, the machine will not start

- Ensure the EMERGENCY STOP button (1) on the remote radio control is in the raised position.
- Set the engine choke control to the position for cold start - the lever is pulled up (only for the first start or if the engine is cold). See the engine user's manual.
- Use the key to unlock and pull up the EMERGENCY STOP button on the mower.

- Wait till lamps 1 and 3 are illuminated and lamp 2 is flashing (on the mower), then press the horn button (12) on the remote radio controller – the mower ignition engages.
- Press the START button (4) on the remote radio controller. If the engine does not start, all the functions of the mower are locked again. To unlock them and consequently to start the engine, press button (3).
- The engine is “running”, release the START button on the remote radio controller. While the engine is working do not use the START button again.
- Let the mower idle for about 2 – 3 minutes without engaging the mowing device and, while the engine is warming up, push back the choke control (in the case of a cold start)




NOTICE:

Do not stand right next to the mower while starting it



10.3 SHUTTING OFF THE ENGINE

- Before shutting off the engine, always disengage the mowing mechanism drive on the remote radio controller.
- Do not shut the engine off immediately after mowing, let it run for a short while with the minimum engine speed in order to let it cool down.
- Stop the engine by pushing the STOP button (3) on remote radio controller.
- Do not use the EMERGENCY STOP button to shut off the engine except in an emergency.
- Press the EMERGENCY STOP (2) button on the mower and remove the key.
- Turn off the remote radio controller by pushing button (1).

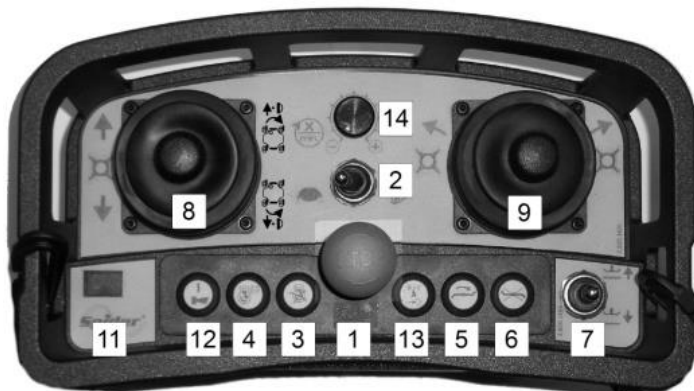

10.4 EMERGENCY SHUTTING OFF OF THE ENGINE

There are two red EMERGENCY STOP buttons. One is placed in the remote radio controller (1), the other one on the body of the mower (2). Both buttons have the same function.



For emergency stopping use preferably the remote control button (1). Use the button on the mower (2) only when the mower is in a stable position and on a flat area, or when you are standing right next to the mower and cannot be endangered by the machine.



The EMERGENCY STOP buttons on the remote radio control (1) and on the mower (2) should be used at any time when an emergency stop is required.

2



10.5 ENGAGING THE MOVING BLADES

The mowing blades can only be engaged when the engine is running.

Set the maximum mowing height with switch (7).

Increase engine speed by regulator 14.

Move the switch (5) of the blade-drive clutch to the ON position on the remote radio controller.

Set the working position of the blade by the mowing height switch on the remote radio controller (7)



Do not engage the mowing blades in tall grass, damage to the clutch may result. If you wish to mow tall grass, move the mower to a place without tall grass and then turn the blades on. When engaging the blades stand in a safe distance from the mower. Do not engage the blades if there are people near the mower. The rotating blades may throw objects.

10.6 DISENGAGING THE BLADES

Press button (6) to disengage the blade. If you are not planning to mow anymore, set the maximum height with switch on the remote radio controller.

10.7 HEIGHT OF CUT ADJUSTMENT

The machine has a variable mowing height. The mowing height can be from 60 to 110 mm as a standard.

The mowing height can be adjusted by switch (7) on the remote radio controller. Follow the marks on the body of the mower.

If the grass growth is high or wet, select a higher mowing position.

The lowest position is used when mowing well-maintained and even areas.




When mowing unknown areas for the first time, we recommend to mow with blades in a higher position and - after finishing mowing - to re-examine the area for undesirable objects. The next cut should only be done after the grass cuttings have died.

Set the height of cut approximately, mow a few meters of the area and check that the height of the cut grass meets your expectations.



The height of cut on a slope may significantly vary from that on a level surface.

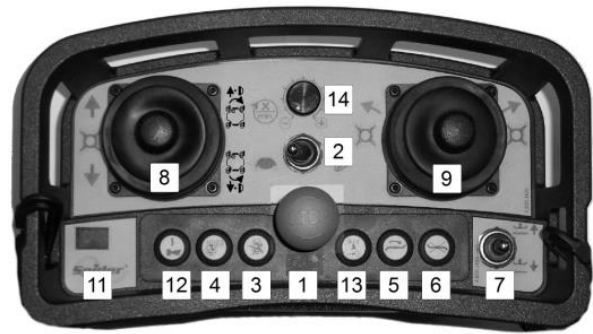

Switch (7) has 3 positions: The maximum and minimum limit position and the third intermediate position, which preserves the current height set-up.

Cleaning the mowing mechanism

After each use the mowing mechanism must be carefully cleaned, especially the inner walls of the mowing deck. The cleaning should be carried out with a scraper. The mower must not be washed by power washer or other high-pressure devices. When cleaning, secure the machine against moving.

Raise the mowing mechanism to the transporting position. When cleaning, also check the blades. Proper maintenance and treatment of the mowing mechanism increases the quality of work and durability of your machine.

After cleaning and drying, especially if the mower will not be used for a longer time, treat all scratched parts with preservative coating.

If you are lifting the mower during cleaning, make sure that you secure it against movement and fall. Disconnect the battery, remove the spar plug terminal and press the EMERGENCY STOP button on the mower.

10.8 MULCHING COVER (OPTIONAL ATTACHMENT)

Spider ILD01 can be fitted with a mulching cover, which improves the mulching quality on well-maintained lawns.



With the mulching cover it is possible to mow grass, which is at the most 50% higher than the selected height of cut (i.e. max. 165 mm). If mowing higher grass the mulch deck may become clogged and the mulching quality may deteriorate.

Principles of quality mulching:


- Always mow after the growth has dried properly.
- When mowing thick or moist grass use lower driving speed
- If a low cut is required, you may need to mow the area twice: for the first time with the mower deck set up higher and for the second time with the mower deck set up low.
- Keep the mower deck clean. Regularly remove remains of grass from the mower deck.
- Regularly check the condition and sharpness of the blade.

Mounting of the mulching cover

- Shut the machine down and disconnect the minus pole from the battery.
- Tip the machine over to the servicing position (hydraulic tank down).
- Clean the mower deck.
- Insert the mulching cover in between the mower deck and the cover clips (make sure the mulching kit is correctly orientated)
- Push the cover into the mower deck until the clips lock in the openings in the mulching cover.
- Make sure the mulching cover is properly secured against movement and cannot accidentally fall out.
- Turn the blade in on order to make sure that the blade does not collide with the mulching cover.
- Tip the machine back on its wheels.
- Disconnect the spark plug and the battery.

Dismounting of the mulching cover

- Shut the machine down, disconnect the minus pole from the battery and disconnect the spark plug.
- Tip the machine over to the servicing position (hydraulic tank down).
- Clean the mower deck.
- Unlock the clips holding the mulching cover and pull out the mulching cover out.
- Tip the machine back on its wheels.
- Reconnect the spark plug and the minus pole of the battery.

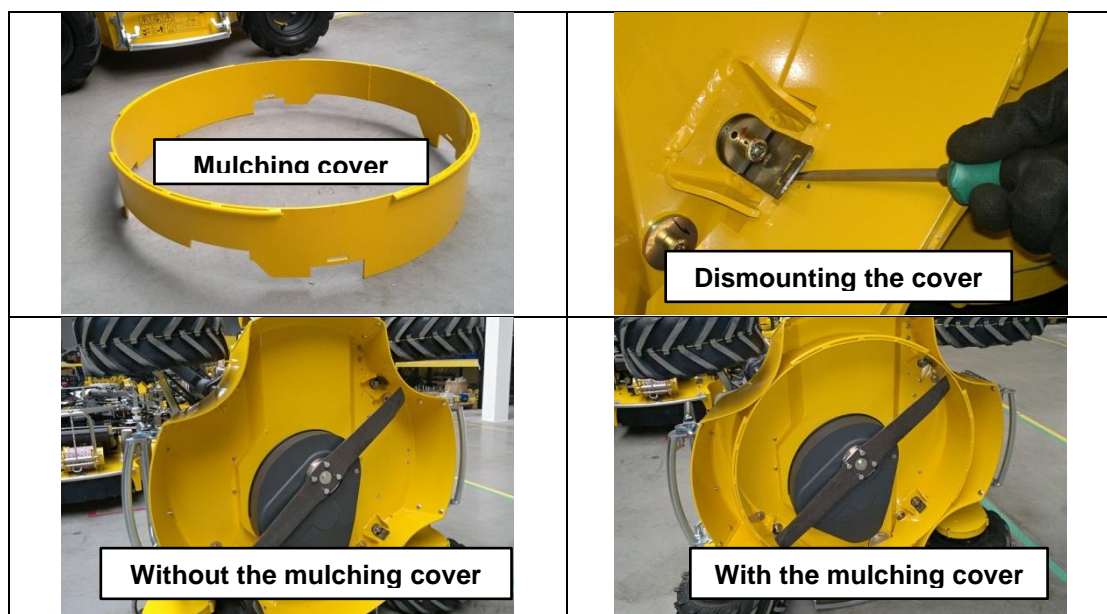

10.9 DRIVING THE MACHINE

The machine movement is controlled by joystick (8) (forward and reverse) (see the symbol under the controller on the remote radio controller) and by joystick (9) (Left/ right). By combining these two controls you will be able to control the machine.

When these joysticks are moved, the machine either accelerates or steers.

NOTICE:



Accelerate slowly so as to be able to react to the direction in which the mower starts to move. The V shaped tread pattern on the tyres denotes the direction the machine will move when forwards motion is selected.

When driving, slowly move the joystick in the desired forward or reverse direction.

When changing the forward motion to reverse motion, always leave the joystick for a short moment in the neutral position.



When driving the mower, always set the maximum engine speed. Driving with any lower engine speed is prohibited.

In cold weather let the engine run for about 2 minutes to allow the oil to get warm before driving.

10.10 DRIVING SPEED OF THE MOWER

Always choose a suitable driving speed, which enables an acceptable mowing quality. When selecting speed, always start with slow and proceed to fast, not the other way around. If the growth is thin, you may mow at higher speed.

To control the driving speed you can also use the driving speed controller (2), which let's you choose between high (rabbit) and low (turtle) driving speeds. When starting to operate, always use the low (turtle) speed range. Also choose the low speed range when mowing either slopes steeper than 20 degrees or an uneven terrain.



Never reduce the driving speed by reducing the engine speed!!! Always use joystick (8) to reduce the speed.

Higher speed range:	0-7 km.h ¹ , 0-5 mph
Lower speed range:	0-3 km.h ¹ 0-2 mph




IT IS PROHIBITED to drive on slopes steeper than 20 degrees with the mowing device engaged and the controller switched to the high-speed (rabbit) position.



IT IS PROHIBITED to switch to the high-speed position while mowing. Stop the machine before selecting a different speed

range.

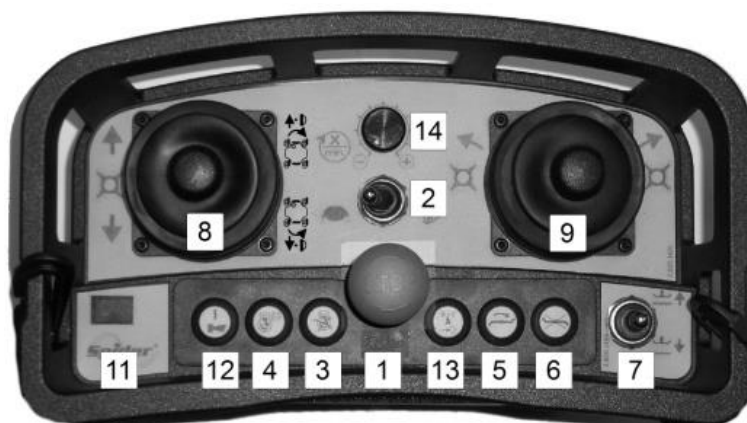

10.11 DRIVING ON SLOPES

Driving on slopes is very demanding for the operator, as they constantly have to evaluate information about the movement of machine and the character of the terrain. Especially important is the wheel adhesion to the grass or other surface and the mower tilt angle. Pay attention to climatic conditions. The climbing ability of the mower will be radically different on dry, wet or moist grass slopes.



The mower may work on the recommended slopes (see chapter 2.2) only when the surface (grass) is dry. If the grass is wet or moist, the maximum slope, on which work is permitted, is 20 degrees.

Examine closely the working area. Evaluate the situation and test the possibilities and characteristics of the specific terrain. Do not take chances. If the mower loses traction, you have lost control, stop mowing and re-evaluate the conditions.

The driving wheels of the mower must be evenly inflated to the maximum value allowed by the tyre manufacturer. Maximal 300 kPa / 3,0 bar / 43 PSI. Start your work at the bottom of the slope and proceed to the top. This way you will be usually moving from less to more steep slopes, which will give you a better chance to evaluate the climbing ability and make the right decisions concerning further work. If you begin to mow steeper slopes first, it may happen that – due to adverse conditions - the mower will slip on the slope. Due to dynamic effects the mower may even roll over. If the mower is slipping, do not try to stop it and do not approach it, especially the area below or directly above the mower.

Do not touch or approach the mower if the wheels are

lifted, the mower tilted, in an unstable position or starting to roll over. The method of cutting from the top of the hill to the bottom should only be used exceptionally when the operator is in detail acquainted with the terrain.

Before operating on slopes, make sure that no one is below the mower or the working area. Do not endanger third persons by the movement of the mower.

Choose your operating position away from the area to which the mower may slide or to which the mowed grass may be thrown. The direction of the discharged grass may change while operating according to the driving direction of the mower.

When working on slopes and when driving in an unknown terrain, make sure that the fold-out bumpers are locked in a horizontal position. The fold-out bumpers increase the mower resistance against rolling over. For correct functioning the bumpers must be undamaged and properly locked

When working on slopes, avoid the following:

- Sudden sharp acceleration, steering or braking
- High driving speed
- Uneven ground
- Changing adhesion (moving from areas exposed to sun to shade)
- Driving over the mowed material
- Reduction of engine speed
- Stopping on a slope and shutting off the engine.

10.12 STOPPING THE MACHINE ON A SLOPE

In case you are forced to stop the mower on a slope and need to interrupt your work, stop the engine etc. be sure to position the wheels across the slope. This will prevent possible movement of the mower down the slope.

11 MAINTENANCE AND LUBRICATION

11.1 MAINTENANCE CAHRT - MOWER

Machine Maintenance Plan				
	Period according to the state of the operating hours (OH) counter			
X = Operator	Daily before operating	Every 50 OH	Every 200 OH	Every 800 OH
Visually check for oil leakage from engine and hydraulic systems	X		X	
Grease all sliding bars (at least once a season)			X	
Lubricate other lubrication points with dry lubricant in a spray		X		
Check the level of hydraulic oil in tank	X		X	
Check the tyre pressure	X		X	
Visually check the tension of travel V-belts	X		X	
Visually check the tension and lubricate the steering chain	X		X	
Check the remote control battery state of charge	X			
Check the mower battery state of charge	X			
Check electronic and safety devices (emergency stop, steering, signal etc.)	X		X	
Check screw and nuts tightening (visually check daily)			X	
Check blade sharpness and deformation	X		X	
Check the blade bolts tightening	X			
Change the hydraulic oil				X
Change the hydraulics filter (Ecological oil - first exchange after 200 OH)				X
Rinse the fuel tank, change the breather filter				X
Change the fuel filter (change more often on extremely dusty or dirty conditions)				X
Clean cooling systems (engine, hydraulic pump)	X			
Visually check hydraulic hoses, fuel hoses, cables – replace if necessary				X
Check and adjust wheel geometry			X	
Adjust the neutral position of the machine drive (hydraulic pump)			X	
Check, adjust and tighten chains in the wheel suspensions			X	
Adjust the blade deceleration			X	
Check drive belts and mowing mechanism belts – replace if necessary			X	
Check and clean the mowing mechanism gear (belts, pulleys, belts pulleys)		X		
Check safety decals on the machine	X			
Check the mowing device bearings			X	
Check the blade hub			X	

11.2 MAINTENANCE CHART - ENGINE

Engine maintenance chart: Kawasaki FS541V						
Maintenance	Period according to the operating hours counter					
	Daily	After first 8 hours	Every 25 hours	Every 100 hours	Every 200 hours	Every 300 hours
* = Perform more often in dusty conditions K = Performed by authorized Kawasaki service/dealer						
Check and add engine oil	X					
Check for loose or lost nuts and screws	X					
Check for fuel and oil leakage	X					
Check or clear air intake screen	X					
* Clean air cleaner foam element			X			
* Clean air cleaner paper element				X		
* Clean dust and dirt from cylinder and cylinder head fins				X		
Tighten nuts and screws				X		
Change engine oil		X		X		
Clean and set spark plug				X		
Change oil filter					X	
* Replace air cleaner paper element					X	
K Clean combustion chamber						X
K Check and adjust valve clearance						X
K Clean and lap valve seating surface						X
	= Device check					
	= Element replacement					

11.3 ENGINE MAINTENANCE



The following activities are considered to be workshop maintenance and should be carried out by trained personnel.

Before beginning any maintenance activity on the mower, turn off the engine, push the emergency button and remove the key from the button. Also turn off the remote radio controller by the switch on the control panel.

To eliminate the possibility of an unexpected start of the mower, disconnect the (+) terminal connector on the battery.

The engine should only be repaired or serviced by an authorised dealer/servicing facility that possesses all necessary tools, equipment, spare parts and professional skills.

When maintaining, repairing or cleaning, always follow the engine manufacturer's user's manual, which is included in the technical manual pack.

11.4 CLEANING THE FUEL TANK

While using the mower impurities may settle in the fuel tank. These impurities may cause a blockage while using the mower.

The fuel tank may only be emptied by siphoning the gasoline from the tank, especially if it is full.

The filter hose from the fuel tank leads under the upper part of the body to the filter. Blocking may be identified by poor engine performance and by vacuum being created in the tank.

Breather filter



When working with gasoline do not smoke or work near open flames.

11.5 MAINTAINING THE HYDRAULIC DRIVE

The maintenance of the hydraulic drive requires properly trained service personnel.

Regular maintenance should address the torque of hydraulic connections and bolts, replacement of pressure hoses and oil refilling.



The maintenance of the hydraulic parts must be carried out in a very clean working area. Any contamination brought into the hydraulic circuit may cause damage. If replacing any part, remove all contamination by rinsing it with cleaning fluid.



The hydraulic drive must never work without or with an insufficient amount of oil, not even for a short time

11.6 CHECKING AND REFILLING OIL

Check the oil level in the hydraulic oil tank daily. Measure the oil level with the dipstick in the cap of the tank. The oil level must be between the limit marks. If you are working in extreme conditions, the level of oil (at ambient temperature) must reach the upper limit mark on the dipstick.

When checking the oil, the engine must be off and the oil cold.

If you are checking warm or hot oil, the level of oil may be higher (and reach above the limit mark) due to the oil volume expansion.



Do not overfill the hydraulic tank!!!

11.7 ADJUSTMENT OF THE NEUTRAL POSITION OF THE HYDRAULIC DRIVE

This adjustment should only be performed by an authorised service/dealer.



11.8 DRIVE V-BELTS

Check the wear and tension of the V-belts and the tensioning devices.


a) *Hydraulic pump drive*

Located under the cutter deck inside cover A.

The V-belt is tensioned automatically by a spring and a tension pulley.

b) *Travel wheels drive*

The V-belt is tensioned by a tension pulley B.

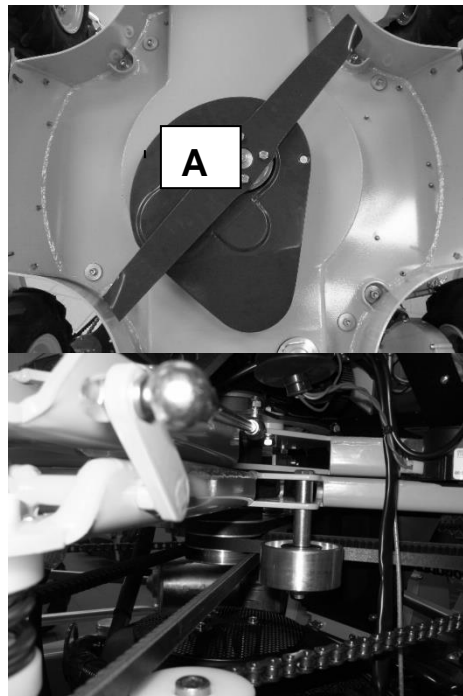


11.9 GEOMETRY ADJUSTMENT

If you do not possess necessary equipment and skills, have this work performed by an authorized service/dealer.

- Lift the mower (wheels above ground) and position the wheels into a straight direction.
- Release the steering chain taper lock (figure 91).
- Place a straight lath to the wheel portal on the left side and to the tyre disc on the right side and adjust the wheels so that they are parallel (figure 92, figure 93).
- Tighten at least 1 screw of the taper lock (whichever is accessible). Do not turn the wheels unless you have tightened at least one screw - this would distort the geometry!
- After tightening one screw you can turn the wheels.
- Tighter the second screw.
- Check the geometry with a lath.
- Step-by-step turn wheels and tighten both screws of the taper locks of all wheels until they are completely tightened (cca 23 Nm).



Picture 91.

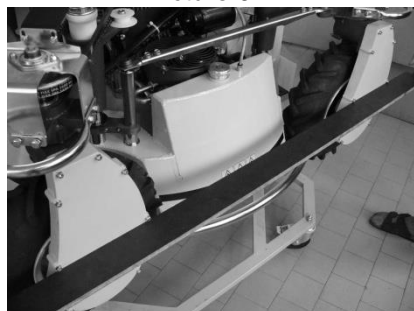

Picture 92.




Picture 93.

11.10 FINAL GEAR DRIVE TO WHEELS

If you do not possess necessary equipment and skills, have this work performed by an authorized service/dealer.

Remove the cover of the final gear drive. The cover is attached by bolts onto the sides. Adjust the chain tensioner C so the chain is properly tensioned. The tensioner can be shifted after loosening the fastening screws (see the figure). To tighten the chain, slightly unscrew the thrust bolt.

Do not tension the chain excessively. This could reduce the durability of the chain and the bearing. Lubricate the chain by spraying it with lubricating oil.

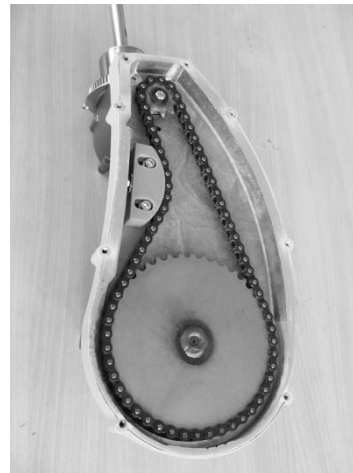

11.11 MAINTAINING ELECTRIC CIRCUITS AND DEVICES, TRANSMITTER

Keep all parts of electric circuits clean, especially from oil products, dust sediments and dry grass.

Replace conductors with damaged insulation. For replacement, use only original conductors supplied by the manufacturer.



Repairing of electric circuit should only be performed by an approved dealer.

11.12 ADJUSTING BLADE DECELERATION

The electromagnetic clutch is placed under the clutch cover above the rotary blades. The clutch was adjusted by the manufacturer. When engaged the clutch transmits power onto the blade, when disengaged the brake stops the rotating blade. Do not change the clutch setting. If damage on this part of the machine should occur, always leave the repairing to an approved dealer. The maximum rundown time of the rotary blade was set to 5 seconds.



After finishing any work on the electromagnetic clutch, the cover must be returned to its original place and properly sealed to prevent the clutch from getting dirty.

11.13 CHAINS

STEERING CHAIN


Check the wear and tension of the chain and the tensioning devices. The chain can be tightened by rotating the steering motor bracket after loosening two attachment bolts (see the figure).



11.14 FUSES

The fuse box is placed in the space next to the battery. Inside the fuse box you can find fuses for

- | | |
|---|--|
| 1 | 5 A - Control panel |
| 2 | 15A - Battery charging |
| 3 | 15A - Battery charging |
| 4 | 20 A - Parallel protection of the main circuit |
| 5 | 20 A - Parallel protection of the main circuit |

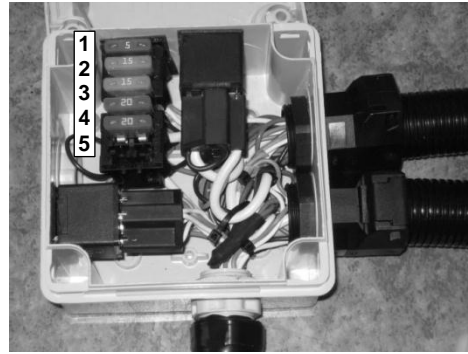

When changing fuses follow the electric current value for which the fuses are designed. Do not replace damaged fuses with fuses with a higher or lower electric current value. These could cause damage or even a fire in the mower!

11.15 MOWING BLADE

Check the state of cutting blades in regular intervals.

Blade:

Must not show signs of damage such as twisted, bent or deformed parts of blade.

Must be properly attached by the flange in the middle of blade.

Must be sharp.

The fastening bolts of the flange must not be damaged.

For proper and reliable functioning the blade is statically balanced by the manufacturer. This balance must be preserved during the entire use of the blade

The blade must be statically balanced after each sharpening

To tighten the blade, use a torque wrench and a specified tightening torque of 60 Nm.

If the blade is damaged, it is prohibited to:



Straighten them
Heat them
Weld them
Ream them or otherwise change their construction.

When replacing worn-out parts follow these rules:

The blade may only be sharpened within the permitted wear limit. Balancing must be carried out after sharpening.

The blade cannot be repaired.

When changing the blade, use new fastening bolts if the current ones show signs of damage. Only high-tensile steel bolts may be used for this purpose. No other steel bolts are acceptable.

If the mowing mechanism vibrates when engaged, do not continue operating the mower, turn it off and contact your local dealer.

To tighten bolts use torque listed in the chart at the end of this chapter (see 11.21).

Changing the mowing blade

Raise the mowing device to the transport position. Stop the engine, switch off the RC and push the emergency button on the body of the mower. Disconnect the spark plug and battery. Lift one side of the mower until it leans against the handles on the other side. Always lift the mower on the exhaust side tilt it against the hydraulic tank side to prevent oil entering the air cleaner. Secure the lifted side against falling by supporting it. Use gloves when changing the blades. Loosen the fastening bolts. Remove the bolts and the washers. Be careful when removing the last bolt, the blade may fall to the ground. After the blade is replaced, fasten it by working in the reversed order.

Always check the bolts when fastening the blade.




After attaching the blades, check their tightness. Be very careful when engaging the mowing mechanism for the first time after replacement.

Check for unknown sounds, vibrations etc.

Always lift the mower on the exhaust side and tilt against the hydraulic tank side to prevent oil entering the air cleaner. Be aware of oil spills.

11.16 CHANGING THE WHEEL

- Change the wheels on a level, firm surface

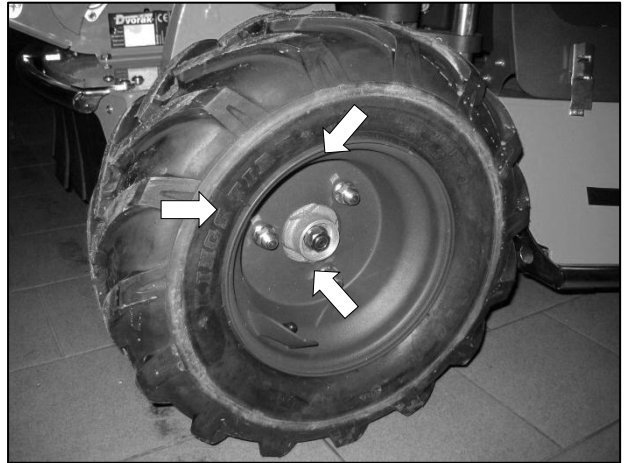

- Turn the wheel so that the tightening nuts are accessible from the outside
- Stop the engine, remove the key from the ignition
- Secure the machine against movement.
- Lift the mower and support it under the cutter deck
- Ensure the machine safe & supported before working on it.
- Loosen the wheel nuts, remove the wheel
- After repairing it, attach the wheel back in the reversed order.
- Use suitable tools to unscrew the nuts

11.17 TYRE PRESSURE

Keep the specified tyre pressure. Other values may unfavourably influence the riding characteristics especially on slopes. You may even loose control of the machine.

(recommended and max. tire pressure - 300 kPa / 3,0 bar / 43 PSI)




11.18 MOWING HEIGHT ADJUSTMENT MECHANISM

Keep the moving parts of the slide way clean, undamaged and without an excessive clearance


11.19 LUBRICATION

Use adequate amount of lubricant on parts, which are to be lubricated. Excessive lubricant tends to drop down and pollute both the machine and the environment. Insufficient amount requires frequent lubrications.




Chain Spray Lubricant:
INTERFLON FIN LUBE TF



Lubricating grease:
MOBILGREASE XHP/222



Motor oil:
SAE 10W - 40

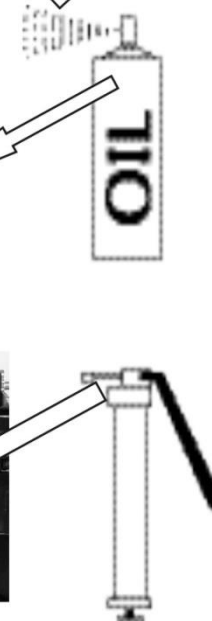

11.20 CLEANING THE MACHINE

Cleaning the whole machine by a power washer or similar is not recommended. Water under pressure may penetrate inside electrical parts, carburettor, air filter and cause malfunction.

Wipe other parts with tissue or brush.

Do not use gasoline or other oil products for cleaning.


11.21 TORQUE CHART

Connection bolt	M6	M 8	M 10	M 12	M 14	M 16	M 20
Torque /Nm/	10	25	50	85	135	215	410

11.22 OIL VISCOSITY

Oil requirement may differ according to the use in different seasons or climatic zones. The following chart shows the SAE values.

Chart of SAE oil classes according to external temperatures engine / gear

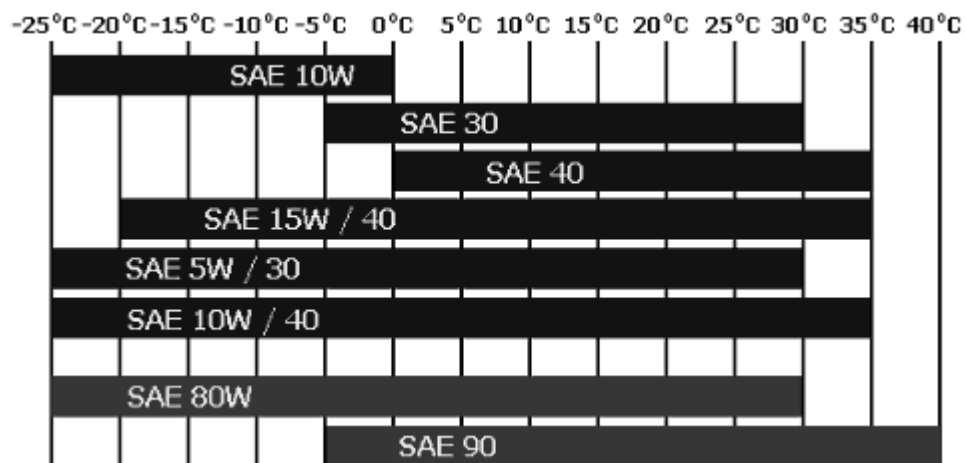

Recommended oils:


SAE 10W – 40 API classification SF or higher

11.23 TECHNICAL PLATE

The technical plate provides information on mower fillings and basic information for machine maintenance. The technical plate is placed on the machine girder.


Type	SPIDER ILD 01 G
Engine:	Kawasaki FS 541V
Oil	10W40 / API SG
Quantity	1,7 l
Spark plugs	NGK BPR4ES
Fuel	Unleaded petrol
Hydrostatic system:	
Oil	HV 68
Quantity	6,5 l
Electronic system:	
Accumulator	12V/18Ah FBTX20L
Fuses	5A /15A /15A /20A /20A
Tires:	
Type	16 x 6,50 - 8
Pressure	max. 300kPa / 43 PSI
Lubrication:	
Chains	INTERFLON FIN LUBE TF
Sliding surfaces	INTERFLON FIN LUBE TF

- Engine
- Engine oil
- Oil quantity
- Spark plug
- Fuel
- Hydraulic system
- Hydraulic oil
- Oil quantity
- Electronic system
- Battery
- Fuses
- Tires
- Tire type
- Maximal pressure
- Lubrication
- Chain gears
- Sliding surfaces



11.24 TOOLS

Spider ILD01 is equipped with a basic set of tools, which allow regular maintenance and basic servicing. The tools are based under the side cover upon to the Fuel tank (see figure below). The tool roll is also equipped with a pocket for the business card of your local authorized service/dealer.

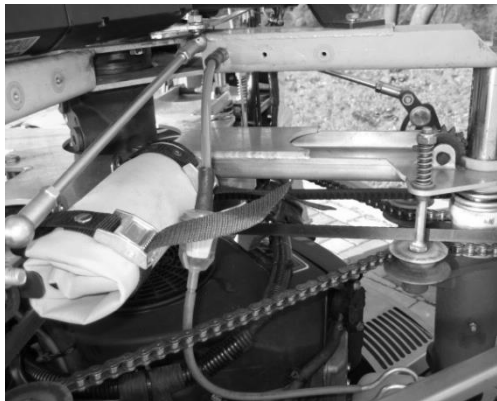List of tools	Use	Placement on the machine
Spark plug spanner 19, 21 mm	Spark plugs	
Socket head 19 mm	Change of blades	
Socket head 17 mm	Change of wheels	
Socket head 15 mm	Tightening of drive belts	
Lever handle	-	
Flat spanner 10-13 mm	Tightening of drive belts	
Flat spanner 16-17 mm	By-pass, tightening of steering chain	
Hex-wrench IMBUS 3 mm	Wheel suspension	
Hex-wrench IMBUS 5 mm	Wheel suspension	
Hex-wrench IMBUS 6 mm	Wheel suspension	
Hex-wrench IMBUS 8 mm	Tightening of steering chain	
Screwdriver flat-tip / crosshead	Fuse box	
Fuses 5A, 20A	Fuse box	

12 TROUBLESHOOTING

Problem	Possible cause	Correction
Nothing appears on the display	RC battery is exhausted	Replace the battery with a charged
Engine does not start	Accumulator is discharged	Charge the battery
	Accumulator is disconnected	Attach terminal connectors to the
	Cable lines are broken	Check/replace the cable lines
	Spark plug does not spark	Clean the spark plug
	Fuel filter is clogged	Change it
	Not enough fuel	Refuel
	Not enough oil in engine	Refill oil up to the required level
	No signal or the mower is out of the signal range	Check the aerial attachment / Move closer to the mower
	Emergency button on the mower is pressed	Unlock the button
The mower does not travel properly/at all	Not enough oil in the hydraulic	Refill oil and de-aerate properly
	Oil is overheated	Clean the fan area, wait till oil cools down
	Hydraulic pump filter is clogged	Change it
	Mechanic elements of the hydraulic drive are worn out	Change them
The mower cannot climb slopes	V-belts are worn	Replace them
	V-belts are not tensioned enough	Tension them
	Damaged hydraulic pump servomotor	Change it
The mower vibrates when started	Blade carrier shaft is curved	Replace the shaft
	Blade is damaged	Replace the blade
	Blade is not attached properly	Change the blade bolts and tighten
	Unevenly worn out or damaged	Replace it
Bad mowing quality	Grass is overgrown, too high	Mow only grass which is maximum 3x taller than the pre-set stubble height. We recommend to mow the
	Worn/blunt cutting edge of the	Sharpen or replace the blade
	Grass is too wet	Wait till the grass dries
	Low engine speed	Set the engine speed to maximum
	Too high driving speed	Lower the driving speed

13 MAINTENANCE AFTER SEASON

When the season is over or if the machine is not going to be used for longer than 1 month, it is advisable to prepare it for storage.

If fuel stays in a tank longer than 1 month without moving, it may create sticky sediment that can unfavourably affect the carburettor and the whole fuel system and cause engine malfunction.

- Thoroughly clean the whole machine, especially the mowing mechanism.
- Replace damaged or worn-out parts
- Check all bolted connections. Tighten all loose nuts and screws.
- Lubricate all mobile parts – the whole machine (according to the lubrication plan)
- Empty the fuel tank and let the engine run until it runs out of fuel.
- When emptying the fuel tank, work in an open area outside.
- Prepare the engine for storage (according to the user's manual of the engine)
- Disconnect the ignition cable.
- Unscrew the spark plug and pour a little oil into the cylinder bore (about 1 cm/0,4 inch).
- Turn the engine by starting it shortly with the ignition key without spark plugs on.
- Screw the spark plug back hand tight. Do not connect the cable.
- Dismount the Accumulator and store it on the dry and warm place
- Keep the mower on the save and dry place. Use the permeable cover to save the mower against the corrosion

14 WARRANTY CONDITIONS

This document sets out the extent, conditions and manner of exercising rights stemming from the Manufacturer's liability for defects of the delivered Product

1. Dvořák – svahové sekačky Ltd., registered office Dvorce 62, Havlíčkův Brod 580 01, Czech Republic, ID No. 2601379 (further referred to as "Manufacturer") provides a Warranty for new Products according to the set regulations for a period of 24 months from the day the Product is delivered to the Customer, or from such a Product being set into operation, or up to 800 operating hours, according to whichever happens first. The Warranty period for new spare parts delivered under Warranty expires together with the Warranty period of the whole Product/machine.
2. Claims stemming from the Warranty must be exercised with the Distributor / Dealer and also resolved by them. A properly completed Warranty sheet must be presented and all of the inspections prescribed by the Manufacturer must have been implemented. Incorrect information, additional extracts or overwriting on the Warranty card lead to loss of the Warranty.
3. The Warranty applies to defects on the Product caused by defective raw materials, construction faults or made workmanship. Defective parts on the Product will be replaced free of charge with a new part or repaired. No entitlement to immediate delivery is created and the Manufacturer takes on no liability for damage claimed for as a result of delayed delivery.
4. The Warranty does not relate to regular wear and tear (parts susceptible to regular wear and tear especially include the following: blades, blade hubs with bearings, bearings of wheel shafts, spark plugs, air filters, belts, chains, tires, sealing, hydraulic hoses, winch rope etc...).
5. The Warranty cannot be claimed against if the cause of the defect is:
 - a) The effects of external mechanical or chemical influences on the Product
 - b) Unreasonable handling of the Product, overloading it, neglect or incorrect operation
 - c) Repair of maintenance of the Product performed by a third party, which was not authorised to carry out such work by the Distributor / Dealer or Manufacturer
 - d) Installation of such parts into the Product, the use of which is not approved by the Manufacturer
 - e) Implementation of changes to the Product, which were not approved by the Manufacturer
 - f) The fact that the Manufacturer's regulations were not adhered to for handling the Product, its maintenance and treatment (e-g. the instruction and maintenance manual), especially if the prescribed Warranty inspections were not carried out
 - g) The fact that the user neglected declaration and removal of defects, which were apparent when they took receipt of the Product or which they did not immediately provide notification of an have removed, when they arose later
6. In case of Products sold with a discount the Warranty does not extend to defect for which the discount was granted.
7. All claims stemming from the Warranty are forfeit on expiry of the Warranty period. In the case of defects, for which notification was made during the course of the Warranty period and which were not removed during this period, this Warranty remains valid until the defect is removed. In this case, the Warranty is terminated at the latest within 1 month of the last repair or after declaration by the Distributor / Dealer that the defect was removed or that this does not concern a defect.
8. The Manufacturer is not liable for any economic loss or for any subsequent damage caused to persons or their property, which was created as a result of failure of the Product.
9. The Warranty will only be valid subject to the condition that the correctly completed part 2 of the "Combined delivery note" is delivered to the Manufacturer within 14 days of the date the Product is delivered to the Customer.
10. The Warranty applies to the Product in the condition in which it leaves the production plant. The Manufacturer is not liable for damage during transportation.
11. In the event of a change in owner, it is possible to transfer the remaining part of the Warranty period to the new owner if the Manufacturer is requested to do so. The new owner confirms that

they have taken receipt of the instruction manual at the same time as the Product as well as the Warranty conditions and that they agree with these.

12. The Warranty period is extended by the period of the duration of the Warranty claim assessment. (The Warranty claim assessment period begins on the day following the day the Product is accepted for assessment and terminates on the day the Warranty is acknowledged or rejected, not on the day the Customer collects the Product back). In case the Warranty claim is rejected, the Warranty period will not be extended!
13. After inspecting relevant documents and the claimed product the Distributor / Dealer will:
 - a) acknowledge the Warranty claim as warrantable and settle the claim on spot; in case it is not possible to settle the acknowledged claim on spot, they will accept the Product into Warranty procedure during which the acknowledged claim will be settled without unnecessary delay. The Distributor / Dealer will issue a written document certifying the acceptance of the Product from the Customer and both parties will confirm it by their signatures; or
 - b) reject the Warranty claim as unwarrantable and together with the Customer they will agree on further steps, or
 - c) accept the claimed Product for a professional assessment based on which the warranty claim will either be acknowledged and consequently settled without unnecessary delay, or rejected. The Distributor / Dealer will issue a written document certifying the acceptance of the Product from the Customer and both parties will confirm it by their signatures. The Distributor / Dealer will inform the Customer about the result of the assessment (acknowledgement or rejection of the Warranty claim) in a previously agreed manner (in writing or by one of long-distance communication devices).

15 SERVICE RECORDS



SPIDER ILD01

Warranty Inspection after 200 Operating Hours

Date: _____

Inspection description:

Defects found:

Parts changed:

Part number	Part description	Qty

Service shop signature:

Customer signature:
