

z/VM



Migration Guide

version 5 release 2

z/VM



Migration Guide

version 5 release 2

Note:

Before using this information and the product it supports, read the information under “Notices” on page 231.

Fourth Edition (May 2006)

This edition applies to version 5, release 2, modification 0 of IBM z/VM (product number 5741-A05) and to all subsequent releases and modifications until otherwise indicated in new editions.

This edition replaces GC24-6103-02.

© **Copyright International Business Machines Corporation 1992, 2006. All rights reserved.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

About This Book	xi
Who Should Read This Book	xi
What You Should Know before Reading This Book	xi
Where to Find More Information	xi
How to Send Your Comments to IBM	xii
 Summary of Changes	xiii
GC24-6103-03, z/VM Version 5 Release 2 (Updated Edition)	xiii
 Chapter 1. Introduction to Migration.	1
How Migration Information Is Presented in This Book	1
Compatibility Terms Used in This Book	2
Cross-References to Other Books	2
Migrating from Older VM Products	2
Considerations for Future Automated Migration	3
 Chapter 2. System Changes	5
Product Packaging	5
[V4.1] CMS Utilities Feature Integrated into CMS	5
[V4.1] TCP/IP Included in the z/VM Base	6
[V4.1] Directory Maintenance Facility Feature	6
[V4.1] REXX/EXEC Migration Tool for VM/ESA Deleted	6
[V4.1] Distributed Computing Environment Feature Deleted	6
[V4.1] LANRES/VM Feature Deleted	6
[V4.1] VM BookManager Library Feature Deleted	6
[V4.3] Resource Access Control Facility Feature	7
[V4.4] Hardware Configuration Definition and Hardware Configuration Manager for z/VM	7
[V4.4] Language Environment Integrated as a Component	7
[V4.4] Performance Toolkit Feature	8
[V5.1] Packaging Modifications	8
[V5.2] Packaging Modifications	9
Installation, Migration, and Service	9
[V2.2] Electronic Delivery of Service	10
[V2.2] Local Modification of Replacement-Maintained Parts	10
[V2.3] S/390 Service Update Facility	10
[V2.3] VMSES/E Enhancements	10
[V2.4] Tool for Removing PTFs	11
[V3.1] \$PPF Override File Name	12
[V4.1] Installation Changes	12
[V4.1] VMSES/E Enhancements	12
[V4.3] Installation Changes	12
[V4.3] TCP/IP Configuration Wizard	13
[V4.3] Service Enhancements	13
[V4.4] Integrated 3270 Console	13
[V4.4] Installation Enhancements	14
[V4.4] Service Enhancements	14
[V4.4] Product Parameter File Changes	15
[V5.1] Installation of z/VM from DVD	15
[V5.1] CP Is Now 64-Bit Only	15
[V5.1] Installation and Service Enhancements	16
[V5.1] Relocation of the BFS /etc Directory	16
[V5.2] Migration and Service Enhancements	16

[V5.2] Changes to Supplied SYSTEM CONFIG Definitions	17
[V5.2] Changes to Predefined CP Directory Entries	17
[V5.2] Product Parameter File Names	18
[V5.2 (VM63952)] Support for IPv6 HiperSockets in TCP/IP Configuration	18
Support and Exploitation of Hardware and Architectures	18
[V2.2] S/390 Open Systems Adapter Support Facility	19
[V2.2] Multi-Path Lock Facility	19
[V2.3] Guest Coupling Simulation	19
[V2.4] Integrated Cluster Bus Channels	20
[V2.4] Fibre Connection Channels	20
[V2.4] QDIO Facility and OSA-Express Gigabit Ethernet	20
[V2.4] Cryptographic Support	21
[V2.4] IEEE Floating Point	21
[V2.4] Extended-TOD-Clock	21
[V3.1] Enterprise Storage Server FlashCopy	21
[V3.1] ESS Parallel Access Volumes	22
[V3.1] Tape Support Enhancements	22
[V3.1] z/Architecture Support	22
[V4.1] Integrated Facility for Linux	22
[V4.2] Cryptographic Support	23
[V4.2] ESS Large Volumes	23
[V4.2] FICON CTCA	23
[V4.2] HiperSockets	23
[V4.2] OSA-Express Token Ring	24
[V4.2] z/Architecture Guest Coupling Facility	24
[V4.3] Fibre Channel Protocol Guest Support	25
[V4.3] Performance Monitor Enhancement	26
[V4.4] Cascaded FICON Directors	26
[V4.4] Enhanced QDIO Performance	26
[V4.4] ESS FlashCopy Version 2	27
[V4.4] ESS Peer-to-Peer Remote Copy Enhancements	27
[V4.4] Extended Channel Measurement Data Support	27
[V4.4] Guest Coupling Enhancement	28
[V4.4] Logical Channel Subsystems	28
[V4.4] Support for 30 LPARs	28
[V4.4] IBM 3590 Model H	29
[V5.1] z/VM Operates Only on z/Architecture Servers	29
[V5.1] ASN-and-LX-Reuse Facility Support	29
[V5.1] Enhanced LCSS Support	29
[V5.1] IBM ESS Model 750	30
[V5.1] ESS PPRC over FCP Connections	30
[V5.1] I/O Devices Not Supported	30
[V5.1] Improvements to Capacity Upgrade on Demand	31
[V5.1] OSA-Express Integrated Console Controller	31
[V5.1] PCIX Cryptographic Coprocessor	31
[V5.1] Transparent Sharing of Additional Channel Resources Across LCSSs	32
[V5.1] Up to 24 Processor Engines in a Single z/VM Image	32
[V5.1] IBM 3592	32
[V5.1] Crypto Express2	32
[V5.1] OSA-Express2	33
[V5.1] IBM TotalStorage DS8000 Series	33
[V5.1] FICON Express2	33
[V5.1] IBM TotalStorage DS6000 Series	33
[V5.2] IBM System z9 Enterprise Class and System z9 Business Class	34
[V5.2] Device Support Withdrawn	35
[V5.2] Enhanced Performance Assists for z/VM Guests	35

	[V5.2] Open Systems Adapter for the Network Control Program	36
	[V5.2] SCSI Disk I/O Performance Improvements	36
I	[V5.2] FICON Express4	37
I	[V5.2 (VM63856)] Improved Memory Management for Linux Guests	37
I	[V5.2 (VM63952)] Exploitation of Selected System z9 Instructions	38
I	[V5.2 (VM63952)] Enhanced NPIV Support	38
I	[V5.2 (VM63952)] GARP VLAN Registration Protocol Support	38
I	[V5.2 (VM63952)] IPv6 HiperSockets Support	39
I	[V5.2 (VM63952)] Enhanced IBM DS6000, DS8000, and ESS Support	39
I	[V5.2 (VM63952)] Enhanced IBM Parallel Access Volume Support	39
	Connectivity and Networking	39
	[V2.3] MQSeries Client for VM/ESA	39
	[V4.2] Guest LAN	40
	[V4.2] TCP/IP Stack Vulnerability Reduction	40
	[V4.3] Guest LAN Enhancements	41
	[V4.3] TCP/IP Device and Stack Performance Improvements	41
	[V4.3] TCP/IP Dynamic Stack Configuration	42
	[V4.3] TCP/IP Stack Vulnerability Reduction	42
	[V4.4] Guest LAN Support for IPv6	43
	[V4.4] IEEE VLAN Support	43
	[V4.4] TCP/IP Broadcast Support for HiperSockets	43
	[V4.4] TCP/IP IMAP User Authentication Exit	43
	[V4.4] TCP/IP SSL Server Upgrade	44
	[V4.4] TCP/IP Stack Performance Improvements	44
	[V4.4] TCP/IP Stack Security Improvements	44
	[V4.4] Virtual FICON CTCAs	45
	[V4.4] Virtual Switch	45
	[V5.1] Enhanced IPv6 Support	46
	[V5.1] Enhanced Virtual Switch Support — Failover	46
	[V5.1] Enhanced Virtual Switch Support — VLAN	47
	[V5.1] Virtual Switch Exploitation of Layer 2 Support	47
	[V5.1] Additional Device Connections for TCP/IP for z/VM	48
	[V5.2] Enhanced Dynamic Routing Capabilities with a New MPRoute Server	48
	[V5.2] Improved Problem Determination for Guest LANs and Virtual Switches	48
	[V5.2] Predefined VSWITCH Controllers	49
	[V5.2] SSL Server Upgrade	49
I	[V5.2 (VM63952)] IPv6 HiperSockets Support	50
I	[V5.2] Removal of OSA-Express Port Sharing Restriction on System z9	50
	System Administration and Operation	50
	[V2.2] Year 2000 Support	50
	[V2.2] CMS Productivity Aids Performance Enhancement	51
	[V2.2] HELPINST Saved Segment Replaced by HELPSEG and INSTSEG	52
	[V2.2] Removable Media Services Free Drive Support	52
	[V2.2] SFS AUDIT Enhancement	52
	[V2.3] Additional Year 2000 Support	52
	[V2.3] ISO Date Used in Default CMS IPL Heading	53
	[V2.3] Logical Device Limit Relief	53
	[V2.3] Allocation of Real Storage for Segment Tables	53
	[V2.3] TCP/IP Awareness	53
	[V2.3] IPLing with the NODIRECT Option	54
	[V2.3] Product Enablement Support	55
	[V2.4] Dynamic CP Exits	55
	[V2.4] Euro Support	55
	[V3.1] CP Nucleus	56
	[V3.1] CP Exit Modifications	56
	[V3.1] High Level Assembler V1.4	56

[V3.1] RIO370	56
[V3.1] 64-Bit Support.	56
[V3.1] Graphical User Interface Facility Changes	57
[V3.1] VMLINK Improvements	57
[V4.1] Vector Facility Support.	58
[V4.1] 370-Mode Virtual Machines Not Supported	58
[V4.1] Fast CCW Translation	58
[V4.1] Enhanced Page Fault Handling for Guests	58
[V4.1] System Default Language Set Dynamically	58
[V4.2] SET OBSERVER Support	58
[V4.2] DDR Compression	58
[V4.3] Automated Shutdown Support	59
[V4.3] Enhanced Timer Management	59
[V4.3] Improved Utilization of Large Real Storage	59
[V4.3] Shared Tape Support	59
[V4.3] Virtual Machine Accounting Improvements	60
[V4.3] Virtual Machine Resource Manager	61
[V4.4] Automated SFS Shutdown	61
[V4.4] CP Command Response Suppression	61
[V4.4] Guest IPL from SCSI Disks	62
[V4.4] Hardware Configuration Definition and Hardware Configuration Manager for z/VM	62
[V4.4] HELP Facility Enhancements	63
[V4.4] Linux Guest Capacity Improvements	64
[V4.4] Performance Toolkit for VM	65
[V4.4] VMRM Enhancements.	65
[V5.1] 370 Functions Removed	66
[V5.1] Authorization Enhanced for Guest LANs and Virtual Switches	66
[V5.1] Contiguous Frame Management	66
[V5.1] CP Functions Removed	66
[V5.1] Deploying Linux on zSeries with z/VM	68
[V5.1] HyperSwap Support	68
[V5.1] Performance Toolkit Enhancements	69
[V5.1] SCSI FCP Disk Support	69
[V5.1] SPTAPE Command Removed	70
[V5.1] System Administration Facility To Be Withdrawn	70
[V5.1] FCP LUN Access Control by z/VM with Linux for zSeries Guests	70
[V5.1] Large Disk Support on DS8000 and DS6000	71
[V5.1] Additional Performance Toolkit Enhancements	71
[V5.2] 64-bit Exploitation	71
[V5.2] CP Storage Addressing and Module Linkage Changes	73
[V5.2] DirMaint Enhancements	74
[V5.2] Large Disk Support on IBM DASD Subsystems	75
[V5.2] Performance Toolkit Enhancements	75
[V5.2] System Administration Facility Removed	75
[V5.2] Vector Facility Support Removed	75
[V5.2 (VM63952)] DirMaint Enhancements.	76
[V5.2 (VM63952)] Performance Toolkit Enhancements	76
Application Development and Deployment	76
[V2.2] REXX Sockets	76
[V2.2] Querying the CMS Level	77
[V2.2] Pseudo Timer Extended	77
[V2.2] Calling CSL Routines That Have Dates as Output	77
[V2.2] OS Simulation Support for Tape Library Dataserver	78
[V2.2] GCS Pathlength Reduced	78
[V2.2] Full MP Capability for VMCF	78

[V2.3] Language Environment	78
[V2.3] Dynamic Link Libraries	78
[V2.3] Non-Relocatable Modules Loaded between 16-20 MB	79
[V2.3] CMS Migration Utility Feature No Longer Available	79
[V2.3] Pipelines Code Bases Merged.	79
[V2.3] POSIX Support Enhancements	80
[V2.4] OS Simulation Enhancements	82
[V2.4] POSIX Support Enhancements	82
[V3.1] POSIX Support Now Called OpenExtensions	82
[V3.1] Open Files Limit Increased	83
[V3.1] BFS Root Not Case Sensitive	83
[V3.1] Binder/Loader Support	83
[V3.1] CMS OS Simulation Enhancement	83
[V3.1] Tape FICON and RAS Support	83
[V4.2] C Socket Application Programming Interface	83
[V4.3] Increased 64-bit Addressing Support for DIAGNOSE Codes	84
[V4.4] C/C++ Compiler Support	84
[V4.4] Language Environment Upgrade	84
[V4.4] Systems Management APIs.	85
[V5.1] Java and NetRexx Support Removed	85
[V5.1] Enhanced Systems Management APIs.	85
[V5.1] Dynamic Virtual Machine Timeout	86
[V5.1] Relocation of REXX Work Area for Applications	87
[V5.1] Server-Requester Programming Interface To Be Withdrawn	87
[V5.2] 64-Bit DIAGNOSE Code X'250' Support	87
[V5.2] CMS Binder Upgraded	87
[V5.2] Enhanced Systems Management APIs.	87
[V5.2] LT MACRO Renamed	88
[V5.2] SRPI Support Discontinued	89
System Diagnosis	89
[V2.2] FST and ADT Macro Changes to Support 4-digit Years.	89
[V2.3] Viewing and Printing CP and CMS Control Blocks	90
[V3.1] Dump Viewing Facility No Longer Supports CP Dumps	90
[V3.1] VM Dump Tool	90
[V4.3] VM Dump Tool Enhancement	91
[V4.4] VM Dump Tool Enhancements.	91
[V5.1] VM Dump Tool Enhancements.	91
[V5.2] 64-Bit Dump Support	92
[V5.2] High Level Assembler No Longer Required for Stand-Alone Dump Utility.	93
[V5.2] VM Dump Tool Enhancements.	93
Product Documentation	94
[V4.1] System Messages and Codes Book Divided	94
[V4.1] Relocated Information	94
[V4.1] Deleted Books	94
[V4.2] Monitor Records Provided on the Web.	95
[V4.2] Relocated Information	95
[V4.3] Planning Book Divided	95
[V4.3] Relocated Information	95
[V4.4] Retitled Books.	96
[V4.4] Relocated Information	96
[V4.4] Deleted Books	96
[V5.1] Retitled Books.	97
[V5.1] Relocated Information	97
[V5.1] Deleted Books	97
[V5.2] Retitled Books.	98

[V5.2] Deleted Books	98
Chapter 3. Changes to External Interfaces	101
CP Changes	101
System Configuration Statements	101
User Directory Control Statements	103
CP Commands	105
CP Utilities	132
Dynamic I/O Return Codes	134
DIAGNOSE Codes	135
CP Macros	138
CP System Services	140
CPXLOAD Directives	141
VM Dump Tool	141
CP Messages	144
CMS Changes	145
General CMS Commands	145
CMS Utilities	151
CMS File Pool Administration and Operator Commands	152
OPENVM Commands	152
XEDIT Subcommands	153
CMS Pipelines	153
CMS Routines.	154
CMS Macros	161
HELP Facility	164
CMS Messages	172
AVS Changes	172
Dump Viewing Facility Changes	172
GCS Changes	173
REXX/VM Changes.	173
TSAF Changes	173
VMSES/E Changes.	174
\$PPF File Names	174
VMSES/E Commands	174
Changed BLDDATA file	176
VMSES/E Messages	176
Chapter 4. Migration Tasks	177
Converting from HCPRIO, HCPSYS, and HCPBOX to Configuration Files	177
Configuration Statements that Replace HCPSYS Macroinstructions	178
Configuration Statements that Replace HCPRIO Macroinstructions	180
Using the HCPTRIO and HCPTSYS Utilities	180
Using the HCPDCON Utility.	181
Using the HCPRDEV Utility	182
Difference with Multiple Systems Using Shared Data	182
Creating a Logo Configuration File	182
Migrating Spool Files and Saved Segments	182
Using the Same Warm Start and Checkpoint Areas to Migrate All Spool Files at Once	183
Using SPXTAPE to Migrate Your Spool Files	184
Building Saved Segments Individually	185
Avoiding the Loss of Spool Files and System Data Files During Migration	187
Sharing Data between Your Old System and Your New System	187
Reserve/Release Considerations for VSE.	188
What to Do if Reserve/Release Cannot Be Used	188
Sharing Data among Multilevel Virtual Machines	189

Sharing Data among Virtual Machines and Other Systems	191
Sharing Data among CMS Users on Multiple Systems	193
Preparing for Cross-System Link	193
Preparing for Cross-System Spool	193
Migrating Your User Directory	194
Object Directory Compatibility	194
Getting Around Directory Differences	194
User Directory Control Statement Changes	194
Default Volume Label Changes	194
Preparing to Migrate Your User Directory	194
Using Two Source Directories	195
Considerations for Using a Directory Maintenance Program	195
Steps for Migrating Your Source User Directory	196
If You Cannot IPL Because of a Problem with the User Directory	196
Migrating Your SFS File Pool Servers	197
Using Two System Images	197
Using the 'Cut and Go' Strategy	199
Directory Entry Considerations and Changes	200
Converting an SFS File Pool Server Back to Your Old Release.	201
Establishing Connectivity between Your New and Old Systems.	202
Procedures	203
How to Back Out of the Migration	204
Backing Out Because of System Problems	204
Backing Out Individual Users Because of Problems with Application Programs	205
Installing a Backlevel CMS	205
Before You Install a Backlevel CMS.	205
Steps for Installing a Backlevel CMS	207
Defining Various Levels of CMS	211
Swapping Between the Backlevel CMS and z/VM V5.2 CMS	212
Appendix A. CMS Pipelines Message Cross-Reference [V2.3]	215
DMS to FPL Message Cross-Reference	215
FPL to DMS Message Cross-Reference	217
Appendix B. Sample Utilities for Converting to Configuration Files	221
HCPDCON	222
HCPRDEVS	224
HCPTRIO	226
HCPTSYS	228
Notices	231
Trademarks.	233
Glossary	235
Bibliography	237
Where to Get z/VM Books	237
z/VM Base Library	237
Overview	237
Installation, Migration, and Service	237
Planning and Administration.	237
Customization and Tuning	237
Operation	237
Application Programming.	237
End Use	238

System Diagnosis	238
Books for z/VM Optional Features	238
Data Facility Storage Management Subsystem for VM	238
Directory Maintenance Facility	239
Performance Toolkit for VM	239
Resource Access Control Facility	239
Index	241

About This Book

This book provides information to help you migrate to IBM® z/VM® V5.2 from any of the following:

- z/VM V5.1
- z/VM, version 4
- z/VM, version 3
- VM/ESA®, version 2

If your current system is older than VM/ESA, version 2, see “Migrating from Older VM Products” on page 2.

This book provides three types of information:

- It describes changes to the z/VM system that you should be aware of before migrating.
- It identifies specific external interfaces that have changed and provides an assessment of the upward compatibility for each change.
- It provides guidance and procedures for migration tasks that you might need to perform.

Who Should Read This Book

This book is intended for system programmers, system analysts, and system support personnel who are responsible for planning and completing a system migration. Parts of this book could also be helpful to application programmers who will be migrating applications to the new system.

What You Should Know before Reading This Book

This book assumes that you are familiar with VM. However, depending on what VM product you are migrating from, z/VM V5.2 might be quite different from your current system. Also, the hardware and software requirements for installing and running z/VM might have changed since your VM release. For a general description of z/VM V5.2, including information about the current hardware and software requirements, see *z/VM: General Information*.

Where to Find More Information

For more information about z/VM functions, see the books listed in the “Bibliography” on page 237.

Links to Other Online Books

If you are viewing the Adobe Portable Document Format (PDF) version of this book, it may contain links to other books. A link to another book is based on the name of the requested PDF file. The name of the PDF file for an IBM book is unique and identifies both the book and the edition. The book links provided in this book are for the editions (PDF names) that were current when the PDF file for this book was generated. However, newer editions of some books (with different PDF names) may exist. A link from this book to another book works only when a PDF file with the requested name resides in the same directory as this book.

How to Send Your Comments to IBM

IBM welcomes your comments. You can use any of the following methods:

- Complete and mail the Readers' Comments form (if one is provided at the back of this book) or send your comments to the following address:

IBM Corporation
Department 58HA, Mail Station P384
2455 South Road
Poughkeepsie, New York 12601-5400
U.S.A.

- Send your comments by FAX:
 - United States and Canada: 1-845-432-9405
 - Other Countries: +1 845 432 9405
- Send your comments by electronic mail to one of the following addresses:
 - Internet: mhvrcfs@us.ibm.com
 - IBMLink™ (US customers only): IBMUSM10(MHVRCFS)

Be sure to include the following in your comment or note:

- Title and complete publication number of the book
- Page number, section title, or topic you are commenting on

If you would like a reply, be sure to also include your name, postal or email address, telephone number, or FAX number.

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

Summary of Changes

This book contains terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

GC24-6103-03, z/VM Version 5 Release 2 (Updated Edition)

This edition includes information about programming enhancements, additional support, or other changes announced or provided after the general availability of z/VM V5.2. Programming enhancements may be provided through the z/VM service stream by program temporary fixes (PTFs) for authorized program analysis reports (APARs), which may also be available for some prior z/VM releases. For more information, see Chapter 2, “System Changes,” on page 5 and Chapter 3, “Changes to External Interfaces,” on page 101.

Chapter 1. Introduction to Migration

Migration is the transfer and adjustment of information required to upgrade from one product release to a later release. Rather than starting from scratch when you upgrade from your current system, you probably want to transfer and adjust a lot of your current information to use on the new system. Information you may want to transfer includes:

- I/O configurations
- Saved segment definitions
- Spool files
- User directory entries
- SFS file pool servers
- Application programs

Note: This book assumes that you have already determined your hardware requirements for the new system, including your DASD, real storage, and performance needs.

But before you begin to transfer any information, you should determine if there are differences between your current VM release and the new z/VM release that may affect the migration. This book is intended to help you make that determination.

How Migration Information Is Presented in This Book

This book provides an overview of the changes to VM since **VM/ESA V2.1**. This information is presented two ways:

- Chapter 2, “System Changes,” provides a brief discussion of significant changes and enhancements to system functions. The chapter is organized according to the general subject areas where changes have occurred, such as product packaging, installation and service, hardware and architecture support, application development, and so on.
- Chapter 3, “Changes to External Interfaces,” identifies changes to specific external interfaces in the VM components (except Language Environment®). External interfaces are commands, routines, macros, DIAGNOSE codes, directory control statements, and so on. Each change is identified as either upwardly compatible or incompatible. (For definitions of these terms, see “Compatibility Terms Used in This Book” on page 2.) The chapter is organized by component, and within each component by interface type.

For each change listed in those two chapters, the version and release in which the change occurred is indicated numerically in brackets in an abbreviated form (for example, changes for z/VM V5.2 are indicated like this, **[V5.2]**), so you can select the items that affect you.

Notes:

1. Within each topic, changes are listed from oldest release to newest release. For complete information on a topic, start with the next listed release after your current release and read to the end of that topic.
2. A listed change could be superseded by another change in a later VM release.
3. The indicated release for a change is the first release in which the change was included in the VM product, or is the latest release that was current when the change became available through a program temporary fix (PTF) for an

authorized program analysis report (APAR). The APAR number may be indicated with the release identifier, like this, **[V5.2 (VMnnnnn)]**. If the change is delivered for an APAR, it is included in the next VM release, and it may also have been available to earlier VM releases.

Chapter 4, “Migration Tasks,” provides guidance for some migration tasks you might have to do, such as converting from using system definition macros (HCPRIO, HCPSYS, and HCPBOX) to using system configuration files, or migrating your user directory and your spool files.

Compatibility Terms Used in This Book

In Chapter 3, “Changes to External Interfaces,” certain terms are used to convey the degree of compatibility for each change. The compatibility terms are:

Upwardly compatible

The syntax, functions, or responses of the external interface have been changed, but not significantly. Invocations and applications using the external interface on the new system in the same manner as on the current system should continue to execute unchanged.

Note: New function, if not exploited, is also upwardly compatible.

Incompatible

The syntax, functions, or responses of the external interface have been changed significantly. Some invocations and applications using the external interface on the new system in the same manner as on the current system may execute incorrectly or may not execute at all.

Note: Depending on how you use the interface, a change identified as incompatible may actually be upwardly compatible for you.

Cross-References to Other Books

Many of the descriptions of system changes in this book contain cross-references to other books for more information about those functions. Over the course of product releases, the titles of some VM books have changed. In most cases, the cross-reference points to the *current* version (title) of the appropriate book.

Migrating from Older VM Products

If you are migrating from VM/ESA V1.1.5 370 Feature, VM/ESA V1.2.0, VM/ESA V1.2.1, or VM/ESA V1.2.2, you need to obtain the following book (not included in the z/VM V5.2 library):

- *VM/ESA V2.4: Conversion Guide and Notebook*, GC24-5839

Use that book to determine the differences between your current VM product and VM/ESA V2.4. Then use this book to determine the additional differences between VM/ESA V2.4 and z/VM V5.2.

If you are migrating from a VM product older than those listed above, you need to obtain one of the following books (not included in the z/VM library):

- *VM/ESA V2.1: Conversion Guide and Notebook for VM/SP, VM/SP HPO, and VM/ESA (370 Feature)*, SC24-5754
- *VM/ESA V2.1: Conversion Guide and Notebook for VM/XA SP and VM/ESA*, SC24-5753

Use the appropriate book to determine the differences between your current VM product and VM/ESA V2.1. Then use this book to determine the additional differences between VM/ESA V2.1 and z/VM V5.2.

Considerations for Future Automated Migration

To take advantage of any future automated migration aids supplied by IBM, you must adhere to the following:

- If you need to alter, modify, or customize any IBM supplied parts, always use the VMSES/E local modification procedures unless it is specifically documented to do otherwise. The LOCALMOD tool is supplied with VMSES/E to simplify the creation of local modifications.
- If you want to use an IBM supplied shared file system (SFS) for your data, use VMSYSU. Do not use VMSYS or VMSYSR.
- Each customizable file must reside on the disk specified for that part in the product documentation.
- Additional minidisks should not be defined on the xxxRES, xxxW01, and xxxW02 DASD volumes for the new release.

Chapter 2. System Changes

This chapter describes significant changes to VM since VM/ESA V2.1. These changes could affect your migration to the new z/VM system. For information about changes to specific external interfaces (such as commands), see Chapter 3, “Changes to External Interfaces,” on page 101.

This chapter contains the following major sections:

- “Product Packaging”
- “Installation, Migration, and Service” on page 9
- “Support and Exploitation of Hardware and Architectures” on page 18
- “Connectivity and Networking” on page 39
- “System Administration and Operation” on page 50
- “Application Development and Deployment” on page 76
- “System Diagnosis” on page 89
- “Product Documentation” on page 94

Product Packaging

This section describes changes in what facilities are included in the VM base product or offered as optional features.

[V4.1] CMS Utilities Feature Integrated into CMS

Most of the functions formerly provided in the optional CMS Utilities Feature have been integrated into CMS.

The following functions are located on the 190 disk:

- BROWSE
- CLRSCRN
- DEPRINT
- DEVTYPE
- DIRMAP
- FILESTCK
- FINDSTAK
- FLIST
- GETFMADR
- OPTIMISE
- REPRINT
- SADT
- SETKEYX
- SHRLDR
- STAG
- USERID
- VMSIZE
- WAKEUP
- XRDR
- YDISK

The following functions, which may require privilege classes not given to general users, are located on the 193 disk:

- ACCOUNT
- AUDITOR

Packaging

- DCSSBKUP
- DCSSRSAV
- QSYSOWN
- SFPURGER
- SYSWATCH

All of these functions (except OPTIMISE and SETKEYX) are documented in the *z/VM: CMS Commands and Utilities Reference*. The documentation for these functions has been substantially updated and improved.

All messages issued by these functions are contained in the CMS message repository, and documentation for the messages has been added to *z/VM: CMS and REXX/VM Messages and Codes*.

OPTIMISE and SETKEY have been included in CMS only for compatibility and are documented only in HELP.

The following functions have not been integrated into CMS:

- CPFMT
- SYSIDT

[V4.1] TCP/IP Included in the z/VM Base

TCP/IP, previously offered as an optional feature of VM, is now supplied with the z/VM base. The TCP/IP Network File System (NFS) Feature has been integrated into the TCP/IP base. TCP/IP source, previously offered as a feature, is also supplied with the z/VM base.

[V4.1] Directory Maintenance Facility Feature

Directory Maintenance Facility (DirMaint™), based on the Directory Maintenance VM/ESA licensed program, is offered as an optional feature of z/VM. For information about DirMaint restrictions, system integrity, and security, and requirements for using DirMaint in a CSE complex, see the *z/VM: General Information* book.

[V4.1] REXX/EXEC Migration Tool for VM/ESA Deleted

The REXX/EXEC Migration Tool for VM/ESA (ESAMIGR) is no longer supplied with z/VM.

[V4.1] Distributed Computing Environment Feature Deleted

The Distributed Computing Environment (DCE) Feature is not supported on z/VM V4.1 and can no longer be ordered.

[V4.1] LANRES/VM Feature Deleted

LANRES/VM is no longer offered as a feature of z/VM.

[V4.1] VM BookManager Library Feature Deleted

The VM BookManager® Library Feature, which provided BookManager versions of VM publications on the product delivery medium, is no longer offered with z/VM. BookManager versions of VM publications are still included on the *Online Library Omnibus Edition: VM Collection* CD-ROM. The CD-ROM includes the Softcopy Receiver Tool for transferring BookManager files to the workstation or host.

[V4.3] Resource Access Control Facility Feature

Resource Access Control Facility (RACF®) is offered as an optional feature of z/VM. RACF works with existing z/VM system functions to provide improved data security for an installation.

The RACF feature is functionally equivalent to the RACF for VM V1R10.0 licensed program (5740-XXH). However, only the RACF feature is licensed to run on z/VM in an Integrated Facility for Linux (IFL) LPAR.

[V4.4] Hardware Configuration Definition and Hardware Configuration Manager for z/VM

Hardware Configuration Definition and Hardware Configuration Manager for z/VM is a new facility included in the z/VM base and pre-installed. For more information about this facility, see “[V4.4] Hardware Configuration Definition and Hardware Configuration Manager for z/VM” on page 62.

[V4.4] Language Environment Integrated as a Component

Language Environment is now a component of z/VM. The C/C++, COBOL, and PL/I run-time libraries included in the Language Environment component have been upgraded to the level shipped with version 1, release 4.0 of z/OS®.

The Language Environment component is installed and serviced under the MAINT user ID and uses a set of disks that belong to MAINT. Language Environment is included in the ZVM \$PPF file. In addition, files with file types of LOCALE, LOCALEX, CHARMAP, GENXLT, UCMAP, UCONVTBL and a few EDC\$ ASSEMBLE files now will reside on the Language Environment 49B disk.

Attention: Do not migrate Language Environment 1.8 or earlier to z/VM V4.4. The only level of Language Environment supported on z/VM V4.4 is the new Language Environment component. The files for the z/VM Language Environment component are installed on the MAINT 19E disk. Depending on how you plan to migrate other files from your old 19E disk to the new system, you may need to remove the old Language Environment files. See “Removing the Old Level of Language Environment.”

Removing the Old Level of Language Environment

The files for the z/VM Language Environment component are installed on the MAINT 19E disk. If you are migrating files from your old 19E to the new 19E, do not copy any Language Environment files. If you intend to use your old 19E disk with the new z/VM V4.4 system, and want to copy the Language Environment component from the new 19E to the old 19E, you must first remove all Language Environment files from your old 19E.

To remove the Language Environment files from your old 19E disk:

1. Log on as MAINT.
2. Access the 19E disk in R/W mode:
`access 19e y`
3. Use the VMSES/E VMFERASE command to erase the Language Environment files from Y. Enter:
`vmferase prod prodid%compname from y`

where *prodid* and *compname* identify the level of Language Environment on your system. See Table 1 on page 8.

Table 1. Language Environment level identifiers

Language Environment level	prodid	compname
1.5 (C run-time only), included with VM/ESA V2.1	5688198E	POSIX
1.5 (complete), available for VM/ESA V2.1	5688198E	LE370
1.6 (C run-time only), included with VM/ESA V2.2	5688198F	POSIX
1.6 (complete), available for VM/ESA V2.2	5688198F	LE370
1.8, available for VM/ESA V2.3 and later	5688198H	LE370

4. If the VMFERASE command returns the following message,
VMFERA2738I No files to erase from Y for product *prodid%compname*

then the files are not listed in the VMSES PARTCAT file and cannot be erased with the VMFERASE command. You must use the CMS ERASE command to manually erase all files on Y whose file names begin with the characters EDC, CEE, IBM, IGZ, or SCEE.
5. After the Y-disk is cleaned up, you must remove the Language Environment shared segments. Enter the following commands:

```
cp purge nss name scee  
cp purge nss name sceex
```
6. Because the file status table for the Y-disk is included in the CMS saved system, and you have changed the contents of the Y-disk, you must resave CMS. Use the SAMPNSS command to create a new skeleton system data file, then IPL and save the rebuilt CMS saved system:

```
sampnss cms  
ipl 190 clear parm savesys cms
```
7. Now that you have removed the old Language Environment files and segments from your system, you must decide what to do with the user ID to which the Language Environment files were initially loaded (P688198E, P688198F, or P688198H, depending on the level of Language Environment) You can either delete this user ID from the CP directory and reuse all the disk space assigned to it, or you can leave the user ID on your system as a means of returning to the old Language Environment level if an application requires it.

[V4.4] Performance Toolkit Feature

The Performance Toolkit for VM™ is offered as an optional feature of z/VM. It is supplied pre-installed but disabled, and is serviced through VMSES/E. The Performance Toolkit is intended as a replacement for the RealTime Monitor (RTM) and Performance Reporting Facility (PRF) optional features, and provides enhanced functions. For more information, see “[V4.4] Performance Toolkit for VM” on page 65.

[V5.1] Packaging Modifications

The packaging of the z/VM product and the z/VM System Delivery Offering (SDO) have been modified as follows:

- The 3270 PC File Transfer product (5664-281), which previously could be ordered with the z/VM V4 SDO, is now available as part of the z/VM V5.1 product. It is shipped as a sample program on the system disk, with no support available.

- The restricted source feature, available as a no-charge feature that could be ordered with z/VM V4, and the PL/X source, provided with the installation media in z/VM V4, are not shipped with z/VM V5.1 and cannot be ordered with z/VM V5.1. Both are available as no-charge downloads from IBM Resource Link™ at www.ibm.com/servers/resourcelink/.

Note: If you are not registered with Resource Link, you will be required to register for a user ID and password. You must also be licensed for z/VM V5.1, and entitlement will be verified when you request the source code. After approval, you will receive instructions describing how to download the code.

- DFSMS/VM, previously provided automatically with z/VM V4, is no longer shipped automatically. It can be ordered as a no-charge feature with the z/VM V5 SDO.
- The national language features for Interactive System Productivity Facility (ISPF), program number 5684-043, have been removed from the z/VM SDO. These features can still be ordered using the standalone ordering process.
- Tivoli® Storage Manager (TSM) for VM, Version 4 (5697-TS9) Release 4.2, which was packaged on the z/VM V4 system DDRs, is not provided with z/VM V5.1 and cannot be ordered with the z/VM V5 SDO. To protect data on z/VM, IBM recommends TSM for z/OS and z/VM, V5.2 (5698-A13), or TSM Extended Edition for z/OS and z/VM, V5.2 (5698-A11). If you want to run TSM in a Linux® guest environment on z/VM V5.1, IBM recommends TSM, V5.2 (5608-ISM), or TSM Extended Edition, V5.2 (5608-ISX).
- The Java™ and NetRexx™ programs on z/VM, previously available as downloads from the z/VM Web site, are not supported with z/VM V5.1. Refer to www.ibm.com/eserver/zseries/zvm/java/ for additional information. Java and NetRexx functionality can be obtained from Linux running on z/VM.
- The RealTime Monitor (RTM) and Performance Reporting Facility (PRF) features cannot be ordered with z/VM V5.1, nor can they be licensed with z/VM V5.1.
- The IBM Debug Tool for z/VM, V4.1 (5654-A23), is available as a chargeable feature of the z/VM V5 SDO.

[V5.2] Packaging Modifications

The packaging of the z/VM product and the z/VM System Delivery Offering (SDO) have been modified as follows:

- z/VM V5.2 will not be available on CD-ROM. z/VM continues to be distributed on 3480/3490 and 3590 tape and on DVD.
- The Tivoli Storage Manager for VM product was removed from the z/VM V5.1 system image and has not been orderable with the z/VM SDO since September 24, 2004. With the announcement of the Tivoli Storage Manager V5.3 family of products in the Tivoli Storage Manager announcement dated December 14, 2004, support for z/VM was not migrated to Tivoli Storage Manager V5.3 nor is it supported.

When running in a Linux guest environment, IBM recommends Tivoli Storage Manager, V5.3 (5608-ISM), or Tivoli Storage Manager Extended Edition, V5.3 (5608-ISX), for key data protection activities of backup, archive, recovery, space management, and disaster planning.

Installation, Migration, and Service

This section describes changes to the VM installation, migration, and service processes and tools.

Note: For information about changes to the VM installation, migration, and service procedures, see the *z/VM: Guide for Automated Installation and Service*.

[V2.2] Electronic Delivery of Service

The ITNVTSTR EXEC supports the delivery of IBM service electronically by satellite. This electronic delivery is provided by the IBM Advanced Digital Delivery System product (5799-XDG).

For more information, see:

- *z/VM: VMSES/E Introduction and Reference*
- *Advanced Digital Delivery User's Guide*, SC23-3281

[V2.2] Local Modification of Replacement-Maintained Parts

The VMFREPL EXEC supports the local modification of replacement-maintained parts. VMFREPL can be used to:

- Copy the highest level of a part
- Copy a specified part
- Update a Version Vector Table
- Update a Select Data file
- Display the highest level of a part

For more information, see the *z/VM: VMSES/E Introduction and Reference*.

[V2.3] S/390 Service Update Facility

The S/390[®] Service Update Facility (SUF) is an internet-based S/390 software service tool that makes ordering and receiving OS/390[®], VM, and VSE software service quick and easy. SUF allows systems programmers to order both corrective and preventive service through the internet. VM service, both corrective and preventive, can be delivered through the internet or through standard physical media. Where available, Advanced Digital Delivery (satellite delivery) is also an option.

A common GUI interface is provided by the SUF Customer Application Server. This workstation server can support multiple systems programmers supporting multiple S/390 servers. OS/390, VM, and VSE servers can be attached to a single workstation server simultaneously.

For details regarding prerequisites, entitlement, and how to obtain SUF, refer to the SUF web page at www.ibm.com/eserver/zseries/zos/suf/.

[V2.3] VMSES/E Enhancements

The following execs have been added:

VMFENRPT

Creates a report of the products that are enabled, disabled, and installed on your system.

VMFSUFIN

Installs service from RSU service envelope files, COR service envelope files, or both.

VMFSUFTB

Builds a table, sysid SYSSUF, that contains a list of all installed products and related data needed by the Service Update Facility to service each product.

VMFINS DISABLE

Changes a product to a disabled state.

VMFINS ENABLE

Changes a product to an enabled state.

The following Software Inventory tables have been added:

VM SYSSUF (System-Level Service Update Facility table)

Contains a list of all products that are installed on the system. For each product, it contains the data needed by the Service Update Facility to service the product.

VM SYSREST (System-level Restart table)

Contains records used to restart the VMFSUFIN EXEC, which is part of the Service Update Facility.

The following execs have been changed:

ITNVTSTR

The PROD and KEY operands have been added. The PROD operand identifies the products that were ordered for a RSU package. The KEY operand indicates that the RSU package is one of two packages that are to be installed together.

VMFINS DELETE

The DISABLE operand has been added. The DISABLE operand sets up a product as disabled and deleted.

VMFINS MIGRATE

The DISABLE and ENABLE operands have been added. The DISABLE operand sets up a product as disabled. The ENABLE operand sets up a product as enabled.

VMFINS INSTALL

The DISABLE, ENABLE, NOSETUP, and SETUP operands have been added. The DISABLE operand sets up a product as disabled. The ENABLE operand sets up a product as enabled. The NOSETUP operand indicates that a new minidisk or directory access order is not set up. The SETUP operand indicates that a new minidisk or directory access order is set up. It is set up according to entries in the :MDA section of the product parameter file.

The following Software Inventory table has been changed:

VM SYSAPPS

The :ESTAT tag has been added. The :ESTAT tag specifies the enablement status of a product on the system.

For more information about these changes, see the *z/VM: VMSES/E Introduction and Reference*.

[V2.4] Tool for Removing PTFs

The VMFREM EXEC removes individual PTFs by “un-applying” them from all service levels (apply disks) and optionally “un-receiving” them. To “un-apply” a PTF

means to undo the function previously performed for that PTF by the VMFAPPLY command. To “un-receive” a PTF means to undo the function previously performed for that PTF by the VMFREC command.

VMFREM also removes complete service levels and optionally “un-receives” PTFs that are applied only to the removed levels. In addition, commit support is provided for individual PTFs that have been applied. For more information, see the *z/VM: VMSES/E Introduction and Reference*.

[V3.1] \$PPF Override File Name

The IBM-supplied override product parameter file (PPF), which contains overrides to the base \$PPF files for each component, has changed to ZVM \$PPF. The override PPF for VM/ESA was ESA \$PPF.

[V4.1] Installation Changes

The following changes and enhancements have been made to the installation procedure:

- A new “Express” installation method using predefined defaults is available, making it faster and easier for you to install and service z/VM. There are some restrictions when using the Express installation method:
 - Only IBM supplied PPFs are used.
 - VM source code is not installed.
 - Customer local modifications are not allowed.
 - Products and features are installed onto minidisks only. You cannot move them to SFS.
 - Only the SMALL FILEPOOL is provided (no large VMSYS (SFS) filepool).
 - Only one DASD type and model can be used for your installation.
- The new SERVICE and PUT2PROD commands automate the application of an RSU and CORrective service. The SERVICE command installs an RSU or applies CORrective service for z/VM components, features, or products that are installed on the z/VM system DDR. The PUT2PROD command places components, features, or products that were serviced using the SERVICE command into production.

All customers can use these commands at installation time. However, after installation is complete, they may be used only by Express cutsumers.
- DASD types 9345 and FBA are not supported.

[V4.1] VMSES/E Enhancements

The following commands have been added:

PUT2PROD

Places a component, feature, or product that was serviced by preventive or corrective service into production.

SERVICE

Installs an RSU or applies CORrective service for the z/VM components, features, or products that are installed on the z/VM system DDR.

[V4.3] Installation Changes

The following changes and enhancements have been made to the installation procedure:

- 3590 tape drive is now supported for installation.

- Non-XF 3480 tape drive is no longer supported for installation.
- 4mm DAT tape is no longer supported for installation.
- 3380 DASD is no longer supported for installation.
- Mixed DASD are no longer supported for installation. All 3390 DASD used for installation must be the same model.
- TSAF and AVS are no longer optionally installed; they are now part of the base installation.

[V4.3] TCP/IP Configuration Wizard

A new utility automates the connection of a newly-installed z/VM system to a TCP/IP-based network. The TCP/IP configuration wizard, IPWIZARD, requires no knowledge of z/VM TCP/IP and is similar to the network configuration utilities used in Linux for zSeries distributions during Linux installation. This easy-to-use configuration wizard assists the z/VM installer in providing desired Internet Protocol (IP) configuration information such as host and domain name, IP addresses, and subnet mask. From that information, the wizard generates an initial TCP/IP configuration (creating the SYSTEM DTCPARMS, TCPIP DATA, and PROFILE TCPIP files) and verifies that connectivity to the network has been established. For more information, see the *z/VM: Guide for Automated Installation and Service*.

[V4.3] Service Enhancements

The SERVICE tool can now detect local modifications and present that information to you. This allows you to rework your local modifications before the new service is built into executables. The new VMFUPDAT command provides a panel interface that displays which local modifications need to be reworked and allows updates to the System-Level Service Update Facility table. For more information, see the *z/VM: VMSES/E Introduction and Reference*.

New functions in the VMFUPDAT command allow you to:

- Change the INSTALL, BUILD, INCLUDE, INSPPF, BLDPPF, and P2PPF tags in the System-Level Status table
- Change the local modification rework status in the System-Level Local Modification table

[V4.4] Integrated 3270 Console

z/VM V4.4 supports real and virtual integrated 3270 console devices. Real support enables this device, which is provided through a Hardware Management Console, to be used as a z/VM system operator console. This removes the requirement to have an external 3270 device to install and service z/VM V4.4. The z/VM Stand Alone Program Loader (SAPL) and stand-alone DASD Dump-Restore (DDR) program support the use of the integrated 3270 console as a system operator console. Virtual support enables testing of guest operating systems and utilities that support the integrated 3270 console device.

Note: There may be additional hardware requirements to use this support. See the section on server support in *z/VM: General Information*.

The following CP function has been updated:

- OPERATOR_CONSOLES system configuration statement

For more information, see:

- *z/VM: CP Planning and Administration*

- *z/VM: System Operation*

[V4.4] Installation Enhancements

The following improvements have been made to z/VM installation:

- There are fewer choices during installation, making z/VM easier to install.
- Language Environment is now a component of z/VM and has been upgraded to a new level.

Attention: Do not migrate Language Environment 1.8 or earlier to z/VM V4.4. The only level of Language Environment supported on z/VM V4.4 is the new Language Environment component. The files for the z/VM Language Environment component are installed on the MAINT 19E disk. Depending on how you plan to migrate other files from your old 19E disk to the new system, you may need to remove the old Language Environment files. See “Removing the Old Level of Language Environment” on page 7.

- A direct installation into SFS is now supported. Previously, the installation process installed all products, features, and components onto minidisks, then copied files to SFS.
- Service disks for all z/VM components (CP, CMS, VMSES/E, Dump Viewing Facility, REXX/VM, TSAF, AVS, GCS, and Language Environment) can now be either on minidisks or in SFS. Previously, only service disks for TSAF, AVS, GCS, and Language Environment could be in SFS.

Note: The service disks for the z/VM components must be all on minidisks or all in SFS; you cannot have some components on minidisks and some in SFS.

- There are no longer separate source disks for the base components of z/VM; therefore, source code will be placed on the component's base disk.
- Source code, OSA/SF, and Tivoli® Storage Manager are no longer optionally installed; they are now part of the installation base. (Tivoli Storage Manager is installed disabled.)
- The steps to move a component or product into SFS directories are more automated.
- The new HCD and HCM for z/VM facility is pre-installed.
- The new Performance Toolkit feature is pre-installed (disabled).
- A new level of OSA/SF, 440, is pre-installed.
- A new release of ICKDSF, 1.17.0, is pre-installed.

For more information, see the *z/VM: Guide for Automated Installation and Service*.

[V4.4] Service Enhancements

New service enhancements are as follows:

- Service processes and EXECs now support z/VM base component service disks either on minidisks or in SFS directories.
- TSAF and AVS now share SFS directories.
- Changes to the VMFREM command allow you to remove local modifications.
- New message log support for the SERVICE and PUT2PROD EXECs places all console messages into VMSES/E-formatted \$MSGLOG files. This allows you to use VMFVIEW to view error and warning messages quicker and easier than in a console log.
- New functions in the VMFUPDAT command allow you to:

- Change the manual status in the Service-Level Build Status table
- Delete restart records in the System-Level Restart table or SERVICE \$RESTART (from SERVICE EXEC) file.
- The VMFBDPMD part handler has been updated to allow building modules using **c89** and the CMS binder.

For more information, see the *z/VM: VMSES/E Introduction and Reference* and the *z/VM: Service Guide*.

[V4.4] Product Parameter File Changes

The shipped ZVM \$PPF file now includes the Language Environment component.

The ZVM \$PPF file and all base component product parameter files (\$PPFs) now have an SFS component name for each component.

TSAF and AVS now share SFS directories.

There are no longer separate source disks for the base components of z/VM; therefore, source code will be placed on the component's base disk.

[V5.1] Installation of z/VM from DVD

z/VM V5.1 includes the capability to install z/VM from a DVD to an ESS SCSI disk emulated as an FBA device or to a 3390 DASD. Installing from a DVD can significantly reduce the required installation media and allows you to install to a zSeries® server using only SCSI disks. This capability requires the Hardware Management Console, Version 1.8 or later.

The following CP functions have been added for this support:

- DVDPRIME utility
- INSTDVD utility

The following CP functions have been updated:

- INSTPLAN utility
- INSTVM utility

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *z/VM: Guide for Automated Installation and Service*

[V5.1] CP Is Now 64-Bit Only

z/VM V5.1 includes only a 64-bit CP module. The 32-bit and dual-mode CP modules included with previous releases are no longer provided. VMSES/E commands and files are affected as follows:

- The VMFHLASM and GENCPBLS commands now have NODUAL as the default.
- In the CP product parameter file, 5VMCPR10 \$PPF:
 - The ALTCNTRL tag has been removed from the CNTRLOP section.
 - The HCPESAME, CPLOAD32, CPLOAD64, and HCPBLNUC build lists have been removed from the BLD section.
 - The CPLOAD build list has been added to the BLD section. This build list builds one CP nucleus, which is the 64-bit version.

Note that the parts included in the build for the single 64-bit CP nucleus have the file type TEXT, not TXTESAME. Also, there is now only one CP control file, HCPVM CNTRL.

[V5.1] Installation and Service Enhancements

The automated service process has been updated to include:

- A new MAINT 500 minidisk, which may be used for loading certain service envelopes
- An easier query of RSU levels and individual PTF levels for a component
- Cataloging service memo files online and easily displaying them using the VMFUPDAT command
- An easier way to browse server restart records using VMFUPDAT SYSREST
- A new command, LOCALMOD, to automate the local modifications procedure

To help improve the ease-of-use for installing Linux with your z/VM system, spool and page space has been removed from the System Residence volume, and separate installation volumes for spooling and paging are now assigned by the user.

Installation of z/VM to 3390-1 or 3390-2 DASD is no longer supported and has been removed from the INSTPLAN utility.

For more information, see:

- *z/VM: Guide for Automated Installation and Service*
- *z/VM: VMSES/E Introduction and Reference*

[V5.1] Relocation of the BFS /etc Directory

The BFS /etc directory, which contains the configuration files for the OpenExtensions™ Shell and Utilities, has been moved from the VMSYS file pool to the VMSYSU file pool. For more information, see *z/VM: CMS File Pool Planning, Administration, and Operation*.

[V5.2] Migration and Service Enhancements

A simplified migration process and new migration tools allow the disks associated with the preinstalled z/VM components, facilities, and optional features (and the preinstalled ICKDSF and RSCS products) on your first-level z/VM V5.1 system to be made available to your second-level z/VM V5.2 system and then transfers the following types of files:

- Customized files
- Local modifications
- Service
- User-created files residing on selected disks

For more information, see the *z/VM: Guide for Automated Installation and Service*.

z/VM V5.1 provided a new command, LOCALMOD, to make the procedure for creating and applying local modifications easier. z/VM V5.2 provides further automation of the LOCALMOD process by adding a capability to rework local modifications and provide support for local service. For more information, see the *z/VM: VMSES/E Introduction and Reference*.

[V5.2] Changes to Supplied SYSTEM CONFIG Definitions

SYSTEM_USERIDS statement:

- Removed the 'DISCONNECT' operand from the OPERATOR user ID.

FEATURES statement:

- Removed 'LOGMSG_FROM_FILE' from the ENABLE operand.
- Changed the RETRIEVE DEFAULT value from '7' to '20'.
- Changed the RETRIEVE MAXIMUM value from '7' to '255'.
- Added 'VDISK Userlim 144000 blocks'.

OPERATOR_CONSOLES statement:

- Moved 'SYSTEM_3270' ahead of 'SYSTEM_CONSOLE'.

EMERGENCY_MESSAGE_CONSOLES statement:

- Added 'SYSTEM_CONSOLE' at the end of the list.

CHARACTER_DEFAULTS statement:

- Changed 'CHAR_DELETE @' to 'CHAR_DELETE OFF'.
- Changed 'LINE_DELETE ¢' to 'LINE_DELETE OFF'.
- Changed 'TAB J' to 'TAB OFF'.

[V5.2] Changes to Predefined CP Directory Entries

Deleted user IDs:

- VMADMIN
- LINUXSAV

Added user IDs:

- DTCVSW1 - System-default virtual switch (VSWITCH) controller virtual machine
- DTCVSW2 - System-default virtual switch (VSWITCH) controller virtual machine (alternate, for provision of failover capability)
- MIGMAINT - User ID used with migration procedures

Changed user IDs:

- User 5VMPTK10 has been changed to 5VMPTK20.
- User 5VMTCP10 has been changed to 5VMTCP20.
- User 4VMHCD40 has been changed to 5VMHCD20.

Changed user specifications:

- MAINT
 - Virtual storage increased:
 - [V5.1] USER MAINT MAINT 64M 1000M ABCDEFG
 - [V5.2] USER MAINT MAINT 128M 1000M ABCDEFG
 - Disk sizes for CF1, CF2, and CF3 increased to 120 cylinders.
- 5VMTCP20
 - Virtual storage increased:
 - [V5.1] USER 5VMTCP10 5VMTCP10 16M 32M BEG
 - [V5.2] USER 5VMTCP20 5VMTCP20 100M 132M BEG
 - Links added:
 - LINK DTCVSW1 191 280 MR
 - LINK DTCVSW2 191 281 MR

Installation, Migration, and Service

- TCPIP
 - Privilege class changed:
[V5.1] USER TCPIP TCPIP 32M 128M ABCG
[V5.2] USER TCPIP TCPIP 32M 128M ABG
- CBDIODSP
 - Virtual storage increased:
[V5.1] USER CBDIODSP CBDIODSP 96M 128M BCEFG
[V5.2] USER CBDIODSP CBDIODSP 256M 999M BCEFG

[V5.2] Product Parameter File Names

Table 2 lists the base \$PPF file for each z/VM component, facility, and optional feature and indicates whether the file name has changed for z/VM V5.2.

Table 2. Base \$PPF File Names

Component, Facility, or Feature	File Name and File Type	Changed?
AVS	5VMAVS20 \$PPF	Yes
CMS	5VMCMS20 \$PPF	Yes
CP	5VMCPR20 \$PPF	Yes
DirMaint	5VMDIR10 \$PPF	No
Dump Viewing Facility	5VMDVF20 \$PPF	Yes
GCS	5VMGCS20 \$PPF	Yes
HCD/HCM	5VMHCD20 \$PPF	Yes
Language Environment	4VMVMQ40 \$PPF	No
OSA/SF	4OSASF40 \$PPF	No
Performance Toolkit	5VMPTK20 \$PPF	Yes
RACF	5767002P \$PPF	No
REXX	5VMREX20 \$PPF	Yes
TCP/IP	5VMTCP20 \$PPF	Yes
TSAF	5VMTSA20 \$PPF	Yes
VMSES/E	5VMSES20 \$PPF	Yes

[V5.2 (VM63952)] Support for IPv6 HiperSockets in TCP/IP Configuration

The basic TCP/IP configuration wizard (IPWIZARD) allows you to select IPv6 HiperSockets™ as your interface type.

Support and Exploitation of Hardware and Architectures

This section describes VM support for, or exploitation of, new or enhanced hardware devices, facilities, and architectures.

Notes:

1. Some VM hardware support or exploitation may depend on hardware level or availability. See the sections on server support and device support in *z/VM: General Information*. For detailed information on hardware capabilities and requirements, refer to the appropriate hardware announcements and other hardware documentation.
2. This section also describes the VM simulation or emulation of certain hardware architectures and facilities. Other simulations and emulations may be described under “Connectivity and Networking” on page 39.

[V2.2] S/390 Open Systems Adapter Support Facility

The IBM S/390 Open Systems Adapter (OSA) is an integrated hardware feature that allows the S/390 platform to provide industry-standard connectivity directly to clients on local area networks (LANs) and wide area networks (WANs). The Open Systems Adapter Support Facility (OSA/SF) is a host-based tool supplied with VM that allows you to customize an OSA's modes of operation. You can access OSA/SF by a CMS user ID, by a REXX call to the OSA/SF application programming interface (API), or through the OSA/SF Windows® 95, Windows NT®, or OS/2® graphical user interface (GUI). For more information, see *eServer zSeries 900: Planning for the Open Systems Adapter-2 Feature*.

[V2.2] Multi-Path Lock Facility

The IBM DASD Subsystem Multi-Path Lock Facility (MPLF) provides function to control processes and share data in a loosely coupled environment. VM now provides support to allow dedicated devices and full-pack minidisks to use this real hardware facility. The addition of this support allows Transaction Processing Facility (TPF) systems running as guests on VM to share data with native TPF systems.

MPLF controls locking through a set of channel commands implemented by the IBM DASD Subsystem. These commands result in a setting which indicates the requested operation is either compatible or incompatible with the current state of the lock. The control unit maintains the names and status of the locks in use and responds to requests to obtain or release a lock. The control unit also notifies a host when it permits lock ownership that was previously denied. A host can obtain a lock, release a lock, examine the status of active locks, and check the outcome of lock-related operations using the channel commands.

For more information, see the SET LKFACR and QUERY LKFACR commands in the *z/VM: CP Commands and Utilities Reference*.

[V2.3] Guest Coupling Simulation

VM guest coupling simulation provides for the simulation of one or more complete parallel sysplex systems within a single VM system image. This environment allows the testing and debugging of guest operating systems while running under VM. Guest coupling simulation is supported on the following processors (at the appropriate engineering-change levels):

- IBM S/390 Parallel Enterprise Server™ - Generation 3 and later
- IBM S/390 Multiprise® 2000 and later

VM guest coupling simulation support simulates a sysplex environment by using software equivalents of the real hardware and software requirements. The hardware is simulated by the message facility support in CP. Other virtual machines, referred to as coupled guests, are set up to run the guest operating systems (that is, MVS™ or OS/390). A special virtual machine called a Coupling Facilities (CF) service machine is defined and runs the coupling facility code. The coupled guest machines and the CF service machines are coupled together by a special message facility environment that passes information back and forth between the CF service machines and the coupled guests. The CF service machines manage data movement, scheduling, and locks, and maintain the status of the entire sysplex environment.

This facility also provides a CP command set to allow you to perform operations required to control the coupled guest environment:

- DEFINE MSGPROC

- DETACH MSGPROC
- QUERY VIRTUAL MSGDEVICES
- QUERY VIRTUAL MSGPROC
- RESTART MSGPROC
- SET MSGFACIL

These commands allow you to add and remove links to the CF service machines, request status from the CF service machines, and control the message facility environment. Also, a new CP SET VTOD command has been added to allow Year 2000 testing of a parallel sysplex environment on VM.

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: Running Guest Operating Systems*
- *z/VM: Diagnosis Guide*

[V2.4] Integrated Cluster Bus Channels

VM provides support for integrated cluster bus channels for S/390 CMOS processors that support this channel type. The existing dynamic I/O configuration support has been updated to allow VM, when running in an LPAR controlling the dynamic I/O configuration changes, to define integrated cluster bus channels for an OS/390 LPAR on the same Central Electronics Complex (CEC).

[V2.4] Fibre Connection Channels

VM provides support for fibre connection (FICON®) channels for processors that support this channel type. FICON channel technology can improve system performance and total aggregate system bandwidth. Each FICON channel provides the equivalent of eight ESCON® channels. VM support includes:

- Dynamic I/O configuration support for the new FICON and FICON-converter channel types
- Support for the fibre-channel-to-ESCON converter function on the 9032-5 switch
- Support for the FICON 9042-1 switch
- Support for the S/390 architecture changes in the SCHIB, ORB, and IRB
- A new CP monitor record, Extended Channel Path Measurement Data

[V2.4] QDIO Facility and OSA-Express Gigabit Ethernet

VM provides guest support for the Queued Direct I/O (QDIO) facility on processors that support this new I/O architecture. The QDIO Facility allows a program to directly exchange data with an I/O device without performing traditional S/390 I/O instructions. To exchange data, both the I/O device and the program reference main storage directly through a set of data queues.

VM provides guest (dedicated device) support and dynamic I/O support for the new OSA Express Gigabit Ethernet (OSA-Express GbE). A new channel path ID has been defined for this device.

The following CP commands have been updated:

- DEFINE CHPID / PATH
- QUERY VIRTUAL OSA
- SET CPTRACE

For more information, see the *z/VM: CP Commands and Utilities Reference*.

[V2.4] Cryptographic Support

This support provides guest virtual machine access to the S/390 CMOS Cryptographic Coprocessor by extending the existing VM guest cryptographic support for Bipolar processors. The new cryptographic support is upwardly compatible with the existing Bipolar support.

This support is intended primarily for use by OS/390 Integrated Cryptographic Service Facility (ICSF) applications running in an OS/390 guest of VM. ICSF is currently the only IBM application program interface to the S/390 CMOS cryptographic hardware. The following commands and statements were updated:

- CP DEFINE CRYPTO command
- CP QUERY CRYPTO command
- CP QUERY VIRTUAL CRYPTO command
- CP SET CRYPTO command
- CPU directory control statement
- CRYPTO directory control statement

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Planning and Administration*

[V2.4] IEEE Floating Point

New function has been added to support IEEE Floating Point hardware on servers that provide this capability. CP has been updated to allow multiple levels of guest operating systems to use basic floating point extensions, floating point support extensions, hexadecimal floating point extensions, and binary floating point.

This support includes preservation and restoration of 16 floating point registers (Additional Floating Point registers 1,3,5,7,8-15 plus existing floating point registers 0,2,4,6) and the Floating Point Control (FPC) register which is provided by the IEEE Floating Point hardware. The following were updated:

- CP DISPLAY Registers command
- CP STORE (Registers) command
- CP STORE STATUS command
- CP TRACE command
- Messages HCP6153E and HCP6154E (new)

For more information, see the *z/VM: CP Commands and Utilities Reference*.

Note: Applications that exploit the IEEE Floating Point hardware require the IBM High Level Assembler Version 1 Release 3.0.

[V2.4] Extended-TOD-Clock

The Extended-TOD-clock facility is a hardware facility available on certain processors which provides a 128-bit Time of Day (TOD) clock. VM supports the use of the Extended-TOD-clock facility from XA, ESA, and XC virtual machines.

[V3.1] Enterprise Storage Server FlashCopy

z/VM allows a native CP user to initiate a FlashCopy[®] function (an instant copy of a disk or data set) of a source device to a target device on an IBM Enterprise Storage Server[®] (ESS). Customers will find this feature especially beneficial for large

databases, which normally require a long time to copy. FlashCopy support includes the new CP FLASHCOPY command. For more information, see the *z/VM: CP Commands and Utilities Reference*.

[V3.1] ESS Parallel Access Volumes

z/VM provides guest support for the ESS Parallel Access Volumes feature. This feature allows the configuration of logical volumes (known as alias Parallel Access Volumes), where each logical volume (alias) has a unique device address but is actually an exposure of the existing real device (known as the base Parallel Access Volume). This allows the host to issue concurrent I/O requests to one real device, the base volume, through the different alias volumes.

Support for Parallel Access Volumes includes:

- The new CP QUERY PAV command, which displays information about the Parallel Access Volume devices on the system.
- Enhancements to the CP QUERY DASD DETAILS command to display additional information if the queried device is a Parallel Access Volume.
- A new CP Monitor Record, which has been added to Domain 6 (I/O) to record state change interrupts that indicate a change in the Parallel Access Volumes information:
 - Record 20 – MRIODSTC – State change

Other Parallel Access Volumes information will be recorded in the existing Device Configuration Data Record (Domain 1, Record 6) and the Vary On Device - Event Data Record (Domain 6, Record 1).

[V3.1] Tape Support Enhancements

z/VM provides additional guest support for the IBM 3494 Virtual Tape Server (VTS):

- Peer-to-Peer VTS provides flexible component placement to meet 7x24 processing requirements and provides a solution for remote backup and recovery.
- Import/Export allows physical tapes to be removed from and inserted into the VTS logical tape library.

z/VM supports guest use of IBM 3590 A60 tape controllers attached with FICON™ channels when such guests themselves support the 3590 A60 on native FICON channels.

[V3.1] z/Architecture Support

z/Architecture™ (64-bit) capabilities are supported for guest operating systems.

[V4.1] Integrated Facility for Linux

z/VM supports the IBM S/390 Integrated Facility for Linux (IFL), a hardware feature available on zSeries®, G6, and G5 servers which provides additional processing capacity for Linux workloads. CMS Level 17 or later, Linux for zSeries, Linux for S/390, z/VM V4.1 or later, and stand-alone utilities supplied with z/VM V4.1 or later are supported on IFL.

IFL is managed by Processor Resource/Systems Manager™ (PR/SM™) as a logical partition with dedicated CPs. Implementation of this facility requires an LPAR definition, following normal LPAR activation procedures. As with any change in the LPAR configuration of a processor, the introduction of additional resources to manage may have an impact on the capacity of the existing partitions and

workloads running on the server. The size of the impact is dependent on the quantity of added resources and the type of applications being introduced. A tool is available to aid in assessing the impact to any server; contact your IBM representative for details.

[V4.2] Cryptographic Support

z/VM supports the IBM PCICA (PCI Cryptographic Accelerator) and the IBM PCICC (PCI Cryptographic Coprocessor) for Linux guest virtual machines. This support provides clear-key RSA support for Linux guests enabling hardware SSL acceleration on the zSeries and S/390 servers. A z/VM system can include Linux guests using the RSA-Assist support simultaneously with other VM guests using the CMOS Cryptographic support.

The following commands and statements were updated:

- CP QUERY CRYPTO command
- CP QUERY VIRTUAL CRYPTO command
- CP SET CRYPTO command
- CRYPTO directory control statement

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Planning and Administration*

[V4.2] ESS Large Volumes

z/VM supports 3390 volumes greater than 10,017 cylinders on the ESS, up to the maximum supported by the DASD. This helps relieve device address constraints and improves disk resource utilization and storage administrator productivity by providing the ability to consolidate multiple disk volumes into a single address.

The following CP functions have been updated to reflect this new capacity:

- XLINK_DEVICE_DEFAULTS system configuration statement
- XLINK_VOLUME_INCLUDE system configuration statement
- MDISK directory control statement

For more information, see *z/VM: CP Planning and Administration*.

[V4.2] FICON CTCA

z/VM supports FICON Channel-to-Channel communications between an IBM zSeries 900 (at the appropriate service level) and another z900 or an S/390 Parallel Enterprise Server G5 or G6. This enables more reliable and higher bandwidth host-to-host communication than is available with ESCON channels.

The CP DEFINE CU/CNTLUNIT command was updated.

Additional explanation was added to dynamic I/O return codes for control units.

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Planning and Administration*

[V4.2] HiperSockets

z/VM supports the z/Architecture HiperSockets function for high-speed TCP/IP communication among virtual machines and logical partitions (LPARs) within the

same zSeries server. The HiperSockets function uses an adaptation of the Queued Direct I/O (QDIO) high-speed I/O protocol. The HiperSockets function allows virtual machines and logical partitions to communicate internally over the memory bus using the internal-queued-direct (IQD) channel type in the z900.

Up to four IQD channels can be configured within a z900. Each IQD channel provides isolated communications among the logical partitions and virtual machines using that channel. There is no communication between different IQD channels, thereby providing communication security among separate groups of logical partitions and virtual machines connected to different IQD channels.

The z900 provides up to 1024 HiperSockets devices through which HiperSockets communication can be used, divided at your discretion among the four IQD channels.

z/VM supports HiperSockets for use by guest operating systems and by the TCP/IP server virtual machine. VM programs using traditional TCP/IP socket connections can communicate through HiperSockets with other VM programs, guest operating systems, and other logical partitions that are also using TCP/IP.

Note: z/VM support for HiperSockets requires a z900 server at EC level J10607 or J10608. For the most current information on the VM support for HiperSockets, refer to the z/VM web site at:

www.ibm.com/eserver/zseries/zvm/

For customers who plan to run z/OS as a guest of VM, refer to the z/OS web site for the most current information on z/OS support for HiperSockets:

<http://www.ibm.com/eserver/zseries/zos/>

[V4.2] OSA-Express Token Ring

OSA-Express token ring support expands on previous OSA token ring support by adding 100 Mb/sec (megabit/second) support to the earlier 4 Mb/sec and 16 Mb/sec support.

The OSA-Express token ring feature supports the QDIO data transfer architecture. QDIO support requires z/VM V4.2.

The OSA-Express token ring feature continues to support non-QDIO environments, the traditional TCP/IP (LAN Channel Station (LCS)) and SNA (Link Services Architecture (LSA)) traffic. VM/ESA V2.3 or later is required.

z/VM V4.2 supports the OSA-Express token ring feature for use by guest operating systems and by the TCP/IP server virtual machine.

[V4.2] z/Architecture Guest Coupling Facility

VM guest coupling support has been enhanced to accommodate the z/Architecture guest coupling facility. These enhancements include the following:

- Larger Vector Support
- Coupling Facility Duplexing
- Multiple-Buffer Capability
- Message Architecture Enhancements
- New CP Commands:
 - DEFINE CFLINK

- DETACH CFLINK
- QUERY CFLINKS
- QUERY VTOD
- SET CFLINK
- Updated CP Commands and Directory Control Statements
 - DEFINE MSGPROC
 - SPECIAL Directory Control Statement

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *z/VM: Running Guest Operating Systems*
- *z/VM: CP Planning and Administration*

[V4.3] Fibre Channel Protocol Guest Support

z/VM provides guest support for the new Fibre Channel Protocol (FCP) hardware channel. This channel allows a zSeries server to connect to a fibre-channel fabric. The z/VM support allows guest operating systems to access selected devices on Small Computer System Interface (SCSI) controllers connected to the fabric.

The programs operating in guest virtual machines on z/VM are responsible for providing the appropriate support to use and control the SCSI devices connected through the FCP channel. Your system administrator is responsible for ensuring the necessary level of access control and concurrent-access data integrity for the SCSI devices. z/VM itself neither uses any SCSI devices nor controls guest access to them. z/VM allows the dedication of zSeries subchannels on FCP channels to a guest. Each subchannel allows the guest to access any SCSI device for which access permission has been granted to the worldwide port name of the FCP channel within the fibre-channel infrastructure. Typical access controls within the infrastructure include zoning in the switches and Logical Unit Number-masking (LUN-masking) in the controllers.

When FCP-based SCSI support is available from Linux for zSeries, guest Linux operating systems can access data on the SCSI devices connected to the fibre-channel fabric. Access to SCSI devices by a Linux guest is governed by open standards for fibre-channel fabrics and controllers as well as by proprietary or commonly-available functions provided by individual vendors. Therefore, unlike the device isolation provided among virtual machines by z/VM and z/Architecture for devices connected to other types of channels, neither z/VM nor the FCP channels provide for the isolation of SCSI devices to a single virtual-machine configuration.

The following CP commands have been updated for this support:

- ATTACH
- DEFINE CHPID / PATH
- DETACH (Real Device)
- QUERY ALL
- QUERY CHPID / PATH
- QUERY (Real Device)
- QUERY VIRTUAL ALL
- QUERY (Virtual Device)

For more information, see the *z/VM: CP Commands and Utilities Reference*.

[V4.3] Performance Monitor Enhancement

To correctly extract processor configuration data and performance data from each of the I/O processors on zSeries servers, CP has been updated to issue the new STSI (Store System Information) hardware instruction and record the appropriate monitor information. The Performance Reporting Facility (PRF) feature has been updated to process this new monitor data.

[V4.4] Cascaded FICON Directors

z/VM supports the zSeries capability to cascade two FICON directors within a fibre-channel fabric. The z/VM support for cascaded FICON directors is embodied in support for two-byte fibre-channel link addresses when defining and configuring control units within the fabric. Previously, only single-byte link addresses were needed in a single-switch fabric. Cascaded FICON directors require the use of two bytes of the standard three-byte fibre-channel link address; the third byte, for arbitrated-loop support, is not used in FICON fabrics. When using the new cascaded-FICON-director function, your hardware-I/O definitions need to be updated accordingly.

When CP is in control of the dynamic I/O, use the DEFINE CU and MODIFY CU commands to define a cascaded FICON director topology to the system. When HCD is in control of the dynamic I/O, use the ACTIVATE command from the HCD virtual machine to define the cascaded FICON director topology.

The following CP functions have been updated:

- DEFINE CU / CNTLUNIT command
- MODIFY CU / CNTLUNIT command

For more information, see the *z/VM: CP Commands and Utilities Reference*.

[V4.4] Enhanced QDIO Performance

The QDIO architecture, originally introduced with the OSA-Express, was later extended to HiperSockets and the FCP channels. The architecture itself was extended in HiperSockets to include a new type of high-performance I/O interruption known as an adapter interruption. The use of adapter interruptions has been extended to the OSA-Express and FCP channels on the IBM @server® zSeries 990 (z990).

In addition to the use of adapter interruptions by the OSA-Express and FCP channels, the z990 server is designed to include a performance assist for the virtualization of adapter interruptions being given to operating systems running as guests of z/VM. This hardware performance assist is available to V=V guests (pageable guests) that support QDIO on z/VM V4.4.

This new IBM virtualization technology is designed to benefit all guest operating systems in environments where they can process adapter interruptions. This includes all users of HiperSockets, and guest operating systems that add adapter-interruption support for OSA-Express and FCP channels. With the enhancement of the TCP/IP stack in z/VM V4.4 to use adapter interruptions for OSA-Express, TCP/IP can benefit from this performance assist for both HiperSockets and OSA-Express.

The following CP functions have been added for this support:

- QUERY QIOASSIST command
- SET QIOASSIST command

The following CP functions have been updated for this support:

- QUERY VIRTUAL FCP command
- QUERY VIRTUAL OSA command

For more information, see the *z/VM: CP Commands and Utilities Reference*.

[V4.4] ESS FlashCopy Version 2

z/VM supports the following ESS FlashCopy Version 2 enhancements:

- Data Set FlashCopy, which removes the restriction where source cylinders must be copied to the same physical target cylinders. The removal of this restriction is especially helpful when copying one VM minidisk to another. It allows a non-fullpack source minidisk to be copied to a non-fullpack target minidisk when the minidisks exist on different physical cylinder extents of the same physical volume or different physical volumes.
- Multiple Relationship FlashCopy, which allows a source to have multiple targets. This function allows one source volume to be copied to many target volumes.
- Elimination of Logical Storage System (LSS) constraint, which allows a source and target relationship to span across an LSS. This removes the restriction where both the source volume and the target volume must reside in the same logical control unit.

[V4.4] ESS Peer-to-Peer Remote Copy Enhancements

z/VM supports guest use of the ESS Peer-to-Peer Remote Copy Extended Distance (PPRC-XD) function. Guests who support PPRC-XD and have DATAMOVER authority in their user directory can copy full volumes of data in non-synchronous mode, which extends the distance between the primary and secondary ESS with a minimal effect on performance. PPRC-XD is suitable for data migration, backup, and disaster recovery procedures. Data can be copied at distances well beyond the 103 km supported for PPRC synchronous transmissions. Typically, the distance for PPRC-XD is limited only by the capabilities of the network and channel extension technologies.

Native z/VM support for PPRC-XD is provided by Device Support Facilities (ICKDSF), Version 1 Release 17, with ICKDSF running in a CMS virtual machine.

z/VM also provides guest support for PPRC Version 2, which is designed to offer an Asynchronous Cascading solution, providing a complete, consistent, and coherent copy of data at a remote site. Asynchronous Cascading provides a two-volume synchronous PPRC implementation with a non-synchronous third volume serving as a backup device that can provide a multi-site, long distance solution.

[V4.4] Extended Channel Measurement Data Support

z/VM supports the extended I/O-measurement facilities of the z990 server. This function, known as Extended Channel Measurement Data Support (ECMDS), provides an extended I/O-measurement block for each subchannel and an extended measurement word at the completion of each I/O operation. Each extended I/O-measurement block has its own 64-bit address, allowing the measurement blocks to be stored in noncontiguous real memory. The extended measurement word provides channel measurement data for each I/O operation when it completes, streamlining measurement processing in the operating system.

[V4.4] Guest Coupling Enhancement

VM's virtual Coupling Facility (CF) support has been enhanced to allow z/VM systems to run as second-level (or higher) guests while simulating complete OS/390 and z/OS coupled sysplexes. This enhanced support loads the Coupling Facility Control Code (CFCC) from the Service Element of a zSeries or S/390 server into CF service virtual machines in a z/VM system running as a second-level (or higher) guest of z/VM V4.4. This allows you to test an OS/390 or z/OS Parallel Sysplex[®] environment at any guest level.

Note: Each additional level of guest virtualization incurs a performance penalty that may make running a Parallel Sysplex impractical at higher guest levels.

[V4.4] Logical Channel Subsystems

A new logical channel subsystem (LCSS) structure is introduced with the z990 server. It is designed to allow the definition of more than one channel subsystem (CSS), providing channel-path and subchannel controls for configuring channel-subsystem images. Each channel-subsystem image can be configured with up to 256 channel paths, and each logical partition has access to one channel-subsystem image.

Support for dynamic I/O configuration on z/VM V4.4 has been extended to allow channel paths, control units, and devices to be dynamically added, changed, and deleted in multiple logical channel subsystems when z/VM V4.4 is running on a z990 server with the applicable hardware support. When z/VM V4.4 is running on a z990 server that includes the hardware support, and z/VM is the controlling logical partition for dynamic-I/O configuration, z/VM is designed to handle all of the new elements of each CSS facility for changing your hardware I/O configuration. To dynamically change the I/O configuration, one of two methods can be employed:

- CP's suite of interactive dynamic-I/O-configuration commands
- HCD and HCM configuration-management tools

The following CP functions have been changed for this support:

- DEFINE CHPID/PATH command
- DEFINE CU/CNTLUNIT command
- DEFINE DEVICE/IODEVICE command
- MODIFY CHPID/PATH command
- MODIFY CU/CNTLUNIT command
- MODIFY DEVICE/IODEVICE command
- DELETE CHPID/PATH command
- DELETE CU/CNTLUNIT command
- DELETE DEVICE/IODEVICE command
- QUERY CHPID command
- QUERY DYNAMIC_I/O command
- QUERY LPARS command
- DIAGNOSE code X'2AC' – HCD Dynamic I/O

For more information, see:

- *z/VM: I/O Configuration*
- *z/OS and z/VM: Hardware Configuration Manager User's Guide*

[V4.4] Support for 30 LPARs

Prior to the z990, there was an LPAR limit of 15. IBM plans to increase this limit for the z990 server. z/VM can handle I/O-configuration definition and dynamic-I/O

configuration for up to 30 LPARs. In addition, the CP Monitor has been updated to allow performance data to be collected and recorded for z/VM systems running on servers with more than 15 LPARs.

[V4.4] IBM 3590 Model H

z/VM supports the IBM TotalStorage® Enterprise Tape Drive 3590 Model H. This 384-track tape drive is faster and of higher capacity than the previous 256-track 3590 Model E. The 3590 Model H can be configured to emulate the device characteristics of either the 3590 Model B or the 3490 Model E. z/VM supports both emulation modes. The drive performs at 384-track speeds and capacity regardless of how it is configured.

The following external interfaces have been updated for this support:

- CP DIAGNOSE code X'210'
- CMS message DMS2139I

[V5.1] z/VM Operates Only on z/Architecture Servers

z/VM V5.1 operates only on IBM servers that support the IBM 64-bit z/Architecture.

z/VM V5.1 supports the enhanced z990 and the new z890, including supporting the enhanced LCSSs, spanned channels, and other server functions and features described below.

[V5.1] ASN-and-LX-Reuse Facility Support

z/VM adds support for guest use of the ASN-and-LX Reuse Facility when available on the processor. For example, z/OS Version 1 Release 6 will take advantage of this architectural extension to improve availability by reusing linkage indices in more circumstances than can currently be done.

The following CP commands have been updated for this support:

- DISPLAY LKS
- DUMP LKS
- TRACE *mnemonic1*

For more information, see *z/VM: CP Commands and Utilities Reference*.

[V5.1] Enhanced LCSS Support

The scalability of LCSSs is being further expanded — you can now define up to four LCSSs on a single z990. The z890 can support up to two LCSSs. The channel subsystem structure now offers the following:

- Four LCSSs (z990), two LCSSs (z890)
 - Each LCSS can have up to 256 channels defined.
 - Each LCSS can be configured with 1 to 15 logical partitions (LPARs).
 - Cannot exceed 30 LPARs per system.

There is no change to the operating system maximums. One operating system image continues to support up to 256 Channel Path Identifiers (CHPIDs). z/VM V5.1 will support four LCSSs on a zSeries server with the capability to do dynamic-I/O configuration in any LCSS.

[V5.1] IBM ESS Model 750

z/VM V5.1 supports the IBM TotalStorage ESS Model 750. The Model 750 supports FlashCopy® V1 and V2, as well as Peer-to-Peer Remote Copy (PPRC) V1 and V2. The Model 750 also includes support for the zSeries performance enhancers, and Parallel Access Volumes (PAV).

[V5.1] ESS PPRC over FCP Connections

z/VM V5.1 provides guest support for using the ESS PPRC function over FCP connections. Native support is provided by running Device Support Facilities (ICKDSF), Release 17, in a CMS virtual machine.

[V5.1] I/O Devices Not Supported

In addition to devices not supported by previous releases of z/VM, the following real I/O devices are not supported by z/VM V5.1:

- 3370 DASD
- 3375 DASD
- 3380 DASD on 3880 DASD Control Unit

Note: Emulated 3380 devices on 3990 Model 2 or higher controllers will continue to be supported. This includes RAMAC® emulated 3380 models and 3390 DASD running in 3380 track compatibility mode.

- Multiprise Internal Disk
- 3830 DASD Control Unit
- 3880 DASD Control Unit
- 3995 Optical Library Dataserver
- 9332 DASD
- 9335 DASD
- 9336 DASD, except simulated VDISKS and emulated SCSI LUNs
- 9340 DASD Subsystem, including all associated DASD and controllers
- 2440 Tape Unit
- 3420 Tape Unit
- 3422 Tape Unit and Control, except OMA/2 CD devices that emulate 3422s (supported for installation only)
- 3424 Tape Subsystem
- 3430 Tape Unit
- 9348 Tape Unit
- 3803 Tape Control Unit
- 9221 DASD/Tape Subsystem Control
- SDLC Integrated Communication Attachment
- BSC Integrated Communication Attachment
- CETI (9221) Integrated Communication Attachment

Omission of a device from this list does not mean that the device is supported. For a list of the devices that are supported by z/VM V5.1, see *z/VM: General Information*.

[V5.1] Improvements to Capacity Upgrade on Demand

z/VM V5.1 supports the On/Off Capacity on Demand (On/OffCoD) and the Capacity Backup Upgrade (CBU) functions on IBM zSeries servers and includes functional enhancements that can allow z/VM to:

- Recognize changed processor configuration settings on a zSeries system to:
 - Report the change in configuration to the system operator
 - Report the change in configuration to guests that support configuration change notification
- Recognize changed processor capacity settings on zSeries systems to:
 - Report the change in capacity to guests that support capacity measurement for billing purposes
 - Report the capacity change in z/VM monitor and accounting data

The following CP functions have been added for this support:

- QUERY CAPABILITY command determines the capability values of the processors in the configuration. A processor's capability value indicates its capability relative to other CPU models.
- Type D Accounting Record records the CPU capability of the processors in the configuration. This record is generated during system initialization and whenever the CPU capability changes.

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Planning and Administration*

[V5.1] OSA-Express Integrated Console Controller

With the new z890 and enhancements to the z990, IBM is introducing a new function for the OSA-Express 1000BASE-T Ethernet feature and a new Channel Path Identifier (CHPID) type, OSC. The new OSA-Express Integrated Console Controller (OSA-ICC) function supports TN3270E and non-SNA DFT 3270 emulation. Now, 3270 emulation for console session connections is integrated in the z990 and z890 through a port on the OSA-Express 1000BASE-T Ethernet feature. This can help eliminate the requirement for external console controllers (2074, 3174).

OSA-ICC support is available with the OSA-Express 1000BASE-T Ethernet feature, and can be configured on a port-by-port basis. A port on the 1000BASE-T Ethernet feature can be configured as an OSD, OSE, or OSC CHPID type. Use of the OSA-ICC and the OSC CHPID type is supported by z/VM V5.1.

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *System z9 and eServer zSeries 890 and 990: Open Systems Adapter-Express Integrated Console Controller User's Guide*

[V5.1] PCIX Cryptographic Coprocessor

z/VM V5.1 provides z/OS and Linux for zSeries guest support for the PCIX Cryptographic Coprocessor (PCIXCC) feature available with the IBM z990 and z890. z/VM support includes:

- Dedicated-queue support for clear-key and secure-key cryptographic functions for z/OS guests

- Shared-queue and dedicated-queue support for clear-key cryptographic functions for Linux guests with up to 256 dedicated queues

The following CP functions have been changed for this support:

- CRYPTO directory control statement
- QUERY CRYPTO command
- QUERY VIRTUAL CRYPTO command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V5.1] Transparent Sharing of Additional Channel Resources Across LCSSs

When LCSSs were introduced, they were designed to provide transparent sharing of Internal Coupling Channels (ICs) and HiperSockets™ between separate LCSSs. This support has now been expanded to include the ICB-3, ICB-4, ISC-3, FICON™ Express, and OSA-Express features. They are now capable of being configured as Multiple Image Facility (MIF) spanning channels, allowing sharing of channel resources across LPARs.

Spanned channels can be shared among LPARs across LCSSs. ICB-3, ICB-4, ISC-3, FICON Express, and OSA-Express can be configured to multiple channel subsystems and are intended to be shared transparently by any or all of the configured LPARs without regard to the LCSS to which the LPAR is configured.

z/VM V5.1 supports all of the spanned channel types identified, and also supports internal spanned channels.

[V5.1] Up to 24 Processor Engines in a Single z/VM Image

z/VM supports up to 64 virtual processor engines in a single guest configuration. z/VM V5.1 allows up to 24 real processor engines in a single z/VM image on a z990. The specific workload will influence the efficiency with which a specific z/VM system can use larger numbers of engines. Generally, z/VM overhead is expected to be lower with fewer, more CPU-intensive guests than with many lightly loaded guests. Excessive overcommitment of storage could contribute to increased overhead as well.

[V5.1] IBM 3592

z/VM supports the IBM TotalStorage Enterprise Tape Drive 3592, which offers greater capacity and improved performance over previous 3590 tape drives. The 3592 supports standard read/write media as well as Write Once Read Many (WORM) media. z/VM provides both native and guest support for the 3592.

Message HCP2246E has been added for this support, and the following CP interface has been updated:

- DIAGNOSE code X'210'

[V5.1] Crypto Express2

Crypto Express2 is IBM's third-generation cryptographic hardware feature. Crypto Express2 combines the functions of the PCICA and PCXCC in one feature, providing improved secure-key operations. z/VM V5.1 provides z/OS and Linux for zSeries guest support for Crypto Express2 as described for the PCIXCC feature

(see “[V5.1] PCI-X Cryptographic Coprocessor” on page 31). Refer to the 2084/2086 PSP buckets to identify any required service for support of these features.

[V5.1] OSA-Express2

z/VM 5.1 supports the OSA-Express2, which is a new generation of the OSA-Express Gigabit Ethernet feature, as well as a 10-Gigabit Ethernet feature. This technology update can help to provide a balanced system with sufficient throughput to satisfy the bandwidth demands of your applications. The OSA-Express2 Gigabit Ethernet (GbE) and 10 Gigabit Ethernet (10 GbE) features support Queued Direct Input/Output (QDIO). Refer to the 2084/2086 PSP buckets to identify any required service for support of these features.

[V5.1] IBM TotalStorage DS8000 Series

z/VM V5.1 supports the IBM TotalStorage DS8000™ series, which is designed to provide unmatched functionality, flexibility, and performance for enterprise disk storage. The DS8000 enables the creation of multiple storage LPARs (logical partitions), which can be used for completely separate production or test environments in a single physical DS8000. This may enable the use of one storage server where more than one was needed in the past. The DS8000 may also provide up to six times the throughput of an ESS Model 800, which may enable workload consolidation into a single storage subsystem.

z/VM supports the definition of very large SCSI or extended count key data (ECKD™) disks on the DS8000. See “[V5.1] Large Disk Support on DS8000 and DS6000” on page 71.

The following CP functions have been updated for this support:

- EDEVICE system configuration statement
- SET EDEVICE command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V5.1] FICON Express2

z/VM V5.1 supports the FICON Express2 feature for the z890 and z990, which provides up to twice the number of channels in the same amount of physical space – up to 80 FICON Express2 channels on z890 and up to 240 FICON Express2 channels on z990. FICON Express2 is designed to deliver up to 270 megabytes per second (MBps) of throughput, depending upon application environment. By comparison, FICON Express delivers up to 170 MBps. A FICON Express2 channel can also process significantly more start I/Os per second than a FICON Express channel. FICON Express2 supports CHPID types FC (native FICON, including FICON CTC control units) and FCP (Fibre Channel Protocol for attachment to SCSI devices in z/VM and Linux on zSeries environments).

[V5.1] IBM TotalStorage DS6000 Series

z/VM V5.1 supports the IBM TotalStorage DS6000™ series, which is designed to deliver enterprise-class storage capabilities in a space-efficient, modular design. Depending on workload, the DS6000 can provide up to four times the maximum host I/O operations per second of an ESS Model 750.

z/VM V5.1 supports the definition of large SCSI FCP disks and 3390 Model 9 disks on the DS6000. See “[V5.1] Large Disk Support on DS8000 and DS6000” on page 71.

[V5.2] IBM System z9 Enterprise Class and System z9 Business Class

z/VM V5.2 supports the IBM System z9™ Enterprise Class (z9™ EC), formerly the IBM System z9 109 (z9-109), and the IBM System z9 Business Class (z9 BC), including the following new facilities and features.

Crypto Express2 Accelerator

z/VM V5.2 supports the Crypto Express2 Accelerator (CEX2A) in the same manner as prior cryptographic cards are supported for both dedicated and shared use by guests. The new cryptographic card support is compatible with existing support for other PCI cards.

The CEX2A is exclusive to the z9 EC and z9 BC. The PCICC and PCICA hardware are not supported on the z9 EC and z9 BC.

The following CP functions have been updated for this support:

- CPU directory control statement
- OPTION directory control statement
- QUERY CRYPTO command
- QUERY VIRTUAL CRYPTO command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

N_Port ID Virtualization

N_Port Identifier virtualization (NPIV) for FCP channels (CHPID type FCP) is designed to allow the sharing of a single physical FCP channel among multiple operating-system images, whether running in LPARs or as z/VM guests in virtual machines. z/VM V5.2 exploits this hardware capability to define multiple virtual FCP channels, each with its own worldwide-unique Fibre Channel port name (WWPN). By assigning different hardware-defined virtual port names to different guests, the guests can use the virtual FCP channels as if they were dedicated physical FCP channels. In particular, access controls based on the virtual port names may be applied in the fabric using standard mechanisms like zoning in the switches and logical unit number (LUN) masking in the storage controllers.

NPIV is the industry standard solution which supersedes the previously previewed FCP LUN Access Control.

NPIV is exclusive to the z9 EC and z9 BC servers and is applicable to all of the FICON features supported on them when configured as CHPID type FCP.

z/VM V5.2 supports guest use of NPIV when FCP subchannels are dedicated to a guest and supports CP use of NPIV for IBM SCSI FCP devices.

Dynamic Addition or Deletion of a Logical Partition Name

z/VM V5.2 provides facilities to dynamically define and delete LPARs on z9 EC, z9 BC, z990, and z890 servers. This capability has been added to z/VM HCD/HCM support and to CP's dynamic I/O command interface.

The following CP functions have been added for this support:

- DEFINE LPAR command
- DELETE LPAR command

The following CP function has been updated:

- QUERY LPARS command

For more information, see the *z/VM: CP Commands and Utilities Reference*.

Support for up to 60 LPARs

z/VM V5.2 supports the capability of the z9 EC server to define up to 60 LPARs, 15 per Logical Channel Subsystem.

[V5.2] Device Support Withdrawn

The following real I/O devices are not supported by z/VM V5.2:

- 3705 Communications Controller
- 3720 Communications Controller
- 3725 Communications Controller
- 8232 LAN Channel Station

For a list of the real I/O devices that are supported by z/VM V5.2, see *z/VM: General Information*.

In addition, the IBM 2741 Communications Terminal and the TXX Terminal Model 33/35 (TTY) are not supported as virtual consoles.

[V5.2] Enhanced Performance Assists for z/VM Guests

z/VM V4.4 added virtualization technology that allows adapter interruptions to be passed directly to z/VM guests for HiperSockets, FCP, and OSA on System z9, z990, and z890 servers.

A complementary virtualization technology is being introduced for System z9, z990, and z890 servers:

- QDIO Enhanced Buffer-State Management (QEBSM) - two new hardware instructions designed to help eliminate the overhead of hypervisor interception
- Host Page-Management Assist (HPMA) - an interface to the z/VM paging-storage management function designed to allow page frames to be assigned, locked, and unlocked without z/VM hypervisor assistance, primarily benefiting the QEBSM environment

These new hardware assists can allow a cooperating guest operating system to initiate QDIO operations directly to the applicable channel, without interception by z/VM, thereby helping to provide additional performance improvements.

These new virtualization technologies are available only to first-level guests of z/VM V5.2. That is, they are not available to guests of a z/VM system that is itself running as a guest of another z/VM system.

z990 and z890 servers will require microcode level (MCL) updates for these new assists. Support is integrated in the licensed internal code (LIC) of System z9 servers. These assists are provided on System z9, z990, and z890 servers for the following channel path types: HiperSockets (CHPID type IQD), FICON (CHPID type FCP), and all OSA features (CHPID type OSD).

[V5.2] Open Systems Adapter for the Network Control Program

The Open Systems Adapter for the Network Control Program (OSA NCP, CHPID type OSN) is a new function of the OSA-Express2 Gigabit Ethernet and 1000BASE-T Ethernet features and is available only on System z9 servers. OSA-Express2 OSN supports the Channel Data Link Control (CDLC) protocol and provides channel connectivity from System z9 operating systems to the IBM Communication Controller for Linux (CCL). OSA-Express2 OSN is exclusively for internal communication, LPAR-to-LPAR.

If you continue to need SNA solutions that require NCP functions, you can now consider CCL as a migration strategy to replace your IBM Communications Controllers (374x).

z/VM V5.2 provides guest support for the OSA-Express2 OSN through HCD and HCM and CP's dynamic I/O command interface.

The following CP functions have been updated for this support:

- DEFINE CHPID/PATH command
- DEFINE DEVICE/IODEVICE command
- QUERY CHPID command
- QUERY OSA command
- QUERY VIRTUAL FCP command
- QUERY VIRTUAL OSA command

For more information, see the *z/VM: CP Commands and Utilities Reference*.

[V5.2] SCSI Disk I/O Performance Improvements

z/VM V5.2 provides performance improvements for SCSI disk I/O, including:

- QDIO efficiency improvements
The z/VM SCSI I/O subsystem (SCSI-driver stack) will now support and exploit the QDIO architecture's ability to chain address lists, allowing more data to be moved with a single I/O request. Chaining the address lists helps to reduce fragmentation of large channel programs, decreases CP overhead, and significantly lowers the number of I/O operations driven through the SCSI stack, thereby improving the performance of SCSI I/O.
- Paging and spooling optimization
CP's paging and spooling operations on SCSI disks currently use FBA emulation to transform standard I/O requests (that is, channel programs) into SCSI commands. With this new optimization, CP's paging and spooling function will build and send SCSI commands directly to the z/VM SCSI stack, thereby improving efficiency and performance.
- Improved FBA emulation efficiency
 - CP's FBA emulation function will now read CMS I/O buffers more efficiently, reducing the number of I/O requests to the z/VM SCSI stack. This enhancement will help to significantly improve SCSI I/O performance for CMS guests.
 - FBA emulation will now handle LOCATE CCWs more efficiently, reducing the number of I/O requests to the z/VM SCSI stack. This enhancement helps to significantly improve SCSI I/O performance for Linux guests, including the length of time to IPL a Linux guest.
 - FBA emulation will now handle the FBA padding function (initiated using a CCW data count less than the associated LOCATE data count) more

efficiently, reducing the number of I/O requests to the z/VM SCSI stack. This enhancement helps to significantly improve SCSI I/O performance for format functions.

[V5.2] FICON Express4

The FICON Express4 feature, introduced on the z9 EC and z9 BC servers, provides improved capacity and performance of up to 4 gigabits per second (Gbps). The FICON Express4 feature also provides:

- Reduced cost of storage operations and shorter backup windows with faster channel link data rates
- Investment protection for storage infrastructure with manageable migration to higher performance provided by 1/2/4 Gbps auto-negotiating links
- Channel and link consolidation to help simplify management and reduce the cost of the storage infrastructure
- Cost-effective FICON exploitation for midrange and small enterprises with additional price granularity with 2-port or 4-port cards for the z9 BC

[V5.2 (VM63856)] Improved Memory Management for Linux Guests

z/VM V5.2 supports the Collaborative Memory Management Assist (CMMA) on System z9 servers. This z/VM support, in conjunction with CMMA exploitation in guest operating systems such as Linux for System z, allows the CP host and its guests to communicate attributes for specific 4 KB blocks of guest memory. This exchange of information allows both host and guest to optimize their use and management of memory, in the following ways:

- CP knows when a Linux application releases storage, allowing CP to select those pages for removal at a higher priority and to reclaim the page frames without the overhead of paging-out their data contents to expanded storage or disk.
- CP recognizes clean disk cache pages, the contents of which Linux is able to reconstruct, allowing CP to bypass paging-out the data contents when reclaiming the backing frames for these pages. If Linux or its application subsequently tries to refer to the discarded page, Linux is notified that the page has been discarded and can reread the contents from disk or otherwise reconstruct them.
- The guest further benefits from the Host Page-Management Assist (HPMA). In conjunction with CMMA, HPMA allows the machine to supply fresh backing page frames for guest memory when the guest reuses a previously discarded page, eliminating the need for z/VM hypervisor interception and resolution of these host page faults.

The following changes have been made to CP commands:

- The response to the K option on the DISPLAY (Guest Storage) commands for ESA/390, ESA/XC, and z/Architecture virtual machines includes the block-usage state and the block-content state.
- The CP QUERY command has a new operand, MEMASSIST, that displays the status of the assist.
- The CP SET command has a new operand, MEMASSIST, that controls the use of the assist.

A new option has been added to the OPTION directory control statement: NOMEMASSIST. The DirMaint feature has been updated (via APAR VM63952) to support this directory option.

For more information about the assist, see “Collaborative Memory Management Assist”, in *z/VM: CP Programming Services*, SC24-6084.

[V5.2 (VM63952)] Exploitation of Selected System z9 Instructions

z/VM V5.2 exploits selected instructions of the z9 EC and z9 BC, including:

- Guest support for the Signal Processor (SIGP) instruction Conditional-Emergency-Signal and Sense-Running-Status orders and for Program-Event-Recording 3
- CP exploitation of Program-Event-Recording 3, providing access to the guest breaking-event-address register to aid in debugging wild branches during virtual machine execution, and the Store-Clock-Fast Facility to reduce the overhead of Store Clock instructions and CP program tracing
- CP TRACE support for new instructions available with the z9 EC and z9 BC

The following CP commands have been updated:

- DISPLAY Registers
- TRACE TABLE

The following CP utility has been updated:

- TRACERED

The following new diagnose code has been added:

- DIAGNOSE code X'9C' Voluntary Time Slice Yield

[V5.2 (VM63952)] Enhanced NPIV Support

When NPIV is enabled, you can allow guest operating systems and z/VM users to query the hardware-defined virtual port names.

The following CP command has been updated:

- QUERY FCP

[V5.2 (VM63952)] GARP VLAN Registration Protocol Support

Generic Attribute Registration Protocol (GARP) Virtual Local Area Network (VLAN) Registration Protocol, also referred to as GARP VLAN Registration Protocol (GVRP), is defined in the IEEE 802.1p standard and allows for the control of IEEE 802.1q VLANs. An Open Systems Adapter (OSA) communicates with GVRP-capable (IEEE 802.1p) switches, registering the active VLANs on behalf of the z/VM TCP/IP stack and the z/VM virtual switch if so configured. This provides dynamic creation and management of VLANs, including pruning of unnecessary broadcasts and unicasts on switches connected through 802.1q trunk ports.

z/VM enables the virtual switch to support GVRP in a guest LAN environment to help reduce LAN traffic between the physical LAN and the z/VM guest. GVRP support is exclusive to System z9 servers and is applicable to all OSA-Express2 features when operating in QDIO mode.

The following CP functions have been updated:

- DEFINE VSWITCH system configuration statement
- DEFINE VSWITCH command
- QUERY CONTROLLER command
- QUERY VSWITCH command
- SET VSWITCH command

[V5.2 (VM63952)] IPv6 HiperSockets Support

IPv6 support is offered for HiperSockets (CHPID type IQD), exclusive to System z9 servers. z/VM V5.2 supports IPv6 HiperSockets for TCP/IP and virtualizes IPv6 HiperSockets in a guest LAN environment.

[V5.2 (VM63952)] Enhanced IBM DS6000, DS8000, and ESS Support

z/VM V5.2 recognizes the DS6000 and DS8000 in their native control unit modes. That is, control unit mode 1750 will be recognized for the DS6000, and control unit mode 2107 will be recognized for the DS8000. In addition, the Enterprise Storage Server Models 750 and 800 will be recognized in their native control unit mode of 2105. z/VM will automatically virtualize the controller mode that a guest supports.

[V5.2 (VM63952)] Enhanced IBM Parallel Access Volume Support

z/VM V5.2 supports IBM Parallel Access Volumes (PAVs) as linkable minidisks for guest operating systems such as z/OS that exploit the PAV architecture, and provides the potential benefit of PAVs for I/O issued to minidisks owned or shared by guests that do not exploit PAVs, such as CMS.

The following commands have been added for this support:

- DEFINE PAVALIAS
- QUERY VIRTUAL PAV

The following commands have been updated for this support:

- ATTACH
- DETACH (Real Device)
- DETACH (Virtual Device)
- QUERY VIRTUAL (Device) DETAILS
- QUERY VIRTUAL DASD DETAILS
- SET MDCACHE

Connectivity and Networking

This section describes changes that can affect how VM systems, applications, and guest operating systems communicate with each other.

Notes:

1. For information about VM support for hardware connectivity facilities, see “Support and Exploitation of Hardware and Architectures” on page 18.
2. This section does not include TCP/IP changes prior to z/VM V4.2. For that information, see *z/VM: TCP/IP Planning and Customization*. For TCP/IP migration considerations and other TCP/IP topics, also see the z/VM TCP/IP web site at <http://www.ibm.com/eserver/zseries/zvm/related/tcpip/>.

[V2.3] MQSeries Client for VM/ESA

MQSeries® Client for VM/ESA enables applications using message queuing to communicate across different platforms using client-server technology.

MQSeries Client for VM/ESA executes in any CMS virtual machine and provides a simple user interface to the server environment. It is not a full function queue manager. Therefore it needs to be connected through TCP/IP or APPC to other queue managers.

Connectivity and Networking

The application Language Bindings supported are:

- IBM C for VM/ESA
- IBM VS Cobol II
- IBM PL/I Compiler
- REXX/VM
- IBM Assembler

For more information, see the *MQSeries: Application Programming Guide*, SC33-0807.

[V4.2] Guest LAN

z/VM supports a network of virtual adapters connecting guests within a z/VM system. The CP component of z/VM has been enhanced to provide:

- Virtual HiperSockets adapters
CP now offers a virtual network interface card (NIC) that emulates the HiperSockets adapter. A guest should be able to operate the virtual adapter using the same software that would have been used to drive the equivalent hardware.
- Connectivity for virtual adapters
CP now provides commands that enable z/VM users to connect virtual network adapters to an emulated local area network (LAN) segment, known as a guest LAN. Guests connected by an emulated LAN should be able to communicate using the same software that would have been used to communicate over an equivalent physical LAN segment.

The following CP commands have been added:

- DEFINE LAN
- DEFINE NIC
- DETACH LAN
- DETACH NIC
- QUERY LAN
- QUERY NIC
- QUERY VMLAN
- SET LAN
- UNCOUPLE

The following CP functions have been updated:

- COUPLE command
- DEFINE (Virtual Device) command
- QUERY (Virtual Device) command
- QUERY VIRTUAL OSA command
- SPECIAL directory control statement

[V4.2] TCP/IP Stack Vulnerability Reduction

Function has been added to improve the performance and reliability of the TCP/IP stack by recording and reporting some Denial of Service (DOS) attacks and preventing their propagation. These attacks include:

- Smurf — ICMP Echo Request packets sent to IP broadcast or multicast addresses
- Fraggle — UDP Echo Request packets sent to IP broadcast or multicast addresses
- Ping-o-Death — ICMP Echo Request packets that are too large.

[V4.3] Guest LAN Enhancements

The guest LAN implementation has been extended to support multicast transmission across HiperSockets guest LANs. Also, guest LANs can now be defined to function as either HiperSockets transport media or OSA-Express QDIO transport media. The addition of QDIO simulation allows the virtualization of a QDIO LAN environment and provides support for the broadcast capability that is part of the QDIO architecture. As with the z/VM HiperSockets simulation, no real hardware is required to support the OSA-Express QDIO simulation.

Serviceability aids have been added in the form of an AIF trace option to trace the occurrence of Adapter Interruption Facility events, and external symbols are defined to mark key points for adding TRSOURCE traps.

The following new CP commands have been added for this support:

- SET VMLAN
- TRACE AIF

The following CP functions have been updated:

- DEFINE LAN system configuration statement
- SPECIAL directory control statement
- COUPLE command
- DEFINE LAN command
- DEFINE NIC command
- QUERY LAN command
- QUERY NIC command
- QUERY VMLAN command
- SET LAN command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V4.3] TCP/IP Device and Stack Performance Improvements

Key sections of TCP/IP routing, device driver, and other processes have been optimized. By primarily recoding these processes in Assembler Language, improvements in performance of high-use code paths in the TCP/IP stack have been achieved. In addition to recoding, some algorithms were changed to provide equivalent functions at lower CPU costs.

When TCP/IP is configured to use the equal-cost multipath support, the routing table will maintain up to four equal-cost paths to a particular destination, providing load balance support and better performance. Refer to *z/VM: TCP/IP Planning and Customization* for further information.

Additional support has been added to the NETSTAT command. Functions of OBEYFILE such as starting and stopping devices and performing other simple control tasks can be accomplished by using the OBEY function of the NETSTAT command.

A new FTP PASSIVE subcommand has been added to control whether the client or the server establishes connections for data transfers. Refer to *TCP/IP User's Guide* for further information.

The TCP/IP stack has been enhanced to support the following:

- Multicast for HiperSockets
- Broadcast for QDIO

[V4.3] TCP/IP Dynamic Stack Configuration

Authorized users now can define, change or display the TCP/IP configuration dynamically. These changes are temporary and are discarded when the TCP/IP stack virtual machine is restarted. This support involves the following commands:

IFCONFIG

Added with z/VM V4.3; refer to *z/VM: TCP/IP Planning and Customization* for more information.

NETSTAT DEVLINKS

Updated to display additional information about the devices and links defined for the TCPIP virtual machine; refer to *z/VM: TCP/IP User's Guide* for more information.

QUERY (Real Device)

Updated with a new operand, ID, which displays the sense ID information returned by a device and its control unit; refer to *z/VM: CP Commands and Utilities Reference* for more information.

The IFCONFIG command can also be used to generate syntactically-correct configuration statements for inclusion in the PROFILE TCPIP file in order to make permanent changes to the network configuration.

[V4.3] TCP/IP Stack Vulnerability Reduction

Function has been added to improve the performance and reliability of the TCP/IP stack by recording and reporting additional Denial-of-Service (DoS) attacks and preventing their propagation. These attacks include:

- Kiss-of-Death (KOD) — an IGMP based attack that depletes the stack's large envelopes
- KOX — a version of the KOD attack that also has source IP address spoofing
- Stream — an attack in which TCP packets are sent to the stack with no header flags set
- R4P3D — an augmented version of the Stream attack
- Blat — a version of the Land attack that also has the URG flag turned on in the TCP header and has the ability to incrementally spoof the source IP address
- SynFlood — an attack in which the initiator floods the TCP/IP stack with SYN packets that have spoofed source IP addresses, resulting in the server never receiving the final ACKs needed to complete the three-way handshake in the connection process.

The Smurf DoS attack has also been updated to address three variants of the attack. Smurf is a DoS attack in which an ICMP Echo Request is sent to a broadcast or multicast address. The three variants are:

- Smurf-IC — where "IC" denotes that incoming packets are using the TCP/IP stack to launch an attack
- Smurf-OB — where "OB" denotes that an outbound ICMP Echo Request matched the description of a Smurf attack
- Smurf-RP — where "RP" denotes that ICMP Echo Reply packets being received by the stack do not match any Echo Requests that were sent.

[V4.4] Guest LAN Support for IPv6

Guest LAN support for OSA-Express simulation in QDIO mode has been updated for Internet Protocol version 6 (IPv6). Virtual machines in the guest LAN environment can define and use simulated OSA-Express devices that support both the IPv4 and IPv6 protocols.

[V4.4] IEEE VLAN Support

IEEE Virtual LAN (VLAN) standard 802.1q describes a mechanism that is designed to enable groups of hosts to be logically connected into a single local area network (LAN) even though they are connected to different switches in different physical locations. Network hosts can be organized into LAN segments which fit an organization's network traffic patterns, rather than being dependent on physical location. In addition, by connecting a router to multiple VLANs, savings can be realized by providing router connections to new LAN segments without having to add additional network interfaces to the routers.

To support IEEE VLANs, z/VM V4.4 provides:

- Enhancements to TCP/IP for z/VM to enable membership in a VLAN for IBM zSeries OSA-Express (QDIO) and HiperSockets adapters that support IEEE 802.1q
- Enhancements to z/VM's virtual QDIO and HiperSockets network interface simulation to support VLAN frame tagging as described by IEEE 802.1q
- Management and control of the VLAN identifiers (VIDs) that can be used by guest virtual machines

[V4.4] TCP/IP Broadcast Support for HiperSockets

TCP/IP broadcast support is available for the HiperSockets environment when utilizing Internet Protocol version 4 (IPv4). Applications that use the broadcast function can propagate the broadcast frames to all TCP/IP applications when using either HiperSockets or OSA-Express QDIO. Broadcast support is automatically enabled for the TCP/IP stack.

[V4.4] TCP/IP IMAP User Authentication Exit

Previously, TCP/IP Internet Message Access Protocol (IMAP) users required a VM user ID and password to access the IMAP mail store on z/VM. Through a new user-written IMAP authentication exit, a VM user ID and password, with the accompanying limitation of eight characters, are no longer required. The authentication exit runs in a separate virtual machine (IMAPAUTH), authenticates user IDs and passwords, and maps the IMAP user's ID to an eight-character SFS ID by which the user accesses the mail store.

You have the flexibility of using whatever authentication program you want to use. The authentication exit is enabled through a new TCP/IP configuration statement, `AUTHENTICATEID`. If enabled, the exit is called to handle the following types of requests:

- Validating LOGIN commands
- Mapping a long name to a short name
- Pre-authorizing connections

If the exit is not enabled, the IMAP server validates IMAP clients through CP or an external security manager.

For more information about IMAP user authentication, see *z/VM: TCP/IP Planning and Customization*.

[V4.4] TCP/IP SSL Server Upgrade

The TCP/IP Secure Sockets Layer (SSL) server is now compatible with the Linux 2.4 kernel. The upgraded SSL server provides appropriate Red Hat Package Manager (RPM) packages for the SuSE Linux 2.4.7 SLES 7 and 2.4.19 SLES 8 distributions. This upgrade helps avoid potential support issues with the backlevel 2.2.16 Linux kernel and allows the SSL server to exploit the many performance improvements in the Linux 2.4 kernel.

[V4.4] TCP/IP Stack Performance Improvements

The performance of the TCP/IP stack has been improved by optimizing additional high-use code paths and adding virtual multiprocessing capabilities. Individual device drivers can now be associated with particular virtual processors. A new CPU option on the DEVICE configuration statement designates the CPU where the driver for a particular device will be dispatched, allowing up to seven virtual processors to be exploited. This enables the TCP/IP load to be spread across multiple real processors and, in high-activity environments, can improve responsiveness and throughput. If your TCP/IP load ordinarily uses a substantial portion of a single processor, there may be benefits to creating a multiprocessor configuration. For more information, see *z/VM: TCP/IP Planning and Customization*.

[V4.4] TCP/IP Stack Security Improvements

The overall security and auditability of the TCP/IP stack and the integrity of the z/VM system have been improved to aid self-protection by providing better controls, monitoring, and defaults, which include:

- Logging of all TCP/IP administrative commands (including NETSTAT, OBEYFILE, and IFCONFIG) that alter, or attempt to alter, the active IP or CP configuration.
- Changing the defaults of the ASSORTEDPARMS statement within the TCP/IP configuration to:
 - **RESTRICTLOWPORTS**, to prevent impersonation (“spoofing”) of well-known z/VM TCP/IP applications by CMS users or guest operating systems
 - **VARSUBNETTING**, to avoid creating unnecessary TCP/IP routing table entries

The security of the TCP/IP stack has been improved by making the RESTRICTLOWPORTS operand of the ASSORTEDPARMS statement active **by default**. Thus, all TCP/IP applications that listen on “well-known” ports (ports 1 through 1023) must be given permission to do so. Such permission can be granted by customizing the TCP/IP server configuration file (PROFILE TCPIP, or its equivalent) in one of three ways:

1. Use the PORT statement to reserve the specific port (or ports) required by each application (virtual machine) used on your system. **This is the preferred method.** Note that with TCP/IP Level 440, ports can be reserved within a specific range, in addition to being reserved on an individual basis.
2. Modify the OBEY statement to include the affected virtual machines in the TCP/IP obey list.
3. Include the FREELOWPORTS operand as part of an ASSORTEDPARMS statement. Note that *this method removes the default protection for all well-known ports.*

Note: When the RESTRICTLOWPORTS default is in effect and appropriate port authorizations have not been provided, applications that rely upon well-known ports (for example, VM-based web servers or remote printing functions such as **lpr**) are likely to report “Unable to open port(s)” or “Permission denied” conditions.

For more information, see *z/VM: TCP/IP Planning and Customization*.

[V4.4] Virtual FICON CTCAs

CP's virtual I/O subsystem supports the simulation of FICON Channel-to-Channel Adapters (CTCAs). This support enhances previous virtual-CTCA support by adding the FICON protocol as an option for guest operating systems. Virtual CTCAs now support the 3088, ESCON, and FICON protocols. A new CTCA device subclass, FCTC, has been defined for the virtual FICON CTCA.

The following CP functions have been updated:

- SPECIAL directory statement
- DEFINE CTCA command
- QUERY VIRTUAL CTCA command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V4.4] Virtual Switch

z/VM further enhances virtualization technology by introducing a virtual IP switch that is capable of bridging a guest LAN to an associated real LAN connected by an OSA-Express adapter. The virtual switch is designed to help eliminate the need for virtual machines acting as routers to provide IPv4 connectivity to a physical LAN through an OSA-Express adapter. Further, it eliminates the need to define a separate routable subnet for the exclusive use of the members of a guest LAN. Using the virtual switch, the convenience of a guest LAN is maintained while allowing the guests to be assigned IP addresses in the real LAN subnet.

Virtual routers consume valuable processor cycles to process incoming and outgoing packets, requiring additional copying of the data being transported. The virtual switch helps alleviate this problem by moving the data directly between the real network adapter and the target or originating guest data buffers.

Centralized network configuration and control of the virtual switch within CP allows the guest LAN administrator to more easily grant and revoke access to the real network and to manage the configuration of guest LAN VLAN segments. While the z/VM system can be a member of multiple VLANs, the guest LAN administrator can control which guests belong to which real VLAN, without requiring additional network adapters or switch port configuration. If a guest does not support IEEE 802.1q, z/VM will transparently join the virtual network interface into the desired VLAN.

The virtual switch employs transparent bridging to enable the switch to dynamically determine and maintain node connectivity so that the LAN administrator has less network maintenance to perform.

The following new CP functions have been added for this support:

- DEFINE VSWITCH system configuration statement

Connectivity and Networking

- MODIFY VSWITCH system configuration statement
- MODIFY LAN system configuration statement
- NICDEF directory control statement
- DEFINE VSWITCH command
- DETACH VSWITCH command
- QUERY CONTROLLER command
- QUERY VSWITCH command
- SET VSWITCH command

The following CP functions have been updated:

- VMLAN system configuration statement
- IUCV directory statement
- SPECIAL directory statement
- COUPLE command
- DEFINE NIC command
- QUERY NIC command
- QUERY LAN command
- QUERY VMLAN command
- UNCOUPLE command

The following new Directory Maintenance Facility functions have been added:

- NICDEF command
- SPECIAL command

The following Directory Maintenance Facility functions have been updated:

- IUCV command

For more information, see:

- *z/VM: Connectivity*
- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: Directory Maintenance Facility Commands Reference*

[V5.1] Enhanced IPv6 Support

z/VM V5.1 enhances its IPv6 support by allowing the z/VM TCP/IP stack to be configured for IPv6 networks connected through OSA-Express operating in QDIO mode. The stack can be configured to provide static routing of IPv6 packets and to send IPv6 Router Advertisements. The native z/VM TCP/IP applications that have been enhanced to support IPv6 are TRACERTE and PING. In addition, support is being provided to help application developers to create socket applications for IPv6 communications. This support includes updates to the C/C++ Language sockets through Language Environment and to the OpenExtensions callable services library (CSL) socket APIs.

For more information, see:

- *z/VM: TCP/IP User's Guide*
- *z/VM: OpenExtensions Callable Services Reference*
- *C/C++ for z/VM: Run-Time Library Reference*, SC09-7624

[V5.1] Enhanced Virtual Switch Support — Failover

The virtual switch has been improved in z/VM V5.1 to provide enhanced failover support for less disruptive recovery for some common network failures.

Enhancements include the ability to:

- Recover from the failure of a virtual switch's network connection by swapping from a failing OSA-Express device to a partially initialized backup device in less time, helping to reduce data loss
- Detect a stalled OSA-Express device associated with a virtual switch, with failover to a backup device
- Detect a nonfunctioning z/VM TCP/IP controller and failover to a backup controller
- Limit the number of SETIP requests sent to an OSA-Express to help prevent overload of the device

For more information about the virtual switch, see *z/VM: Connectivity*.

[V5.1] Enhanced Virtual Switch Support — VLAN

The following changes have been made for deploying VLAN technology on z/VM:

- The VLAN ANY operand has been removed from the SET VSWITCH command and MODIFY VSWITCH statement.
- A new VLAN awareness attribute on a virtual switch has been defined. You can define a virtual switch as VLAN AWARE or VLAN UNAWARE. The awareness attribute can be specified on the DEFINE VSWITCH command and statement for IP and ETHERNET virtual switches.
- A new PORT attribute is defined on the DEFINE VSWITCH and SET VSWITCH commands. The supported ports are ACCESS and TRUNK.

See the following for more information:

- *z/VM: Connectivity* for information about the virtual switch
- *z/VM: CP Planning and Administration* for the changes to the DEFINE VSWITCH and MODIFY VSWITCH statements
- *z/VM: CP Commands and Utilities Reference* for the changes to DEFINE VSWITCH, SET VSWITCH, QUERY VSWITCH, QUERY LAN, and QUERY NIC.

[V5.1] Virtual Switch Exploitation of Layer 2 Support

z/VM V5.1 supports a new transport option for the virtual switch that defines the virtual switch as operating in Layer 2 mode. Layer 2 mode is supported for the OSA-Express and OSA-Express2.

In Layer 2 mode, each port on the virtual switch is referenced by its Media Access Control (MAC) address instead of by Internet Protocol (IP) address. Data is transported and delivered in Ethernet frames, providing the ability to handle protocol-independent traffic for both IP (IPv4 or IPv6) and non-IP, such as IPX, NetBIOS, or SNA. Coupled with the Layer 2 support in Linux for zSeries and the OSA-Express and OSA-Express2 support for the z890 and z990, Linux images deployed as guests of z/VM can operate more efficiently.

Port sharing on the OSA-Express or OSA-Express2 allows many stacks to share the same physical OSA NIC card, and provides a communication path between the LPAR and z/VM without having to send the traffic flow over the physical wire. There is a restriction with the Layer 2 support in that port sharing is supported only between virtual switches that are of the same transport type, such as Layer 2 with Layer 2 and Layer 3 with Layer 3. A Layer 2 guest cannot communicate directly with a Layer 3 guest on the same adapter.

For more information about the virtual switch, see *z/VM: Connectivity*.

[V5.1] Additional Device Connections for TCP/IP for z/VM

- TCP/IP stack utilization improvements for OSA-Express
For the z890 and z990 servers, the number of TCP/IP stacks that can share an OSA-Express adapter has been increased from 84 to 160. This increase provides additional connections to enable more virtual machines to be connected to an external network. z/VM V5.1 supports this hardware enhancement.
- Improved virtualization supporting more TCP/IP stacks with OSA-Express2
With the new OSA-Express2 feature for the z890 and z990, the maximum number of connections (TCP/IP stacks) allowed can be increased up to 640. Support for 640 TCP/IP stacks is provided by the OSA-Express2 features (Gigabit Ethernet SX, Gigabit Ethernet LX, Gigabit Ethernet LR) running in QDIO mode only. z/VM V5.1 supports this new capability to allow additional connections to virtual machines, particularly Linux images.

[V5.2] Enhanced Dynamic Routing Capabilities with a New MPRoute Server

A new MPRoute server has been adapted from z/OS V1.7 to operate on z/VM V5.2 and supports the following protocols:

- For IPv4, MPRoute implements the OSPF protocol described in RFC 1583 (OSPF version 2) and the RIP protocols described in RFC 1058 (RIP version 1) and in RFC 1723 (RIP version 2)
- For IPv6, MPRoute implements the IPv6 OSPF protocol described in RFC 2740 (OSPF for IPv6) and the IPv6 RIP protocol described in RFC 2080 (RIPng for IPv6).

The new MPRoute server removes the limit of four equal-cost paths and allows the generation of up to 16 equal-cost routes to a destination, thus providing improved load-balancing support.

For IPv4, MPRoute supports the RIP version 1, RIP version 2, and OSPF routing protocols. You can send RIP version 1 or RIP version 2 (but not both at the same time) on a single interface. However, you can configure a RIP interface to receive both versions of RIP. For IPv6, MPRoute supports the IPv6 OSPF and IPv6 RIP protocols.

MPRoute is the routing server recommended for use with TCP/IP for z/VM. IBM plans to remove the RouteD server from a future release of z/VM, and z/VM V5.2 is planned to be the last release on which this server will be available.

By using MPRoute, greater efficiency may be achieved within an IP network, and manual network routing table updates may be reduced or eliminated.

For more information, see the *z/VM: TCP/IP Planning and Customization*.

[V5.2] Improved Problem Determination for Guest LANs and Virtual Switches

z/VM V5.2 virtualizes a LAN sniffer to capture network traffic on a z/VM guest LAN or virtual switch. This capability helps an administrator (or the owner of the guest virtual machine) to capture network data to resolve virtual networking problems. The use of this sniffer function is predicated on the setting of the proper authorization controls. As with other potentially sensitive functions, LAN sniffer authorization is under the control of the system administrator, not of general users or guests.

running on the system. Capabilities are provided to capture and process the data for both Linux and traditional environments:

- Native Linux tracing capability on a guest LAN or virtual switch

When a Linux guest is deployed, traffic can be traced, recorded, and analyzed by existing tools directly from the guest virtual machine. This Linux guest must be authorized to use this capability through CP commands. The authorized guest can then use CP commands or the Linux device driver (when available) to put the guest NIC in “Promiscuous Mode”. The collected data can be printed or written to a file using tools such as **tcpdump** (available with Linux for System z) to determine the causes of the network problems

- Native z/VM tracing capability on a guest LAN or virtual switch

LAN traffic can be traced, recorded, and analyzed using native z/VM facilities. This function is authorized only to users with Class C privileges. The CP TRSOURCE command has been enhanced to trace and record the data transmissions, which can be analyzed with a new IPFORMAT tool to determine the causes of network problems.

The following CP command has been added:

- SET NIC

The following CP functions have been updated:

- QUERY LAN command
- QUERY VSWITCH command
- QUERY TRSOURCE command
- SET LAN command
- SET VSWITCH command
- TRACERED utility
- TRSOURCE ID command

For more information, see:

- *z/VM: Connectivity*
- *z/VM: CP Commands and Utilities Reference*

The optional RACF for z/VM feature for z/VM V5.2 provides the ability to control promiscuous mode authorizations for guest LANs and virtual switches.

[V5.2] Predefined VSWITCH Controllers

There is no longer a need to define and configure z/VM TCP/IP stacks to be available to control virtual switch connections to real LAN segments. Two controllers, DTCVSW1 and DTCVSW2, are predefined for you.

You can remove this capability from existing stacks by deleting the VSWITCH CONTROLLER statement from your TCP/IP configuration files. If you do this, make sure that you do not have any VSWITCH definitions that specify CONTROLLER *userid* for those stacks. Instead, allow them to default to CONTROLLER*.

[V5.2] SSL Server Upgrade

The SSL server included in TCP/IP for z/VM, level 520, supports the following Linux distributions:

- SUSE SLES8 Service Pack 3 (31-bit)
- SUSE SLES9 Service Pack 2 (31-bit)
- SUSE SLES9 Service Pack 2 (64-bit)
- Red Hat Enterprise Linux AS V3 (31-bit)

Connectivity and Networking

- Red Hat Enterprise Linux AS V3 (64-bit)
- Red Hat Enterprise Linux AS V4 (31-bit)
- Red Hat Enterprise Linux AS V4 (64-bit)

Additionally, this upgraded SSL server includes:

- A variety of industry-standard encryption algorithms, including DES, triple-DES, RC2, and RC4, with keys up to 128 bits in length. Hashes are provided by SHA-1 and MD5.
- Certificate activation and removal without server restart.
This capability allows a new certificate to be added or an existing one to be deactivated while existing SSL-secured sessions are active, removing the need to shut down and restart the SSL server when certificates are added or deleted.
- Federal Information Processing Standard (FIPS 140-2) operational mode support.
The SSL server may be operated in FIPS mode, restricting connections to those that employ FIPS-approved cipher suites.

[V5.2 (VM63952)] IPv6 HiperSockets Support

z/VM V5.2 allows the z/VM TCP/IP stack to be configured for IPv6 networks connected through HiperSockets operating in QDIO mode. The stack can be configured to provide static routing of IPv6 packets and to send IPv6 Router Advertisements. The NETSTAT command has been updated to support IPv6 for HIPERS devices. The LINK for HiperSockets, GATEWAY, HOME and ROUTERADV configuration statements have been updated.

For more information, see:

- *z/VM: TCP/IP User's Guide*
- *z/VM: TCP/IP Planning and Customization*

[V5.2] Removal of OSA-Express Port Sharing Restriction on System z9

In OSA-Express on zSeries servers (z990, z890, z900, and z800), port sharing is supported only between LPARs or virtual switches that are of the same transport mode, Layer 2 with Layer 2 or Layer 3 with Layer 3. Attempted communications between a Layer 2 virtual switch and a Layer 3 virtual switch sharing the same OSA-Express adapter on a zSeries server will result in a network timeout condition. This restriction has been removed for System z9 servers. For more information, see *z/VM: Connectivity*.

System Administration and Operation

This section describes changes that can affect how you manage the administration and operation of VM and guest operating systems.

Note: Enhancements in TCP/IP administration are described under “Connectivity and Networking” on page 39.

[V2.2] Year 2000 Support

VM/ESA V2.2 provides support for the year 2000 and beyond. CP and CMS commands that accept dates as input or display dates as output have been enhanced to support dates with 4-digit years. In addition to commands, CMS Pipelines and application program interfaces such as REXX and CSL routines have been enhanced to support dates with 4-digit years. Existing dates consisting of 2-digit years are resolved with correct 4-digit year information. A new CSL routine,

DateTimeSubtract, has been added to assist users in modifying their user-written programs to work with 4-digit date support. The TOD clock support is also enhanced to aid in IPLing a VM system in the year 2000 or later.

The capability to set a default date format for CP and CMS commands is provided on a system-wide basis and also on a user (virtual machine) basis. A new system configuration statement, SYSTEM_DATEFORMAT, sets the system-wide default date format. A new directory control statement, DATEFORMAT, sets the default date format for a user (virtual machine). Two new CP commands, SET DATEFORMAT and QUERY DATEFORMAT, set and query the default date formats for the system and individual users. Default date formats for the FILELIST and RDRLIST commands can also be set with the CMS DEFAULTS command.

Range of Dates Supported for Files

Minidisk files and SFS files support dates only in the range of 01/01/1900 to 12/31/2099.

Files on a Back Level File Pool Server

4-digit years are not supported on a file pool server from a VM release prior to VM/ESA V2.2. The new system will interpret all dates associated with a file on a back level server as 19yy, where yy is the 2-digit year.

Remote Systems That Are Not Year 2000 Ready

If a remote system that is not Year 2000 ready accesses minidisks on the new system, all the 4-digit years for existing files will appear to be 19yy, even if they have been created after 1999.

If you copy a file from a remote system to a minidisk or SFS directory on the new system using the OLDDATE option, the 4-digit year for the file may not be correct if the remote system is not Year 2000 ready. Therefore, an incorrect date might be propagated onto your system.

If you use the new system to create a file on a minidisk on a remote system that is not Year 2000 ready, the new system will see the correct 4-digit year.

Profiles for CMS Productivity Aids

If you have a pre-VM/ESA V2.2 XEDIT profile for FILELIST, RDRLIST, SENDFILE, or PEEK on your A-disk or in your search order accessed ahead of the system disk, some PF key functions may not work correctly with the new FULLDATE and ISODATE options. To ensure that the new date functions operate correctly, you should erase your old profiles and create new ones. The recommended method for customizing the operation of the PF keys for these commands (as well as other productivity aids that use profiles) is to build a user profile that first calls the profile from the system disk, followed by your customized changes. For more information, see Appendix A of the *z/VM: CMS Commands and Utilities Reference*.

[V2.2] CMS Productivity Aids Performance Enhancement

The CMS productivity aids FILELIST, RDRLIST, and PEEK have been rewritten from EXEC 2 to REXX and compiled. They have also been placed into the CMSINST logical saved segment, which has been moved above the 16 MB line. (See “[V2.2] HELPINST Saved Segment Replaced by HELPSEG and INSTSEG” on page 52.) This will improve the performance of these commands and also aid in the servicing of these parts.

[V2.2] HELPINST Saved Segment Replaced by HELPSEG and INSTSEG

The default CMS installation saved segment (CMSINST) and the HELP logical saved segment are no longer defined in a single physical saved segment called HELPINST. CMSINST is now defined in the INSTSEG physical saved segment, which has been moved above the 16 MB line. HELP is now defined in the HELPSEG physical saved segment, which is still located below 16 MB. This change provides more room for help files in the HELP saved segment.

More of the CMS productivity aids (execs and XEDIT macros that reside on the S-disk) have been added to CMSINST. For a list of the contents of CMSINST, see the CMSINST LSEG file.

To allow CMSINST to be moved above 16 MB, execs included in CMSINST that were formerly written in EXEC or EXEC 2 have been rewritten in REXX. If you have user modifications to any of these rewritten execs, you must rewrite your modifications in REXX. You cannot add EXEC or EXEC 2 execs to CMSINST. If you have EXEC or EXEC 2 execs you want to provide in a logical saved segment, you must add them to a segment that is loaded below 16 MB.

[V2.2] Removable Media Services Free Drive Support

DIAGNOSE code X'254', Access Real Subsystem, allows the Removable Media Services (RMS) virtual machine to issue nondrive dependent I/O to a 3494 or 3495 tape library subsystem, without requiring the DFSMS/VM RMS machine to have a CP-attached tape drive. For more information, see *z/VM: CP Programming Services*.

[V2.2] SFS AUDIT Enhancement

You can now specify AUDIT OFF CLOSE *fn ft* or AUDIT CLOSE *fn ft* to create a file to capture a “snapshot” of the security audit trace file. This prevents overwriting the security audit trace file and allows you to get audit information while auditing remains on. For more information, see *z/VM: CMS File Pool Planning, Administration, and Operation*.

[V2.3] Additional Year 2000 Support

VM/ESA V2.3 provides extended support for year 2000 and beyond. A new CMS pipelines stage called DATECONVERT allows date conversion, validation, and windowing functions. It supports all of the REXX date formats, plus additional formats. It is a powerful front-end to the DateTimeSubtract CSL routine. There are two new data migration and testing aid commands: FIXCENT and FILESERV FIXCENT. These commands can be used to set the internal century information stored with minidisk and SFS files. Note that this is not needed as part of the general processing. There is a new conversion command that converts dates in the user's NETLOG file called NETLCNVT as well as message display enhancements to the NETDATA command. When IPLing VM, the 'SET DATE' prompt has been enhanced to accept 4-digit year dates.

For more information, see:

- *z/VM: CMS Pipelines Reference*
- *z/VM: CMS Commands and Utilities Reference*
- *z/VM: CMS File Pool Planning, Administration, and Operation*

[V2.3] ISO Date Used in Default CMS IPL Heading

The date field in the default CMS IPL heading has been changed to ISO format (yyyy-mm-dd). Each time you IPL CMS, a heading is displayed to identify the VM release level and time stamp of the CMS system being IPLed. A default heading is constructed when the CMS system is generated if the VERSION= parameter in the DEFNUC macro is specified without a value (which is the default).

[V2.3] Logical Device Limit Relief

Support has been added to CP to let you to change the maximum number of logical devices allowed on the system. The old limit of 4096 devices is now the default, but you can use the new CP SET MAXLDEV command to reset the limit up to 32768 devices. The new QUERY MAXLDEV command allows you to determine the current setting.

[V2.3] Allocation of Real Storage for Segment Tables

To represent the virtual storage for each primary address space (virtual machine) larger than 32 MB and each nonprimary address space (data space), CP creates segment tables in real storage:

- For each virtual machine larger than 32 MB but less than or equal to 1024 MB, one real storage frame is allocated for the segment table.
- For each data space less than or equal to 1024 MB, one real storage frame is allocated for the segment table.
- For each virtual machine or data space larger than 1024 MB, two consecutive real storage frames are allocated for the segment table.

CP creates the segment table at the start of the storage frame. But in previous releases, the entire storage frame was allocated for the segment table regardless of the actual size of the table. This could have resulted in constraints on real storage availability if large numbers of virtual machines had arbitrarily large storage sizes, or were allowed to create many data spaces and/or very large data spaces, or loaded saved segments or saved systems defined at very high addresses outside the virtual machines.

On the new system, although real storage frames are still nominally allocated for the segment tables as indicated above, only the actual amount of real storage necessary to contain the segment tables is used. Any storage remaining beyond the end of a segment table may be used for CP free storage.

[V2.3] TCP/IP Awareness

Support has been added to the following CP functions to detect TCP/IP addresses and include those addresses in queries and responses:

- QUERY LDEVS command
- QUERY VIRTUAL CONSOLE command
- DIAGNOSE code X'7C' (Logical Device Support Facility)
- CP accounting records
- Access control interface (ACI)

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Programming Services*

Changes to Accounting Records for TCP/IP

The formats of the CP accounting records for journaling (Record types 04, 05, 06, and 08) have been changed to supply TCP/IP data, as indicated in Table 3.

Table 3. Changes to Accounting Records for TCP/IP Awareness

Record	Release	Columns	Contents
04	Old	57-70	Reserved
		71-78	LUNAME for SNA terminal
	New	57-62	Reserved
		63-70	Network qualifier for SNA terminal or host virtual machine name for TCP/IP terminal
		71-78	LUNAME for SNA terminal or IP address for TCP/IP terminal
05	Old	58-70	Reserved
		71-78	LUNAME for SNA terminal
	New	58-62	Reserved
		63-70	Network qualifier for SNA terminal or host virtual machine name for TCP/IP terminal
		71-78	LUNAME for SNA terminal or IP address for TCP/IP terminal
06	Old	61-70	Reserved
		71-78	LUNAME for SNA terminal
	New	61-62	Reserved
		63-70	Network qualifier for SNA terminal or host virtual machine name for TCP/IP terminal
		71-78	LUNAME for SNA terminal or IP address for TCP/IP terminal
08	Old	29-64	Reserved
	New	29-48	Reserved
		49-56	LUNAME for SNA terminal or IP address for TCP/IP terminal
		57-64	Network qualifier for SNA terminal or host virtual machine name for TCP/IP terminal

Changes to the ACI for TCP/IP

In the access control interface (ACI) to an external security manager (ESM), the ACIPARMS control block has been changed. In the ACIPARMS parameter list for authorization checking on the LOGON command, a new ACILOGIP option can be set under ACILGOPT (if the ACILOGCL option is also set) to indicate a logical terminal with an IP address. The IP address is specified in ACITRMID.

[V2.3] IPLing with the NODIRECT Option

When you IPL your new system with the NODIRECT option, the OPERATOR user ID is logged on in ESA mode with 2047 MB of virtual storage. In releases prior to VM/ESA V2.3, OPERATOR was logged on in 370 mode with 32 MB of virtual storage.

[V2.3] Product Enablement Support

You can use the CP SET PRODUCT command and the PRODUCT configuration statement to define products and features to your VM system and to determine whether the product or feature can run on that system. You can then use the CP QUERY PRODUCT command to display information about the products that are defined to the system. You can also use DIAGNOSE code X'27C' to request information about the enablement status of a single product or feature.

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Programming Services*

[V2.4] Dynamic CP Exits

You can define CP exit points dynamically using the DEFINE EXIT command or system configuration statement. A dynamic CP exit point behaves just like a formally-defined exit point, except that its ability to influence subsequent processing in the module containing the exit point is limited, and it does not carry over an IPL. Dynamic exits provide a convenient way to collect diagnostic or other information or to handle many situations in which the flow of control of a CP module does not need to be changed extensively.

The MODIFY EXIT command or system configuration statement allows you to change the definition of an existing dynamic CP exit point or remove it from the system. The QUERY EXITS command has been enhanced to display additional information about a dynamic exit: exit location, characteristics, and parameter definitions.

For more information, see:

- *z/VM: CP Exit Customization*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Planning and Administration*

[V2.4] Euro Support

Support has been added to the following:

- Almost 200 new translation tables have been added to VM TCP/IP.
- A new CSL routine, DTCXLATE, provides an application programming interface (API) for programs to use the translation information contained in the TCP/IP translation tables.
- OPENVM GETBFS and PUTBFS commands were updated, increasing the number of code pages that could be specified.
- The FTP server and VM/ESA V2.3 TCP/IP FL310 NFS feature have been updated to allow specification of particular translation tables.
- Language Environment 1.6 and 1.8
- LANRES
- LFS
- The TCP/IP LPR client and LPD server applications have been enhanced to provide users with the ability to specify alternate translation tables.
- RSCS LPR/LPD
- SMTP

Administration and Operation

For more information, see the euro link on the VM euro web page:

<http://www.ibm.com/eserver/zseries/zvm/euro/>

[V3.1] CP Nucleus

An IPLable CP nucleus is no longer supported. Only a nucleus load module may be used to hold CP nucleus code.

z/VM now provides two CP images:

- 32-bit

You can IPL this CP image on an ESA/390 or z/Architecture server.

- 64-bit

You can IPL this CP image only on an z/Architecture server.

A dual-image CP is also provided with z/VM. If the dual-image CP is installed, it automatically determines at IPL if the server is z/Architecture-capable. If it is, the 64-bit CP image is loaded; otherwise, the 32-bit CP image is loaded. This can be overridden on the IPL to load the 32-bit CP on a z/Architecture server.

[V3.1] CP Exit Modifications

CP exits may need to be modified for correct operation. For more information, see *z/VM: CP Exit Customization*.

[V3.1] High Level Assembler V1.4

The IBM High Level Assembler V1.4 is required for:

- Installation:
 - Adding devices that cannot be sensed (updating HCPRIO ASSEMBLE)
 - Local modifications
- Servicing the CP Loader (HCPLDR)
- Assembling any CP modules
- Using CP exit routines

[V3.1] RIO370

RIO370 is no longer supported.

[V3.1] 64-Bit Support

z/VM provides support for 64-bit addressing in:

- Storage configuration
- Display/dump/store of storage, registers, and PSWs
- Tracing

Storage Configuration

The CP DEFINE STORAGE command allows larger extents and discontinuous storage definitions. The display of the configurations has been changed.

Two new Directory Control Statements, STORAGE and MAXSTORAGE, allow you to define a default and a maximum virtual storage size for users.

The USER statement now allows a maximum storage of 16 exabytes.

Display/Dump/Store

All commands for displaying, dumping, or storing data or registers accommodate larger registers and storage areas.

Tracing

Trace commands show new instructions, larger registers, PSWs, and storage areas. The new TRACE GG command allows you to trace changes in general-purpose registers for either a 64-bit or a 32-bit image of CP.

[V3.1] Graphical User Interface Facility Changes

The following changes have been made to the Graphical User Interface (GUI) Facility:

- The GUI workstation agents, along with their Help files, are not shipped with z/VM. They are available with limited support from the VM Download Library at: www.ibm.com/eserver/zseries/zvm/download/
- The CMSDESK application modules and message repository are also available as part of the GUI package from the VM Download Library.
- The CMSDESK command and nucleus routines remain in CMS. Documentation is available from the GUI download package. To use these functions, you must download the workstation agents and GUI modules and put them on a CMS minidisk or SFS directory.

[V3.1] VMLINK Improvements

The VMLINK command has been overhauled with both code and documentation changes. Many enhancements and some additions were made to increase the usability of this command:

- Changes were made to better validate some of the values in the VMLINK CONTROL file.
- The PUSH and POP options were changed to ensure the behaviors were consistent and could be documented.
- File mode support was made more complete and the documentation lists all the supported file mode definitions.
- Previously, when multiple INVOKE commands were processed and one or more failed, it was difficult to determine which ones failed because only one message and one return code were issued. VMLINK has been updated to return an error message and return code for each failing INVOKE command.
- Previously, the parameters passed to exits were automatically upcased before the exit was called. These parameters will now remain in the case entered by the user, allowing mixed-case strings to be passed.
- The .EX and .PX VMLINK variables have been added to complete support for all possible NAMES file tags to be retrieved.
- Messages displayed when disks and directories are detached and released were changed for consistency.
- Message DMS2062I has been improved to include the name of the nickname which is being used when the QUERY option is being processed. This can be especially useful when more than one nickname is specified.
- The documentation has been completely reorganized. Guide information has been removed from the command description in the *z/VM: CMS Commands and Utilities Reference* and moved to the *z/VM: CMS User's Guide*.

[V4.1] Vector Facility Support

CMS support for the Vector Facility has been removed.

[V4.1] 370-Mode Virtual Machines Not Supported

z/VM no longer supports 370-mode virtual machines. However, the 370 Accommodation Facility allows many CMS applications written for 370 virtual machines to run in XA, ESA, or XC virtual machines. For more information about the 370 Accommodation Facility, see *z/VM: CP Programming Services*.

If a user attempts to define a 370-mode virtual machine, the following will occur:

- If a user issues the SET MACHINE 370 command, the command is rejected and message HCP1016E is issued.
- If a user with a MACHINE 370 statement in their directory logs on, the logon continues, but the virtual machine is defined as XA-mode. In addition, CP's 370 accommodation support (370ACCOM) is set ON and message HCP1512E is issued. Note that doing certain operations, such as resetting the system or defining storage, will set 370ACCOM OFF.

[V4.1] Fast CCW Translation

A new fast channel control word (CCW) translator has been provided that targets Network Adapter channel programs. This enhancement improves performance of I/O to network adapters, allowing any guest, such as Linux for S/390, to take advantage of this new fast-CCW translation processes, which improves I/O performance by reducing CP overhead.

[V4.1] Enhanced Page Fault Handling for Guests

Page fault handling support within CP has been enhanced to allow 31-bit or 64-bit guests to take full advantage of page fault notifications, allowing the guest to continue processing while the page fault is handled by CP.

[V4.1] System Default Language Set Dynamically

All of the IBM-translated languages are now included in CP. You can set the system default language by specifying the CPLANGUAGE operand on the USER_DEFAULTS statement in the system configuration file. You no longer have to rebuild CP to change the system default language. You can dynamically change the default language on the running system by using the SET CPLANGUAGE command.

[V4.2] SET OBSERVER Support

This support allows one virtual machine to observe the console activity of another without affecting the behavior of the observed machine. The following CP functions have been added or updated:

- SET OBSERVER command
- QUERY OBSERVER command
- SET SECUSER command
- CONSOLE directory control statement

[V4.2] DDR Compression

The LZCOMPACT option has been added to the I/O Definition Control Statement for the DDR command to allow users to select an alternate compression algorithm.

[V4.3] Automated Shutdown Support

By virtualizing a hardware interface, automated shutdown enables guests to shut themselves down when signaled to do so by a CP command. This support is exploited by z/VM when running as a guest and can also be exploited by other guest operating systems. The amount of elapsed time during which a guest is allowed to process a termination signal is limited by a timeout interval. automated shutdown can also be used to cause z/VM itself to shut down when a hardware event (for example, deactivation of the logical partition) is initiated while z/VM is active. In this situation, guest virtual machines may, at customer discretion, be given an opportunity to shut themselves down before z/VM terminates.

The following new CP functions have been added for this support:

- SET SIGNAL system configuration statement
- QUERY SHUTDOWNTIME command
- QUERY SIGNAL command
- QUERY SIGNALS command
- SET SHUTDOWNTIME command
- SET SIGNAL command
- SIGNAL command

The following CP commands have been updated:

- FORCE
- SHUTDOWN

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V4.3] Enhanced Timer Management

The performance of CP timer management has been improved for environments where a large number of requests are scheduled, particularly for short intervals, and where timer requests are frequently canceled before they become due. A system with large numbers of Linux or z/OS guests with certain workloads would be an example of such an environment. Master-processor overhead has been reduced by allowing timer events to be handled on any processor. Also, clock comparator settings are now tracked and managed across all processors to eliminate duplicate or unnecessary timer interruptions.

[V4.3] Improved Utilization of Large Real Storage

System performance may be improved with better utilization of large real storage when Expanded Storage is unavailable, full, or nearly full while CP is replenishing its available-page list. This is accomplished by moving pages to storage above the 2 GB line when:

- Pages would otherwise go to DASD
- No Expanded Storage has been made available
- Expanded Storage is not available when requested
- Excess storage is available above the 2 GB line

[V4.3] Shared Tape Support

Shared tape support allows multiple guest operating systems to serially share the same tape device (IBM 3424, 3480, 3490, or 3590). It removes the need to manage the movement of a dedicated tape device from one guest to another, because the

tape device can now remain attached to several guests concurrently. This support is intended for z/OS, z/OS.e, and OS/390 guests that use ATS Star or IEFAUTOS for automatic tape switching. In principle, however, it will work for any guest that manages its own assignment of tape devices. Traditionally, a tape device would be attached to such a guest with the CP ATTACH command using the NOASSIGN option. This support is not intended for CMS unless some external means of managing assignments or serializing access to the tape device among the sharing users is explicitly implemented.

The MULTIUSER option has been added to the CP ATTACH command and the DEDICATE directory control statement to specify that a tape device is to be shared. The QUERY ALL, QUERY (Real Device), and QUERY TAPES commands have been enhanced to return information about which tape devices are attached MULTIUSER. Assign and Unassign CCWs are simulated for tape devices attached MULTIUSER so that guests running under the same VM image can serialize access to the tape devices they share. The ALL option has been added to the CP DETACH command to allow removal of a shared tape device from all sharing guests with one command invocation. Third party assignment and multiple system assignment (Control Access CCW) are not supported.

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V4.3] Virtual Machine Accounting Improvements

CP has been enhanced with additional capability to account for the use of system resources by virtual machines, including those running Linux. A new accounting record is produced that tracks a virtual machine's use of virtual network resources, including virtual channel-to-channel adapters (CTCAs), inter-user communication vehicle (IUCV) or advanced program-to-program (APPC) connections, and virtual (guest LAN) network interface cards (NICs).

The following CP functions have been updated:

- DEFINE LAN system configuration statement
- VMLAN system configuration statement
- OPTION directory control statement
- ACNT command
- DEFINE LAN command
- QUERY LAN command
- QUERY VMLAN command
- SET LAN command
- SET VMLAN command
- DIAGNOSE code X'4C' (Generate Accounting Records)
- Accounting records — Accounting Records for Network Data Transmissions (Record Type 0C) has been added.

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Programming Services*

[V4.3] Virtual Machine Resource Manager

The Virtual Machine Resource Manager (VMRM) provides z/VM functions to:

- Manage guest performance

Capabilities have been added that allow z/VM to manage guest performance to meet customer-defined goals. A new service virtual machine (SVM) accepts customer-defined workload definitions, goal specifications, and associations between them. The SVM then adjusts virtual machine CPU and I/O performance controls based on actual performance measurements to attempt to achieve the goals associated with each workload.

- Exploit I/O Priority Queueing

I/O management facilities have been added that enable z/VM to exploit the hardware I/O Priority Queueing facility to prioritize guest and host I/O operations. A virtual equivalent of the hardware facility is provided, allowing virtual machines running guest operating systems such as z/OS that exploit I/O Priority Queueing to determine the priority of their I/O operations within bounds defined by a new CP command. z/VM will automatically set a priority for I/O operations initiated by virtual machines that do not exploit this function.

The following CP functions have been added for this support:

- IOPRIORITY directory control statement
- QUERY IOPRIORITY command
- SET IOPRIORITY command

For more information, see:

- *z/VM: Performance*
- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V4.4] Automated SFS Shutdown

Utilizing the automated shutdown support added in z/VM V4.3, SFS file pool servers now shut down automatically when CP is shut down. This function helps ease z/VM system administration and helps maintain the integrity of the SFS and its data.

The new SHUTDOWN SIGNAL start-up parameter (the default) enables an SFS file pool server to receive a shutdown signal from a CP SHUTDOWN, FORCE, or SIGNAL command. When an enabled SFS file pool server receives this shutdown signal from CP, the file pool operator STOP command (with no operands) is automatically issued to shut down the server before CP shuts down. To override this automation, the NOSHUTDOWN SIGNAL start-up parameter must be explicitly specified in the SFS file pool server's DMSPARMS file. For more information, see *z/VM: CMS File Pool Planning, Administration, and Operation*.

Message DMS3108I is issued to indicate that the SFS server is stopping as the result of a signal from CP. Message DMS3109I is issued at SFS initialization if the SFS server is not enabled to receive a shutdown signal from CP. For more information, see *z/VM: CMS and REXX/VM Messages and Codes*.

[V4.4] CP Command Response Suppression

The CP SILENTLY command executes another CP command and suppresses its responses, if that command is so enabled. A command is enabled for response suppression by specifying the SILENT option on the DEFINE COMMAND / CMD or

Administration and Operation

MODIFY COMMAND / CMD command or system configuration statement. Response suppression is supported only for the ATTACH, DETACH, and GIVE commands.

The following CP function has been added for this support:

- SILENTLY command

The following CP functions have been updated:

- DEFINE COMMAND / CMD system configuration statement
- MODIFY COMMAND / CMD system configuration statement
- DEFINE COMMAND / CMD command
- MODIFY COMMAND / CMD command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V4.4] Guest IPL from SCSI Disks

z/VM allows IPLing from FCP-attached SCSI disks for Linux and other guest operating systems that contain support for IPLing from FCP-attached SCSI disks, when z/VM is running on a z990, z900, or z800 server equipped with the function for IPLing from FCP-attached SCSI disks. When this hardware function is available, Linux guests can be started and run completely from FCP-attached SCSI disks in your hardware configuration. z/VM continues to require ESCON-attached or FICON-attached disk or tape for its own IPL and other functions.

The following new CP functions have been added for this support:

- LOADDEV directory statement
- QUERY LOADDEV command
- SET LOADDEV command

The following CP functions have been updated:

- IPL command

The following new Directory Maintenance Facility functions have been added:

- LOADDEV command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: Directory Maintenance Facility Commands Reference*

[V4.4] Hardware Configuration Definition and Hardware Configuration Manager for z/VM

Hardware Configuration Definition and Hardware Configuration Manager for z/VM (HCD and HCM for z/VM) provides a comprehensive I/O configuration management environment similar to that available with the z/OS operating system. The HCD and HCM programs work together to help you create and manage the hardware and software aspects of your z/VM I/O configuration.

HCM runs on a Windows-based personal computer connected to the z/VM system through TCP/IP. HCM provides a graphical user interface (GUI) as well as

commands to help you configure your system. You provide the I/O-configuration information to HCM, which processes the information and passes it to HCD.

HCD runs in a z/VM server virtual machine and performs the work of actually creating and changing the hardware and software aspects of your I/O configuration. HCM provides the primary user interface to HCD, but HCD provides a backup user interface on your z/VM host for certain I/O configuration tasks and for when HCM is not available.

HCD and HCM for z/VM can be used to create and manage the hardware aspects of the I/O configuration definition for all of the LPARs in your zSeries or S/390 server. For the software aspects, HCD and HCM for z/VM creates and manages the I/O configuration definition for only the z/VM system on which it is running. The software aspects of the I/O configuration definition for operating systems in other LPARs are handled by those operating systems.

HCD and HCM for z/VM provides an easy-to-use alternative to z/VM's existing method of I/O configuration using the I/O Configuration Program (IOCP) and CP's dynamic-I/O configuration commands. The two methods are not intended to be used together, so you should choose one method or the other for your installation.

The following new CP functions have been added for this support:

- QUERY HCD command
- DISABLE HCD command
- DIAGNOSE code X'2AC' – HCD Dynamic I/O

The following CP functions have been updated:

- IODF system configuration statement
- SET IPLPARMS command

For more information, see *z/VM: I/O Configuration*.

[V4.4] HELP Facility Enhancements

The HELP Facility has been enhanced as follows:

- Help files are now provided for all z/VM TCP/IP commands and subcommands. The following new HELP components have been defined for TCP/IP:

BOOTPD	BOOTP server administrative (BOOTPD command) subcommands
DHCPD	DHCP server administrative (DHCPD command) subcommands
DNS	DNS server administrative commands
GDDMXD	GDDMXD/VM interface subcommands
IMAPADM	IMAP server administrative commands
LPD	LPD administrative commands
MROUTE	MROUTE server administrative commands
NFS	NFS server administrative commands
RTE	RouteD server administrative commands
SMTP	SMTP server administrative commands
SNMP	SNMP administrative commands
SSLADMIN	SSL server administrative commands

Administration and Operation

TCPIP	TCP/IP commands and related functions
TELNET	Telnet protocol client subcommands
TFTD	TFTP server administrative (TFTPD command) subcommands
TFTP	TFTP client (TFTP command) subcommands
UFTD	UFT server administrative (UFTD command) subcommands
X25IPI	X.25 interface administrative commands

You can access the top level of help for TCP/IP by entering one of the following commands:

```
help tcpip menu
help tcpip task
```

Menus are also provided for each of the new HELP components listed above.

Note: For two of the new TCP/IP HELP components, the menu name is different from the component name:

- The menu for the RouteD server administrative commands is ROUTED HELPMENU (not RTE HELPMENU).
 - The menu for the TFTP server administrative (TFTPD command) subcommands is TFTPD HELPMENU (not TFTD HELPMENU).
- A new HELP component, LE, has been defined for the Language Environment component. Help files are provided for the following Language Environment commands:
 - C370LIB
 - CMOD
 - CPLINK
 - GENXLT
 - ICONV
 - LINKLOAD

An LE HELPMENU file is also provided.

- Help for privileged CP commands (formerly HELP component CPOTHER) has been merged with the nonprivileged CP commands (HELP component CP). This can make it easier to display the help file for a CP command, because you do not need to know whether the command is privileged when you enter the HELP command. For example, to display the help file for the ATTACH command (privilege class B), previously you had to enter:

```
help cpothier attach
```

Now, to display the help file for the ATTACH command, enter:

```
help cp attach
```

To display a menu of help for all CP commands, enter:

```
help cp menu
```

[V4.4] Linux Guest Capacity Improvements

Improvements to the CP scheduler increase the number of Linux and other guest virtual machines that can be managed concurrently. While this increase in capacity can be experienced on all zSeries hardware configurations, it may be more dramatic on larger n-way servers. The scheduler lock is used to serialize scheduler activities, timer request block management, and processor local dispatch vector

(PLDV) management. Because contention on the lock is lowered by creating a new lock for timer request block management, CP overhead can be decreased.

[V4.4] Performance Toolkit for VM

The Performance Toolkit for VM is offered as an optional feature of z/VM. Derived from the FCON/ESA program (5788-LGA), the Performance Toolkit is designed to assist system operators, systems programmers, and performance analysts in the following areas:

- Operation of the system operator console in full-screen mode
- Management of multiple z/VM systems (local or remote)
- Post-processing of Performance Toolkit history files and VM monitor data captured by the MONWRITE utility
- Viewing of performance monitor data using either web browsers or PC-based 3270 emulator graphics
- TCP/IP performance reporting

In addition to analyzing VM performance data, the Performance Toolkit processes Linux performance data obtained from the Resource Management Facility (RMF™) Linux performance gatherer, **rmfpms**. The **rmfpms** application is available from the zSeries web site at <http://www.ibm.com/zseries/zos/rmf/rmfhtmls/pmweb/pmlin.htm>. The Linux performance data obtained from RMF can be viewed and printed in a mannner similar to the presentation of VM data.

For detailed information, refer to *z/VM: Performance Toolkit*.

Although the RealTime Monitor (RTM) and Performance Reporting Facility (PRF) optional features continue to be supported in z/VM V4.4, IBM plans to make future performance management enhancements primarily to the Performance Toolkit. IBM plans that z/VM V4.4 will be the last release in which the RTM and PRF features will be available with z/VM, and plans to withdraw both the RTM and PRF features from marketing in a future z/VM release.

[V4.4] VMRM Enhancements

VMRM has been enhanced to provide the infrastructure necessary to support more extensive workload and systems resource management features that may be delivered in future releases of z/VM. To accomplish this objective, the following have been added:

- Extended syntax for user ID specification in the VMRM configuration file.
In the WORKLOAD statement, a new wildcard character (*) allows matching up to seven characters of a user ID. For example, `WORKLOAD WORK1 USER user1 vmrm zvm*` would search for any user ID names starting with 'zvm' as the first three characters.
- Continuation of configuration file statements. Configuration file statements can be continued on multiple lines, using a comma as a continuation character at the end of the line being continued.
- Monitor Application Data Sample Records that now contain VMRM workload information.
- The ability to dynamically change the VMRM configuration file, in order to change workloads, workload characteristics, and performance goals, without manually stopping and restarting the VMRM service virtual machine.
- Improvements to debug messages, log file entries, and the format of the log file for better readability and serviceability.

Administration and Operation

- Performance improvements for searching through lists when analyzing monitor data.
- A SYNCHECK option on the IRMSERV command allows syntax checking of the configuration file.

For more information, see *z/VM: Performance*.

[V5.1] 370 Functions Removed

370 virtual machines are not supported on z/VM Version 4 or later. Obsolete operands, responses, and messages related to 370 virtual machines have been removed. The following CP functions have been modified:

- MACHINE directory control statement
- STORE PSW/CAW/CSW command
- CPFMTXA utility
- HCPLDR utility

[V5.1] Authorization Enhanced for Guest LANs and Virtual Switches

z/VM V5.1 enhances the authorization capabilities for z/VM guest LANs and virtual switches by using the Resource Access Control Facility (RACF) or any equivalent external security manager (ESM) that supports this new authorization function. It is designed to provide ESM-centralized control of authorizations and Virtual LAN (VLAN) assignment.

For more information, see:

- *z/VM: CP Planning and Administration*
- *Resource Access Control Facility: Security Administrator's Guide*

[V5.1] Contiguous Frame Management

Various algorithms in CP frame management have been adjusted to improve system performance and reduce hang conditions.

[V5.1] CP Functions Removed

z/VM V5.1 operates only on IBM servers that support the IBM 64-bit z/Architecture. Certain CP functions are not provided by z/VM V5.1:

- IPL from a 31-bit image of the CP nucleus
- Preferred (V=R and V=F) virtual machines
- Paging of the CP nucleus

The following CP commands have been removed:

- QUERY IOASSIST
- QUERY VRFREE
- QUERY V=R
- SET CCWTRAN
- SET IOASSIST
- SET NOTRANS

The following CP functions have been modified:

- CPXLOAD configuration statement
- STORAGE configuration statement
- DEDICATE directory control statement
- OPTION directory control statement
- ATTACH command

- AUTOLOG command
- COMMIT command
- CPXLOAD command
- DEDICATE command
- DEFINE command
- DESTAGE command
- DETACH command
- DISCARD PINNED command
- DUPLEX command
- FLASHCOPY command
- INDICATE PAGING command
- INDICATE USER command
- IPL command
- LOCATE (Storage) command
- LOCATE SYMBOL command
- LOCK command
- LOGON command
- MONITOR command
- QUERY CACHE command
- QUERY CACHEFW command
- QUERY CPLEVEL command
- QUERY DASDFW command
- QUERY DUMP command
- QUERY DUPLEX command
- QUERY FENCES command
- QUERY FRAMES command
- QUERY NVS command
- QUERY PINNED command
- QUERY (Real Device) command
- QUERY RSAW command
- QUERY SET command
- QUERY VIRTUAL CTCA command
- QUERY VIRTUAL DASD command
- QUERY (Virtual Device) command
- QUERY VIRTUAL DUPLEX command
- QUERY VIRTUAL GRAF command
- QUERY VIRTUAL LINES command
- QUERY VIRTUAL OSA command
- QUERY VIRTUAL PRINTER command
- QUERY VIRTUAL PUNCH command
- QUERY VIRTUAL READER command
- QUERY VIRTUAL TAPES command
- REDEFINE command
- RESET command
- SAVESEG command
- SET CACHE command
- SET CACHEFW command
- SET DASDFW command
- SET DUMP command
- SET IPLPARMS command
- SET NVS command
- SET SCMEASURE command
- SHUTDOWN command
- SYNCMDRS command
- TRACE command
- UNDEDICATE command

- UNLOCK command
- XAUTOLOG command
- DDR utility
- HCPLDR utility
- SALIPL utility
- DIAGNOSE code X'84'
- DIAGNOSE code X'90'
- DIAGNOSE code X'98'
- MDLATENT macro
- SYSRES macro
- SYSSTORE macro
- *RPI system service
- OPTIONS directive for CPXLOAD

[V5.1] Deploying Linux on zSeries with z/VM

A new book, *z/VM: Getting Started with Linux on zSeries*, SC24-6096, describes z/VM basics and how to configure and use z/VM functions and facilities to create and manage Linux servers running on zSeries processors. This book is designed to help systems personnel (system programmers, administrators, and operators) with limited knowledge of z/VM to deploy Linux servers on z/VM more quickly and more easily. The book provides some requirements and guidelines for z/VM installation, but for the most part assumes that you have installed z/VM and are ready to deploy Linux servers in z/VM virtual machines. Specific topics covered include:

- Configuring, administering, and servicing a z/VM system
- Configuring TCP/IP for z/VM
- Creating and cloning Linux virtual machines
- Setting up basic system automation
- Monitoring performance and capacity

[V5.1] HyperSwap Support

z/VM is providing a new HyperSwap™ function so that the virtual devices associated with one real disk can be swapped transparently to another. HyperSwap can be used to switch to secondary disk storage subsystems mirrored by Peer-to-Peer Remote Copy (PPRC). It may also be helpful in data migration scenarios to allow applications to use new disk volumes.

Geographically Dispersed Parallel Sysplex™ (GDPS®) 3.1 plans to exploit the new z/VM HyperSwap function to provide a disaster recovery solution for distributed applications, such as WebSphere®, that span z/OS images running natively and Linux guests running under z/VM. This disaster recovery solution requires GDPS, IBM Tivoli System Automation for Linux, Linux for zSeries, and z/VM V5.1.

To cover planned and unplanned outages, GDPS 3.1 is planning to provide the following recovery actions:

- In-place re-IPL of failing operating system images
- Site takeover/failover of a complete production site
- Coordinated planned and unplanned HyperSwap of storage subsystems transparently to the operating system images and applications using the storage

The following CP commands have been added:

- HYPERSWAP
- QUERY HYPERSWAP

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V5.1] Performance Toolkit Enhancements

The Performance Toolkit feature available with z/VM V4.4 included functional equivalence to the RealTime Monitor (RTM) optional feature. The Performance Toolkit has been enhanced in z/VM V5.1 by providing functional equivalence to the Performance Reporting Facility (PRF) optional feature, thereby eliminating the need for separate products (PRF and RTM) to help manage your performance more efficiently. Other new function includes:

- High-level Linux reports based on Application Monitor records from Linux guests
- Report for SCSI disks

For more information, see *z/VM: Performance Toolkit*.

z/VM HELP files are now provided for all Performance Toolkit commands and messages.

[V5.1] SCSI FCP Disk Support

z/VM V5.1 supports SCSI FCP disk logical units (SCSI disks) for both system and guest use. SCSI disks supported are those within an IBM ESS when it is connected to a fibre-channel (FC) fabric by zSeries FCP channels.

SCSI disks can be used directly by a guest operating system when an FCP subchannel is dedicated to the guest. Such a guest must provide its own SCSI device support. Linux for zSeries is designed to be one such guest.

SCSI disks can also be used as emulated 9336 Model 20 fixed-block-architecture (FBA) disks. z/VM CP and CMS rely almost exclusively on this emulated-FBA support for their SCSI use. Specifically, this use includes system paging, spooling, directory services, minidisks, and all other system functions and programming services that can use FBA disks. Guests that support FBA disks (such as CMS, GCS, RSCS, and VSE) also can use SCSI disks through the emulated-FBA support, without requiring their own SCSI support.

z/VM's SCSI support allows a Linux server farm to be deployed on z/VM in a configuration that includes only SCSI disks. ECKD disks are no longer required. Installation of z/VM from DVD to a SCSI disk, IPL from a SCSI disk using Stand-Alone Program Loader (SAPL), and z/VM system dumps to a SCSI disk are supported. DASD Dump/Restore (DDR) services using SCSI disks are supported when DDR is running under CMS.

z/VM supports an individual emulated FBA disk up to 381 GB in size. However, directory, paging, and spooling allocations must reside within the first 64 GB of a CP-formatted volume. Other kinds of CP allocations (TDSK, PERM, and PARM) may be defined beyond the first 64 GB.

The following new CP functions have been added for this support:

- EDEVICE system configuration statement
- DELETE EDEVICE command
- QUERY EDEVICE command
- SET EDEVICE command

Administration and Operation

The following CP functions have been updated:

- MDISK directory statement
- QUERY ALLOC command
- CPFMTXA utility
- DIRECTXA utility
- DISKMAP utility

Screen layouts for the following CMS functions have been adjusted to accommodate larger file and disk sizes:

- BROWSE command
- FLIST command
- SADT command
- DIRMAP utility
- QSYSOWN utility

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CMS Commands and Utilities Reference*

The Directory Maintenance Facility (DirMaint) feature has also been updated to support the larger disk sizes. Larger values may appear in the disk space reports generated by commands such as DIRMAP, FREEXT, and USEDEXT.

[V5.1] SPTAPE Command Removed

The SPTAPE command has been removed. The SPXTAPE command offers superior function and speed for backup and recovery of spool files. Backup tapes made with SPTAPE cannot be restored to a z/VM V5.1 or later system.

In addition, the following CP commands have been modified:

- QUERY ALL
- QUERY READER/PRINTER/PUNCH
- QUERY (Real Device)
- QUERY TAPES

[V5.1] System Administration Facility To Be Withdrawn

IBM intends to withdraw the System Administration Facility from a future release of z/VM. Customers using the System Administration Facility to create and manage Linux server images as guests of z/VM should start using other systems management facilities of z/VM, write a client application using the systems management APIs introduced in z/VM V4.4, or acquire a system management application from an IBM solution provider. (Also see “[V5.1] Deploying Linux on zSeries with z/VM” on page 68.) Documentation is available in the *z/VM: System Administration Facility* publication, SC24-6034, but this publication is not included in the z/VM V5.1 library.

[V5.1] FCP LUN Access Control by z/VM with Linux for zSeries Guests

z/VM V5.1 supports logical unit number (LUN) access control for SCSI FCP disks connected to a FICON Express on the z990 or z890. The LUN access control function of zSeries FCP channels is expected to provide added security for SCSI devices connected to a SAN. For a logical partition running z/VM V5.1, you can specify separate permissions for the z/VM system itself (when z/VM is using SCSI disks for system operations) and for each Linux for zSeries guest. In addition, if you

run a second-level z/VM V5.1 system, you can specify separate permissions for that system and for each of its Linux for zSeries guests.

The following CP functions have been updated for this support:

- DEDICATE directory control statement
- ATTACH command
- QUERY FCP command

For more information, see:

- *z/VM: CP Planning and Administration*
- *z/VM: CP Commands and Utilities Reference*

[V5.1] Large Disk Support on DS8000 and DS6000

On the DS8000 and DS6000, z/VM V5.1 supports the definition of emulated FBA disks (SCSI disks) up to 2,147,483,640 512-byte blocks (1 TB minus 1 page) in size. z/VM V5.1 also supports the definition of a 3390 Model 9 disk up to 65520 cylinders in size, with the exception of CMS and GCS, which allow access to a 3390 Model 9 up to 32767 cylinders.

CMS Minidisk Size Limitation

Because the CMS file system requires file status and control information to reside below 16 MB in virtual storage, there is a practical limitation on the size of CMS minidisks. As a minidisk increases in size, or more files reside on the disk, the amount of virtual storage associated with the disk for CMS file system status and control increases in storage below 16 MB. The current ECKD DASD limitation is 32767 cylinders for a 3390 disk on an IBM DASD subsystem, or about 22 GB of data. IBM suggests that customers defining FBA SCSI disks for use by CMS should set a practical limit of about 22 GB. If larger disks are defined, they should be limited to contain very few files, or the CMS file system may not be able to obtain enough virtual storage below 16 MB to format or access those disks. For more information, see the ACCESS command in the *z/VM: CMS Commands and Utilities Reference*. The maximum size for FBA SCSI disks supported for use by CMS or GCS is 381 GB.

[V5.1] Additional Performance Toolkit Enhancements

The Performance Toolkit supports:

- Monitor records created by the SUSE LINUX 2.6 kernel
- The collection of data on Queued Direct I/O (QDIO) activity, such as OSA-Express and FCP

For more information, see *z/VM: Performance Toolkit*.

[V5.2] 64-bit Exploitation

z/VM V5.2 further exploits the 64-bit addressing capability of IBM z/Architecture, providing major scalability improvements when operating on System z™ servers with large storage configurations. CP now uses storage above 2 GB for a much broader set of operations. Previously, guest pages had to be moved below 2 GB for many reasons. For example, guest I/O buffers for both standard I/O and QDIO, used for networking and FCP devices, were moved below 2 GB when an I/O operation was initiated. For QDIO, CP queue-control structures had to reside below 2 GB, as did guest queue-control structures, which were moved below 2 GB when needed. Now, I/O can be done using buffers anywhere in real storage, and QDIO structures can

reside above 2 GB, as can most CP control blocks. These improvements offer constraint relief for large-real-storage virtual-server environments that are storage-intensive.

Prior to z/VM V5.2, storage addresses in the system execution space (the address space in which CP executes) were identity mapped to real storage. That is, a logical storage address was identical to the real storage address. Now, only the CP nucleus and prefix pages are identity mapped. Most of the system execution space (also known as host logical storage) is dynamic. Frames in real storage are used to back host logical storage pages, but backing frames are not necessarily contiguous. Frames below 2 GB are used only when required, freeing CP to exploit backing frames above 2 GB for most operations. For more information about host logical storage, see *z/VM: CP Planning and Administration*.

The following CP functions have been added:

- LOCATE SXSTE command
- QUERY SXSPAGES command
- QUERY SXSSTORAGE command
- DIAGNOSE code X'290'

The following CP functions have been updated:

- DISPLAY (Host Storage) command
- DUMP (Host Storage) command
- INDICATE LOAD command
- INDICATE USER command
- LOCATE CMDDBK command
- LOCATE DGNBK command
- LOCATE FILID command
- LOCATE FRAMETBL command
- LOCATE ICLBK command
- LOCATE LDEV command
- LOCATE RDEV command
- LOCATE SHPBK command
- LOCATE SNABK command
- LOCATE SPFBK command
- LOCATE (Storage) command
- LOCATE SYMBOL command
- LOCATE VDEV command
- LOCATE VMDBK command
- LOCATE VSMBK command
- LOCATE XITBK command
- LOCK command
- QUERY CPCMDs command
- QUERY FRAMES command
- SET CPTRACE command
- SET RESERVED command
- STORE (Host Storage) command
- UNLOCK command
- DIAGNOSE code X'04'
- DIAGNOSE code X'90'
- DIAGNOSE code X'98'
- DIAGNOSE code X'250'

For more information, see:

- *z/VM: CP Commands and Utilities Reference*

- *z/VM: CP Programming Services*

The CP functions that produce hard and soft abend dumps and SNAPDUMPs have been enhanced to dump storage above 2 GB if such storage exists. Likewise, a standalone dump of a z/VM system or a VMDUMP of a virtual machine in z/Architecture mode can now include storage above 2 GB. See “[V5.2] 64-Bit Dump Support” on page 92.

In addition to these enhancements, other functions within z/VM have changed to take advantage of the removal of the 2 GB address-line constraint, including the following:

- **TCP/IP for z/VM:** Enhanced QDIO device driver to use I/O buffers above 2 GB when possible. This will help to increase system reliability by reducing contention for storage below 2 GB.
- **Block I/O (Diagnose X'250'):** Extended to allow a virtual machine to specify parameter addresses and I/O buffers with addresses above 2 GB. This will benefit operating systems that use DIAGNOSE code X'250' in a 64-bit environment.
- **VM Dump Tool:** Enhanced to support the new dump formats.

[V5.2] CP Storage Addressing and Module Linkage Changes

Exploitation of 64-bit addressing has resulted in fundamental changes to CP storage addressing and module linkage.

ATTENTION

Existing customer-written CP exits will most likely need to be updated and recompiled.

The following CP changes may affect customer-written CP exits:

Storage Addresses

A central storage address reference by CP is typically termed a host logical address, or HLA. HLAs map the system execution space (SXS), which is the address space where CP runs. CP control blocks, the CP nucleus, and files loaded with CPXLOAD are all mapped in the SXS and are addressed by HLAs.

The SXS is not called CP Virtual Storage, even though the HLA undergoes hardware dynamic address translation (DAT) to generate a host real address (HRA) and address prefixing in order to generate a host absolute address (HAA). You can ignore HRAs and HAAs unless the need for such an address is explicitly stated. For example, the HRA and HAA would be used for hardware addresses like CCW addresses. You can ignore CP Virtual Storage unless the need for such an address is explicitly stated. Generally, write your programs and refer to CP control blocks just like always.

Module and entry point attributes

Runtime attributes are extended to include PSW Translation Mode (PSW bits 16-17) and PSW Addressing Mode (PSW bits 31-32), called Tmode and Amode respectively. Specification of runtime attributes in HCPMDLAT or in the component ID macro xxxMDLAT dictates how the CP linkage macros (HCPCALL, HCPGOTO, HCPENTER, HCPEXIT, HCPLCALL, HCPLINTR, and HCPLEXIT) expand.

Formal entry requirements

Every formal execution entry into a module must be through an HCPENTER or HCPLINTR macro. The term “formal” means using HPCALL, HCPLCALL, or HCPGOTO. This includes HPCALL TYPE=INDIRECT, deferred HPCALLs, and deferred HCPGOTOs. Previously, you could stack (by calling HCPSTK, for example) a deferred transfer of control (that is, a deferred HPCALL or HCPGOTO) to an arbitrary location in a module. Now, that location must be defined by HCPENTER or HCPLINTR.

4 KB constraint relief

Module CSECTs are arranged (by use of High Level Assembler LOCTR statements) so that literal data (LORG data) and certain other macro-generated data are placed early in the CSECT. Relative-and-Immediate instructions are used extensively throughout CP, particularly in instructions generated by macros. These together mean that a single module base register frequently can be adequate for module addressability even when the module grows well beyond 4 KB in size. The HCPPROLG macro should specify a single base register, BASE=(R12).

Changes to CP linkage macros

In the HCPPROLG macro, the ATTR parameter no longer allows the DIRECTCALL and INDIRECTCALL keywords. The new HPCALL parameter is to be used (HPCALL=DIRECT or HPCALL=INDIRECT). Also, the TRSOURCE parameter is no longer allowed. The new RESTRICT parameter is to be used (RESTRICT=TRSOURCE).

In the HPCALL macro, the ATTR parameter may be used to specify only entry point attributes, not module running attributes.

MDLATENT macro restructure

The syntax of the MDLATENT macro has been extensively changed. Parameters previously retained only for compatibility (FULLREG and NUCLEUS) have been removed. Parameters have been added for specifying the addressing mode (Amode) and translation mode (Tmode). In addition, the relationship between module attributes and entry point attributes and how they are specified in MDLATENT have changed.

For more information about the changes to the CP linkage macros and MDLATENT, see *z/VM: CP Exit Customization*.

[V5.2] DirMaint Enhancements

The DirMaint, function level 510, optional feature has been enhanced as follows:

- A new SUBSCRIBE operand is added to the DIRMAINT command to manage subscriptions to directory updates. Specifically, you can now add new subscriptions, delete old subscriptions, and query existing subscriptions.
- New exits and configuration data files are added to create a more seamless interface between DirMaint and RACF/VM, for such functions as user creation and deletion, password management, POSIX segment management, ACI group management, permission requirement for facilities that require additional coordinated CP and RACF privileges, and discrete resource profile creation and deletion.
- Support for new systems management APIs (see “[V5.2] Enhanced Systems Management APIs” on page 87).

For more information, see the *z/VM: Directory Maintenance Facility Commands Reference*.

[V5.2] Large Disk Support on IBM DASD Subsystems

z/VM supports very large emulated 3390 Model 9 DASD (known as Model 27 and Model 54) on IBM DS8000, DS6000, and ESS DASD subsystems and supports disks up to 65520 cylinders on those devices. However, as described in “CMS Minidisk Size Limitation” on page 71, the limitation for CMS and GCS disks is 32767 cylinders. In addition, a minidisk defined with greater than 32767 cylinders, including a temporary disk, is not eligible for minidisk cache.

[V5.2] Performance Toolkit Enhancements

The Performance Toolkit feature is enhanced in z/VM V5.2 with the following new screens (along with their corresponding subcommands):

- Available List Log Screen (FCX254) – AVAILLOG
- Demand Scan Log Screen (FCX259) – DEMNDLOG
- QEBSM Activity Screen (FCX255) – QEBSM
- QEBSM Activity Log (per Device, FCX256) – QEBSMLOG
- Storage Management Logs Menu (FCX260) – STORMENU
- Storage Utilization Log Screen (FCX253) – STORLOG
- SXS Available Page Queues Management Log Screen (FCX261) – SXSAVAIL
- SXS Deferred Tasks Management Log Screen (FCX263) – SXSDEFER
- SXS Page Management Log Screen (FCX262) – SXSPAGE
- SXS Storage Utilization Log Screen (FCX264) – SXSUTIL
- User QDIO Activity Screen (FCX257) – UQDIO
- User QDIO Activity Log (per User), FCX258 – UQDIOLOG

For more information, see *z/VM: Performance Toolkit*.

[V5.2] System Administration Facility Removed

The System Administration Facility tools that were added in z/VM V4.2 to help ease migration from the IBM S/390 Virtual Image Facility to z/VM V4.2 have been removed from z/VM V5.2. Some of the same functionality may be obtained through the z/VM Systems Management APIs, first introduced in z/VM V4.4.

[V5.2] Vector Facility Support Removed

The Vector Facility is an S/390 hardware feature that is not available on z/Architecture servers. CP support for the Vector Facility, including the CP virtual vector facility, has been removed.

The following CP commands have been removed:

- DEFINE VECTOR
- DETACH VECTOR
- DISPLAY VECTOR
- DUMP VECTOR
- INDICATE VECTOR
- QUERY VECTOR
- QUERY VIRTUAL VECTOR
- STORE VECTOR
- VARY VECTOR

The following CP functions have been updated:

- DEDICATE command
- DEFINE command

Administration and Operation

- DEFINE CPU command
- DETACH command
- DETACH CPU command
- DETACH CRYPTO command
- DISPLAY command
- DUMP command
- DUMP (Guest Storage - ESA/XC) command
- DUMP (Guest Storage - ESA/390) command
- DUMP (Guest Storage - z/Architecture) command
- INDICATE LOAD command
- INDICATE USER command
- LOGON command
- QUERY TIME command
- QUERY VIRTUAL ALL command
- SET CPTRACE command
- STORE command
- STORE (Guest Storage - ESA/390) command
- STORE (Guest Storage - z/Architecture) command
- TRACE: Command Responses
- VARY PROCESSOR command
- VMDUMP command

[V5.2 (VM63952)] DirMaint Enhancements

The DirMaint optional feature is enhanced as follows:

- A new PAVALIAS operand is added to both the DASDOPT and MINIOPT commands, to create one or more parallel access volume devices for the minidisk base device. Also, a new PAVALIAS command is added to request that the PAVALIAS operand of the DASDOPT or MINIOPT directory statement associated with a specific device be added, changed, or deleted.
- A new NOMEMASSIST operand is added to both the OPTION and SETOPTN commands, to disable MEMASSIST support for a user at logon time.

For more information, see the *z/VM: Directory Maintenance Facility Commands Reference*.

[V5.2 (VM63952)] Performance Toolkit Enhancements

The Performance Toolkit optional feature is enhanced as follows:

- The FC RELOAD subcommand now has an additional SYSTEMS parameter to allow the FCONRMT SYSTEMS file to be reloaded without interrupting the running server.
- The Performance Toolkit supports the Open Systems Adapter for NCP, CHPID type OSN.

For more information, see *z/VM: Performance Toolkit*.

Application Development and Deployment

This section describes changes that can affect how you develop and deploy applications on z/VM.

[V2.2] REXX Sockets

The REXX Sockets API allows you to write socket applications in REXX for the TCP/IP environment. This allow you to use REXX to implement and test TCP/IP

applications. A new REXX/VM external function, SOCKET, is provided. The SOCKET function uses the TCP/IP IUCV API to access the TCP/IP internet socket interface. The REXX socket functions are similar to socket calls in the C programming language. For more information, see the *z/VM: REXX/VM Reference*.

[V2.2] Querying the CMS Level

The CMSPROG field of NUCON, returned in register 1 by the CMS command QUERY CMSLEVEL when the command is invoked internally by a program, has been frozen at X'0F', the value for CMS level 12 (VM/ESA V2.1). The CMSLEVEL assembler macro will not map CMS levels beyond CMS level 12. To determine the CMS level, use the DMSQEFL CSL routine or the DMSQEFL assembler macro.

[V2.2] Pseudo Timer Extended

DIAGNOSE code X'270' (Pseudo Time Extended) can be used to replace DIAGNOSE code X'0C' (Pseudo Timer). DIAGNOSE code X'0C' returns the time only in SHORTDATE format. DIAGNOSE code X'270' returns the same information as DIAGNOSE code X'0C' plus two additional fields containing the time in FULLDATE format and ISODATE format.

[V2.2] Calling CSL Routines That Have Dates as Output

The following CSL routines, which provide dates in their output, have been enhanced with a new parameter for specifying the format in which the dates are to be returned:

- DMSEXIDI
- DMSEXIFI
- DMSOPBLK
- DMSGETDA
- DMSGETDF
- DMSGETDS
- DMSGETDX

The date formats are:

Keyword	Format
SHORTDATE	<i>yy/mm/dd</i>
FULLDATE	<i>yyyy/mm/dd</i>
ISODATE	<i>yyyy-mm-dd</i>

If no keyword is specified, the default is SHORTDATE, which is the format compatible with prior VM releases. The output field in which the date is returned is either 8 or 10 characters in length, depending on the format requested.

In REXX, the date field returned is always 10 characters. If SHORTDATE is specified or allowed to default, the 8-character date is padded on the right with two blanks. An incompatibility is that old REXX programs which now get the date returned as an 8-character string will start getting the date returned as a 10-character string.

If you call one of these routines from a higher level language, the date field is not padded. For SHORTDATE, an 8-character field is returned. For FULLDATE or ISODATE, a 10-character field is returned. Therefore, if you specify FULLDATE or ISODATE, you must be sure to also specify a 10-character output field. Otherwise, you could get storage overlays.

[V2.2] OS Simulation Support for Tape Library Dataserver

CMS OS simulation has been enhanced to call DFSMS/VM Removable Media Services (RMS) CSL routines to mount and demount tapes on Tape Library Dataserver machines. The new LIBSRV option on the CMS FILEDEF command is used to indicate that a tape is under the control of a Tape Library Dataserver. OS simulation can also determine that a tape is under Dataserver control if the user has issued the DFSMS/VM MOUNT command to premount the tape before the CMS tape processing function is invoked.

When a tape is under Dataserver control:

- OS simulation calls the RMS FSMRMDMT (Demount) and FSMRMMNT (Mount) routines to get subsequent multivolume tapes mounted for the user through the native DMSTVS mounting service and the CMS native rewind and unload tape processing functions.
- The RUN (rewind and unload) function of the CMS TAPE and VMFPLC2 commands and the TAPECTL macro calls the RMS FSMRMDMT routine to demount the tape.

See the following books for more information:

- *z/VM: CMS Application Development Guide for Assembler*
- *z/VM: CMS Commands and Utilities Reference*
- *z/VM: DFSMS/VM Removable Media Services*

[V2.2] GCS Pathlength Reduced

GCS processor usage has been reduced, which improves the overall performance of GCS. This can also improve the performance of applications and program products that use GCS.

[V2.2] Full MP Capability for VMCF

The Virtual Machine Communications Facility (VMCF) has been changed so that it no longer has to run on the master processor. This can improve performance and capacity for systems that run applications (such as TCP/IP, OV/VM, and RACF) that use VMCF.

[V2.3] Language Environment

Language Environment® is now included with VM. Language Environment provides a common run-time environment for programs generated with C for VM/ESA and other high-level languages.

[V2.3] Dynamic Link Libraries

Dynamic link library (DLL) support is available for applications running under VM and Language Environment.

A DLL is a collection of one or more functions or variables gathered in a load module and executable or accessible from a separate application load module. The term derives from the fact that the connection or link between the application that uses the DLL and the DLL functions or variables is made dynamically while the application is executing rather than statically when the application is built.

For more information, see:

- *z/VM: CMS Application Development Guide*
- *z/VM: OpenExtensions Callable Services Reference*

- *C for VM/ESA: Library Reference, SC23–3908*

[V2.3] Non-Relocatable Modules Loaded between 16-20 MB

Non-relocatable modules that are loaded in the virtual machine between 16-20 MB must be regenerated. The CMS nucleus now spans from 15-20 MB, which will prevent these modules from being loaded. You must either regenerate the non-relocatable modules at a different storage location or generate the modules as relocatable modules using the RLDSAVE option on the CMS LOAD command. See the *z/VM: CMS Commands and Utilities Reference* for information on generating modules using the LOAD and GENMOD commands.

[V2.3] CMS Migration Utility Feature No Longer Available

Beginning with VM/ESA V2.1, which became generally available in December 1995, CMS no longer runs in 370-mode virtual machines. To simplify the migration of older applications and to facilitate the running of 370-mode-only CMS applications in non-370-mode virtual machines (that is, in XA or XC mode) IBM provides the 370 Accommodation Facility. This function originally shipped with VM/ESA V1.2.1 (available July 1993) and has since been enhanced as the result of customer experience and input. 370 Accommodation handles the vast majority of inconsistencies between 370 mode and either XA or XC mode, eliminating the need to change these applications to exploit the new architectures.

IBM also provided the 370-capable level of CMS which shipped with VM/ESA V1.2.2 (known as CMS 11) as a no-charge feature for customers with specialized applications which 370 Accommodation could not support. Few VM customers have needed this CMS Migration Utility Feature and IBM has not updated it. Most importantly, the CMS Migration Utility Feature has not been made Year 2000 Ready. IBM recommends that customers who are using the CMS Migration Utility should modify their applications to run on a Year 2000-Ready level of CMS (VM/ESA V2.2 or later) and stop using the CMS Migration Utility as an application environment. Customers should not rely upon the CMS Migration Utility as a production environment. Also, IBM has announced the discontinuance of service for VM/ESA V1.2.2 (including CMS 11) and the CMS Migration Utility Feature as of April 30, 1999.

Consistent with IBM's policy of delivering only Year 2000-Ready products to customers in 1998 and beyond, the CMS Migration Utility Feature will no longer be available as part of VM. Customers who find that their applications cannot run under the current level of CMS should modify their applications if possible, or use the 370 Accommodation function. If problems persist, customers should call IBM Service for assistance.

[V2.3] Pipelines Code Bases Merged

The code bases for CMS Pipelines and CMS/TSO Pipelines have been merged:

- All pipelines that were written using previous levels of CMS Pipelines or CMS/TSO Pipelines should operate successfully with this new code base.
- All internal EXECs, messages, and modules of CMS Pipelines have been renamed from a DMS to an FPL prefix. Message numbers and text have changed.

Notes:

1. User-written applications that are sensitive to these changes may require alterations. Published externals (such as PIPGFTXT) have **not** been changed.

2. For cross-references between the old (DMS) and new (FPL) Pipelines message numbers, see Appendix A, “CMS Pipelines Message Cross-Reference [V2.3],” on page 215.
- All stages, commands and subcommands documented in the *CMS/TSO Pipelines Author's Edition* are now supported. Before the merge of the code bases, only the stages and subcommands documented in the *VM/ESA: CMS Pipelines Reference* were supported.
- Some new function exists as a result of the code merge. Stages that are new or changed include:
 - AHELP
 - CONFIGURE
 - DATECONVERT
 - HOSTBYADDR
 - HOSTBYNAME
 - HOSTID
 - HOSTNAME
 - IP2SOCKA
 - SOCKA2IP
 - SPILL
 - TCPCLIENT
 - TCPDATA
 - TCPLISTEN
 - GETRANGE
 - SCANRANGE
 - SCANSTRING

Specific information about some enhancements can be found in PIPELINE NEWS, which is accessible from the internet at the following URL:

<http://pucc.princeton.edu/%7Epipeline>

- Any CMS Pipelines stages, commands, and subcommands that are not documented in the *z/VM: CMS Pipelines Reference* can be found in the *CMS/TSO Pipelines Author's Edition*, which is now included with the VM library.

[V2.3] POSIX Support Enhancements

Enhancements to VM POSIX support include additional C library routines, new callable services and mapping macros, new OPENVM commands for fork processing, and new shell commands for data compression.

Additional C/VM Library Routines

Over 150 C library routines have been added to the C/VM™ run-time library. For more information about these routines, see the *C for VM/ESA: Library Reference*, SC23–3908.

New Callable Services and Macros

The following callable services have been added:

Service	Purpose
DLL_delete (BPX1DEL)	Delete a previously-loaded program from storage
DLL_load (BPX1LOD)	Load a program into storage
fork (BPX1FRK)	Create a new process
msgctl (BPX1QCT)	Control message queues
msgget (BPX1QGT)	Create or find a message queue
msgrcv (BPX1QRC)	Receive a message from a message queue

msgsnd (BPX1QSN)	Send a message to a message queue
semctl (BPX1SCT)	Control semaphores
semget (BPX1SGT)	Create or find a set of semaphores
semop (BPX1SOP)	Perform semaphore operations atomically
shmat (BPX1MAT)	Attach a shared memory segment
shmctl (BPX1MCT)	Control shared memory segments
shmdt (BPX1MDT)	Detach a shared memory segment
shmget (BPX1MGT)	Create or find a shared memory segment
wait-extension (BPX1WTE)	Obtain status information about child processes
w_getipc (BPX1GET)	Query interprocess communications

The following mapping macros have been added:

Macro	Purpose
BPXYIPCP	Map interprocess communications permissions
BPXYIPCQ	Map the data structure used by w_getipc (BPX1GET)
BPXYMSG	Map interprocess communications message queues
BPXYSEM	Map interprocess communications semaphores
BPXYSHM	Map interprocess communications shared memory segments
BPXYSINF	Map the Siginfo_t structure used by wait-extension (BPX1WTE)

For additional information about these routines and macros, see the *z/VM: OpenExtensions Callable Services Reference*.

OPENVM Commands for fork (BPX1FRK) Processing

Because the VM implementation of the fork (BPX1FRK) service does not meet all POSIX.1 requirements, you must explicitly turn fork (BPX1FRK) processing ON with the CMS OPENVM SET FORK command before running your program. You can use the OPENVM QUERY FORK command to determine the current setting.

For information about restrictions in the VM implementation of fork (BPX1FRK), see the *z/VM: OpenExtensions Callable Services Reference*. For more information about OPENVM commands, see the *z/VM: OpenExtensions Commands Reference*.

Shell Commands for Data Compression

The following shell commands have been added to the Shell and Utilities:

- **compress**
- **uncompress**
- **zcat**

The **compress** and **uncompress** commands use Lempel-Ziv compression techniques to compress and uncompress data in files or from the standard input. The **zcat** command calls **uncompress** to uncompress data from one or more files or from the standard input and writes it to the standard output.

For more information about these commands, see the *z/VM: OpenExtensions Commands Reference*.

[V2.4] OS Simulation Enhancements

CMS OS Simulation support has been enhanced as follows:

- The CMS FILEDEF command has been changed to allow record length (LRECL) definitions up to 65535 bytes for variable spanned OS records and non-OS CMS files, and block size (BLOCK or BLKSIZE) definitions up to 65535 bytes for non-OS CMS files.
- The CMS LKED command has been changed to allow larger default work area sizes (SIZE option): '400K' for *value1* and '100K' for *value2*.
- The CMS MOVEFILE command has been changed to allow the processing of QSAM variable spanned records up to 65535 bytes in length under the Extended Logical Record Interface (XLRI). MOVEFILE can also process non-OS CMS files up to 65535 bytes.
- The CMS QUERY FILEDEF command has a new optional operand, ATTRIBUT, which allows you to display the RECFM, LRECL, and block size attributes associated with the current FILEDEF.
- OS Simulation DCB macro processing has been changed to allow it to describe and pass both LRI and XLRI conventions for QSAM variable spanned long records, up to 65535 bytes in length, for subsequent OPEN, CLOSE, GET, or PUT processing. DCB can now also describe non-OS CMS files up to 65535 bytes in length.
- The OS Simulation OPEN, CLOSE, GET, and PUT macros, and the SVC 19 and SVC 20 supervisor calls, have been changed to allow the processing of OS formatted variable spanned QSAM records and non-OS CMS files up to 65535 bytes in length.
- The OS Simulation tape processing routines, such as DMSTVS, will issue a new message, DMS2139I, if SENSE data from a tape mount indicates that the mounted tape cartridge may be incorrect for the tape device in use. These tape processing routines may be invoked by MOVEFILE processing and by the following OS Simulation macros: OPEN, CLOSE, GET, PUT, READ, WRITE, and FEOV.

For more information, see:

- *z/VM: CMS Application Development Guide for Assembler*
- *z/VM: CMS Commands and Utilities Reference*

[V2.4] POSIX Support Enhancements

New realpath (BPX1RPH) Callable Service

The realpath (BPX1RPH) service finds the absolute path name for a specified relative path name. Any dot (.) or dot dot (..) components, symbolic links, or mount external links included in the relative path name input are resolved in the absolute path name output.

New setopen (BPX1VM6) Callable Service

The setopen (BPX1VM6) service sets certain flags specific to the platform without creating a new POSIX process in the virtual machine. The function codes used in the setopen service are mapped by the BPXYVM6 macro.

[V3.1] POSIX Support Now Called OpenExtensions

The support for POSIX and XPG standards in z/VM is now called OpenExtensions. Support services and the Shell and Utilities are now included in CMS.

[V3.1] Open Files Limit Increased

Under OpenExtensions, the limit on open files has been increased from 1024 to 65536.

[V3.1] BFS Root Not Case Sensitive

The fully qualified VM byte file system root (*/../VMBFS:filepoolid:filespaceid/*) is no longer case sensitive.

[V3.1] Binder/Loader Support

CMS hosts the OS/390 DFSMS Program Management binder and provides a native implementation of the corresponding program object loader functions. Included with this support is a new CMS command, BIND, to invoke the services of the binder to bind and store an executable file containing a program object on DASD (minidisk, SFS directory, or BFS directory). An executable file produced by the binder may be used on a CMS system containing the program object loader in exactly the same way as a conventional MODULE file generated by the CMS GENMOD command.

Also included in this support is an enhancement to the **c89** command to use the new BIND command in place of the combination of the Language Environment prelinker and the old LOAD, INCLUDE, and GENMOD commands. In addition, the complete binder API is available to application programs that need to invoke the services of the binder dynamically.

CMS support of the binder and loader allows ready transportability of executable files between z/VM and OS/390 or z/OS systems and provides the infrastructure to permit CMS to exploit new and emerging programming language technology being developed for z/OS.

For more information, see *z/VM: Program Management Binder for CMS*.

[V3.1] CMS OS Simulation Enhancement

The new SET TAPENEVR command allows you to control CMS OS Simulation tape label date checking for 'Unexpired Files'. The new QUERY TAPENEVR command allows you to display the current setting.

For more information, see:

- *z/VM: CMS Application Development Guide for Assembler*
- *z/VM: CMS Commands and Utilities Reference*

[V3.1] Tape FICON and RAS Support

Extended function in DIAGNOSE code X'210' allows application programs to find out the underlying real hardware that is associated with tape devices operating in emulation mode. For more information, see *z/VM: CP Programming Services*.

[V4.2] C Socket Application Programming Interface

A new z/VM C sockets library within Language Environment provides C socket support for new or existing applications that use Language Environment services. This support includes:

- New C socket-related function calls. These calls are documented in the *z/VM: Language Environment 1.8 C Run-Time Library Reference*, SC24–6038. (This is a new book, which replaces the *C for VM/ESA: Library Reference*.)

- New OpenExtensions callable services (BPX routines), which correspond to the basic z/VM C socket calls. These services are documented in the *z/VM: OpenExtensions Callable Services Reference*.
- A version of the TCP/IP Remote Procedure Call (RPC) function library, VMRPC, to be used in conjunction with the z/VM C sockets. Information about RPC is in the *z/VM: TCP/IP Programmer's Reference*.

The z/VM C sockets are intended as replacements for the existing TCP/IP C sockets and OE sockets. Although those socket libraries are still supported for compatibility, the z/VM C socket API is preferred. Existing applications may need to recompile to use the new z/VM C socket functions, but no source code changes are required. For more information about using the z/VM C socket API, see the *z/VM: TCP/IP Programmer's Reference*.

[V4.3] Increased 64-bit Addressing Support for DIAGNOSE Codes

The following DIAGNOSE codes now support the 64-bit addressing mode:

- DIAGNOSE code X'08' – Virtual Console Function
- DIAGNOSE code X'44' – Voluntary Time Slice End
- DIAGNOSE code X'4C' – Generate Accounting Records
- DIAGNOSE code X'DC' – Control Application Monitor Record Collection
- DIAGNOSE code X'258' – Page-Reference Services

For more information, see *z/VM: CP Programming Services*.

[V4.4] C/C++ Compiler Support

IBM C/C++ for z/VM, Version 1 (5654-A22) Release 1.0, is a z/VM-enabled version of the C/C++ compiler for version 1 release 2.0 of z/OS. This new C/C++ compiler, which runs on CMS, allows C/C++ programs to be compiled and executed on CMS and creates portability between z/VM and z/OS C/C++ programs. The new OpenExtensions command **cxx** invokes the C/C++ for z/VM compiler. C/C++ source files can be read from a CMS minidisk, the SFS, or the byte file system (BFS), and output can be written to any of these file systems. C/C++ for z/VM runs only on z/VM V4.4 and can be licensed only for standard processor engines. However, applications compiled with this C/C++ compiler will run on standard processor engines or Integrated Facility for Linux (IFL) processor features. For more information, see:

- *z/VM: OpenExtensions Commands Reference*
- *C/C++ for z/VM: User's Guide*, SC09-7625

[V4.4] Language Environment Upgrade

Language Environment for z/VM has been upgraded to provide C/C++, COBOL, and PL/I run-time libraries at the same level shipped with version 1 release 4.0 of z/OS. In addition, this new level of Language Environment has been integrated into z/VM as a component.

Attention: Do not migrate Language Environment 1.8 or earlier to z/VM V4.4. The only level of Language Environment supported on z/VM V4.4 is the new Language Environment component. The files for the z/VM Language Environment component are installed on the MAINT 19E disk. Depending on how you plan to migrate other files from your old 19E disk to the new system, you may need to remove the old Language Environment files. See “Removing the Old Level of Language Environment” on page 7.

Some of the new and enhanced features of the new level of Language Environment are:

XPLINK

Reduces program size and improves performance for small programs that frequently call each other.

Large File Support

Improves the porting capabilities of C/C++ applications accessing BFS and NFS files larger than 2 GB.

For more information, see the *z/VM: Language Environment User's Guide*.

[V4.4] Systems Management APIs

The systems management APIs provide a basic set of functions that can be called by applications to allocate and manage resources for guests running in z/VM virtual machines (virtual images). Although these APIs are primarily intended for managing Linux virtual images, they can be used for managing any type of virtual image running in a z/VM virtual machine. The APIs are designed so that applications can be written by customers or solution providers to help administrators, especially those who lack in-depth VM knowledge, manage large numbers of virtual images running in a single z/VM system.

Functions supported by the systems management APIs allow you to:

- Create and delete virtual images
- Add and remove resources in an image's static (directory) or dynamic (active) configuration
- Activate and deactivate virtual images (individual or lists)
- Manage connectivity between virtual images, including exploitation of the new virtual switch support
- Query the status of "long-running" asynchronous operations initiated through the APIs
- Create, delete, replace, and query shared storage segments

The systems management APIs require a directory manager. The IBM Directory Maintenance Facility (DirMaint) optional feature of z/VM has been enhanced with support for these APIs through a service upgrade. See *z/VM: General Information*.

Client applications invoke the systems management APIs through a set of IBM-supplied Remote Procedure Calls (RPCs) to a z/VM server machine (either remotely or from within the z/VM system). The server then calls a set of CMS Callable Services Library (CSL) routines, which perform the requested functions. The CSL routines are replaceable to allow customized solutions for the systems management API functions. For more information, see *z/VM: Systems Management Application Programming*.

[V5.1] Java and NetRexx Support Removed

Java and NetRexx support has been removed from z/VM. If you want to use Java in a z/VM environment, you should consider using Java for Linux running in a Linux guest.

[V5.1] Enhanced Systems Management APIs

All enhancements to the systems management APIs in z/VM V5.1 have been implemented using Version 2 (V2) of the RPC server. Previous APIs implemented

using V1 of the RPC server can also function with the new V2 server. A new server security identification procedure is provided for special authorized clients, which can remove the need to log on with a password, simplifying the logon process. In addition to some usability enhancements, new functions include:

- DASD volume management for virtual images
- Virtual Machine Resource Manager (VMRM) configuration file management
- Query VMRM measurement data
- Query status of active images

Parameter lists for some V1 APIs have been changed to create enhanced APIs for V2. These enhancements are accessible only from a V2 client. The same RPC program number is used, but a new version number (2) is registered with the portmapper during server initialization. A client is required to log in as either a V1 or V2 client. During a client-server session, the client has access only to the functionality for the specified version.

The following V1 APIs have been enhanced:

- AUTHORIZATION_LIST_REMOVE has been enhanced to optionally remove multiple entries for a user ID from the VMSERVE AUTHLIST file.
- LOGIN has been enhanced to recognize certain V2 clients as trusted users that are not required to supply a password when logging in to the server.
- SHARED_STORAGE_QUERY has been enhanced to optionally return information on all shared segments.
- VIRTUAL_NETWORK_LAN_CONNECT and VIRTUAL_NETWORK_VSWITCH_CONNECT have been enhanced with a new parameter to support Layer 2 LAN, which provides an alternative transport mechanism for guest LANs and virtual switches.
- VLANID parameter of VIRTUAL_NETWORK_VSWITCH_SET has been enhanced to support changes to virtual switch operation.

For more information, see *z/VM: Systems Management Application Programming*.

The IBM z/VM Directory Maintenance Facility (DirMaint) feature, Function Level 510, has been enhanced to support the new API functions. For more information, see the *z/VM: Directory Maintenance Facility Commands Reference*.

[V5.1] Dynamic Virtual Machine Timeout

A new programming service is provided by an emulated DIAGNOSE instruction that helps enable a guest operating system to specify an action to be taken by CP when the guest becomes unresponsive. The DIAGNOSE instruction also allows each guest to define what “unresponsive” means for itself. A time interval and action are specified by the guest. If the guest fails to reissue the DIAGNOSE instruction within the specified time interval, CP performs the action. The guest may define the action as any set of CP commands, although it is envisioned that this function will be used to terminate the virtual machine in which the guest is running if it becomes unresponsive. This can help ensure that a malfunctioning guest would no longer have access to shared system resources and would relinquish system resources to other guests.

For more information, see *z/VM: CP Programming Services*.

[V5.1] Relocation of REXX Work Area for Applications

In previous releases, the REXX work area that CMS used to pass parameters to applications was always allocated from below the 16 MB line. Now this work area is allocated from above 16 MB if the application has identified itself as either AMODE 31 or AMODE ANY.

[V5.1] Server-Requester Programming Interface To Be Withdrawn

IBM intends to withdraw the Server-Requester Programming Interface (SRPI) from a future release of z/VM. SRPI was introduced in VM in 1986 to provide a programming interface that enhances the environment of IBM workstations communicating with IBM mainframes operated with VM systems. Customers with applications using SRPI should start using TCP/IP for z/VM to provide similar function. Documentation for SRPI is available in the *VM/ESA: Programmer's Guide to the Server-Requester Programming Interface for VM*, SC24-5455, but this publication is not included in the z/VM V5.1 library. Also, documentation for SRPI-related functions, such as the CMSSERV command, has been removed from other z/VM V5.1 books.

[V5.2] 64-Bit DIAGNOSE Code X'250' Support

Support for 64-bit addressing has been added to DIAGNOSE code X'250' to allow users to use storage above 2 GB for the DIAGNOSE code X'250' - Block I/O parameter list (BIOPL), DIAGNOSE code X'250' Block I/O entries, and I/O buffers. This allows users of DIAGNOSE code X'250' to be in 64-bit addressing mode.

The 31-bit interface and the existing users of the 31-bit interface will not be affected.

For more information, see *z/VM: CP Programming Services*.

[V5.2] CMS Binder Upgraded

The CMS binder has been upgraded to a new level based on the z/OS MVS Program Management Binder supplied with z/OS V1.6. For more information, see the *z/VM: Program Management Binder for CMS*.

[V5.2] Enhanced Systems Management APIs

All enhancements to the systems management APIs in z/VM V5.2 have been implemented using Version 3 (V3) of the RPC server. Previous APIs implemented using V1 or V2 of the RPC server can also function with the new V3 server. A new server security identification procedure is provided for special authorized clients, which can remove the need to log on with a password, simplifying the logon process. In addition to some usability enhancements, new functions include:

- V3 APIs to support the DirMaint DEFINESTAG, SETSTAG, and SCAN commands:
 - Directory_Manager_Local_Tag_Define
 - Directory_Manager_Local_Tag_Set
 - Directory_Manager_Local_Tag_Query
 - Directory_Manager_Search
- V3 APIs to allow creation and updating of the LOADDEV directory statement for a virtual image, as well as queries of a virtual image's LOADDEV settings:
 - Image_SCSI_Characteristics_Define
 - Image_SCSI_Characteristics_Query

Application Development

- A V3 API, `Image_Query_Activate_Time`, to query the time when a virtual image was activated.

In addition to these new V3 APIs, new V2 APIs are added to support DirMaint's ability to manage subscriptions to directory updates, with the ability to add new subscriptions, delete old subscriptions, and query existing subscriptions:

- `Asynchronous_Notify_Enable`
- `Asynchronous_Notify_Disable`
- `Asynchronous_Notify_Query`

Parameter lists for some V1 and V2 APIs have been changed to create enhanced APIs for V3. These enhancements are accessible only from a V3 client. The same RPC program number is used, but a new version number (3) is registered with the portmapper during server initialization. A client is required to log in as either a V1, V2, or V3 client. During a client-server session, the client has access only to the functionality for the specified version.

Enhancements to existing APIs supporting Vswitch functions are as follows:

- `Vlan` and `PortType` parameters are added to `Virtual_Network_Vswitch_Connect` and `Virtual_Network_Vswitch_Set` APIs. These parameters will support the corresponding operands on the DEFINE VSWITCH and SET VSWITCH commands.
- Capability is added to define persistent Vswitch definitions.

The RPC and CSL interfaces for the following APIs are updated to allow up to 10 digits in the block size parameters:

- `Image_Disk_Create` (`ImageDiskAllocationType` and `ImageDiskSize` parameters)
- `Image_Disk_Copy` (`ImageDiskAllocationType` parameter)
- `Image_Volume_Space_Define` (`Size` parameter)

An optional `DeviceType` parameter is added to the `Image_Volume_Space_Define` API to allow space (regions and groups) to be defined for an image volume before the volume exists on the system.

For more information, see *z/VM: Systems Management Application Programming*.

The DirMaint optional feature, function level 510, has been enhanced to support the new API functions. For more information, see the *z/VM: Directory Maintenance Facility Commands Reference*.

[V5.2] LT MACRO Renamed

Because the IBM High Level Assembler, version 1 release 5, supports a hardware opcode called LT, that function is used before the CMS LT MACRO is called. Therefore, a new DMSLT MACRO has been created (identical to the LT MACRO), and references to the LT MACRO in CMS, GCS, and REXX/VM have been changed to use the DMSLT MACRO instead. If you currently use the LT MACRO, IBM recommends that you also change to using the DMSLT MACRO. Although the LT MACRO is still supplied in the DMSGPI MACLIB, it could be withdrawn in a future release.

[V5.2] SRPI Support Discontinued

Support for the Server-Requester Programming Interface (SRPI) has been discontinued with the availability of z/VM V5.2. The following CMS functions are no longer supported:

- ADDENTRY macro
- ADDENTRY subcommand
- CMSSERV command
- CPRB macro
- CSMRETCD macro
- DEENTRY macro
- DEENTRY subcommand
- GETREQ subcommand
- SENDREQ macro
- SENDREQ subcommand
- SETREPLY subcommand

System Diagnosis

This section describes changes that can affect how you diagnose problems on VM.

[V2.2] FST and ADT Macro Changes to Support 4-digit Years

File Status Table

When you access a disk or SFS directory, a file directory is stored in your virtual machine. The entries in the file directory for each CMS file are called the file status table (FST). The FST describes the attributes of the file. One of the attributes of a file is date/time of last update. This is currently stored in 6 bytes (*yy mm dd hh mm ss*), where each byte holds two decimal digits. This is the date and time that the accessed file was last updated.

In VM/ESA V2.2, support was added for 4-digit years by adding a century flag FSTCNTRY (X'08') in the FST flag byte (FSTFLAGS) for both FST forms (see table below). This is bit 4, which identifies the century in which the file was last written or updated. If bit 4 is off, the year is in the 1900s. If bit 4 is on, the year is in the 2000s. Therefore, the range of years supported is from 1900 to 2099.

If you are interested in the existing flag settings for the FSTFLAGS field, see the usage notes for the FSSTATE macro in the *z/VM: CMS Macros and Functions Reference*.

If you are using the FST to retrieve the date and time of last update in your application, you can add support to use an appropriate CSL routine (for example, DMSGETDI, DMSEXIST, or DMSERP) or you can use the FSSTATE macro. For information about CSL routines, see the *z/VM: CMS Callable Services Reference*. For information about FSSTATE, see the *z/VM: CMS Macros and Functions Reference*.

Table 4. Base versus Extended FST Format. Note that not all field names are shown.

Hex Disp	Dec Disp	Size	Base	Ext	Field Name	Field Description
0	0	16	B	E	FSTDFNFT	File name File type
		8	B	E	FSTFNAME	File name
		8	B	E	FSTFTYPE	File type
10	16	2	B		FSTDATEW	Date (<i>mm yy</i>) last written

System Diagnosis

Table 4. Base versus Extended FST Format (continued). Note that not all field names are shown.

Hex Disp	Dec Disp	Size	Base	Ext	Field Name	Field Description
1F	31	1	B	E	FSTFLAGS	FST flag byte
		Bit 4	B	E	FSTCNTRY	X'08' Century last written (0 - 19nn, 1 - 20nn)
26	38	2	B		FSTYEARW	Year (yy) last written
36	54	6		E	FSTADATI	Alternate date/time (yy mm dd hh mm ss)
4E	78	1		E	FSTFB3	FST flag byte 3
		Bit 4		E	FSTCDOLR	X'08' Century date of last reference (0 - 19nn, 1 - 20nn)
54	84	3		E	FSTDOLR	Date of last reference
Note: FSTFB3, FSTCDOLR, and FSTDOLR apply only to an SFS FST.						

Also, for an SFS FST, a new flag FSTCDOLR (X'08') is added in the FSTFB3 flag byte 3. This is the flag that indicates the Century for Date of Last Reference (0 indicates the year is in the 1900s, 1 indicates the year is in the 2000s) that corresponds to FSTDOLR.

Active Disk Table - Disk Label

The ADTSECT maps information in the active disk table (ADT). It also contains information about the disk label. One of the fields contained in the disk label is ADTDCRED, which is the creation date and time of the minidisk. Following the ADTDCRED field is a new flag byte for the volume label called ADTFLGL, which contains the new ADTCNTRY flag. The ADTCNTRY flag is X'01', and corresponds to the ADTDCRED field. If the value of this flag is 0, it indicates that the creation year is in the 1900s. If the value is 1, it indicates the creation year is in the 2000s.

[V2.3] Viewing and Printing CP and CMS Control Blocks

CP and CMS control block documentation is now available on the VM Internet Library at www.ibm.com/eserver/zseries/zvm/library/.

You can view or print an entire control block or select general sections.

In addition, VM provides an unsupported tool, DACBGEN EXEC, that you can use against CP and CMS control blocks on your system to get the most current data. You can also use DACBGEN against user blocks if they follow the prescribed formula. You can tailor DACBGEN to your own environment.

[V3.1] Dump Viewing Facility No Longer Supports CP Dumps

The Dump Viewing Facility no longer supports CP dumps; it supports only VM (virtual machine) dumps. The VM Dump Tool is the dump viewing program to use for z/VM CP dumps.

[V3.1] VM Dump Tool

The VM Dump Tool assists in analyzing dump data from a dump file created by the DUMpload utility. The VM Dump Tool provides a variety of subcommands and macros that allow you to display, locate, and format dump data interactively. This tool can process CP stand-alone dumps, CP ABEND dumps, and virtual machine dumps of a CP system. For more information, see the new *z/VM: VM Dump Tool* book.

[V4.3] VM Dump Tool Enhancement

The structure of the VM Dump Tool has been changed to use 31-bit addressing instead of 24-bit addressing. While this did not directly affect any external interfaces, it should reduce storage requirements in the virtual machine below the 16 MB line.

[V4.4] VM Dump Tool Enhancements

The following support is added to the VM Dump Tool:

- A new EXTRACT function for easy access from a macro environment to selected information in the dump
- Support for a macro file type of VMDT.
- Improved support for non-CP dumps, including new subcommands/macros for migration from the Dump Viewing Facility environment (DVFSTACK, FINDSTRG, INIT, and READSTRG)
- You can now halt long-running commands without losing unsaved dump session information by using the existing HI IMMEDIATE command. This CMS command is now supported by the following VM Dump Tool subcommands: CHAIN, FRAMES, LOCATE, TRACE, and VMDBK.
- The new XEDITPRE option of the VM Dump Tool SET subcommand allows you to disable or change the XEDIT escape value (the function that indicates when a command should be forwarded directly to XEDIT). You can reset it to either a single character or a string. This option replaces the XEDIT subcommand. Also, the new XEDITPRE option of the VM Dump Tool QUERY subcommand allows you to query the current setting for the XEDIT escape value.
- Output from the DISPLAY subcommand, when issued from a macro, is now the same as DISPLAY subcommand output when the subcommand is issued from the command line. Any macro which depends on the output of DISPLAY will have to be modified to handle the new output.

For more information, see *z/VM: VM Dump Tool*.

[V5.1] VM Dump Tool Enhancements

The following support is added to the VM Dump Tool:

- The VM Dump Tool can be used to look at all dumps from Version 3, Release 1.0 through Version 5, Release 1.0.
- The MAP command and related infrastructure which creates a VMDTMAP file has been rewritten. For a CP dump the externals are not changed. The new code obtains the information for the VMDTMAP file from the CP symbol table if possible, which avoids the time required to scan storage. If the CP symbol table is not available (which is the case for older dumps), then the VM Dump Tool scans storage looking for CP module headers as it has in the past.
- New MAPA and MAPN options of the EXTRACT subcommand make it easier for a macro to find out the name or address of a module. EXTRACT MAPA allows a macro to find the name of a module or entry point from an address. EXTRACT MAPN allows a macro to find the address of a module or entry point name.
- The new sample VMDTNCMP macro helps you build a VMDTMAP file for non-CP dumps.
- The new SET DEBUG function provides new support to help you debug macros written for the VM Dump Tool. With SET DEBUG ON, non-zero return codes associated with a macro are reported to the virtual machine console. The new matching QUERY DEBUG function displays your DEBUG setting (ON or OFF).

System Diagnosis

- The preferred file type for a VM Dump Tool macro is now VMDT rather than XEDIT. In a future release all IBM-supplied VM Dump Tool macros will be renamed from their current file type of XEDIT to a file type of VMDT. Also, the default environment when a VM Dump Tool macro is entered is now VMDUMPTL.
- To be consistent with the SETVAR function, the EXTRACT DFIR/DFIZ and EXTRACT SYMPTOM functions now require a decimal length value rather than hexadecimal. If you have any customer-written VM Dump Tool macros which use these functions, you will have to change the macros to use a decimal length value. Also, the maximum size for EXTRACT DFIR has been increased to 36,864 bytes.
- The new EXTRACT DISPL function allows a macro to obtain the displacement of a specified field. Only selected fields of PFXPGR and SYSCM are supported at this time.
- The INDQ is no longer supported. It now returns only a response of "complete."
- The CPEBK subcommand and the CALLERS macro now both take up to 17 characters of input. Both still have the restriction of allowing up to only eight significant digits in the address operand.
- The TRACE FROM and TRACE TO functions no longer check the frame type to be sure it is a trace frame. Because of this these functions can now be used when the frame table is not available. (However, these functions can cause unpredictable output when the page is not really part of the trace table.)
- The output from the RDEVBK, RSCH, VDEVBK and VSCH subcommands has been changed to produce the addresses of significant related control blocks instead of displaying the storage of the control blocks themselves.

For more information, see *z/VM: VM Dump Tool*.

[V5.2] 64-Bit Dump Support

The 64-Bit dump support changes z/VM's various dump producers to create dumps that include relevant storage above 2 GB if that storage is defined. Prior to this release, all dump producers (Stand-Alone Dump, Hard Abend Dump, Soft Abend Dump, and VMDUMP) dumped storage only below 2 GB.

There are now four different dump formats:

- Little Storage Dump Format
This format is produced by Stand-Alone Dump and the CP VMDUMP command when the processor or virtual machine is in ESA/390 mode. This dump format is limited to 2 GB of storage.
- Big Storage Dump Format
This format is new and also shows storage above 2 GB, if it exists. This format is produced by Stand-Alone Dump and the CP VMDUMP command when the processor or virtual machine is in z/Architecture mode.
- CP Hard Abend Dump Format
This format is new and is created when CP takes a Hard Abend or when the CP SNAPDUMP command is used. Dumps in this format contain only CP pages. The ALL operand has been removed from the SET DUMP command.
- CP Soft Abend Dump Format
This format is new and is created for Soft Abend dumps. At the time of a Soft Abend dump, CP is still running. This format allows CP to dump out a few pages that will help debug the problem and then continue running.

DUMpload has been updated to process all four dump formats.

Support for older tape devices has been dropped. For Stand-Alone Dump and Hard Abend Dump, only dumps to 3480 or 3590 tapes are supported. For Stand-Alone Dump, IPL off a CKD device is no longer supported. IPL off ECKD devices is still supported.

Support for writing a formatted Hard Abend dump to a printer has been eliminated.

The following CP functions have been updated:

- QUERY ABEND command
- QUERY DUMP command
- QUERY VMDUMP command
- SET ABEND command
- SET DUMP command
- SET UNDERSCORE command
- SNAPDUMP command
- VMDUMP command
- DIAGNOSE code X'94'

For more information, see:

- *z/VM: CP Commands and Utilities Reference*
- *z/VM: CP Planning and Administration*
- *z/VM: CP Programming Services*

[V5.2] High Level Assembler No Longer Required for Stand-Alone Dump Utility

The IBM High Level Assembler is no longer required to build the Stand-Alone Dump Utility. This has resulted in incompatible changes to a number of macros. Customers who have saved their HCPSDC ASSEMBLE source from previous releases must recreate it on z/VM V5.2 when prompted by the HCPSADMP EXEC.

[V5.2] VM Dump Tool Enhancements

The following support is added to the VM Dump Tool:

- Some new subcommands to establish the default addressing mode for the dump session.
- Many subcommands will now take a prefix of L/R/U on an address to indicate how an address should be interpreted.
- A number of subcommands now require an address to be in a certain form (that is, Logical or Real).
- Most existing syntax will continue to work without change.
- User-written macros may need to be updated to indicate that address references are real or logical.
- The new VMDTSET and VMDTQRY subcommands are introduced for SET and QUERY functions unique to the VM Dump Tool. The minimum abbreviations are DTS and DTQ.
 - Existing SET/QUERY functions will continue to work.
 - Existing SET/QUERY operands will work with the new vmDTSet/vmDTQry subcommands.
 - Some existing VM Dump Tool subcommands are also supported by VMDTSET and VMDTQRY. The existing commands continue to be supported for compatibility.

System Diagnosis

- Any future parameters will be added to vmDTSet and vmDTQry, and not to SET and QUERY.
- The preferred file type for VM Dump Tool macros is changed to VMDT (it was XEDIT). Macros shipped with the VM Dump Tool will have a file type of VMDT, and must be invoked with ADDRESS VMDUMPTL to be invoked from a macro. Existing customer XEDIT macros can be invoked with ADDRESS XEDIT and will work without change.
- Many of the macro and subcommand examples have been updated.

For more information, see *z/VM: VM Dump Tool*.

Product Documentation

This section describes changes to the format, location, or availability of the z/VM product documentation. For information about which z/VM books have been updated for the new release, see *z/VM: General Information*.

[V4.1] System Messages and Codes Book Divided

The *z/VM: System Messages and Codes* book has been divided into the following three books:

- *z/VM: System Messages and Codes - CP*, GC24-6030
- *z/VM: System Messages and Codes - CMS*, GC24-6031
- *z/VM: System Messages and Codes - Other Components*, GC24-6032

[V4.1] Relocated Information

The following table shows information that has been relocated within the z/VM library.

Table 5. Information Relocated in z/VM V4.1

Topic	Old Location (Book)	New Location (Book)
CMS utilities	<i>VM/ESA: CMS Utilities Feature</i>	• <i>z/VM: CMS Commands and Utilities Reference</i> • <i>z/VM: CMS and REXX/VM Messages and Codes</i>
GCS nucleus build information	<i>z/VM: Installation Guide</i>	<i>z/VM: Group Control System</i>
CMS nucleus build information	<i>z/VM: Installation Guide</i>	<i>z/VM: Planning and Administration</i>

[V4.1] Deleted Books

The following books are not included in the z/VM V4.1 library:

- *LAN Resource Extension and Services/VM: General Information*, GC24-5618
- *LAN Resource Extension and Services/VM: Guide and Reference*, SC24-5622
- *LAN Resource Extension and Services/VM: Licensed Program Specifications*, GC24-5617
- *DCE for VM/ESA: Administration Guide*, SC24-5730
- *DCE for VM/ESA: Administration Reference*, SC24-5731
- *DCE for VM/ESA: Application Development Guide*, SC24-5732
- *DCE for VM/ESA: Application Development Reference*, SC24-5733
- *DCE for VM/ESA: Configuring and Getting Started*, SC24-5734

- *DCE for VM/ESA: Introducing the Distributed Computing Environment*, SC24-5735
- *DCE for VM/ESA: Messages and Codes*, SC24-5736
- *DCE for VM/ESA: Planning*, SC24-5737
- *DCE for VM/ESA: User's Guide*, SC24-5738
- *VM/ESA: CMS Utilities Feature*, SC24-5535
- *VM/ESA: REXX/EXEC Migration Tool for VM/ESA*, GC24-5752

[V4.2] Monitor Records Provided on the Web

z/VM monitor records are now provided on the z/VM web site in the same HTML format as the data areas and control blocks.

[V4.2] Relocated Information

The following table shows information that has been relocated within the z/VM library.

Table 6. Information Relocated in z/VM V4.2

Topic	Old Location (Book)	New Location (Book)
C sockets API (reference)	• <i>z/VM: TCP/IP Programmer's Reference</i> • <i>OE for VM/ESA: Sockets Reference</i>	<i>z/VM: Language Environment 1.8 C Run-Time Library Reference</i>
Test the installation or service of the DirMaint servers	<i>Directory Maintenance Facility Program Directory</i>	<i>z/VM: Directory Maintenance Facility Tailoring and Administration Guide</i>

[V4.3] Planning Book Divided

The *z/VM: Planning and Administration* book has been divided into the following four books:

- *z/VM: CMS Planning and Administration*, SC24-6042
- *z/VM: CP Planning and Administration*, SC24-6043
- *z/VM: Dynamic I/O Configuration Planning and Administration*, SC24-6044
- *z/VM: Saved Segments Planning and Administration*, SC24-6056

[V4.3] Relocated Information

The following table shows information that has been relocated within the z/VM library.

Table 7. Information Relocated in z/VM V4.3

Topics	Old Location (Book)	New Location (Book)
• Setting up OpenExtensions • DIRPOSIX utility	<i>z/VM: Planning and Administration</i>	<i>z/VM: OpenExtensions User's Guide</i>
• DFSMS/VM installation	<i>VM/ESA: DFSMS/VM Function Level 221 Installation and Customization</i> Note: This book has been renamed to <i>z/VM: DFSMS/VM Customization</i> .	<i>DFSMS/VM Function Level 221 Program Directory</i>

Documentation

Table 7. Information Relocated in z/VM V4.3 (continued)

Topics	Old Location (Book)	New Location (Book)
• DirMaint control files	<i>Directory Maintenance VM/ESA: Diagnosis Reference</i> (This book has not been updated for the Directory Maintenance Facility feature for z/VM.)	<i>z/VM: Directory Maintenance Facility Tailoring and Administration Guide</i>
• Tailorable and nontailorable DirMaint system files	<i>Directory Maintenance Facility Program Directory</i>	<i>z/VM: Directory Maintenance Facility Tailoring and Administration Guide</i>

[V4.4] Retitled Books

The following table lists z/VM books that have been retitled (and might have new form numbers).

Table 8. Books Retitled in z/VM V4.4

Old Book Title and Number	New Book Title and Number
<i>z/VM: Dynamic I/O Configuration Planning and Administration</i> , SC24-6044	<i>z/VM: I/O Configuration</i> , form number unchanged
<i>z/VM: Installation Guide</i> , GC24-5992	<i>z/VM: Guide for Automated Installation and Service</i> , GC24-6064

[V4.4] Relocated Information

The following table shows information that has been relocated within the z/VM library.

Table 9. Information Relocated in z/VM V4.4

Topics	Old Location (Book)	New Location (Book)
• Installation-related CP utilities: INSTALL INSTDEF INSTIIS INSTPLAN INSTVM IPWIZARD MIGR51D MOVE2SFS	<i>z/VM: Installation Guide</i>	<i>z/VM: CP Commands and Utilities Reference</i>
• Messages for installation-related CP utilities	<i>z/VM: Installation Guide</i>	<i>z/VM: CP Messages and Codes</i>
• CP access control interface (ACI)	<i>z/VM: CP Planning and Administration</i>	<i>z/VM: CP Programming Services</i>

[V4.4] Deleted Books

The following table lists books that are not included in the z/VM V4.4 library.

Table 10. Books Removed from the Library in z/VM V4.4

Book Title and Number	Reason for Removal
<i>Debug Tool User's Guide and Reference</i> , SC09-2137	This product does not support the new C/C++ compiler.
<i>Language Environment for OS/390 & VM: Concepts Guide</i> , GC28-1945	Replaced by <i>z/OS: Language Environment Concepts Guide</i> , SA22-7567-03

Table 10. Books Removed from the Library in z/VM V4.4 (continued)

Book Title and Number	Reason for Removal
<i>Language Environment for OS/390 & VM: Debugging Guide and Run-Time Messages</i> , SC28-1942	Replaced by <i>z/OS: Language Environment Debugging Guide</i> , GA22-7560-03, and <i>z/OS: Language Environment Run-Time Messages</i> , SA22-7566-03
<i>Language Environment for OS/390 & VM: Programming Guide</i> , SC28-1939	Replaced by <i>z/OS: Language Environment Programming Guide</i> , SA22-7561-03
<i>Language Environment for OS/390 & VM: Programming Reference</i> , SC28-1940	Replaced by <i>z/OS: Language Environment Programming Reference</i> , SA22-7562-03
<i>Language Environment for OS/390 & VM: Run-Time Migration Guide</i> , SC28-1944	Not required for z/VM
<i>Language Environment for OS/390 & VM: Writing Interlanguage Communication Applications</i> , SC28-1943	Replaced by <i>z/OS: Language Environment Writing ILC Applications</i> , SA22-7563-01
<i>z/VM: Language Environment 1.8 C Run-Time Library Reference</i> , SC24-6038	Retitled to <i>C/C++ for z/VM: Run-Time Library Reference</i> , SC09-7625, and included in the C/C++ for z/VM bookshelf on the <i>z/VM Collection</i> CD-ROM.

[V5.1] Retitled Books

The following table lists z/VM books that have been retitled.

Table 11. Books Retitled in z/VM V5.1

Old Book Title	New Book Title
<i>VM/ESA: Connectivity Planning, Administration, and Operation</i>	<i>z/VM: Connectivity</i>
<i>z/VM: System Messages and Codes – CMS</i>	<i>z/VM: System Messages and Codes – CMS and REXX/VM</i>
<i>z/VM: System Messages and Codes – Other Components</i>	<i>z/VM: System Messages and Codes – AVS, Dump Viewing Facility, GCS, TSAF, and VMSES/E</i>

[V5.1] Relocated Information

The following table shows information that has been relocated within the z/VM library.

Table 12. Information Relocated in z/VM V5.1

Topics	Old Location (Book)	New Location (Book)
• “Converting to System Configuration Files”	<i>z/VM: CP Planning and Administration</i>	<i>z/VM: Migration Guide</i> , “Converting from HCPRIO, HCPSYS, and HCPBOX to Configuration Files” on page 177
• “Linux under z/VM”	<i>z/VM: Running Guest Operating Systems</i>	<i>z/VM: Getting Started with Linux on System z9 and zSeries</i>
• “Working with Virtual Networks”	<i>z/VM: Virtual Machine Operation</i>	<i>z/VM: Connectivity</i>

[V5.1] Deleted Books

The following table lists books that are not included in the z/VM V5.1 library.

Documentation

Table 13. Books Removed from the Library in z/VM V5.1

Book Title and Number	Reason for Removal
<i>eServer zSeries: Open Systems Adapter-Express Customer's Guide and Reference</i> , SA22-7476	Replaced by <i>eServer zSeries: Open Systems Adapter-Express Customer's Guide and Reference</i> , SA22-7935-02.
<i>S/390: Open Systems Adapter-Express Customer's Guide and Reference</i> , SA22-7403	This book is for S/390 servers (G5, G6), which are not supported by z/VM V5.1.
<i>S/390: Planning for the S/390 Open Systems Adapter (OSA-1, OSA-2) Feature</i> , GC23-3870	This book is for S/390 servers (G5, G6), which are not supported by z/VM V5.1.
<i>VM/ESA: Open Systems Adapter Facility User's Guide for OSA-2</i> , SC28-1992	This book is for S/390 servers (G5, G6), which are not supported by z/VM V5.1.
<i>VM/ESA: Programmer's Guide to the Server-Requester Programming Interface for VM/ESA</i> , SC24-5455	IBM intends to withdraw the Server-Requester Programming Interface (SRPI) from a future release of z/VM.
<i>VM/ESA: REXX/VM Primer</i> , SC24-5598	The same topics are covered in the <i>z/VM: REXX/VM User's Guide</i> , SC24-6114
<i>z/VM: Performance Reporting Facility Function Level 410</i> , SC24-6027	The Performance Reporting Facility functions have been merged into the Performance Toolkit. The Performance Reporting Facility feature is not available with or supported by z/VM V5.1.
<i>z/VM: RealTime Monitor Function Level 410</i> , SC24-6027	The RealTime Monitor functions have been merged into the Performance Toolkit. The RealTime Monitor feature is not available with or supported by z/VM V5.1.
<i>z/VM: System Administration Facility</i> , SC24-6034	IBM intends to withdraw the System Administration Facility from a future release of z/VM.

[V5.2] Retitled Books

The following table lists z/VM books that have been retitled.

Table 14. Books Retitled in z/VM V5.2

Old Book Title	New Book Title
<i>z/VM: Getting Started with Linux on zSeries</i>	<i>z/VM: Getting Started with Linux on System z9 and zSeries</i>
<i>z/VM Summary for Automated Installation and Service (Tape/CD-ROM Installation)</i>	<i>z/VM Summary for Automated Installation and Service (Tape Installation)</i>
<i>z/VM: System Messages and Codes – AVS, Dump Viewing Facility, GCS, TSAF, and VMSES/E</i>	<i>z/VM: Other Components Messages and Codes</i>
<i>z/VM: System Messages and Codes – CMS and REXX/VM</i>	<i>z/VM: CMS and REXX/VM Messages and Codes</i>
<i>z/VM: System Messages and Codes – CP</i>	<i>z/VM: CP Messages and Codes</i>

[V5.2] Deleted Books

The following table lists books that are not included in the z/VM V5.2 library.

Table 15. Books Removed from the Library in z/VM V5.2

Book Title and Number	Reason for Removal
OS/390: DFSMS Program Management, SC27-0806	Replaced by the following books: • <i>z/OS MVS Program Management: Advanced Facilities</i>, SA22-7644-04 • <i>z/OS MVS Program Management: User's Guide and Reference</i>, SA22-7643-03

Chapter 3. Changes to External Interfaces

This chapter identifies external interfaces in the VM **components** that have changed since VM/ESA V2.1. Each change is identified as either **upwardly compatible** or **incompatible**. Use the information provided in this chapter to determine if you need to make any changes in the way you use these interfaces. See “Compatibility Terms Used in This Book” on page 2 for the meaning of the compatibility terms.

Note: For changes that occur every release, such as responses from commands that query the level of the system, only the latest release is indicated.

This chapter contains the following major sections:

- CP Changes
- “CMS Changes” on page 145
- “AVS Changes” on page 172
- “Dump Viewing Facility Changes” on page 172
- “GCS Changes” on page 173
- “REXX/VM Changes” on page 173
- “TSAF Changes” on page 173
- “VMSES/E Changes” on page 174

CP Changes

This section identifies the changes to CP external interfaces. It contains the following subsections:

- System Configuration Statements
- “User Directory Control Statements” on page 103
- “CP Commands” on page 105
- “CP Utilities” on page 132
- “Dynamic I/O Return Codes” on page 134
- “DIAGNOSE Codes” on page 135
- “CP Macros” on page 138
- “CP System Services” on page 140
- “VM Dump Tool” on page 141
- “CP Messages” on page 144

System Configuration Statements

Table 16 lists the system configuration statements that have changed. For additional information, see *z/VM: CP Planning and Administration*.

Table 16. Changes to System Configuration Statements

Statement	Changes
CHARACTER_DEFAULTS	INCOMPATIBLE: • [V2.3] Letters A-Z, numbers 0-9, and bytes X'OE' (shift out) and X'OF' (shift in) cannot be defined as the system default line edit symbols (line-delete, character-delete, escape, line-end, and tab).

CP Interfaces

Table 16. Changes to System Configuration Statements (continued)

Statement	Changes
CPXLOAD	INCOMPATIBLE: • [V5.1] Operands removed: &TEXT, &TXTLIB. The dual-mode CP is no longer supported; CP runs only in 64-bit mode. The file type of all supplied CP text files is TEXT, not TEXT64. The file type of all supplied CP text libraries is TXTLIB, not T64LIB. Upwardly compatible: • [V5.1] LOCK and NOLOCK operands no longer have any effect. All symbols are considered resident, which means they cannot be locked or unlocked.
DEFINE COMMAND / CMD	Upwardly compatible: • [V4.4] New operand: SILENT.
DEFINE LAN	Upwardly compatible: • [V4.3] New operands: TYPE HIPERsockets, ACCOUNTing, GRANT <i>userlist</i>. • [V5.1] New operands: IP, ETHernet.
DEFINE VSWITCH	Upwardly compatible: • [V5.1] New operands: IP, ETHernet, VLAN, PORTType. • [V5.2 (VM63952)] New operands: GVRP NOGVRP.
EDEVICE	Upwardly compatible: • [V5.2] New operands: 1750, PREFerred, NOTPREFerred.
FEATURES	Upwardly compatible: • [V3.1] New options for automatic start and restart, IPL message control, and forced disconnect timeout.
MODIFY COMMAND / CMD	Upwardly compatible: • [V4.4] New operands: SILENT, NOTSILENT.
MODIFY LAN	Upwardly compatible: • [V5.2] New operands: PROmiscuous, NOPROmiscuous.
MODIFY VSWITCH	INCOMPATIBLE: • [V5.1] 'ANY' is not supported as a value for <i>vlanid</i>. It was formerly the default. The default VLAN for the user is now the VLAN ID specified on the DEFINE VSWITCH configuration statement or command. Upwardly compatible: • [V5.1] New operand: PORTType. • [V5.2] New operands: PROmiscuous, NOPROmiscuous.
OPERATOR_CONSOLES	INCOMPATIBLE: • [V4.4] New operand: SYSTEM_3270. This operand is not valid in the OPERATOR_CONSOLES statement for any prior VM release. If your only statement includes this operand, and you need to back out of the new release to your prior VM release, the exposure of a missing console could cause the initialization of the prior VM release to fail with a 1010 wait state. As a temporary measure during the migration to the new release, include two OPERATOR_CONSOLES statements, the first without the SYSTEM_3270 operand and the second with it. For example: <pre>OPERATOR_CONSOLES 03E0 0009 001F 00078 OPERATOR_CONSOLES SYSTEM_3270 03E0 0009 001F 00078</pre>

Table 16. Changes to System Configuration Statements (continued)

Statement	Changes
STORAGE	INCOMPATIBLE: • [V3.1] RIO370 operand removed. • [V5.1] Options removed: V=R, V=R_FREE. The V=R area and V=R recovery area are not supported.
SYSTEM_RESIDENCE	Upwardly compatible: • [V3.1] New VOLID options: &SYSRES, &SYSPARM.
USER_DEFAULTS	Upwardly compatible: • [V3.1] New operand: MESSAGE_LEVEL. • [V4.1] New operand: CPLANGUAGE. • [V4.1] Message HCP365I (new format) issued at system initialization.
VMLAN	Upwardly compatible: • [V4.3] New operands: ACNT, ACCOUNTing. • [V4.4] New operand: MACprefix <i>macprefix</i> • [V5.1] New operand: MACIDRange.
XLINK_DEVICE_DEFAULTS	INCOMPATIBLE: • [V5.1] Operands removed: TYPE 3330, TYPE 3340, TYPE 3350, TYPE 3375, TYPE 9345. Upwardly compatible: • [V4.2] The Class 9 description of the TYPE 3390 operand was changed. Specifying TYPE3390 Class 9 supports the maximum number of cylinders on the 3390 device (10017 or greater).
XLINK_VOLUME _INCLUDE	Upwardly compatible: • [V4.2] The description of the CYLinder operand was changed. The CSE track can now be on a cylinder from 0 to the maximum number of cylinders that the 3390 supports.

User Directory Control Statements

Table 17 lists the user directory control statements that have changed. For additional information, see *z/VM: CP Planning and Administration*.

Table 17. Changes to User Directory Control Statements

Statement	Changes
CONSOLE	Upwardly compatible: • [V4.2] New operand: OBSERVER.
CRYPTO	Upwardly compatible: • [V2.4] New operand: MODIFY. • [V4.2] New operand: APVIRT. • [V5.1] New operand: APDED. • [V5.2] Operands updated to clarify usage.
CPU	INCOMPATIBLE: • [V5.2] Operands removed: VECtor and NOVECtor are not supported. Upwardly compatible: • [V5.2] Updated operand: CRYPTO.

CP Interfaces

Table 17. Changes to User Directory Control Statements (continued)

Statement	Changes
DEDICATE	INCOMPATIBLE: [V5.1] Operand removed: NOIOASSIST. I/O assist is not supported. Upwardly compatible: [V4.3] New operands: SINGLEUSER, MULTIUSER. [V5.1] New operand: USERACCESSID <i>userid</i>.
DIRECTORY	INCOMPATIBLE: [V5.1] Device types 3350, 3370, 3375, 9332, 9335, and 9345 are not supported. Only 3380, 3390, 9336, and FB-512 are supported.
MACHINE	Upwardly compatible: [V5.1] 370 operand removed. If a virtual machine defined as 370 mode is IPLed, it is logged on in XA mode with 370 Accommodation turned on.
MDISK	Upwardly compatible: [V3.1] New volume identification option: &SYSRES. [V4.2] New maximum number of cylinders for 3390 models A98, B9C supported. [V5.1] Supports larger FBA disk size.
OPTION	INCOMPATIBLE: [V5.1] Operands removed: DEDICATE, NODEDICATE, VIRT=REAL, V=R, VIRT=FIXED, V=F. V=R and V=F virtual machines are not supported. Upwardly compatible: [V2.2] Current LKFAC operand authorizes full-pack minidisks and devices for real MPLF use. For dedicated devices, MPLF channel commands may now succeed where they used to fail. For full-pack minidisks, the change is transparent until you issue the new SET LKFACR command. [V2.3] Specifying the TODENABLE operand allows a user to change the virtual machine TOD clock with the new CP SET VTOD command. [V2.3] New operands: CFVM, CFUSER. [V2.4] New operand: DIAG88. [V4.3] New operands: NETAccounting, NETRouter. [V5.2] New operands: CRYMeasure. [V5.2 (VM63856)] New operand: NOMEMASSIST.
SPECIAL	INCOMPATIBLE: [V3.1] Changed message: HCP2801E. Upwardly compatible: [V2.3] New operand: MSGPROC. [V4.2] New operands: SCTC, BCTC, CNC, <i>n</i>, HIPER, <i>devs</i>, <i>ownerid</i>, and <i>lanname</i>. [V4.4] New operand: FCTC.
USER	INCOMPATIBLE: [V2.3] Letters A-Z, numbers 0-9, and bytes X'OE' (shift out) and X'OF' (shift in) cannot be defined as logical line edit symbols (line-end, line-delete, character-delete, and escape).

CP Commands

Table 18 lists the CP commands that have changed. For additional information, see the *z/VM: CP Commands and Utilities Reference*.

Table 18. Changes to CP Commands

Command	Changes
ACNT	Upwardly compatible: • [V4.3] Entering ACNT creates all available types of accounting records for each user specified.
ATTACH	INCOMPATIBLE: • [V5.1] Operand removed: NOIOASSIST. I/O assist is no longer supported, so there is no need to turn eligibility off. • [V5.1] Response for preferred virtual machine removed. Preferred virtual machines are no longer supported. • [V5.1] Messages removed: HCP811I, HCP1508I, HCP1511I, HCP1556I. • [V5.2 (VM63952)] Message removed: HCP6864E. Upwardly compatible: • [V3.1] New messages: HCP6860E, HCP6863E, HCP6864E. • [V4.3] New operands: SINGLEUSER, MULTIUSER. • [V4.3] New message: HCP1128E. • [V4.3] New response for the TYPE operand of FCP to indicate a SCSI device adapter. • [V4.4] New operand: VOLid. • [V5.1] New option: USERACCEssid userid. • [V5.1] New message: HCP6275E. • [V5.1] Changed message: HCP2826E. • [V5.2 (VM63952)] Message variations added: HCP6860E, HCP6863E. • [V5.2 (VM63952)] New PAV responses.
AUTOLOG	Upwardly compatible: • [V3.1] New message: HCP093E.
BEGIN	Upwardly compatible: • [V3.1] Supports hexadecimal storage locations up to 16 digits.
COMMIT	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
COUPLE	Upwardly compatible: • [V3.1] New message: HCP6024E. • [V4.2] New operands: <i>ownerid</i>, <i>lanname</i>. • [V4.2] New response. • [V4.2] New messages: HCP2786E, HCP2787E, HCP2788E, HCP2789E, HCP2791E. • [V4.2] Changed message: HCP6011E. • [V4.3] Changed message: HCP6024E. • [V4.4] New operand: SYSTEM <i>switchnm</i>. • [V5.1] New messages: HCP6525E and HCP6528E.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
CPLISTFILE	Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Responses include 4-digit years for FULLDATE and ISODATE operands.
CPXLOAD	Upwardly compatible: • [V5.1] LOCK and NOLOCK operands no longer have any effect. All symbols are considered resident, which means they cannot be locked or unlocked.
DEDICATE	INCOMPATIBLE: • [V5.1] Default of V=R user removed. USER operand must be specified. V=R virtual machine is not supported. • [V5.1] Message removed: HCP893E. • [V5.2] Message removed: HCP664I.
DEFINE (in general)	INCOMPATIBLE: • [V5.1] Messages removed: HCP811I, HCP1450E. • [V5.2] Messages removed: HCP645E, HCP659E, HCP661E, HCP662I, HCP663E, HCP664I. • [V5.2] Operand removed: VECTOR. Upwardly compatible: • [V2.3] New operand: MSGPROC. • [V2.3] New messages: HCP045E, HCP260E, HCP1014E, HCP2800E, HCP2801E, HCP2802E, HCP2803E, HCP2804I, HCP2806E, HCP2811E. • [V2.4] New operand: EXIT. • [V4.2] New operands: CFLINK, LAN, NIC, SUBSTITUTE. • [V4.2] New messages: HCP2781E, HCP2782E, HCP2784E, HCP2792E, HCP2794E, HCP2795E, HCP2796E. • [V4.4] New operand: VSWITCH. • [V5.2] New operand: LPAR. • [V5.2] Changed messages: HCP864E, HCP1006E, HCP6806E. • [V5.2 (VM63952)] New operand: PAVALIAS. • [V5.2 (VM63952)] New message: HCP6867E. • [V5.2 (VM63952)] Changed message: HCP2846E. • Also see specific DEFINE commands listed below.

Table 18. Changes to CP Commands (continued)

Command	Changes
DEFINE CHPID / PATH	Upwardly compatible: • [V2.2] New operands: INTEGRATED_SYSTEM_DEVICE, ISD. • [V2.4] New operands: CLUSTER_BUS_SENDER_CHANNEL, CBS, FICON, FC, FICON_CONVERTER, FCV, OSA_DIRECT_EXPRESS, OSD, OSA_EXPRESS, OSE. • [V2.4] New return codes for message HCP6806E. • [V3.1] New operands: CLUSTER_BUS_PEER_CHANNEL, CBP, CLUSTER_BUS_RECEIVER_CHANNEL, CBR, COUPLING_FACILITY_RECEIVER_CHANNEL, CFR, DIRECT_SYSTEM_DEVICE, DSD, EMULATED_I/O, EIO, INTERNAL_COUPLING_PEER_CHANNEL, ICP, IOCLUSTER <i>iocname</i>, MANAGED, PEERPATH <i>nn</i>. • [V4.3] New operand: FCP. • [V4.4] New operands: PCHID <i>nnnn</i>, CSS <i>nn</i>, PEERCSS <i>nn</i>. • [V5.2] New operands: OSN, OSA_NCP.
DEFINE COMMAND / CMD	Upwardly compatible: • [V4.4] New operand: SILENT. • [V5.1] The SILENT operand can be specified as SILENTLY.
DEFINE CPOWNER	Upwardly compatible: • [V4.2] New operand: RESERVED.
DEFINE CRYPTO	Upwardly compatible: • [V2.4] New response. • [V2.4] New message: HCP1716E.
DEFINE CTCA	Upwardly compatible: • [V3.1] New operands: SCTC, BCTC, CNC. • [V4.4] New operand: FCTC.
DEFINE CU / CNTLUNIT	Upwardly compatible: • [V2.4] CFS operand has been changed to CF because this operand now indicates that the control unit is connected to a coupling facility sender channel path or a cluster bus sender channel path, or both. However, the CFS form of the operand is still supported for compatibility. • [V2.4] Range of permitted values for CU_LOGICAL_ADDRESS has been increased. • [V3.1] New option for TYPE: *. • [V3.1] New operand: MANAGED_PATHS <i>n</i>. • [V4.2] New operand: FICON_CTC. • [V4.4] Changed operand: LINK_address. • [V4.4] New operand: CSS <i>nn</i>.
DEFINE DEVICE / IODEVICE	Upwardly compatible: • [V2.4] CFS operand has been changed to CF because this operand now indicates that the control unit is connected to a coupling facility sender channel path or a cluster bus sender channel path, or both. However, the CFS form of the operand is still supported for compatibility. • [V4.4] New operand: CSS <i>nn</i>. • [V5.2] New operands: UNIT 3745, UNIT OSN.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
DEFINE LAN	Upwardly compatible: • [V4.3] New ACCOUNTING ON and ACCOUNTING OFF operands allow Class B users to control whether accounting records are to be created for the LAN being defined. • [V5.1] New operands: IP, ETHernet.
DEFINE MSGPROC	INCOMPATIBLE: • [V3.1] Changed message: HCP2801E. Upwardly compatible: • [V4.2] New operand: DEVICES.
DEFINE NIC	Upwardly compatible: • [V4.4] Updated information for the HIPERsockets and QDIO operands to include virtual switch information.
DEFINE STORAGE	Upwardly compatible: • [V3.1] New operand: CONFIGURATION.
DEFINE (Temporary Disk)	INCOMPATIBLE: • [V5.1] Operands removed: T3350, T3375, T9345, T3370, T9332, T9335.
DEFINE VECTOR	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.
DEFINE VSWITCH	Upwardly compatible: • [V5.1] New operands: IP, ETHernet, VLAN, PORTType. • [V5.1] New message: HCP2846E. • [V5.2 (VM63952)] New operands: GVRP NOGVRP.
DEFSYS	INCOMPATIBLE: • [V5.1] Value of '370' not supported with MACHMODE option. 370 virtual machines are not supported.
DELETE (in general)	INCOMPATIBLE: • [V5.2] Operand removed: VECTOR. Upwardly compatible: • [V4.4] New operand: VSWITCH. • [V5.2] New operand: LPAR.
DELETE CHPID / PATH	Upwardly compatible: • [V2.4] New return codes for message HCP6806E. • [V4.4] New operand: CSS <i>nn</i>.
DELETE CU / CNTLUNIT	Upwardly compatible: • [V2.4] CFS operand has been changed to CF because this operand now indicates that the control unit is connected to a coupling facility sender channel path or a cluster bus sender channel path, or both. However, the CFS form of the operand is still supported for compatibility. • [V4.4] New operand: CSS <i>nn</i>. • [V4.4] New message: HCP1006E.

Table 18. Changes to CP Commands (continued)

Command	Changes
DELETE DEVICE / IODEVICE	Upwardly compatible: • [V2.4] CFS operand has been changed to CF because this operand now indicates that the control unit is connected to a coupling facility sender channel path or a cluster bus sender channel path, or both. However, the CFS form of the operand is still supported for compatibility. • [V3.1] Additional format for message HCP6818E. • [V4.4] New operand: CSS <i>nn</i>. • [V4.4] New message: HCP1006E.
DELETE RDEVICE	Upwardly compatible: • [V3.1] New message: HCP6862E.
DESTAGE	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
DETACH (in general)	INCOMPATIBLE: • [V5.1] Messages removed: HCP811I, HCP893E. • [V5.2] Operand removed: VECTOR. • [V5.2] Message removed: HCP664I. Upwardly compatible: • [V2.3] New operand: MSGPROC. • [V2.3] Additional messages: HCP260E, HCP2805E, HCP2807E. • [V4.2] New operands: CFLINK, LAN, NIC. • [V4.2] Additional messages: HCP006E, HCP2783E, HCP2793E, HCP2795E. • [V4.3] New message: HCP1119E. • [V4.3] New response for the TYPE operand of FCP to indicate a SCSI device adapter. • [V4.4] New operand: VSWITCH. • [V5.1] New message: HCP6324I. • [V5.2] Changed message: HCP660E. • [V5.2 (VM63952)] New message: HCP6866E. • Also see specific DETACH commands listed below.
DETACH CRYPTO	INCOMPATIBLE: • [V5.2] Changed message: HCP660E.
DETACH (Real Device)	Upwardly compatible: • [V4.3] New operand: ALL. • [V4.4] New operand: VOLid. • [V5.2 (VM63952)] New PAV responses.
DETACH VECTOR	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.
DIAL	INCOMPATIBLE: • [V3.1] The fields of an IP address included in the response no longer contain leading zeros.
DISCARD PINNED	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
DISCONNECT	Upwardly compatible: [V3.1] Time the system waits between disconnect and automatic logoff can be set on the FEATURES system configuration statement.
DISPLAY (in general)	INCOMPATIBLE: [V5.2] Messages removed: HCP645E, HCP785E, HCP1701E. [V5.2] Vector function removed. - Also see specific DISPLAY commands listed below. Upwardly compatible: [V3.1] New operand: PSWG. [V3.1] Message HCP6150E may specify z/Architecture mode. - Also see specific DISPLAY commands listed below.
DISPLAY ESA/XC Storage	See DISPLAY (Guest Storage - ESA/XC).
DISPLAY (Guest Storage - ESA/390)	INCOMPATIBLE: [V5.2] In responses that contain a trailer identifying the second-level storage address, the trailer has changed from Lhexloc to Rhexloc. Upwardly compatible: [V3.1] New operands for indirect addressing and displaying data in ASCII format. [V3.1] Supports 64-bit addressing. [V3.1] New z/Architecture variation. [V5.2 (VM63856)] Response to the K operand includes the block-usage state and the block-content state.
DISPLAY (Guest Storage - ESA/XC)	Upwardly compatible: [V3.1] New operands for indirect addressing and displaying data in ASCII format. [V3.1] Supports 64-bit addressing. [V5.2 (VM63856)] Response to the K operand includes the block-usage state and the block-content state.
DISPLAY (Guest Storage - z/Architecture)	INCOMPATIBLE: [V5.2] In responses that contain a trailer identifying the second-level storage address, the trailer has changed from Lhexloc to Rhexloc. Upwardly compatible: [V5.2 (VM63856)] Response to the K operand includes the block-usage state and the block-content state.
DISPLAY (Host Storage)	INCOMPATIBLE: [V5.2] New L and R operands to specify host logical storage or host real storage. L is the default. [V5.2] Response contains additional character, L or R, to indicate contents are from host logical storage or host real storage. [V5.2] New messages: HCP160E, HCP164E. Upwardly compatible: [V3.1] New operands for indirect addressing and displaying data in ASCII format. [V3.1] Supports 64-bit addressing. [V5.2] Response may contain a trailer identifying the host real storage address.

Table 18. Changes to CP Commands (continued)

Command	Changes
DISPLAY LKS	Upwardly compatible: • [V2.2] Response indicates the called-space identification (CSID) if the linkage-stack entry type is a program-call state entry with a called-space ID. • [V3.1] New responses for 64-bit mode.
DISPLAY PSW	Upwardly compatible: • [V3.1] For a z/Architecture guest, translates a z/Architecture format PSW into an ESA/390 format PSW (if the SET PSWTRANS ALL or SET PSWTRANS STORE command was previously issued).
DISPLAY Registers	Upwardly compatible: • [V2.4] New operand: FPC. • [V2.4] Yreg operands accept register numbers 0-15 if the IEEE Floating Point hardware feature is installed on the processor. • [V2.4] New response when FPC operand is used. • [V2.4] New messages: HCP6153E, HCP6154E. • [V3.1] New operands: GGreg1, GHreg1, XGreg1, XHreg1. • [V5.2 (VM63952)] New operand: BEAR.
DISPLAY Vector	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.
DUMP (in general)	INCOMPATIBLE: • [V5.2] Messages removed: HCP645E, HCP785E, HCP1701E. • [V5.2] Vector function removed. • Also see specific DUMP commands listed below. Upwardly compatible: • [V3.1] Message HCP6150E may specify z/Architecture mode. • [V3.1] New operand: PSWG. • Also see specific DUMP commands listed below.
DUMP ESA/XC Storage	See DUMP (Guest Storage - ESA/XC)
DUMP (Guest Storage - ESA/390)	INCOMPATIBLE: • [V5.2] In responses that contain a trailer identifying the second-level storage address, the trailer has changed from Lhexloc to Rhexloc. Upwardly compatible: • [V3.1] New operands for indirect addressing and dumping data in ASCII format. • [V3.1] Supports 64-bit addressing. • [V3.1] New z/Architecture version of this command.
DUMP (Guest Storage - ESA/XC)	Upwardly compatible: • [V3.1] New operands for indirect addressing and dumping data in ASCII format. • [V3.1] Supports 64-bit addressing.
DUMP (Guest Storage - z/Architecture)	INCOMPATIBLE: • [V5.2] In responses that contain a trailer identifying the second-level storage address, the trailer has changed from Lhexloc to Rhexloc.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
DUMP (Host Storage)	INCOMPATIBLE: • [V5.2] New L and R operands to specify host logical storage or host real storage. L is the default. • [V5.2] Response contains additional character, L or R, to indicate contents are from host logical storage or host real storage. • [V5.2] New messages: HCP160E, HCP164E. Upwardly compatible: • [V3.1] New operands for indirect addressing and dumping data in ASCII format. • [V3.1] Supports 64-bit addressing. • [V5.2] Response may contain a trailer identifying the host real storage address.
DUMP LKS	Upwardly compatible: • [V2.2] Response indicates the called-space identification (CSID) if the linkage-stack entry type is a program-call state entry with a called-space ID. • [V3.1] New responses for 64-bit mode.
DUMP (Registers)	Upwardly compatible: • [V3.1] New operands: GG, GH, XG, XH.
DUMP Vector	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.
DUPLEX	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
FLASHCOPY	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
FORCE	INCOMPATIBLE: • [V4.3] Message HCP6704E is now returned instead of HCP020E if FORCE is issued with no operands. Upwardly compatible: • [V4.3] New operands for LOGoff which will send a shutdown signal to the user.
GIVE	Upwardly compatible: • [V4.3] New message: HCP1118E.
HALT	Upwardly compatible: • [V4.3] New response for the TYPE operand of FCP to indicate a SCSI device adapter.
INDICATE (in general)	INCOMPATIBLE: • [V5.2] Messages removed: HCP645E, HCP785E, HCP1701E. • [V5.2] Operand removed: VECTOR. Upwardly compatible: • See specific INDICATE commands listed below.

Table 18. Changes to CP Commands (continued)

Command	Changes
INDICATE LOAD	INCOMPATIBLE: • [V5.2] 'STORAGE-<i>nnn</i>%' field remove from response. • [V5.2] 'PAGING-<i>nnnn</i>' field in response may contain 1 to 8 digits. • [V5.2] Vector Facility fields (AVGVEC-<i>nnn</i>%, VECTOR-<i>aaaaa</i>, VEC-<i>nnn</i>%) removed from response. Vector Facility is not supported.
INDICATE PAGING	INCOMPATIBLE: • [V5.1] Response no longer includes page residency data for the CP nucleus. All modules in the CP nucleus are now resident.
INDICATE QUEUES	Upwardly compatible: • [V3.1] Responses changed to support 64-bit architecture.
INDICATE SPACES	Upwardly compatible: • [V3.1] Responses changed to support 64-bit architecture.
INDICATE USER	INCOMPATIBLE: • [V5.1] IO field in the response no longer includes a plus sign (+) to indicate operation with SIE assist. SIE assist is not supported. • [V5.2] In standard response, LOCK field changed to LOCKEDREAL. • [V5.2] Response for EXPANDED operand contains new fields. • [V5.2] Responses changed to remove Vector Facility information (VVECTIME, TVECTIME). Vector Facility is not supported. Upwardly compatible: • [V3.1] Responses changed to support 64-bit architecture.
INDICATE VECTOR	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.
IPL	INCOMPATIBLE: • [V2.2] New response is issued if tracing is active when a preferred guest is IPLed. Tracing must be turned off and the guest reIPLed. • [V2.3] Previously, when you IPLed CMS with the PARM operand, CMS initialization attached a fence of 8 bytes of X'FF's to the end of the PARM data before passing it to the SYSPROF EXEC. Now, no fence is attached, and only the actual PARM data (up to 64 characters) is passed. If you have tailored your SYSPROF EXEC to use the fence to determine the end of the PARM data, you must modify your SYSPROF EXEC to use a different method. • [V5.1] Text for message HCP6770E has changed. • [V5.1] Messages removed: HCP203E, HCP811I. Upwardly compatible: • [V4.4] New operand: <i>fcp-dev</i>, with STOP and ATTN options.. • [V5.1] New messages: HCP260E and HCP838E.
LOCATE (in general)	INCOMPATIBLE: • See specific LOCATE commands listed below. Upwardly compatible: • [V5.2] New operand: SXSTE. • Also see specific LOCATE commands listed below.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
LOCATE CMDBK	INCOMPATIBLE: • [V5.2] Displayed storage address is host logical. Upwardly compatible: • [V3.1] New message: HCP026E.
LOCATE DGNBK	INCOMPATIBLE: • [V5.2] Displayed storage address is host logical. Upwardly compatible: • [V3.1] New message: HCP009E.
LOCATE FILID	INCOMPATIBLE: • [V5.2] Displayed storage addresses are host logical. Upwardly compatible: • [V3.1] New message: HCP026E.
LOCATE FRAMETBL	INCOMPATIBLE: • [V5.2] Displayed storage address of frame table entry is host logical. Upwardly compatible: • [V3.1] New message: HCP026E. • [V3.1] New response formats for 64-bit addresses.
LOCATE ICLBK	INCOMPATIBLE: • [V5.2] Displayed storage addresses are host logical.
LOCATE LDEV	INCOMPATIBLE: • [V5.2] Displayed storage addresses are host logical. Upwardly compatible: • [V3.1] New message: HCP026E.
LOCATE RDEV	INCOMPATIBLE: • [V5.2] Displayed storage addresses are host logical.
LOCATE SHPBK	INCOMPATIBLE: • [V5.2] Displayed storage address is host logical.
LOCATE SNABK	INCOMPATIBLE: • [V5.2] Displayed storage addresses are host logical.
LOCATE SPFBK	INCOMPATIBLE: • [V5.2] Displayed storage addresses are host logical.
LOCATE (Storage)	INCOMPATIBLE: • [V5.2] CPVIRTUAL operand removed, no longer supported. • [V5.2] New LOGICAL and REAL operands to specify host logical storage or host real storage. CPREAL operand is still supported and is a synonym for REAL. Upwardly compatible: • [V3.1] New operand: ASCII. • [V3.1] New messages: HCP002E, HCP003E, HCP004E, HCP009E, HCP6704E.

Table 18. Changes to CP Commands (continued)

Command	Changes
LOCATE SYMBOL	INCOMPATIBLE: • [V5.1] Response contains only one address for each symbol, as all symbols are now resident. • [V5.2] Displayed storage address is host logical.
LOCATE VDEV	INCOMPATIBLE: • [V5.2] Displayed storage addresses are host logical. Upwardly compatible: • [V3.1] New messages: HCP020E, HCP026E.
LOCATE VMDBK	INCOMPATIBLE: • [V5.2] Displayed storage addresses under VMDBK heading are host logical. New column in response for host real storage address. Upwardly compatible: • [V3.1] New messages: HCP020E, HCP026E. • [V5.2] Supports the SET UNDERSCORE command setting to control the separation of 16-digit output fields.
LOCATE VSMBK	INCOMPATIBLE: • [V5.2] Displayed storage address is host logical. Upwardly compatible: • [V3.1] New message: HCP026E.
LOCATE XITBK	INCOMPATIBLE: • [V5.2] Displayed storage address is host logical.
LOCATEVM	Upwardly compatible: • [V3.1] New operand: ASCII. • [V3.1] New messages: HCP002E, HCP003E, HCP004E, HCP009E, HCP6704E.
LOCK	INCOMPATIBLE: • [V5.1] SYSTEM operand removed. The CP nucleus is no longer pageable. Modules in the nucleus cannot be locked or unlocked. • [V5.1] Text for message HCP295E has changed. • [V5.2] New required operand, LOGICAL or REAL, to specify whether guest storage is to be locked to host logical storage or host real storage. Response is also changed. Upwardly compatible: • [V3.1] New response variations to support 64-bit architecture. • [V5.1] SYMBOL and <i>symbol</i> operands have no effect. All symbols are now considered resident (locked) and cannot be individually locked.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
LOGON / LOGIN	INCOMPATIBLE: [V3.1] The fields of an IP address included in the response no longer contain leading zeros. [V4.1] 370 operand no longer supported. [V5.1] Messages removed: HCP200E, HCP811I, HCP893E, HCP1106I, HCP1508I, HCP1511I, HCP1556I. [V5.2] Messages removed: HCP662I, HCP663E, HCP664I. Upwardly compatible: [V2.3] New message: HCP2808E. [V3.1] Can specify larger amount of storage on the STORAGE operand. [V3.1] The response contains a new field after the service level to identify the CP image that is running: '[32-bit]' or '[64-bit]'. [V3.1] New message: HCP093E. [V4.3] New message: HCP2094I. [V5.1] The image field in the response always contains '[64-bit]'. [V5.1] New message: HCP1128E. [V5.2] In the response, the product level has changed.
MODIFY (in general)	Upwardly compatible: See specific MODIFY commands listed below.
MODIFY CHPID / PATH	Upwardly compatible: [V2.4] New return codes for message HCP6806E. [V4.4] New operands: CSS <i>nn</i>, ADD_CSS_access, RCSS <i>nn</i>, INITial_access <i>pname</i>, DELETE_CSS_access. [V4.4] New messages: HCP864E, HCP1006E.
MODIFY COMMAND / CMD	Upwardly compatible: [V4.4] New operands: SILENT, NOTSILENT. [V5.1] The SILENT and NOTSILENT operands can be specified as SILENTLY and NOTSILENTLY. Also, they cannot be used when modifying a specific version of a command with the IBMCLASS <i>version</i> operands.
MODIFY CU / CNTLUNIT	Upwardly compatible: [V2.4] New operands: TYPE CF. [V2.4] Range of permitted values for CU_LOGICAL_ADDRESS has been increased. [V3.1] New operand: MANAGED_PATHS <i>n</i>. [V4.4] Changed operand: LINK_address. [V4.4] New message for the LINK_address: HCP6536E. [V4.4] New operands: CSS <i>nn</i>, ADD_CSS_access, RCSS <i>nn</i>, DELETE_CSS_access. [V4.4] New message: HCP1006E.
MODIFY DEVICE / IODEVICE	Upwardly compatible: [V3.1] New format for message HCP6818E. [V4.4] New operand: CSS <i>nn</i>. [V4.4] New messages: HCP864E, HCP1006E.
MONITOR (in general)	INCOMPATIBLE: [V5.1] Message removed: HCP6232E.

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY (in general)	INCOMPATIBLE: • [V5.1] Operands removed: IOASSIST, VRFREE, V=R. • [V5.2] Operands removed: VECTOR, VIRTUAL VECTOR. • Also see specific QUERY commands listed below. Upwardly compatible: • [V3.1] New operands: PAV, PSWTRANS, UNDERSCORE. • [V4.2] New operands: CFLINKS, LAN, NIC, SUBSTITUTE, VMLAN, VTOD • [V4.3] New operand: IOPRIORITY • [V4.4] New operands: CONTROLLER, LOADDEV, VSWITCH. • [V5.1] New operands: EDEVICE, HYPERSWAP. • [V5.2] New operands: SXSPAGES, SXSSTORAGE. • [V5.2 (VM63856)] New operand: MEMASSIST. • [V5.2 (VM63952)] New operand: VIRTUAL PAV. • Also see specific QUERY commands listed below.
QUERY ABEND	Upwardly compatible: • [V5.2] New operands: SOFT <i>aaannn</i>, OFF, OFF <i>aaannn</i>.
QUERY ALL	INCOMPATIBLE: • [V5.1] Response indicating a tape drive is being used by SPTAPE has been removed. SPTAPE is no longer supported. Upwardly compatible: • [V4.3] New responses to indicate tapes attached MULTIUSER, also to indicate a SCSI device adapter with a TYPE of FCP.
QUERY ALLOC	INCOMPATIBLE: • [V5.1] Response has been changed to support large SCSI LUNs. The fields containing allocation values are expanded and reformatted to support the larger values.
QUERY CACHE	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
QUERY CACHEFW	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E. Upwardly compatible: • [V2.2] Response indicates if the cache fast write function is suspended for the subsystem.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY CHPID	Upwardly compatible: • [V2.3] New operand: TYPE. • [V2.3] New responses if TYPE is specified. • [V2.4] New responses for the TYPE operand to indicate OSA Express, OSA Direct-Express, cluster-bus-sender, and FICON channels. • [V3.1] New responses for the TYPE operand to indicate coupling-facility-sender, cluster-bus-receiver, internal-coupling-sender, internal-coupling-receiver, direct-system-device, emulated-I/O, cluster-bus-peer, coupling-facility-peer, and internal-coupling-peer channels. • [V4.3] New response for the TYPE operand of FCP to indicate a SCSI device adapter. • [V4.4] New operand: PCHID <i>nnnn</i>. • [V4.4] New message: HCP1006E. • [V5.1] New response for the TYPE operand to indicate an Open Systems Adapter 3270-Console (OSC) channel. • [V5.2] New response for the TYPE operand to indicate an Open Systems Adapter NCP (OSN) channel.
QUERY CONTROLLER	INCOMPATIBLE: • [V5.1] Format of the response has changed. • [V5.2 (VM63952)] Output for command was updated to include the GVRP attribute.
QUERY CPCMDS	INCOMPATIBLE: • [V5.2] Address of CMDBK in response is host logical.
QUERY CPLANGLIST	Upwardly compatible: • [V4.1] Responses may have new meanings.
QUERY CPLEVEL	Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Response includes 4-digit years for FULLDATE and ISODATE operands. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY CPLEVEL command, the output from QUERY CPLEVEL uses the new default date format. This causes the date to be expanded to include the 4-digit year and also causes fields to the right of the date to be shifted. • [V3.1] The response contains a new field after the service level to identify the CP image that is running: '[32-bit]' or '[64-bit]'. • [V5.1] The image field in the response always contains '[64-bit]'. • [V5.2] In the response, the product level has changed.
QUERY CPLOAD	Upwardly compatible: • [V3.1] Responses have changed because you can no longer load CP from a nucleus, only from a module.
QUERY CPXLOAD	Upwardly compatible: • [V5.1] Displayed address of customer-written CP routine is host logical.

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY CRYPTO	INCOMPATIBLE: • [V4.2] Revised responses. The keyentry information is no longer issued. Upwardly compatible: • [V2.4] New operand: CAMQS. • [V2.4] Two new responses. • [V4.2] Added APqs parameter. • [V5.1] Responses revised to indicate installation of Crypto Adjunct Processor. • [V5.2] Response revised with new AP type of Crypto Express2 Accelerator (CEX2A).
QUERY DASD	Upwardly compatible: • [V3.1] New operand: QUIESCED. • [V3.1] Response for QUERY DASD DETAILS may contain a new line containing Parallel Access Volumes information. • [V5.1] Response for QUERY DASD DETAILS changed for devices attached to a caching storage controller.
QUERY DASDFW	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E. Upwardly compatible: • [V2.2] Response indicates if the DASD fast write function is suspended for the subsystem.
QUERY DUMP	Upwardly compatible: • [V5.2] Responses revised to include XF operand, removed PRINTER, ALL and NOPRINT operands. • [V5.2] Changed message: HCP9259I.
QUERY DUPLEX	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
QUERY EDEVICE	Upwardly compatible: • [V5.2] Responses have changed.
QUERY EXITS	Upwardly compatible: • [V2.4] Additional response information provided for a dynamic CP exit.
QUERY FCP	Upwardly compatible: • [V5.1] New operand: AGEnt. • [V5.1] New response for AGEnt operand. • [V5.2 (VM63952)] New WWPEN value in responses.
QUERY FENCES	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
QUERY FRAMES	INCOMPATIBLE: • [V5.2] Response completely changed in structure and content. Upwardly compatible: • [V3.1] Responses changed to support 64-bit architecture. • [V5.1] The V=R field of the response will always be zero. The V=R area is not supported. • [V5.1] The PGNUC field of the response indicates additional frames being used by the CP nucleus. However, the CP nucleus is no longer pageable.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY GRAF	INCOMPATIBLE: [V3.1] The fields of an IP address included in the response no longer contain leading zeros.
QUERY IMG	Upwardly compatible: [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. [V2.2] Response includes 4-digit years for FULLDATE and ISODATE operands. [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY IMG command, the output from QUERY IMG uses the new default date format. This causes the date to be expanded to include the 4-digit year and also causes fields to the right of the date to be shifted.
QUERY IOASSIST	INCOMPATIBLE: [V5.1] Command has been removed. I/O assist is not supported.
QUERY LAN	INCOMPATIBLE: [V4.4] In the response, the <i>ipaddr (n)</i> address can contain an IPv6 address. [V5.1] Format of the response has changed. Upwardly compatible: [V4.3] New ACCOUNTING ON and ACCOUNTING OFF responses indicate whether accounting records will be generated for this LAN. [V4.4] New operand: VLAN <i>vlanid</i>. [V5.2] New PROMiscuous operand and updated response.
QUERY LDEVS	INCOMPATIBLE: [V3.1] The fields of an IP address included in the response no longer contain leading zeros. Upwardly compatible: [V2.3] The response may include the IP address for TCP/IP.
QUERY LPARS	Upwardly compatible: [V4.4] New operand: CSS <i>nn</i>. [V4.4] New responses. [V5.2] New operand: REServed. [V5.2] New responses.
QUERY MDCACHE	Upwardly compatible: [V5.2 (VM63952)] Additional meaning for value in message HCP1921E.
QUERY NAMES	INCOMPATIBLE: [V3.1] The fields of an IP address included in the response no longer contain leading zeros.
QUERY NIC	INCOMPATIBLE: [V5.1] The format of the response has changed. Upwardly compatible: [V4.4] In the response, the <i>ipaddr (n)</i> address can contain an IPv6 address. [V4.4] Updated example to include VLAN information.

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY NLS	Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Response includes 4-digit years for FULLDATE and ISODATE operands. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY NLS command, the output from QUERY NLS uses the new default date format. This causes the date to be expanded to include the 4-digit year and also causes fields to the right of the date to be shifted.
QUERY NSS	INCOMPATIBLE: • [V5.1] Message removed: HCP1375I. Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Response includes 4-digit years for FULLDATE and ISODATE operands. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY NSS command, the output from QUERY NSS uses the new default date format. This causes the date to be expanded to include the 4-digit year and also causes fields to the right of the date to be shifted.
QUERY NVS	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
QUERY OSA	Upwardly compatible: • [V5.2] New operands: TYpe, ALL, HIPersockets, OSA, OSN. • [V5.2] Three new responses.
QUERY PATHS	Upwardly compatible: • [V5.2] New and changed responses.
QUERY PINNED	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
QUERY PROMPT	INCOMPATIBLE: • [V5.1] Operand removed: AFTER_POWEROFF

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY READER / PRINTER / PUNCH	INCOMPATIBLE: • [V5.1] Response for file being used by SPTAPE has been removed. SPTAPE is no longer supported. Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Responses include 4-digit years for FULLDATE and ISODATE operands. • [V2.2] New operands DIST and NODIST, available only with operands FULLDATE and ISODATE, specify whether the distribution code is to be included in the response. The default is NODIST, so the output record fits within an 80-character buffer. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY RDRIPTIPUN command, the output from QUERY RDRIPTIPUN uses the new default date format. This causes the date to be expanded to include the 4-digit year, the NAME and TYPE fields to the right of the date to be shifted, and the distribution code to be omitted (by default).
QUERY (Real Device)	INCOMPATIBLE: • [V5.1] Response for tape device being used by SPTAPE has been removed. SPTAPE is no longer supported. • [V5.1] Message removed: HCP2601E. Upwardly compatible: • [V4.3] New ID operand to display the device and control unit identifiers for a specified device address, if they are known. • [V4.3] New response to indicate tapes attached MULTIUSER.
QUERY RSAW	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
QUERY SET	Upwardly compatible: • [V5.1] Because NOTRAN, IOASSIST, and CCWTRAN can no longer be set, these fields in the response are retained only for compatibility and will always indicate NOTRAN OFF, IOASSIST OFF, and CCWTRAN ON.
QUERY SPACES	Upwardly compatible: • [V3.1] Response may contain new values to indicate larger address space.
QUERY STORAGE	Upwardly compatible: • [V3.1] Response may contain new values to indicate greater storage.
QUERY TAPES	INCOMPATIBLE: • [V5.1] Response for tape drive being used by SPTAPE has been removed. SPTAPE is no longer supported. Upwardly compatible: • [V4.3] New response to indicate tapes attached MULTIUSER.

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY TIME	Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Response includes 4-digit years for FULLDATE and ISODATE operands. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY TIME command, the output from QUERY TIME uses the new default date format. This causes the date to be expanded to include the 4-digit year.
QUERY TOKEN	Upwardly compatible: • [V3.1] New message: HCP6815E.
QUERY TRACE	Upwardly compatible: • [V3.1] Responses may contain new values and expanded address field for 64-bit.
QUERY TRFILES	Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Response includes 4-digit years for FULLDATE and ISODATE operands. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY TRFILES command, the output from QUERY TRFILES uses the new default date format. This causes the date to be expanded to include the 4-digit year and also causes fields to the right of the date to be shifted.
QUERY TRSOURCE	Upwardly compatible: • [V5.2] New LAN operand and response.
QUERY UCR	Upwardly compatible: • [V2.2] New operands to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Response includes 4-digit years for FULLDATE and ISODATE operands. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the QUERY UCR command, the output from QUERY UCR uses the new default date format. This causes the date to be expanded to include the 4-digit year and also causes fields to the right of the date to be shifted.
QUERY USERID	Upwardly compatible: • [V3.1] Response may contain additional fields to indicate IP address.
QUERY USERS	INCOMPATIBLE: • [V3.1] The fields of an IP address included in the response no longer contain leading zeros.
QUERY VECTOR	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY VIRTUAL ALL	INCOMPATIBLE: [V5.2] Changed message: HCP662I. Upwardly compatible: [V2.3] Supports virtual message processors. [V4.3] New response for the TYPE operand of FCP to indicate a SCSI device adapter.
QUERY VIRTUAL CONSOLE	INCOMPATIBLE: [V2.3] Response may include a new line containing TCP/IP information.
QUERY VIRTUAL CRYPTO	INCOMPATIBLE: [V4.2] One response was deleted. Other responses were revised to include Direct Attached Crypto information. Upwardly compatible: [V2.4] New response. [V5.2] Response revised with new AP type of Crypto Express2 Accelerator (CEX2A).
QUERY VIRTUAL CTCA	INCOMPATIBLE: [V3.1] Response contains new subclass field. [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported. Upwardly compatible: [V4.4] Response contains new subclass field: FCTC.
QUERY VIRTUAL DASD	INCOMPATIBLE: [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported.
QUERY (Virtual Device)	INCOMPATIBLE: [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported. Upwardly compatible: [V2.3] Response indicates REAL-MPLF or SIMULATED-MPLF if enabled for the device. [V2.3] Supports virtual message devices. The device type MSGD appears in the response. [V4.2] Changed response. [V4.3] New response for the TYPE operand of FCP to indicate a SCSI device adapter. [V5.2 (VM63952)] New PAV responses.
QUERY VIRTUAL DASD	Upwardly compatible: [V5.2 (VM63952)] New PAV responses.
QUERY VIRTUAL DUPLEX	INCOMPATIBLE: [V5.1] Message removed: HCP2601E.
QUERY VIRTUAL FCP	Upwardly compatible: [V5.1] Response may include new BYTES information for QDIO devices. [V5.2] Response contains new TOKEN, DEVTYPE, CHPID, and QEBSM information.

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY VIRTUAL GRAF	INCOMPATIBLE: • [V3.1] The fields of an IP address included in the response no longer contain leading zeros. • [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported.
QUERY VIRTUAL LINES	INCOMPATIBLE: • [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported.
QUERY VIRTUAL OSA	INCOMPATIBLE: • [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported. Upwardly compatible: • [V2.4] New lines in the response for OSA devices that use the Queued-Direct-I/O (QDIO) Facility. • [V4.2] Supports virtual OSA devices. • [V5.1] Response may include new BYTES information for QDIO devices. • [V5.2] Response contains new DEVTYPE, CHPID, TOKEN, and QEBSM information.
QUERY VIRTUAL PRINTER	INCOMPATIBLE: • [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported.
QUERY VIRTUAL PUNCH	INCOMPATIBLE: • [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported.
QUERY VIRTUAL READER	INCOMPATIBLE: • [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported.
QUERY VIRTUAL STORAGE	Upwardly compatible: • [V3.1] New response to support the new CONFIGURATION operand on the DEFINE STORAGE command.
QUERY VIRTUAL TAPES	INCOMPATIBLE: • [V5.1] Response no longer indicates eligibility for I/O assist. I/O assist is not supported.
QUERY VIRTUAL VECTOR	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.
QUERY VMDUMP	Upwardly compatible: • [V5.2] Response revised for virtual machines in ESA/390 or z/Architecture mode and their address ranges.
QUERY VMLAN	INCOMPATIBLE: • [V5.1] Format of the response has changed. Upwardly compatible: • [V4.3] New System Accounting and User Accounting responses indicate the current default setting for account record generation for VMLANs. • [V4.4] Updated purpose to include virtual switch information.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
QUERY VRFREE	INCOMPATIBLE: [V5.1] Command has been removed. The V=R recovery area is not supported.
QUERY VSWITCH	INCOMPATIBLE: [V5.1] Format of the response has changed. [V5.2] New PROMiscuous operand and updated response. [V5.2 (VM63952)] New GVRP attribute for a VLAN-AWARE virtual switch.
QUERY V=R	INCOMPATIBLE: [V5.1] Command has been removed. The V=R area is not supported.
REDEFINE	INCOMPATIBLE: [V5.1] Message removed: HCP811I.
RESET	INCOMPATIBLE: [V5.1] Message removed: HCP811I.
SAVESEG	INCOMPATIBLE: [V5.1] Message removed: HCP1350E.
SAVESYS	INCOMPATIBLE: [V5.1] Text of message HCP1368E has been changed.
SEND	Upwardly compatible: [V3.1] Class C user can send input to any virtual machine.
SET (in general)	INCOMPATIBLE: [V5.1] Operands removed: CCWTRAN, IOASSIST, NOTRANS. - Also see specific SET commands listed below. Upwardly compatible: [V3.1] New operands: PSWTRANS, UNDERSCORE. [V4.2] New operands: CFLINK, LAN. [V4.3] New operands: IOPRIORITY, VMLAN. [V4.4] New operands: LOADDEV, VSWITCH. [V5.1] New operand: EDEVICE. [V5.2] New operand: NIC. [V5.2 (VM63856)] New operand: MEMASSIST. - Also see specific SET commands listed below.
SET ABEND	Upwardly compatible: [V5.2] New operands: OFF, OFF <i>aaannn</i>, SOFT <i>aaannn</i>
SET CACHE	INCOMPATIBLE: [V5.1] Message removed: HCP2601E.
SET CACHEFW	INCOMPATIBLE: [V5.1] Message removed: HCP2601E.
SET CCWTRAN	INCOMPATIBLE: [V5.1] Command has been removed. V=R virtual machine is no longer supported.
SET CPLANGUAGE	Upwardly compatible: [V4.1] Added new parameters to allow the user to specify whether the language is to be changed for the user or for the whole system.

Table 18. Changes to CP Commands (continued)

Command	Changes
SET CPTRACE	INCOMPATIBLE: • [V5.2] Trace codes removed: 2820, 2860, 2C20, 4000. Upwardly compatible: • [V2.4] New trace category and trace codes for QDIO instructions. • [V3.1] New trace codes. • [V5.2] New trace codes.
SET CRYPTO	INCOMPATIBLE: • [V4.2] Removed KEYENTRY operand. Upwardly compatible: • [V2.4] New operands: MODIFY, ON, OFF. • [V2.4] Changed responses. • [V2.4] Changed messages: HCP1706I, HCP1709E, HCP1710E, HCP1711I. • [V2.4] New messages: HCP1714E, HCP1715E.
SET DASDFW	INCOMPATIBLE: • [V5.1] Message removed: HCP2601E.
SET DUMP	INCOMPATIBLE: • [V5.1] V=R operand and corresponding value in response removed. The V=R area is not supported. Upwardly compatible: • [V3.1] New operand: XF. • [V3.1] New message: HCP1851E. • [V4.3] New message: HCP1917E. • [V5.2] The operands ALL and NOPRINT were removed. • [V5.2] Changed message: HCP9259I.
SET EDEVICE	Upwardly compatible: • [V5.2] New operands: 1750, PREFErred, NOTPREFErred. • [V5.2] New response. • [V5.2] New message: HCP1014E. • [V5.2] Message variation: HCP8701I.
SET IOASSIST	INCOMPATIBLE: • [V5.1] Command has been removed. I/O assist is not supported.
SET IPLPARMS	INCOMPATIBLE: • [V5.1] IPL parameter ARCH390 is ignored when IPLing a z/VM V5.1 or later CP module because there is no 32-bit version. Upwardly compatible: • [V4.4] New operand: NOHCD.
SET LAN	Upwardly compatible: • [V4.3] New ACCOUNTING ON and ACCOUNTING OFF operands allow Class B users to control whether accounting records are to be created for the LAN being defined. • [V5.2] New operands: PROmiscuous, NOPROmiscuous.
SET LOADDEV	Upwardly compatible: • [V5.1] New operand allows Class G users to specify the SCPDATA to be passed to the program to be loaded during a guest IPL.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
SET MACHINE	Upwardly compatible: [V4.1] 370 operand no longer supported.
SET MDCACHE	Upwardly compatible: [V3.1] Supports defining a minidisk cache larger than 2 GB for z/Architecture virtual machines. [V5.2 (VM63952)] Additional meaning for value in message HCP1921E.
SET NOTRANS	INCOMPATIBLE: [V5.1] Command has been removed. V=R virtual machine is no longer supported.
SET NVS	INCOMPATIBLE: [V5.1] Message removed: HCP2601E. I/O assist is not supported.
SET PROMPT	INCOMPATIBLE: [V5.1] Operand removed: AFTER_POWEROFF.
SET RDEVICE	Upwardly compatible: [V3.1] New messages: HCP6580E, HCP6862E, HCP6870E.
SET RDEVICE Integrated Communication Adapters	INCOMPATIBLE: [V5.1] Operands removed: TYPE ICA_BSC and TYPE ICA_SDLC
SET RDEVICE Tape Units	INCOMPATIBLE: [V5.1] Operands removed: 3420 and the associated MODEL and DUAL_DENSITY
SET SECUSER	Upwardly compatible: [V4.2] New message: HCP017E.
SET VSWITCH	INCOMPATIBLE: [V5.1] 'ANY' is not supported as a value for <i>vlanid</i>. It was formerly the default. The default VLAN for the user is now the VLAN ID specified on the DEFINE VSWITCH command or configuration statement. Upwardly compatible: [V5.1] New operand: PORTType. [V5.2] New operands: PROmiscuous, NOPROmiscuous. [V5.2 (VM63952)] New operands: GVRP NOGVRP. [V5.2 (VM63952)] Updated message: HCP2846E.
SHUTDOWN	INCOMPATIBLE: [V5.1] ORIGIN operand is accepted when loading z/VM V5.1 or later CP, but CP will relocate itself to location X'2000'. [V5.1] Messages removed: HCP6880E, HCP9403E, HCP9405E, HCP9415I, HCP9417I, HCP9418E. Upwardly compatible: [V3.1] New operand: WAIT. [V3.1] If REIPL is specified, an automatic warmstart is done from a CP module, not a nucleus. [V4.3] New operands to cancel a scheduled shutdown or send a shutdown signal to users.
SNAPDUMP	Upwardly compatible: [V5.2] Changed message: HCP9267E.

Table 18. Changes to CP Commands (continued)

Command	Changes
SPTAPE	INCOMPATIBLE: [V5.1] Command has been removed. SPTAPE is not supported. Tapes created with SPTAPE on an earlier VM system cannot be restored to a z/VM V5.1 or later system.
SPXTAPE (in general)	Upwardly compatible: [V4.3] New message: HCP1917E.
STORE (in general)	INCOMPATIBLE: [V5.2] Message changed: HCP645E. [V5.2] Messages removed: HCP749E, HCP785E, HCP1701E. [V5.2] Operand removed: VECTOR. - Also see specific STORE commands listed below. Upwardly compatible: [V3.1] Message HCP6150E may specify z/Architecture mode. [V3.1] New operands: PSWA, PSWG. - Also see specific STORE commands listed below.
STORE ESA/XC Storage	See STORE (Guest Storage - ESA/XC).
STORE (Guest Storage - ESA/390)	INCOMPATIBLE: [V5.2] Messages removed: HCP645E, HCP749E, HCP785E, HCP1701E. Upwardly compatible: [V3.1] New operands for indirect addressing and storing data in ASCII format. [V3.1] Supports 64-bit addressing. [V3.1] New z/Architecture version of this command. [V5.2] Default is zero for operand <i>hexloc</i>.
STORE (Guest Storage - ESA/XC)	Upwardly compatible: [V3.1] New operands for indirect addressing and storing data in ASCII format. [V3.1] Supports 64-bit addressing. [V5.2] Default is zero for operand <i>hexloc</i>.
STORE (Guest Storage - z/Architecture)	Upwardly compatible: [V5.2] Default is zero for operand <i>hexloc</i>.
STORE (Host Storage)	INCOMPATIBLE: [V3.1] New operands for indirect addressing and storing data in ASCII format. [V3.1] Supports 64-bit addressing. [V5.2] New required operand, L or R, to specify host logical storage or host real storage. [V5.2] New messages: HCP160E, HCP164E, HCP6065E. Upwardly compatible: [V3.1] New operands for indirect addressing and storing data in ASCII format. [V3.1] Supports 64-bit addressing. [V5.2] Default is zero for operand <i>hexloc</i>.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
STORE PSW	INCOMPATIBLE: [V4.1] Operands removed: CAW, CSW. 370 virtual machines are not supported. Upwardly compatible: [V3.1] For a z/Architecture guest, translates an ESA/390 format PSW into a z/Architecture format PSW (if the SET PSWTRANS ALL or SET PSWTRANS STORE command was previously issued).
STORE (Registers)	INCOMPATIBLE: [V5.1] Text of message HCP6150E has changed. Upwardly compatible: [V2.4] New operands: FPC <i>hexword</i>. [V2.4] Yreg operands accept register numbers 0-15 if the IEEE Floating Point hardware feature is installed on the processor. [V2.4] New messages: HCP6153E, HCP6154E. [V3.1] New operands: GGreg1, GHreg1, XGreg1, XHreg1. [V3.1] Message HCP6150E may specify z/Architecture mode.
STORE STATUS	Upwardly compatible: [V2.4] Stores the address of the extended save area at address 212 (X'D4'). This save area contains floating-point registers 0-15 and the floating-point control register. [V3.1] Stores virtual machine data for a z/Architecture virtual machine.
STORE VECTOR	INCOMPATIBLE: [V5.2] Command has been removed. Vector Facility is not supported.
SYNCDMDRS	INCOMPATIBLE: [V5.1] Message removed: HCP2601E. I/O assist is not supported.
SYSTEM	Upwardly compatible: [V3.1] Stores virtual machine data for a z/Architecture virtual machine.
TERMINAL (in general)	Upwardly compatible: [V4.4] New operands: SYS3270, SYSGRAF
TRACE (in general)	INCOMPATIBLE: [V2.2] New message: HCP1038E. [V5.1] Messages removed: HCP1038E, HCP1039E. [V5.2] Response for Machine Check Codes has changed: codes VF and VS are unused. Vector Facility is not supported. Upwardly compatible: [V2.3] New command responses. [V2.4] New response for floating-point register information. [V3.1] Message HCP6150E may specify z/Architecture mode. [V3.1] New operand: GG. [V3.1] New option: ASCE. [V3.1] New response formats for 64-bit. [V4.3] New operand: AIF. [V5.2] New message: HCP1040E. - Also see specific TRACE commands listed below.

Table 18. Changes to CP Commands (continued)

Command	Changes
TRACE <i>mnemonic1</i>	Upwardly compatible: • [V2.3] New mnemonic: BSA. • [V3.1] New mnemonics: EPSW, LCTLG, LPSWE, STCTG, STFL, STSI. • [V5.2] New mnemonic: STFLE.
TRACE TABLE	Upwardly compatible: • [V3.1] New response formats for 64-bit. • [V5.2 (VM63952)] The contents of the breaking-event-address register (BEAR) are displayed after the traceback table if the PER-3 facility is available.
TRSAVE	Upwardly compatible: • [V4.3] New message: HCP1917E.
TRSOURCE ID	Upwardly compatible: • [V3.1] New values can be specified on the DL operand for 64-bit registers or indirect addressing. • [V5.2] New LAN operand and new options.
UNCOUPLE	Upwardly compatible: • [V4.4] Updated purpose to include virtual switch information and added a new response.
UNDEDICATE	INCOMPATIBLE: • [V5.1] Default of V=R user removed. USER operand must be specified. V=R virtual machine is no longer supported. • [V5.1] Message removed: HCP893E.
UNLOCK	INCOMPATIBLE: • [V3.1] RIO370 operand no longer supported. • [V5.1] SYSTEM operand removed. The CP nucleus is no longer pageable. Modules in the nucleus cannot be locked or unlocked. • [V5.1] SYMBOL and <i>symbol</i> operands have no effect. All symbols are now considered resident (locked) and cannot be unlocked. • [V5.1] VIRT=REAL and V=R operands removed. The V=R area is not supported. • [V5.1] Text of message HCP295E has changed. • [V5.1] Messages removed: HCP200E, HCP204E, HCP205I, HCP1556I. • [V5.2] New required operand, LOGICAL or REAL, to specify whether guest storage is to be unlocked from host logical storage or host real storage. • [V5.2] Message removed: HCP295E.
VARY PROCESSOR	INCOMPATIBLE: • [V5.2] Responses for Vector Facility availability have been removed. Vector Facility is not supported.
VARY (Real Device)	Upwardly compatible: • [V3.1] New message: HCP6861I. • [V4.3] New message: HCP1917E.
VARY VECTOR	INCOMPATIBLE: • [V5.2] Command has been removed. Vector Facility is not supported.

CP Interfaces

Table 18. Changes to CP Commands (continued)

Command	Changes
VMDUMP	INCOMPATIBLE: • [V5.2] VMDUMP dumps of z/Architecture guests are not compatible with previous releases. • [V5.2] Messages removed: HCP745I, HCP746E. Upwardly compatible: • [V3.1] Can dump larger storage areas and discontinuous storage areas. • [V5.2] Maximum address for ESA/390 mode virtual machines and z/Architecture mode virtual machines has changed. • [V5.2] Supports the SET UNDERSCORE command setting to control the separation of 16-digit output fields. • [V5.2] New message: HCP162I. • [V5.2] Changed messages: HCP009E, HCP161E, HCP6186I and HCP6191I. • [V5.2] Removed message: HCP162E.
XAUTOLOG	INCOMPATIBLE: • [V4.1] 370 operand no longer supported. • [V5.1] Messages removed: HCP811I, HCP1508I, HCP1511I, HCP1556I. Upwardly compatible: • [V3.1] Can specify larger amount of storage on the STORAGE operand.

CP Utilities

Table 19 lists the CP utilities that have changed. Unless otherwise indicated, for additional information see the *z/VM: CP Commands and Utilities Reference*.

Table 19. Changes to CP Utilities

Utility	Changes
CPFMTXA	INCOMPATIBLE: • [V5.1] Message removed: HCP6203E. • [V5.1] Fields in the FBA allocation map have been expanded to accommodate larger disk sizes. Upwardly compatible: • [V5.1] Allocation specifications for FBA devices, formerly limited to 6 digits, now accept up to 9 digits. • [V5.1] TDSK, PERM, and PARM allocations may reside above page 16,777,215. DRCT, PAGE, and SPOL allocations may not reside above page 16,777,215.
DDR	INCOMPATIBLE: • [V5.1] NUCLEUS function statement removed. The CP nucleus cannot be dumped to or restored from tape. • [V5.1] Messages removed: HCP722E, HCP723E, HCP724E. Upwardly compatible: • [V4.2] New operand to compress DDR data: LZCOMPACT.

Table 19. Changes to CP Utilities (continued)

Utility	Changes
DIRECTXA	INCOMPATIBLE: • [V2.3] If a USER statement within the directory specifies a logical line edit symbol that is not valid (a letter A-Z, number 0-9, or bytes X'OE' (shift out) or X'OF' (shift in)), DIRECTXA issues message HCP786I, uses the system default line edit symbol, and continues processing. If no error prevents the directory from being written, DIRECTXA returns to CMS with RC=9. • [V5.1] A request for a V=R or V=F virtual machine in the directory file being processed will result in the user being logged on as a V=V virtual machine. V=R and V=F virtual machines are no longer supported. Upwardly compatible: • [V3.1] New operands: &SYSRES <i>valid</i>. • [V3.1] New message: HCP493E. • [V5.1] Supports larger FBA disk size in directory MDISK statements. • [V5.2] In the response, the release level value has changed.
DUMpload	Upwardly compatible: • [V5.1] New message: HCP8185I. • [V5.2] Can process new dump formats.
HCPLDR	INCOMPATIBLE: • [V5.1] Operands removed: 370, ESA, XA, XC. All modules created with HCPLDR will run in ESA, XA, and XC virtual machines. 370 virtual machines are not supported. • [V5.1] RLDSAVE operand is accepted when generating the CP module but has no effect. The CP nucleus is no longer relocatable. CP will always relocate itself to location X'2000'. Upwardly compatible: • [V3.1] New operands: &SYSRES <i>valid</i>. • [V3.1] New message: HCP493E. • [V5.1] Output report "CSECT'S WITH SIZE GREATER THAN CONDITIONAL PAGE BOUNDARY" is generated when the MAP option is specified but the PAGEB option is not specified. For CP, only @MAPSTART should be listed. Any other modules listed are in error. • [V5.2] In the response, the release level value has changed.
INSTDEF	INCOMPATIBLE: • [V5.1] Utility has been removed.
INSTVM	Upwardly compatible: • [V5.1] New operand: DVD.

CP Interfaces

Table 19. Changes to CP Utilities (continued)

Utility	Changes
SALIPL	INCOMPATIBLE: • [V2.2] Message HCP039E has been deleted and replaced by new message HCP394E with the same text. • [V2.2] Date field on the file list panel displays the year with 4 digits. • [V5.1] ORIGIN option is accepted when loading CP for z/VM V5.1 or later, and the default address of X'1000' still applies, but CP will relocate itself to location X'2000'. • [V5.1] IPLPARMS value ARCH390 is ignored when IPLing a z/VM V5.1 or later CP module because there is no 32-bit version. • [V5.1] The number of blocks on FBA DASD (SCSI or not) that SALIPL uses for SAPL has increased. SALIPL now writes to blocks 5-207 on CP-formatted FBA DASD. In previous releases, SALIPL wrote to blocks 5-31. You must ensure that no other functions (such as CP directory, warmstart, checkpoint, paging, spooling, user minidisks, or CP parm disks) are using the area to which SALIPL writes. Use ICKDSF or CPFMTXA to allocate pages 4 through 25 as PERM. • [V5.1] On a CMS minidisk on FBA DASD, SALIPL now writes to blocks 5-207 of the RECOMP area. In previous releases, SALIPL used blocks 5-31. To accommodate the larger size of SAPL, you may need to increase the size of the RECOMP area on the CMS minidisk.
TRACERED	Upwardly compatible: • [V5.2] New output for LAN trace. • [V5.2 (VM63952)] TRACERED selects either CP or guest trace entries by time. If the timestamp of an entry is identical to that of the previous entry, as can occur when the Store-Clock-Fast Facility is installed and enabled during tracing, an '=' sign is displayed immediately following the timestamp, signifying that the order of occurrence of those entries is unpredictable.

Dynamic I/O Return Codes

Table 20 lists the dynamic I/O return codes that have changed. For additional information, see *z/VM: I/O Configuration*.

Table 20. Changes to Dynamic I/O Return Codes

Return Code	Changes
0103	Upwardly compatible: • [V5.1] Issued if you tried to modify or delete an I/O control unit, but the control unit number specified is associated with a coupling-facility control unit. • [V5.1] Issued if you tried to modify or delete a coupling-facility control unit but the control unit number specified is associated with an I/O control unit.
0105	Upwardly compatible: • [V4.2] Issued if the specified channel path for a FICON CTC control unit is not a FICON channel. • [V4.4] Issued if you tried to define or modify the I/O or coupling-facility control unit with a mixture of shared and unshared channel paths (including channel path that might be defined in other channel-subsystem images).
0107	Upwardly compatible: • [V4.2] Issued if more than one channel path is specified for a FICON CTC control unit.

Table 20. Changes to Dynamic I/O Return Codes (continued)

Return Code	Changes
010D	Upwardly compatible: • [V4.4] Issued if you tried to add, delete, or change a control unit, but one of the following occurred: – For a channel path to which the specified I/O control unit is attached, you exceeded the limit on the number of unit addresses supported for that type of channel path. – One or more of the specified channel paths for the specified I/O control unit is a coupling-facility channel path. – One or more of the specified channel paths for the specified coupling-facility control unit is one of several types of coupling-facility-receiver channel paths that is not dynamically changeable on your machine model. – Your machine model does not support the dynamic-I/O configuration change that you requested. – One or more of the specified channel paths for the specified coupling-facility control unit is an I/O channel path. – The combination of coupling-facility channel-path types that would result from the requested change for the specified coupling-facility control unit (including channel-path types defined in other channel-subsystem images for the control unit) is not supported on your machine model.
0113	Upwardly compatible: • [V4.4] Issued if you tried to delete a coupling-facility control unit from your configuration, but the the control unit is defined in more than one channel-subsystem image.

DIAGNOSE Codes

Table 21 lists the DIAGNOSE codes that have changed. For additional information, see *z/VM: CP Programming Services*.

Table 21. Changes to DIAGNOSE Codes

Code	Changes
X'00' Storage Extended Identification Code	Upwardly compatible: • [V2.2] In the program product bit map, bit 13 (X'0004000000000000') indicates whether Year 2000 support is present in CP. • [V3.1] In the execution environment field of the extended-identification code bit map, bit 1 (formerly reserved) indicates the CP image that is running: 0=32-bit, 1=64-bit. • [V5.2] Licensed program bit map field of the extended-identification code bit map contains a new value to indicate the new product level. • [V5.2] Release information field of the extended-identification code bit map contains the new release level.
X'04' Examine Host Storage	INCOMPATIBLE: • [V5.2] Ry.2 bit setting indicates the storage address type: 0 = host logical, 1 = host real. If the loaded module is greater than 4 KB in length, the frames backing the host logical storage are not necessarily contiguous in host real storage. Upwardly compatible: • [V3.1] Supports 64-bit addressing.

CP Interfaces

Table 21. Changes to DIAGNOSE Codes (continued)

Code	Changes
X'08' Virtual Console Function	Upwardly compatible: [V4.3] Supports 64-bit addressing.
X'10' Release Pages	Upwardly compatible: [V5.2] Supports 64-bit addressing. New Protection exception.
X'14' Input Spool File Manipulation	Upwardly compatible: [V2.2] For subcodes X'0004', X'0008', X'0FFE', and X'0FFF', a one-byte century indicator was added to the SFBLOK data area.
X'44' Voluntary Time Slice End	Upwardly compatible: [V4.3] Supports 64-bit addressing.
X'4C' Generate Accounting Records	Upwardly compatible: [V4.3] Supports 64-bit addressing. [V4.3] New accounting record identification code: C'CC' — the virtual machine network data transmission records.
X'60' Determine Virtual Machine Storage Size	Upwardly compatible: [V5.2] For 64-bit addressing mode, subcode X'0000000C' of Diagnose X'260' may be used to obtain the virtual machine storage size. Subcode X'00000000' of Diagnose X'260' may be used as an alternative to Diagnose X'60' for a virtual machine in 24-bit or 31-bit addressing mode.
X'64' Named Saved Segment Manipulation	Upwardly compatible: [V4.1] For exit with error, return code X'54D' is reserved (not used).
X'7C' Logical Device Support Facility	Upwardly compatible: [V2.3] For the INITIATE function, bit 3 of the first byte of Rx+1 indicates that Ry+1 contains the IP address associated with the logical device. [V4.4] Bit 4 of Ry+1 points to a 16-byte field containing an IPv6 address. If bit 3 is on, bit 4 is ignored.
X'84' Directory Update-in-Place	INCOMPATIBLE: [V2.3] For EDITCHAR operation, letters A-Z, numbers 0-9, and bytes X'OE' (shift out) and X'OF' (shift in) cannot be specified as logical line edit symbols (line-end, line-delete, character-delete, and escape). [V5.1] For MACHINE operation, 370 option is not valid. 370 virtual machines are not supported. Upwardly compatible: [V2.2] Can now replace the user's default date format setting. [V2.2] New operation: DATEFMT. [V2.2] New return codes due to new function (in hex): 122, 123, 124. [V5.1] For OPTIONS operation, Virt=real option is ignored. V=R virtual machine is not supported. [V5.1] Return code X'108' is reserved (not used). V=R and V=F virtual machines are not supported.

Table 21. Changes to DIAGNOSE Codes (continued)

Code	Changes
X'90' Read Symbol Table	INCOMPATIBLE: • [V5.2] The returned symbol address is a host logical storage address. If the CSECT at the symbol is greater than 4 KB in length, the frames backing the host logical storage are not necessarily contiguous in host real storage. Upwardly compatible: • [V5.1] Condition code 1 no longer returned. All symbols are now resident.
X'94' VMDUMP and Symptom Record Service	Upwardly compatible: • [V5.2] New parameters: DUMPDW <i>list-addr</i> and SRDW <i>symptom-rec-addr</i>.
X'98' Real I/O	INCOMPATIBLE: • [V5.1] Cannot be used in 24-bit addressing mode. Upwardly compatible: • [V3.1] New subfunctions: BLOCK DIAGNOSE, MULTIPLE REQUEST BLOCK. • [V5.1] For the LOCK and UNLOCK subfunctions, return code 1 is reserved (not used). V=R and V=F virtual machines are not supported. • [V5.1] For the LOCK subfunction, return code 3 is reserved (not used). 24-bit addressing mode guests cannot use this DIAGNOSE code, and 370 virtual machines are not supported. • [V5.1] For the Block Diagnose X'98' subfunction, global return code 2 is reserved (not used). V=R and V=F virtual machines are not supported. • [V5.1] For the Block Diagnose X'98' subfunction, global return codes 3 and 4 are reserved (not used). 24-bit addressing mode guests cannot use this DIAGNOSE code, and 370 virtual machines are not supported. • [V5.2] New Release and Lock Subfunction (Block Diagnose X'98' Multiple Request Block FCN Code X'20') allows you to lock guest pages into host real storage above or below 2 GB. The existing DIAGNOSE code X'98' LOCK subfunction continues to support lock requests below 2 GB only.
X'BC' Open and Query Spool File Characteristics	Upwardly compatible: • [V2.2] Depending on the specified buffer length, following the SECLABEL field the user's buffer will include the full (4-digit-year) date and the ISO date.
X'D8' Read Spool File Blocks	Upwardly compatible: • [V2.2] For subcode X'0000', a one-byte century indicator was added to the SFBLOK data area.
X'DC' Control Application Monitor Record Collection	Upwardly compatible: • [V4.3] Supports 64-bit addressing.
X'E0' System Trace File Interface	Upwardly compatible: • [V5.2] New block descriptor code C'L'.

CP Interfaces

Table 21. Changes to DIAGNOSE Codes (continued)

Code	Changes
X'210' Retrieve Device Information	Upwardly compatible: • [V3.1] A byte code X'0C' of the VRDCBLOK control block has been added so that application programs can find out the underlying real hardware associated with tape devices operating in emulation mode. • [V3.1] New messages: HCP2327I, HCP2328I, HCP2340I, HCP2341I, HCP2342I, HCP2343I, HCP2344I, HCP2345I, HCP2346I, HCP2347I, HCP2348I, HCP2349I, HCP2350I, HCP2351I, HCP2352I, HCP2353I, HCP2354I, HCP2355I, HCP2356I, HCP2357I, HCP2358I, HCP2359I, HCP2360I, HCP2361I, HCP2362I, HCP6365I. • [V4.4] New VRDCUNDV values for the 3590 Model H. • [V5.1] New VRDCUNDV values for the 3592 Model J.
X'250' Block I/O (Standard Blocksize)	Upwardly compatible: • [V5.2] 64-bit support.
X'254' Access Real Subsystem	INCOMPATIBLE: • [V4.3] This DIAGNOSE code is no longer supported as a Programming Interface for customers.
X'258' Page-Reference Services	Upwardly compatible: • [V4.3] Supports 64-bit addressing.
X'260' Access Certain Virtual Machine Information	Upwardly compatible: • [V5.2] 64-bit addressing support. Updated subcodes: X'00000000', X'00000004', X'00000008'. New subcode: X'0000000C'.
X'270' Pseudo Timer Extended	Upwardly compatible: • [V2.4] Output has been expanded to include the version of DIAGNOSE code X'270', the user's default date format, and the system default date format.

CP Macros

This section identifies the CP macros that have changed. It contains the following subsections:

- System Definition Macros
- “IUCV Functions” on page 139
- “APPCVM Macro Functions” on page 139
- “VM Data Space Macros” on page 139
- “Other CP Macros” on page 140

System Definition Macros

Table 22 lists the System Definition macros that have changed.

Table 22. Changes to System Definition Macros

Macro	Changes
SYSRES	INCOMPATIBLE • [V5.1] SYSVOL, SYSRES, SYSTYPE, and SYSNUC parameters are ignored. CP cannot be IPLed from a nucleus, only from a module on the parms disk.

Table 22. Changes to System Definition Macros (continued)

Macro	Changes
SYSSTORE	INCOMPATIBLE • [V3.1] RIO370 parameter removed. • [V5.1] Parameters removed: VRSIZE, VRFREE. The V=R area and V=R recovery area are not supported.

IUCV Functions

There are no changes to IUCV functions.

APPCVM Macro Functions

There are no changes to APPCVM macro functions.

VM Data Space Macros

Table 23 lists the VM data space macros that have changed. For additional information, see *z/VM: CP Programming Services*.

Table 23. Changes to VM Data Space Macros

Macro	Changes
ADRSPACE	Upwardly compatible: • [V5.1] Operation exception cannot occur. 370 virtual machines are not supported.
ADRSPACE ISOLATE	INCOMPATIBLE: • [V5.1] MACHINE=370 parameter has no supported function. 370 virtual machines are not supported.
ADRSPACE PERMIT	INCOMPATIBLE: • [V5.1] MACHINE=370 parameter has no supported function. 370 virtual machines are not supported.
ADRSPACE QUERY	INCOMPATIBLE: • [V5.1] MACHINE=370 parameter has no supported function. 370 virtual machines are not supported.
ALSERV	Upwardly compatible: • [V5.1] Operation exception cannot occur. 370 virtual machines are not supported.
ALSERV ADD	INCOMPATIBLE: • [V5.1] MACHINE=370 parameter has no supported function. 370 virtual machines are not supported.
ALSERV REMOVE	INCOMPATIBLE: • [V5.1] MACHINE=370 parameter has no supported function. 370 virtual machines are not supported.
MAPMDISK	Upwardly compatible: • [V5.1] Operation exception cannot occur. 370 virtual machines are not supported.
REFPAGE	Upwardly compatible: • [V5.1] Operation exception cannot occur. 370 virtual machines are not supported.
VMUDQ	INCOMPATIBLE: • [V5.1] MACHINE=370 parameter has no supported function. 370 virtual machines are not supported.

Other CP Macros

Table 24 lists the other CP macros that have changed. For additional information, see *z/VM: CP Exit Customization*.

Table 24. Changes to Other CP Macros

Macro	Changes
HCPCALL	INCOMPATIBLE: [V5.1] HCPCALL now ensures that no extra positional parameters are specified. If any are found, the following message is displayed: MNOTE 8, 'Extra positional parameter: pppppppp' If pppppppp is blank, this message could indicate that incorrect continuation was used on the HCPCALL invocation. [V5.2] ATTR parameter may be used to specify only entry point attributes, not module running attributes.
HCPPROLG	INCOMPATIBLE: [V5.1] PAGEABLE attribute is not supported. All CP modules must be resident. If PAGEABLE is specified, CP changes the attribute to RESIDENT. [V5.2] ATTR parameter no longer allows the DIRECTCALL and INDIRECTCALL keywords. Use the new HCPCALL parameter (HCPCALL=DIRECT or HCPCALL=INDIRECT). [V5.2] TRSOURCE parameter is no longer allowed. Use the new RESTRICT parameter (RESTRICT=TRSOURCE).
HCPTKDEF Parser Token Definition	Upwardly compatible: [V2.4] New conversion type: INSTRUCT.
MDLATENT Exit Entry Definition	INCOMPATIBLE: [V5.1] PAGEABLE parameter is not supported and has been removed. All modules included in the CP nucleus are resident. [V5.1] NUCLEUS=ESA390 parameter is not supported and has been removed. The CP nucleus is 64-bit only. [V5.2] Syntax has been extensively changed. Parameters previously retained for compatibility (FULLREG and NUCLEUS) have been removed. Parameters have been added for specifying the addressing mode (Amode) and translation mode (Tmode). The relationship between module attributes and entry point attributes and how they are specified in this macro have significantly changed. Upwardly compatible: [V5.1] RESIDENT parameter is now the default. [V5.1] FULLREG parameter is retained for compatibility and is equivalent to LONGREG. [V5.1] NUCLEUS=BOTH parameter is retained for compatibility and is still the default, but it is now equivalent to NUCLEUS=ESAME.

CP System Services

Table 25 lists the CP system services that have changed. For additional information see *z/VM: CP Programming Services*.

Table 25. Changes to CP System Services

System Service	Changes
*LOGREC Error Logging System Service	Upwardly compatible: • [V5.1] New record added: Special VM Record (SVMR).
*RPI Access Verification System Service	INCOMPATIBLE: • [V5.1] ACI entry points HCPRPDEP, HCPDA0RL, HCPDA0UL, and HCPDA0MC are no longer pageable.

CPXLOAD Directives

Table 26 lists the CPXLOAD directives that have changed. For additional information see *z/VM: CP Programming Services*.

Table 26. Changes to CPXLOAD Directives

Directive	Changes
OPTIONS	Upwardly compatible: • [V5.1] LOCK and NOLOCK operands no longer have any effect. The CP nucleus, including dynamically loaded CP routines, is now completely resident.

VM Dump Tool

This section identifies the VM Dump Tool functions that have changed. It contains the following subsections:

- VM Dump Tool Command, Subcommands, and Macros
- “VM Dump Tool Messages” on page 144

VM Dump Tool Command, Subcommands, and Macros

Table 27 lists changes to the VM Dump Tool command, subcommands, and macros. For additional information, see *z/VM: VM Dump Tool*.

Table 27. Changes to VM Dump Tool Command, Subcommands, and Macros

Function	Changes
VMDUMPTL command	INCOMPATIBLE: • [V4.4] Message HCQ031W changed to HCQ031E. Upwardly compatible: • [V4.3] New messages: HCQ001W, HCQ006W, HCQ011W, HCQ012W, HCQ040E, HCQ049E. • [V4.4] New messages: HCQ106E, HCQ107E, HCQ108E, HCQ109E, HCQ112E, HCQ113E, HCQ114E. • [V5.1] New message: HCQ007E
BLOCK macro	Upwardly compatible: • [V4.3] New options for the FIELDS operand. • [V4.4] New messages: HCQ090I, HCQ111E. • [V5.2] New optional address space prefix character (L, R or U). • [V5.2] New options: NOMap/MAP, CHars/HEX and Blts/NOBits.
CALLERS macro	Upwardly compatible: • [V5.1] Now accepts up to 17 characters of input.

CP Interfaces

Table 27. Changes to VM Dump Tool Command, Subcommands, and Macros (continued)

Function	Changes
CCW subcommand	Upwardly compatible: • [V5.2] New optional address space prefix character (L, R or U). • [V5.2] New options: Blts and NOBits.
CHAIN/CHAIN8 subcommand	Upwardly compatible: • [V5.2] New optional address space prefix character (L, R or U). • [V5.2] New options: DATA and NOData.
CPEBK subcommand	Upwardly compatible: • [V5.1] Now accepts up to 17 characters of input. • [V5.2] New optional address space prefix character (L, R or U).
DISPLAY subcommand	INCOMPATIBLE: • [V4.4] Output from the DISPLAY subcommand, when issued from a macro, is now the same as DISPLAY subcommand output when the subcommand is issued from the command line. Upwardly compatible: • [V5.2] New optional address space prefix character (L, R or U). • [V5.2] The defaults for invocation from the command line or a macro are now the same.
DX macro	INCOMPATIBLE: • [V5.2] This macro is no longer supported.
EXTRACT subcommand	INCOMPATIBLE: • [V5.1] The DFIR/DFIZ and SYMPTOM operands require a decimal value. Upwardly compatible: • [V5.1] New options: MAPA, MAPN, and DISPL. • [V5.1] New message: HCQ121E. • [V5.2] New optional address space prefix character (L, R or U). • [V5.2] New functions: ADDRESS and ASIBK.
FRAMES subcommand	Upwardly compatible: • [V5.1] New message: HCQ127I. • [V5.2] New operands: NOSUM/SUMmary and NO2Gig/2Gig.
GREGS subcommand	Upwardly compatible: • [V4.3] New operands: MAP, NOMAP, LONG, SHORT.
INDQ subcommand	Upwardly compatible: • [V5.1] This subcommand is no longer supported.
INSTR subcommand	Upwardly compatible: • [V5.2] New optional address space prefix character (L, R or U).
LASTTRAN macro	Upwardly compatible: • [V5.2] New macro: This macro can be used to display how the last logical or user-defined address was translated.
LOCATE subcommand	Upwardly compatible: • [V4.3] New message: HCQ004W. • [V5.2] New optional address space prefix character (L, R or U). • [V5.2] New operand: 2Gig

Table 27. Changes to VM Dump Tool Command, Subcommands, and Macros (continued)

Function	Changes
LOCDISP macro	Upwardly compatible: • [V4.3] New message: HCQ004W. • [V5.2] New optional address space prefix character (L, R or U). • [V5.2] New operand: 2Gig
MAP subcommand	Upwardly compatible: • [V4.3] New messages: HCQ086E, HCQ087E, HCP088E, HCQ100I, HCQ101E, HCP102E, HCP103E, HCP104I, HCP105E. • [V5.1] New messages: HCQ116W, HCQ117E, HCQ118E, HCQ123E, HCQ124E, HCQ126I.
PFXSAVE macro	INCOMPATIBLE: • [V5.2] The CPU keyword is made optional. The minimum abbreviation for Cpu is changed to CPU.
QUERY subcommand	Upwardly compatible: • [V4.4] New operands: DVFMACRO, IMPDVF. • [V5.1] New operand: DEBUG. • [V5.2] The new VMDTQRY subcommand is recommended over the QUERY subcommand. All operands of QUERY that have been supported in the past will continue to be supported without change. New operands will be added to VMDTQRY only.
RADIX macro	Upwardly compatible: • [V5.2] New optional address space prefix character (L, R or U).
RDEVBK subcommand	Upwardly compatible: • [V5.1] The output now displays the addresses of significant related control blocks rather than the storage of the control blocks.
RSCH subcommand	Upwardly compatible: • [V5.1] The output now displays the addresses of significant related control blocks rather than the storage of the control blocks.
SET subcommand	Upwardly compatible: • [V4.4] New operands: DVFMACRO, IMPDVF, XEDITPRE. • [V4.4] New message: HCQ110E. • [V5.1] New operand: DEBUG. • [V5.2] The new VMDTSET subcommand is recommended over the SET subcommand. All operands of SET that have been supported in the past will continue to be supported without change. New operands will be added to VMDTSET only.
SETVAR subcommand	Upwardly compatible: • [V4.3] New operand: WORD. • [V5.2] New optional address space prefix character (L, R or U).
SSASAVE macro	INCOMPATIBLE: • [V5.2] The CPU keyword is made optional. The minimum abbreviation for Cpu is changed to CPU.
TODCLOCK subcommand	Upwardly compatible: • [V5.2] New optional address space prefix character (L, R or U).
TRACE subcommand	Upwardly compatible: • [V4.3] New messages: HCP047W, HCQ074E. • [V5.1] The FROM and TO operands no longer check the frame type. These operands can now be used when the frame table is not available.

CP Interfaces

Table 27. Changes to VM Dump Tool Command, Subcommands, and Macros (continued)

Function	Changes
VDEVBK subcommand	Upwardly compatible: • [V5.1] The output now displays the addresses of significant related control blocks rather than the storage of the control blocks.
VIRTUAL macro	Upwardly compatible: • [V4.4] New operand: DETAILS.
VMDBK subcommand	INCOMPATIBLE: • [V4.4] Message HCQ018E changed to HCQ018I. Upwardly compatible: • [V4.3] New message: HCQ018E.
VMDSCAN macro	Upwardly compatible: • [V4.4] New operand: <i>userid</i>.
VMDTQRY subcommand	Upwardly compatible: • [V5.2] The new VMDTQRY subcommand is the preferred way to get information. New operands will be added only to VMDTQRY, which is preferred over QUERY.
VMDTSET subcommand	Upwardly compatible: • [V5.2] The new VMDTSET subcommand is the preferred way to get information. New operands will be added only to VMDTSET, which is preferred over SET.
VSCH subcommand	Upwardly compatible: • [V5.1] The output now displays the addresses of significant related control blocks rather than the storage of the control blocks.

VM Dump Tool Messages

The following VM Dump Tool messages have **changed text**. For additional information, see *z/VM: CP Messages and Codes*.

[V4.3] HCQ001E	[V5.1] HCQ031E	[V4.3] HCQ077W
[V5.2] HCQ004E	[V4.3] HCQ034E	[V4.3] HCQ085E
[V5.2] HCQ004W	[V4.3] HCQ039E	[V5.2] HCQ086E
[V4.3] HCQ006E	[V4.3] HCQ041E	[V5.2] HCQ087E
[V4.3] HCQ009E	[V4.3] HCQ045W	[V5.2] HCQ088E
[V4.3] HCQ011E	[V4.4] HCQ055E	[V4.3] HCQ092E
[V4.3] HCQ012E	[V4.3] HCQ059E	[V4.4] HCQ093E
[V5.2] HCQ017E	[V4.3] HCQ061E	[V4.4] HCQ094E
[V4.3] HCQ018E	[V4.3] HCQ071E	[V4.3] HCQ099E
[V4.3] HCQ021E	[V4.4] HCQ073E	[V5.2] HCQ124E
[V4.3] HCQ027E	[V4.3] HCQ074E	

CP Messages

The following CP messages have **changed text**. For additional information, see *z/VM: CP Messages and Codes*.

Note: If message text has been changed in more than one release, only the latest release is indicated.

[V5.2] HCP006E	[V2.4] HCP1709E	[V5.1] HCP6011E
[V4.2] HCP047E	[V2.4] HCP1710E	[V4.3] HCP6024E
[V5.2] HCP161I	[V2.4] HCP1711I	[V2.4] HCP6111I
[V5.2] HCP164E	[V4.2] HCP1914E	[V5.1] HCP6150E
[V5.1] HCP260E	[V4.3] HCP2090I	[V5.2] HCP6189I
[V5.1] HCP295E	[V4.3] HCP2091I	[V5.2] HCP6191I
[V4.2] HCP296E	[V4.3] HCP2092E	[V4.4] HCP6706E
[V4.2] HCP319E	[V2.4] HCP2234E	[V5.1] HCP6751E
[V4.2] HCP332E	[V2.2] HCP2252E	[V4.2] HCP6768I
[V3.1] HCP513I	[V4.2] HCP2511A	[V4.2] HCP6769I
[V2.3] HCP580I	[V4.2] HCP2515E	[V5.1] HCP6770E
[V5.2] HCP645E	[V4.2] HCP2601E	[V2.4] HCP6789E
[V5.2] HCP659E	[V4.3] HCP2768E	[V5.2] HCP6806E
[V5.2] HCP660E	[V4.4] HCP2782E	[V5.1] HCP6844E
[V5.2] HCP661E	[V4.4] HCP2783E	[V4.2] HCP6850E
[V5.2] HCP662I	[V4.4] HCP2784E	[V5.1] HCP6855E
[V5.2] HCP663E	[V4.4] HCP2788E	[V5.2] HCP6860E
[V4.2] HCP728E	[V4.4] HCP2793E	[V5.2] HCP6863E
[V5.2] HCP798E	[V5.1] HCP2797E	[V5.1] HCP6870E
[V5.1] HCP824E	[V4.2] HCP2800E	[V5.2] HCP8182E
[V5.2] HCP864E	[V4.2] HCP2801E	[V5.2] HCP8701I
[V5.2] HCP879I	[V4.2] HCP2805E	[V5.1] HCP9037W
[V5.2] HCP953E	[V4.2] HCP2806E	[V5.1] HCP9039W
[V2.4] HCP1003E	[V5.1] HCP2815I	[V5.2] HCP9250E
[V5.2] HCP1006E	[V5.1] HCP2817I	[V5.2] HCP9254E
[V5.2] HCP1011E	[V3.1] HCP2819E	[V5.2] HCP9256I
[V5.1] HCP1016E	[V5.1] HCP2830I	[V5.2] HCP9259I
[V5.1] HCP1350E	[V5.1] HCP2832E	[V5.2] HCP9261I
[V5.1] HCP1368E	[V5.1] HCP2838W	[V5.2] HCP9267E
[V5.2] HCP1452I	[V5.2] HCP2846E	[V5.2] HCP9269E
[V5.1] HCP1512E	[V5.2] HCP2859I	
[V2.4] HCP1706I	[V3.1] HCP5769E	

CMS Changes

This section identifies the changes to CMS external interfaces. It contains the following subsections:

- General CMS Commands
- “CMS Utilities” on page 151
- “CMS File Pool Administration and Operator Commands” on page 152
- “OPENVM Commands” on page 152
- “XEDIT Subcommands” on page 153
- “CMS Pipelines” on page 153
- “CMS Routines” on page 154
- “CMS Macros” on page 161
- “HELP Facility” on page 164
- “CMS Messages” on page 172

General CMS Commands

Table 28 lists the general CMS commands that have changed. For additional information, see the *z/VM: CMS Commands and Utilities Reference*.

CMS Interfaces

Table 28. Changes to General CMS Commands

Command	Changes
ACCESS	Upwardly compatible: • [V5.2] New message: DMS114S.
BROWSE	INCOMPATIBLE: • [V5.1] Screen layout has been adjusted to accommodate larger file and disk sizes.
CMSDESK	INCOMPATIBLE: • [V2.2] Message DMS2302E replaced by new format of DMS622E, same return code. Upwardly compatible: • [V2.2] Supports three date formats: short date, full date, ISO date. • [V2.2] Display of the contents of the File Manager application has been changed. • [V2.2] Displays a toolbar on the applications. • [V2.2] New and changed menu items for some applications. • [V3.1] See “[V3.1] Graphical User Interface Facility Changes” on page 57.
CMSSERV	INCOMPATIBLE: • [V5.2] Not supported. Enhanced Connectivity Facilities and the Server-Requester Programming Interface (SRPI) are not supported. Use TCP/IP for z/VM.
CONV2WD	INCOMPATIBLE: • [V5.1] Command has been removed.
COPYFILE	INCOMPATIBLE: • [V2.2] New message: DMS516E.
CREATE DIRECTORY	Upwardly compatible: • [V2.2] New message for authorization failure from ESM: DMS1331E.
CSLLIST	Upwardly compatible: • [V2.3] When an = or ? is typed as the first character in the “Cmd” area of a line in the CSLLIST display screen, all characters following the = or ? are ignored.
CSLMAP	Upwardly compatible: • [V2.3] When an = or ? is typed as the first character in the “Cmd” area of a line in the CSLMAP display screen, all characters following the = or ? are ignored.
DEFAULTS	Upwardly compatible: • [V2.2] New options supported as parameters for FILELIST and RDRLIST: VMDATE, SHORTDATE, FULLDATE, ISODATE. • [V2.3] New options supported as parameters for NETDATA: VMDATE, SHORTDATE, FULLDATE, ISODATE.
DIRLIST	Upwardly compatible: • [V2.3] When an = or ? is typed as the first character in the “Cmd” area of a line in the DIRLIST display screen, all characters following the = or ? are ignored.
ERASE	Upwardly compatible: • [V2.2] New message for authorization failure from ESM: DMS1332E.

Table 28. Changes to General CMS Commands (continued)

Command	Changes
FILEDEF	Upwardly compatible: • [V2.2] New option: LIBSRV. • [V2.4] Allows LRECL definitions up to 65535 bytes for OS variable spanned records (under XLRI processing) and non-OS CMS files. • [V2.4] Allows BLKSIZE definitions up to 65535 bytes for non-OS CMS files.
FILELIST	INCOMPATIBLE: • [V2.2] When FILELIST is specified with the SHARE option, if a pre-VM/ESA V2.2 profile (PROFFSHR XEDIT) resides on a disk accessed ahead of the S-disk, sorts by date or size will not work. IBM recommends that you recreate all non-system FILELIST profiles. See Appendix A of the <i>z/VM: CMS Commands and Utilities Reference</i>. • [V2.2] If you file the file created by FILELIST, that file might contain new and changed fields (on the far right). Upwardly compatible: • [V2.2] New options to specify date format: VMDATE, SHORTDATE, FULLDATE, ISODATE. • [V2.2] BEFORE <i>date</i> and AFTER <i>date</i> options support 4-digit years. • [V2.2] Screens and responses support 4-digit years. • [V2.2] If a date format option is not specified on the FILELIST command, the CMS DEFAULTS date format setting for FILELIST will be used. • [V2.3] When an = or ? is typed as the first character in the “Cmd” area of a line in the FILELIST display screen, all characters following the = or ? are ignored.
FLIST	INCOMPATIBLE: • [V5.1] Screen layout has been adjusted to accommodate larger file and disk sizes.
FORMAT	Upwardly compatible: • [V5.2] Message variation: DMS114S.
GENMOD	INCOMPATIBLE: • [V5.1] 370 option removed. 370 virtual machines are not supported.
GLOBAL	Upwardly compatible: • [V2.2] New message for duplicate library name in input list: DMS045W. The duplicates are ignored.
HELP	INCOMPATIBLE: • [V4.4] HELP components removed: CMSUTIL, CPOTHER, CPUTIL, SOCKETS. CPOTHER (HELPCPOT) files renamed to HELPCP. • [V5.1] HELP components removed: SPTAPE, SRPI, VMADMIN. • [V5.2] CP LOCATE commands changed from HELP component CP to new HELP component LOCATE. Upwardly compatible: • [V4.4] HELP components added: BOOTPD, DHCPD, DNS, FTP, GDDMXD, HELP, IMAPADM, LE, LPD, MPROUTE, MROUTINE, NFS, RTE, SMTP, SNMP, SSLADMIN, TCPIP, TELNET, TFTD, TFTP, UFTD, X25IPI. • [V5.1] HELP component added: FCX.

CMS Interfaces

Table 28. Changes to General CMS Commands (continued)

Command	Changes
IDENTIFY	Upwardly compatible: • [V2.2] New options to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] Responses support 4-digit years. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the IDENTIFY command, the output from IDENTIFY uses the new default date format. This causes the date to be expanded to include the 4-digit year and also causes fields to the right of the date to be shifted. • [V2.3] New option for TCP/IP mail integration: TCPIP.
LISTDIR	Upwardly compatible: • [V5.2] New message: DMS1240E.
LISTDS	Upwardly compatible: • [V2.3] New options to specify date format: VMDATE, SHORTDATE, FULLDATE, ISODATE. • [V2.3] Responses support 4-digit years. • [V2.3] If the user's default date format is changed to FULLDATE or ISODATE, and the SHORTDATE option is not specified on the LISTDS command, any output from LISTDS with dates uses the new default date format. This causes the dates to be expanded to include the 4-digit year and also causes fields to be shifted.
LISTFILE	INCOMPATIBLE: • [V2.4] Message DMS550E changed to DMS765E. Upwardly compatible: • [V2.2] New options to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] BEFORE <i>date</i> and AFTER <i>date</i> options support 4-digit years. • [V2.2] Responses support 4-digit years. • [V2.2] If the user's default date format is changed from SHORTDATE to FULLDATE or ISODATE, and a date format option is not specified on the LISTFILE command, any output from LISTFILE with dates uses the new default date format. This causes the dates to be expanded to include the 4-digit year and also causes fields to be shifted.
LKED	Upwardly compatible: • [V2.4] Defaults for <i>value1</i> and <i>value2</i> on the SIZE option have been increased to '400K' and '100K', respectively.
LOAD	Upwardly compatible: • [V2.2] New message for insufficient storage above 16 MB: DMS891W.
LOADMOD	INCOMPATIBLE: • [V2.2] Changed message (new text possible): DMS639E.
MACLIST	Upwardly compatible: • [V2.3] When an = or ? is typed as the first character in the "Cmd" area of a line in the MACLIST display screen, all characters following the = or ? are ignored.
MACLMIG	INCOMPATIBLE: • [V5.1] Command has been removed.

Table 28. Changes to General CMS Commands (continued)

Command	Changes
MOVEFILE	Upwardly compatible: • [V2.4] Can process OS variable spanned records (under XLRI processing) and non-OS CMS files with record lengths up to 65535 bytes. • [V2.4] Adjusts output file sizes for compatibility between CMS and OS. • [V2.4] Allows greater FILEDEF default flexibility for file attributes (RECFM, LRECL, BLKSIZE). • [V2.4] If default size values are used, fixes record truncation problems when moving data files from fixed to variable format. • [V2.4] New message: DMS1116E. • [V4.4] Message DMS2139I has additional text.
NETDATA	Upwardly compatible: • [V2.3] New options to specify date format: VMDATE, SHORTDATE, FULLDATE, ISODATE. • [V2.3] Supports 4-digit-year date formats for entries in the <i>userid</i> NETLOG file. • [V2.3] Responses support 4-digit years. • [V2.3] If the user's default date format is changed to FULLDATE or ISODATE, and the SHORTDATE option is not specified on the NETDATA command, any output from NETDATA with dates uses the new default date format. This causes the dates to be expanded to include the 4-digit year and also causes fields to be shifted.
NOTE	INCOMPATIBLE: • [V4.4] In the Date field of the note header, the name of the time zone has been replaced with the offset from Coordinated Universal Time (UTC), zzzzz. The first character is a plus (+) or minus (–), indicating whether the local time is ahead of (east of) or behind (west of) UTC. The next two characters (digits) indicate the number of hours difference from UTC. The last two characters (digits) indicate the number of additional minutes difference from UTC. Upwardly compatible: • [V2.2] In the Date field of the note header, the year is now displayed with four digits. • [V2.3] TCP/IP domain names accepted as user IDs or as the resolution of nicknames. • [V2.3] Supports 4-digit-year date formats for entries in the <i>userid</i> NETLOG file.
NUCXLOAD	INCOMPATIBLE: • [V2.2] Changed message (new text possible): DMS639E.
PEEK	Upwardly compatible: • [V2.3] TCP/IP origin domain name address used when available and shown on PEEK message line for origin within current space and formatting limitations.
PIPE	INCOMPATIBLE: • [V2.3] All CMS Pipelines messages have a new prefix, and many messages have new numbers and text. See Appendix A, “CMS Pipelines Message Cross-Reference [V2.3],” on page 215. Upwardly compatible: • See “CMS Pipelines Stages, Subcommands, and Macros” on page 153.

CMS Interfaces

Table 28. Changes to General CMS Commands (continued)

Command	Changes
QUERY (in general)	Upwardly compatible: • [V3.1] New operand: TAPENEVR. • [V4.3] New operand: TAPECSL. • [V5.1] New operands: EDEVICE, HYPERSWAP. • Also see specific QUERY commands below.
QUERY CMSLEVEL	Upwardly compatible: • [V5.2] In the response, the CMS level value has changed.
QUERY CMSREL	Upwardly compatible: • [V5.2] In the response, the release level value has changed.
QUERY FILEDEF	Upwardly compatible: • [V2.4] New operand, ATTRIBUT, and its response.
RDRLIST	INCOMPATIBLE: • [V2.2] If you file the file created by RDRLIST, that file might contain new and changed fields (on the far right). Upwardly compatible: • [V2.2] New options to specify date format: VMDATE, SHORTDATE, FULLDATE, ISODATE. • [V2.2] Screen supports 4-digit years. • [V2.2] If a date format option is not specified on the RDRLIST command, the CMS DEFAULTS date format setting for RDRLIST will be used. • [V2.3] When an = or ? is typed as the first character in the “Cmd” area of a line in the RDRLIST display screen, all characters following the = or ? are ignored. • [V2.3] TCP/IP origin domain name address used when available and shown on the RDRLIST panel origin area within current space and formatting limitations.
RECEIVE	Upwardly compatible: • [V2.3] Supports 4-digit-year date formats for entries in the <i>userid</i> NETLOG file.
SADT	INCOMPATIBLE: • [V5.1] Screen layout has been adjusted to accommodate larger file and disk sizes.
SENDFILE	Upwardly compatible: • [V2.3] TCP/IP domain names accepted as user IDs or as the resolution of nicknames. • [V2.3] New options to specify the transmission method: SMTP, MIME, UFTSYNC, UFTASYNC. • [V2.3] Supports 4-digit-year date formats for entries in the <i>userid</i> NETLOG file. • [V5.2] Four new options to send files: BINARY-ATTACH, BINARY-INLINE, ASCII-ATTACH, and ASCII-INLINE. • [V5.2] Descriptions updated for the TRANSLATE, NODBCS, HANGEUL, KANJI and TCHINESE options.
SET (in general)	Upwardly compatible: • [V3.1] New operand: TAPENEVR. • [V4.3] New operand: TAPECSL.

Table 28. Changes to General CMS Commands (continued)

Command	Changes
TAPE	Upwardly compatible: • [V2.2] If the tape is under the control of a Tape Library Dataserver machine, and the DFSMS/VM Removable Media Services (RMS) FSMPPSI CSLLIB is available to CMS, the RUN (rewind and unload) function of TAPE calls the RMS FSMRMDMT (Demount) CSL routine to have the Dataserver unmount the tape. • [V2.2] Added message for Tape Library Dataserver support: DMS2147W. • [V4.4] Message DMS2139I has additional text.
TELL	Upwardly compatible: • [V2.3] Accepts a TCP/IP domain name as part of the destination information.
VMFPLC2	Upwardly compatible: • [V2.2] If the tape is under the control of a Tape Library Dataserver machine, and the DFSMS/VM Removable Media Services (RMS) FSMPPSI CSLLIB is available to CMS, the RUN (rewind and unload) function of VMFPLC2 calls the RMS FSMRMDMT (Demount) CSL routine to have the Dataserver unmount the tape. • [V2.2] Added message for Tape Library Dataserver support: DMS2147W. • [V4.4] Message DMS2139I has additional text.
VMLINK	INCOMPATIBLE: • [V3.1] Previously, parameters passed to exits were automatically uppercased before the exit was called. Now they remain in the case entered by the user. • [V4.4] A file mode extension specified in the *MODES record in the control file is no longer ignored. It is used unless overridden by the command line or by the :product tag in the NAMES file. Upwardly compatible: • [V2.3] When an = or ? is typed as the first character in the “Cmd” area of a line in the VMLINK display screen, all characters following the = or ? are ignored. • [V3.1] New variables: .EX, .PX. • [V3.1] Error message returned for each failing INVOKE command. • [V3.1] Message DMS2062I includes the name of the nickname being used when the QUERY option is processed. • [V3.1] Additional changes to operation and documentation. See “[V3.1] VMLINK Improvements” on page 57. • [V4.4] An asterisk (*) or equals sign (=) can be specified in the *MODES record in the control file to indicate that the default search order, Z-A, should be used.

CMS Utilities

Table 29 lists the CMS utilities that have changed. For additional information, see the *z/VM: CMS Commands and Utilities Reference*.

Table 29. Changes to CMS Utilities

Utility	Changes
DIRMAP	INCOMPATIBLE: • [V5.1] Screen layout has been adjusted to accommodate larger file and disk sizes.

CMS Interfaces

Table 29. Changes to CMS Utilities (continued)

Utility	Changes
QSYSOWN	INCOMPATIBLE: • [V5.1] Screen layout has been adjusted to accommodate larger file and disk sizes.

CMS File Pool Administration and Operator Commands

Table 30 lists the CMS file pool administration and operator commands that have changed. For additional information, see *z/VM: CMS File Pool Planning, Administration, and Operation*.

Table 30. Changes to CMS File Pool Administration and Operator Commands

Command	Changes
AUDIT	Upwardly compatible: • [V2.2] New operands: <i>fn ft</i>, REPLACE. • [V2.2] Added messages: DMS024E, DMS1258E, DMS3253I, DMS3254E, DMS3255E. • [V2.2] Changed message: DMS3470W (new text possible).
DELETE LOCK	Upwardly compatible: • [V5.2] New operand: FFrom <i>userid</i>.
DELETE USER	Upwardly compatible: • [V2.2] New options: DELAUTH KEEPAUTH. • [V2.2] Added message: DMS2023E.
FILEPOOL RELOAD	Upwardly compatible: • [V2.2] New message: DMS3455I.
FILEPOOL UNLOAD	Upwardly compatible: • [V2.2] New message: DMS3455I.

OPENVM Commands

Table 31 lists the OPENVM commands that have changed. For additional information, see the *z/VM: OpenExtensions Commands Reference*.

Table 31. Changes to OPENVM Commands

Command	Changes
OPENVM DEBUG	Upwardly compatible: • [V3.1] New operands: ALL, NOALL, DUMP, NODUMP, FILEIO, NOFILEIO, FLOW, NOFLOW, MOUNT, NOMOUNT, NFSREQUEST, NONFSREQUEST, OTHER, NOOTHER, RPCBUFFERS, NORPCBUFFERS, RPCLIBRARY, NORPCLIBRARY, WRAPSIZE 500, WRAPSIZE <i>n</i>, FORMAT. • [V3.1] Supports tracing NFS and BFS Client events.
OPENVM MOUNT	Upwardly compatible: • [V3.1] Supports new local NFS options.
OPENVM OWNER	Upwardly compatible: • [V3.1] New operands: <i>gid</i>, <i>uid</i>.

Table 31. Changes to OPENVM Commands (continued)

Command	Changes
OPENVM QUERY MOUNT	Upwardly compatible: • [V3.1] New options: NODETAILS, DETAILS. • [V3.1] Supports mounted NFS file systems.
OPENVM RUN	INCOMPATIBLE: • [V2.2] Changed message (new text possible): DMS639E.

XEDIT Subcommands

Table 32 lists the XEDIT subcommands that have changed. For additional information, see the *z/VM: XEDIT Commands and Macros Reference*.

Table 32. Changes to XEDIT Subcommands

Subcommand	Changes
FILE	Upwardly compatible: • [V3.1] Updated return codes: 32, 55. • [V3.1] New messages: 1019, 1020. • [V3.1] Supports mounted NFS file systems.
GET	Upwardly compatible: • [V3.1] Added message 1019 and 1020; updated return code 32 and 55. • [V3.1] Supports mounted NFS file systems.
LOAD	Upwardly compatible: • [V3.1] Added message 1019 and 1020; updated return code 32 and 55. • [V3.1] Supports mounted NFS file systems.
PUT	Upwardly compatible: • [V3.1] Added message 1019 and 1020; updated return code 32 and 55. • [V3.1] Supports mounted NFS file systems.
PUTD	Upwardly compatible: • [V3.1] Added message 1019 and 1020; updated return code 32 and 55. • [V3.1] Supports mounted NFS file systems.
SAVE	Upwardly compatible: • [V3.1] Added message 1019 and 1020; updated return code 32 and 55. • [V3.1] Supports mounted NFS file systems.
XEDIT	Upwardly compatible: • [V3.1] Added message 1019 and 1020; updated return code 32 and 55. • [V3.1] Supports mounted NFS file systems.

CMS Pipelines

This section identifies the CMS Pipelines functions that have changed. It contains the following subsections:

- CMS Pipelines Stages, Subcommands, and Macros
- “CMS Pipelines Messages” on page 154

CMS Pipelines Stages, Subcommands, and Macros

Table 33 lists the CMS Pipelines stages, subcommands, and macros that have changed. For additional information, see the *z/VM: CMS Pipelines Reference*.

[V2.3]

The code bases for CMS Pipelines and CMS/TSO Pipelines have been merged. Some new function exists as a result of the code merge. See “[V2.3] Pipelines Code Bases Merged” on page 79.

Table 33. Changes to CMS Pipelines Stages, Subcommands, and Macros

Function	Changes
BFSQUERY stage	Upwardly compatible: [V5.2] Output record contains the new levels of CP and CMS.
DATECONVERT stage	Upwardly compatible: [V2.4] Provides timestamp output.
PIPEPVR macro	Upwardly compatible: [V2.4] New option: <i>label</i>.
QUERY stage	Upwardly compatible: [V3.1] Information returned for QUERY VERSION indicates the new Pipelines version level. [V5.2] Information returned for QUERY LEVEL may indicate a new Pipelines service level.
READER stage	Upwardly compatible: [V2.4] New options: HOLD, NOHOLD, KEEP, NOKEEP, PURGE.

CMS Pipelines Messages

[V2.3]

All CMS Pipelines messages have been renamed and renumbered from a DMS prefix to an FPL prefix. All of the FPL message numbers are consistent with those from CMS/TSO Pipelines. For a cross-reference between DMS and FPL messages, see Appendix A, “CMS Pipelines Message Cross-Reference [V2.3],” on page 215.

The following CMS Pipelines messages have **changed text**. For additional information, see *z/VM: CMS and REXX/VM Messages and Codes*.

Note: If message text has been changed in more than one release, only the latest release is indicated.

[V4.1] FPL1016E
[V2.4] FPL1170E
[V2.4] FPL1171W

[V2.4] FPL1182E
[V2.4] FPL1183E
[V2.4] FPL1184E

[V2.4] FPL1185E
[V2.4] FPL1186W

CMS Routines

This section identifies the CMS routines that have changed. It contains the following subsections:

- General CMS Callable Services
- “CMS Multitasking Routines” on page 160
- “OpenExtensions Callable Services” on page 160

- “Systems Management Routines” on page 161
- “CMS Compatibility-Interface Routines” on page 161

General CMS Callable Services

Table 34 lists the general CMS callable services that have changed. For additional information, see the *z/VM: CMS Callable Services Reference*.

Table 34. Changes to General CMS Callable Services

Routine	Changes
DMSCLBLK	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90310, 90320, 90330, 90492, 90495.
DMSCLDBK	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90320, 90330, 90495.
DMSCLOSE	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90320, 90330, 90495.
DMSCRDIR	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason code: 90495.
DMSCRFIL	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i> and <i>create_date</i> parameters support 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason code: 90495.
DMSCROB	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i> and <i>create_date</i> parameters support 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason code: 90495.
DMSDEUSR	Upwardly compatible: • [V2.2] New parameters: DELAUTH, KEEPAUTH, and <i>length4</i>. • [V2.2] New reason code: 98700.

CMS Interfaces

Table 34. Changes to General CMS Callable Services (continued)

Routine	Changes
DMSENUSR	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE, <i>length7</i>. • [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90310, 90330, 90495.
DMSERP	Upwardly compatible: • [V2.2] New information names for Year 2000 support (FILE_DATE_CENTURY, ACT_FILE_DATE_CENTRY (note that U is omitted), and YEAR2000_SUPPORT).
DMSEXIDI	INCOMPATIBLE: • [V2.2] When this routine is called from a REXX program, the date field is returned as 10 characters. Previously, it was returned as 8 characters. Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>last_change_date</i> and <i>create_date</i> parameters support 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90320, 90330.
DMSEXIFI	INCOMPATIBLE: • [V2.2] When this routine is called from a REXX program, the date field is returned as 10 characters. Previously, it was returned as 8 characters. Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i>, <i>dateref</i>, <i>create_date</i>, and <i>last_change_date</i> parameters support 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90320, 90330.

Table 34. Changes to General CMS Callable Services (continued)

Routine	Changes																																												
DMSEXIST	Upwardly compatible: [V2.2] Offsets have changed in the FILE data record (and the record length has increased to 436 bytes): <table> <tr> <th>OFFSET</th><th>Field Name — Change Description</th></tr> <tr> <td>339 (X'153')</td><td><i>dec_date_ext</i> — Previously reserved</td></tr> <tr> <td>343 (X'157')</td><td><i>date_ext</i> — Added</td></tr> <tr> <td>353 (X'161')</td><td><i>iso_date_ext</i> — Added</td></tr> <tr> <td>363 (X'16B')</td><td><i>dec_dateref_ext</i> — Added</td></tr> <tr> <td>367 (X'16F')</td><td><i>dateref_ext</i> — Added</td></tr> <tr> <td>377 (X'179')</td><td><i>iso_dateref_ext</i> — Added</td></tr> <tr> <td>387 (X'183')</td><td><i>dec_cr_date_ext</i> — Added</td></tr> <tr> <td>391 (X'187')</td><td><i>cr_date_ext</i> — Added</td></tr> <tr> <td>401 (X'191')</td><td><i>iso_cr_date_ext</i> — Added</td></tr> <tr> <td>411 (X'19B')</td><td><i>dec_last_change_date_ext</i> — Added</td></tr> <tr> <td>415 (X'19F')</td><td><i>last_change_date_ext</i> — Added</td></tr> <tr> <td>425 (X'1A9')</td><td><i>iso_last_change_date_ext</i> — Added</td></tr> <tr> <td>435 (X'1B3')</td><td>Reserved — Added</td></tr> </table> [V2.2] Offsets have changed in the DIRECTORY data record (and the record length has increased to 308 bytes): <table> <tr> <th>OFFSET</th><th>Field Name — Change Description</th></tr> <tr> <td>254 (X'FE')</td><td><i>dec_last_change_date_ext</i> — Previously reserved</td></tr> <tr> <td>258 (X'102')</td><td><i>last_change_date_ext</i> — Added</td></tr> <tr> <td>268 (X'10C')</td><td><i>iso_last_change_date_ext</i> — Added</td></tr> <tr> <td>278 (X'116')</td><td><i>dec_cr_date_ext</i> — Added</td></tr> <tr> <td>282 (X'11A')</td><td><i>cr_date_ext</i> — Added</td></tr> <tr> <td>292 (X'124')</td><td><i>iso_cr_date_ext</i> — Added</td></tr> <tr> <td>302 (X'12E')</td><td>Reserved — Added</td></tr> </table>	OFFSET	Field Name — Change Description	339 (X'153')	<i>dec_date_ext</i> — Previously reserved	343 (X'157')	<i>date_ext</i> — Added	353 (X'161')	<i>iso_date_ext</i> — Added	363 (X'16B')	<i>dec_dateref_ext</i> — Added	367 (X'16F')	<i>dateref_ext</i> — Added	377 (X'179')	<i>iso_dateref_ext</i> — Added	387 (X'183')	<i>dec_cr_date_ext</i> — Added	391 (X'187')	<i>cr_date_ext</i> — Added	401 (X'191')	<i>iso_cr_date_ext</i> — Added	411 (X'19B')	<i>dec_last_change_date_ext</i> — Added	415 (X'19F')	<i>last_change_date_ext</i> — Added	425 (X'1A9')	<i>iso_last_change_date_ext</i> — Added	435 (X'1B3')	Reserved — Added	OFFSET	Field Name — Change Description	254 (X'FE')	<i>dec_last_change_date_ext</i> — Previously reserved	258 (X'102')	<i>last_change_date_ext</i> — Added	268 (X'10C')	<i>iso_last_change_date_ext</i> — Added	278 (X'116')	<i>dec_cr_date_ext</i> — Added	282 (X'11A')	<i>cr_date_ext</i> — Added	292 (X'124')	<i>iso_cr_date_ext</i> — Added	302 (X'12E')	Reserved — Added
OFFSET	Field Name — Change Description																																												
339 (X'153')	<i>dec_date_ext</i> — Previously reserved																																												
343 (X'157')	<i>date_ext</i> — Added																																												
353 (X'161')	<i>iso_date_ext</i> — Added																																												
363 (X'16B')	<i>dec_dateref_ext</i> — Added																																												
367 (X'16F')	<i>dateref_ext</i> — Added																																												
377 (X'179')	<i>iso_dateref_ext</i> — Added																																												
387 (X'183')	<i>dec_cr_date_ext</i> — Added																																												
391 (X'187')	<i>cr_date_ext</i> — Added																																												
401 (X'191')	<i>iso_cr_date_ext</i> — Added																																												
411 (X'19B')	<i>dec_last_change_date_ext</i> — Added																																												
415 (X'19F')	<i>last_change_date_ext</i> — Added																																												
425 (X'1A9')	<i>iso_last_change_date_ext</i> — Added																																												
435 (X'1B3')	Reserved — Added																																												
OFFSET	Field Name — Change Description																																												
254 (X'FE')	<i>dec_last_change_date_ext</i> — Previously reserved																																												
258 (X'102')	<i>last_change_date_ext</i> — Added																																												
268 (X'10C')	<i>iso_last_change_date_ext</i> — Added																																												
278 (X'116')	<i>dec_cr_date_ext</i> — Added																																												
282 (X'11A')	<i>cr_date_ext</i> — Added																																												
292 (X'124')	<i>iso_cr_date_ext</i> — Added																																												
302 (X'12E')	Reserved — Added																																												
DMSGETDA	INCOMPATIBLE: [V2.2] When this routine is called from a REXX program, the date field is returned as 10 characters. Previously, it was returned as 8 characters. Upwardly compatible: [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE and <i>length2</i>. [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. [V2.2] New reason codes: 90310, 90320, 90330.																																												

CMS Interfaces

Table 34. Changes to General CMS Callable Services (continued)

Routine	Changes																																														
DMSGETDF	INCOMPATIBLE: [V2.2] When this routine is called from a REXX program, the date field is returned as 10 characters. Previously, it was returned as 8 characters. Upwardly compatible: [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE and <i>length2</i>. [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. [V2.2] New reason codes: 90310, 90320, 90330.																																														
DMSGETDI	Upwardly compatible: [V2.2] Offsets have changed in the FILE data record (and the record length has increased to 112 bytes): <table> <tr> <th>OFFSET</th><th>Field Name — Change Description</th></tr> <tr> <td>88 (X'58')</td><td><i>dec_date_ext</i> — Added</td></tr> <tr> <td>92 (X'5C')</td><td><i>date_ext</i> — Added</td></tr> <tr> <td>102 (X'66')</td><td><i>iso_date_ext</i> — Added</td></tr> </table> [V2.2] Offsets have changed in the FILEEXT data record (and the record length has increased to 284 bytes): <table> <tr> <th>OFFSET</th><th>Field Name — Change Description</th></tr> <tr> <td>185 (X'B9')</td><td><i>dec_date_ext</i> — Previously reserved</td></tr> <tr> <td>189 (X'BD')</td><td><i>date_ext</i> — Added</td></tr> <tr> <td>199 (X'C7')</td><td><i>iso_date_ext</i> — Added</td></tr> <tr> <td>209 (X'D1')</td><td><i>dec_dateref_ext</i> — Added</td></tr> <tr> <td>213 (X'D5')</td><td><i>dateref_ext</i> — Added</td></tr> <tr> <td>223 (X'DF')</td><td><i>iso_dateref_ext</i> — Added</td></tr> <tr> <td>233 (X'E9')</td><td><i>dec_cr_date_ext</i> — Added</td></tr> <tr> <td>237 (X'ED')</td><td><i>cr_date_ext</i> — Added</td></tr> <tr> <td>247 (X'F7')</td><td><i>iso_cr_date_ext</i> — Added</td></tr> <tr> <td>257 (X'101')</td><td><i>dec_last_change_date_ext</i> — Added</td></tr> <tr> <td>261 (X'105')</td><td><i>last_change_date_ext</i> — Added</td></tr> <tr> <td>271 (X'10F')</td><td><i>iso_last_change_date_ext</i> — Added</td></tr> <tr> <td>281 (X'119')</td><td>Reserved — Added</td></tr> </table> [V2.2] Offsets have changed in the SEARCHALL and SEARCHAUTH data records (and the record length has increased to 252 bytes): <table> <tr> <th>OFFSET</th><th>Field Name/Change Description</th></tr> <tr> <td>226 (X'E2')</td><td>Reserved — Added</td></tr> <tr> <td>228 (X'E4')</td><td><i>dec_date_ext</i> — Added</td></tr> <tr> <td>232 (X'E8')</td><td><i>date_ext</i> — Added</td></tr> <tr> <td>242 (X'F2')</td><td><i>iso_date_ext</i> — Added</td></tr> </table>	OFFSET	Field Name — Change Description	88 (X'58')	<i>dec_date_ext</i> — Added	92 (X'5C')	<i>date_ext</i> — Added	102 (X'66')	<i>iso_date_ext</i> — Added	OFFSET	Field Name — Change Description	185 (X'B9')	<i>dec_date_ext</i> — Previously reserved	189 (X'BD')	<i>date_ext</i> — Added	199 (X'C7')	<i>iso_date_ext</i> — Added	209 (X'D1')	<i>dec_dateref_ext</i> — Added	213 (X'D5')	<i>dateref_ext</i> — Added	223 (X'DF')	<i>iso_dateref_ext</i> — Added	233 (X'E9')	<i>dec_cr_date_ext</i> — Added	237 (X'ED')	<i>cr_date_ext</i> — Added	247 (X'F7')	<i>iso_cr_date_ext</i> — Added	257 (X'101')	<i>dec_last_change_date_ext</i> — Added	261 (X'105')	<i>last_change_date_ext</i> — Added	271 (X'10F')	<i>iso_last_change_date_ext</i> — Added	281 (X'119')	Reserved — Added	OFFSET	Field Name/Change Description	226 (X'E2')	Reserved — Added	228 (X'E4')	<i>dec_date_ext</i> — Added	232 (X'E8')	<i>date_ext</i> — Added	242 (X'F2')	<i>iso_date_ext</i> — Added
OFFSET	Field Name — Change Description																																														
88 (X'58')	<i>dec_date_ext</i> — Added																																														
92 (X'5C')	<i>date_ext</i> — Added																																														
102 (X'66')	<i>iso_date_ext</i> — Added																																														
OFFSET	Field Name — Change Description																																														
185 (X'B9')	<i>dec_date_ext</i> — Previously reserved																																														
189 (X'BD')	<i>date_ext</i> — Added																																														
199 (X'C7')	<i>iso_date_ext</i> — Added																																														
209 (X'D1')	<i>dec_dateref_ext</i> — Added																																														
213 (X'D5')	<i>dateref_ext</i> — Added																																														
223 (X'DF')	<i>iso_dateref_ext</i> — Added																																														
233 (X'E9')	<i>dec_cr_date_ext</i> — Added																																														
237 (X'ED')	<i>cr_date_ext</i> — Added																																														
247 (X'F7')	<i>iso_cr_date_ext</i> — Added																																														
257 (X'101')	<i>dec_last_change_date_ext</i> — Added																																														
261 (X'105')	<i>last_change_date_ext</i> — Added																																														
271 (X'10F')	<i>iso_last_change_date_ext</i> — Added																																														
281 (X'119')	Reserved — Added																																														
OFFSET	Field Name/Change Description																																														
226 (X'E2')	Reserved — Added																																														
228 (X'E4')	<i>dec_date_ext</i> — Added																																														
232 (X'E8')	<i>date_ext</i> — Added																																														
242 (X'F2')	<i>iso_date_ext</i> — Added																																														

Table 34. Changes to General CMS Callable Services (continued)

Routine	Changes
DMSGETDS	INCOMPATIBLE: • [V2.2] When this routine is called from a REXX program, the date field is returned as 10 characters. Previously, it was returned as 8 characters. Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE and <i>length2</i>. • [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90310, 90320, 90330.
DMSGETDX	INCOMPATIBLE: • [V2.2] When this routine is called from a REXX program, the date field is returned as 10 characters. Previously, it was returned as 8 characters. Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE and <i>length2</i>. • [V2.2] <i>date</i>, <i>dateref</i>, <i>create_date</i>, and <i>update_date</i> parameters support 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason codes: 90310, 90320, 90330.
DMSOPBLK	INCOMPATIBLE: • [V2.2] When this routine is called from a REXX program, the date field is returned as 10 characters. Previously, it was returned as 8 characters. Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i>, <i>create_date</i>, and <i>dateref</i> parameters support 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason code: 90495.
DMSOPDBK	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>create_date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason code: 90495.
DMSOPEN	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>create_date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason code: 90495.
DMSQEFL	Upwardly compatible: • [V5.2] New values returned for the <i>cp_level</i> and <i>cms_level</i> parameters.
DMSQSFSL	Upwardly compatible: • [V5.2] New value returned for the <i>server_level</i> parameter.

CMS Interfaces

Table 34. Changes to General CMS Callable Services (continued)

Routine	Changes								
DMSRDCAT	Upwardly compatible: • [V2.2] In the OBJECTCAT record for SFS: – New bit settings in FILEFLAGS field to support 4-digit years (century setting for DATE and DATEREF fields). – Reserved CHAR(1) field preceding the LAST_CHANGE_DATE field has changed to:<table><tr><th>Field Name</th><th>Field Type/Description</th></tr><tr><td>CHGDATE_CENTURY</td><td>CHAR(1) Century byte for LAST_CHANGE_DATE</td></tr></table> – Reserved CHAR(1) field preceding the CREATIONDATE field has changed to:<table><tr><th>Field Name</th><th>Field Type/Description</th></tr><tr><td>CREATIONDATE_CENTURY</td><td>CHAR(1) Century byte for CREATIONDATE</td></tr></table>	Field Name	Field Type/Description	CHGDATE_CENTURY	CHAR(1) Century byte for LAST_CHANGE_DATE	Field Name	Field Type/Description	CREATIONDATE_CENTURY	CHAR(1) Century byte for CREATIONDATE
Field Name	Field Type/Description								
CHGDATE_CENTURY	CHAR(1) Century byte for LAST_CHANGE_DATE								
Field Name	Field Type/Description								
CREATIONDATE_CENTURY	CHAR(1) Century byte for CREATIONDATE								
DMSTRUNC	Upwardly compatible: • [V2.2] New parameters to specify date format: SHORTDATE, FULLDATE, ISODATE. • [V2.2] <i>date</i> parameter supports 4-digit years (10-character dates) when used with the FULLDATE and ISODATE parameters. • [V2.2] New reason code: 90495.								

CMS Multitasking Routines

Table 35 lists the CMS multitasking routines that have changed. For additional information, see *z/VM: CMS Application Multitasking*.

Table 35. Changes to CMS Multitasking Routines

Routine	Changes
DateTimeSubtract	Upwardly compatible: • [V2.3] Supports new date and time formats.

OpenExtensions Callable Services

Table 36 lists the OpenExtensions callable services that have changed. For additional information, see the *z/VM: OpenExtensions Callable Services Reference*.

Table 36. Changes to OpenExtensions Callable Services

Routine	Changes
close (BPX1CLO)	Upwardly compatible: • [V3.1] Supports sockets.
fcntl (BPX1FCT)	Upwardly compatible: • [V3.1] Supports sockets.
mount (BPX1MNT)	Upwardly compatible: • [V3.1] Mounts a local or remote file system.
openvmf (BPX1VM5)	Upwardly compatible: • [V2.4] New function code: VM5_RESOLVE_PATH.

Table 36. Changes to OpenExtensions Callable Services (continued)

Routine	Changes
read (BPX1RED)	Upwardly compatible: • [V3.1] Supports sockets.
wrote (BPX1WRT)	Upwardly compatible: • [V3.1] Supports sockets.

Systems Management Routines

Table 37 lists the systems management routines that have changed. For additional information, see *z/VM: Systems Management Application Programming*.

Table 37. Changes to Systems Management Routines

Routine	Changes
VIRTUAL_NETWORK_VSWITCH_SET (RPC)	INCOMPATIBLE: • [V5.1] For the <i>VLANID</i> parameter, the value 'ANY' is no longer supported. It was formerly the default.
Virtual_Network_Vswitch_Set (CSL)	INCOMPATIBLE: • [V5.1] For the <i>vlan_id</i> parameter, the value 'ANY' is no longer supported. It was formerly the default.

CMS Compatibility-Interface Routines

Table 38 lists the CMS compatibility-interface routines that have changed. For additional information, see the *z/VM: CMS Application Development Guide for Assembler*.

Table 38. Changes to CMS Compatibility-Interface Routines

Routine	Changes
DMSTVS	Upwardly compatible: • [V2.2] New LIBSRV plist parameter. • [V2.4] New message DMS2139I is issued if SENSE data from the tape mount indicates that the mounted tape cartridge may be incorrect for the tape device in use.

CMS Macros

This section identifies the CMS macros that have changed. It contains the following subsections:

- General CMS Macros and Subcommands
- “OpenExtensions Macros” on page 163
- “CMS Compatibility-Interface Macros” on page 163
- “CMS OS Simulation Macros and Supervisor Calls” on page 164

General CMS Macros and Subcommands

Table 39 lists the general CMS macros and subcommands that have changed. For additional information, see the *z/VM: CMS Macros and Functions Reference*.

Table 39. Changes to General CMS Macros and Subcommands

Macro or Subcommand	Changes
ADDENTRY macro	INCOMPATIBLE: • [V5.2] Not supported. ECF and SRPI are not supported.

CMS Interfaces

Table 39. Changes to General CMS Macros and Subcommands (continued)

Macro or Subcommand	Changes
ADDENTRY subcommand	INCOMPATIBLE: [V5.2] SRPI environment is not supported.
CMSLEVEL macro	INCOMPATIBLE: [V2.2] Returned CMS level has been frozen at X'0F' (Level 12) for VM/ESA V2.1 and later. Use the new DMSQEFL macro or the DMSQEFL CSL routine instead.
CPRB macro	INCOMPATIBLE: [V5.2] Not supported. ECF and SRPI are not supported.
CSMRETC macro	INCOMPATIBLE: [V5.2] Not supported. ECF and SRPI are not supported.
DELENTY macro	INCOMPATIBLE: [V5.2] Not supported. ECF and SRPI are not supported.
DELENTY subcommand	INCOMPATIBLE: [V5.2] SRPI environment is not supported.
DIRBUFF macro	Upwardly compatible: [V2.2] FILE record contains the following new fields: DIRFDAXD, DIRFDAXC, DIRFDAXI, DIRFLV13. [V2.2] FILEEXT record contains the following new fields: DIREAXD, DIREAXC, DIREAXI, DIREDRXD, DIREDRXC, DIREDRXI, DIRECDXD, DIRECDXC, DIRECDXI, DIREDCXD, DIREDCXC, DIREDCXI, DIRELV13. [V2.2] SEARCHALL and SEARCHAUTH records contain the following new fields: DIRSDAXD, DIRSDAXC, DIRSDAXI, DIRSCEND, DIRSLV13.
DMSQEFL macro	Upwardly compatible: [V5.2] Returns a new value for the CMS level.
EXSBUFF macro	Upwardly compatible: [V2.2] FILE record contains the following new fields: EXSFDAXD, EXSFDAXC, EXSFDAXI, EXSFDRXD, EXSFDRXC, EXSFDRXI, EXSFCDXD, EXSFCDXC, EXSFCDXI, EXSFDCXD, EXSFDCXC, EXSFDCXI, EXSF2000, EXSFLV13. [V2.2] In the FILE record, the following field has changed: EXSFRES. [V2.2] DIR record contains the following new fields: EXSDDCXD, EXSDDCXC, EXSDDCXI, EXSDCDXD, EXSDCDXC, EXSDCDXI, EXSD2000, EXSDLV13. - In the DIR record, the following field has changed: EXSDRES.
FSSTATE macro	Upwardly compatible: [V2.2] In the FST flag byte, bit 4 indicates the century (first two digits of the year) the file was last written or updated (0=19nn, 1=20nn, where nn is the 2-digit year). Previously, this bit was not used.
FSTD macro	Upwardly compatible: [V2.2] FSTFLAGS section contains the new FSTCNTRY field, which is a bit that indicates the century (first two digits of the year) the file was last written or updated (0=19nn, 1=20nn, where nn is the 2-digit year).
GETREQ subcommand	INCOMPATIBLE: [V5.2] SRPI environment is not supported.

Table 39. Changes to General CMS Macros and Subcommands (continued)

Macro or Subcommand	Changes
LT macro	INCOMPATIBLE: [V5.2] A new DMSLT macro has been created (identical to LT) and used in CMS, GCS, and REXX/VM to avoid conflict with the LT opcode of the IBM High Level Assembler, V1.5. If you currently use the LT macro, IBM recommends that you change to using DMSLT. The LT macro is still supplied in DMSGPI MACLIB, but it could be withdrawn in a future release.
SENDREQ macro	INCOMPATIBLE: [V5.2] Not supported. ECF and SRPI are not supported.
SENDREQ subcommand	INCOMPATIBLE: [V5.2] SRPI environment is not supported.
SETREPLY subcommand	INCOMPATIBLE: [V5.2] SRPI environment is not supported.
TAPECTL macro	Upwardly compatible: [V2.2] If the tape is under the control of a Tape Library Dataserver machine, and the DFSMS/VM Removable Media Services (RMS) FSMPPSI CSLLIB is available to CMS, the RUN (rewind and unload) function of TAPECTL calls the RMS FSMRMDMT (Demount) CSL routine to have the Dataserver unmount the tape.

OpenExtensions Macros

Table 40 lists the OpenExtensions macros that have changed. For additional information, see the *z/VM: OpenExtensions Callable Services Reference*.

Table 40. Changes to OpenExtensions Macros

Macro	Changes
BPXYERNO	Upwardly compatible: [V3.1] Contains equates for new return codes and reason codes.
BPXYOPNF	Upwardly compatible: [V3.1] New equates for new flag values for fcntl (BPX1FCT).
BPXYVM5	Upwardly compatible: [V2.4] New equate for new VM5_RESOLVE_PATH function code for openvmf (BPX1VM5).

CMS Compatibility-Interface Macros

Table 41 lists the CMS compatibility-interface macros that have changed.

Table 41. Changes to CMS Compatibility-Interface Macros

Macro	Changes
DEFNUC	INCOMPATIBLE: [V2.3] In the default CMS IPL heading (used when the VERSION= parameter is specified without a value in DEFNUC) the date is presented in ISO format (yyyy-mm-dd). Upwardly compatible: [V5.2] Default IPL heading entry has been updated with the new release level.

For additional information, see *z/VM: CMS Planning and Administration*.

CMS OS Simulation Macros and Supervisor Calls

Table 42 lists the CMS OS Simulation macros that have changed. Table 43 lists the CMS OS simulation supervisor calls that have changed. For additional information, see the *z/VM: CMS Application Development Guide for Assembler*.

Table 42. Changes to CMS OS Simulation Macros

Macro	Changes
CLOSE	Upwardly compatible: [V2.4] Can process OS formatted variable spanned QSAM records (under XLRI) or non-OS CMS files up to 65535 bytes in length.
DCB	Upwardly compatible: [V2.4] Can describe and pass both LRI and XLRI conventions for QSAM variable spanned long records (up to 65535 bytes) for subsequent OPEN, CLOSE, GET, or PUT processing. Can also describe non-OS CMS files up to 65535 bytes in length.
GET	Upwardly compatible: [V2.4] Can process QSAM I/O to variable spanned QSAM records or non-OS CMS files up to 65535 bytes in length.
OPEN	Upwardly compatible: [V2.4] Can process OS formatted variable spanned QSAM records (under XLRI) or non-OS CMS files up to 65535 bytes in length.
PUT	Upwardly compatible: [V2.4] Can process QSAM I/O to variable spanned QSAM records or non-OS CMS files up to 65535 bytes in length.
TIME	Upwardly compatible: [V2.2] Second half-byte of the date format is a century indicator, where 0 indicates the 1900's, 1 indicates the 2000's, and 2 indicates the 2100's. This corresponds to the MVS implementation of the TIME macro.

Table 43. Changes to CMS OS Simulation Supervisor Calls

SVC	Changes
SVC 19 (OPEN)	Upwardly compatible: [V2.4] Can process OS formatted variable spanned QSAM records (under XLRI) or non-OS CMS files up to 65535 bytes in length.
SVC 20 (CLOSE)	Upwardly compatible: [V2.4] Can process OS formatted variable spanned QSAM records (under XLRI) or non-OS CMS files up to 65535 bytes in length.

HELP Facility

Note: This section does not include HELP changes prior to z/VM V4.4.

Table 44 lists the HELP components (file types) that have been deleted, revised (used for a different purpose), or added in each release.

Table 45 lists the HELP files that have been deleted in each release. If a specific file name is not identified, all files with the specified file type were deleted.

Both groups of changes are considered to be **INCOMPATIBLE**, because:

- Files for a new HELP component may conflict with local HELP files with identical file IDs.

- Files identified as deleted may have to be removed manually from your system.

New files added to existing HELP components are not listed here because they are all upwardly compatible.

Table 44. HELP Components Deleted, Revised, or Added

Component Name	File Type	Change
CPOTHER	HELPCPOT	[V4.4] Deleted and all data merged into HELPCP component.
SOCKETS	HELPSOCK	[V4.4] Deleted (preferred functions now included in runtime for C/C++ for z/VM).
TCP	HELPTCP	[V4.4] Deleted and replaced by TCPIP component (file type HELPTCPI).
TFTP	HELPTFTP	[V4.4] Revised to be used only for TCP/IP TFTP client (TFTP command) subcommands.
BOOTPD	HELPBOOT	[V4.4] Added for TCP/IP BOOTP server administrative (BOOTPD command) subcommands.
DHCPD	HELPDHCP	[V4.4] Added for TCP/IP DHCP server administrative (DHCPD command) subcommands.
DNS	HELPDNS	[V4.4] Added for TCP/IP DNS server administrative commands.
FCX	HELPCFX	[V4.4] Added for Performance Toolkit subcommands and field descriptions.
GDDMXD	HELPGDDM	[V4.4] Added for TCP/IP GDDMXD/VM interface subcommands.
IMAPADM	HELPIMAP	[V4.4] Added for TCP/IP IMAP server administrative commands.
LPD	HELPLPD	[V4.4] Added for TCP/IP LPD administrative commands.
MPROUTE	HELPMPRO	[V4.4] Added for TCP/IP MPROUTE server administrative commands.
MROUTINE	HELPMROU	[V4.4] Added for CMS virtual systems management CSL routines.
NFS	HELPNFS	[V4.4] Added for TCP/IP NFS server administrative commands.
RTE	HELPRTE	[V4.4] Added for TCP/IP RouteD server administrative commands. Note: The menu file for this component is ROUTED HELPMENU.
SMTP	HELPSMTP	[V4.4] Added for TCP/IP SMTP server administrative commands.
SNMP	HELPSNMP	[V4.4] Added for TCP/IP SNMP administrative commands.
SSLADMIN	HELPSSLA	[V4.4] Added for TCP/IP SSL server administrative commands.
TCPIP	HELPTCPI	[V4.4] Added for TCP/IP commands and related functions.
TELNET	HELPTELN	[V4.4] Added for TCP/IP Telnet protocol client subcommands.
TFTD	HELPTFTD	[V4.4] Added for TCP/IP TFTP server administrative (TFTPD command) subcommands. Note: The menu file for this component is TFTPD HELPMENU.
UFTD	HELPUFTD	[V4.4] Added for TCP/IP UFT server administrative (UFTD command) subcommands.
X25IPI	HELPX25I	[V4.4] Added for TCP/IP X.25 interface administrative commands.
SPTAPE	HELPSPTA	[V5.1] Deleted (no longer supported).
SRPI	HELPSRPI	[V5.1] Deleted (function withdrawn in V5.2).
VMADMIN	HELPVMAD	[V5.1] Deleted (function withdrawn in V5.2).
IPFORMAT	HELPIPFO	[V5.2] Added for TCP/IP IPFORMAT subcommands.
LOCATE	HELPLOCA	[V5.2] Added for CP LOCATE command operands.

CMS Interfaces

Table 45. *HELP Files Deleted*

File Name	File Type	Reason
CPOTHER	HELPABBR	[V4.4] Data merged into CP HELPABBR.
MACRO	HELPABBR	[V4.4] Replaced by MACROS HELPABBR.
ROUTINE	HELPABBR	[V4.4] Replaced by ROUTINES HELPABBR.
FTP	HELPCMS	[V4.4] Replaced by FTP HELPTCPI.
LPQ	HELPCMS	[V4.4] Replaced by LPQ HELPTCPI.
LPR	HELPCMS	[V4.4] Replaced by LPR HELPTCPI.
LPRM	HELPCMS	[V4.4] Replaced by LPRM HELPTCPI.
LPRSET	HELPCMS	[V4.4] Replaced by LPRSET HELPTCPI.
NETSTAT	HELPCMS	[V4.4] Replaced by NETSTAT HELPTCPI.
PING	HELPCMS	[V4.4] Replaced by PING HELPTCPI.
REXEC	HELPCMS	[V4.4] Replaced by REXEC HELPTCPI.
TELNET	HELPCMS	[V4.4] Replaced by TELNET HELPTCPI.
TFTP	HELPCMS	[V4.4] Replaced by TFTP HELPTCPI.
USER	HELPCP	[V4.4] Replaced by MESSAGEU HELPCP.
<i>fn</i>	HELPCPOT	[V4.4] Replaced by <i>fn</i> HELPCP files.
CFLINK	HELPCPQU	[V4.4] Replaced by CFLINKS HELPCPQU.
AMMOTHER	HELPMENU	[V4.4] Function no longer supported.
AMMR	HELPMENU	[V4.4] Function no longer supported.
COMMAND	HELPMENU	[V4.4] Replaced by COMMANDS HELPMENU.
CPOTHER	HELPMENU	[V4.4] Data merged into CP HELPMENU.
LANRES	HELPMENU	[V4.4] Function no longer supported.
MACRO	HELPMENU	[V4.4] Replaced by MACROS HELPMENU.
MENU	HELPMENU	[V4.4] Replaced by MENUS HELPMENU.
ROUTINE	HELPMENU	[V4.4] Replaced by ROUTINES HELPMENU.
SOCKETS	HELPMENU	[V4.4] Preferred functions now in runtime for C/C++ for z/VM.
HCQ031W	HELPMMSG	[V4.4] Replaced by HCQ031E HELPMMSG.
KEYS	HELPPF	[V4.4] Replaced by PFKEYS HELPHelp.
<i>fn</i>	HELPSOCK	[V4.4] Preferred functions now in runtime for C/C++ for z/VM.
AMMR	HELPTASK	[V4.4] Function no longer supported.
AVS	HELPTASK	[V4.4]
CMS	HELPTASK	[V4.4]
CP	HELPTASK	[V4.4]
DVF	HELPTASK	[V4.4]
GCS	HELPTASK	[V4.4]
LANRES	HELPTASK	[V4.4] Function no longer supported.
MACRO	HELPTASK	[V4.4] Replaced by MACROS HELPTASK.
OPTIONS	HELPTASK	[V4.4] Replaced by QUERYSET HELPTASK.
PIPELINE	HELPTASK	[V4.4]
ROUTINE	HELPTASK	[V4.4] Replaced by ROUTINES HELPTASK.
SOCKETS	HELPTASK	[V4.4] Preferred functions now in runtime for C/C++ for z/VM.

Table 45. *HELP Files Deleted (continued)*

File Name	File Type	Reason
TSAF	HELPTASK	[V4.4]
VMDT	HELPTASK	[V4.4]
VMRM	HELPTASK	[V4.4]
VMSESE	HELPTASK	[V4.4]
VMSESEI	HELPTASK	[V4.4]
XSPOOL	HELPTASK	[V4.4]
IFCONFIG	HELPTCP	[V4.4] Replaced by IFCONFIG HELPTCPI.
OBEYFILE	HELPTCP	[V4.4] Replaced by OBEYFILE HELPTCPI.
CACHE	HELPTFTP	[V4.4] Replaced by CACHE HELPTFTD.
CLIENTS	HELPTFTP	[V4.4] Replaced by CLIENTS HELPTFTD.
CMS	HELPTFTP	[V4.4] Replaced by CMS HELPTFTD.
CREATION	HELPTFTP	[V4.4] Replaced by CREATION HELPTFTD.
DROPFIL	HELPTFTP	[V4.4] Replaced by DROPFIL HELPTFTD.
EXIT	HELPTFTP	[V4.4] Replaced by EXIT HELPTFTD.
LIGHT	HELPTFTP	[V4.4] Replaced by LIGHT HELPTFTD.
LOADPERM	HELPTFTP	[V4.4] Replaced by LOADPERM HELPTFTD.
LOADUSER	HELPTFTP	[V4.4] Replaced by LOADUSER HELPTFTD.
STAYUP	HELPTFTP	[V4.4] Replaced by STAYUP HELPTFTD.
STOP	HELPTFTP	[V4.4] Replaced by STOP HELPTFTD.
XFERMODE	HELPTFTP	[V4.4] Replaced by XFERMODE HELPTFTD.
SPTAPE	HELPABBR	[V5.1] Function no longer supported.
SRPI	HELPABBR	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
VMADMIN	HELPABBR	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
CMSSERV	HELPCMS	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
CONV2WD	HELPCMS	[V5.1] Function no longer supported.
MACLMIG	HELPCMS	[V5.1] Function no longer supported.
INSTDEF	HELPCP	[V5.1] Function no longer supported.
SPTAPE	HELPCP	[V5.1] Function no longer supported.
IOASSIST	HELPCPQU	[V5.1] Function no longer supported.
VR	HELPCPQU	[V5.1] Function no longer supported.
VRFREE	HELPCPQU	[V5.1] Function no longer supported.
CCWTRAN	HELPCPSE	[V5.1] Function no longer supported.
IOASSIST	HELPCPSE	[V5.1] Function no longer supported.
NOTRANS	HELPCPSE	[V5.1] Function no longer supported.
SVMLAN	HELPCPSE	[V5.1] Replaced by VMLAN HELPCPSE.
GUESTSTG	HELDPDISP	[V5.1] Replaced by GUESTZ HELPDISP.
GUESTSTO	HELDPDISP	[V5.1] Replaced by GUEST390 HELPDISP.
XC	HELDPDISP	[V5.1] Replaced by GUESTXC HELPDISP.
GUESTSTG	HELPDUMP	[V5.1] Replaced by GUESTZ HELPDUMP.
GUESTSTO	HELPDUMP	[V5.1] Replaced by GUEST390 HELPDUMP.

CMS Interfaces

Table 45. *HELP Files Deleted (continued)*

File Name	File Type	Reason
STACK	HELPDUMP	[V5.1] Replaced by LKS HELPDUMP.
XC	HELPDUMP	[V5.1] Replaced by GUESTXC HELPDUMP.
ADDEENTRY	HELPMACR	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
CPRB	HELPMACR	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
CSMRETC	HELPMACR	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
DELEENTRY	HELPMACR	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
SENDREQ	HELPMACR	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
SPTAPE	HELPMENU	[V5.1] Function no longer supported.
SRPI	HELPMENU	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
VMADMIN	HELPMENU	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
DVMCSSAA	HELPMROU	[V5.1] Replaced by DMSCSSAA HELPMROU.
DVMCSSAD	HELPMROU	[V5.1] Replaced by DMSCSSAD HELPMROU.
DVMCSSAQ	HELPMROU	[V5.1] Replaced by DMSCSSAQ HELPMROU.
DVMCSSAR	HELPMROU	[V5.1] Replaced by DMSCSSAR HELPMROU.
DVMCSSSC	HELPMROU	[V5.1] Replaced by DMSCSSSC HELPMROU.
DVMCSSSQ	HELPMROU	[V5.1] Replaced by DMSCSSSQ HELPMROU.
DVMCSSSR	HELPMROU	[V5.1] Replaced by DMSCSSSR HELPMROU.
DMS716E	HELPMMSG	[V5.1]
DMS718E	HELPMMSG	[V5.1]
DMS719E	HELPMMSG	[V5.1]
DMS720E	HELPMMSG	[V5.1]
DMS812E	HELPMMSG	[V5.1]
DMS912I	HELPMMSG	[V5.1]
DMS1126S	HELPMMSG	[V5.1]
DMS1250E	HELPMMSG	[V5.1]
DMS1255T	HELPMMSG	[V5.1]
DMS2048W	HELPMMSG	[V5.1]
FPL399E	HELPMMSG	[V5.1]
HCP200E	HELPMMSG	[V5.1]
HCP202I	HELPMMSG	[V5.1]
HCP203E	HELPMMSG	[V5.1]
HCP204E	HELPMMSG	[V5.1]
HCP352W	HELPMMSG	[V5.1] Replaced by HCP352E HELPMMSG.
HCP407I	HELPMMSG	[V5.1]
HCP408E	HELPMMSG	[V5.1]
HCP412E	HELPMMSG	[V5.1]
HCP416I	HELPMMSG	[V5.1]
HCP648E	HELPMMSG	[V5.1]
HCP722E	HELPMMSG	[V5.1]
HCP723E	HELPMMSG	[V5.1]

Table 45. *HELP Files Deleted (continued)*

File Name	File Type	Reason
HCP724E	HELPMSG	[V5.1]
HCP811I	HELPMSG	[V5.1]
HCP813I	HELPMSG	[V5.1]
HCP820E	HELPMSG	[V5.1]
HCP825E	HELPMSG	[V5.1]
HCP828W	HELPMSG	[V5.1]
HCP893E	HELPMSG	[V5.1]
HCP1038E	HELPMSG	[V5.1]
HCP1039E	HELPMSG	[V5.1]
HCP1106I	HELPMSG	[V5.1]
HCP1357E	HELPMSG	[V5.1]
HCP1375I	HELPMSG	[V5.1]
HCP1450E	HELPMSG	[V5.1]
HCP1508I	HELPMSG	[V5.1]
HCP1511I	HELPMSG	[V5.1]
HCP1555E	HELPMSG	[V5.1]
HCP1556I	HELPMSG	[V5.1]
HCP1557E	HELPMSG	[V5.1]
HCP2161I	HELPMSG	[V5.1]
HCP2578E	HELPMSG	[V5.1]
HCP2601E	HELPMSG	[V5.1]
HCP2818I	HELPMSG	[V5.1] Replaced by HCP2818E HELPMSG.
HCP6055E	HELPMSG	[V5.1]
HCP6203E	HELPMSG	[V5.1]
HCP6232E	HELPMSG	[V5.1]
HCP6405E	HELPMSG	[V5.1]
HCP6541E	HELPMSG	[V5.1]
HCP6748E	HELPMSG	[V5.1]
HCP6749E	HELPMSG	[V5.1]
HCP6752I	HELPMSG	[V5.1]
HCP6766E	HELPMSG	[V5.1]
HCP6767E	HELPMSG	[V5.1]
HCP6788E	HELPMSG	[V5.1]
HCP6880E	HELPMSG	[V5.1]
HCP8501E	HELPMSG	[V5.1]
HCP9026W	HELPMSG	[V5.1]
HCP9027W	HELPMSG	[V5.1]
HCP9028W	HELPMSG	[V5.1]
HCP9029W	HELPMSG	[V5.1]
HCP9400I	HELPMSG	[V5.1]

CMS Interfaces

Table 45. *HELP Files Deleted (continued)*

File Name	File Type	Reason
HCP9401I	HELPMSG	[V5.1]
HCP9402E	HELPMSG	[V5.1]
HCP9403E	HELPMSG	[V5.1]
HCP9404I	HELPMSG	[V5.1]
HCP9405E	HELPMSG	[V5.1]
HCP9406I	HELPMSG	[V5.1]
HCP9407I	HELPMSG	[V5.1]
HCP9408E	HELPMSG	[V5.1]
HCP9409E	HELPMSG	[V5.1]
HCP9410I	HELPMSG	[V5.1]
HCP9411I	HELPMSG	[V5.1]
HCP9412E	HELPMSG	[V5.1]
HCP9413I	HELPMSG	[V5.1]
HCP9414I	HELPMSG	[V5.1]
HCP9415I	HELPMSG	[V5.1]
HCP9417I	HELPMSG	[V5.1]
HCP9418E	HELPMSG	[V5.1]
HCP9419E	HELPMSG	[V5.1]
HCP9420E	HELPMSG	[V5.1]
HCP9421E	HELPMSG	[V5.1]
HCP9422E	HELPMSG	[V5.1]
HCS144E	HELPMSG	[V5.1]
HLExxxxx	HELPMSG	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
VMF2112I	HELPMSG	[V5.1] Replaced by VMF2112W HELPMSG.
<i>fn</i>	HELPSPTA	[V5.1] Function no longer supported.
<i>fn</i>	HELPSRPI	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
GUESTSTG	HELPSTOR	[V5.1] Replaced by GUESTZ HELPSTOR.
GUESTSTO	HELPSTOR	[V5.1] Replaced by GUEST390 HELPSTOR.
XC	HELPSTOR	[V5.1] Replaced by GUESTXC HELPSTOR.
SRPI	HELPTASK	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
<i>fn</i>	HELPMAD	[V5.1] Function to be withdrawn. (Withdrawn in V5.2).
LOCCMDBK	HELPCP	[V5.2] Replaced by CMDDBK HELPLOCA.
LOCDGNBK	HELPCP	[V5.2] Replaced by DGNBK HELPLOCA.
LOCFILID	HELPCP	[V5.2] Replaced by FILID HELPLOCA.
LOCFRMTA	HELPCP	[V5.2] Replaced by FRAMETBL HELPLOCA.
LOCLDEV	HELPCP	[V5.2] Replaced by LDEV HELPLOCA.
LOCRDEV	HELPCP	[V5.2] Replaced by RDEV HELPLOCA.
LOCSHPBK	HELPCP	[V5.2] Replaced by SHPBK HELPLOCA.
LOCSNABK	HELPCP	[V5.2] Replaced by SNABK HELPLOCA.
LOCSPFBK	HELPCP	[V5.2] Replaced by SPFBK HELPLOCA.

Table 45. *HELP Files Deleted (continued)*

File Name	File Type	Reason
LOCSTOR	HELPCP	[V5.2] Replaced by STORAGE HELPLOCA.
LOCSYM	HELPCP	[V5.2] Replaced by SYMBOL HELPLOCA.
LOCVDEV	HELPCP	[V5.2] Replaced by VDEV HELPLOCA.
LOCVMDBK	HELPCP	[V5.2] Replaced by VMDBK HELPLOCA.
LOCVSMBK	HELPCP	[V5.2] Replaced by VSMBK HELPLOCA.
LOCXITBK	HELPCP	[V5.2] Replaced by XITBK HELPLOCA.
VARYVECT	HELPCP	[V5.2] Function no longer supported.
VECTOR	HELPCPQU	[V5.2] Function no longer supported.
VIRTVECT	HELPCPQU	[V5.2] Function no longer supported.
VECTOR	HELPDEFI	[V5.2] Function no longer supported.
VECTOR	HELPDETA	[V5.2] Function no longer supported.
VECTOR	HELPDISP	[V5.2] Function no longer supported.
VECTOR	HELPDUMP	[V5.2] Function no longer supported.
VECTOR	HELPINDI	[V5.2] Function no longer supported.
HCP162E	HELPMSG	[V5.2] Replaced by HCP162I HELPMSG.
HCP633E	HELPMSG	[V5.2] Function no longer supported.
HCP634E	HELPMSG	[V5.2] Function no longer supported.
HCP635E	HELPMSG	[V5.2] Function no longer supported.
HCP636E	HELPMSG	[V5.2] Function no longer supported.
HCP637E	HELPMSG	[V5.2] Function no longer supported.
HCP638E	HELPMSG	[V5.2] Function no longer supported.
HCP649E	HELPMSG	[V5.2] Function no longer supported.
HCP664I	HELPMSG	[V5.2] Function no longer supported.
HCP745I	HELPMSG	[V5.2] Function no longer supported.
HCP746E	HELPMSG	[V5.2] Function no longer supported.
HCP749E	HELPMSG	[V5.2] Function no longer supported.
HCP785E	HELPMSG	[V5.2] Function no longer supported.
HCP1011E	HELPMSG	[V5.2] Replaced by HCP1011I HELPMSG.
HCP1701E	HELPMSG	[V5.2] Function no longer supported.
I HCP6864E	HELPMSG	[V5.2 (VM63952)] Replaced by HCP6864I HELPMSG.
HCP9257I	HELPMSG	[V5.2] Function no longer supported.
VECTOR	HELPSTOR	[V5.2] Function no longer supported.
INDQ	HELPVMDU	[V5.2]
XEDIT	HELPVMDU	[V5.2]

CMS Messages

[V2.3]

All CMS Pipelines messages have been renamed and renumbered from a DMS prefix to an FPL prefix. All of the FPL message numbers are consistent with those from CMS/TSO Pipelines. For a cross-reference between DMS and FPL messages, see Appendix A, “CMS Pipelines Message Cross-Reference [V2.3],” on page 215.

In the DMSMES system repository, the message texts for message numbers 2571 through 2999 have been replaced with pointers to the corresponding FPL equivalent message numbers in the FPLMES system repository. This may or may not be maintained in any future releases of VM.

Note: Changed CMS Pipelines messages are not listed here. See “CMS Pipelines Messages” on page 154.

The following CMS messages have **changed text**. For additional information, see *z/VM: CMS and REXX/VM Messages and Codes*.

Note: If message text has been changed in more than one release, only the latest release is indicated.

[V4.2] DMS050E	[V5.1] DMS988E	[V5.1] DMS2046E
[V5.2] DMS112S	[V2.2] DMS1229E	[V3.1] DMS2119E
[V5.2] DMS114S	[V2.3] DMS1433I	[V4.4] DMS2139I
[V3.1] DMS149E	[V2.3] DMS1437I	[V2.3] DMS3009R
[V2.2] DMS516E	[V2.4] DMS2010E	[V2.2] DMS3455I
[V2.2] DMS622E	[V5.2] DMS2015W	[V2.2] DMS3470W
[V2.2] DMS639E		

AVS Changes

There are no changes to AVS external interfaces.

Dump Viewing Facility Changes

Table 46 lists the Dump Viewing Facility functions that have changed. For additional information, see *z/VM: Dump Viewing Facility*.

Table 46. Changes to Dump Viewing Facility Functions

Function	Changes
DUMPSCAN	INCOMPATIBLE: [V3.1] DUMPSCAN cannot be used for CP dumps. Use the VM Dump Tool. [V3.1] The following subcommands are no longer supported: CPEBK, FINDCPE, FINDUSER, FRAMETBL, INSPECT, REAL, RIOBLOK, SELECT, SNAPLIST, TRSAVE, VIOBLOK, VIRT, VMDBK, XTRACE. [V3.1] Header record indicates new product name. Upwardly compatible: [V5.2] Header record indicates new release level.

GCS Changes

Table 47 lists the GCS external interfaces (commands and macros) that have changed. For additional information, see *z/VM: Group Control System*.

Table 47. Changes to GCS Commands and Macros

Interface	Changes
GCSLEVEL macro	Upwardly compatible: [V5.2] Contains new equates for new release levels.
GETMAIN macro	INCOMPATIBLE: [V2.2] Previously, although LOC=RES was documented as the default, the actual default was LOC=BELOW, and all the requested virtual storage was allocated below 16 MB. The actual default has been changed to LOC=RES. If the requester resides above 16 MB, virtual storage may be allocated anywhere. If you have any programs that invoke GETMAIN with the default, you must make sure they can accommodate addresses above 16 MB, or you must recode them to invoke GETMAIN with LOC=BELOW.
QUERY GCSLEVEL command	Upwardly compatible: [V5.2] Response contains new values for the new release.
QUERY MODDATE command	INCOMPATIBLE: [V2.2] Full 4-digit year is now returned in the date field of the response instead of a 2-digit year.
TIME macro	Upwardly compatible: [V2.2] Second half-byte of the date format is a century indicator, where 0 indicates the 1900's, 1 indicates the 2000's, and 2 indicates the 2100's. This corresponds to the MVS implementation of the TIME macro.

REXX/VM Changes

Table 48 lists the REXX/VM external interfaces (instructions, functions, and external functions) that have changed. For additional information, see the *z/VM: REXX/VM Reference*.

Table 48. Changes to REXX/VM External Interfaces

Interface	Changes
CMSFLAG	Upwardly compatible: [V2.2] New value for <i>flag</i>: YEAR2000.
DATE	Upwardly compatible: [V2.2] New parameters allow you to specify a date to be converted to a different format. [V2.4] New parameters: <i>output_separator_char</i>, <i>input_separator_char</i>.
DIAG / DIAGRC	Upwardly compatible: [V2.2] New DIAGNOSE code is supported: X'270'.
PARSE	Upwardly compatible: [V5.2] Information obtained by PARSE VERSION may contain new values.

TSAF Changes

There are no changes to TSAF external interfaces.

VMSES/E Changes

This section identifies the changes to VMSES/E external interfaces. It contains the following subsections:

- \$PPF File Names
- “VMSES/E Commands”
- “VMSES/E Messages” on page 176

\$PPF File Names

See “[V5.2] Product Parameter File Names” on page 18.

VMSES/E Commands

Table 49 lists the VMSES/E commands that have changed. For additional information, see the *z/VM: VMSES/E Introduction and Reference*.

Table 49. Changes to VMSES/E Commands

Command	Changes
GENCPBLS	INCOMPATIBLE: • [V5.1] Default has changed from DUAL to NODUAL. Upwardly compatible: • [V3.1] New options: ALTCNTRL, DUAL, NODUAL, LOADLIST, ALTLOADLIST, PREEXIT.
ITNVTSTR	Upwardly compatible: • [V2.3] New operands: KEY, PROD.
LOCALMOD	Upwardly compatible: • [V5.2] New operands: <i>infn</i>, <i>inft</i>, REWORK, MODID, CNTRL, VVTFT, ASM F, ASM H, ASM HL • [V5.2] New messages: VMF1306E, VMF1307E, VMF1308E, VMF1309E, VMF1310E
PUT2PROD	Upwardly compatible: • [V4.3] New message: VMF1219E • [V4.4] Console messages placed into VMSES/E-formatted \$VMFP2P \$MSGLOG file.
SERVICE	Upwardly compatible: • [V4.3] New operands: BUILD, ENABLE, DISABLE. • [V4.3] New messages: VMF1220W, VMF2308W, VMF2310I, VMF2771E, VMF2774I. • [V4.4] Console messages placed into VMSES/E-formatted \$VMFSRV \$MSGLOG file. • [V5.1] New operands: BITMAP, STATUS.
VMFAPPLY	Upwardly compatible: • [V3.1] New option: PREEXIT.
VMFASM	Upwardly compatible: • [V3.1] New option: PREEXIT.
VMFBLD	Upwardly compatible: • [V3.1] New options: PREEXIT, ULOG, WILD.
VMFEXUPD	Upwardly compatible: • [V3.1] New options: PREEXIT.

Table 49. Changes to VMSES/E Commands (continued)

Command	Changes
VMFHASM	Upwardly compatible: • [V3.1] New options: PREEXIT.
VMFHLASM	INCOMPATIBLE: • [V5.1] Default has changed from DUAL to NODUAL. Upwardly compatible: • [V3.1] New options: ALTCNTRL, DUAL, NODUAL, LOADLIST, ALTLOADLIST, PREEXIT.
VMFINS (in general)	Upwardly compatible: • [V2.3] New operands: DISABLE, ENABLE. • Also see specific VMFINS commands listed below.
VMFINS DELETE	Upwardly compatible: • [V2.3] New operand: DISABLE.
VMFINS INSTALL	Upwardly compatible: • [V2.3] New operands: DISABLE, ENABLE, NOSETUP, SETUP.
VMFINS MIGRATE	Upwardly compatible: • [V2.3] New operands: DISABLE, ENABLE.
VMFMRDSK	Upwardly compatible: • [V3.1] New options: PREEXIT.
VMFNLS	Upwardly compatible: • [V3.1] New options: PREEXIT.
VMFREC	Upwardly compatible: • [V3.1] New options: PREEXIT.
VMFREM	Upwardly compatible: • [V3.1] New option: PREEXIT. • [V4.4] New operand: MOD. • [V4.4] New option: PREFIX. • [V4.4] UNAPPLY and UNRECEIVE options can be used for local modifications.
VMFREPL	Upwardly compatible: • [V3.1] New options: LOG, LOGLVL, MOD, PREEXIT, PREFIX, PTF.
VMFSETUP	Upwardly compatible: • [V2.3] New operands: NOCONS, NOPROMPT, PROMPT.
VMFSIM (in general)	Upwardly compatible: • See specific VMFSIM commands listed below.
VMFSIM GETLVL	Upwardly compatible: • [V3.1] New options: MOD, PTF.
VMFSUFIN	Upwardly compatible: • [V2.4] New operand: ALL. • [V2.4] New options: CORTAPE, RSUTAPE. • [V4.3] New option: BUILD. • [V4.3] New message: VMF2308W
VMFSUFTB	Upwardly compatible: • [V4.3] New operand: SUFFN <i>fn</i>.

VMSES/E Interfaces

Table 49. Changes to VMSES/E Commands (continued)

Command	Changes
VMFUPDAT	Upwardly compatible: • [V4.3] New messages: VMF2300E, VMF2301W, VMF2302E, VMF2303W, VMF2304E, VMF2306W, VMF2307W, VMF2309W. • [V4.4] New operands: SRVBLDS and SYSREST. • [V4.4] Changes to VMFUPDAT Function Selection Panel. • [V4.4] New panels: SRVBLDS Update Panel and SYSREST Update Panel. • [V5.1] New operand: SYSMEMO. • [V5.1] New panel: SYSMEMO Update Panel. • [V5.1] Changed panel: SYSREST Update Panel — added PF key for Browse. • [V5.1] Changed panel: VMFUPDAT Function Selection Panel — added SYSMEMO.
VMFVIEW	Upwardly compatible: • [V2.4] New operands (all have the same function): REMOVE, VMFREM, \$VMFREM. • [V4.2] New operands (all have the same function): xxx, VMFxxx, \$VMFxxx.

Changed BLDDATA file

[V4.4] CMSSEGS BLDDATA has been renamed to ZVMSEGS BLDDATA and the Language Environment component segments have been added to it.

VMSES/E Messages

The following VMSES/E messages have **changed text**. For additional information, see *z/VM: Other Components Messages and Codes*.

Note: If message text has been changed in more than one release, only the latest release is indicated.

[V5.1] VMF389E	[V5.2] VMF1301R	[V4.3] VMF2215E
[V2.3] VMF1078I	[V5.1] VMF1821E	[V2.2] VMF2225E
[V4.1] VMF1200E	[V2.4] VMF2066E	[V5.1] VMF2240E
[V4.3] VMF1201E	[V2.4] VMF2114R	[V5.1] VMF2304E
[V2.4] VMF1203E	[V2.4] VMF2118I	[V2.3] VMF2507I
[V2.4] VMF1205E	[V2.4] VMF2119I	[V2.2] VMF2509I
[V4.3] VMF1206I	[V2.4] VMF2120W	[V3.1] VMF2733E
[V2.4] VMF1207I	[V2.4] VMF2152E	[V2.3] VMF2760I
[V2.4] VMF1211I	[V3.1] VMF2178I	[V4.3] VMF2760I
[V4.3] VMF1211I	[V2.2] VMF2206E	[V5.1] VMF2767I
[V4.3] VMF1215E	[V2.4] VMF2206W	

Chapter 4. Migration Tasks

This chapter provides guidance for various tasks and procedures that may apply to your migration. It contains the following major sections:

- “Converting from HCPRIO, HCPSYS, and HCPBOX to Configuration Files”
- “Migrating Spool Files and Saved Segments” on page 182
- “Sharing Data between Your Old System and Your New System” on page 187
- “Sharing Data among CMS Users on Multiple Systems” on page 193
- “Migrating Your User Directory” on page 194
- “Migrating Your SFS File Pool Servers” on page 197
- “Establishing Connectivity between Your New and Old Systems” on page 202
- “How to Back Out of the Migration” on page 204
- “Installing a Backlevel CMS” on page 205

Converting from HCPRIO, HCPSYS, and HCPBOX to Configuration Files

If you are still using the HCPSYS, HCPRIO, and HCPBOX ASSEMBLE files to define your current VM system, you should convert to using configuration files **before you migrate to the new z/VM system**. Configuration files:

- Provide more flexibility.
When system definition information is moved out of the CP nucleus into configuration files, much of that information can be changed dynamically using CP commands without having to rebuild CP.
- Support the latest system functions and capabilities.
Since configuration files were established as the recommended method for defining a VM system, only the configuration files have been enhanced to support new system functions and capabilities. The ASSEMBLE files have not been updated to support those functions.

The HCPSYS and HCPRIO definitions can be replaced by statements in the system configuration file (usually called SYSTEM CONFIG). The HCPSYS ASSEMBLE file included in the CP module on the new z/VM system contains only a SYSEND macroinstruction. The HCPRIO ASSEMBLE file included in the CP module on the new z/VM system contains only an RIOGEN CONS=DYNAMIC macroinstruction.

The system logo definitions in HCPBOX can be replaced by statements in the logo configuration file (usually called LOGO CONFIG). See “Creating a Logo Configuration File” on page 182.

z/VM: CP Planning and Administration describes how to set up and use the system configuration file and logo configuration file, including how to define the *parm disk* on which the configuration files reside.

There are three ways that you can migrate your HCPSYS and HCPRIO data to system configuration statements:

- Create the SYSTEM CONFIG file and system configuration statements manually.
- Use the HCPTSYS and HCPTRIO sample utility programs to read your current HCPSYS and HCPRIO files and create system configuration statements. See “Using the HCPTRIO and HCPTSYS Utilities” on page 180.

Converting to SYSTEM CONFIG

- Use the HCPDCON sample utility program to create system configuration statements from your current running system. You can also use the HCPRDEVS sample utility program to create real I/O device definitions from your running system. See “Using the HCPDCON Utility” on page 181 and “Using the HCPRDEV Utility” on page 182.

Note: The HCPTSYS, HCPTRIO, HCPDCON, and HCPRDEVS sample utility programs were supplied with z/VM V4.4 and earlier releases. **They are not included with z/VM V5.1 or later.**

No matter which method you choose, you will have to make some decisions and adjustments. After you create the SYSTEM CONFIG file and make your changes, re-IPL CP. Because the system configuration statements override the HCPSYS and HCPRIO macros that were used in building the CP nucleus, there is no need to rebuild CP. This allows you to migrate your definitions gradually. At any time you can change back to using the HCPSYS and HCPRIO files by renaming the SYSTEM CONFIG file on the parm disk.

“Configuration Statements that Replace HCPSYS Macroinstructions” identifies system configuration statements that provide functions equivalent to macroinstructions in HCPSYS. “Configuration Statements that Replace HCPRIO Macroinstructions” on page 180 identifies system configuration statements that provide functions equivalent to macroinstructions in HCPRIO. These are not complete lists of the supported system configuration statements. Many additional configuration statements exist that provide capabilities for which there are no corresponding HCPSYS or HCPRIO macroinstructions.

For more information about what you can specify in the system configuration file, rules for coding the system configuration file, and complete descriptions of all the supported system configuration statements, see *z/VM: CP Planning and Administration*.

Configuration Statements that Replace HCPSYS Macroinstructions

Table 50 shows the macroinstructions in the HCPSYS ASSEMBLE file that should be migrated to system configuration statements. In some cases, information from one macroinstruction must be migrated into more than one system configuration statement.

Table 50. System Configuration Statements that Replace HCPSYS Macros

HCPSYS Macro	Corresponding System Configuration Statement
CSELDEV	XLINK_DEVICE_DEFAULTS
CSELVOL	XLINK_VOLUME_INCLUDE XLINK_VOLUME_EXCLUDE
CSESYS	XLINK_SYSTEM_INCLUDE XLINK_SYSTEM_EXCLUDE XSPOOL_SYSTEM Note: There is a difference between using the CSESYS macroinstruction and the XSPOOL_SYSTEM statement. If you use cross system commands and spooling operations, the CSESYS macroinstruction requires you to specify each system in the list in exactly the same order on every system in the CSE complex. When you use the XSPOOL_SYSTEM statement, you do not have to list the systems in the same order as long as you use the SLOT operand to give the same slot number to each system.
CSETRACE	XSPOOL_TRACE

Table 50. System Configuration Statements that Replace HCPSYS Macros (continued)

HCPSYS Macro	Corresponding System Configuration Statement
CSEUSER	XSPOOL_XLIST_INPUT XSPOOL_XLIST_OUTPUT
SYSACNT	SYSTEM_USERIDS
SYSADDIN	CP_ADDON_INITIALIZE_ROUTINES
SYSCPVOL	CP_OWNED Notes: 1. The list of CP-owned volumes generated by CP_OWNED statements completely supersedes the list of CP-owned volumes generated by the SYSCPVOL macroinstruction. 2. There are two differences between using the SYSCPVOL macroinstruction and the CP_OWNED statement: a. If you use cross system spool file sharing, the SYSCPVOL macroinstruction requires you to specify each volume in the CP-owned list in exactly the same order on every system in the CSE complex. When you use the CP_OWNED statement, you do not have to list the volumes in the same order as long as you use the SLOT operand to give the same slot number to each shared volume. b. With the SYSCPVOL macroinstruction, if you need to add volumes to the CP-owned volume list on a running system, you have two choices: 1) Update the SYSCPVOL macroinstruction and IPL your system again. 2) Plan ahead — code volumes you do not have into the SYSCPVOL macroinstruction, and when you need to add a new volume, make sure the 1-character to 6-character volume identifier (<i>valid</i>) on the SYSCPVOL macroinstruction matches the volume identifier of the new volume. When you use the CP_OWNED statement, adding a new volume is easier: 1) Use the RESERVED operand to save one or more empty slots. 2) Use the CP DEFINE COWNED command to add the new volume. 3) If this is a permanent addition to the list, update your system configuration file so the new volume is automatically included in the CP-owned list then next time you IPL the system.
SYSDUMP	SYSTEM_USERIDS
SYSEREP	SYSTEM_USERIDS
SYSEXCL	USER_VOLUME_EXCLUDE
SYSFCN	PRIV_CLASSES
SYSFORM	USERFORM FORM_DEFAULT
SYSID	SYSTEM_IDENTIFIER
SYSINCL	USER_VOLUME_INCLUDE
SYSJRL (PSUPRS)	FEATURES
SYSJRL (other)	JOURNALING
SYSMAXU	FEATURES
SYSOPR	SYSTEM_USERIDS
SYSPLAS	PRINTER_TITLE
SYSRES (SYSCLR)	FEATURES
SYSRES (other)	SYSTEM_RESIDENCE
SYSSYMP	SYSTEM_USERIDS

Converting to SYSTEM CONFIG

Table 50. System Configuration Statements that Replace HCPSYS Macros (continued)

HCPSYS Macro	Corresponding System Configuration Statement
SYSTIME	TIMEZONE_DEFINITION Note: There is one difference between the SYSTIME macroinstruction and the TIMEZONE_DEFINITION statement. Using the SYSTIME macroinstruction allows you to define only one time zone, while the TIMEZONE_DEFINITION statement allows you to define an unlimited number of time zones. However, only one time zone can be active at any one time.
SYSTORE	STORAGE Note: The SYSTORE macroinstruction has the RMSIZE parameter that lets you define how much real storage CP should allocate for itself. However, CP now uses the maximum amount of available storage, unless you specify a real storage amount on the RMSIZE parameter of the SYSTORE macroinstruction or you specify the STORE=nnnnM parameter of the Stand-Alone Program Loader (SAPL). (For more information about SAPL and the IPL parameters, see <i>z/VM: CP Planning and Administration</i> .) Because CP uses the maximum amount of available storage, there is no need for an operand on the STORAGE statement that is equivalent to the RMSIZE parameter of the SYSTORE macroinstruction.
SYSUVOL	USER_VOLUME_SET

Configuration Statements that Replace HCPRIO Macroinstructions

Table 51 shows the macroinstructions in the HCPRIO ASSEMBLE file that should be migrated to system configuration statements.

Table 51. System Configuration Statements that Replace HCPRIO Macros

HCPRIO Macro	Corresponding System Configuration Statement
RDEVICE (ICA)	RDEVICE (ICA)
RDEVICE (SHARED)	DEVICES
RDEVICE (UIRATE)	HOT_IO_RATE Note: There are two differences between the UIRATE parameter of the RDEVICE macroinstruction and the HOT_IO_RATE statement: - Both the UIRATE parameter and the HOT_IO_RATE statement let you specify the maximum unsolicited interrupt rate for a specific device, but the HOT_IO_RATE statement also lets you set the rate for: - All devices - An entire class of devices - A range of real device numbers. - You can use the CP QUERY HOTIO command to display hot I/O rates defined in the system configuration file, but you cannot use this command to display hot I/O rates that you defined using the UIRATE parameter of the RDEVICE macroinstruction.
RDEVICE (other)	RDEVICE Note: Only real I/O devices that are too old to be sensed or that require more information must be defined with RDEVICE statements.
RIOGEN	OPERATOR_CONSOLES Note: You can use the EMERGENCY_MESSAGE_CONSOLES statement to define a list of console addresses that CP notifies when there is a system emergency.
SYSFCN	PRIV_CLASSES

Using the HCPTRIO and HCPTSYS Utilities

The HCPTRIO and HCPTSYS sample utility programs convert HCPRIO and HCPSYS definitions to system configuration statements. HCPTRIO and HCPTSYS

are REXX programs and can run on any level of VM. The programs read your HCPRIO and HCPSYS files and create files containing statements that you can use in a SYSTEM CONFIG file.

Notes:

1. HCPTRIO and HCPTSYS do not process DMKRIO and DMKSYS files.
2. By default, HCPTRIO examines the HCPRIO ASSEMBLE file on the first accessed CMS minidisk and generates a list of statements for those real devices that do not answer sense ID requests or that do not return enough information. By default, HCPTRIO creates a file called RDEV CONFIG on the first CMS minidisk accessed in R/W mode.
3. By default, HCPTSYS examines the HCPSYS ASSEMBLE file on the first accessed CMS minidisk and generates a list of statements for your system that define its system characteristics (such as accounting, journaling, and time zone) and CSE status. By default, HCPTSYS creates a file called SYSTEM CONFIG on the first CMS minidisk accessed in R/W mode.
4. The statements created by HCPTRIO and HCPTSYS may not define a complete SYSTEM CONFIG file. Because HCPTRIO and HCPTSYS create statements from your existing HCPRIO and HCPSYS macroinstructions, they may not create some new configuration statements that are necessary for IPL. For example, HCPTRIO and HCPTSYS will not create a LOGO_CONFIG statement. You must create that statement, and perhaps others, manually in the SYSTEM CONFIG file. For detailed information about configuration file statements and the minimum contents of the SYSTEM CONFIG file, see *z/VM: CP Planning and Administration*.

In the following example, system configuration statements are created in the RIO CONFIG A file from the macros contained in the file HCPRIO ASSEMBLE D:

```
hcprio rio config a from hcprio assemble d
```

In this example, the HCPTSYS command creates SYS CONFIG A from HCPSYS ASSEMBLE E:

```
hcptsys sys config a from hcpsys assemble e
```

For more information, see “HCPTRIO” on page 226 and “HCPTSYS” on page 228.

To use the statements created by HCPTRIO and HCPTSYS, add them to the SYSTEM CONFIG file on the parm disk. Make any other changes you desire or need and re-IPL CP.

Using the HCPDCON Utility

The HCPDCON sample utility program examines your running system and generates a file of configuration statements. By default, HCPDCON creates a file named SYSTEM CONFIG on the first CMS minidisk accessed in R/W mode. For more information, see “HCPDCON” on page 222.

Before using the SYSTEM CONFIG file created by HCPDCON, make sure that the file contain all the necessary statements and definitions. For detailed information about configuration file statements and the minimum contents of the SYSTEM CONFIG file, see *z/VM: CP Planning and Administration*. Then copy the SYSTEM CONFIG file to the parm disk and re-IPL CP.

Using the HCPRDEV Utility

The HCPRDEV sample utility program creates a system configuration-like file that contains statements for all real devices on your system that do not answer a sense ID request or do not return enough information. (These devices must be defined to the system.) When you select this function of HCPRDEV, by default it creates a file named RDEV CONFIG on the first CMS minidisk accessed in R/W mode. For more information, see “HCPRDEVS” on page 224.

Difference with Multiple Systems Using Shared Data

When using CP configurability support, you may see DASD attached to systems other than your new system. For example, your installation can have a large set of DASD that is shared by several systems. All the systems’ IOCPs could be set up for all the DASD, but each system actually uses only some of the DASD.

Because CP configuration senses all the DASD you have defined in your IOCP, you can see DASD not attached to your new system. To have your new system ignore DASD not attached to it, identify each one on a USER_VOLUME_EXCLUDE configuration statement.

Creating a Logo Configuration File

You can use the logo configuration file to override all information specified in HCPBOX ASSEMBLE. You can define an alternate source for logo picture files without changing HCPBOX. You can use statements in the logo configuration file to choose logo pictures for logical devices, SNA terminals, and locally-attached terminals. You can also use the logo configuration file to define the contents of the following fields:

- Command area
- Input area at the bottom of the logo screen
- Online message at the top of each logo screen
- Status area

You can use the DRAWLOGO sample utility program to create logo screens for your system. With this utility, you can edit the text of the logo file using XEDIT and modify the 3270 screen attributes in a logo file. DRAWLOGO creates these logo files on the first CMS minidisk accessed in R/W mode. By default, the file type is LOGO.

For more information about creating a logo configuration file and using the DRAWLOGO utility, see *z/VM: CP Planning and Administration*.

Migrating Spool Files and Saved Segments

This section provides you with some options for migrating your spool files, including saved segments, from your old system to your new system.

Note: No matter which option you choose, you should use the SPXTAPE command to create a backup of all the spool files and saved segments on your old system.

Depending on how you plan to migrate to the new system, you can use one of the methods shown in Table 52 on page 183 to migrate your old system’s spool files and saved segments. These methods are described in the following sections.


Table 52. Methods for Migrating Spool Files and Saved Segments

Method	When you can use this method
Using the same warm start and checkpoint areas	• If you are ready to cut over completely from your old system to your new system • If you want to migrate all your spool files and saved segments at once
Using SPXTAPE	• If you are ready to cut over completely from your old system to your new system • If you want to use your new system as a test system before cutting over completely • If you want to migrate all your spool files and saved segments at once • If you want to migrate selected spool files or saved segments
Building saved segments individually	• Anytime

Using the Same Warm Start and Checkpoint Areas to Migrate All Spool Files at Once

If you are ready to cut over completely from your old system to a new production system, you can set up your new system to use the same warm start and checkpoint areas as your old system. When you IPL your new system with the warm start option, all of the spool files, including your saved segments, are known to your new system.

The following procedure describes the situation where you are currently running the new z/VM release on a test system.

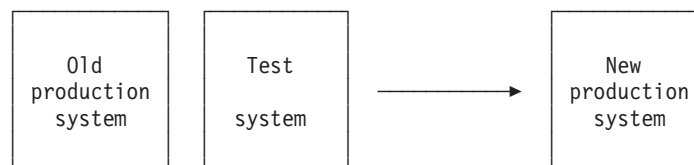

1. Define the warm start area and spool areas for your new production system to be the same as the areas used on your old production system. Define these areas in the CP_OWNED and SYSTEM_RESIDENCE statements in SYSTEM CONFIG. List all DASD from your old system first, just as it is defined. **Make sure that the DASD slot numbers for the spool file volumes are identical between the old production system and the new production system.** Then list any additional volumes directly after.
Attention: Do not IPL the new production system with the new SYSTEM CONFIG file while the old production system is still up and running.
2. Use SPXTAPE to dump all of your spool files to tape from your old production system. This is for backup purposes. Make sure that no other users are on the system. They could create new spool files that do not get backed up in this step.
3. On your old production system, purge any saved segments, saved systems, or other spool files that you do not want on your new production system.

Migrating Spool Files

4. If you will need any of the spool files or saved segments from the test system on your new production system (for example, the segments for the new levels of CMS and GCS), use SPXTAPE to dump the spool files and system data files from the test system to tape.
5. Shut down your old production system.
6. IPL your new production system using the warm start option. Consider using the NOAUTOLOG option in response to the START prompt to prevent any service machines from coming up with the wrong level of CMS.

Note: The spool files of users not known to your new system but who had spool files in your old system are now owned by the OPERATOR user ID.

7. Use SPXTAPE to load the spool files and saved segments from your test system (that you dumped to tape in step 4) on to your new production system.
8. To see what saved segments and saved systems your new system has, enter:

```
q nss
```

You may see some saved segments or saved systems with the same name or some that you no longer want or need on your new system.

Using the spool ID, purge any saved segments or saved systems that are duplicates or that you no longer want or need. Do not use the names of the saved segments or saved systems to purge them. Using the name may cause you to purge a saved segment you meant to keep.

9. Either shutdown and reIPL your new system, or enter the following command to start up all of your system's service machines:

```
xautolog autolog1
```

Attention: Do not IPL your old production system. Because it is defined with the same checkpoint and warm start areas as your new system, it can corrupt your new system's spool files.

10. Consider using the VMFSGMAP command to further map your system's saved segment layout and set up VMSES/E to build saved segments. See "Building Saved Segments Individually" on page 185 for a brief description of VMFSGMAP. For further details on managing saved segments see the *z/VM: Saved Segments Planning and Administration* book.

Using SPXTAPE to Migrate Your Spool Files

You can use the SPXTAPE command to migrate all of your spool files and saved segments, but this method is generally used for migrating selected files. For example, if you want to test out particular saved segments on your new system before bringing them into production, you can migrate only the spool files that contain those segments.

1. On your old system, use SPXTAPE to dump to tape the spool files you want to migrate to your new system, including saved segments and saved systems.
2. IPL your new system. Make sure you have enough spool space allocated to contain the spool files you intend to load.
3. On your new system, use SPXTAPE to load the spool files you dumped in step 1.
4. To see what saved segments and saved systems your new system has, enter:

```
q nss
```

You may see some saved segments or saved systems with the same name or some that you no longer want or need on your new system.

Using the spool ID, purge any saved segments or saved systems that are duplicates or that you no longer want or need. Do not use the names of the saved segments or saved systems to purge them. Using the name may cause you to purge a saved segment you meant to keep.

5. Consider using the VMFSGMAP command to further map your system's saved segment layout and to set up VMSES/E to build saved segments. See "Building Saved Segments Individually" for a brief description of VMFSGMAP. For further details on managing saved segments see the *z/VM: Saved Segments Planning and Administration* book.

Building Saved Segments Individually

If you prefer, you can rebuild each individual saved segment you need on your new system. The VMFSGMAP command provides a saved segment mapping and planning interface and allows you to define saved segments to VMSES/E. You can then use the VMFBLD command to build saved segments on your system. The *z/VM: Saved Segments Planning and Administration* book provides details on saved segments, including how to use VMFSGMAP to map and manipulate saved segment layouts and how to use VMFBLD to build saved segments on your system.

To plan and set up your saved segment layout in the new system:

1. Identify all of the products or applications in your new system that require saved segments.
2. Collect all of the saved segment definitions (that is, default DEFSEG commands) for each of the products or applications that will use saved segments in your new system.

For products, this information will most likely be in the installation information for each product. You need to gather this information for your system's own applications as well. The type of information you would need is shown in Table 53.

Table 53. Example of Saved Segment Information

Type of information needed	Your segment information
Product	z/VM
Segment Name	CMSBAM
Segment Type	Physical
Space Name	DOSBAM
Default Location	B10-B3F
Size (Pages)	30 hex pages (48 decimal)
Run Above 16 MB?	No
Build Tool	VMFBLD

Depending on how you plan to migrate to your new system, you may gather this information in two ways:

- Gradually, as you install or move each product or application
- During your migration planning prior to installing any products

Although it may require more time to plan for your migration, you should consider mapping your entire saved segment layout at once. Otherwise, as you gradually install additional products, you may have to remap and rebuild saved segments on your system.

Migrating Spool Files

As you gather saved segment information for your system's products and applications, you may need to take note of additional information about each saved segment that you plan to use in your new system:

- Whether the saved segment is a CMS logical segment or a CP physical segment
- Whether the saved segment can reside above the 16 MB line
- What execs or commands are used to build and save the segment

Note: There are two situations when you may not need to gather the additional information:

- Depending on how your new system and associated products were packaged, a number of saved segments may already be defined on your system. If this is true, do not collect the information for these segments manually. Later, when you use VMFSGMAP, you can pull saved segment information for these saved segments directly into the VMFSGMAP segment mapping tool using the SEGMERGE macro. You can input any additional segment information later if necessary.
- Some products may be VMSES/E-installed. In this case, these products may already have their default saved segment definitions identified for VMFSGMAP; so you do not need to collect this information manually. When you refer to each individual product's installation manual, the manual should clearly identify whether the product's saved segments are already defined for VMFSGMAP.

The information you gather will be useful to you later when you build your saved segments using VMFBLD. You provide this information to VMSES/E using the VMFSGMAP interface.

3. Use VMFSGMAP to add saved segment definitions or to plan for and out your system's saved segment layout.

With VMFSGMAP, you provide specific information about each saved segment in your system:

- Where it should reside in storage (the DEFSEG statement)
- The name of the saved segment and segment space name if it applies
- Whether it can reside above the 16 MB line
- Whether CMS logical segments reside in the saved segment
- What disks must be accessed for the saved segment to be properly built
- Instructions for how to build and save the saved segment

Note: Some packaged systems and any products that are VMSES/E enabled already have this information, as well as any other applicable information, identified for you. In general, for these saved segments you update only information about the placement of a saved segment or of a segment space in which the saved segment resides.

Using VMFSGMAP, you can map and manipulate your system's saved segment layout without affecting your running system. How to invoke VMFSGMAP, use its panel interface, and map out and manipulate saved segment layouts is fully described in the *z/VM: Saved Segments Planning and Administration* book.

When manipulating your system's saved segment layout:

- Remember that CMS uses storage locations from 15 MB to 20 MB. Be sure not to place any saved segments in that area.
- Make sure that you adequately plan for saved segments that must be run below the 16 MB line.

- Be careful not to overlay saved segments that require one another.
- 4. Build and save the saved segments you need on your system.
 Saved segments that have been completely defined to VMSES/E with the VMFSGMAP interface can be built using VMFBLD, regardless of whether the saved segment belongs to a product that is completely serviced with VMSES/E. And, for any products or applications that are serviced with VMSES/E, you will be notified whenever service to that product or application requires that a saved segment must be rebuilt. For products or applications that are not VMSES/E-enabled, you can manually provide the necessary information and use VMFBLD to build the saved segment.

For example, to build the CMSPIPES saved segment, you would enter:

```
vmfbld ppf segbld esasegs segblst cmspipes ( all
```

For examples of how to use VMFBLD to build saved segments on your system, see the *z/VM: Saved Segments Planning and Administration* book.

Avoiding the Loss of Spool Files and System Data Files During Migration

Changing how you allocate SPOOL space on your new system may cause you to lose spool files, which can include system data files. For example, you may decide to remove a cylinder or extent of SPOOL space during the migration of your system and make it PERM space for a minidisk. When the minidisk owner formats that space, any spool file that was chained through a page that was changed from SPOOL space to PERM space will then be destroyed. To avoid this potential loss of data:

1. Back up your spool files and system data files using SPXTAPE DUMP before reallocating SPOOL space.
2. Reallocate the SPOOL space.
3. Purge your system data files from the old system.
4. Shutdown the old system. **Do NOT use SHUTDOWN REIPL.**
5. IPL the new system with a cold start.
6. Restore the backed up spool files and system data files using SPXTAPE LOAD.

Sharing Data between Your Old System and Your New System

If you plan to migrate users from your old system to the new system in a staged fashion, your production will be split between several systems. One major concern is how you will share data between these systems.

z/VM allows you to share information on a DASD volume in the following ways:

- Among multiple virtual machines using virtual reserve/release.
- Among one virtual machine and operating systems running on other processors using real reserve/release.
- Among multiple virtual machines and operating systems running on other processors using concurrent virtual and real reserve/release. The virtual machines and operating systems must support reserve/release CCWs.

The following sections include examples of using virtual reserve/release and concurrent virtual and real reserve/release. For a complete discussion, refer to the information about DASD sharing in the *z/VM: CP Planning and Administration* book.

Reserve/Release Considerations for VSE

z/VM supports virtual reserve/release for minidisks that are not a full pack. Therefore, the cross-system communication (also called the “lock file”) volume does not have to be defined as a full pack.

MDISK statements for all DASD you want to mount to VSE as shared (in other words, you want to use the S operand of the IPL ADD statement) must include the V suffix on the link mode. That is, the link mode must be MWV. If this is not done, VSE issues MSG0123I for the minidisks that do not have link mode MWV on their MDISK statements.

Specifying MWV does not result in any additional overhead because z/VM does not do a reserve/release to any pack unless the guest asks it to. VSE only does a reserve/release to the cross-system communication file (the “lock file”) after IPL.

Note that if the cross-system communication file (the “lock file”) is shared by more than one CPU, SHARED must be YES on the RDEVICE statement in the system configuration file. Also, for sharing a volume concurrently between real and virtual machines, the volume must be defined as a full-pack minidisk.

Note: z/VM supports virtual reserve/release for the virtual disks in storage function. Virtual disks in storage are temporary FBA minidisks simulated in system storage rather than mapped to real DASD. Therefore, a virtual disk in storage may be faster than other minidisks because it avoids the overhead of I/O operations. VSE guests may benefit from this function by using a virtual disk in storage instead of a permanent minidisk to store label information areas and the cross-system communication file (the “lock file”). The virtual disk in storage function may be used by a guest running any supported version or release of VSE.

What to Do if Reserve/Release Cannot Be Used

In some instances, you will not benefit from or will not be able to share DASD through reserve/release. For instance, if:

- You need to share data among multiple virtual machines on multiple systems and the operating systems running in the virtual machines do not support reserve/release CCWs. CMS is an example of a virtual machine that does not support this type of sharing.
- Your system is constrained and you cannot afford the performance degradation that results from shared DASD (particularly concurrent virtual and real reserve/release).
- You need to share databases (such as SQL/DS™ or DB2® Server for VM) between several groups of users and not all of the users can be moved to the new system.
- There are incompatibilities that prevent your old system and new system from accessing the same data.

In these cases, you might:

- Replicate the data.
- Maintain the data on only one system and give two user IDs to users who need to access the data.
- Physically attach the DASDs you want to share to the second system and allow write access from only one system. If you have RACF, you can use it to find out

who has access and to limit the write access from one system. You should be aware, however, that this method of sharing is not protected by z/VM; you must set up the controls yourself.

- Use the cross system extensions (CSE) support in z/VM. See “Sharing Data among CMS Users on Multiple Systems” on page 193 for details.

Sharing Data among Multilevel Virtual Machines

If you want to share data among virtual machines running on the new system that support reserve/release CCWs, and you do not need to share this data with operating systems running on other processors, use virtual reserve/release. “Using Virtual Reserve/Release” explains how to do this. A virtual machine in which MVS is running is an example of a virtual machine that supports reserve/release CCWs.

If you want to share data among virtual machines running on the new system, and the virtual machines do not support reserve/release CCWs, you cannot use virtual reserve/release. A virtual machine in which CMS is running is an example of a virtual machine that does *not* support reserve/release CCWs. “Without Using Virtual Reserve/Release” on page 190 shows you how to share data between virtual machines that do not support virtual reserve/release.

Using Virtual Reserve/Release

If you want to share data among virtual machines running on the new system that support reserve/release CCWs, and you do not need to share this data with operating systems running on other processors, use virtual reserve/release.

Virtual reserve/release works the same way on the new system as it does on your old system. Figure 1 depicts virtual machines containing MVS that are sharing DASD through virtual reserve/release.

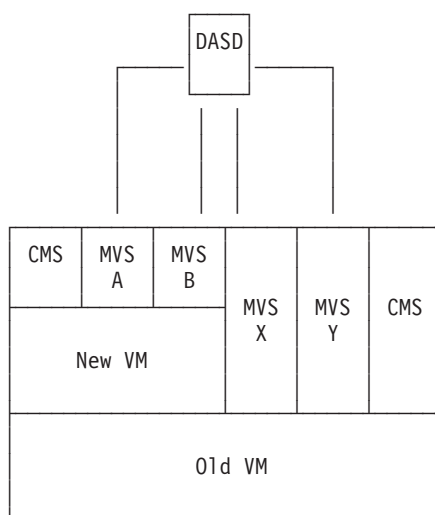


Figure 1. Sharing DASD Using Virtual Reserve/Release

To set up virtual reserve/release, it has to look like concurrent virtual and real reserve/release to the guest, which in the scenario depicted in Figure 1 is your new system.

Do the following on the new (guest) system:

Sharing Data

1. Define the DASD as a minidisk for one of the virtual machines, perhaps MVS A, in the new system directory. Specify MWV as the access mode on the MDISK statement. To the second level guest, which is your new z/VM system, this minidisk must be viewed as a full-pack minidisk.
2. Use the SHARED YES operand on the RDEVICE statement in your SYSTEM CONFIG file on the new system guest for this minidisk. For example:

```
Rdevice 0cc0 Type Dasd Shared yes
```

Or use the SET SHARED command on the new system guest for this minidisk. For example:

```
set shared on for 0cc0
```

3. Code the LINK statement for the remaining virtual machine, MVS B, in the new system directory. Specify MW as the access mode.

Do the following on the old (first-level) system:

1. Define the DASD where the minidisk resides.
2. Code the MDISK statement in your new system's directory entry in the old system's directory. You must append a V to the primary access mode (read, write, multiple write, and so on) indicating that this minidisk can be shared between virtual machines. For example:

```
MDISK 197 3390 000 400 WORKPK MWV ORANGE
```

3. Code the LINK statement in the directory entries for MVS X and MVS Y. For example:

```
LINK NEWESA 197 197 MW
```

4. Specify that the DASD will not be shared with another operating system. The default setting of the SHARED option of the RDEVICE macro (SHARED=NO) takes care of this for you.

Now, virtual machines running on your new system (the second-level system) may have write access to the same information as virtual machines running on your old system (the first level system).

Without Using Virtual Reserve/Release

If you want to share data among virtual machines running on the new system, and the virtual machines do not support reserve/release CCWs, such as CMS, you cannot use virtual reserve/release. You define the DASD as a minidisk, giving read/write access to only one of the CMS users running on the new system guest; the others can have only read access. This is shown in Figure 2 on page 191.

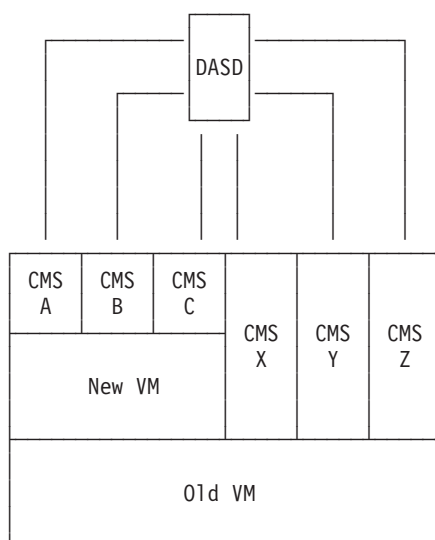


Figure 2. Sharing DASD without Using Virtual Reserve/Release

Do the following on the new (guest) system:

1. Define the DASD as a minidisk for one of the virtual machines, perhaps CMS A, in the new system directory. Specify MW as the access mode on the MDISK statement.
2. Code the LINK statement for the remaining virtual machines, CMS B and CMS C, in the new system directory. Specify RR as the access mode.

Do the following on the old (first-level) system:

1. Define the DASD where the minidisk resides.
2. Code the MDISK statement in your new system's directory entry in the old system's directory. Do not append a V to the primary access mode. For example:

```
MDISK 197 3390 000 400 WORKPK MW ORANGE
```
3. Code the LINK statement in the directory entries for CMS X, CMS Y, and CMS Z. For example:

```
LINK NEWESA 197 197 MW
```
4. Specify that the DASD will not be shared with another operating system. The default setting of the SHARED option of the RDEVICE macro (SHARED=NO) takes care of this for you.

Now, virtual machines running in the new system may have read access to the same information as virtual machines running on the old system.

Sharing Data among Virtual Machines and Other Systems

To share data among multiple virtual machines running on the new system and on other (older) systems, use concurrent virtual and real reserve/release support. You can do this, however, only if the virtual machines that are sharing the data support reserve/release CCWs. In the example shown in Figure 3 on page 192, the virtual machines containing MVS on the new system can share DASD in this manner with the virtual machine containing MVS on the old system. The virtual machines containing CMS cannot share DASD because CMS does not support

Sharing Data

reserve/release CCWs. You have to replicate the data for the CMS users or physically attach the DASD and give write access to only one system.

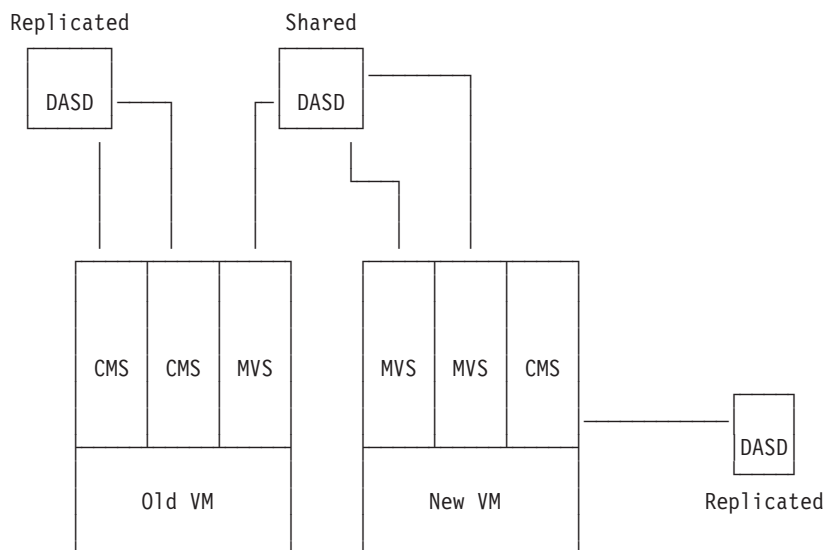


Figure 3. Sharing DASD between Virtual Machines on Multiple Systems

Concurrent virtual and real reserve/release support can be invoked either during system generation or at any time while the system is running.

Do the following to invoke concurrent virtual and real reserve/release while generating the system:

1. Ensure that the operating system running as a guest on the new system and the operating system with which you are sharing the DASD both support reserve/release CCWs.
2. Define the DASD as a shareable full-pack minidisk. To do this, use the MDISK statement in the user directory.
To define the DASD as a full-pack minidisk, the starting cylinder or block number must be zero and the number of cylinders or blocks must equal or exceed the number of cylinders or blocks on the real device. To define the DASD as virtually shareable, include the V in the mode definition. For example:

```
MDISK 327 3380 000 885 MVS003 MWV
```


or

```
MDISK 328 9336 0000 END MVS003 MWV
```
3. Define the DASD as being shareable between multiple real and virtual systems by specifying the SHARED YES option on an RDEVICE statement in SYSTEM CONFIG. For example:

```
Rdevice 0327 Type Dasd Shared yes
```

Note: Unless SHARED YES is specified, CP assumes that the device is not shared.

Sharing Data among CMS Users on Multiple Systems

You can use cross system extensions (CSE) to share access to minidisks among CMS users on different systems as if they were on the same system. Refer to *z/VM: CP Planning and Administration* for detailed information about CSE.

Preparing for Cross-System Link

Activation of cross-system link requires that the volumes be defined in the CP_OWNED or USER_VOLUME_LIST statements in the SYSTEM CONFIG file and switched online to all systems. Also, several other system configuration statements need to be added to the SYSTEM CONFIG file:

- XLINK_SYSTEM_EXCLUDE—to specify systems that CP is to exclude from the cross-system link.
- XLINK_SYSTEM_INCLUDE—to specify systems that CP is to include in the cross-system link.
- XLINK_VOLUME_EXCLUDE—to define DASD volumes that are to be excluded from the cross-system link operation.
- XLINK_VOLUME_INCLUDE—to define the DASD volumes to be included in the cross-system link operation.

The statements are described in *z/VM: CP Planning and Administration*.

Preparing for Cross-System Spool

Activation of cross-system spool requires that the spooling volumes be defined to the control programs by the CP_OWNED statement in the SYSTEM CONFIG files of all CSE systems in the complex. The spooling volumes must be switched online to those systems. Additional configuration statements may be needed, as follows:

- XSPOOL_SYSTEM—to specify the systems that are to participate in cross-system commands and spooling operations.
- XSPOOL_TRACE—to define the number of pages of storage that CP should allocate for the cross-system spool (XSPOOL) trace tables.
- XSPOOL_XLIST_INPUT—to specify virtual machines whose input spool files will not participate in cross-system spooling and cross-system message and query commands.
- XSPOOL_XLIST_OUTPUT—to specify virtual machines whose output spool files will not participate in cross-system spooling and cross-system message and query commands.

Finally, all spooling volumes must be CP-formatted for the new system. Once these conditions are met, cross-system spooling is activated by an explicit operator command and can be started on one system at a time until the entire complex is operating with shared spool.

Any system not starting cross-system spool will continue to operate in the normal way without shared spool. However, once a complex has become operational, systems cannot be removed and then added again without consideration for the spool files that belong to different users and are now spread throughout the complex. These files are now owned by different systems and must be collected and redistributed if CSE operation is discontinued.

Migrating Your User Directory

This section helps you migrate your old user directory to the new system. Do not migrate the directory until you finish installing the new system.

Object Directory Compatibility

Object directory compatibility is supported when the object directory created with the DIRECTXA MODULE on the new system is used by **other currently supported levels of CP**. This support lets you use a single source directory in a mixed Cross System Extensions (CSE) environment, or when migrating to the new release of CP.

A copy of the new DIRECTXA MODULE should exist on each system that will share a single source directory and depend on object directory compatibility. A new copy of the DIRECTXA MODULE should be distributed to each of the systems whenever service is applied to the HCPDIR ASSEMBLE file on the new system, which is used to create the DIRECTXA MODULE.

Getting Around Directory Differences

If you want to use the same source directory for your old and new systems:

- **Migrating from an Unsupported Release:** Avoid using any directory statements or options that were introduced after your current release. MIXED directory APARs do not exist for any subsequent releases. To include statements or options that were introduced after your release, you must maintain two source directories. The statements and options that are unsupported by your old system should be included only in the source directory for the new system.
- **Migrating from a Supported Release:** You can do either of the following:
 - Use the DIRECTXA MODULE on the new system to create the object directory for both systems, as described above.
 - Avoid using any directory statements or options that were introduced after your release. MIXED directory APARs do not exist for any subsequent releases.

User Directory Control Statement Changes

For a list of control statement changes, refer to the control statements compatibility table (if any) for each of the releases since your old release.

Default Volume Label Changes

The default volume labels have changed from your old release to the new release. The new prefix is 520. For example, the label for the system residence volume is 520RES.

Preparing to Migrate Your User Directory

If you have a problem IPLing the new system, it may be because of changes you have made to the directory. If you suspect this, you can use the NODIRECT option when you bring up the new system. This brings up the system without accessing the user directory.

Before you can use NODIRECT, you need to know information about the source directory's minidisk, the CMS system disk, and the system residence volume. Enter this information now in Table 54 on page 195 to help you remember it. It may be too late to get this information if you wait until you have directory problems. The first

three entries in Table 54 are examples. Refer to *z/VM: CP Planning and Administration* for more information on loading z/VM V5.2. Refer to the *z/VM: Guide for Automated Installation and Service* for information on the IBM default location and sizes of minidisks.

Table 54. Information Needed To Use NODIRECT Option

	Minidisk or Volume Address	Volume Identifier	Starting Cylinder or Block	Number of Cylinders or Blocks Allocated
Minidisk containing source directory (example)	2CC	520RES	296	5
CMS system disk (example)	190	520RES	189	107
System residence volume (example)	123	520RES	0	END
Minidisk containing source directory				
CMS system disk				
System residence volume				

Using Two Source Directories

During your migration, you may choose to maintain either two source directories or one. If you use two directories, one on the old system and one on the new, you need to be very careful that any changes are reflected in both directories, if needed. Using two directories allows you to exploit the new functions of z/VM V5.2 without worrying about backing out.

Considerations for Using a Directory Maintenance Program

If you have already installed a directory maintenance program on your z/VM V5.2 system, or if you are using only one directory, you may have to issue additional commands while migrating the source directory.

Example Using the IBM Directory Maintenance Facility (DirMaint)

For example, several additional steps are needed if DirMaint is used:

1. Before changing the source directory, enter DIRM DISABLE. This ensures that DirMaint does not try to update the directory while you are converting it.
2. Enter DIRM USER BACKUP. This creates a CMS flat file of the current source directory named USER BACKUP and found on DirMaint's 1DB minidisk (G-disk).
3. Update USER BACKUP with the new directory statements.
4. After updating, copy USER BACKUP to DirMaint's 1DF minidisk (E-disk) and rename it to USER INPUT.
5. Erase any USER DIRECT E file and start DirMaint by autologging it or by running DVHBEGIN or DIRM RLDDATA.
6. Enter DIRM ENABLE to allow DirMaint to resume making updates.
7. Issue DIRM DIRECT command to put the directory online.

For complete information on how to make manual changes to the source directory when DirMaint is installed and running, see:

- *z/VM: Directory Maintenance Facility Tailoring and Administration Guide*
- *z/VM: Directory Maintenance Facility Commands Reference*
- *IBM Directory Maintenance Facility Program Directory*

Steps for Migrating Your Source User Directory

Whether you use two directories or one during migration, you can migrate your source directory by merging information from the old directory into the new directory. The old directory is left unchanged and can be either discarded or used on the old system. To do this:

1. Make a copy of the source user directory on the old system with a different file name. Move the copy to the new system.
2. Edit the z/VM V5.2 directory and merge pieces from the old directory into it as the old directory entries are migrated. To migrate the old directory entries:
 - a. Migrate each system user ID.

IBM supplies a sample directory with the z/VM product. In this directory, there are several system user IDs defined. For each system user ID that you used in your old system, verify that your directory entries are applicable in z/VM V5.2:

 - If applicable, make the needed changes in the new directory's entry.
 - If not applicable, leave the new directory's entry as is.
 - b. For all other user IDs:

Note: This step may be staged or done in groups as you move the users to the new system.

- 1) Increase storage sizes as needed. The minimum storage size for a shared copy of CMS is 256 KB. At least 20 MB is needed to IPL a nonshared copy of CMS, for example to IPL the 190 minidisk.
- 2) Verify that AUTOONLY, NOLOG, NOPASS, or LBYONLY is not specified in the password field of the USER statement unless the user is to take advantage of the function the operand provides.
- 3) Specify the type of virtual machine you want your user IDs to have. You can specify an XA, ESA, or XC virtual machine.

Note: 370 virtual machines are no longer supported.

- 4) Look for usage of incompatible directory control statements. See the user directory control statement compatibility tables in this book for the list of incompatible statements. Note any defaults that changed since your old release.
 - 5) Resolve any incompatibilities by:
 - Removing directory control statements that are no longer supported.
 - Changing directory control statements with changed parameters.
 - Optionally, exploiting new directory control statements and parameters.
 - 6) Move all migrated user IDs to the new directory.
3. Check the syntax of your new directory using the DIRECTXA command with the EDIT option. For example:

```
directxa user direct (edit
```
 4. Fix any problems.
 5. Put the new directory on-line using the DIRECTXA command, for example,

```
directxa user direct
```

If You Cannot IPL Because of a Problem with the User Directory

If you have a problem IPLing z/VM V5.2, you can try using the NODIRECT option. Because z/VM V5.2 does not support a stand-alone directory function, you must

use the following steps to recover when you cannot IPL because of a problem with the user directory. The information recorded in Table 54 on page 195 is used in this procedure.

1. IPL and bring up the system using the NODIRECT option. This logs on the primary system operator.
2. Use the DEFINE MDISK command to obtain access to the minidisks containing the directory source file, the CMS system disk, and the CP system residence volume. You recorded the minidisks addresses, starting values, and sizes in Table 54 on page 195.

For example, using the sample information in Table 54 on page 195:

```
define mdisk as 2cc 296 5 520RES
define mdisk as 190 189 107 520RES
define mdisk as 123 0 END 520RES
```

3. IPL 190
4. Enter the ACCESS command to access the minidisk that contains the source directory.
5. Fix the problem with the directory.
6. Put the corrected directory on-line using the DIRECTXA command. For example:

```
directxa user direct
```
7. Shutdown and re-IPL the system without using the NODIRECT option.

Refer to *z/VM: System Operation* for a complete step-by-step procedure for recovering the user directory after a problem during IPL.

Migrating Your SFS File Pool Servers

You will probably want to have the *z/VM: CMS File Pool Planning, Administration, and Operation* book available as you do this task.

Using Two System Images

For this type of migration, you have both the old system and the new system running at the same time. The new system can be installed on a separate physical processor, in a logical partition, or as a second level system on your old system.

You can do the migration in two ways:

- Move the entire user population for your SFS file pool servers all at once.
- Stage the move by grouping your users, for example, by department, by project, or whatever is appropriate.

Staging the move may be time consuming. Also, if you are not careful, aliases and authorizations may be lost in the move.

You can automate the move somewhat by using the SFSTRANS EXEC, which is documented in the *z/VM: CMS File Pool Planning, Administration, and Operation* book, as a model. Note that SFSTRANS assumes that you have access to both the old and the new servers.

Procedure

1. Use FILEPOOL BACKUP for each storage group to back up all the data on the old release.

Migrating File Pool Servers

For assistance, refer to the section on backing up the user data in the *z/VM: CMS File Pool Planning, Administration, and Operation* book. This backup can be used on your new server. It can also be used if you need to back out to your old release.

Notes:

- a. **[V2.1]** Control data backup files created on your new system are not supported on the old system.
2. Shut down the SFS file pool servers on your old system.
Enter the STOP operator command. Do not use STOP IMMEDIATE. For example, from the server machine console, enter:

stop

Or, from a secondary user console, such as MAINT, enter:

```
#cp send vmserv3 stop  
#cp send vmserv4 stop
```

3. Install the new level of z/VM.
4. Set up a file pool server machine on the new system.

If you are moving everyone at once:

If you can, move the entire DASD pack that contains the SFS minidisks to the new system. Use the same minidisk locations and addresses defined in the directory entry for the server on the old system. If needed, update the directory entry as described in “Directory Entry Considerations and Changes” on page 200.

If you cannot move the entire DASD pack to the new processor, configure your directory entry for the new server so that it has identical minidisk addresses and sizes as the server on the old system. If you are moving the minidisks to a DASD of a different type, it may be impossible for the sizes to be exactly the same. In that case, make them slightly larger. Then, use the DFSMS COPY command or the DDR command to move the contents of the old server's minidisks onto the new server's minidisks. See the *z/VM: CMS File Pool Planning, Administration, and Operation* book for more information about how to prepare for and use DFSMS COPY.

If you are staging the move by groups:

Make sure the new file pool server machine has enough physical DASD space to hold the group of users that you want to move. See the section on generating a file pool and server in the *z/VM: CMS File Pool Planning, Administration, and Operation* book for details on how to do this.

5. **If you are staging the move by groups:**

Move the users in the group that you want to move to the new file pool. Consider modifying the SFSTRANS EXEC, which is shown in the *z/VM: CMS File Pool Planning, Administration, and Operation* book, to automate this procedure for you. To move users to the new file pool, do the following:

- a. Enroll the users in the new file pool. Make sure the users have enough file blocks to contain their data.
- b. Re-create each user's directory structure in the new file pool.
- c. Copy or move the users' files from the old file pool to the new file pool.
- d. Remove the users' space from the old file pool.

If you can, use the DELETE USER command to delete a user from the old file pool. However, if a user needs to write to others' files in the old file pool, you can:

- Delete the user from the old file pool, then immediately re-enroll the user, or
- Erase the copied or moved files, and reduce the user's space to 0 using the MODIFY USER command.

Notes:

- 1) If you specify the KEEPAUTH option on the DELETE USER command, authorizations that were granted to that user ID are not deleted.
 - 2) Aliases that others have for the moved files are lost, and aliases that the moved user has in the old file pool are lost. If the users still need to share files, they have to access each others' directories. Aliases cannot refer to base files in other file pools.
6. Log on to the file pool server machine. Make sure it uses the new CMS code, which is typically:
 - CMS code: In the CMS segment or on the 190 minidisk, and
 - SFS code: On the 193 minidisk or in the CMSFILES segment.
 7. IPL the new CMS.
 8. Check the USERS startup parameter in the DMSPARMS file for your server and the MAXCONN value in the server's directory entry against the suggested values found in the *z/VM: CMS File Pool Planning, Administration, and Operation*. This can help you avoid potential virtual storage problems.
 9. If BACKUP is specified in the DMSPARMS file, issue FILESERV BACKUP to back up control data. You must do this before issuing FILESERV START or you will get message DMS3440E, and FILESERV START will not continue.
`fileserv backup`
 10. Start the SFS file pool servers.
If FILESERV START is not included in the PROFILE EXEC of the file pool server virtual machine, enter it from the operator's console:
`fileserv start`
 11. Immediately back up your server data. Use FILEPOOL BACKUP for each storage group to back up all the data on the old release.

Note: Control data created on your old release cannot be used on the new release. Storage group (user data) backup files created on your old release can be used on the new release.
 12. If you encounter problems and need to back out to your old system, see "Converting an SFS File Pool Server Back to Your Old Release" on page 201.

Using the 'Cut and Go' Strategy

The 'cut and go' strategy is to move immediately off the old system and right on to the new one. This approach is recommended only if your system is a guest system or is small or very straightforward.

Procedure

1. Use FILEPOOL BACKUP for each storage group to back up all the data on the old release.

For assistance, refer to the section on backing up the user data in the *z/VM: CMS File Pool Planning, Administration, and Operation* book. This backup can be used on your new server. It can also be used if you need to back out to your old release.

Migrating File Pool Servers

Note: Control data created on your old release cannot be used on the new release. Storage group (user data) backup files created on your old release can be used on the new release. Neither control data nor storage group backup files created on your new system are supported on the old system.

2. Review and make note of the start-up parameters, which are in the DMSPARMS file, for each server on your old system.
3. Shut down your old-system SFS file pool servers.
Enter the STOP operator command. Do not use STOP IMMEDIATE. For example, from the server machine console, enter:

```
stop
```


Or, from a secondary user console, such as MAINT, enter:

```
#cp send vmserv3 stop  
#cp send vmserv4 stop
```
4. Install the new level of z/VM.
5. Make sure the server virtual machine has access to the disks where the new CMS code resides, which is typically:
 - CMS code: In the CMS segment or on the 190 minidisk, and
 - SFS code: On the 193 minidisk or the CMSFILES segment.
6. IPL the new CMS.
7. Check the USERS startup parameter in the DMSPARMS file for your server and the MAXCONN value in the server's directory entry against the suggested values found in the *z/VM: CMS File Pool Planning, Administration, and Operation* book. This can help you avoid potential virtual storage problems.
8. If BACKUP is specified in the DMSPARMS file, issue FILESERV BACKUP to back up control data. You must do this before issuing FILESERV START or you will get message DMS3440E, and FILESERV START will not continue.

```
fileserv backup
```
9. Start the SFS file pool servers.
If FILESERV START is not included in the PROFILE EXEC of the file pool server virtual machine, enter it from the operator's console:

```
fileserv start
```
10. If you encounter problems and need to back out to your old system, see "Converting an SFS File Pool Server Back to Your Old Release" on page 201.

Directory Entry Considerations and Changes

You may have to modify some of the CP directory entries for your SFS file pool servers. If you have not done so already, make the following changes:

- **USER directory control statement:**
 - Make sure the minimum and maximum virtual storage are at least 32 MB.
- **OPTION directory control statement:**
 - Add the NOMDCFS operand to allow the server to use minidisk caching at a rate that is not limited by the Fair Share Limit.

Note: This is applicable only to SFS file pool servers, not CRR recovery servers.

- Add the QUICKDSP operand to allow the server to be added to the dispatch list immediately when it has work to do, without waiting in the eligible list.

- Add the SVMSTAT operand to specify that the virtual machine is a service virtual machine. This causes the server's monitor statistics to be reported separately from end-user virtual machines.
- Check your MAXCONN value in the server's directory entry against the suggested values found in *z/VM: CMS File Pool Planning, Administration, and Operation*. This can help you avoid potential virtual storage problems.
- **SHARE directory control statement:**
 - Add SHARE REL 1500 to place the server in a more favorable position in the dispatch queue.
- **MACHINE directory control statement:**
 - If not already done, replace 370 with XA or XC.
SFS file pool servers should use XC to exploit data spaces. CRR recovery servers do not exploit data spaces and therefore should be set to XA.
- **XCONFIG directory control statement:**
 - If you designated XC in the MACHINE directory control statement, then add the following XCONFIG directory control statements:
XCONFIG ADDRSPACE MAXNUMBER 100 TOTSIZE 8192G SHARE
XCONFIG ACCESSLIST ALSIZE 1022

These statements have appropriate data space values for an SFS file pool server.
- **MINIOPT directory control statement:**
 - Add MINIOPT NOMDC to inhibit expanded storage caching for the following file pool minidisks:
 - For SFS file pool servers:
 - Control minidisk
 - SFS log minidisks
 - For CRR recovery servers:
 - All file pool minidisks

Converting an SFS File Pool Server Back to Your Old Release

z/VM does not support the conversion of SFS file pools and servers back to a previous release. However, IBM does recognize that special situations exist where such a conversion may be desired. The following procedure is intended to provide some guidance. Please read this entire section before beginning the conversion.

If you do the conversion incorrectly, some of the problems you may encounter include:

- Not being able to start the file pool server in your old system
- Loss of data

Procedure

To avoid file pool server problems, you must perform the following steps, where required, in the order indicated:

1. Shut down the new SFS file pool server.

Stop file pool server multiple user mode processing by entering the STOP operator command. **Do not use STOP IMMEDIATE.** For example, from the server machine console enter:

```
stop
```

Or, from a secondary user console, such as MAINT, enter:

Migrating File Pool Servers

```
#cp send vmservu stop
```

If your SFS file pool server is also a CRR recovery server, this step ensures that all CRR logging activity completes normally. There are no additional migration considerations if the SFS file pool server is also a CRR recovery server. (Your SFS file pool server is a CRR recovery server if the CRR start-up parameter exists in its *serverid* DMSPARMS file.)

Also, if possible, do not change the LU name value on the LUNAME start-up parameter. See *z/VM: CMS File Pool Planning, Administration, and Operation* for LUNAME start-up parameter considerations.

2. Convert your system back to the old release.
3. On the old system:
 - a. If you are using SFS control backup, which means you used the BACKUP start-up parameter, execute the FILESERV BACKUP command to create a new control backup file. For example:

```
fileserv backup
```

Note: Control backup files created by one VM release cannot be processed by a different (earlier or later) release.

- b. Start the old-system SFS file pool server for multiple user mode processing. If FILESERV START is not included in the PROFILE EXEC of the file pool server virtual machine, enter it:

```
fileserv start
```

Your SFS file pool conversion back to the old release is now complete.

Establishing Connectivity between Your New and Old Systems

Establishing connectivity between your new system and your old system allows you to move data files from the old system to the new system. If you have installed the new system on a separate processor or in another logical partition on the same processor as the old system, you can use real channels to establish connectivity between the two systems. If you have installed the new system as a guest of the old system, you can use virtual channels to establish connectivity between the two systems.

For example, you can set up a virtual channel between the RSCS licensed program installed on the old system and RSCS installed on the new system. A virtual channel for using PVM, VTAM®, TSAF, or AVS could be set up in a similar manner.

To set up RSCS, you make a virtual channel and add the proper definitions in the configuration and control files. RSCS relies on GCS for supervising services. The RSCS virtual machine must be defined as part of the GCS group so that it can share a common storage area for information exchange, multitasking services, and general I/O services.

Figure 4 on page 203 shows the relationship between the old (first-level) and new (second-level) RSCS machines.

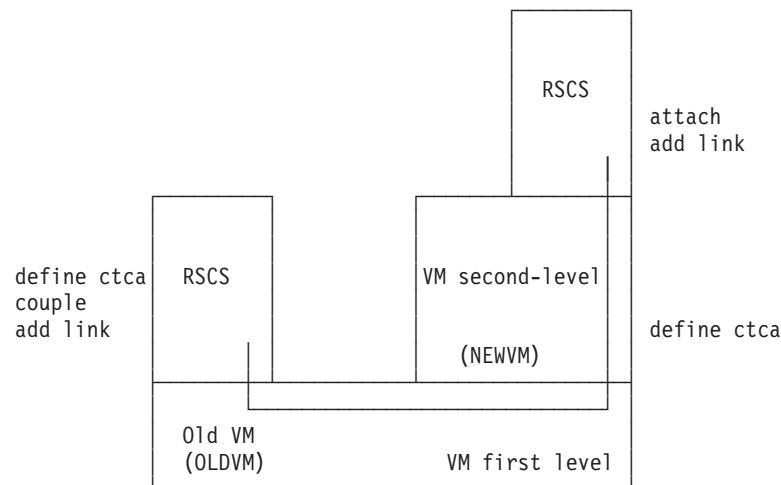


Figure 4. Connectivity between First- and Second-Level RSCS Machines

Procedures

On the First-level System

1. Define a link between the first-level RSCS virtual machine and the user ID that will be running the second-level system.

In this example, the user ID that will be running the second-level system is NEWVM.

The virtual address of the channel that is used for the link is 312.

- a. From **both** the first-level RSCS virtual machine and the NEWVM user ID, define the channel using the CP DEFINE command or the SPECIAL user directory control statement.

For example, using the CP DEFINE command, you can enter:

```
define ctca 312
```

Or, in the user directory entries for NEWVM and the RSCS virtual machine, add the following statement:

```
SPECIAL CTCA 312
```

- b. Ensure that the channel you specified using DEFINE CTCA is defined in the second-level system's SYSTEM CONFIG file.

In our example, we are using 312 as the address of the channel that is used for the link.

2. From either the RSCS machine or the NEWVM user ID, couple the addressed links to enable communications over the virtual channel. For example, from the first-level RSCS virtual machine, you can enter:

```
couple 312 newvmesa 312
```

3. Bring up the second-level system, including the second-level RSCS machine.

On the Second-level System

1. From the second-level RSCS virtual machine, attach the channel address defined by NEWVM. For example, enter:

```
attach 312 rscs 312
```

How to Back Out of the Migration

You may have to back out of the migration because of either system problems or problems with application programs.

Note: Before using the new system, you may want to use the SPXTAPE DUMP command to save copies of your spool files on tape. If you have to back out, you can use the SPXTAPE LOAD command to load them again. However, keep in mind that the longer you run on the new system, the more out of date the old spool files will become.

Backing Out Because of System Problems

How you back out depends on whether you are using separate residence volumes for the old system and the new system or the same residence volume for both.

If you run into a problem with the new system that forces you to back out, and you have not yet exploited functions specific to the new system or migrated any CMS users, the backout will not affect your end users. However, if you have to back out after migrating some CMS users, you may affect those users. If users convert applications to use new functions of the new CMS, they may not be able to run these applications on the old CMS. Therefore, you should not migrate users to the new system until you are satisfied with its stability.

Using Separate Residence Volumes

Throughout the migration, you should maintain your old system residence volume and CP-owned packs. Then, if you need to back out, you can easily do so.

If you must back out from the new system and IPL an old system, do the following:

1. Use the SPXTAPE DUMP command to save any spool files from the new system that you want.
2. Shut down the new system.
3. Re-IML the processor to the appropriate mode, if needed.
4. IPL the old system.
5. Load the spool files from the new system with the SPXTAPE LOAD command.
6. Enable the terminals.

Using the Same Residence Volume

In preparation for a possible backout:

1. Before going to the new system, leave a copy of your old CP module on the PARM disk in case you need to back out.
2. When you go to the new system, use the same CP-owned volumes, warmstart area, and checkpoint area.

Then, if you have to back out, do the following:

1. Shut down the new system.
2. Re-IML the processor to the appropriate mode, if needed.
3. IPL the system residence volume and bring up the SAPL screen by specifying a console address for the Load Parameter.
4. Select the CP module that was used for the old system.
5. After the system is up, run the SALIPL utility and use the MODULE operand to specify the CP module that you used to IPL.

Backing Out Individual Users Because of Problems with Application Programs

When the system is stable, you can begin to migrate CMS users. To prepare for a possible backout, either dual-path the code or keep copies of the old (pre-migration) versions of your applications.

User Directory Concerns

If a user or group of users has problems running applications on z/VM V5.2 CMS, you will need to backout these users to the old release. To plan for this, keep a user directory entry in an old-level system for each z/VM V5.2 user until you are satisfied that the users are running smoothly. You can use either an old-level guest or a separate old-level system as the backout system. This will be extra work for you but will have the least impact on the end users if they run into problems.

If you are using two source user directories, you must remember to reflect changes made in one user directory to the other user directory.

Installing a Backlevel CMS

Note: If z/VM is installed on an IFL engine, you cannot run CMS Level 16 or earlier.

IBM provides limited support for multiple levels of CMS on z/VM V5.2. You can continue to use your production CMS with the CP component of z/VM V5.2, and then gradually migrate users and applications to the new CMS. Previous releases of the CMS component will be supported for a limited time following the general availability of z/VM V5.2.

There is no intent to retrofit new function onto old releases of CMS. Attempts to use new function on backlevel releases of CMS are unsupported and the results are undefined. New function is defined as any device support, new CMS, or new CP functions introduced in later releases of the operating system and not retrofitted to the old CMS through the APAR service stream.

IBM will help with problem determination in these mixed environments and will take APARs for problems in older releases of CMS. However, when IBM discontinues service of an old VM release, support for the corresponding CMS under this offering also ends.

Notes:

1. Throughout this discussion, backlevel CMS refers to an older level of CMS, still in service, running on the z/VM V5.2 CP.
2. The z/VM V5.2 CMS does not support back levels of CP.

Before You Install a Backlevel CMS

While you are still running on your old system, there is certain information you should record that will help when you install your backlevel CMS. Record this information in Table 55 on page 207.

- Record the MDISK statement that defines the 190 minidisk on your old system. This can be used as a reference when defining the minidisk to hold the backlevel CMS on z/VM V5.2.
- Record the number of cylinders needed for your old 190 disk. You can get this information from the MDISK statement that defines your old 190 disk, or you can enter:

Installing a Backlevel CMS

q virtual 190

- Determine the type of DASD your old CMS will reside on when you install it on your z/VM V5.2 system. While installing a backlevel CMS, you will have to copy the contents of your 190 minidisk from the old system to your z/VM V5.2 system.
 - If you use the same type of DASD to hold the backlevel CMS on your z/VM V5.2 system as you used on your old system, you can use DDR to copy the files over. This is the preferred method.
 - If the DASD type is not the same, you can use the VMFPLC2 command. This method is not as easy as using DDR because you have to rebuild the CMS nucleus.

Record the type of DASD you will use and how you will copy files over to z/VM V5.2.

- If you are using the VMFPLC2 command to copy files, you have to format the z/VM V5.2 minidisk that holds the backlevel CMS using the FORMAT command with the RECOMP option. The RECOMP option changes the number of cylinders on a disk that are available to you. By using the RECOMP option on the FORMAT command you can leave a number of cylinders on the minidisk available for the CMS nucleus. If you do not FORMAT the minidisk with RECOMP, you cannot build the CMS nucleus.

To figure out how many cylinders to recomp, from your old system enter:

query virtual 190

An example of what this command returns is:

DASD 0190 3380 SYGEMC R/O 135 CYL ON DASD

Now enter:

query disk s

An example of what this command returns is:

LABEL	VDEV	M	STAT	CYL	TYPE	BLKSIZE	FILES	BLKS USED-(%)	BLKS LEFT	BLK TOTAL
CMSOLD	190	S	R/O	120	3390	4096	843	17905-83	3695	21600

Ready;

The difference in the number of cylinders displayed by these two commands is the amount of space needed to hold the CMS nucleus. The number of cylinders shown in the QUERY DISK response is the number of cylinders needed to hold the contents for the 190 disk and is also the number of cylinders to recomp. In this example, 120 cylinders are required on a 3390 DASD. By recomping 120 cylinders, fifteen cylinders are available for the CMS nucleus.

If you are using the VMFPLC2 method because your DASD types are not the same, the number of cylinders you have to recomp may not be exactly the number calculated above. This is because the number of pages per cylinder varies from DASD type to DASD type. To make sure you are recomping a sufficient number of cylinders:

1. Figure out how many pages per cylinder there are for each DASD type you are using. You can find this information in the DASD storage capacity tables in the *z/VM: CP Planning and Administration* book. For example, a 3380-E has 150 pages per cylinder and a 3390-1 has 180 pages per cylinder.
2. Multiply the number of cylinders needed to hold the contents of your old 190 disk (120 in this example) by the pages per cylinder for each DASD.

For 3380 model E: $120 * 150 = 18000$ pages

For 3390-1: $120 * 180 = 21600$ pages

This shows you that you need 18000 pages of storage for the contents of the old 190 disk. If you recomp 120 cylinders of 3390-1 DASD, this gives you 21600 pages of storage. Therefore, 120 cylinders is a sufficient number of cylinders to recomp.

3. Multiply the number of cylinders needed to hold the CMS nucleus (fifteen in the previous example) by the pages per cylinder for each DASD. For example,

For 3380 model E: $15 * 150 = 2250$ pages

For 3390-1: $15 * 180 = 2700$ pages

If you reserve fifteen cylinders on a 3390-1 DASD, it is plenty of space to hold the CMS nucleus that you stored in fifteen cylinders on a 3380 model E.

If you calculated the number of cylinders to recomp on a 3390-1 DASD to be 120 cylinders, you would have to recomp 144 cylinders on a 3380-E DASD to store the same amount of data. This is because there are fewer pages per cylinders on a 3380-E.

Record the number of cylinders you need to recomp in Table 55.

Table 55. Information Needed Before Installing a Backlevel CMS

What	Example Information	Your Information
MDISK statement for old VM system 190 disk	MDISK 190 3380 125 135 CMSRES RR ALL	
Number of cylinders for old VM system 190 disk	135	
DASD type for old VM system CMS	3380	
DASD type for backlevel CMS on new system	3390	
Method you will use to copy files (DDR or VMFPLC2)	VMFPLC2	
If using VMFPLC2, number of cylinders to recomp	120	

Steps for Installing a Backlevel CMS

When you are done installing the old CMS, the environment will look like this:

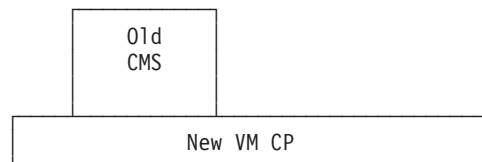


Figure 5. Backlevel CMS Running on a z/VM V5.2 CP

The steps for installing the old CMS on the z/VM V5.2 CP are as follows:

1. Log on to your z/VM V5.2 MAINT user ID.
2. Create a minidisk where the backlevel CMS will reside. You can use the MDISK directory control statement from your old system as a reference. You recorded this in Table 55.

The MDISK directory control statement in your z/VM V5.2 user directory for the backlevel CMS may look like this:

Installing a Backlevel CMS

```
MDISK 590 3380 125 135 520RES MR ALL WRITE MULTIPLE
```

- The 590 minidisk eventually becomes the 190 disk for the backlevel CMS. The 590 minidisk can reside on any DASD volume.
- In this example, 135 cylinders are reserved for the 590 disk starting at cylinder 125. You recorded the number of cylinders needed by your old 190 disk in Table 55 on page 207.
 - If you are using the DDR method later in the procedure, you must make your backlevel CMS minidisk on z/VM V5.2 exactly the same size as your old CMS 190 minidisk.
 - If you are using the VMFPLC2 method, the backlevel CMS minidisk can be the same size or bigger than your old CMS 190 minidisk.
- Once you know how many cylinders you need for the 590 disk, you have to figure out where to put the minidisk in your z/VM V5.2 configuration. Use the DISKMAP command to find out where to put the backlevel CMS minidisk. In the previous MDISK statement, the starting cylinder is 125. This was obtained by entering:

```
diskmap user direct
```

For more information on DISKMAP, see the *z/VM: CP Commands and Utilities Reference*.

The output file from this command is USER DISKMAP. This file shows you the space you have available. If you cannot find enough contiguous space, you may have to shift other minidisk locations and data around to make room for the backlevel CMS.

Note: If you move a minidisk location, make sure you also move the data on that minidisk. If you decide to shift locations of minidisks used for the Shared File System, there may be additional considerations. See the *z/VM: CMS File Pool Planning, Administration, and Operation* book for details on replacing the SFS and CRR file pool minidisks.

3. Put the directory with the new statement online by issuing:

```
directxa user direct
```

4. Make sure your MAINT user ID is running an XA virtual machine. To check the virtual machine mode, you can use the QUERY SET command. You can use the SET MACHINE XA command or the MACHINE directory control statement to set MAINT's virtual machine to XA.

5. Link the minidisk where the backlevel CMS will reside by entering:

```
link maint 590 590 MR
```

6. Format the 590 disk and access it using an unused file mode by entering:

```
format 590 k
DMSFOR603R Format will erase all files on disk k(590).
Do you wish to continue? Enter 1 (YES) or 0 (NO).
1
DMSFOR605R Enter disk label:
CMSOLD
```

Note to VMFPLC2 Users

If you plan to use the VMFPLC2 method to copy files to z/VM V5.2, skip to step 10 on page 209.

If you are using the DDR method, continue with step 7 on page 209.

7. Copy the contents of your old 190 minidisk to the backlevel CMS minidisk on z/VM V5.2 590. The following steps show how to DDR the old 190 contents to the z/VM V5.2 590 minidisk.

- a. Log on to your old-system MAINT user ID.
- b. Determine the location and size of the old 190 minidisk:

```
query mdisk 190 location
```

The response from this command would be something like this:

TargetID	Tdev	OwnerID	Odev	Dtype	Vol-ID	Rdev	StartLoc	Size
MAINT	0190	MAINT	0190	3390	410SYS	E202	1937	130

- c. Log on to your z/VM V5.2 MAINT user ID.
- d. Define the 190 location as a minidisk on the new system. For example:

```
define mdisk f190 1937 130 410sys
```

- e. Dump the old-system files:

```
ddr
sysprint cons
input f190 3390
output 590 3390
copy all
```

Now you have the old VM system 190 CMS files on your z/VM V5.2 590 minidisk.

8. Define the 190 minidisk that contains z/VM V5.2 CMS with another address; for example:

```
define 190 as 90
```

9. Define the 590 minidisk with the old-system CMS on it as your 190; for example:

```
def 590 190
```

Note to DDR Users

DDR users can now skip to step 17 on page 211.

If you are using the VMFPLC2 method, continue with step 10.

10. While you are still on your z/VM V5.2 MAINT user ID, use the FORMAT command with the RECOMP option to change the available cylinders on 590 for disk-resident files. In the previous example, 120 cylinders needed to be recomped. (See Table 55 on page 207.) Remember, this leaves fifteen cylinders for the backlevel CMS nucleus. Use the following FORMAT command:

```
format 590 k 120 (recomp
```

The response from this command would be:

LABEL	VDEV	M	STAT	CYL	TYPE	BLKSIZE	FILES	BLKS USED-(%)	BLKS LEFT	BLK TOTAL
CMSOLD	590	K	R/W	120	3390	4096	843	17905-83	3695	21600

Ready;

11. Copy the contents of the old-system CMS on your 190 minidisk to the backlevel CMS minidisk on your z/VM V5.2 590. The following steps show how to move the old-system 190 contents to the z/VM V5.2 590 minidisk using VMFPLC2.

- a. Log on to your old-system MAINT user ID.
- b. Create a copy of the CMS nucleus and put it in MAINT's reader by entering:

Installing a Backlevel CMS

```
spool punch *
spool printer *
vmfload cmsload dmsvm
```

These commands put the load deck in MAINT's reader.

- c. Receive the load deck as a CMS file on your 191 disk. Make sure you record the file name and file type. The example described here uses the file name CMSNUC FILE A.

- d. Attach a tape to the MAINT user ID on your old system:

```
attach rdev to maint as 181
```

- e. Access the old-system 190 disk as something other than S. If you access it as S, only files with a file mode of S2 are accessible.

```
access 190 v
```

- f. Dump the old-system 190 files and the new copy of the CMS nucleus on the A-disk to tape and write two tape marks:

```
vmfplc2 dump * * v
vmfplc2 wtm
vmfplc2 dump cmsnuc file a
vmfplc2 wtm 2
detach 181
```

- g. Log on to your z/VM V5.2 MAINT user ID.

- h. Attach the tape to the MAINT user ID on your z/VM V5.2 system:

```
attach rdev to maint as 181
```

- i. Access the z/VM V5.2 590 disk and load the old-system 190 files off the tape and onto the 590 minidisk:

```
access 590 v
vmfplc2 load * * v
```

Now you have the old-system CMS files on your 590 minidisk.

- j. Load the CMSNUC FILE on to your 191 A disk:

```
vmfplc2 load cmsnuc file a
```

- k. Detach the tape:

```
detach 181
```

12. Build your backlevel CMS nucleus on your z/VM V5.2 system.

- a. Enter the following commands:

```
spool punch *
spool printer *
spool reader hold
```

- b. Punch the file containing the CMS load deck, CMSNUC FILE, to the MAINT user ID. Make sure you use the NOHEADER option so a header is not included in the file.

```
punch cmsnuc file a (noh
```

An example of a response from the previous PUNCH command is:

```
RDR FILE 0002 SENT FROM MAINT    PUN WAS 0002 RECS 025K CPY  001 A NOHOLD NOKEEP
```

You need the file number of the CMS nucleus for the next step. The file number in this example is 0002.

- c. If the CMS nucleus is not the first file in your reader, order your reader so that the CMS nucleus is the first file processed; for example:

```
order rdr 0002
```

13. Define the 190 minidisk that contains z/VM V5.2 CMS with another address; for example:

- ```
define 190 as 90
```
14. Define the 590 minidisk with the old-system CMS on it as your 190. For example:  

```
def 590 190
```
  15. IPL the load deck from MAINT's reader:  

```
ipl 00c cl
```
  16. When you are sure you are done with the CMSNUC FILE, you may want to erase it; it can be rather big. Keep the tape with the old-system 190 files and the CMSNUC FILE for backup.

**Note to Both DDR and VMFPLC2 Users**

Use the following steps to put CMS into a named saved system.

17. Determine the DEFSYS command to use to define CMSOLD as a named saved system. You can probably just use your old system's DEFSYS command. You may want to add this DEFSYS command to an exec where you define all the other saved segments and saved systems. The sample DEFNSS EXEC shown in the following section defines various CMS named saved systems.
18. Issue the DEFSYS command or use the sample DEFNSS EXEC to define the CMSOLD named saved system; for example:  

```
defnss cmsold
```
19. Use the QUERY NSS MAP command to check that CMSOLD exists.
20. IPL the 190 minidisk with CMSOLD on it:  

```
ipl 190 parm savesys cmsold
```

## Defining Various Levels of CMS

Use the following sample DEFNSS EXEC to define different levels of CMS in a named saved system.

```

/*****
/*
/* An EXEC that will define the various levels of CMS
/* NSSs for our new system.
/*
/* You can pass in the following arguments:
/* o CMSNEW - for the new CMS
/* o CMSOLD - for the old CMS
/* o ALL - for both the old CMS and the new CMS
/*
*****/
Arg parms .
/* Create a list of all NSSs to be defined */
nssname.1 = 'CMSNEW'
nssname.2 = 'CMSOLD'
nssname.0 = 2
allnss = ''
Do i = 1 To nssname.0
 allnss = allnss nssname.i
End

skip_processing = 'NO'
Select
/* Define only the new CMS */
 When parms = nssname.1 Then Do
 start = 1
 stop = 1
 End

```

## Installing a Backlevel CMS

```
/* Define only the backlevel CMS */
 When parms = nssname.2 Then Do
 start = 2
 stop = 2
 End
/* If DEFNSS is called with 'ALL' or blank then */
/* define both the new CMS and the backlevel CMS */
 When parms = 'ALL' | parms = '' Then Do
 start = 1
 stop = 2
 End
/* Set up error message information */
 Otherwise Do
 skip_processing = 'YES'
 badnss = allnss
 errors = 'YES'
 End
End

If skip_processing = 'NO' Then Do
/* DEFSYS command to define the new CMS */
 nss.1 = 'CP DEFSYS CMSNEW 0-D EW 20-23 EW F00-13FF SR MINSIZE=256K',
 'MACHMODE XA,XC,ESA PARMREGS=0-15'
/* DEFSYS command to define the backlevel CMS */
 nss.2 = 'CP DEFSYS CMSOLD 0-D EW 20-23 EW F00-12FF SR MINSIZE=256K',
 'MACHMODE XA,XC'

/* Default for no errors detected */
 errors = 'NO'
 badnss = ''

/* Define the NSSs */
 Do i = start To stop
 Address COMMAND nss.i
 If rc <> 0 Then Do
 errors = 'YES'
 badnss = badnss nssname.i
 End
 End
End

/* If any errors were found, show error messages */
If errors = 'YES' Then Do
 Say 'The following NSSs were not defined because a definition has'
 Say 'not been set up for the NSS:' badnss
 Say
 Say 'A list of all valid NSS follows:'
 Say ' ' allnss
End
Exit
```

## Swapping Between the Backlevel CMS and z/VM V5.2 CMS

If you want to be able to switch between the z/VM V5.2 CMS and the backlevel CMS, consider using the following execs that link to the different system disks. You can make these execs available to your users. The users then need to do a SET MACH XA and IPL the corresponding CMS segment (IPL CMSNEW or IPL CMSOLD).

```
/* This exec swaps a backlevel CMS with a */
/* new CMS. */
```

```
Address Command
'EXECIO 0 CP (STRING DETACH 190'
'CP LINK MAINT 190 190 RR'
```

*Figure 6. SWAP2NEW EXEC*

The user should then do a SET MACH XA and IPL CMSNEW.

```
/* This exec swaps a new CMS with a */
/* backlevel CMS. */
```

```
Address Command
'EXECIO 0 CP (STRING DETACH 190'
'CP LINK MAINT 590 190 RR'
```

*Figure 7. SWAP2OLD EXEC*

The user should then issue:

```
set mach xa
ipl cmsold
```



---

## Appendix A. CMS Pipelines Message Cross-Reference [V2.3]

All CMS Pipelines messages have been renamed and renumbered from a DMS prefix to an FPL prefix. All of the FPL message numbers are consistent with those from CMS/TSO Pipelines.

This appendix contains two message cross-references: one from DMS prefix to FPL prefix, the other from FPL prefix to DMS prefix. Many messages also have different text, but those changes are not identified here. See the descriptions of individual FPL messages in *z/VM: CMS and REXX/VM Messages and Codes*.

**Note:** FPL messages not included in these cross-references have no DMS prefix equivalent.

---

### DMS to FPL Message Cross-Reference

The following is a cross-reference from the old DMS message numbers to the corresponding new FPL message numbers:

|                   |                   |                   |                   |
|-------------------|-------------------|-------------------|-------------------|
| DMS2571E-FPL337E  | DMS2608E-FPL654E  | DMS2646I-FPL717I  | DMS2685E-FPL040E  |
| DMS2572E-FPL338E  | DMS2609E-FPL655E  | DMS2647I-FPL718I  | DMS2686E-FPL041E  |
| DMS2573E-FPL339E  | DMS2610E-FPL656E  | DMS2648I-FPL719I  | DMS2687E-FPL042E  |
| DMS2574I-FPL340I  | DMS2611E-FPL657E  | DMS2649I-FPL720I  | DMS2688E-FPL043E  |
| DMS2575I-FPL341I  | DMS2612E-FPL660E  | DMS2650E-FPL000E  | DMS2689E-FPL044E  |
| DMS2576I-FPL342I  | DMS2613E-FPL662E  | DMS2651I-FPL001I  | DMS2690W-FPL045W  |
| DMS2577E-FPL343E  | DMS2614E-FPL664E  | DMS2652I-FPL002I  | DMS2691E-FPL046E  |
| DMS2578I-FPL344I  | DMS2615E-FPL1032E | DMS2653I-FPL003I  | DMS2692E-FPL047E  |
| DMS2579E-FPL345E  | DMS2616E-FPL1033E | DMS2654I-FPL004I  | DMS2693E-FPL048E  |
| DMS2580E-FPL346E  | DMS2618E-FPL1036E | DMS2655E-FPL010E  | DMS2694E-FPL049E  |
| DMS2581E-FPL347E  | DMS2619E-FPL686E  | DMS2656E-FPL011E  | DMS2695E-FPL050E  |
| DMS2582I-FPL348I  | DMS2620E-FPL1038E | DMS2657E-FPL012E  | DMS2696E-FPL051E  |
| DMS2583E-FPL1015E | DMS2621E-FPL1039E | DMS2658I-FPL721I  | DMS2697E-FPL052E  |
| DMS2584E-FPL573E  | DMS2622E-FPL1040E | DMS2659E-FPL014E  | DMS2698E-FPL053E  |
| DMS2585E-FPL575E  | DMS2623E-FPL1041E | DMS2660E-FPL015E  | DMS2699E-FPL054E  |
| DMS2586I-FPL369I  | DMS2624E-FPL1049E | DMS2661E-FPL016E  | DMS2700I-FPL1111I |
| DMS2587E-FPL576E  | DMS2625E-FPL680E  | DMS2662E-FPL017E  | DMS2701E-FPL056E  |
| DMS2588E-FPL611E  | DMS2626E-FPL663E  | DMS2663E-FPL018E  | DMS2702I-FPL725I  |
| DMS2589I-FPL612I  | DMS2627E-FPL694E  | DMS2664W-FPL019W  | DMS2703E-FPL058E  |
| DMS2590E-FPL613E  | DMS2628E-FPL1124E | DMS2665I-FPL020I  | DMS2704E-FPL059E  |
| DMS2591E-FPL614E  | DMS2629E-FPL700E  | DMS2666E-FPL021E  | DMS2705E-FPL060E  |
| DMS2592E-FPL615E  | DMS2630E-FPL701E  | DMS2668E-FPL023E  | DMS2706E-FPL061E  |
| DMS2593E-FPL616E  | DMS2631I-FPL702I  | DMS2669W-FPL024W  | DMS2707E-FPL062E  |
| DMS2594E-FPL617E  | DMS2632I-FPL703I  | DMS2670E-FPL1100E | DMS2708E-FPL063E  |
| DMS2595W-FPL620W  | DMS2633E-FPL704E  | DMS2672E-FPL027E  | DMS2709E-FPL064E  |
| DMS2596E-FPL627E  | DMS2634E-FPL705E  | DMS2673I-FPL028I  | DMS2710E-FPL065E  |
| DMS2597E-FPL635E  | DMS2635E-FPL706E  | DMS2674E-FPL029E  | DMS2711E-FPL066E  |
| DMS2598E-FPL1019E | DMS2636E-FPL707E  | DMS2675I-FPL030I  | DMS2712E-FPL067E  |
| DMS2599E-FPL371E  | DMS2637E-FPL708E  | DMS2676I-FPL031I  | DMS2713E-FPL068E  |
| DMS2600W-FPL564W  | DMS2638E-FPL709E  | DMS2677I-FPL1110I | DMS2714E-FPL069E  |
| DMS2601E-FPL685E  | DMS2639E-FPL710E  | DMS2678I-FPL033I  | DMS2715E-FPL070E  |
| DMS2602E-FPL639E  | DMS2640E-FPL711E  | DMS2679I-FPL034I  | DMS2716E-FPL071E  |
| DMS2603E-FPL642E  | DMS2641E-FPL712E  | DMS2680I-FPL035I  | DMS2717E-FPL072E  |
| DMS2604E-FPL307E  | DMS2642E-FPL713E  | DMS2681I-FPL036I  | DMS2718E-FPL073E  |
| DMS2605E-FPL651E  | DMS2643E-FPL714E  | DMS2682I-FPL037I  | DMS2719E-FPL074E  |
| DMS2606E-FPL652E  | DMS2644E-FPL715E  | DMS2683I-FPL038I  | DMS2720E-FPL075E  |
| DMS2607E-FPL653E  | DMS2645E-FPL716E  | DMS2684I-FPL039I  | DMS2721I-FPL076I  |

## Pipelines Messages

|                  |                  |                  |                  |
|------------------|------------------|------------------|------------------|
| DMS2722I-FPL077I | DMS2782E-FPL139E | DMS2841E-FPL219E | DMS2901E-FPL352E |
| DMS2723E-FPL078E | DMS2783E-FPL140E | DMS2842E-FPL220E | DMS2902E-FPL354E |
| DMS2724E-FPL079E | DMS2784E-FPL141E | DMS2843E-FPL222E | DMS2903I-FPL355I |
| DMS2725E-FPL080E | DMS2785E-FPL142E | DMS2844E-FPL223E | DMS2904I-FPL356I |
| DMS2726E-FPL081E | DMS2786E-FPL143E | DMS2845E-FPL224E | DMS2905E-FPL357E |
| DMS2727E-FPL082E | DMS2787E-FPL144E | DMS2846E-FPL225E | DMS2906E-FPL358E |
| DMS2728E-FPL083E | DMS2788I-FPL145I | DMS2847E-FPL226E | DMS2907E-FPL359E |
| DMS2729E-FPL084E | DMS2789E-FPL146E | DMS2848E-FPL227E | DMS2908E-FPL360E |
| DMS2730E-FPL085E | DMS2790E-FPL147E | DMS2849E-FPL229E | DMS2909I-FPL361I |
| DMS2731I-FPL086I | DMS2791E-FPL148E | DMS2850E-FPL230E | DMS2910E-FPL362E |
| DMS2732E-FPL087E | DMS2792E-FPL150E | DMS2851E-FPL231E | DMS2911E-FPL363E |
| DMS2733E-FPL088E | DMS2793E-FPL151E | DMS2852E-FPL232E | DMS2912E-FPL364E |
| DMS2734E-FPL089E | DMS2794E-FPL152E | DMS2853E-FPL233E | DMS2913E-FPL365E |
| DMS2735E-FPL090E | DMS2795E-FPL154E | DMS2854E-FPL234E | DMS2914E-FPL366E |
| DMS2736E-FPL091E | DMS2795E-FPL732E | DMS2855E-FPL235E | DMS2915E-FPL741E |
| DMS2737E-FPL092E | DMS2796E-FPL155E | DMS2856E-FPL236E | DMS2916E-FPL368E |
| DMS2738E-FPL093E | DMS2797E-FPL156E | DMS2857E-FPL237E | DMS2917E-FPL742E |
| DMS2739E-FPL094E | DMS2798E-FPL157E | DMS2858E-FPL238E | DMS2918E-FPL370E |
| DMS2740E-FPL095E | DMS2799E-FPL159E | DMS2859E-FPL241E | DMS2919I-FPL743I |
| DMS2741E-FPL096E | DMS2800E-FPL161E | DMS2860W-FPL245W | DMS2920I-FPL744I |
| DMS2742E-FPL097E | DMS2801E-FPL162E | DMS2861E-FPL253E | DMS2921E-FPL373E |
| DMS2743E-FPL098E | DMS2802E-FPL163E | DMS2862I-FPL256I | DMS2922E-FPL380E |
| DMS2744E-FPL099E | DMS2803E-FPL164E | DMS2863E-FPL257E | DMS2925E-FPL391E |
| DMS2745E-FPL100E | DMS2804E-FPL165E | DMS2864E-FPL261E | DMS2926E-FPL392E |
| DMS2746E-FPL101E | DMS2805E-FPL166E | DMS2865E-FPL264E | DMS2927E-FPL393E |
| DMS2747E-FPL102E | DMS2806E-FPL733E | DMS2866E-FPL279E | DMS2928E-FPL745E |
| DMS2748E-FPL103E | DMS2807E-FPL169E | DMS2867E-FPL280E | DMS2929E-FPL400E |
| DMS2749E-FPL104E | DMS2808E-FPL170E | DMS2868W-FPL281W | DMS2930E-FPL401E |
| DMS2750E-FPL105E | DMS2809E-FPL172E | DMS2869E-FPL282E | DMS2931I-FPL402I |
| DMS2751E-FPL107E | DMS2810E-FPL173E | DMS2870W-FPL283W | DMS2932E-FPL746E |
| DMS2752E-FPL108E | DMS2811E-FPL174E | DMS2871E-FPL284E | DMS2933E-FPL747E |
| DMS2753E-FPL109E | DMS2812E-FPL734E | DMS2871E-FPL737E | DMS2934E-FPL405E |
| DMS2754E-FPL110E | DMS2813E-FPL735E | DMS2872E-FPL287E | DMS2934E-FPL748E |
| DMS2755E-FPL111E | DMS2814I-FPL177I | DMS2873E-FPL738E | DMS2935E-FPL406E |
| DMS2756E-FPL112E | DMS2815E-FPL178E | DMS2874E-FPL289E | DMS2936E-FPL407E |
| DMS2757E-FPL113E | DMS2816E-FPL179E | DMS2875E-FPL290E | DMS2937I-FPL412I |
| DMS2758E-FPL114E | DMS2817E-FPL180E | DMS2876E-FPL291E | DMS2938E-FPL409E |
| DMS2759E-FPL115E | DMS2818E-FPL181E | DMS2877E-FPL292E | DMS2939E-FPL410E |
| DMS2760E-FPL116E | DMS2819W-FPL182W | DMS2878I-FPL293I | DMS2940I-FPL411I |
| DMS2761E-FPL117E | DMS2820E-FPL183E | DMS2879E-FPL297E | DMS2941E-FPL420E |
| DMS2762E-FPL118E | DMS2821E-FPL184E | DMS2880I-FPL298I | DMS2942I-FPL413I |
| DMS2763E-FPL119E | DMS2822E-FPL185E | DMS2881E-FPL740E | DMS2943E-FPL749E |
| DMS2764E-FPL120E | DMS2823I-FPL186I | DMS2882E-FPL301E | DMS2944E-FPL750E |
| DMS2765I-FPL726I | DMS2824E-FPL187E | DMS2883E-FPL302E | DMS2946E-FPL752E |
| DMS2766E-FPL122E | DMS2825I-FPL189I | DMS2884E-FPL303E | DMS2947E-FPL753E |
| DMS2767I-FPL727I | DMS2826E-FPL190E | DMS2885E-FPL304E | DMS2948E-FPL780E |
| DMS2768E-FPL124E | DMS2827E-FPL191E | DMS2886E-FPL305E | DMS2949E-FPL509E |
| DMS2769E-FPL125E | DMS2828I-FPL192I | DMS2887E-FPL308E | DMS2950E-FPL510E |
| DMS2770E-FPL126E | DMS2829E-FPL193E | DMS2888E-FPL309E | DMS2951E-FPL511E |
| DMS2771E-FPL127E | DMS2830E-FPL194E | DMS2889E-FPL310E | DMS2952E-FPL512E |
| DMS2772E-FPL128E | DMS2831E-FPL195E | DMS2890E-FPL311E | DMS2953E-FPL513E |
| DMS2773E-FPL129E | DMS2832E-FPL196E | DMS2891E-FPL313E | DMS2954E-FPL514E |
| DMS2774E-FPL131E | DMS2833E-FPL197E | DMS2892E-FPL314E | DMS2955E-FPL515E |
| DMS2775E-FPL132E | DMS2834E-FPL198E | DMS2893E-FPL315E | DMS2956E-FPL516E |
| DMS2776E-FPL133E | DMS2835E-FPL209E | DMS2894E-FPL317E | DMS2957E-FPL517E |
| DMS2777E-FPL134E | DMS2836E-FPL211E | DMS2895E-FPL318E | DMS2958E-FPL518E |
| DMS2778I-FPL728I | DMS2837E-FPL212E | DMS2896E-FPL319E | DMS2959E-FPL530E |
| DMS2779I-FPL729I | DMS2838E-FPL214E | DMS2898E-FPL333E | DMS2960E-FPL531E |
| DMS2780E-FPL137E | DMS2839E-FPL215E | DMS2899E-FPL334E | DMS2961E-FPL532E |
| DMS2781E-FPL138E | DMS2840E-FPL736E | DMS2900E-FPL350E | DMS2962E-FPL533E |

|                  |                   |                   |                  |
|------------------|-------------------|-------------------|------------------|
| DMS2963E-FPL534E | DMS2971E-FPL542E  | DMS2980I-FPL552I  | DMS2989E-FPL561E |
| DMS2964E-FPL535E | DMS2972E-FPL543E  | DMS2981I-FPL1113I | DMS2990E-FPL562E |
| DMS2965E-FPL536E | DMS2973I-FPL544I  | DMS2982E-FPL554E  | DMS2991E-FPL306E |
| DMS2966I-FPL537I | DMS2974E-FPL545E  | DMS2983I-FPL555I  | DMS2992E-FPL650E |
| DMS2967I-FPL538I | DMS2975E-FPL546E  | DMS2984E-FPL556E  | DMS2993E-FPL569E |
| DMS2968E-FPL539E | DMS2976E-FPL547E  | DMS2986I-FPL1114I | DMS2994E-FPL571E |
| DMS2969E-FPL540E | DMS2977I-FPL548I  | DMS2987I-FPL1115I | DMS2998E-FPL335E |
| DMS2970E-FPL541E | DMS2979I-FPL1112I | DMS2988I-FPL560I  | DMS2999E-FPL336E |

## FPL to DMS Message Cross-Reference

The following is a cross-reference from the new FPL message numbers to the corresponding old DMS message numbers:

|                  |                  |                  |                  |
|------------------|------------------|------------------|------------------|
| FPL000E-DMS2650E | FPL052E-DMS2697E | FPL096E-DMS2741E | FPL144E-DMS2787E |
| FPL001I-DMS2651I | FPL053E-DMS2698E | FPL097E-DMS2742E | FPL145I-DMS2788I |
| FPL002I-DMS2652I | FPL054E-DMS2699E | FPL098E-DMS2743E | FPL146E-DMS2789E |
| FPL003I-DMS2653I | FPL056E-DMS2701E | FPL099E-DMS2744E | FPL147E-DMS2790E |
| FPL004I-DMS2654I | FPL058E-DMS2703E | FPL100E-DMS2745E | FPL148E-DMS2791E |
| FPL010E-DMS2655E | FPL059E-DMS2704E | FPL101E-DMS2746E | FPL150E-DMS2792E |
| FPL011E-DMS2656E | FPL060E-DMS2705E | FPL102E-DMS2747E | FPL151E-DMS2793E |
| FPL012E-DMS2657E | FPL061E-DMS2706E | FPL103E-DMS2748E | FPL152E-DMS2794E |
| FPL014E-DMS2659E | FPL062E-DMS2707E | FPL104E-DMS2749E | FPL154E-DMS2795E |
| FPL015E-DMS2660E | FPL063E-DMS2708E | FPL105E-DMS2750E | FPL155E-DMS2796E |
| FPL016E-DMS2661E | FPL064E-DMS2709E | FPL107E-DMS2751E | FPL156E-DMS2797E |
| FPL017E-DMS2662E | FPL065E-DMS2710E | FPL108E-DMS2752E | FPL157E-DMS2798E |
| FPL018E-DMS2663E | FPL066E-DMS2711E | FPL109E-DMS2753E | FPL159E-DMS2799E |
| FPL019W-DMS2664W | FPL067E-DMS2712E | FPL110E-DMS2754E | FPL161E-DMS2800E |
| FPL020I-DMS2665I | FPL068E-DMS2713E | FPL111E-DMS2755E | FPL162E-DMS2801E |
| FPL021E-DMS2666E | FPL069E-DMS2714E | FPL112E-DMS2756E | FPL163E-DMS2802E |
| FPL023E-DMS2668E | FPL070E-DMS2715E | FPL113E-DMS2757E | FPL164E-DMS2803E |
| FPL024W-DMS2669W | FPL071E-DMS2716E | FPL114E-DMS2758E | FPL165E-DMS2804E |
| FPL027E-DMS2672E | FPL072E-DMS2717E | FPL115E-DMS2759E | FPL166E-DMS2805E |
| FPL028I-DMS2673I | FPL073E-DMS2718E | FPL116E-DMS2760E | FPL169E-DMS2807E |
| FPL029E-DMS2674E | FPL074E-DMS2719E | FPL117E-DMS2761E | FPL170E-DMS2808E |
| FPL030I-DMS2675I | FPL075E-DMS2720E | FPL118E-DMS2762E | FPL172E-DMS2809E |
| FPL031I-DMS2676I | FPL076I-DMS2721I | FPL119E-DMS2763E | FPL173E-DMS2810E |
| FPL033I-DMS2678I | FPL077I-DMS2722I | FPL120E-DMS2764E | FPL174E-DMS2811E |
| FPL034I-DMS2679I | FPL078E-DMS2723E | FPL122E-DMS2766E | FPL177I-DMS2814I |
| FPL035I-DMS2680I | FPL079E-DMS2724E | FPL124E-DMS2768E | FPL178E-DMS2815E |
| FPL036I-DMS2681I | FPL080E-DMS2725E | FPL125E-DMS2769E | FPL179E-DMS2816E |
| FPL037I-DMS2682I | FPL081E-DMS2726E | FPL126E-DMS2770E | FPL180E-DMS2817E |
| FPL038I-DMS2683I | FPL082E-DMS2727E | FPL127E-DMS2771E | FPL181E-DMS2818E |
| FPL039I-DMS2684I | FPL083E-DMS2728E | FPL128E-DMS2772E | FPL182W-DMS2819W |
| FPL040E-DMS2685E | FPL084E-DMS2729E | FPL129E-DMS2773E | FPL183E-DMS2820E |
| FPL041E-DMS2686E | FPL085E-DMS2730E | FPL131E-DMS2774E | FPL184E-DMS2821E |
| FPL042E-DMS2687E | FPL086I-DMS2731I | FPL132E-DMS2775E | FPL185E-DMS2822E |
| FPL043E-DMS2688E | FPL087E-DMS2732E | FPL133E-DMS2776E | FPL186I-DMS2823I |
| FPL044E-DMS2689E | FPL088E-DMS2733E | FPL134E-DMS2777E | FPL187E-DMS2824E |
| FPL045W-DMS2690W | FPL089E-DMS2734E | FPL137E-DMS2780E | FPL189I-DMS2825I |
| FPL046E-DMS2691E | FPL090E-DMS2735E | FPL138E-DMS2781E | FPL190E-DMS2826E |
| FPL047E-DMS2692E | FPL091E-DMS2736E | FPL139E-DMS2782E | FPL191E-DMS2827E |
| FPL048E-DMS2693E | FPL092E-DMS2737E | FPL140E-DMS2783E | FPL192I-DMS2828I |
| FPL049E-DMS2694E | FPL093E-DMS2738E | FPL141E-DMS2784E | FPL193E-DMS2829E |
| FPL050E-DMS2695E | FPL094E-DMS2739E | FPL142E-DMS2785E | FPL194E-DMS2830E |
| FPL051E-DMS2696E | FPL095E-DMS2740E | FPL143E-DMS2786E | FPL195E-DMS2831E |

## Pipelines Messages

|                  |                  |                  |                   |
|------------------|------------------|------------------|-------------------|
| FPL196E-DMS2832E | FPL315E-DMS2893E | FPL513E-DMS2953E | FPL663E-DMS2626E  |
| FPL197E-DMS2833E | FPL317E-DMS2894E | FPL514E-DMS2954E | FPL664E-DMS2614E  |
| FPL198E-DMS2834E | FPL318E-DMS2895E | FPL515E-DMS2955E | FPL680E-DMS2625E  |
| FPL209E-DMS2835E | FPL319E-DMS2896E | FPL516E-DMS2956E | FPL685E-DMS2601E  |
| FPL211E-DMS2836E | FPL333E-DMS2898E | FPL517E-DMS2957E | FPL686E-DMS2619E  |
| FPL212E-DMS2837E | FPL334E-DMS2899E | FPL518E-DMS2958E | FPL694E-DMS2627E  |
| FPL214E-DMS2838E | FPL335E-DMS2998E | FPL530E-DMS2959E | FPL700E-DMS2629E  |
| FPL215E-DMS2839E | FPL336E-DMS2999E | FPL531E-DMS2960E | FPL701E-DMS2630E  |
| FPL219E-DMS2841E | FPL337E-DMS2571E | FPL532E-DMS2961E | FPL702I-DMS2631I  |
| FPL220E-DMS2842E | FPL338E-DMS2572E | FPL533E-DMS2962E | FPL703I-DMS2632I  |
| FPL222E-DMS2843E | FPL339E-DMS2573E | FPL534E-DMS2963E | FPL704E-DMS2633E  |
| FPL223E-DMS2844E | FPL340I-DMS2574I | FPL535E-DMS2964E | FPL705E-DMS2634E  |
| FPL224E-DMS2845E | FPL341I-DMS2575I | FPL536E-DMS2965E | FPL706E-DMS2635E  |
| FPL225E-DMS2846E | FPL342I-DMS2576I | FPL537I-DMS2966I | FPL707E-DMS2636E  |
| FPL226E-DMS2847E | FPL343E-DMS2577E | FPL538I-DMS2967I | FPL708E-DMS2637E  |
| FPL227E-DMS2848E | FPL344I-DMS2578I | FPL539E-DMS2968E | FPL709E-DMS2638E  |
| FPL229E-DMS2849E | FPL345E-DMS2579E | FPL540E-DMS2969E | FPL710E-DMS2639E  |
| FPL230E-DMS2850E | FPL346E-DMS2580E | FPL541E-DMS2970E | FPL711E-DMS2640E  |
| FPL231E-DMS2851E | FPL347E-DMS2581E | FPL542E-DMS2971E | FPL712E-DMS2641E  |
| FPL232E-DMS2852E | FPL348I-DMS2582I | FPL543E-DMS2972E | FPL713E-DMS2642E  |
| FPL233E-DMS2853E | FPL350E-DMS2900E | FPL544I-DMS2973I | FPL714E-DMS2643E  |
| FPL234E-DMS2854E | FPL352E-DMS2901E | FPL545E-DMS2974E | FPL715E-DMS2644E  |
| FPL235E-DMS2855E | FPL354E-DMS2902E | FPL546E-DMS2975E | FPL716E-DMS2645E  |
| FPL236E-DMS2856E | FPL355I-DMS2903I | FPL547E-DMS2976E | FPL717I-DMS2646I  |
| FPL237E-DMS2857E | FPL356I-DMS2904I | FPL548I-DMS2977I | FPL718I-DMS2647I  |
| FPL238E-DMS2858E | FPL357E-DMS2905E | FPL552I-DMS2980I | FPL719I-DMS2648I  |
| FPL241E-DMS2859E | FPL358E-DMS2906E | FPL554E-DMS2982E | FPL720I-DMS2649I  |
| FPL245W-DMS2860W | FPL359E-DMS2907E | FPL555I-DMS2983I | FPL721I-DMS2658I  |
| FPL253E-DMS2861E | FPL360E-DMS2908E | FPL556E-DMS2984E | FPL725I-DMS2702I  |
| FPL256I-DMS2862I | FPL361I-DMS2909I | FPL560I-DMS2988I | FPL726I-DMS2765I  |
| FPL257E-DMS2863E | FPL362E-DMS2910E | FPL561E-DMS2989E | FPL727I-DMS2767I  |
| FPL261E-DMS2864E | FPL363E-DMS2911E | FPL562E-DMS2990E | FPL728I-DMS2778I  |
| FPL264E-DMS2865E | FPL364E-DMS2912E | FPL564W-DMS2600W | FPL729I-DMS2779I  |
| FPL279E-DMS2866E | FPL365E-DMS2913E | FPL569E-DMS2993E | FPL732E-DMS2795E  |
| FPL280E-DMS2867E | FPL366E-DMS2914E | FPL571E-DMS2994E | FPL733E-DMS2806E  |
| FPL281W-DMS2868W | FPL368E-DMS2916E | FPL573E-DMS2584E | FPL734E-DMS2812E  |
| FPL282E-DMS2869E | FPL369I-DMS2586I | FPL575E-DMS2585E | FPL735E-DMS2813E  |
| FPL283W-DMS2870W | FPL370E-DMS2918E | FPL576E-DMS2587E | FPL736E-DMS2840E  |
| FPL284E-DMS2871E | FPL371E-DMS2599E | FPL611E-DMS2588E | FPL737E-DMS2871E  |
| FPL287E-DMS2872E | FPL373E-DMS2921E | FPL612I-DMS2589I | FPL738E-DMS2873E  |
| FPL289E-DMS2874E | FPL380E-DMS2922E | FPL613E-DMS2590E | FPL740E-DMS2881E  |
| FPL290E-DMS2875E | FPL391E-DMS2925E | FPL614E-DMS2591E | FPL741E-DMS2915E  |
| FPL291E-DMS2876E | FPL392E-DMS2926E | FPL615E-DMS2592E | FPL742E-DMS2917E  |
| FPL292E-DMS2877E | FPL393E-DMS2927E | FPL616E-DMS2593E | FPL743I-DMS2919I  |
| FPL293I-DMS2878I | FPL400E-DMS2929E | FPL617E-DMS2594E | FPL744I-DMS2920I  |
| FPL297E-DMS2879E | FPL401E-DMS2930E | FPL620W-DMS2595W | FPL745E-DMS2928E  |
| FPL298I-DMS2880I | FPL402I-DMS2931I | FPL627E-DMS2596E | FPL746E-DMS2932E  |
| FPL301E-DMS2882E | FPL405E-DMS2934E | FPL635E-DMS2597E | FPL747E-DMS2933E  |
| FPL302E-DMS2883E | FPL406E-DMS2935E | FPL639E-DMS2602E | FPL748E-DMS2934E  |
| FPL303E-DMS2884E | FPL407E-DMS2936E | FPL642E-DMS2603E | FPL749E-DMS2943E  |
| FPL304E-DMS2885E | FPL409E-DMS2938E | FPL650E-DMS2992E | FPL750E-DMS2944E  |
| FPL305E-DMS2886E | FPL410E-DMS2939E | FPL651E-DMS2605E | FPL752E-DMS2946E  |
| FPL306E-DMS2991E | FPL411I-DMS2940I | FPL652E-DMS2606E | FPL753E-DMS2947E  |
| FPL307E-DMS2604E | FPL412I-DMS2937I | FPL653E-DMS2607E | FPL780E-DMS2948E  |
| FPL308E-DMS2887E | FPL413I-DMS2942I | FPL654E-DMS2608E | FPL1015E-DMS2583E |
| FPL309E-DMS2888E | FPL420E-DMS2941E | FPL655E-DMS2609E | FPL1019E-DMS2598E |
| FPL310E-DMS2889E | FPL509E-DMS2949E | FPL656E-DMS2610E | FPL1032E-DMS2615E |
| FPL311E-DMS2890E | FPL510E-DMS2950E | FPL657E-DMS2611E | FPL1033E-DMS2616E |
| FPL313E-DMS2891E | FPL511E-DMS2951E | FPL660E-DMS2612E | FPL1036E-DMS2618E |
| FPL314E-DMS2892E | FPL512E-DMS2952E | FPL662E-DMS2613E | FPL1038E-DMS2620E |

## Pipelines Messages

FPL1039E-DMS2621E  
FPL1040E-DMS2622E  
FPL1041E-DMS2623E

FPL1049E-DMS2624E  
FPL1100E-DMS2670E  
FPL1110I-DMS2677I

FPL1111I-DMS2700I  
FPL1112I-DMS2979I  
FPL1113I-DMS2981I

FPL1114I-DMS2986I  
FPL1115I-DMS2987I  
FPL1124E-DMS2628E

## Pipelines Messages

---

## Appendix B. Sample Utilities for Converting to Configuration Files


This appendix provides reference information for the following sample utility programs:

- HCPDCON
- HCPRDEV
- HCPTRIO
- HCPTSYS

**Note:** These sample utility programs were provided with z/VM V4.4 and earlier releases. **They are not included with z/VM V5.1 or later.** You must locate and use them on your current VM system. The sample utilities were shipped with a file type of SAMPEXEC; to use them, you must change the file type to EXEC.

Another utility that you might find useful when converting to configuration files is CPSYNTAX, which verifies the syntax of a SYSTEM CONFIG file. CPSYNTAX is described in the *z/VM: CP Commands and Utilities Reference*.

## HCPDCON

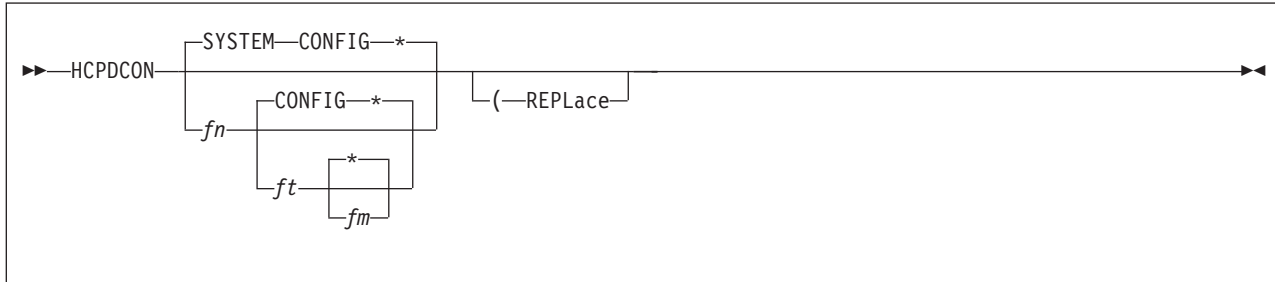

## Authorization

Privilege Class: G

## Purpose

Use HCPDCON to examine a running system and generate a file of configuration statements.

## Operands

*fn* is the name of the CMS minidisk file that CP should generate. The default is SYSTEM.

*ft* is the type of file to be generated. The default is CONFIG.

*fm* is the CMS minidisk on which the file is to reside. This disk must be accessed in write mode. An asterisk (\*), the default, causes HCPDCON to use the first CMS minidisk accessed in write mode.

### REPLace

replaces the existing file with the new one just generated, if a file with the same name already exists.

HCPDCON sets up a work file with a file type of '\$' plus the first seven characters of the file type of the input file. If such a file already exists, HCPDCON erases the file. After the work file is written to the CMS minidisk, HCPDCON erases the original configuration file and renames the work file.

For example, if you have a file called SYSTEM CONFIG A and you enter HCPDCON, HCPDCON generates a work file named SYSTEM \$CONFIG A. HCPDCON then erases SYSTEM CONFIG A and renames SYSTEM \$CONFIG A to SYSTEM CONFIG A.

## Examples


1. To examine the running system and generate a configuration file called SYSTEM3 CONFIG A, enter the following:  
HCPDCON SYSTEM3 CONFIG A
2. To examine the running system, generate a configuration file called SYSTEM CONFIG, and put this file on the first CMS minidisk accessed in write mode, enter the following:  
HCPDCON
3. To examine the running system, generate a configuration file called SYSTEM4 NEWSTMTS, and put this file on the first CMS minidisk accessed in write mode, enter the following:

HCPDCON SYSTEM4 NEWSTMTS \*

## Messages

| Code | Meaning                                                             |
|------|---------------------------------------------------------------------|
| 4    | No minidisk accessed in R/W mode                                    |
| 8    | User does not have necessary authority                              |
| 12   | Output file already exists and the REPLACE option was not specified |
| 16   | PIPE CMS RENAME error                                               |
| 20   | I/O error writing to output file                                    |
| 24   | Invalid option or too many options                                  |
| 9998 | PIPE command not found                                              |
| 9999 | Signal on NOVALUE routine exit                                      |

## HCP RDEV S

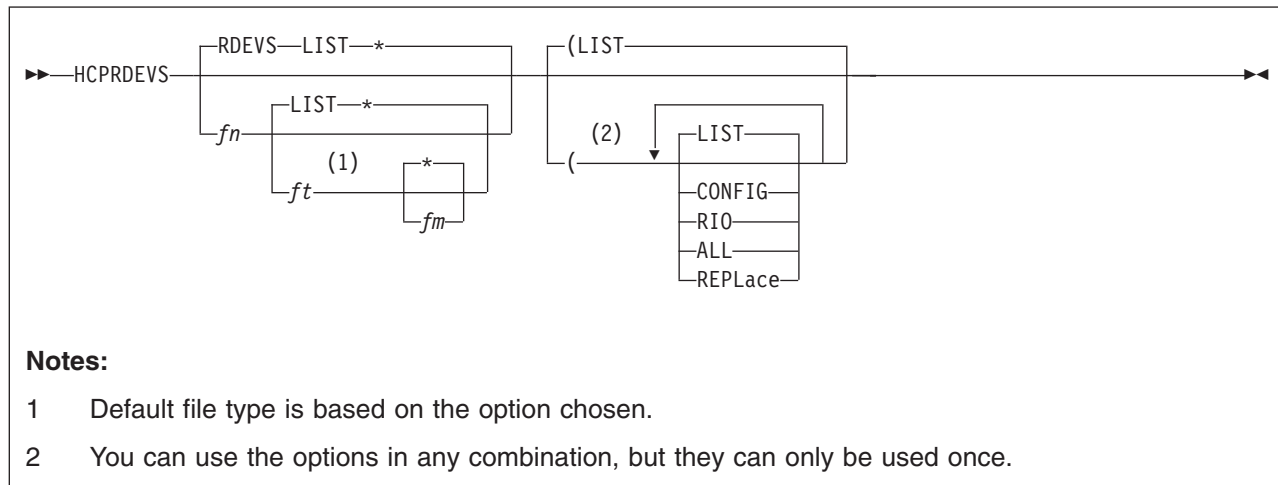

## Authorization

Privilege Class: G

## Purpose

Use HCP RDEV S to do any or all of the following:

- Generate a list of all the real devices known to a system.
- Generate a system configuration-like file of those real devices that do not answer a sense ID request or do not return enough information. These devices must be defined to the system.
- Generate a file in an HCP RIO format.

## Operands

*fn* is the name of the CMS minidisk file to be generated. The default is RDEV S.

*ft* is the type of file to be generated. The default depends upon the type of file requested. The option you choose (with the exception of ALL) denotes the default file type. For example, if the option is CONFIG, the default file type is CONFIG. The use of the option ALL results in the use of each default file type: LIST, RIO, and CONFIG.

*fm* is the CMS minidisk on which the file is to reside. This disk must be accessed in write mode. An asterisk (\*), the default, causes the exec to use the first CMS minidisk accessed in write mode.

### LIST

generates a list of real devices.

### CONFIG

generates a system configuration-like file that contains statements only for those real devices that cannot be sensed completely.

### RIO

generates a list of HCP RIO-like macroinstructions for all real devices on your system.

**ALL**

generates the information from the LIST, CONFIG, and RIO options. If you use ALL and a specific file type, the following files are generated:

- List of real devices with file type that you specified
- Information generated by the CONFIG option with file type of CONFIG
- Information generated by the RIO option with file type of RIO.

**REPLace**

replaces the existing file with the new one just generated, if a file with the same name already exists.

HCPRDEVS sets up a work file with a file type of '\$' plus the first seven characters of the file type of the input file. If such a file already exists, HCPRDEVS erases the file. After the work file is written to the CMS minidisk, HCPRDEVS erases the original configuration file and renames the work file.

For example, HCPRDEVS SYSTEM3 RIOLIST A (LIST REPL generates a work file named SYSTEM3 \$RIOLIST A. HCPRDEVS then erases SYSTEM3 RIOLIST A and renames SYSTEM3 \$RIOLIST A to SYSTEM3 RIOLIST A.

## Examples

1. To generate a file called MYRDEVS CONFIG, composed of configuration file statements for the real devices that do not return enough information to a sense ID request, and to place this file on your A-disk, enter the following:

```
HCPRDEVS MYRDEVS CONFIG A (CONFIG
```

2. To create files called RDEVS LIST, RDEVS CONFIG, and RDEVS RIO, and to put them on the first CMS minidisk accessed in write mode, enter the following:

```
HCPRDEVS (ALL
```

RDEVS LIST contains a list of all the real devices known to the running system. RDEVS CONFIG contains a list of configuration file statements only for those real devices that cannot be sensed completely. RDEVS RIO contains a list of HCPRIO-like macroinstructions for real devices.

3. To generate two files, RDEVS LIST and RDEVS RIO, and to put them on the first CMS minidisk that CP has accessed in write mode, enter the following:


```
HCPRDEVS RDEVS (LIST RIO
```

RDEVS LIST contains a list of all the real devices known to the running system. RDEVS RIO contains a list of HCPRIO-like macroinstructions for real devices.

## Messages

| Code | Meaning                                                             |
|------|---------------------------------------------------------------------|
| 4    | No minidisk accessed in R/W mode                                    |
| 8    | User does not have necessary authority                              |
| 12   | Output file already exists and the REPLACE option was not specified |
| 16   | I/O error in creating output file                                   |
| 9998 | PIPE command not found                                              |
| 9999 | Signal on NOVALUE routine exit                                      |

## HCPTRIO

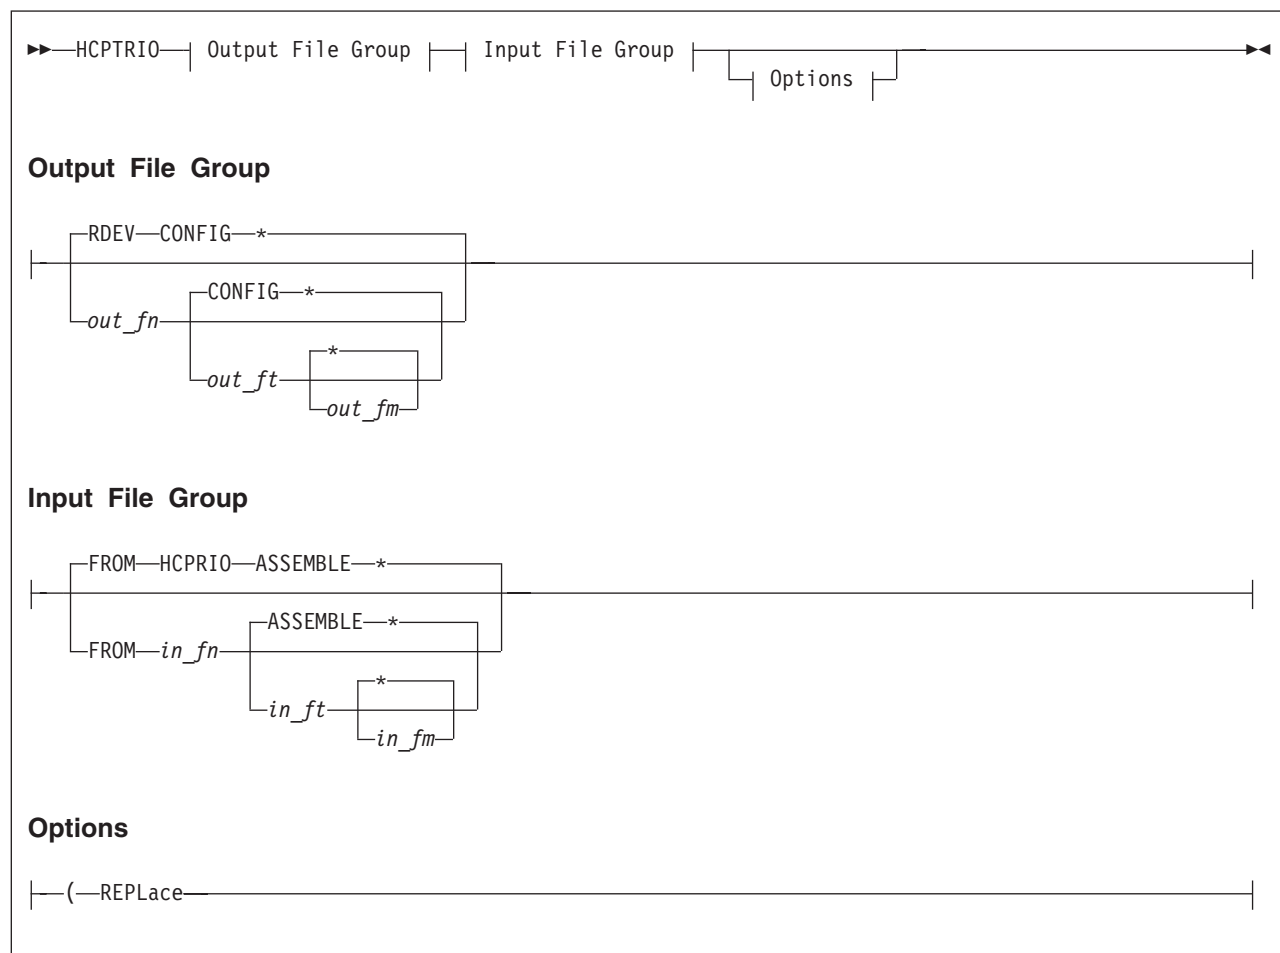

## Authorization

Privilege Class: G

## Purpose

Use HCPTRIO to generate a system configuration file (SYSTEM CONFIG) from an HCPRIO ASSEMBLE file. The generated file will contain statements for those real devices that do not answer sense ID requests or that do not return enough information.

## Operands

*out\_fn*

is the name of the CMS file to be generated. The default is RDEV.

*out\_ft*

is the type of the file to be generated. The default is CONFIG.

*out\_fm*

is the CMS file mode on which the file is to reside. The file mode must be accessed in write mode. An asterisk (\*), the default, causes the HCPTRIO to use the first file mode accessed R/W.

**FROM**

tells HCPTRIO that there is a specific source file it should use.

*in\_fn*

is the name of the CMS file that contains the input. The default is HCPRIO.

*in\_ft*

is the type of the CMS file that contains the input. The default is ASSEMBLE.

*in\_fm*

is the file mode on which the file resides. An asterisk (\*), the default, causes HCPTRIO to use the first file mode on which the file resides.

**REPLace**

indicates that if the output file already exists, it should be replaced.

## Usage Notes

1. HCPTRIO uses a work file having a file type of "\$" followed by the first seven characters of the file type of the input file. If such a file already exists, HCPTRIO erases it. After writing the work file, HCPTRIO erases the original configuration file and renames the work file.

Example:

```
hcprio rdev config a from hcprio assemble b (repl
```

In this case, HCPTRIO writes a work file named RDEV \$CONFIG A, erases the old RDEV CONFIG A, and renames RDEV \$CONFIG A to RDEV CONFIG A.

## Return Codes

- |           |                                                                     |
|-----------|---------------------------------------------------------------------|
| <b>0</b>  | Successful execution                                                |
| <b>4</b>  | Disk not accessed or not accessed R/W                               |
| <b>12</b> | Output file already exists and the REPLACE option was not specified |
| <b>16</b> | Input file to translate was not found                               |
| <b>20</b> | I/O error in creating output file or in reading input file          |
| <b>24</b> | Invalid option or too many options                                  |

## Examples

**Example 1**

```
hcprio cambvm3 config a from hcprio assemble d
```


In this example, HCPTRIO uses the file HCPRIO ASSEMBLE D to generate a configuration file named CAMBVM3 CONFIG A.

**Example 2**

```
hcprio
```

In this example, HCPTRIO reads the first file it finds in the CMS search order that is named HCPRIO ASSEMBLE. It creates a configuration file named RDEV CONFIG on the first file mode letter in the CMS search order that is accessed R/W.

## HCPTSYS

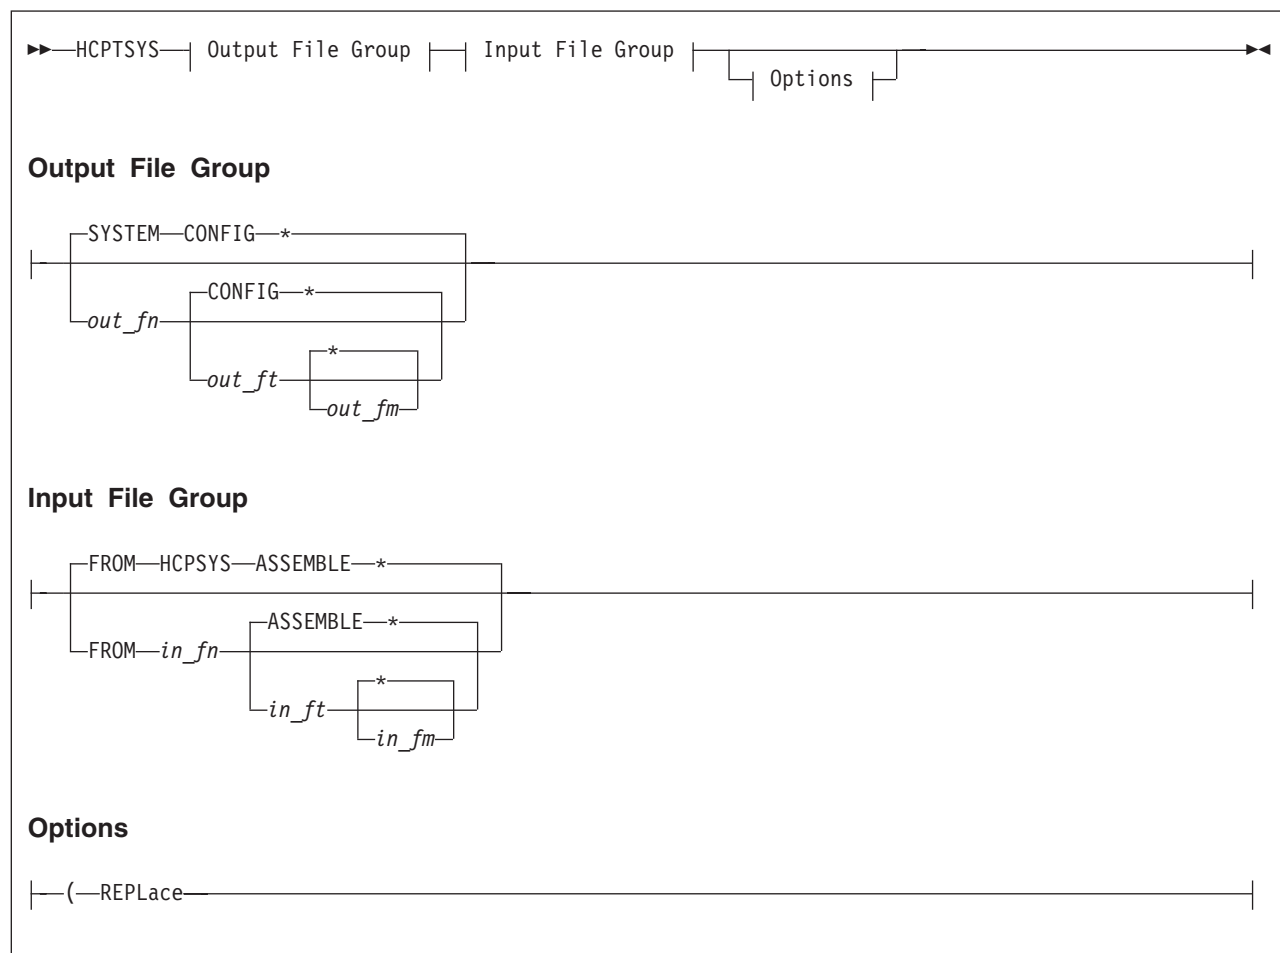

## Authorization

Privilege Class: G

## Purpose

Use HCPTSYS to generate a system configuration file (SYSTEM CONFIG) from an HCPSYS ASSEMBLE file.

## Operands

*out\_fn*

is the name of the CMS file to be generated. The default is SYSTEM.

*out\_ft*

is the type of the file to be generated. The default is CONFIG.

*out\_fm*

is the CMS file mode on which the file is to reside. The file mode must be accessed in write mode. An asterisk (\*), the default, causes the HCPTSYS to use the first file mode accessed R/W.

**FROM**

tells HCPTSYS that there is a specific source file it should use.

*in\_fn*

is the name of the CMS file that contains the input. The default is HCPSYS.

*in\_ft*

is the type of the CMS file that contains the input. The default is ASSEMBLE.

*in\_fm*

is the file mode on which the file resides. An asterisk (\*), the default, causes HCPTSYS to use the first file mode on which the file resides.

**REPLace**

indicates that if the output file already exists, it should be replaced.

## Usage Notes

1. HCPTSYS uses a work file having a file type of "\$" followed by the first seven characters of the file type of the input file. If such a file already exists, HCPTSYS erases it. After writing the work file, HCPTSYS erases the original configuration file and renames the work file.

Example:

```
hcptsys system config a from hcpsys assemble b (repl
```

In this case, HCPTRIO writes a work file named SYSTEM \$CONFIG A, erases the old SYSTEM CONFIG A, and renames SYSTEM \$CONFIG A to SYSTEM CONFIG A.

## Return Codes

- |           |                                                                     |
|-----------|---------------------------------------------------------------------|
| <b>0</b>  | Successful execution                                                |
| <b>4</b>  | Disk not accessed or not accessed R/W                               |
| <b>12</b> | Output file already exists and the REPLACE option was not specified |
| <b>16</b> | Input file to translate was not found                               |
| <b>20</b> | I/O error in creating output file or in reading input file          |
| <b>24</b> | Invalid option or too many options                                  |

## Examples

**Example 1**

```
hcptsys cambvm3 config a from hcpsys assemble d
```

In this example, HCPTRIO uses the file HCPSYS ASSEMBLE D to generate a configuration file named CAMBVM3 CONFIG A.

**Example 2**

```
hcptsys
```

In this example, HCPTSYS reads the first file it finds in the CMS search order that is named HCPSYS ASSEMBLE. It creates a configuration file named SYSTEM CONFIG on the first file mode letter in the CMS search order that is accessed R/W.



---

## Notices

This information was developed for products and services offered in the U.S.A. IBM may not offer the products, services, or features discussed in this document in all countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, New York 10504-1785  
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation  
Licensing  
2-31 Roppongi 3-chome, Minato-ku  
Tokyo 106-0032, Japan

**The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:**

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs

and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation  
Mail Station P300  
2455 South Road  
Poughkeepsie, New York 12601-5400  
U.S.A.  
Attention: Information Request

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurement may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information may contain examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

#### COPYRIGHT LICENSE:

This information may contain sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs.

---

## Trademarks

The following terms are trademarks of International Business Machines Corporation in the United States, or other countries, or both:

|                                           |                                    |
|-------------------------------------------|------------------------------------|
| BookManager                               | OS/2                               |
| C/VM                                      | OS/390                             |
| DB2                                       | Parallel Sysplex                   |
| DirMaint                                  | Performance Toolkit for VM         |
| DS6000                                    | PR/SM                              |
| DS8000                                    | Processor Resource/Systems Manager |
| ECKD                                      | RACF                               |
| Enterprise Storage Server                 | RAMAC                              |
| ESCON                                     | Resource Link                      |
| @server                                   | RMF                                |
| eServer                                   | S/390                              |
| FICON                                     | S/390 Parallel Enterprise Server   |
| FlashCopy                                 | SQL/DS                             |
| GDPS                                      | System z                           |
| Geographically Dispersed Parallel Sysplex | System z9                          |
| HiperSockets                              | Tivoli                             |
| HyperSwap                                 | TotalStorage                       |
| IBM                                       | VM/ESA                             |
| IBMLink                                   | VTAM                               |
| Language Environment                      | WebSphere                          |
| MQSeries                                  | z/Architecture                     |
| Multiprise                                | z/OS                               |
| MVS                                       | z/VM                               |
| NetRexx                                   | z9                                 |
| OpenExtensions                            | zSeries                            |

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States and other countries.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries.

Other company, product, or service names may be trademarks or service marks of others.



---

## Glossary

For a list of z/VM terms and their definitions, see the *z/VM: Glossary* book.

The glossary is also available through the online HELP Facility. For example, to display the definition of “cms”, enter:

```
help glossary cms
```

You will enter the glossary HELP file and the definition of “cms” will be displayed as the current line. While you are in the glossary HELP file, you can also search for other terms.

If you are unfamiliar with the HELP Facility, you can enter:

```
help
```

to display the main HELP menu, or enter:

```
help cms help
```

for information about the HELP command.

For more information about the HELP Facility, see the *z/VM: CMS User's Guide*.



---

## Bibliography

This bibliography lists the books in the z/VM product library. For abstracts of these books and information about current editions and available media, see *z/VM: General Information*.

---

### Where to Get z/VM Books

z/VM books are available from the following sources:

- IBM Publications Center at [www.ibm.com/shop/publications/order/](http://www.ibm.com/shop/publications/order/)
- z/VM Internet Library at [www.ibm.com/eserver/zseries/zvm/library/](http://www.ibm.com/eserver/zseries/zvm/library/)
- *IBM Online Library: z/VM Collection*, SK2T-2067
- *IBM Online Library: z/VM Collection on DVD*, SK5T-7054

---

### z/VM Base Library

The following books describe the facilities included in the z/VM base product.

#### Overview

*z/VM: General Information*, GC24-6095

*z/VM: Glossary*, GC24-6097

*z/VM: License Information*, GC24-6102

#### Installation, Migration, and Service

*z/VM: Guide for Automated Installation and Service*, GC24-6099

*z/VM: Migration Guide*, GC24-6103

*z/VM: Service Guide*, GC24-6117

*z/VM Summary for Automated Installation and Service (DVD Installation)*, GA76-0406

*z/VM Summary for Automated Installation and Service (Tape Installation)*, GA76-0407

*z/VM: VMSES/E Introduction and Reference*, GC24-6130

#### Planning and Administration

*z/VM: CMS File Pool Planning, Administration, and Operation*, SC24-6074

*z/VM: CMS Planning and Administration*, SC24-6078

*z/VM: Connectivity*, SC24-6080

*z/VM: CP Planning and Administration*, SC24-6083

*z/VM: Getting Started with Linux on System z9 and zSeries*, SC24-6096

*z/VM: Group Control System*, SC24-6098

*z/VM: I/O Configuration*, SC24-6100

*z/VM: Running Guest Operating Systems*, SC24-6115

*z/VM: Saved Segments Planning and Administration*, SC24-6116

*z/VM: TCP/IP Planning and Customization*, SC24-6125

*eServer zSeries 900: Planning for the Open Systems Adapter-2 Feature*, GA22-7477

*System z9 and eServer zSeries: Open Systems Adapter-Express Customer's Guide and Reference*, SA22-7935

*System z9 and eServer zSeries 890 and 990: Open Systems Adapter-Express Integrated Console Controller User's Guide*, SA22-7990

*z/OS and z/VM: Hardware Configuration Manager User's Guide*, SC33-7989

#### Customization and Tuning

*z/VM: CP Exit Customization*, SC24-6082

*z/VM: Performance*, SC24-6109

#### Operation

*z/VM: System Operation*, SC24-6121

*z/VM: Virtual Machine Operation*, SC24-6128

#### Application Programming

*z/VM: CMS Application Development Guide*, SC24-6069

*z/VM: CMS Application Development Guide for Assembler*, SC24-6070

*z/VM: CMS Application Multitasking*, SC24-6071

*z/VM: CMS Callable Services Reference*, SC24-6072

*z/VM: CMS Macros and Functions Reference*, SC24-6075

*z/VM: CP Programming Services*, SC24-6084

*z/VM: CPI Communications User's Guide*, SC24-6085

*z/VM: Enterprise Systems Architecture/Extended Configuration Principles of Operation*, SC24-6094

*z/VM: Language Environment User's Guide*, SC24-6101

*z/VM: OpenExtensions Advanced Application Programming Tools*, SC24-6104

*z/VM: OpenExtensions Callable Services Reference*, SC24-6105

*z/VM: OpenExtensions Commands Reference*, SC24-6106

*z/VM: OpenExtensions POSIX Conformance Document*, GC24-6107

*z/VM: OpenExtensions User's Guide*, SC24-6108

*z/VM: Program Management Binder for CMS*, SC24-6110

*z/VM: Reusable Server Kernel Programmer's Guide and Reference*, SC24-6112

*z/VM: REXX/VM Reference*, SC24-6113

*z/VM: REXX/VM User's Guide*, SC24-6114

*z/VM: Systems Management Application Programming*, SC24-6122

*z/VM: TCP/IP Programmer's Reference*, SC24-6126

*Common Programming Interface Communications Reference*, SC26-4399

*Common Programming Interface Resource Recovery Reference*, SC31-6821

*z/OS: Language Environment Concepts Guide*, SA22-7567

*z/OS: Language Environment Debugging Guide*, GA22-7560

*z/OS: Language Environment Programming Guide*, SA22-7561

*z/OS: Language Environment Programming Reference*, SA22-7562

*z/OS: Language Environment Run-Time Messages*, SA22-7566

*z/OS: Language Environment Writing ILC Applications*, SA22-7563

*z/OS MVS Program Management: Advanced Facilities*, SA22-7644

*z/OS MVS Program Management: User's Guide and Reference*, SA22-7643

## End Use

*z/VM: CMS Commands and Utilities Reference*, SC24-6073

*z/VM: CMS Pipelines Reference*, SC24-6076

*z/VM: CMS Pipelines User's Guide*, SC24-6077

*z/VM: CMS Primer*, SC24-6137

*z/VM: CMS User's Guide*, SC24-6079

*z/VM: CP Commands and Utilities Reference*, SC24-6081

*z/VM: Quick Reference*, SC24-6111

*z/VM: TCP/IP User's Guide*, SC24-6127

*z/VM: XEDIT Commands and Macros Reference*, SC24-6131

*z/VM: XEDIT User's Guide*, SC24-6132

*CMS/TSO Pipelines Author's Edition*, SL26-0018

## System Diagnosis

*z/VM: CMS and REXX/VM Messages and Codes*, GC24-6118

*z/VM: CP Messages and Codes*, GC24-6119

*z/VM: Diagnosis Guide*, GC24-6092

*z/VM: Dump Viewing Facility*, GC24-6093

*z/VM: Other Components Messages and Codes*, GC24-6120

*z/VM: TCP/IP Diagnosis Guide*, GC24-6123

*z/VM: TCP/IP Messages and Codes*, GC24-6124

*z/VM: VM Dump Tool*, GC24-6129

*z/OS and z/VM: Hardware Configuration Definition Messages*, SC33-7986

---

## Books for z/VM Optional Features

The following books describe the optional features of z/VM.

## Data Facility Storage Management Subsystem for VM

*z/VM: DFSMS/VM Customization*, SC24-6086

*z/VM: DFSMS/VM Diagnosis Guide*, GC24-6087

*z/VM: DFSMS/VM Messages and Codes*, GC24-6088

*z/VM: DFSMS/VM Planning Guide*, SC24-6089

*z/VM: DFSMS/VM Removable Media Services*, SC24-6090

*z/VM: DFSMS/VM Storage Administration*, SC24-6091

## Directory Maintenance Facility

*z/VM: Directory Maintenance Facility  
Commands Reference, SC24-6133*

*z/VM: Directory Maintenance Facility  
Messages, GC24-6134*

*z/VM: Directory Maintenance Facility Tailoring  
and Administration Guide, SC24-6135*

## Performance Toolkit for VM™

*z/VM: Performance Toolkit, SC24-6136*

## Resource Access Control Facility

*External Security Interface (RACROUTE)  
Macro Reference for MVS and VM,  
GC28-1366*

*Resource Access Control Facility: Auditor's  
Guide, SC28-1342*

*Resource Access Control Facility: Command  
Language Reference, SC28-0733*

*Resource Access Control Facility: Diagnosis  
Guide, GY28-1016*

*Resource Access Control Facility: General  
Information, GC28-0722*

*Resource Access Control Facility: General  
User's Guide, SC28-1341*

*Resource Access Control Facility: Macros and  
Interfaces, SC28-1345*

*Resource Access Control Facility: Messages  
and Codes, SC38-1014*

*Resource Access Control Facility: Migration  
and Planning, GC23-3054*

*Resource Access Control Facility: Security  
Administrator's Guide, SC28-1340*

*Resource Access Control Facility: System  
Programmer's Guide, SC28-1343*



---

# Index

## Special characters

\$PPF file changes (V4.4) 15  
\$PPF file names (V5.2) 18  
\$PPF override file name 12  
\*LOGREC system service 141  
\*RPI system service 141

## Numerics

30 LPARs, support for 28  
31-bit CP image removed 66  
32-bit CP image 56  
3270 PC File Transfer product 8  
3494 VTS 22  
3590 A60 FICON support 22  
3590 Model H 29  
3592 32  
370 functions removed 66  
370-mode virtual machines 58  
60 LPARs 35  
64-bit addressing support for DIAGNOSE codes (V4.3) 84  
64-bit CP 15  
64-bit CP image 56  
64-bit DIAGNOSE code X'250' support 87  
64-bit dump support 92  
64-bit exploitation (V5.2) 71  
64-Bit Page Fault Handshaking support 58  
64-bit support 56

## A

ACCESS command 146  
Access Verification System Service 141  
accounting improvements 60  
ACNT command 105  
Active Disk Table (ADT) 90  
ADDENTRY macro 161  
ADDENTRY subcommand 162  
administration, changes related to 50  
ADRSPACE ISOLATE macro 139  
ADRSPACE macro 139  
ADRSPACE PERMIT macro 139  
ADRSPACE QUERY macro 139  
allocation of real storage for segment tables 53  
ALSERV ADD macro 139  
ALSERV macro 139  
ALSERV REMOVE macro 139  
APPCVM macro functions 139  
application development and deployment, changes related to 76  
ASN-and-LX-Reuse Facility support 29  
ATTACH command 105  
AUDIT command 152  
AUDIT enhancement 52  
authorization for guest LANs and virtual switches, enhanced 66

AUTOLOG command 105  
automated SFS file pool server shutdown 61  
automated shutdown support 59  
AVS external interfaces 172

## B

backing out the new system 204  
backlevel CMS, installing 205  
BEGIN command 105  
BFS root no longer case sensitive 83  
BFSQUERY stage 154  
binder/loader support, CMS 83  
BLOCK macro, VM Dump Tool 141  
BookManager Library Feature deleted 6  
books deleted (V4.1) 94  
books deleted (V4.4) 96  
books deleted (V5.1) 97  
books deleted (V5.2) 98  
books retitled (V4.4) 96  
books retitled (V5.1) 97  
books retitled (V5.2) 98  
BPXYERNO macro 163  
BPXYOPNF macro 163  
BPXYVM5 macro 163  
broadcast support for HiperSockets 43  
BROWSE command 146

## C

C socket API 83  
C/C++ compiler support 84  
callable services, CMS, general 155  
CALLERS macro, VM Dump Tool 141  
Capacity Backup Upgrade (CBU) 31  
cascaded FICON directors 26  
Cascading PPRC (PPRC V2) 27  
CCW subcommand, VM Dump Tool 142  
CCW translation support 58  
CD-ROM, z/VM no longer available on 9  
CHAIN subcommand, VM Dump Tool 142  
CHARACTER\_DEFAULTS system configuration statement 101  
close (BPX1CLO) routine 160  
CLOSE macro (OS Simulation) 164  
cluster bus channel 20  
CMOS Cryptographic Coprocessor 21  
CMS binder upgraded 87  
CMS callable services, general 155  
CMS commands 145  
CMS compatibility-interface macros 163  
CMS compatibility-interface routines 161  
CMS control blocks, viewing and printing 90  
CMS external interfaces 145  
CMS file pool administration and operator commands 152  
CMS IPL heading 53

- CMS level, querying 77
- CMS macro subcommands 161
- CMS macros 161
- CMS macros, general 161
- CMS messages 172
- CMS Migration Utility Feature no longer available 79
- CMS minidisk size limitation 71
- CMS multitasking routines 160
- CMS OS Simulation macros 164
- CMS OS Simulation supervisor calls 164
- CMS Pipelines messages 154
- CMS Pipelines stages, subcommands, and macros 153
- CMS productivity aids 51
- CMS routines 154
- CMS utilities 151
- CMS Utilities integrated into CMS 5
- CMS, support for multiple levels of 205
- CMSDESK command 146
- CMSFLAG function 173
- CMSLEVEL macro 162
- CMSSERV command 146
- Collaborative Memory Management Assist (CMMMA) 37
- commands, CMS file pool administration and operator 152
- commands, Dump Viewing Facility 172
- commands, GCS 173
- commands, general CMS 145
- commands, OPENVM 152
- commands, VM Dump Tool 141
- commands, VMSES/E 174
- COMMIT command 105
- connectivity, establishing between old and new systems 202
- connectivity, virtual 39
- CONSOLE directory control statement 103
- CONV2WD command 146
- COPYFILE command 146
- COUPLE command 105
- CP command response suppression 61
- CP commands 105
- CP control blocks, viewing and printing 90
- CP exit modifications 56
- CP exits, dynamic 55
- CP external interfaces 101
- CP functions removed (V5.1) 66
- CP images 56
- CP is 64-bit only 15
- CP macros 138
- CP messages 144
- CP nucleus 56
- CP scheduler improvements 64
- CP system services 140
- CP utilities 132
- CPEBK subcommand, VM Dump Tool 142
- CPFMTXA utility 132
- CPLISTFILE command 106
- CPRB macro 162
- CPU directory control statement 103
- CPXLOAD command 106
- CPXLOAD directives 141

- CPXLOAD system configuration statement 102
- CREATE DIRECTORY command 146
- CRYPTO directory control statement 103
- Crypto Express2 32
- Crypto Express2 Accelerator 34
- Cryptographic Coprocessor 21
- CSE, using to share data 193
- CSL routines that have dates as output, calling 77
- CSLLIST command 146
- CSLMAP command 146
- CSMRETCD macro 162
- CTCA, FICON 23

## D

- DACBGEN EXEC 90
- data compression, shell commands for 81
- data space macros 139
- DATE function 173
- DATECONVERT stage 154
- DateTimeSubtract routine 160
- DCB macro (OS Simulation) 164
- DCE feature deleted 6
- DDR Compression support 58
- DDR utility 132
- DEDICATE command 106
- DEDICATE directory control statement 104
- DEFAULTS command 146
- DEFINE CHPID / PATH command 107
- DEFINE command 106
- DEFINE COMMAND / CMD command 107
- DEFINE COMMAND / CMD system configuration statement 102
- DEFINE CPOWNED command 107
- DEFINE CRYPTO command 107
- DEFINE CTCA command 107
- DEFINE CU / CNTLUNIT command 107
- DEFINE DEVICE / IODEVICE command 107
- DEFINE LAN command 108
- DEFINE LAN system configuration statement 102
- DEFINE MSGPROC command 108
- DEFINE NIC command 108
- DEFINE STORAGE command 108
- DEFINE temporary disk command 108
- DEFINE VECTOR command 108
- DEFINE VSWITCH command 108
- DEFINE VSWITCH system configuration statement 102
- DEFNSS EXEC, sample 211
- DEFNUC macro 163
- DEFSYS command 108
- DELENTY macro 162
- DELENTY subcommand 162
- DELETE CHPID / PATH command 108
- DELETE command 108
- DELETE CU / CNTLUNIT command 108
- DELETE DEVICE / IODEVICE command 109
- DELETE LOCK command 152
- DELETE RDEVICE command 109
- DELETE USER command 152
- deleted books (V4.1) 94

- deleted books (V4.4) 96
- deleted books (V5.1) 97
- deleted books (V5.2) 98
- denial of service (DoS) attacks 40
- denial of service (DoS) attacks, prevention of 42
- deploying Linux servers, book for 68
- DESTAGE command 109
- DETACH (Real Device) command 109
- DETACH command 109
- DETACH CRYPTO command 109
- DETACH VECTOR command 109
- devices not supported (V5.1) 30, 35
- DFSMS/VM not automatically shipped 9
- DIAG / DIAGRC function 173
- DIAGNOSE code X'00' 135
- DIAGNOSE code X'04' 135
- DIAGNOSE code X'08' 136
- DIAGNOSE code X'10' 136
- DIAGNOSE code X'14' 136
- DIAGNOSE code X'210' 138
- DIAGNOSE code X'250' 138
- DIAGNOSE code X'254' 138
- DIAGNOSE code X'258' 138
- DIAGNOSE code X'260' 138
- DIAGNOSE code X'270' 138
- DIAGNOSE code X'44' 136
- DIAGNOSE code X'4C' 136
- DIAGNOSE code X'60' 136
- DIAGNOSE code X'64' 136
- DIAGNOSE code X'7C' 136
- DIAGNOSE code X'84' 136
- DIAGNOSE code X'90' 137
- DIAGNOSE code X'94' 137
- DIAGNOSE code X'98' 137
- DIAGNOSE code X'BC' 137
- DIAGNOSE code X'D8' 137
- DIAGNOSE code X'DC' 137
- DIAGNOSE code X'E0' 137
- DIAGNOSE codes 135
- DIAGNOSE codes, 64-bit addressing support for (V4.3) 84
- diagnosis, changes related to 89
- DIAL command 109
- DIRBUFF macro 162
- directory control statements 103
- DIRECTORY directory control statement 104
- directory user entry changes (V5.2) 17
- directory, migrating 194
- DIRECTXA utility 133
- DIRLIST command 146
- DirMaint enhancements 74, 76
- DirMaint feature added 6
- DIRMAP utility 151
- DISCARD PINNED command 109
- DISCONNECT command 110
- DISPLAY (Guest Storage - ESA/390) command 110
- DISPLAY (Guest Storage - ESA/XC) command 110
- DISPLAY (Guest Storage - z/Architecture) command 110
- DISPLAY (Host Storage) command 110
- DISPLAY (Linkage Stack) command 111
- DISPLAY command 110
- DISPLAY ESA/XC Storage command 110
- DISPLAY LKS command 111
- DISPLAY PSW command 111
- DISPLAY Registers command 111
- DISPLAY subcommand, VM Dump Tool 142
- DISPLAY Vector command 111
- DMSCLBLK routine 155
- DMSCLDBK routine 155
- DMSCLOSE routine 155
- DMSCRDIR routine 155
- DMSCRFIL routine 155
- DMSCROB routine 155
- DMSDEUSR routine 155
- DMSENUUSR routine 156
- DMSERP routine 156
- DMSEXIDI routine 156
- DMSEXIFI routine 156
- DMSEXIST routine 157
- DMSGETDA routine 157
- DMSGETDF routine 158
- DMSGETDI routine 158
- DMSGETDS routine 159
- DMSGETDX routine 159
- DMSOPBLK routine 159
- DMSOPDBK routine 159
- DMSOPEN routine 159
- DMSQEFL macro 162
- DMSQEFL routine 159
- DMSQSFSL routine 159
- DMSRDCAT routine 160
- DMSTRUNC routine 160
- DMSTVS routine 161
- documentation changes 94
- DRAWLOGO sample utility 182
- DS6000 33
- DS6000 support, native 39
- DS8000 33
- DS8000 support, native 39
- DUMP (Guest Storage - ESA/390) command 111
- DUMP (Guest Storage - ESA/XC) command 111
- DUMP (Guest Storage - z/Architecture) command 111
- DUMP (Host Storage) command 112
- DUMP (Linkage Stack) command 112
- DUMP (Registers) command 112
- DUMP command 111
- DUMP ESA/XC Storage command 111
- DUMP LKS command 112
- Dump Tool functions 141
- Dump Tool messages 144
- DUMP Vector command 112
- Dump Viewing Facility external interfaces 172
- DUMpload command 133
- DUMPSCAN command 172
- DUPLEX command 112
- DVD, installation from 15
- DX macro, VM Dump Tool 142
- dynamic CP exits 55
- dynamic I/O return codes 134
- dynamic link library (DLL) support 78
- dynamic LPAR addition/deletion 34

dynamic stack configuration 42  
Dynamic System Default Language support 58  
dynamic virtual machine timeout 86

## E

ECMDS 27  
EDEVICE system configuration statement 102  
electronic delivery of service 10  
enhanced timer management 59  
ERASE command 146  
Error Logging System Service 141  
ESAMIGR deleted 6  
ESS Cascading PPRC (PPRC V2) 27  
ESS FlashCopy 21  
ESS FlashCopy V2 27  
ESS large volumes 23  
ESS Model 750 30  
ESS Parallel Access Volumes 22  
ESS PPRC over FCP 30  
ESS PPRC-XD 27  
ESS support, native 39  
euro support 55  
Exit Entry Definition macro 140  
exploitation of selected System z9 instructions 38  
EXSBUFF macro 162  
extended channel measurement data support  
(ECMDS) 27  
Extended-TOD-clock 21  
EXTRACT subcommand, VM Dump Tool 142

## F

fast CCW translation support 58  
fcntl (BPX1FCT) routine 160  
FCP guest support 25  
FCP LUN Access Control 70  
FEATURES system configuration statement 102  
fibre connection (FICON) channels 20  
fibre connection (FICON) CTCA 23  
FICON channels 20  
FICON directors, cascaded 26  
FICON Express2 33  
FICON Express4 37  
file pool administration and operator commands 152  
file pool server shutdown, automated 61  
file pool server, converting back to old release 201  
file pool servers, migrating 197  
File Status Table (FST) 89  
FILE subcommand (XEDIT) 153  
FILEDEF command 147  
FILELIST command 147  
FILEPOOL RELOAD command 152  
FILEPOOL UNLOAD command 152  
FlashCopy 21  
FLASHCOPY command 112  
FlashCopy V2 27  
FLIST command 147  
FORCE command 112  
fork (BPX1FRK) processing 81  
FORMAT command 147

frame management (V5.1) 66  
FRAMES subcommand, VM Dump Tool 142  
FSSTATE macro 162  
FSTD macro 162

## G

GARP VLAN Registration Protocol (GVRP) 38  
GCS commands and macros 173  
GCS pathlength reduced 78  
GCSLEVEL macro 173  
GENCPBLS EXEC 174  
GENMOD command 147  
GET macro (OS Simulation) 164  
GET subcommand (XEDIT) 153  
GETMAIN macro 173  
GETREQ subcommand 162  
GIVE command 112  
GLOBAL command 147  
glossary information 235  
GREGS subcommand, VM Dump Tool 142  
guest coupling enhancement (V4.4) 28  
guest coupling facility, z/Architecture 24  
guest coupling simulation 19  
guest IPL from SCSI 62  
guest LAN 40  
guest LAN enhancements (V4.3) 41  
guest LAN support of IPv6 43  
GUI Facility changes 57

## H

HALT command 112  
hardware support, changes related to 18  
HCD and HCM for z/VM 62  
HCPBOX, replacing with logo configuration file 177,  
182  
HCPCALL macro 140  
HCPDCON sample utility 177, 181  
HCPDCON utility program 222  
HCPLDR utility 133  
HCPPROLG macro 140  
HCPRDEV sample utility 177, 182  
HCPRDEVS utility program 224  
HCPRIO definitions, migrating to system configuration  
file 177  
HCPRIO macroinstructions replaced by system  
configuration statements 180  
HCPSYS definitions, migrating to system configuration  
file 177  
HCPSYS macroinstructions replaced by system  
configuration statements 178  
HCPTKDEF macro 140  
HCPTRIO sample utility 177, 180  
HCPTRIO utility program 226  
HCPTSYS sample utility 177, 180  
HCPTSYS utility program 228  
HELP command 147  
HELP components deleted, revised, or added 165  
HELP Facility components 164  
HELP Facility enhancements 63

- HELP files deleted 166
- HELPIINST saved segment 52
- High Level Assembler 56, 93
- HiperSockets 23
- HiperSockets support in TCP/IP, extended (V4.4) 43
- HiperSockets, virtual 40
- HyperSwap 68

## I

- I/O devices not supported (V5.1) 30, 35
- IBM DASD Subsystem Multi-Path Lock Facility 19
- IDENTIFY command 148
- IEEE Floating Point 21
- IEEE VLAN support 43
- IMAP user authentication exit 43
- incompatible change, definition of 2
- INDICATE command 112
- INDICATE LOAD command 113
- INDICATE PAGING command 113
- INDICATE QUEUES command 113
- INDICATE SPACES command 113
- INDICATE USER command 113
- INDICATE VECTOR command 113
- INDQ subcommand, VM Dump Tool 142
- installation and service enhancements (V5.1) 16
- installation changes (V4.1) 12
- installation changes (V4.3) 12
- installation enhancements (V4.4) 14
- installation from DVD 15
- installation, changes related to 9
- INSTDEF utility 133
- INSTR subcommand, VM Dump Tool 142
- INSTVM utility 133
- integrated 3270 console 13
- integrated cluster bus channel 20
- Integrated Facility for Linux (IFL) 22
- IPL command 113
- IPLing with the NODIRECT option 54
- IPv6 HiperSockets 39
- IPv6 support in guest LAN 43
- IPv6 support, enhanced 46
- IPv6 support, HiperSockets 50
- ITNVTSTR EXEC 10, 174
- IUCV functions 139

## J

- Java support removed 85

## L

- LAN sniffer 48
- Language Environment included with VM 78
- Language Environment integrated as component 7
- Language Environment upgrade (V4.4) 84
- Language Environment, removing old level of 7
- LANRES/VM feature deleted 6
- large disk support (V5.1) 71
- large disk support (V5.2) 75
- large real storage, improved utilization of 59

- LASTTRAN macro, VM Dump Tool 142
- Layer 2 support in virtual switch 47
- LCSS 28
- LCSS support, enhanced 29
- Linux guest capacity improvements 64
- Linux servers, deploying 68
- LISTDIR command 148
- LISTDS command 148
- LISTFILE command 148
- LKED command 148
- LOAD command 148
- LOAD subcommand (XEDIT) 153
- LOADMOD command 148
- local modification of replacement-maintained parts 10
- LOCALMOD EXEC 174
- LOCATE (Storage) command 114
- LOCATE CMDBK command 114
- LOCATE command 113
- LOCATE DGNDDBK command 114
- LOCATE FILID command 114
- LOCATE FRAMETBL command 114
- LOCATE ICLBK command 114
- LOCATE LDEV command 114
- LOCATE RDEV command 114
- LOCATE SHPBK command 114
- LOCATE SNABK command 114
- LOCATE SPFBK command 114
- LOCATE subcommand, VM Dump Tool 142
- LOCATE SYMBOL command 115
- LOCATE VDEV command 115
- LOCATE VMDBK command 115
- LOCATE VSMBK command 115
- LOCATE XITBK command 115
- LOCATEVM command 115
- LOCDISP macro, VM Dump Tool 143
- LOCK command 115
- logical channel subsystems (LCSS) 28
- logical device limit 53
- logo configuration file, converting from HCPBOX to 182
- LOGON / LOGIN command 116
- LPAR addition/deletion, dynamic 34
- LT macro 163
- LT MACRO renamed 88

## M

- MACHINE directory control statement 104
- MACLIST command 148
- MACLMIG command 148
- macros, CMS 161
- macros, CP 138
- macros, GCS 173
- MAP subcommand, VM Dump Tool 143
- MAPMDISK macro 139
- MDISK directory control statement 104
- MDLATENT macro 140
- messages, CMS 172
- messages, CMS Pipelines 154
- messages, CP 144
- messages, VM Dump Tool 144

- messages, VMSES/E 176
- migration and service enhancements (V5.2) 16
- minidisk size limitation 71
- MODIFY CHPID / PATH command 116
- MODIFY command 116
- MODIFY COMMAND / CMD command 116
- MODIFY COMMAND / CMD system configuration statement 102
- MODIFY CU / CNTLUNIT command 116
- MODIFY DEVICE / IODEVICE command 116
- MODIFY VSWITCH system configuration statement 102
- MONITOR command 116
- monitor records 95
- mount (BPX1MNT) routine 160
- moved information (V4.1) 94
- moved information (V4.2) 95
- moved information (V4.3) 95
- moved information (V4.4) 96, 97
- MOVEFILE command 149
- MPLF 19
- MPRoute server 48
- MQSeries Client for VM/ESA 39
- Multi-Path Lock Facility (MPLF) 19
- multiple levels of CMS 205
- multitasking routines, CMS 160

## N

- N\_Port ID virtualization (NPIV) 34
- N\_Port ID Virtualization (NPIV) support, enhanced 38
- NETDATA command 149
- NetRexx support removed 85
- network interface card (NIC) 40
- networking, changes related to 39
- NODIRECT option 54
- non-relocatable modules loaded between 16-20 MB 79
- NOTE command 149
- NUCXLOAD command 149

## O

- object directory compatibility 194
- On/Off Capacity on Demand (On/OddCoD) 31
- OPEN macro (OS Simulation) 164
- Open Systems Adapter for the Network Control Program (OSA NCP) 36
- OpenExtensions callable services 160
- OpenExtensions macros 163
- OpenExtensions open files limit 83
- OPENVM commands 152
- OPENVM DEBUG command 152
- OPENVM MOUNT command 152
- OPENVM OWNER command 152
- OPENVM QUERY MOUNT command 153
- OPENVM RUN command 153
- openvmf (BPX1VM5) routine 160
- operation, changes related to 50
- OPERATOR\_CONSOLES system configuration statement 102
- OPTION directory control statement 104

- OPTIONS directive (for CPXLOAD) 141
- OS Simulation enhancements (V2.4) 82
- OS simulation enhancements (V3.1) 83
- OS Simulation macros 164
- OS Simulation supervisor calls 164
- OS Simulation support for Tape Library Dataserver 78
- OSA Express Gigabit Ethernet 20
- OSA NCP 36
- OSA-Express Integrated Console Controller (OSA-ICC) 31
- OSA-Express port sharing restriction, removal of 50
- OSA-Express token ring 24
- OSA-Express2 33
- OSA-Express2 OSN 36
- OSA/SF 19

## P

- packaging, changes related to 5
- pageable CP nucleus not supported 66
- Parallel Access Volumes 22
- Parallel Access Volumes, enhanced support for 39
- PARSE instruction 173
- Parser Token Definition macro 140
- PCI Cryptographic Accelerator (PCICA) 23
- PCI Cryptographic Coprocessor (PCICC) 23
- PCIX Cryptographic Coprocessor 31
- PEEK command 149
- PER3 38
- performance assists for z/VM guests, enhanced 35
- performance monitor enhancement 26
- Performance Toolkit enhancements 69, 71, 75, 76
- Performance Toolkit feature 8
- Performance Toolkit for VM 65
- PFAULT support 58
- PFXSAVE macro, VM Dump Tool 143
- PIPE command 149
- Pipelines code bases merged 79
- Pipelines messages 154
- Pipelines stages, subcommands, and macros 153
- PIPEPVR macro 154
- PL/X source 9
- POSIX support enhancements (V2.3) 80
- POSIX support enhancements (V2.4) 82
- POSIX support now called OpenExtensions 82
- PPF file changes (V4.4) 15
- PPF file names (V5.2) 18
- PPF override file name 12
- PPRC V2 27
- PPRC-XD 27
- PRF feature no longer available 9
- processor engines per z/VM image 32
- product enablement support 55
- pseudo timer extended 77
- PTF, removing 11
- PUT macro (OS Simulation) 164
- PUT subcommand (XEDIT) 153
- PUT2PROD EXEC 174
- PUTD subcommand (XEDIT) 153

## Q

QDIO (Queued Direct I/O) 20  
QDIO enhancements (V4.4) 26  
QSYSOWN utility 152  
QUERY (Real Device) command 122  
QUERY (Virtual Device) command 124  
QUERY ABEND command 117  
QUERY ALL command 117  
QUERY ALLOC command 117  
QUERY CACHE command 117  
QUERY CACHEFW command 117  
QUERY CHPID command 118  
QUERY CMSLEVEL command 150  
QUERY CMSREL command 150  
QUERY command (CMS) 150  
QUERY command (CP) 117  
QUERY CONTROLLER command 118  
QUERY CPCMDS command 118  
QUERY CPLANGLIST command 118  
QUERY CPLEVEL command 118  
QUERY CPLOAD command 118  
QUERY CPXLOAD command 118  
QUERY CRYPTO command 119  
QUERY DASD command 119  
QUERY DASDFW command 119  
QUERY DUMP command 119  
QUERY DUPLEX command 119  
QUERY EDEVICE command 119  
QUERY EXITS command 119  
QUERY FCP command 119  
QUERY FENCES command 119  
QUERY FILEDEF command 150  
QUERY FRAMES command 119  
QUERY GCSLEVEL command 173  
QUERY GRAF command 120  
QUERY IMG command 120  
QUERY IOASSIST command 120  
QUERY LAN command 120  
QUERY LDEVS command 120  
QUERY LPARS command 120  
QUERY MDCACHE command 120  
QUERY MODDATE command 173  
QUERY NAMES command 120  
QUERY NLS command 121  
QUERY NSS command 121  
QUERY NVS command 121  
QUERY OSA command 121  
QUERY PATHS command 121  
QUERY PINNED command 121  
QUERY PROMPT command 121  
QUERY READER / PRINTER / PUNCH command 122  
QUERY RSAW command 122  
QUERY SET command 122  
QUERY SPACES command 122  
QUERY stage 154  
QUERY STORAGE command 122  
QUERY subcommand, VM Dump Tool 143  
QUERY TAPES command 122  
QUERY TIME command 123  
QUERY TOKEN command 123  
QUERY TRACE command 123

QUERY TRFILES command 123  
QUERY TRSOURCE command 123  
QUERY UCR command 123  
QUERY USERID command 123  
QUERY USERS command 123  
QUERY V=R command 126  
QUERY VECTOR command 123  
QUERY VIRTUAL ALL command 124  
QUERY VIRTUAL CONSOLE command 124  
QUERY VIRTUAL CRYPTO command 124  
QUERY VIRTUAL CTCA command 124  
QUERY VIRTUAL DASD command 124  
QUERY VIRTUAL DUPLEX command 124  
QUERY VIRTUAL FCP command 124  
QUERY VIRTUAL GRAF command 125  
QUERY VIRTUAL LINES command 125  
QUERY VIRTUAL OSA command 125  
QUERY VIRTUAL PRINTER command 125  
QUERY VIRTUAL PUNCH command 125  
QUERY VIRTUAL READER command 125  
QUERY VIRTUAL STORAGE command 125  
QUERY VIRTUAL TAPES command 125  
QUERY VIRTUAL VECTOR command 125  
QUERY VMDUMP command 125  
QUERY VMLAN command 125  
QUERY VRFREE command 126  
QUERY VSWITCH command 126  
Queued Direct I/O (QDIO) 20

## R

RACF feature added 7  
RADIX macro, VM Dump Tool 143  
RDEV BK subcommand, VM Dump Tool 143  
RDRLIST command 150  
read (BPX1RED) routine 161  
READER stage 154  
RECEIVE command 150  
REDEFINE command 126  
REFPAGE macro 139  
relocated information (V4.1) 94  
relocated information (V4.2) 95  
relocated information (V4.3) 95  
relocated information (V4.4) 96, 97  
Removable Media Services (RMS) free drive support 52  
replacement-maintained parts, local modification of 10  
reserve/release considerations for VSE 188  
RESET command 126  
response suppression, CP command 61  
restricted source 9  
retitled books (V4.4) 96  
retitled books (V5.1) 97  
retitled books (V5.2) 98  
REXX Sockets API 76  
REXX work area relocated 87  
REXX/EXEC Migration Tool for VM/ESA deleted 6  
REXX/VM instructions and functions 173  
RIO370 56  
RSCH subcommand, VM Dump Tool 143  
RTM feature no longer available 9

## S

- S/390 CMOS Cryptographic Coprocessor 21
- S/390 Service Update Facility 10
- SADT command 150
- SALIPL utility 134
- SAVE subcommand (XEDIT) 153
- saved segments, migrating 182
- SAVESEG command 126
- SAVESYS command 126
- scheduler improvements 64
- SCSI disk I/O performance improvements (V5.2) 36
- SCSI disk support (V5.1) 69, 71
- segment tables, allocation of real storage for 53
- SEND command 126
- SENDFILE command 150
- SENDREQ macro 163
- SENDREQ subcommand 163
- server capacity upgrade on demand 31
- Server-Requester Programming Interface (SRPI)
  - withdrawn 87, 89
- service enhancement (V4.3) 13
- service enhancements (V4.4) 14
- SERVICE EXEC 174
- Service Update Facility (SUF) 10
- service, changes related to 9
- service, electronic delivery of 10
- SET ABEND command 126
- SET CACHE command 126
- SET CACHEFW command 126
- SET CCWTRAN command 126
- SET command (CMS) 150
- SET command (CP) 126
- SET CPLANGUAGE command 126
- SET CPTRACE command 127
- SET CRYPTO command 127
- SET DASDFW command 127
- SET DUMP command 127
- SET EDEVICE command 127
- SET IOASSIST command 127
- SET IPLPARMS command 127
- SET LAN command 127
- SET LOADDEV command 127
- SET MACHINE command 128
- SET MDCACHE command 128
- SET NOTRANS command 128
- SET NVS command 128
- SET OBSERVER support 58
- SET PROMPT command 128
- SET RDEVICE command 128
- SET RDEVICE Integrated Communication Adapters
  - command 128
- SET RDEVICE Tape Units command 128
- SET SECUSER command 128
- SET subcommand, VM Dump Tool 143
- SET VSWITCH command 128
- SETREPLY subcommand 163
- SETVAR subcommand, VM Dump Tool 143
- SFS file pool server, converting back to old release 201
- SFS file pool servers, migrating 197
- SFS shutdown, automated 61
- shared tape support 59
- sharing data among CMS users on multiple systems 193
- sharing data between your old system and new system 187
- SHUTDOWN command 128
- SNAPDUMP command 128
- spanned channels 32
- SPECIAL directory control statement 104
- spool files, migrating 182
- SPTAPE command 129
- SPTAPE command removed 70
- SPXTAPE command 129
- SSASAVE macro, VM Dump Tool 143
- SSL server upgrade 44
- Stand-Alone Dump Utility 93
- STORAGE system configuration statement 103
- STORE (Guest Storage - ESA/390) command 129
- STORE (Guest Storage - ESA/XC) command 129
- STORE (Guest Storage - z/Architecture)
  - command 129
- STORE (Host Storage) command 129
- STORE (Registers) command 130
- STORE command 129
- STORE ESA/XC Storage command 129
- STORE PSW command 130
- STORE STATUS command 130
- STORE VECTOR command 130
- STSI (Store System Information) instruction 26
- SVC 19 (OPEN) (OS Simulation) 164
- SVC 20 (CLOSE) (OS Simulation) 164
- SYNCDMDRS command 130
- SYSRES macro 138
- SYSSTORE macro 139
- System Administration Facility removed 70, 75
- SYSTEM command 130
- SYSTEM CONFIG default changes (V5.2) 17
- system configuration file, converting from HCPSYS and HCPRIO to 177
- system configuration statements 101
- System Default Language support 58
- system definition macros 138
- system diagnosis, changes related to 89
- System z9 Business Class 34
- System z9 Enterprise Class 34
- SYSTEM\_RESIDENCE system configuration
  - statement 103
- systems management APIs 85
- systems management APIs enhanced (V5.1) 85
- systems management APIs enhanced (V5.2) 87
- systems management routines 161

## T

- TAPE command 151
- tape FICON and RAS support 83
- Tape Library Dataserver, OS Simulation support for 78
- tape support enhancements 22
- TAPECTL macro 163
- TCP/IP awareness in CP 53
- TCP/IP broadcast support for HiperSockets 43

- TCP/IP configuration wizard 13
- TCP/IP dynamic stack configuration 42
- TCP/IP HiperSockets support, extended (V4.4) 43
- TCP/IP IMAP user authentication exit 43
- TCP/IP included in base 6
- TCP/IP performance improvements (V4.3) 41
- TCP/IP SSL server upgrade 44
- TCP/IP stack performance improvements (V4.4) 44
- TCP/IP stack security improvements 44
- TCP/IP stack vulnerability reduction (V4.2) 40
- TCP/IP stack vulnerability reduction (V4.3) 42
- TCP/IP stack, additional connections for 48
- TELL command 151
- TERMINAL command (CP) 130
- TIME macro (GCS) 173
- TIME macro (OS Simulation) 164
- TODCLOCK subcommand, VM Dump Tool 143
- TRACE command 130
- TRACE mnemonic1 command 131
- TRACE subcommand, VM Dump Tool 143
- TRACE TABLE command 131
- TRACERED utility 134
- TRSAVE command 131
- TRSOURCE ID command 131
- TSAF external interfaces 173
- TSM removed from z/VM product package 9
- TSM removed from z/VM SDO 9

## U

- UNCOUPLE command 131
- UNDEDICATE command 131
- UNLOCK command 131
- upwardly compatible change, definition of 2
- USER directory control statement 104
- user directory control statements 103
- user directory, migrating 194
- USER\_DEFAULTS system configuration statement 103
- utilities, CMS 151
- utilities, CP 132

## V

- V=R and V=F virtual machines not supported 66
- VARY (Real Device) command 131
- VARY PROCESSOR command 131
- VARY VECTOR command 131
- VDEVBK subcommand, VM Dump Tool 144
- Vector Facility 58
- Vector Facility support removed 75
- virtual FICON CTCAs 45
- virtual HiperSockets 40
- virtual machine accounting improvements 60
- virtual machine timeout, dynamic 86
- VIRTUAL macro, VM Dump Tool 144
- virtual switch 45
- virtual switch support, enhanced, failover 46
- virtual switch support, enhanced, Layer 2 47
- virtual switch support, enhanced, VLAN 47
- Virtual Tape Server (VTS) 22

- Virtual\_Network\_Vswitch\_Set routine (CSL) 161
- VIRTUAL\_NETWORK\_VSWITCH\_SET routine (RPC) 161
- VM data space macros 139
- VM Dump Tool 90
- VM Dump Tool enhancement (V4.3) 91
- VM Dump Tool enhancements (V4.4) 91
- VM Dump Tool enhancements (V5.1) 91
- VM Dump Tool enhancements (V5.2) 93
- VM Dump Tool functions 141
- VM Dump Tool messages 144
- VMCF, full MP capability for 78
- VMDBK subcommand, VM Dump Tool 144
- VMDSCAN macro, VM Dump Tool 144
- VMDTQRY subcommand, VM Dump Tool 144
- VMDTSET subcommand, VM Dump Tool 144
- VMDUMP command 132
- VMDUMPTL command 141
- VMFAPPLY EXEC 174
- VMFASM EXEC 174
- VMFBLD EXEC 174
- VMFENRPT EXEC 10
- VMFEXUPD EXEC 174
- VMFHASM EXEC 175
- VMFHLASM EXEC 175
- VMFINS DELETE command 175
- VMFINS EXEC 175
- VMFINS INSTALL command 175
- VMFINS MIGRATE command 175
- VMFMRDSK EXEC 175
- VMFNLS EXEC 175
- VMFPLC2 command 151
- VMFREC EXEC 175
- VMFREM EXEC 11, 175
- VMFREPL EXEC 175
- VMFSETUP EXEC 175
- VMFSIM EXEC 175
- VMFSIM GETLVL command 175
- VMFSUFIN EXEC 10, 175
- VMFSUFTB EXEC 11, 175
- VMFUPDAT EXEC 176
- VMFVIEW EXEC 176
- VMLAN system configuration statement 103
- VMLINK command 151
- VMLINK improvements 57
- VMRM 61
- VMRM enhancements (V4.4) 65
- VMSES/E commands 174
- VMSES/E enhancements (V2.3) 10
- VMSES/E enhancements (V4.1) 12
- VMSES/E external interfaces 174
- VMSES/E messages 176
- VMUDQ macro 139
- VSCH subcommand, VM Dump Tool 144
- VTS 22

## W

- write (BPX1WRT) routine 161
- Write Once Read Many (WORM) support 32

## **X**

XAUTOLOG command 132  
XEDIT subcommand (XEDIT) 153  
XEDIT subcommands 153  
XLINK\_DEVICE\_DEFAULTS system configuration  
statement 103  
XLINK\_VOLUME\_INCLUDE system configuration  
statement 103

## **Y**

Year 2000 support (V2.2) 50  
Year 2000 support (V2.3) 52

## **Z**

z/Architecture guest coupling facility 24  
z/Architecture support 22  
z890 29

---

# Readers' Comments — We'd Like to Hear from You

z/VM  
Migration Guide  
version 5 release 2

Publication No. GC24-6103-03

Overall, how satisfied are you with the information in this book?

|                      | Very Satisfied           | Satisfied                | Neutral                  | Dissatisfied             | Very Dissatisfied        |
|----------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Overall satisfaction | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

How satisfied are you that the information in this book is:

|                          | Very Satisfied           | Satisfied                | Neutral                  | Dissatisfied             | Very Dissatisfied        |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Accurate                 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Complete                 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Easy to find             | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Easy to understand       | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Well organized           | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Applicable to your tasks | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Please tell us how we can improve this book:

Thank you for your responses. May we contact you? ☐ Yes ☐ No

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you. IBM or any other organizations will only use the personal information that you supply to contact you about the issues that you state on this form.

---

Name

---

Address

---

Company or Organization

---

Phone No.



Cut or Fold  
Along Line

Fold and Tape

Please do not staple

Fold and Tape




NO POSTAGE  
NECESSARY  
IF MAILED IN THE  
UNITED STATES

**BUSINESS REPLY MAIL**

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation  
Department 58HA, Mail Station P384  
2455 South Road  
Poughkeepsie, New York 12601-5400



Fold and Tape

Please do not staple

Fold and Tape

Cut or Fold  
Along Line





Program Number: 5741-A05

Printed in USA

GC24-6103-03



Spine information:



z/VM

Migration Guide

version 5 release 2