

SPC

TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.



SPC-FD05.DWG

REVISIONS					DOC. NO. SPC-FD05	Effective 7/8/02			DCP No: 1398
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECK'D	DATE	APPR'D	DATE	
1973	A	RELEASED	DCM	1/28/07	JN	04/28/08	JN	04/28/08	

SPC Type No.	Length (Feet)	Color	SPC Type No.	Length (Feet)	Color
SPC21956	1±0.5"	Black	SPC21970	10 ±1.5"	Black
SPC21957		Blue	SPC21971		Blue
SPC21958		Green	SPC21972		Green
SPC21959	3±1"	White	SPC21973	14±1.5"	Red
SPC21960		Black	SPC21974		Yellow
SPC21961		Blue	SPC21975		White
SPC21962	5±1"	Red	SPC21976	25±2"	Black
SPC21993		Green	SPC21977		Blue
SPC21963		Yellow	SPC21978		Green
SPC21901	7±1"	White	SPC21979	50±4"	Red
SPC21900		Black	SPC21980		Yellow
SPC21899		Blue	SPC21981		White
SPC21994	9±1"	Green	SPC21982	White	Black
SPC21995		Red	SPC21983		Blue
SPC21996		Yellow	SPC21984		Green
SPC21997	11±1"	White	SPC21985	Black	Red
SPC21964		Black	SPC21986		Yellow
SPC21965		Blue	SPC21987		White
SPC21966	13±1"	Green	SPC21988	Black	Black
SPC21967		Red	SPC21989		Blue
SPC21968		Yellow	SPC21990		Green
SPC21969	15±1"	White	SPC21991	Yellow	Yellow
			SPC21992		White

3	PVC BOUT	2PCS	PVC, COLOR: SEE TABLE SHORE A: 75±3, UL94V-0
2	RJ-45 8P8C MODULAR PLUG	2SET	CONTACT: COPPER ALLOY 15μ, GOLD PLATED INSULATOR: POLYCARBONATE, UL94V-2 COLOR: NATURAL INSERT BAR: UL94V-2, COLOR: NATURAL
1	ENHANCE CATEGORY 5E UTP LAN CABLE	1PC	#24X4P+JACKET: PVC, QD=0.5,3±0.1MM UL CM & CSA CMG FT4 CABLE MARKING: E248033 (UL) CM 75C 4PR 24AWG CSA 219561 CMG FT4 ETL VERIFIED TO TIA/EIA 568-B2 CAT.5E PATCH CORD UTP, 350 MHZ COLOR: SEE TABLE, FREQUENCY: 350MHZ
No.	ITEM	QTY	DESCRIPTION

8	BROWN	TWISTED	8
7	WHITE/BROWN	PAIR	7
5	WHITE/BLUE	TWISTED	5
4	BLUE	PAIR	4
6	GREEN	TWISTED	6
3	WHITE/GREEN	PAIR	3
2	ORANGE	TWISTED	2
1	WHITE/ORANGE	PAIR	1
J1	WIRE COLOR		J2
WIRE CONNECTION TABLE			

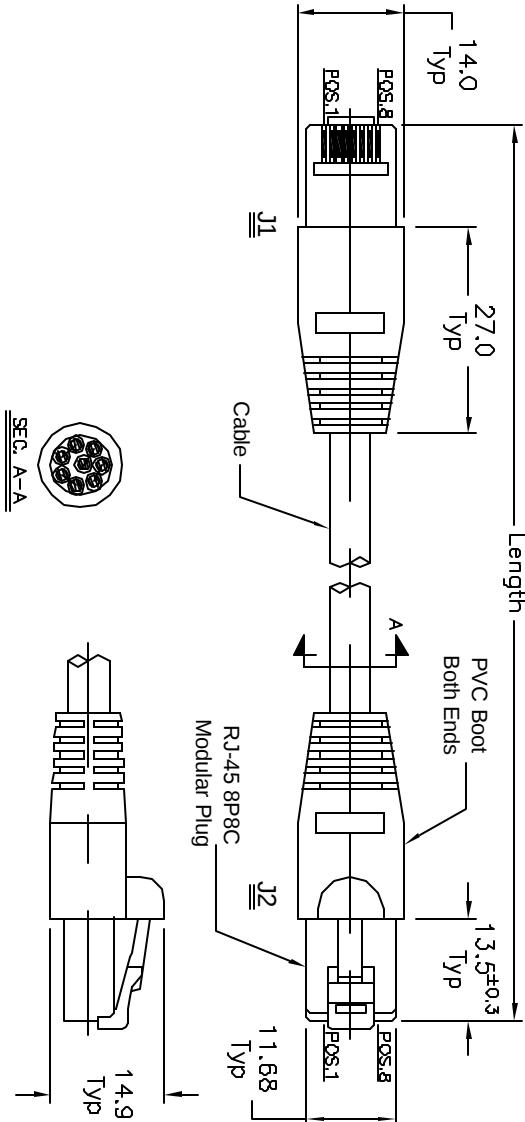

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

DRAWN BY:

DATE:

DRAWING TITLE:

Cat 5e Patch Cords, Snagless

CHECKED BY:

DATE:

SIZE DWG. NO.

TA-815

ELECTRONIC FILE

REV

APPROVED BY:

DATE:

SCALE: NTS

U.O.M.: Millimeters

SHEET: 1 OF 1

Dan McVicker

1/29/07

Jason Nash

04/28/08

04/28/08

TA-815.dwg

A