

Bothhand USA G2P829RNZ LF MAGNETICS MODULES

Datasheet

<http://www.manuallib.com/bothhand-usa/g2p829rnz-lf-magnetics-modules-datasheet.html>

Designed for Ethernet 100/1000 BASE-T, full duplex applications.

Supports 8 pairs of category 5 UTP cable.

Cable interface for isolation and low common mode emissions.

Compliant with IEEE 802.3ab standard for 1000 BASE-T.

Compliance with ROHS requirements.

Operating temperature range: 0 to +70.

Storage temperature range: -25 to +85.


ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>

**1000 BASE –T DUAL PORT
MAGNETICS MODULES
P/N: G2P829RNZ LF DATA SHEET**



Feature




- Designed for Ethernet 100/1000 BASE-T, full duplex applications.
- Supports 8 pairs of category 5 UTP cable.
- Cable interface for isolation and low common mode emissions.
- Compliant with IEEE 802.3at standard for 1000 BASE-T.
- Compliance with ROHS requirements.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +85°C.

Electrical Specifications @ 25°C							
Part Number	Turns Ratio (±5%)		OCL (uH Min) @100KHz/0.1V with 18mA DC Bias	Cross talk (dB Min)			HI-POT (Vrms)
	TX	RX		30MHz	60MHz	100MHz	
G2P829RNZ LF	1CT:1CT	1CT:1CT	350	-40	-35	-30	1500

Continue									
Part Number	Insertion Loss (dB Max)	Return Loss (dB Min) @ Load 100Ω					DCMR (dB Min)		
		1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz
G2P829RNZ LF	-1.0	-18	-14.4	-13.1	-12	-10	-43	-37	-33



Schematic

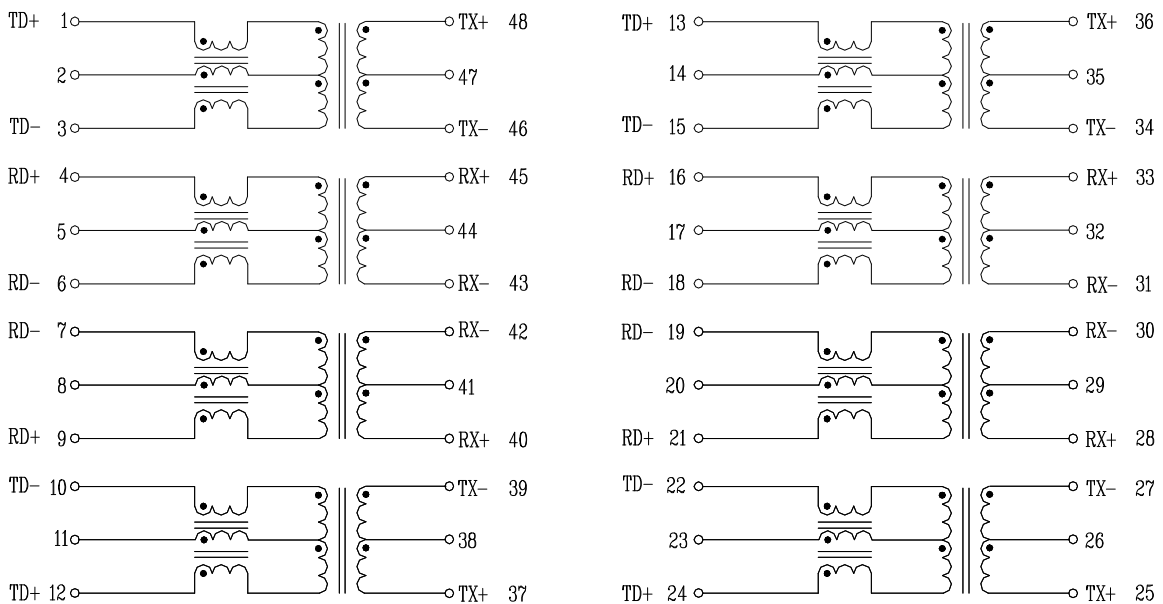

**1000 BASE -T DUAL PORT
MAGNETICS MODULES
P/N: G2P829RNZ LF DATA SHEET**




Mechanical

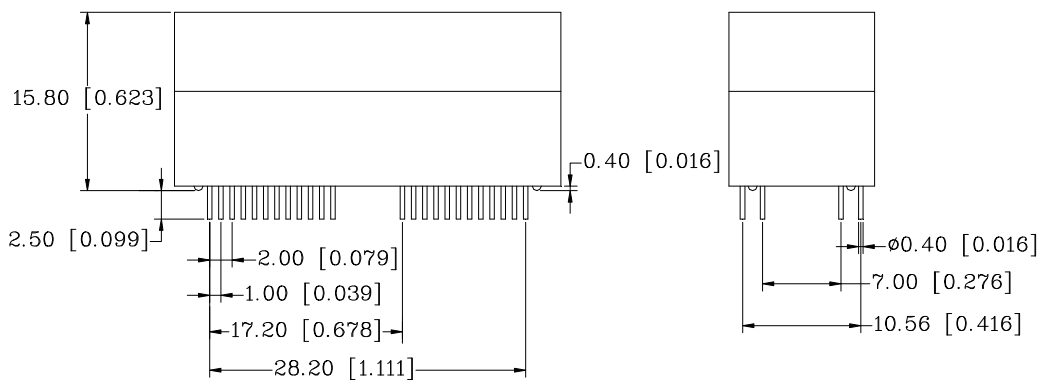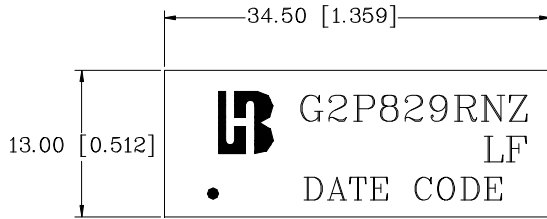

Units: mm[Inches] Tolerances XX.X0 : ±0.25[0.010]
0.XX : ±0.05[0.002]

PCB Layout mounting Hole (Top View)

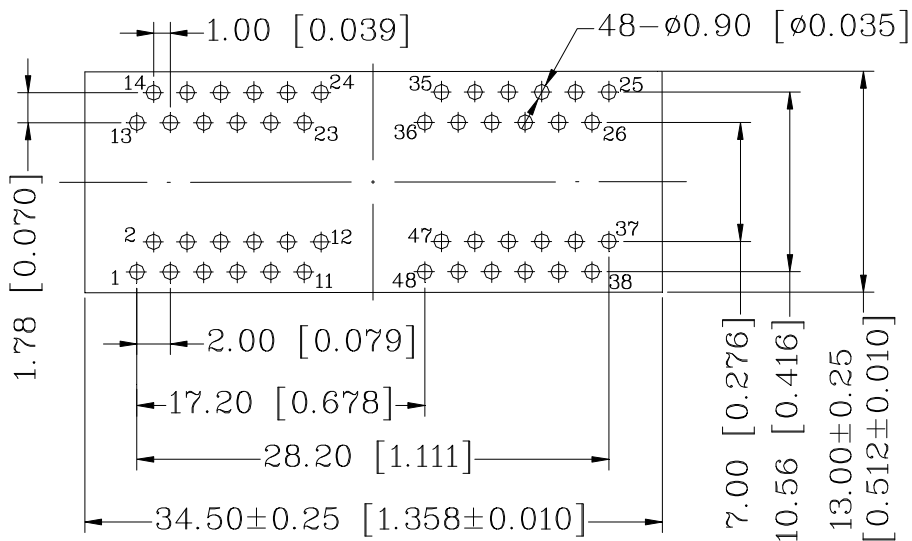

Unless otherwise specified,
all dimension tolerance are: ±0.08[±0.003]