

# ARIES 350000-10-HT Adapter Datasheet

<http://www.manuallib.com/aries/350000-10-ht-adapter-datasheet.html>

## FEATURES

A cost-effective means of upgrading to SOIC without changing your PCB layout  
?Available on 0.300 [7.62] centers. Consult Data Sheet 18011 for Adapters on 0.400 [10.16] or 0.600 [15.24] centers

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>



# Series 350000-10-HT High-Temperature SOIC-to-DIP Adapter

## FEATURES


- A cost-effective means of upgrading to SOIC without changing your PCB layout
- Available on 0.300 [7.62] centers. Consult **Data Sheet 18011** for Adapters on 0.400 [10.16] or 0.600 [15.24] centers

## GENERAL SPECIFICATIONS

- BOARD MATERIAL: 0.062 [1.58] thick Polyimide, Tg 260°C with 1-oz. Cu traces, both sides
- PADS: finished with white Sn
- PINS: Brass 360 1/2-hard per UNS C36000, ASTM B16/B16M
- PIN PLATING: 200μ [5.08μ] Sn/Pb 93/7 per ASTM B579-73 over 100μ [2.54μ] Ni per SAE AMS-QQ-N-290
- OPERATING TEMPERATURE: 200°C max.

## MOUNTING CONSIDERATIONS

SUGGESTED PCB HOLE SIZE: 0.028 ± 0.003 [0.71 ± 0.08] dia.

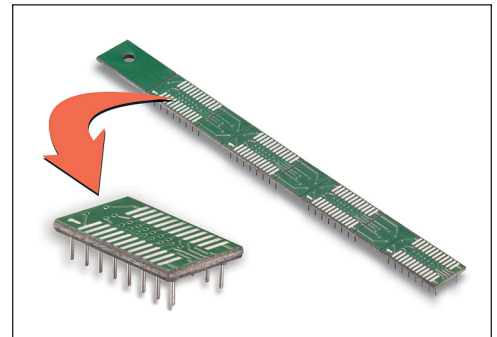

**CUSTOMIZATION:** In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE:** Aries reserves the right to change product general specifications without notice.

## ORDERING INFORMATION

See Table below for P/Ns

ALL DIMENSIONS: INCHES [MILLIMETERS]


ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

"A" = NO. OF PINS PER ROW × 0.100 [2.54]

"D" = (NO. OF PINS PER ROW - 1) × 0.100 [2.54]

AVAILABLE IN PANELIZED FORM WITH OR WITHOUT CUSTOMER-SUPPLIED DEVICES MOUNTED. CONSULT FACTORY

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

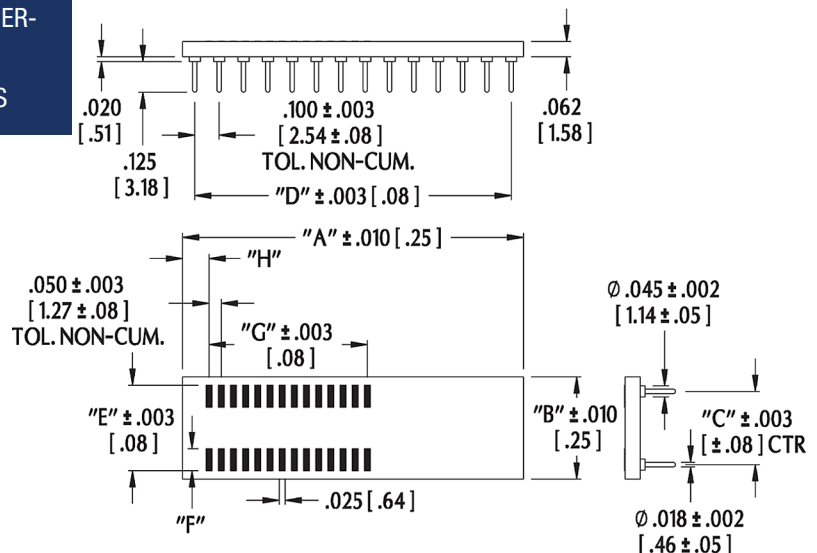

P/N	Pins	Type	Dim. "B"	Centers "C"	Dim. "E"	Dim. "F"	Dim. "G"	Dim. "H"
08-350000-10-HT	8	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.150 [3.81]	0.180 [4.57]
14-350000-10-HT	14	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.500 [12.70]	0.180 [4.57]
16-350000-10-HT	16	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]
18-350000-10-HT	18	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]
20-350000-10-HT	20	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]
24-350000-10-HT	24	SOIC	0.450 [11.43]	0.300 [7.62]	0.420 [10.67]	0.138 [3.51]	0.550 [13.97]	0.180 [4.57]



**ARIES**  
ELECTRONICS, INC.

Bristol, PA 19007-6810 USA  
TEL (215) 781-9956 • FAX (215) 781-9845  
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED

18005  
Rev. AA