TP-LINK[®]

54M Wireless PCI Adapter TL-WN353GD



Wireless Roaming, can move among different AP with no break

Ease to configure and provides monitoring information

Up to 54Mbps wireless rate and fully compatible with 802.11b.



Description:

The TP-LINK TL-WN353GD 54M Wireless PCI Adapter provides you the flexibility to install your PC in the most convenient location available, without the cost of running network cables.

The Adapter's auto-sensing capability allows high packet transfer rate of up to 54Mbps for maximum throughput, or dynamic range shifting to lower speeds due to distance or operating limitations in an environment with a lot of electromagnetic interference. It can also interoperate with all 11Mbps wireless (802.11b) products. TL-WN353GD supports up to 152-bit WEP and WPA encryption, so you need not to worry about the safety of your wireless data or privacy.


TL-WN353GD is also quite easy to install with the help of TP-LINK's easy-to-configure wireless client utility. With TL-WN353GD, you can easily connect your PC to your Wireless Access Point and enjoy the pleasure of Wi-Fi.

www.tp-link.com

Specifications:

Standards	IEEE 802.11g, IEEE 802.11b
Interface	32-bit PCI
Wireless Signal Rates	11g:54/48/36/24/18/12/9/6 Mbps (Auto Rate Sensing)
With Automatic Fallback	11b:11/5.5/3/2/1 Mbps (Auto Rate Sensing)
Frequency Range	2.4-2.4835GHz
Wireless Transmit Power	15dBm(typical)
Modulation Type	1M DBPSK, 2M DQPSK, 5.5M/11M CCK,
	6M/9M/12M/18M/24M/36M/48M/54M OFDM
Receiver Sensitivity	54M: -68dBm@10% PER
	11M: -85dBm@8% PER
	6M: -88dBm@10% PER
	1M: -90dBm@8% PER
Antenna Type	Omni Directional, Detachable
Antenna Power	2dBm
Wireless Security	64/128/152 bit WEP, WPA/WPA2,
	WPA-PSK/WPA2-PSK (TKIP/AES)
Media Access Control	CSMA/CA with ACK
Range	Indoors up to 100m, outdoors up to 300m.(Standard
	transmission distance, it is limited in different environment.)
Certifications	FCC, CE
Support Operating System	Windows 2000/XP/Vista
Operating Temperature	0°C~40°C (32°F~104°F)
Storage Temperature	-40°C~70°C (-40°F~158°F)
Relative Humidity	10% ~ 90%, non condensation
Storage Humidity	5%~95% non-condensing
Dimensions	$133\times121\times22~(mm)~5.2\times4.8\times0.9$ (in.)

Diagram:

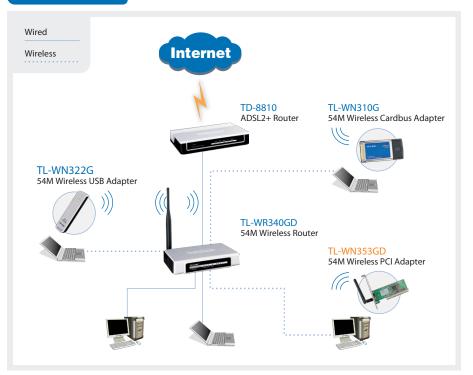

Features:

- 32-bit PCI connector
- Supports Ad-Hoc/Infrastructure modes
- Supports 54/48/36/24/18/12/9/6Mbps or 11/5.5/2/1Mbps data transfer rates
- Supports 64/128/152 strength WEP encryptions, as well as WPA/WPA2 and WPA-PSK/WPA2-PSK encryptions and mechanisms
- Supports Windows 2000, XP, Vista
- Provides simple configuration and supervisor program
- Detachable Omni-directional antenna

Package:

- 54M Wireless PCI Adapter TL-WN353GD with detachable antenna
- Quick Setup Guide
- Resource CD, including:
 - TL-WN353GD Wireless Client Utility and Drivers
 - · User Guide
 - · Other Helpful Information

Related Products:

- 54M Wireless Router TL-WR340GD
- 54M Wireless USB Adapter TL-WN321G
- 54M Wireless ADSL2+ Router TD-W8910G

Specifications are subject to change without notice, is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specificationsmay be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.

Copyright © 2008 TP-LINK Technologies Co., Ltd. All rights reserved.

www.tp-link.com