

Customer :

No. KX-97-1790

Date : Feb. 19, 1997

Attention :

Your ref. No :

Your Part. No : 29 0004

SPECIFICATIONS

ALPS :

MODEL RK09K1110 BT1A
(10k B)

Spec. No. :

Sample No. : W1011755M

RECEIPT STATUS

RECEIVED

By. Date

Signature

Name

Title

ALPS ELECTRIC CO., LTD.

HEAD OFFICE
1-7, YUKIGAYA-OHTSUKA-CHO,
OHTA-KU, TOKYO 145 JAPAN

DSG'D H. Kimura

APP'D Y. Ohya

ENG. DEPT. DIVISION

Sales

SPECIFICATIONS

1. THIS SPECIFICATIONS APPLY TO RK09K1110 . POTENTIOMETERS.

2. CONTENTS OF THIS SPECIFICATIONS.

W1011755M
K091B0Z06

3. MARKING

• MARKING ON ALL UNITS
DATE CODE, RESIST. VALUE, TAPER

4. REMARKS

• NOTES

• METHOD OF MARKING
TO BE STAMPED WITH BLACK INK OR LASER MARKING
• This unit uses polycarbonate. To be careful for using this unit in such violent
gas atmospheric condition as ammonia, amine, alkaline aqueous solution, aromatic
hydrocarbon, keton, ester, alkyl hydrocarbon, etc.

SPECIFICATIONS

ELECTRICAL

1. Total resistance : $10\text{ k } \Omega \pm 20\%$
2. Rated power : 0.05 W
3. Rated voltage :

The rated voltage shall be the voltage of D. C. or A. C. (commercial frequency, effective value) corresponding to the rated power (dissipation), and be obtained from the following formula. When the obtained rated voltage exceeds the maximum working voltage given in the following, however, the maximum working voltage of the following shall be the rated voltage.

$$E = \sqrt{P \cdot R} \text{ (V)}$$

Where E : Rated voltage (V)
P : Rated power (dissipation) (W)
R : Nominal total resistance (Ω)

Maximum working voltage : $50\text{ V A.C.}, 20\text{ V D.C.}$

4. Residual resistance between terminals
between term. 1&2, term. 2&3 : $300\Omega\text{ max.}$
5. Sliding noise : Less than 100 mV measured by method of JIS C 6443.
6. Insulation resistance : Greater than $100\text{ M}\Omega$ measured by D. C. 250V .
7. Withstand voltage: More than 1 minute with an application of A. C. 250 V .
8. Taper : B

MECHANICAL


1. Overall rotational angle : $280^\circ \pm 5^\circ$
2. Operation torque : $10 \sim 80\text{ gf}\cdot\text{cm}$
3. Shaft end stop strength : $3\text{ Kgf}\cdot\text{cm MIN.}$
4. Starting torque : $100\text{ gf}\cdot\text{cm MAX.}$
5. Resistance to soldering heat :
After soldering (Less than 300°C and quicker than 3 seconds) there shall be no evidence of poor contact between resistance element and terminals, or any physical damages as a result of the test.
6. Play of shaft :
The resistor shall be mounted by soldering the mounting legs on the panel, and a side thrust of $250\text{ gf}\cdot\text{cm}$ at the end of the shaft shall be applied, then the total play of the shaft shall not exceed $0.8 \times L / 20\text{ mm p-p}$.
7. Eccentricity of shaft :
The eccentricity of the root of shaft shall not exceed 0.35mm against the center of the mounting position.
8. Robustness of shaft against end thrust :
The shaft shall withstand against end thrust of not less than 5 Kgf for 3 seconds.
9. Robustness of shaft against side thrust :
The shaft shall withstand against side thrust of not less than $4\text{ Kgf}\cdot\text{cm}$ for 3 seconds on the end of the shaft at right angles to the axis of the shaft after mounting the resistor by soldering.

ENDURANCE

1. Rotational life : $5,000\text{ cycles min.}$


NOTE

1. The items except above mentioned items shall meet or exceed JIS C 6443.
2. Operating temperature : $-10^\circ\text{C} \sim +60^\circ\text{C}$. 3. Storage temperature : $-30^\circ\text{C} \sim +70^\circ\text{C}$.

					 ALPS ELECTRIC CO., LTD.			
					APPD.	CHKD.	DSGD.	TITLE
					Sep. 13, '96	Sep. 13, '96	Sep. 13, '96	
					S. Aizawa	M. Satoh	Y. Saitoh	
SYMB	DATE	APPD	CHKD	DSGD	DOCUMENT NO.			
					W1011755M			





ALPS ELECTRIC CO., LTD
1-7 YUKIGAYA OTSUKA-CHO OTA-KU TOKYO JAPAN

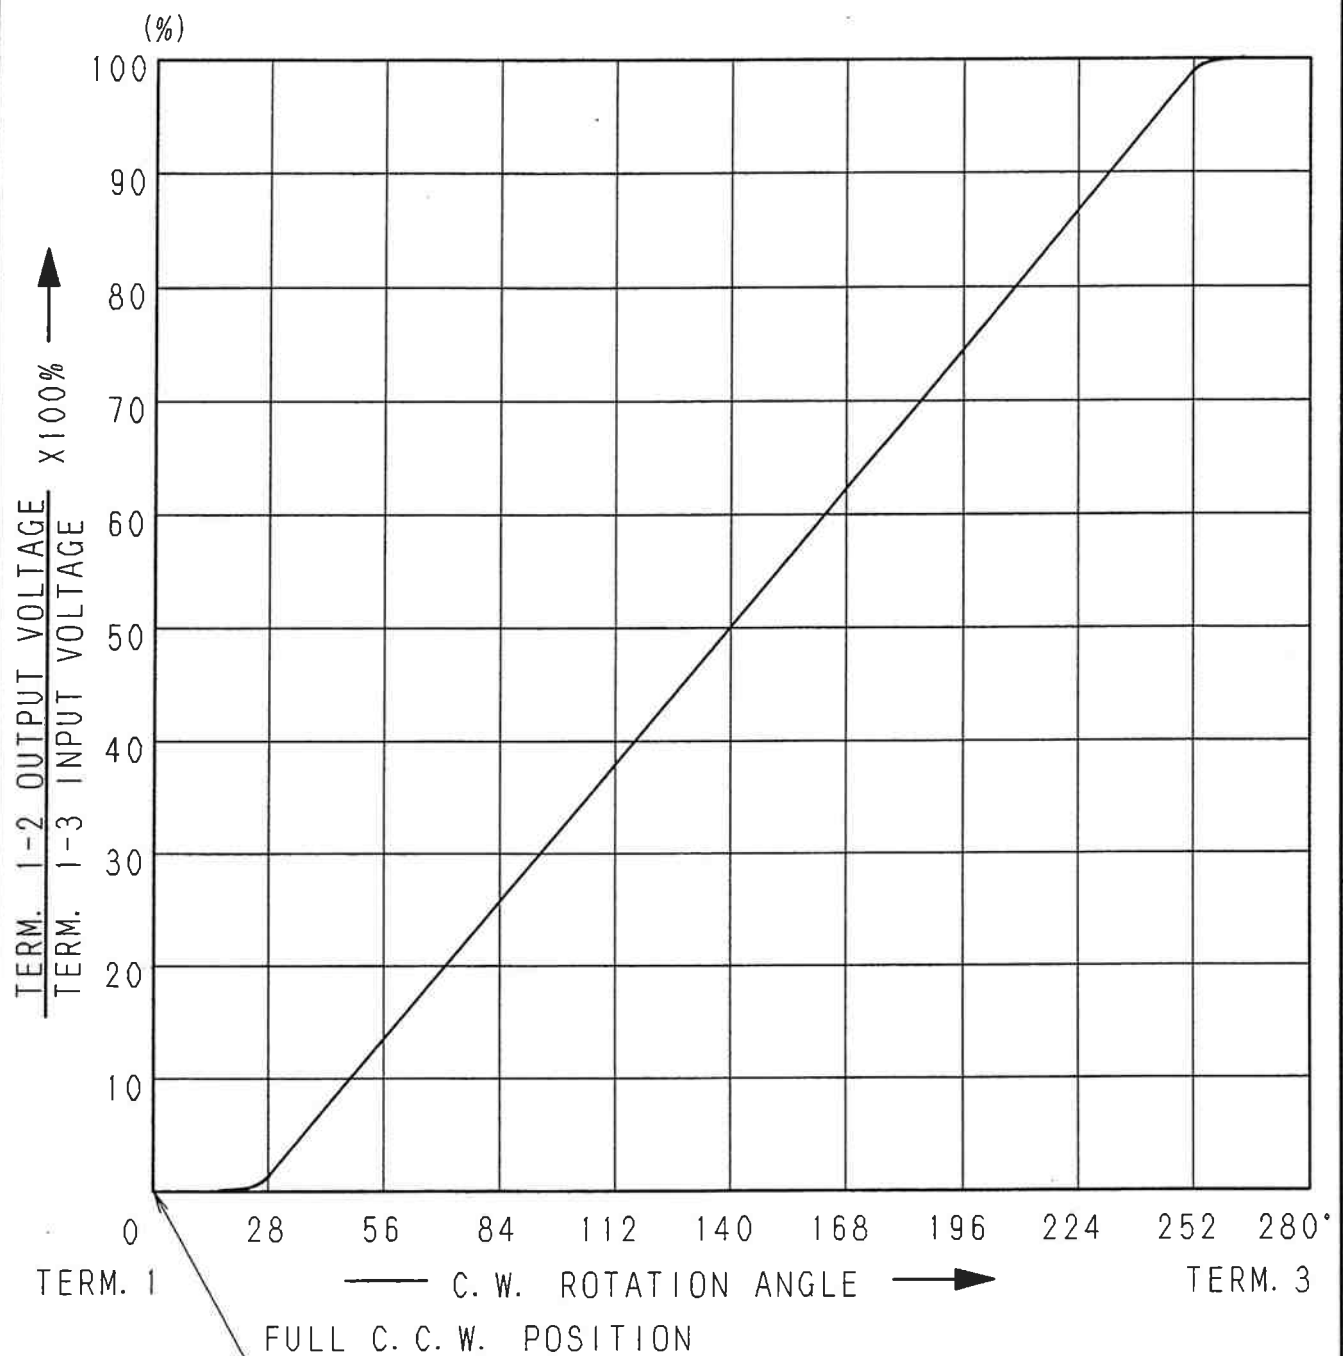


AT 140° C.W. SHAFT ROTATION FROM FULL C.C.W. POSITION VOLTAGE PERCENT SHALL FALL WITHIN THE LIMITS OF 40~60 PERCENT.

					APPD.	CHKD.	DSGD.	NAME
					Jul. 13, '93	Jul. 13, '93	Jul. 13 '93	RESISTANCE TAPER (B)
					K. Magami	K. Sasaki	K. Suzuki	DOCUMENT NO.
SYMB	DATE	APPD	CHKD	DSGD				W1011755M


KX09

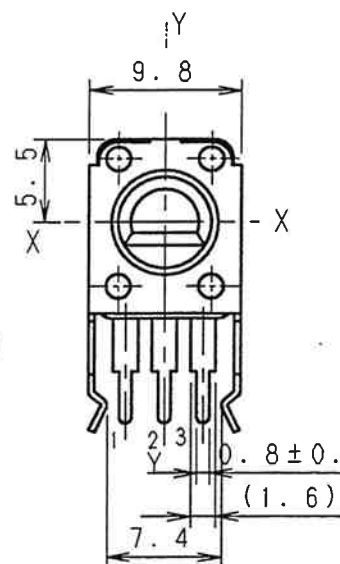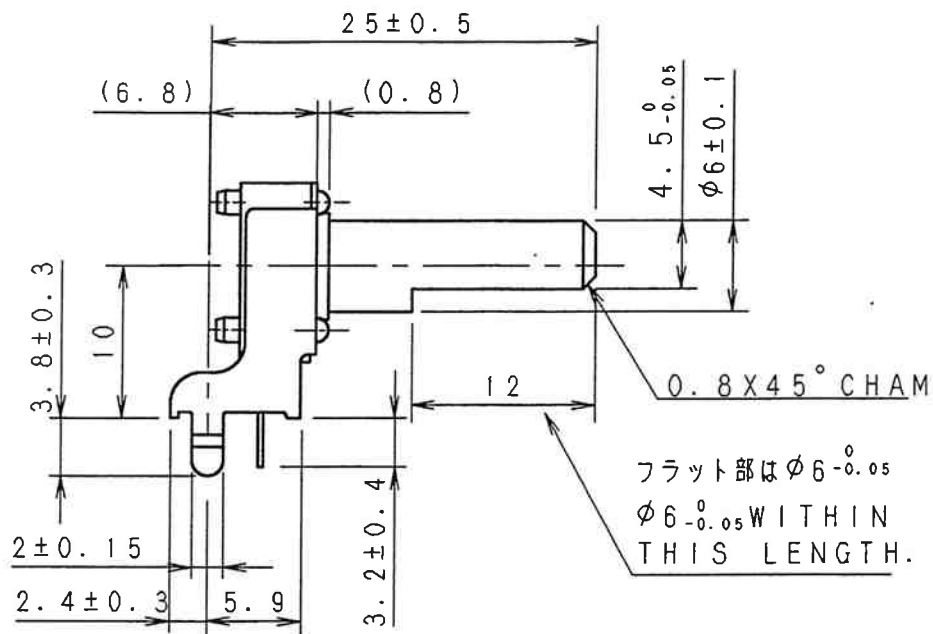

軸はセンター位置を示す。
SHAFT SHOWN IN
CENTER POSITION.

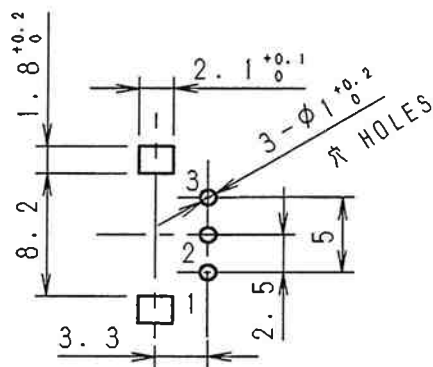

端子取付穴寸法図 (挿入側より見た図)
(許容差±0.1)
MOUNTING HOLE DETAIL
(TOLERANCE±0.1)
VIEWED FROM MOUNTING SIDE
板厚 t=1.6

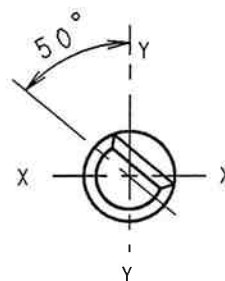

軸は反時計方向に回し切った状態を示す。
SHAFT SHOWN IN
FULL C. C. W. POSITION.

製品重量: 1.8 g
NET WEIGHT

指定なき部分の許容差 TOLERANCES UNLESS OTHERWISE SPEC	
$L \leq 10$	±0.3
$10 < L < 100$	±0.5
$100 \leq L$	±0.8
角度 ANGULAR DIMENSION	±5°

PART NO.		NAME		MATERIAL NAME / CODE		SHAFT COLOR : BLACK (B)	
SYMB		DATE		APPD		UNIT	
				S. Aizawa 96-09-13		mm	
ALPS ELECTRIC CO., LTD.						DSGD. 1-設計1課	
						Y. Saitoh 96-09-13	
						CHKD.	
						M. Satoh 96-09-13	
APPD.						UNIT	
S. Aizawa 96-09-13						mm	
TITLE						DOCUMENT NO.	
9形1軸単連絶縁軸VR						F01	
K091B0Z06							