


FEATURES

- Tight Tolerance of 2% or 0.2 nH
- Self Resonant Frequency controlled within 10%
- Stable Inductance in High Frequency Circuit
- Compatible with either reflow or flow soldering

APPLICATIONS

- Cellular Telephone, Pagers and GPS products
- Wireless LAN and other Communication appliances
- VCO, TCXO circuit and RF Transceiver Module




CONTENTS

PAGE

Mechanical & Schematic	1
Part Numbering	1
Electrical Specs - 0603	2
Electrical Specs - 0402	2
Environmental Characteristics	3
Packaging	3

Available in 2 sizes: 0603 for 1.0 nH to 68 nH
0402 for 1.0 nH to 22 nH

MECHANICAL AND SCHEMATIC (All dimensions in millimeters)




SCHEMATIC



SIZE	Range (nH)	A	B	C	D
0603	1.0 - 68	1.6±0.1	0.8±0.1	0.45±0.1	0.3±0.2
0402	1.0 - 22	1.0±0.05	0.5±0.05	0.35±0.05	0.2±0.1

PART NUMBERING

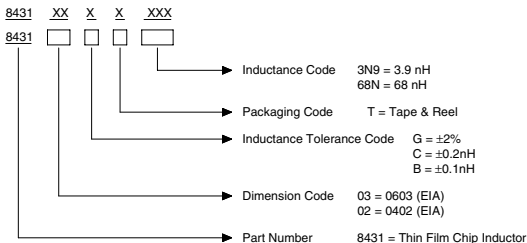

Continued



ELECTRICAL SPECIFICATIONS @ 25 °C

0603 Thin Film Chip Inductors

Inductance Nominal (nH)	Inductance Tolerance (% or nH)	Quality Factor (Min)	Resistance DC/Max (Ω)	Current DC/Max (mA)	Self Resonant Frequency/Min (GHz)
1.0	0.1/0.2nH	17 / 300MHz	0.2	800	6
1.2	0.1/0.2nH	17 / 300MHz	0.2	800	6
1.5	0.1/0.2nH	17 / 300MHz	0.2	800	6
1.8	0.1/0.2nH	17 / 300MHz	0.2	300	6
2.2	0.1/0.2nH	17 / 300MHz	0.2	300	6
2.7	0.1/0.2nH	17 / 300MHz	0.2	300	6
3.3	0.1/0.2nH	17 / 300MHz	0.2	300	6
3.9	0.1/0.2nH	17 / 300MHz	0.2	300	6
4.7	0.1/0.2nH	17 / 300MHz	0.2	300	5
5.6	0.1/0.2nH	17 / 300MHz	0.5	300	5
6.8	0.1/0.2nH	17 / 300MHz	0.5	300	5
8.2	0.1/0.2nH	17 / 300MHz	0.5	300	4
10	2%	15 / 300MHz	1.0	300	4
12	2%	15 / 300MHz	1.0	300	3
15	2%	15 / 300MHz	1.0	300	3
18	2%	15 / 300MHz	2.0	300	2
22	2%	15 / 300MHz	2.0	250	2
27	2%	15 / 300MHz	2.0	250	2
33	2%	15 / 300MHz	2.0	250	1.5
39	2%	15 / 300MHz	3.0	200	1.5
47	2%	15 / 300MHz	3.0	200	1.5
56	2%	15 / 300MHz	5.0	150	1
68	2%	15 / 300MHz	5.0	150	1

ELECTRICAL SPECIFICATIONS @ 25 °C

0402 Thin Film Chip Inductors

Inductance Nominal (nH)	Inductance Tolerance (% or nH)	Quality Factor (Min)	Resistance DC/Max (Ω)	Current DC/Max (mA)	Self Resonant Frequency/Min (GHz)
1.0	0.1/0.2nH	13 / 500MHz	0.1	400	6
1.2	0.1/0.2nH	13 / 500MHz	0.1	390	6
1.5	0.1/0.2nH	13 / 500MHz	0.2	280	6
1.8	0.1/0.2nH	13 / 500MHz	0.2	280	6
2.2	0.1/0.2nH	13 / 500MHz	0.3	220	6
2.7	0.1/0.2nH	13 / 500MHz	0.3	220	6
3.3	0.1/0.2nH	13 / 500MHz	0.4	190	6
3.9	0.1/0.2nH	13 / 500MHz	0.5	170	6
4.7	0.1/0.2nH	13 / 500MHz	0.6	160	6
5.6	0.1/0.2nH	13 / 500MHz	0.7	140	6
6.8	0.1/0.2nH	13 / 500MHz	0.9	130	6
8.2	0.1/0.2nH	13 / 500MHz	1.1	110	5.5
10	2%	13 / 500MHz	1.3	100	4.5
12	2%	13 / 500MHz	1.6	90	3.7
15	2%	13 / 500MHz	1.8	90	3.3
18	2%	13 / 500MHz	2.0	80	3.1
22	2%	13 / 500MHz	2.6	70	2.8

Continued



ENVIRONMENTAL CHARACTERISTICS


	Item	Specification	Test Method
1	Bending Test	$\Delta L \leq 10\%$	Speed of applying force: 1mm/sec, Deflection: 2mm, Hold duration: 30sec
2	Vibration	$\Delta L \leq 10\%$	Oscillation frequency: 10~55~10Hz for 1 min. Total amplitude: 1.5mm, Testing time: 2 hours for 3 directions
3	Resistance to Soldering Heat	$\Delta L \leq 10\%$	270 $\pm$ 5 °C, 10 $\pm$ 1 second
4	High Temperature Exposure	$\Delta L \leq 10\%$	+85 $\pm$ 2 °C, 1000 +48/-0 hours
5	Moisture Resistance	$\Delta L \leq 10\%$	40 $\pm$ 2 °C, 90-95%RH, 1000 +48/-0 hours
6	Low Temperature Storage	$\Delta L \leq 10\%$	+40 $\pm$ 3 °C, 1000 +48/-0 hours
7	Temperature Cycle	$\Delta L \leq 10\%$	-40/RT/85/RT, 10 cycles

PACKAGING

Packaging Quantity

Unit: pcs

Series	Packaging	pcs/wheel
8431-03		5,000
8431-02		10,000




Reel Specifications

Unit: mm

Series	Ø A	Ø B	Ø C	W	T
8431-03	180	60min	13.0 $\pm$ 1.0	9.0 $\pm$ 1.0	11.4 $\pm$ 2.0
8431-02	180	60min	13.0 $\pm$ 1.0	9.0 $\pm$ 1.0	11.4 $\pm$ 2.0

Paper Tape Specifications

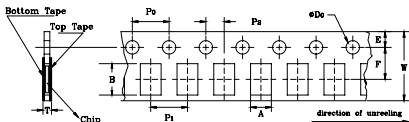

Unit: mm

Series	A	B	W	F	E	P ₁	P ₂	P ₀	ØD ₀	T
8431-03	1.1 $\pm$ 0.1	1.9 $\pm$ 0.1	8.0 $\pm$ 0.2	3.50 $\pm$ 0.05	1.75 $\pm$ 0.01	4.00 $\pm$ 0.01	2.00 $\pm$ 0.05	4.00 $\pm$ 0.10	1.50 $\pm$ 0.01	0.64 $\pm$ 0.1
8431-02	0.65 $\pm$ 0.15	1.15 $\pm$ 0.2	$\pm$ 0.2	$\pm$ 0.05	$\pm$ 0.01	$\pm$ 0.01	$\pm$ 0.05	$\pm$ 0.10	$\pm$ 0.01	0.7 $\pm$ 0.1