

Model FVL328 ProSafe High-Speed VPN Firewall Reference Manual

NETGEAR

NETGEAR, Inc.
4500 Great America Parkway
Santa Clara, CA 95054 USA
Phone 1-888-NETGEAR

M-10144-01
December 2003

© 2003 by NETGEAR, Inc. All rights reserved. FullManual.

Trademarks

NETGEAR and Auto Uplink are trademarks or registered trademarks of NETGEAR, Inc.

Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation.

Other brand and product names are registered trademarks or trademarks of their respective holders. Portions of this document are copyright Intoto, Inc.

Statement of Conditions

In the interest of improving internal design, operational function, and/or reliability, NETGEAR reserves the right to make changes to the products described in this document without notice.

NETGEAR does not assume any liability that may occur due to the use or application of the product(s) or circuit layout(s) described herein.

EN 55 022 Declaration of Conformance

This is to certify that the FVL328 Prosafe High Speed VPN Firewall is shielded against the generation of radio interference in accordance with the application of Council Directive 89/336/EEC, Article 4a. Conformity is declared by the application of EN 55 022 Class B (CISPR 22).

Certificate of the Manufacturer/Importer

It is hereby certified that the FVL328 Prosafe High Speed VPN Firewall has been suppressed in accordance with the conditions set out in the BMPT-AmtsblVfg 243/1991 and Vfg 46/1992. The operation of some equipment (for example, test transmitters) in accordance with the regulations may, however, be subject to certain restrictions. Please refer to the notes in the operating instructions.

The Federal Office for Telecommunications Approvals has been notified of the placing of this equipment on the market and has been granted the right to test the series for compliance with the regulations.

Bestätigung des Herstellers/Importeurs

Es wird hiermit bestätigt, daß das FVL328 Prosafe High Speed VPN Firewall gemäß der im BMPT-AmtsblVfg 243/1991 und Vfg 46/1992 aufgeführten Bestimmungen entstört ist. Das vorschriftsmäßige Betreiben einiger Geräte (z.B. Testsender) kann jedoch gewissen Beschränkungen unterliegen. Lesen Sie dazu bitte die Anmerkungen in der Betriebsanleitung.

Das Bundesamt für Zulassungen in der Telekommunikation wurde davon unterrichtet, daß dieses Gerät auf den Markt gebracht wurde und es ist berechtigt, die Serie auf die Erfüllung der Vorschriften hin zu überprüfen.

Voluntary Control Council for Interference (VCCI) Statement

This equipment is in the second category (information equipment to be used in a residential area or an adjacent area thereto), and conforms to the standards set by the Voluntary Control Council for Interference by Data Processing Equipment and Electronic Office Machines, aimed at preventing radio interference in such residential areas.

When used near a radio or TV receiver, it may become the cause of radio interference.

Read instructions for correct handling.

Technical Support

Refer to the Support Information Card that shipped with your FVL328 Prosafe High Speed VPN Firewall.

World Wide Web

NETGEAR maintains a World Wide Web home page that you can access at the universal resource locator (URL) <http://www.netgear.com>. A direct connection to the Internet and a Web browser such as Internet Explorer or Netscape are required.

Contents

Chapter 1

About This Manual

Audience	1-1
Scope	1-1
Typographical Conventions	1-2
Special Message Formats	1-2
Features of the HTML Version of this Manual	1-3
How to Print this Manual	1-4

Chapter 2

Introduction

About the FVL328	2-1
Summary of New Features in the FVL328	2-1
Key Features	2-1
Virtual Private Networking	2-2
A Powerful, True Firewall	2-2
ICSA Small/Medium Business Category	2-3
Content Filtering	2-3
Configurable Auto Uplink™ Ethernet Connection	2-3
Protocol Support	2-3
Easy Installation and Management	2-4
What's in the Box?	2-5
The Firewall's Front Panel	2-6
The Firewall's Rear Panel	2-7

Chapter 3

Connecting the FVL328 to the Internet

What You Will Need Before You Begin	3-1
LAN Hardware Requirements	3-1
LAN Configuration Requirements	3-1
Internet Configuration Requirements	3-2

Where Do I Get the Internet Configuration Parameters?	3-2
Worksheet for Recording Your Internet Connection Information	3-3
Connecting the FVL328 to Your LAN	3-4
How to Connect the FVL328 to Your LAN	3-4
Configuring for a Wizard-Detected Login Account	3-9
Configuring for a Wizard-Detected Dynamic IP Account	3-11
Configuring for a Wizard-Detected Fixed IP (Static) Account	3-12
Testing Your Internet Connection	3-13
Manually Configuring Your Internet Connection	3-14
How to Complete a Manual Configuration	3-15

Chapter 4

WAN and LAN Configuration

Configuring LAN IP Settings	4-1
Using the Router as a DHCP Server	4-2
How to Configure LAN TCP/IP Setup Settings	4-3
How to Configure Reserved IP Addresses	4-4
Configuring WAN Settings	4-4
Connecting Automatically, as Required	4-5
Setting Up a Default DMZ Server	4-5
How to Assign a Default DMZ Server	4-5
Responding to Ping on Internet WAN Port	4-6
How to Set the MTU Size	4-6
Configuring Dynamic DNS	4-6
How to Configure Dynamic DNS	4-7
Using Static Routes	4-7
Static Route Example	4-7
How to Configure Static Routes	4-8

Chapter 5

Protecting Your Network

Protecting Access to Your FVL328 Firewall	5-1
How to Change the Built-In Password	5-1
How to Change the Administrator Login Timeout	5-2
Configuring Basic Firewall Services	5-2
Blocking Keywords, Sites, and Services	5-3
How to Block Keywords and Sites	5-3

Using Firewall Rules to Regulate Network Traffic	5-5
Rules Menu Options	5-6
Using Inbound Rules (Port Forwarding)	5-7
Inbound Rule Example: A Local Public Web Server	5-7
Inbound Rule Example: Videoconferencing from Restricted Addresses	5-9
Considerations for Inbound Rules	5-9
Using Outbound Rules (Service Blocking)	5-10
Outbound Rule Example: Blocking Instant Messenger	5-10
Understanding the Order of Precedence for Rules	5-12
Regulating Access to Network Services	5-12
How to Define Services	5-13
Setting Times and Scheduling Firewall Services	5-14
How to Set Your Time Zone	5-14
How to Schedule Firewall Services	5-16

Chapter 6

Virtual Private Networking

Overview of FVL328 Policy-Based VPN Configuration	6-1
Using Policies to Manage VPN Traffic	6-1
Using Automatic Key Management	6-2
IKE Policies' Automatic Key and Authentication Management	6-3
VPN Policy Configuration for Auto Key Negotiation	6-6
VPN Policy Configuration for Manual Key Exchange	6-9
Using Digital Certificates for IKE Auto-Policy Authentication	6-14
Certificate Revocation List (CRL)	6-14
Walk-Through of Configuration Scenarios	6-15
VPNC Scenario 1: Gateway-to-Gateway with Preshared Secrets	6-15
FVL328 Scenario 1: How to Configure the IKE and VPN Policies	6-17
How to Check VPN Connections	6-21
FVL328 Scenario 2: Authenticating with RSA Certificates	6-22

Chapter 7

Managing Your Network

Network Management	7-1
How to Configure Remote Management	7-1
Viewing Router Status and Usage Statistics	7-3
Viewing Attached Devices	7-5

Viewing, Selecting, and Saving Logged Information	7-6
Changing the Include in Log Settings	7-8
Enabling the Syslog Feature	7-8
Enabling Security Event E-mail Notification	7-9
Backing Up, Restoring, or Erasing Your Settings	7-10
How to Back Up the FVL328 Configuration to a File	7-10
How to Restore a Configuration from a File	7-11
How to Erase the Configuration	7-11
Running Diagnostic Utilities and Rebooting the Router	7-12
Upgrading the Router's Firmware	7-13
How to Upgrade the Router	7-14

Chapter 8

Troubleshooting

Basic Functions	8-1
Power LED Not On	8-2
Test LED Never Turns On or Test LED Stays On	8-2
Local or Internet Port Link LEDs Not On	8-3
Troubleshooting the Web Configuration Interface	8-3
Troubleshooting the ISP Connection	8-4
Troubleshooting a TCP/IP Network Using a Ping Utility	8-5
How to Test the LAN Path to Your Firewall	8-6
How to Test the Path from Your PC to a Remote Device	8-6
Restoring the Default Configuration and Password	8-7
How to Use the Default Reset Button	8-7
Problems with Date and Time	8-8

Appendix A

Technical Specifications

Appendix B

Networks, Routing, and Firewall Basics

Related Publications	B-1
Basic Router Concepts	B-1
What is a Router?	B-1
Routing Information Protocol	B-2
IP Addresses and the Internet	B-2
Netmask	B-4

Subnet Addressing	B-4
Private IP Addresses	B-7
Single IP Address Operation Using NAT	B-7
MAC Addresses and Address Resolution Protocol	B-9
Related Documents	B-9
Domain Name Server	B-9
IP Configuration by DHCP	B-10
Internet Security and Firewalls	B-10
What is a Firewall?	B-11
Stateful Packet Inspection	B-11
Denial of Service Attack	B-11
Ethernet Cabling	B-12
Uplink Switches and Crossover Cables	B-12
Cable Quality	B-13

Appendix C

Preparing Your Network

Preparing Your Computers for TCP/IP Networking	C-1
Configuring Windows 95, 98, and Me for TCP/IP Networking	C-2
Install or Verify Windows Networking Components	C-2
Enabling DHCP to Automatically Configure TCP/IP Settings	C-4
Selecting Windows' Internet Access Method	C-4
Verifying TCP/IP Properties	C-5
Configuring Windows NT, 2000 or XP for IP Networking	C-5
Installing or Verifying Windows Networking Components	C-5
Verifying TCP/IP Properties	C-6
Configuring the Macintosh for TCP/IP Networking	C-6
MacOS 8.6 or 9.x	C-6
MacOS X	C-7
Verifying TCP/IP Properties for Macintosh Computers	C-8
Verifying the Readiness of Your Internet Account	C-9
Are Login Protocols Used?	C-9
What Is Your Configuration Information?	C-9
Obtaining ISP Configuration Information for Windows Computers	C-10
Obtaining ISP Configuration Information for Macintosh Computers	C-11
Restarting the Network	C-12

Appendix D

Firewall Log Formats

Action List	D-1
Field List	D-1
Outbound Log	D-1
Inbound Log	D-2
Other IP Traffic	D-2
Router Operation	D-3
Other Connections and Traffic to this Router	D-4
DoS Attack/Scan	D-4
Access Block Site	D-6
All Web Sites and News Groups Visited	D-6
System Admin Sessions	D-6
Policy Administration LOG	D-7

Appendix E

Virtual Private Networking

What is a VPN?	E-1
What Is IPSec and How Does It Work?	E-2
IPSec Security Features	E-2
IPSec Components	E-2
Encapsulating Security Payload (ESP)	E-3
Authentication Header (AH)	E-4
IKE Security Association	E-4
Mode	E-5
Key Management	E-6
Understand the Process Before You Begin	E-6
VPN Process Overview	E-7
Network Interfaces and Addresses	E-7
Interface Addressing	E-7
Firewalls	E-8
Setting Up a VPN Tunnel Between Gateways	E-8
VPNC IKE Security Parameters	E-10
VPNC IKE Phase I Parameters	E-10
VPNC IKE Phase II Parameters	E-11
Testing and Troubleshooting	E-11

Additional Reading	E-11
Appendix F	
NETGEAR VPN Configuration	
FVS318 or FVM318 to FVL328	
Configuration Template	F-1
Step-By-Step Configuration of FVS318 or FVM318 Gateway A	F-2
Step-By-Step Configuration of FVL328 Gateway B	F-5
Test the VPN Connection	F-10
Appendix G	
FVL328 to Windows 2000 Server	
and SSH Sentinel VPN Configuration	
Configuring FVL328 to Windows 2000 Server VPN	G-1
Windows 2000 Server configuration	G-1
Create an IP Security Policy called DUT To Win2K	G-1
Create an IP Filter called To DUT	G-3
Create an IP Filter Called To Win2K	G-7
Configure the General Properties	G-12
Configure the FVL328 IKE policy	G-14
Configure the FVL328 VPN policy	G-15
FVL328 to SSH Sentinel 1.3 Remote VPN	G-16
Create the FVL328 IKE Policy	G-23
Create the FVL328 VPN Policy	G-23
Ping a PC to Bring Up the Tunnel	G-24
Appendix H	
NETGEAR VPN Client	
to NETGEAR FVL328 or FWAG114 VPN Router	
Configuration Profile	H-1
Step-By-Step Configuration of FVL328 or FWAG114 Gateway	H-2
Step-By-Step Configuration of the NETGEAR VPN Client B	H-7
Testing the VPN Connection	H-14
From the Client PC to the FVL328	H-14
From the FVL328 to the Client PC	H-15
Monitoring the PC VPN Connection	H-15
Viewing the FVL328 VPN Status and Log Information	H-17

Appendix I
NETGEAR VPN Configuration
FVS318 or FVM318 with FQDN to FVL328

Configuration Template	I-1
Using DDNS and Fully Qualified Domain Names (FQDN)	I-2
Step-By-Step Configuration of FVS318 or FVM318 Gateway A	I-3
Step-By-Step Configuration of FVL328 Gateway B	I-7
Test the VPN Connection	I-12

Glossary
Index

Chapter 1

About This Manual

This chapter introduces the NETGEAR FVL328 Prosafe High Speed VPN Firewall manual.

Audience

This reference manual assumes that the reader has basic to intermediate computer and Internet skills. However, basic computer network, Internet, firewall, and VPN technology tutorial information is provided in the Appendices and on the NETGEAR Web site.

Scope

This manual is written for the FVL328 Firewall according to these specifications.:

Table 1-1. Manual Specifications

Product Version	FVL328 Prosafe High Speed VPN Firewall
Firmware Version Number	Version 1.5 Release 07
Manual Part Number	M-10144-01
Manual Publication Date	December 2003



Note: Product updates are available on the NETGEAR Web site at www.netgear.com/support/main.asp. Documentation updates are available on the NETGEAR, Inc. Web site at www.netgear.com/docs.

Typographical Conventions


This guide uses the following typographical conventions:

Table 1-2. Typographical conventions

<i>italics</i>	Emphasis.
bold times roman	User input.
[Enter]	Named keys in text are shown enclosed in square brackets. The notation [Enter] is used for the Enter key and the Return key.
Small Caps	DOS file and directory names.

Special Message Formats

This guide uses the following formats to highlight special messages:

	Note: This format is used to highlight information of importance or special interest.
---	--

Features of the HTML Version of this Manual

The HTML version of this manual includes these features.

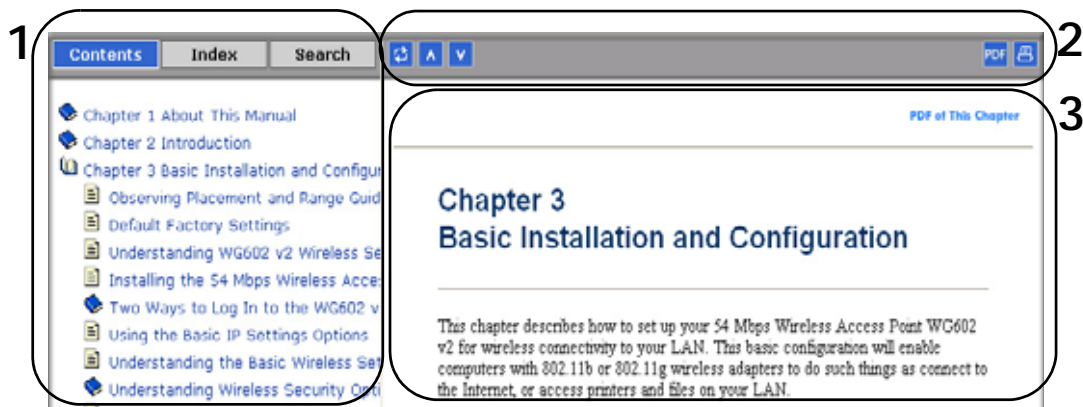






Figure Preface 1-1: HTML version of this manual

1. **Left pane.** Use the left pane to view the Contents, Index, Search, and Favorites tabs.

To view the HTML version of the manual, you must have a version 4 or later browser with JavaScript enabled.

2. **Toolbar buttons.** Use the toolbar buttons across the top to navigate, print pages, and more.

-  The *Show in Contents* button locates the current topic in the Contents tab.
-  *Previous/Next* buttons display the previous or next topic.
-  The *PDF* button links to a PDF version of the full manual.
-  The *Print* button prints the current topic. Using this button when a step-by-step procedure is displayed will send the entire procedure to your printer—you do not have to worry about specifying the correct range of pages.

3. **Right pane.** Use the right pane to view the contents of the manual. Also, each page of the manual includes a [PDF of This Chapter](#) link at the top right which links to a PDF file containing just the currently selected chapter of the manual.

How to Print this Manual

To print this manual you can choose one of the following several options, according to your needs.

- **Printing a “How To” Sequence of Steps in the HTML View.** Use the *Print* button on the upper right side of the toolbar to print the currently displayed topic. Using this button when a step-by-step procedure is displayed will send the entire procedure to your printer—you do not have to worry about specifying the correct range of pages.
- **Printing a Chapter.** Use the [PDF of This Chapter](#) link at the top right of any page.
 - Click the “PDF of This Chapter” link at the top right of any page in the chapter you want to print. A new browser window opens showing the PDF version of the chapter you were viewing.
 - Click the print icon in the upper left of the window.
 - **Tip:** If your printer supports printing two pages on a single sheet of paper, you can save paper and printer ink by selecting this feature.
- **Printing the Full Manual.** Use the PDF button in the toolbar at the top right of the browser window.
 - Click the PDF button. A new browser window opens showing the PDF version of the chapter you were viewing.
 - Click the print icon in the upper left side of the window.
 - **Tip:** If your printer supports printing two pages on a single sheet of paper, you can save paper and printer ink by selecting this feature.

Chapter 2

Introduction

This chapter describes the features of the NETGEAR FVL328 Prosafe High Speed VPN Firewall. The FVL328 Firewall is now ICSA certified. It provides connection for multiple computers to the Internet through an external broadband access device (such as a cable modem or DSL modem) and supports IPSec-based secure tunnels to IPSec-compatible VPN servers.

About the FVL328

The FVL328 is a complete security solution that protects your network from attacks and intrusions and enables secure communications using Virtual Private Networks (VPN). Unlike simple Internet sharing routers that rely on Network Address Translation (NAT) for security, the FVL328 uses Stateful Packet Inspection for Denial of Service (DoS) attack protection and intrusion detection. The 8-port FVL328 provides highly reliable Internet access for up to 253 users with up to 100 concurrent VPN tunnels.

Summary of New Features in the FVL328

The NETGEAR FVL328 VPN ProSafe Firewall contains many new features, including:

- ICSA Certified, Small/Medium Business (SMB) Category
- VPNC Certified
- Enhanced Logging

Key Features

The FVL328 features are highlighted below.

Virtual Private Networking

The FVL328 Firewall provides a secure encrypted connection between your local network and remote networks or clients. Its VPN features include:

- Support for up to 100 simultaneous VPN connections.
- Support for industry standard VPN protocols.
The FVL328 Prosafe High Speed VPN Firewall supports standard keying methods (Manual or IKE), standard authentication methods (MD5 and SHA-1), and standard encryption methods (DES, 3DES). It is compatible with many other VPN products.
- Support for up to 168 bit encryption (3DES) for maximum security.
- Support for VPN Main Mode, Aggressive mode, or Manual Keying.
- Support for Fully Qualified Domain Name (FQDN) configuration when the Dynamic DNS feature is enabled with one of the supported service providers.
- VPNC Certified

A Powerful, True Firewall

Unlike simple Internet sharing NAT routers, the FVL328 is a true firewall, using stateful packet inspection to defend against hacker attacks. Its firewall features include:

- DoS protection
Automatically detects and thwarts DoS attacks such as Ping of Death, SYN Flood, LAND Attack and IP Spoofing.
- Blocks unwanted traffic from the Internet to your LAN.
- Blocks access from your LAN to Internet locations or services that you specify as off-limits.
- Logs security incidents
The FVL328 will log security events such as blocked incoming traffic, port scans, attacks, and administrator logins. You can configure the firewall to e-mail the log to you at specified intervals. You can also configure the firewall to send immediate alert messages to your e-mail address or e-mail pager whenever a significant event occurs.
- ICSA Certified, Small/Medium Business (SMB) Category version 4.0

ICSA Small/Medium Business Category

The NETGEAR FVL328 provides meets the ICSA SMB Category by providing Remote Administration over an encrypted link from a public source. Additionally, the firewall provides a default security policy denying all inbound non-Remote Administration related traffic originating from public network sources while allowing a set of common services outbound.

The FVL328 enforces another security policy allowing a standard set of services inbound and outbound. Therefore, a means to configure Access Control Rules will be available on the product

Content Filtering

With its content filtering feature, the FVL328 prevents objectionable content from reaching your computers. The firewall allows you to control access to Internet content by screening for keywords within Web addresses. You can configure the firewall to log and report attempts to access objectionable Internet sites.

Configurable Auto Uplink™ Ethernet Connection

With its internal 8-port 10/100 switch, the FVL328 can connect to either a 10 Mbps standard Ethernet network or a 100 Mbps Fast Ethernet network. Both the local LAN and the Internet WAN interfaces are 10/100 Mbps, autosensing, and capable of full-duplex or half-duplex operation.

The firewall incorporates Auto Uplink™ technology. Each local Ethernet port will automatically sense whether the Ethernet cable plugged into the port should have a 'normal' connection such as to a PC or an 'uplink' connection such as to a switch or hub. That port will then configure itself to the correct configuration. This feature also eliminates the need to worry about crossover cables, as Auto Uplink will accommodate either type of cable to make the right connection.

Protocol Support

The FVL328 supports the Transmission Control Protocol/Internet Protocol (TCP/IP) and Routing Information Protocol (RIP). [Appendix B, "Networks, Routing, and Firewall Basics"](#) provides further information on TCP/IP. Supported protocols include:

- **The Ability to Enable or Disable IP Address Sharing by NAT**
The FVL328 allows several networked computers to share an Internet account using only a single IP address, which may be statically or dynamically assigned by your Internet service provider (ISP). This technique, known as NAT, allows the use of an inexpensive single-user ISP account. This feature can also be turned off completely for using the FVL328 in settings where you want to manage the IP address scheme of your organization.
- **Automatic Configuration of Attached computers by DHCP**
The FVL328 dynamically assigns network configuration information, including IP, gateway, and domain name server (DNS) addresses, to attached computers using Dynamic Host Configuration Protocol (DHCP). This feature greatly simplifies configuration of computers on your local network.
- **DNS Proxy**
When DHCP is enabled and no DNS addresses are specified, the firewall provides its own address as a DNS server to the attached computers. The firewall obtains actual DNS addresses from the ISP during connection setup and forwards DNS requests from the LAN.
- **PPP over Ethernet (PPPoE)**
PPPoE is a protocol for connecting remote hosts to the Internet over a DSL connection by simulating a dial-up connection. This feature eliminates the need to run a login program such as EnterNet or WinPOET on your computer.
- **Point-to-Point Tunneling Protocol PPTP login support for European ISPs and BigPond login for Telstra cable in Australia.**
- **Dynamic DNS**
Dynamic DNS services allow remote users to find your network using a domain name when your IP address is not permanently assigned. The firewall contains a client that can connect to many popular Dynamic DNS services to register your dynamic IP address. See [“Configuring Dynamic DNS” on page 4-6](#).

Easy Installation and Management

You can install, configure, and operate the FVL328 within minutes after connecting it to the network. The following features simplify installation and management tasks:

- **Browser-based management**
Browser-based configuration allows you to easily configure your firewall from almost any type of personal computer, such as Windows, Macintosh, or Linux. A user-friendly Setup Wizard is provided and online help documentation is built into the browser-based Web Management Interface.

- **Smart Wizard**
The firewall automatically senses the type of Internet connection, asking you only for the information required for your type of ISP account.
- **Remote management**
The firewall allows you to login to the Web Management Interface from a remote location via the Internet using secure SLL protocol. For security, you can limit remote management access to a specified remote IP address or range of addresses, and you can choose a nonstandard port number.
- **Diagnostic functions**
The firewall incorporates built-in diagnostic functions such as Ping, DNS lookup, and remote reboot. These functions allow you to test Internet connectivity and reboot the firewall. You can use these diagnostic functions directly from the FVL328 when you are connected on the LAN or when you are connected over the Internet via the remote management function.
- **Visual monitoring**
The firewall's front panel LEDs provide an easy way to monitor its status and activity.
- **Flash EPROM for firmware upgrades**



Note: Product updates are available on the NETGEAR Web site at www.netgear.com/support/main.asp.

- Includes a battery-backed real-time clock so time will persist if power is removed
- Regional support, including ISPs like Telstra DSL and BigPond or Deutsche Telekom.

What's in the Box?

The product package should contain the following items:

- FVL328 Prosafe High Speed VPN Firewall
- AC power adapter
- FVL328 *Resource CD (SW-10018-01)*, including:
 - This manual
 - Application notes, tools, and other helpful information
- Warranty and registration card

- Support information card

If any of the parts are incorrect, missing, or damaged, contact your NETGEAR dealer. Keep the carton, including the original packing materials, in case you need to return the product for repair.



Note: Product updates are available on the NETGEAR, Inc. Web site at <http://www.netgear.com/support/main.asp>. Documentation updates are available on the NETGEAR, Inc. Web site at <http://www.netgear.com/docs>.

The Firewall's Front Panel

The front panel of the FVL328 (Figure 2-1) contains status LEDs.



Figure 2-1: FVL328 Front Panel

You can use some of the LEDs to verify connections. Table 2-1 lists and describes each LED on the front panel of the firewall.

These LEDs are green when lit, except for the TEST LED, which is amber.

Table 2-1: LED Descriptions

Label	Activity	Description
POWER	On	Power is supplied to the firewall.
TEST	On Off	The system is initializing. The system is ready and running.
INTERNET 100 LINK/ACT (Activity)	On/Blinking On/Blinking	The Internet port is operating at 100 Mbps. The port detected a link with the Internet WAN connection and is operating at 10 Mbps. Blinking indicates data transmission.
LOCAL		

Table 2-1: LED Descriptions

100	On/Blinking	The Local port is operating at 100 Mbps.
LINK/ACT (Link/Activity)	On/Blinking	The Local port has detected a link with a LAN connection and is operating at 10 Mbps. Blinking indicates data transmission.

The Firewall's Rear Panel

The rear panel of the FVL328 ([Figure 2-2](#)) contains the connections identified below.

**Figure 2-2: FVL328 Rear Panel**

Viewed from left to right, the rear panel contains the following elements:

- Factory Default Reset push button
- Eight Local Ethernet RJ-45 ports for connecting the firewall to local computers
- Internet WAN Ethernet RJ-45 port for connecting the firewall to a cable or DSL modem
- AC power adapter input
-

Chapter 3

Connecting the FVL328 to the Internet

This chapter describes how to set up the firewall on your Local Area Network (LAN) and connect to the Internet. You can perform basic configuration of your FVL328 Prosafe High Speed VPN Firewall using the Setup Wizard, or manually configure your Internet connection.

What You Will Need Before You Begin

You need to prepare these three things before you can connect your firewall to the Internet:

1. A computer properly connected to the firewall as explained below.
2. Active Internet service such as that provided by a DSL or Cable modem account.
3. The Internet Service Provider (ISP) configuration information for your account.

LAN Hardware Requirements

The FVL328 Firewall connects to your LAN via twisted-pair Ethernet cables.

To use the FVL328 Firewall on your network, each computer must have an installed Ethernet Network Interface Card (NIC) and an Ethernet cable. If the computer will connect to your network at 100 Mbps, you must use a Category 5 (CAT5) cable such as the one provided with your firewall.

The broadband modem must provide a standard 10 Mbps 10BASE-T or 100 Mbps 100BASE-T Ethernet interface.

LAN Configuration Requirements

For the initial connection to the Internet and configuration of your firewall, you will need to connect a computer to the firewall which is set to automatically get its TCP/IP configuration from the firewall via DHCP. The computer you use must have a Web browser such as Internet Explorer v5 or greater or Netscape Communicator v4.7 or greater.

Note: Please refer to [Appendix C, "Preparing Your Network"](#) for assistance with DHCP configuration.

Internet Configuration Requirements

Depending on how your ISP or IT group set up your Internet access, you will need one or more of these configuration parameters to connect your firewall to the Internet:

- Host and Domain Names
- ISP Login Name and Password
- ISP Domain Name Server (DNS) Addresses
- Fixed or Static IP Address

Where Do I Get the Internet Configuration Parameters?

There are several ways you can gather the required Internet connection information.

- Your ISP should have provided you with all the information needed to connect to the Internet. If you cannot locate this information, you can ask your ISP to provide it or you can try one of the options below.
- If you have a computer already connected using the active Internet access account, you can gather the configuration information from that computer.
 - For Windows 95/98/Me, open the Network control panel, select the TCP/IP entry for the Ethernet adapter, and click Properties.
 - For Windows 2000/XP, open the Local Area Network Connection, select the TCP/IP entry for the Ethernet adapter, and click Properties.
 - For Macintosh computers, open the TCP/IP or Network control panel.
- You may also refer to the FVL328 *Resource CD* for the NETGEAR Router ISP Guide which provides Internet connection information for many ISPs.

Once you locate your Internet configuration parameters, you may want to record them on the page below according to the instructions in [“Worksheet for Recording Your Internet Connection Information”](#) on page 3-3.

Worksheet for Recording Your Internet Connection Information

Print this page. Fill in the configuration parameters from your Internet Service Provider (ISP).

ISP Login Name: The login name and password are case sensitive and must be entered exactly as given by your ISP. Some ISPs use your full e-mail address as the login name. The Service Name is not required by all ISPs. If you connect using a login name and password, then fill in the following:

Login Name: _____ Password: _____

Service Name: _____

Fixed or Static IP Address: If you have a static IP address, record the following information. For example, **169.254.141.148** could be a valid IP address.

Fixed or Static Internet IP Address: _____._____._____._____

Subnet Mask: _____._____._____._____

Gateway IP Address: _____._____._____._____

ISP DNS Server Addresses: If you were given DNS server addresses, fill in the following:

Primary DNS Server IP Address: _____._____._____._____

Secondary DNS Server IP Address: _____._____._____._____

Host and Domain Names: Some ISPs use a specific host or domain name like **CCA7324-A** or **home**. If you haven't been given host or domain names, you can use the following examples as a guide:

- If your main e-mail account with your ISP is **aaa@yyy.com**, then use **aaa** as your host name. Your ISP might call this your account, user, host, computer, or system name.
- If your ISP's mail server is **mail.xxx.yyy.com**, then use **xxx.yyy.com** as the domain name.

ISP Host Name: _____ ISP Domain Name: _____

Connecting the FVL328 to Your LAN

This section provides instructions for connecting the FVL328 Prosafe High Speed VPN Firewall to your Local Area Network (LAN).

Note: The Resource CD included with your firewall contains an animated Installation Assistant to help you through this procedure.

How to Connect the FVL328 to Your LAN

There are three steps to connecting your firewall:

- Connect the firewall to your network.
- Log in to the firewall.
- Connect to the Internet.

Follow the steps below to connect your firewall to your network.

1. Connect the FVL328.

- a. Turn off your computer and cable or DSL modem.
- b. Disconnect the Ethernet cable (A) from your computer which connects to your cable or DSL modem.

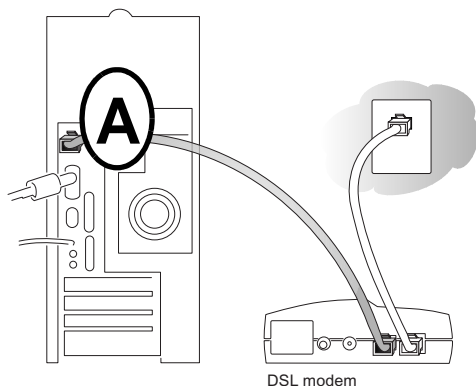


Figure 3-1: Disconnect the cable or DSL modem

- c. Connect the Ethernet cable (A) from your cable or DSL modem to the FVL328's Internet port.

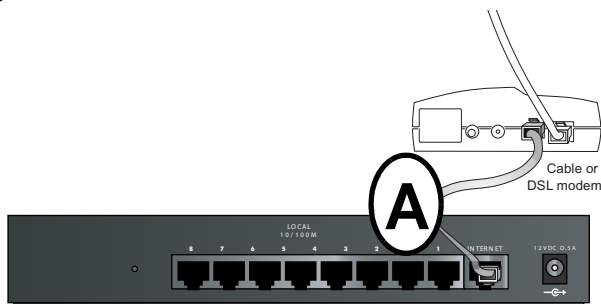


Figure 3-2: Connect the cable or DSL modem to the firewall

- d. Connect the Ethernet cable (B) which came with the firewall from a Local port on the router to your computer.

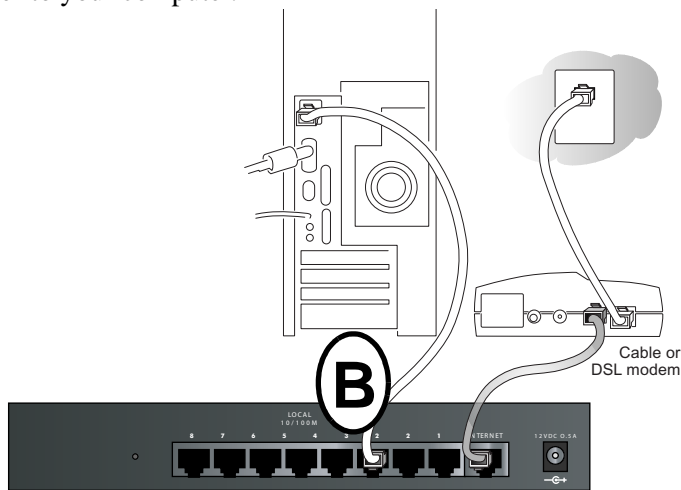


Figure 3-3: Connect the computers on your network to the firewall

Note: The FVL328 Firewall incorporates Auto Uplink™ technology. Each Ethernet port will automatically sense whether the cable plugged into the port should have a 'normal' connection (e.g. connecting to a PC) or an 'uplink' connection (e.g. connecting to a switch or hub). That port will then configure itself to the correct configuration. This feature also eliminates the need to worry about crossover cables, as Auto Uplink will accommodate either type of cable to make the right connection.

- e. Turn on the cable or DSL modem and wait about 30 seconds for the lights to stop blinking.

2. Log in to the FVL328.

Note: To connect to the firewall, your computer needs to be configured to obtain an IP address automatically via DHCP. Please refer to [Appendix C, "Preparing Your Network"](#) for instructions on how to do this.

- a. Turn on the firewall and wait for the TEST light to stop blinking.
- b. Now, turn on your computer.

Note: If you usually run software to log in to your Internet connection, do not run that software.

Now that the cable or DSL modem, firewall, and the computer are turned on, verify the following:

- When power on the firewall was first turned on, the PWR light went on, the TEST light turned on within a few seconds, and then went off after approximately 10 seconds.
 - The firewall's LOCAL LINK/ACT lights are lit for any computers that are connected to it.
 - The firewall's INTERNET LINK light is lit, indicating a link has been established to the cable or DSL modem.
- c. Next, use a browser like Internet Explorer or Netscape to log in to the firewall at its default address of <http://192.168.0.1>.



Figure 3-4: Log in to the firewall

A login window opens as shown in [Figure 3-5](#) below:



Figure 3-5: Login window

- d. For security reasons, the firewall has its own user name and password. When prompted, enter **admin** for the firewall User Name and **password** for the firewall Password, both in lower case letters. This default password should be changed later, as described in [“Protecting Access to Your FVL328 Firewall” on page 5-1](#).

Note: The user name and password are not the same as any user name or password you may use to log in to your Internet connection.

3. Connect to the Internet.

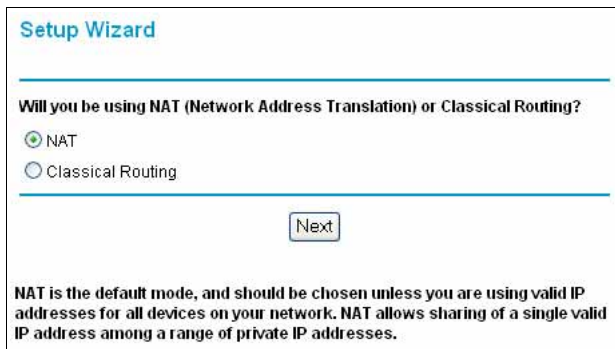


Figure 3-6: Setup Wizard

- a. You are now connected to the firewall. If you do not see the menu above, click the Setup Wizard link on the upper left of the main menu.
- b. Choose NAT or Classical Routing. NAT automatically assigns private IP addresses (192.168.0.x) to LAN connected devices. Classical routing lets you directly manage the IP addresses the FVL328 uses. Classical routing should be selected only by experienced users.
- c. Click Next and follow the steps in the Setup Wizard for inputting the configuration parameters from your ISP to connect to the Internet.

Note: If you choose not to use the Setup Wizard, you can manually configure your Internet connection settings by following the procedure [“Manually Configuring Your Internet Connection” on page 3-14](#).


Unless your ISP automatically assigns your configuration automatically via DHCP, you will need the configuration parameters from your ISP as you recorded them previously in [“Worksheet for Recording Your Internet Connection Information” on page 3-3](#)

- d. When the firewall successfully detects an active Internet service, the firewall’s Internet LED goes on. The Setup Wizard reports which connection type it discovered, and displays the appropriate configuration menu. If the Setup Wizard finds no connection, you will be prompted to check the physical connection between your firewall and the cable or DSL line.
- e. The Setup Wizard will report the type of connection it finds. The options are:
 - Connections that require a login using protocols such as PPPoE, Telstra BigPond, or PPTP broadband Internet connections.
 - Connections that use dynamic IP address assignment.
 - Connections that use fixed IP address assignment.

The procedures for filling in the configuration menu for each type of connection follow below.

Configuring for a Wizard-Detected Login Account

If the Setup Wizard determines that your Internet service account uses a login protocol such as PPP over Ethernet (PPPoE), you will be directed to a menu like the PPPoE menu in [Figure 3-7](#):

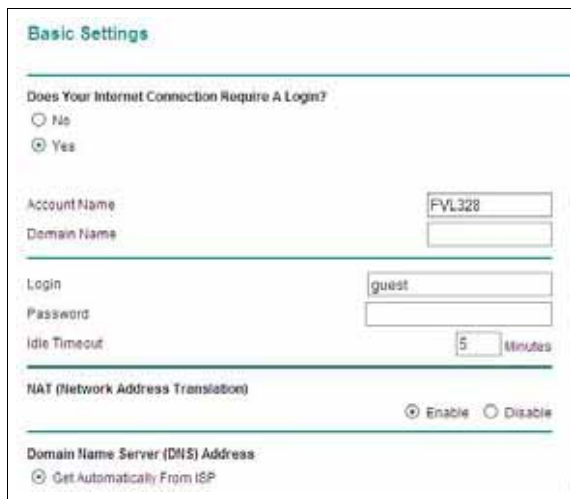

The screenshot shows a web-based configuration interface titled "Basic Settings". It contains several sections: "Does Your Internet Connection Require A Login?" with radio buttons for "No" and "Yes" (selected); "Account Name" with a text box containing "FVL328"; "Domain Name" with an empty text box; "Login" with a text box containing "guest"; "Password" with an empty text box; "Idle Timeout" with a text box containing "5" and the unit "minutes"; "NAT (Network Address Translation)" with radio buttons for "Enable" (selected) and "Disable"; and "Domain Name Server (DNS) Address" with a radio button for "Get Automatically From ISP" (selected).

Figure 3-7: Setup Wizard menu for PPPoE login accounts

1. Enter your Account Name (may also be called Host Name) and Domain Name. These parameters may be necessary to access your ISP's services such as mail or news servers. If you leave the Domain Name field blank, the firewall will attempt to learn the domain automatically from the ISP. If this is not successful, you may need to enter it manually.
2. Enter the PPPoE login user name and password provided by your ISP. These fields are case sensitive. If you want to change the login timeout, enter a new value in minutes.

Note: You will no longer need to launch the ISP's login program on your computer in order to access the Internet. When you start an Internet application, the firewall will automatically log you in.

3. Enable or disable NAT (Network Address Translation). NAT allows all LAN computers to gain Internet access via this Router, by sharing this Router's WAN IP address. In most situations, NAT is essential for Internet access via this Router. You should only disable NAT if you are sure you do not require it. When NAT is disabled, only standard routing is performed by this Router.

4. Perform a DNS Lookup. A DNS (Domain Name Server) converts the Internet name (e.g. www.netgear.com) to an IP address. If you need the IP address of a Web, FTP, Mail or other Server on the Internet, you can do a DNS lookup to find the IP address.

Domain Name Server (DNS) Address: If you know that your ISP does not automatically transmit DNS addresses to the firewall during login, select “Use these DNS servers” and enter the IP address of your ISP’s Primary DNS Server. If a Secondary DNS Server address is available, enter it also.

If you enter an address here, after you finish configuring the firewall, reboot your computers so that the settings take effect.

5. Enter the Router's MAC Address. Each computer or router on your network has a unique 32-bit local Ethernet address. This is also referred to as the computer's MAC (Media Access Control) address. Usually, select Use default address.

If your ISP requires MAC authentication, then select either Use this Computer's MAC address to have the router use the MAC address of the computer you are now using, or Use This MAC Address to manually type in the MAC address that your ISP expects.

6. Click Apply to save your settings.
7. Click the Test button to test your Internet connection. If the NETGEAR Web site does not appear within one minute, refer to [Chapter 8, Troubleshooting](#).

Configuring for a Wizard-Detected Dynamic IP Account

If the Setup Wizard determines that your Internet service account uses Dynamic IP assignment, you will be directed to the menu shown in [Figure 3-8](#) below:

Figure 3-8: Setup Wizard menu for Dynamic IP address

1. Enter your Account Name (may also be called Host Name) and Domain Name. These parameters may be necessary to access your ISP's services such as mail or news servers. If you leave the Domain Name field blank, the firewall will attempt to learn the domain automatically from the ISP. If this is not successful, you may need to enter it manually.
2. If you know that your ISP does not automatically transmit DNS addresses to the firewall during login, select "Use these DNS servers" and enter the IP address of your ISP's Primary DNS Server. If a Secondary DNS Server address is available, enter it also.

A DNS server is a host on the Internet that translates Internet names (such as www.netgear.com) to numeric IP addresses. Typically your ISP transfers the IP address of one or two DNS servers to your firewall during login. If the ISP does not transfer an address, you must obtain it from the ISP and enter it manually here. If you enter an address here, you should reboot your computers after configuring the firewall.

3. The Router's MAC Address is the Ethernet MAC address that will be used by the firewall on the Internet port.


If your ISP allows access from only one specific computer's Ethernet MAC address, select "Use this MAC address." The firewall will then capture and use the MAC address of the computer that you are now using. You must be using the one computer that is allowed by the ISP. Otherwise, you can type in a MAC address.

Note: Some ISPs will register the Ethernet MAC address of the network interface card in your computer when your account is first opened. They will then only accept traffic from the MAC address of that computer. This feature allows your firewall to masquerade as that computer by using its MAC address.

4. Click Apply to save your settings.
5. Click the Test button to test your Internet connection. If the NETGEAR Web site does not appear within one minute, refer to [Chapter 8, Troubleshooting](#).

Configuring for a Wizard-Detected Fixed IP (Static) Account

If the Setup Wizard determines that your Internet service account uses Fixed IP assignment, you will be directed to the menu shown in [Figure 3-9](#) below:



The screenshot shows a web-based configuration interface for a firewall. It includes fields for Account Name (set to FVL328) and Domain Name. The NAT (Network Address Translation) section has 'Enable' selected. Under Internet IP Address, 'Use Static IP Address' is selected, with fields for IP Address (44.222.133.134), IP Subnet Mask (255.255.255.240), and Gateway IP Address (44.222.133.134). The Domain Name Server (DNS) section has 'Use These DNS Servers' selected, with fields for Primary DNS (44.222.133.134) and Secondary DNS. The Router's MAC Address section has 'Use This Computer's MAC' selected. At the bottom are Apply, Cancel, and Test buttons.

Figure 3-9: Setup Wizard menu for Fixed IP address

1. Enter your assigned IP Address, Subnet Mask, and the IP Address of your ISP's gateway router. This information should have been provided to you by your ISP. You will need the configuration parameters from your ISP you recorded in "[Worksheet for Recording Your Internet Connection Information](#)" on page 3-3.

2. Enter the IP address of your ISP's Primary DNS Server. If a Secondary DNS Server address is available, enter it also.

DNS servers are required to perform the function of translating an Internet name such as www.netgear.com to a numeric IP address. For a fixed IP address configuration, you must obtain DNS server addresses from your ISP and enter them manually here. You should reboot your computers after configuring the firewall for these settings to take effect.

3. Click Apply to save the settings.
4. Click the Test button to test your Internet connection. If the NETGEAR Web site does not appear within one minute, refer to [Chapter 8, Troubleshooting](#).

Testing Your Internet Connection

After completing the Internet connection configuration, you can test your Internet connection. Log in to the firewall, then, from the Setup Basic Settings link, click the Test button. If the NETGEAR Web site does not appear within one minute, refer to [Chapter 8, Troubleshooting](#).

Your firewall is now configured to provide Internet access for your network. Your firewall automatically connects to the Internet when one of your computers requires access. It is not necessary to run a dialer or login application such as Dial-Up Networking or Enternet to connect, log in, or disconnect. These functions are performed by the firewall as needed.

To access the Internet from any computer connected to your firewall, launch a browser such as Microsoft Internet Explorer or Netscape Navigator. You should see the firewall's Internet LED blink, indicating communication to the ISP. The browser should begin to display a Web page.

The following chapters describe how to configure the advanced features of your firewall, and how to troubleshoot problems that may occur.

Manually Configuring Your Internet Connection

You can manually configure your firewall using the menu below, or you can allow the Setup Wizard to determine your configuration as described in the previous section.

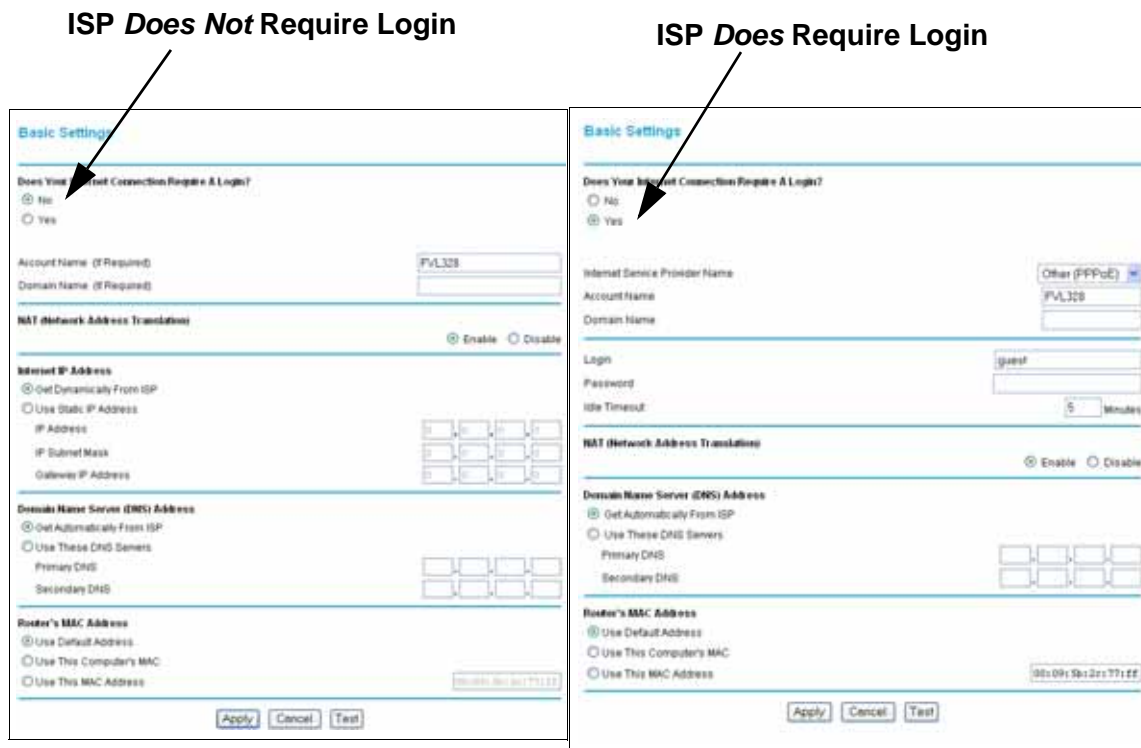


Figure 3-10: Browser-based configuration Basic Settings menu

How to Complete a Manual Configuration

Manually configure the firewall in the Basic Settings menu using these steps:

1. Answer the question, “Does Your Internet Connection Require a Login?”

- Select Yes if you normally must launch a login program such as Enternet or WinPOET in order to access the Internet.

Note: If you are a Telstra BigPond cable modem customer, or if you are in an area such as Austria that uses PPTP, login is required. Select Yes, then select BigPond or PPTP from the Internet Service Type drop-down box.

- Select No if you do not log in to establish your Internet connection.

2. If you selected Yes, follow the instructions below.

If your Internet connection does not require a login, skip to step 3.

- Enter your Account Name (may also be called Host Name) and Domain Name. These parameters may be necessary to access your ISP’s services such as mail or news servers. These fields are case sensitive.
- If you want to change the login timeout, enter a new value in minutes. This determines how long the firewall keeps the Internet connection active after there is no Internet activity from the LAN. Entering an Idle Timeout value of zero means never log out.
- If you want to disable NAT, select the Disable radio button. Before disabling NAT, back up your current configuration settings.



Note: Disabling NAT will reboot the router and reset all the FVL328 configuration settings to the factory default. Disable NAT only if you plan to install the FVL328 in a setting where you will be manually administering the IP address space on the LAN side of the router.

- Domain Name Server (DNS) Address:
If you know that your ISP does not automatically transmit DNS addresses to the firewall during login, select “Use these DNS servers” and enter the IP address of your ISP’s Primary DNS Server. If a Secondary DNS Server address is available, enter it also

3. If you selected No, follow the instructions below.

- If required, enter your Account Name (may also be called Host Name) and Domain Name. These parameters may be necessary to access your ISP’s services such as mail or news servers. The Account Name and Domain Name are not always required.

- If you want to disable NAT, select the Disable radio button. Before disabling NAT, back up your current configuration settings.



Note: Disabling NAT will reboot the router and reset all the FVL328 configuration settings to the factory default. Disable NAT only if you plan to install the FVL328 in a setting where you will be manually administering the IP address space on the LAN side of the router.

- Internet IP Address (also commonly called the WAN IP address):
If your ISP has assigned you a permanent, fixed (static) IP address for your computer, select “Use static IP address.” Enter the IP address that your ISP assigned. Also enter the netmask and the Gateway IP address. The Gateway is the ISP’s router to which your firewall will connect.

- Domain Name Server (DNS) Address:
If you know that your ISP does not automatically transmit DNS addresses to the firewall during login, select “Use these DNS servers” and enter the IP address of your ISP’s Primary DNS Server. If a Secondary DNS Server address is available, enter it also.

A DNS server is a host on the Internet that translates Internet names (such as www.netgear.com) to numeric IP addresses. Typically your ISP transfers the IP address of one or two DNS servers to your firewall during login. If the ISP does not transfer an address, you must obtain it from the ISP and enter it manually here. If you enter an address here, you should reboot your computers after configuring the firewall.

- Router’s MAC Address:
This section determines the Ethernet MAC address that will be used by the firewall on the Internet port. Some ISPs will register the Ethernet MAC address of the network interface card in your computer when your account is first opened. They will then only accept traffic from the MAC address of that computer. This feature allows your firewall to masquerade as that computer by “cloning” its MAC address.

To change the MAC address, select “Use this Computer’s MAC address.” The firewall will then capture and use the MAC address of the computer that you are now using. You should use the one computer that is allowed by the ISP. Or, select “Use this MAC address” and enter it.

4. Click Apply to save your settings.

5. Click the Test button to test your Internet connection.

If the NETGEAR Web site does not appear within one minute, refer to [Chapter 8, Troubleshooting](#).

Chapter 4

WAN and LAN Configuration

This chapter describes how to configure the WAN and LAN settings of your FVL328 Prosafe High Speed VPN Firewall v2.

Configuring LAN IP Settings

The LAN IP Setup menu allows configuration of LAN IP services such as DHCP and RIP. These features can be found under the Advanced heading in the Main Menu of the browser interface.

The firewall is shipped preconfigured to use private IP addresses on the LAN side, and to act as a DHCP server. The firewall's default LAN IP configuration is:

- LAN IP addresses—192.168.0.1
- Subnet mask—255.255.255.0

These addresses are part of the IETF-designated private address range for use in private networks, and should be suitable in most applications. If your network has a requirement to use a different IP addressing scheme, you can make those changes.

The LAN TCP/IP Setup parameters are:

- IP Address
This is the LAN IP address of the firewall.
- IP Subnet Mask
This is the LAN Subnet Mask of the firewall. Combined with the IP address, the IP Subnet Mask allows a device to know which other addresses are local to it, and which must be reached through a gateway or router.
- RIP Direction
RIP (Router Information Protocol) allows a router to exchange routing information with other routers. The RIP Direction selection controls how the firewall sends and receives RIP packets. Both is the default.
 - When set to Both or Out Only, the firewall will broadcast its routing table periodically.
 - When set to Both or In Only, it will incorporate the RIP information that it receives.

- When set to None, it will not send any RIP packets and will ignore any RIP packets received.
- **RIP Version**
This controls the format and the broadcasting method of the RIP packets that the router sends. It recognizes both formats when receiving. By default, this is set for RIP-1.
 - RIP-1 is universally supported. RIP-1 is probably adequate for most networks, unless you have an unusual network setup.
 - RIP-2 carries more information. Both RIP-2B and RIP-2M send the routing data in RIP-2 format.
 - RIP-2B uses subnet broadcasting.
 - RIP-2M uses multicasting.



Note: If you change the LAN IP address of the firewall while connected through the browser, you will be disconnected. You must then open a new connection to the new IP address and log in again.

Using the Router as a DHCP Server

By default, the firewall will function as a DHCP (Dynamic Host Configuration Protocol) server, allowing it to assign IP, DNS server, and default gateway addresses to all computers connected to the router's LAN. The assigned default gateway address is the LAN address of the firewall. IP addresses will be assigned to the attached PCs from a pool of addresses specified in this menu. Each pool address is tested before it is assigned to avoid duplicate addresses on the LAN.

For most applications, the default DHCP and TCP/IP settings of the firewall are satisfactory. See [“IP Configuration by DHCP” on page B-10](#) for an explanation of DHCP and information about how to assign IP addresses for your network.

If another device on your network will be the DHCP server, or if you will manually configure the network settings of all of your computers, clear the ‘Use router as DHCP server’ check box. Otherwise, leave it checked.

Specify the pool of IP addresses to be assigned by setting the Starting IP Address and Ending IP Address. These addresses should be part of the same IP address subnet as the firewall's LAN IP address. Using the default addressing scheme, you should define a range between 192.168.0.2 and 192.168.0.253, although you may wish to save part of the range for devices with fixed addresses.

The firewall will deliver the following parameters to any LAN device that requests DHCP:

- An IP Address from the range you have defined
- Subnet Mask
- Gateway IP Address is the firewall's LAN IP address
- Primary DNS Server, if you entered a Primary DNS address in the Basic Settings menu; otherwise, the firewall's LAN IP address
- Secondary DNS Server, if you entered a Secondary DNS address in the Basic Settings menu

How to Configure LAN TCP/IP Setup Settings

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default user name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. From the Main Menu, under Advanced, click the LAN IP Setup link to view the menu, shown below.

The screenshot shows the 'LAN IP Setup' configuration page. It includes fields for IP Address (192.168.0.1), IP Subnet Mask (255.255.255.0), RIP Direction (None), and RIP Version (Disabled). Below these is a section for DHCP server settings, where 'Use router as DHCP server' is checked, and the Starting IP Address is 192.168.0.2 and the Ending IP Address is 192.168.0.51. At the bottom, there is a 'Reserved IP Table' with columns for #, IP Address, Mac Address, and Device Name, and buttons for Add, Edit, Delete, Apply, and Cancel.

#	IP Address	Mac Address	Device Name
---	------------	-------------	-------------

Buttons: Add, Edit, Delete, Apply, Cancel

Figure 4-1: LAN IP Setup Menu

3. Enter the LAN TCP/IP and DHCP parameters.
4. Click Apply to save your changes.

How to Configure Reserved IP Addresses

When you specify a reserved IP address for a PC on the LAN, that PC will always receive the same IP address each time it accesses the firewall's DHCP server. Reserved IP addresses should be assigned to servers that require permanent IP settings.

To reserve an IP address:

1. Click the Add button.
2. In the IP Address box, type the IP address to assign to the PC or server.
Choose an IP address from the router's LAN subnet, such as 192.168.0.X.
3. Type the MAC Address of the PC or server.

Note: If the PC is already present on your network, you can copy its MAC address from the Attached Devices menu and paste it here.

4. Click Apply to enter the reserved address into the table.

Note: The reserved address will not be assigned until the next time the PC contacts the router's DHCP server. Reboot the PC or access its IP configuration and force a DHCP release and renew.

To edit or delete a reserved address entry:

1. Click the button next to the reserved address you want to edit or delete.
2. Click Edit or Delete.

Configuring WAN Settings

The WAN Setup menu allows configuration of WAN services such as automatic connection, DMZ server, enabling diagnostic PING tests on the WAN interface, setting the MTU size, and the WAN port speed,. These features can be found under the Advanced WAN Setup heading in the Main Menu of the browser interface.

These features are discussed below.

Connecting Automatically, as Required

Normally, this option should be Enabled, so that an Internet connection will be made automatically, whenever Internet-bound traffic is detected. However, if this causes high connection costs, you can disable this setting.

If disabled, you must connect manually, using the sub-screen accessed from the "Connection Status" button on the Status screen.

Setting Up a Default DMZ Server

The default DMZ server feature is helpful when using some online games and videoconferencing applications that are incompatible with NAT. The firewall is programmed to recognize some of these applications and to work properly with them, but there are other applications that may not function well. In some cases, one local PC can run the application properly if that PC's IP address is entered as the default DMZ server.



Note: For security, you should avoid using the default DMZ server feature. When a computer is designated as the default DMZ server, it loses much of the protection of the firewall, and is exposed to many exploits from the Internet. If compromised, the computer can be used to attack your network.

Incoming traffic from the Internet is normally discarded by the firewall unless the traffic is a response to one of your local computers or a service that you have configured in the Ports menu. Instead of discarding this traffic, you can have it forwarded to one computer on your network. This computer is called the Default DMZ Server.

How to Assign a Default DMZ Server

1. Click Default DMZ Server check box.
2. Type the IP address for that server.
3. Click Apply.

Responding to Ping on Internet WAN Port

If you want the firewall to respond to a 'ping' from the Internet, click the 'Respond to Ping on Internet WAN Port' check box. This should only be used as a diagnostic tool, since it allows your firewall to be discovered. Don't check this box unless you have a specific reason to do so.

How to Set the MTU Size

The normal MTU (Maximum Transmit Unit) value for most Ethernet networks is 1500 bytes or 1492 Bytes for PPPoE connections. For some ISPs you may need to reduce the MTU. But this is rarely required, and should not be done unless you are sure it is necessary for your ISP connection. Any packets sent through the firewall that are larger than the configured MTU size will be repackaged into smaller packets to meet the MTU requirement.

To change the MTU size:

1. Under MTU Size, select Custom.
2. Enter a new size between 64 and 1500.
3. Click Apply to save the new configuration.

Configuring Dynamic DNS

If your network has a permanently assigned IP address, you can register a domain name and have that name linked with your IP address by public Domain Name Servers (DNS). However, if your Internet account uses a dynamically assigned IP address, you will not know in advance what your IP address will be, and the address can change frequently. In this case, you can use a commercial dynamic DNS service, which will allow you to register your domain to their IP address, and will forward traffic directed to your domain to your frequently-changing IP address.

The firewall contains a client that can connect to a dynamic DNS service provider. To use this feature, you must select a service provider and obtain an account with them. After you have configured your account information in the firewall, whenever your ISP-assigned IP address changes, your firewall will automatically contact your dynamic DNS service provider, log in to your account, and register your new IP address.

How to Configure Dynamic DNS

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default user name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. From the Main Menu of the browser interface, under Advanced, click Dynamic DNS.
3. Click the radio button for the dynamic DNS service you will use. Access the website of the dynamic DNS service providers whose, and register for an account. For example, for TZO.com, go to www.TZO.com.
4. Click Apply to save your configuration.



Note: If your ISP assigns a private WAN IP address such as 192.168.x.x or 10.x.x.x, the dynamic DNS service will not work because private addresses will not be routed on the Internet.

Using Static Routes

Static Routes provide additional routing information to your firewall. Under normal circumstances, the firewall has adequate routing information after it has been configured for Internet access, and you do not need to configure additional static routes. You must configure static routes only for unusual cases such as multiple routers or multiple IP subnets located on your network.

Static Route Example

As an example of when a static route is needed, consider the following case:

- Your primary Internet access is through a cable modem to an ISP.
- You have an ISDN router on your home network for connecting to the company where you are employed. This router's address on your LAN is 192.168.0.100.
- Your company's network is 134.177.0.0.

When you first configured your firewall, two implicit static routes were created. A default route was created with your ISP as the gateway, and a second static route was created to your local network for all 192.168.0.x addresses. With this configuration, if you attempt to access a device on the 134.177.0.0 network, your firewall will forward your request to the ISP. The ISP forwards your request to the company where you are employed, and the request will likely be denied by the company's firewall.

In this case you must define a static route, telling your firewall that 134.177.0.0 should be accessed through the ISDN router at 192.168.0.100. The static route would look like [Figure 4-3](#).

In this example:

- The Destination IP Address and IP Subnet Mask fields specify that this static route applies to all 134.177.x.x addresses.
- The Gateway IP Address fields specifies that all traffic for these addresses should be forwarded to the ISDN router at 192.168.0.100.
- A Metric value of 1 will work since the ISDN router is on the LAN. This represents the number of routers between your network and the destination. This is a direct connection so it is set to 1.
- Private is selected only as a precautionary security measure in case RIP is activated.

How to Configure Static Routes

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default user name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. From the Main Menu of the browser interface, under Advanced, click on Static Routes to view the Static Routes menu, shown in [Figure 4-2](#).



#	Name	Destination	Gateway	Metric	Active	Private
---	------	-------------	---------	--------	--------	---------

[Add](#) [Edit](#) [Delete](#)

Figure 4-2: Static Routes Table

3. To add or edit a Static Route:

- a. Click the Edit button to open the Edit Menu, shown below.

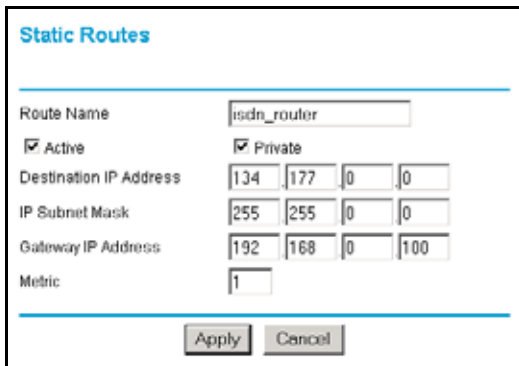
The image shows a 'Static Routes' configuration window. It has a title bar 'Static Routes' in blue. Below the title bar, there are several fields: 'Route Name' with a text box containing 'isdn_router'; 'Active' with a checked checkbox; 'Private' with a checked checkbox; 'Destination IP Address' with four text boxes containing '134', '177', '0', and '0'; 'IP Subnet Mask' with four text boxes containing '255', '255', '0', and '0'; 'Gateway IP Address' with four text boxes containing '192', '168', '0', and '100'; and 'Metric' with a text box containing '1'. At the bottom of the window are two buttons: 'Apply' and 'Cancel'.

Figure 4-3: Static Route Entry and Edit Menu

- b. Type a route name for this static route in the Route Name box under the table. This is for identification purpose only.
 - c. Select Active to make this route effective.
 - d. Select Private if you want to limit access to the LAN only. The static route will not be reported in RIP.
 - e. Type the Destination IP Address of the final destination.
 - f. Type the IP Subnet Mask for this destination. If the destination is a single host, type 255.255.255.255.
 - g. Type the Gateway IP Address, which must be a router on the same LAN segment as the firewall.
 - h. Type a number between 1 and 15 as the Metric value. This represents the number of routers between your network and the destination. Usually, a setting of 2 or 3 works, but if this is a direct connection, set it to 1.
4. Click Apply to have the static route entered into the table.

Chapter 5

Protecting Your Network

This chapter describes how to use the basic firewall features of the FVL328 Prosafe High Speed VPN Firewall to protect your network.

Protecting Access to Your FVL328 Firewall


For security reasons, the firewall has its own user name and password. Also, after a period of inactivity for a set length of time, the administrator login will automatically disconnect. You can use the procedures below to change the firewall's password and the amount of time for the administrator's login timeout.

Note: The user name and password are not the same as any user name or password you may use to log in to your Internet connection.

NETGEAR recommends that you change this password to a more secure password. The ideal password should contain no dictionary words from any language, and should be a mixture of both upper and lower case letters, numbers, and symbols. Your password can be up to 30 characters.

How to Change the Built-In Password

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default User Name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. From the main menu of the browser interface, under the Maintenance heading, select Set Password to bring up the menu shown below.

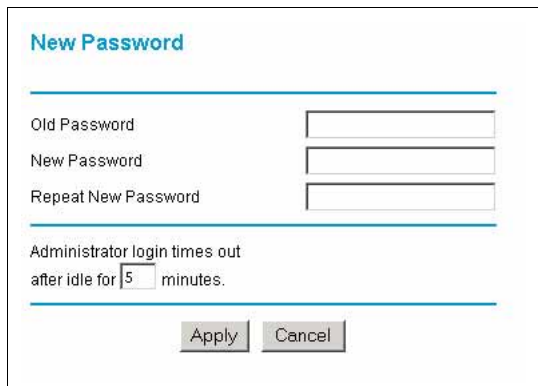

The screenshot shows a web-based configuration interface titled "New Password" in blue text. Below the title, there are three input fields: "Old Password", "New Password", and "Repeat New Password". Each field is a simple text box with a light gray border. Below these fields, there is a label "Administrator login times out after idle for" followed by a small input box containing the number "5", and the word "minutes." to the right. At the bottom of the form, there are two buttons: "Apply" and "Cancel", both with a light gray background and black text.

Figure 5-1: Set Password menu

3. To change the password, first enter the old password, then enter the new password twice.
4. Click Apply to save your changes.

Note: After changing the password, you will be required to log in again to continue the configuration. If you have backed up the firewall settings previously, you should do a new backup so that the saved settings file includes the new password.

How to Change the Administrator Login Timeout

For security, the administrator's login to the firewall configuration will time out after a period of inactivity. To change the login timeout period:

1. In the Set Password menu, type a number in 'Administrator login times out' field. The suggested default value is 5 minutes.
2. Click Apply to save your changes or click Cancel to keep the current period.

Configuring Basic Firewall Services

Basic firewall services you can configure include access blocking and scheduling of firewall security. These topics are presented below.

Blocking Keywords, Sites, and Services

The firewall provides a variety of options for blocking Internet based content and communications services. With its content filtering feature, the FVL328 Firewall prevents objectionable content from reaching your computers. The FVL328 allows you to control access to Internet content by screening for keywords within Web addresses. Key content filtering options include:

- Blocking access from your LAN to Internet locations that you specify as off-limits.
- Keyword blocking of newsgroup names.
- Outbound services blocking to limit access from your LAN to Internet locations or services that you specify as off-limits.
- Denial of Service (DoS) protection. Automatically detects and thwarts (DoS) attacks such as Ping of Death, SYN Flood, LAND Attack and IP Spoofing.
- Blocks unwanted traffic from the Internet to your LAN.

The section below explains how to configure your firewall to perform these functions.

How to Block Keywords and Sites

The FVL328 Firewall allows you to restrict access to Internet content based on functions such as Java or Cookies, Web addresses and Web address keywords.

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default User Name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. Click the Block Sites link in the Security section of the main menu.

The screenshot shows a web-based configuration interface for a firewall. The title is "Block Sites" in blue. Below the title is a horizontal line. Underneath is a checkbox labeled "Turn keyword blocking on" which is checked. Below this is a text input field. Below the input field is a button labeled "Add Keyword". Below this is another horizontal line. Underneath is the text "Block sites containing these keywords or domain names:". Below this text is a list box. Below the list box are two buttons: "Delete Keyword" and "Clear List". Below these buttons is another horizontal line. Underneath is the label "Trusted IP Address" followed by four input fields, each containing the number "0". Below these input fields is another horizontal line. At the bottom are two buttons: "Apply" and "Cancel".

Figure 5-2: Block Sites menu

3. To enable keyword blocking, check “Turn keyword blocking on”, enter a keyword or domain in the Keyword box, click Add Keyword, then click Apply.

Some examples of Keyword blocking follow:

- If the keyword “XXX” is specified, the URL <http://www.badstuff.com/xxx.html> is blocked, as is the newsgroup alt.pictures.xxx.
- If the keyword “.com” is specified, only Web sites with other domain suffixes (such as .edu or .gov) can be viewed.
- If the keyword “.” is entered, all Internet browsing access will be blocked.

Up to 32 entries are supported in the Keyword list.

4. To delete a keyword or domain, select it from the list, click Delete Keyword, then click Apply.
5. To specify a Trusted User, enter that computers IP address in the Trusted User box and click Apply.

You may specify one Trusted User, which is a computer that will be exempt from blocking and logging. Since the Trusted User will be identified by an IP address, you should configure that computer with a fixed IP address.

6. Click Apply to save your settings.

Using Firewall Rules to Regulate Network Traffic

Firewall rules are used to block or allow specific traffic passing through from one side to the other. Inbound rules (WAN to LAN) restrict access by outsiders to private resources, selectively allowing only specific outside users to access specific resources. Outbound rules (LAN to WAN) determine what outside resources local users can have access to.

A firewall has two default rules, one for inbound traffic and one for outbound. The default rules of the FVL328 are:

- Inbound: Block all access from outside except responses to requests from the LAN side.
- Outbound: Allow all access from the LAN side to the outside.

You may define additional rules that will specify exceptions to the default rules. By adding custom rules, you can block or allow access based on the service or application, source or destination IP addresses, and time of day. You can also choose to log traffic that matches or does not match the rule you have defined.

To access the Rules configuration of the FVL328, click the Rules link on the main menu, then click Add for either an Outbound or Inbound Service.

Rules

Outbound Services

#	Enable	Service Name	Action	LAN Users	WAN Servers	Log
Default	Yes	Any	ALLOW always	Any	Any	Match

Add Edit Move Delete

Inbound Services

#	Enable	Service Name	Action	LAN Server IP address	WAN Users	Log
Default	Yes	Any	BLOCK always	--	Any	Match

Add Edit Move Delete

Options

☐ Enable VPN Passthrough (IPSec, PPTP, L2TP)

☒ Drop fragmented IP packets

☒ Block TCP flood

☒ Block UDP flood

☒ Block non-standard packets

Apply Cancel

Figure 5-3: Rules menu

- To edit an existing rule, select its button on the left side of the table and click Edit.
- To delete an existing rule, select its button on the left side of the table and click Delete.
- To move an existing rule to a different position in the table, select its button on the left side of the table and click Move. At the script prompt, enter the number of the desired new position and click OK.

Rules Menu Options

- Enable VPN Passthrough (IPSec, PPTP, L2TP) — if LAN users need to use VPN (Virtual Private Networking) software on their computer, and connect to remote sites or servers, enable this check box. This will allow the VPN protocols (IPSec, PPTP, L2TP) to be used. If this check box is not selected, these protocols are blocked.
- Drop fragmented IP packets — if selected, all fragmented IP packets will be dropped (discarded). Normally, this should NOT be selected.

- Block TCP flood — if selected, then when a TCP flood attack is detected, the port used will be closed, and no traffic will be able to use that port.
- Block UDP flood — if selected, then when a UDP flood attack is detected, all traffic from that IP address will be blocked.
- Block non-standard packets — if selected, then only known packet types will be accepted; other packets will be blocked. The known packet types are TCP, UDP, ICMP, ESP, and GRE. Note that these are packet types, not protocols.

Using Inbound Rules (Port Forwarding)

The FVL328 uses Network Address Translation (NAT), unless this feature is turned off. Using NAT, your network presents only one IP address to the Internet, and outside users cannot directly address any of your local computers. However, by defining an inbound rule you can make a local server (for example, a Web server or game server) visible and available to the Internet. The rule tells the firewall to direct inbound traffic for a particular service to one local server based on the destination port number. This is also known as port forwarding.



Note: Some residential broadband ISP accounts do not allow you to run any server processes (such as a Web or FTP server) from your location. Your ISP may periodically check for servers and may suspend your account if it discovers any active services at your location. If you are unsure, refer to the Acceptable Use Policy of your ISP.

Remember that allowing inbound services opens holes in your firewall. Only enable those ports that are necessary for your network. Following are two application examples of inbound rules:

Inbound Rule Example: A Local Public Web Server

If you host a public Web server on your local network, you can define a rule to allow inbound Web (HTTP) requests from any outside IP address to the IP address of your Web server at any time of day. This rule is shown below.

Inbound Services

Service: HTTP(TCP:80)

Action: ALLOW always

Send to LAN Server: 192.168.0.99

WAN Users: Any

start: 0.0.0.0

finish: 0.0.0.0

Log: Never

Back Apply Cancel

Figure 5-4: Rule example: a local public Web server

The parameters are:

- **Service** — select the application or service to be allowed or blocked. The list already displays many common services, but you are not limited to these choices. Use the Add Services menu as seen in [Figure 5-3](#) to add any additional services or applications.
- **Action** — choose how you would like this type of traffic to be handled. You can block or allow always, or block according to the schedule you defined in the Schedule menu.
- **Send to LAN Server** — enter the IP address of the PC or Server on your LAN which will receive the inbound traffic covered by this rule.
- **WAN Users** — these settings determine which packets are covered by the rule, based on their source (WAN) IP address. Select the desired option:
 - Any - All IP addresses are covered by this rule.
 - Address range - enter the "Start" and "Finish" fields.
 - Single address - enter the required address in the "Start" fields.
- **Log** — you can select whether the traffic will be logged. The choices are:
 - Never - no log entries will be made for this service.
 - Always - any traffic for this service type will be logged.
 - Match - traffic that matches the parameters and action will be logged.
 - Not match - traffic that does not match the parameters and action will be logged.

Inbound Rule Example: Videoconferencing from Restricted Addresses

If you want to allow incoming videoconferencing to be initiated from a restricted range of outside IP addresses, such as from a branch office, you can create an inbound rule. In the example shown in [Figure 5-5](#), CU-SeeMe connections are allowed only from a specified range of external IP addresses. In this case, we have also specified logging of any incoming CU-SeeMe requests that do not match the allowed parameters.

Inbound Services

Service:

Action:

Send to LAN Server:

WAN Users:

start:

finish:

Log:

Figure 5-5: Rule example: Videoconferencing from Restricted Addresses

Considerations for Inbound Rules

- If your external IP address is assigned dynamically by your ISP, the IP address may change periodically as the DHCP lease expires. Consider using the Dynamic DNS feature in the Advanced menus so that external users can always find your network.
- If the IP address of the local server is assigned by DHCP, it may change when the computer is rebooted. To avoid this, use the Reserved IP address feature in the LAN IP menu to keep the computer's IP address constant.
- Local computers must access the local server using the computers' local LAN address (192.168.0.11 in the example in [Figure 5-5](#) above). Attempts by local computers to access the server using the external WAN IP address will fail.

Using Outbound Rules (Service Blocking)

The FVL328 allows you to block the use of certain Internet services by computers on your network. This is called service blocking or port filtering. You can define an outbound rule to block Internet access from a local computer based on:

- IP address of the local computer (source address)
- IP address of the Internet site being contacted (destination address)
- Time of day
- Type of service being requested (service port number)

Following is an application example of outbound rules:

Outbound Rule Example: Blocking Instant Messenger

If you want to block Instant Messenger usage by employees during working hours, you can create an outbound rule to block that application from any internal IP address to any external address, according to the schedule that you have created in the Schedule menu. You can also have the firewall log any attempt to use Instant Messenger during that blocked period.

Outbound Services

Service: AIM(TCP:5190)

Action: BLOCK by schedule,otherwise allow

LAN users: Any

start: [0].[0].[0].[0]

finish: [0].[0].[0].[0]

WAN Users: Any

start: [0].[0].[0].[0]

finish: [0].[0].[0].[0]

Log: Match

Back Apply Cancel


Figure 5-6: Rule example: blocking instant messenger

The parameters are:

- Service — select the application or service to be allowed or blocked. The list already displays many common services, but you are not limited to these choices. Use the Add Services menu as seen in [Figure 5-3](#) to add any additional services or applications that do not already appear.
- Action — choose how you would like this type of traffic to be handled. You can block or allow always, or you can choose to block or allow according to the schedule you have defined in the Schedule menu.
- LAN Users — these settings determine which packets are covered by the rule, based on their source LAN IP address. Select the desired option:
 - Any: All IP addresses are covered by this rule.
 - Address range: If this option is selected, you must enter the "Start" and "Finish" fields.
 - Single address: Enter the required address in the "Start" fields.
- WAN Users — these settings determine which packets are covered by the rule, based on their destination WAN IP address. Select the desired option:
 - Any - All IP addresses are covered by this rule.
 - Address range - If this option is selected, you must enter the "Start" and "Finish" fields.
 - Single address - Enter the required address in the "Start" fields.
- Log — select whether the traffic will be logged. The choices are:
 - Never - No log entries will be made for this service.
 - Always - Any traffic for this service type will be logged.
 - Match - Traffic of this type which matches the parameters and action will be logged.
 - Not match - Traffic of this type which does not match the parameters and action will be logged.

Understanding the Order of Precedence for Rules

As you define new rules, they are added to the tables in the Rules menu, as shown below.



The screenshot shows the 'Rules' configuration window. It contains two tables: 'Outbound Services' and 'Inbound Services'. Each table has columns for #, Enable, Service Name, Action, LAN Users, WAN Servers, and Log. Below each table are buttons for Add, Edit, Move, and Delete.

#	Enable	Service Name	Action	LAN Users	WAN Servers	Log
1	<input checked="" type="checkbox"/>	AIM	BLOCK by schedule	Any	Any	Match
Default	Yes	Any	ALLOW always	Any	Any	Never

Buttons: Add, Edit, Move, Delete

#	Enable	Service Name	Action	LAN Server IP address	WAN Users	Log
1	<input checked="" type="checkbox"/>	CU-SEEME	ALLOW always	192.168.0.11	134.177.88.1 - 134.177.88.254	Not Match
2	<input checked="" type="checkbox"/>	HTTP	ALLOW always	192.168.0.99	Any	Never
Default	Yes	Any	BLOCK always	--	Any	Match

Buttons: Add, Edit, Move, Delete

Figure 5-7: Rules table with examples

For any traffic attempting to pass through the firewall, the packet information is subjected to the rules in the order shown in the Rules Table, beginning at the top and proceeding to the default rules at the bottom. In some cases, the order of precedence of two or more rules may be important in determining the disposition of a packet. The Move button allows you to relocate a defined rule to a new position in the table.

Regulating Access to Network Services

Services are functions performed by server computers at the request of client computers. For example, Web servers serve Web pages, time servers serve time and date information, and game hosts serve data about other players' moves. When a computer on the Internet sends a request for service to a server computer, the requested service is identified by a service or port number. This number appears as the destination port number in the transmitted IP packets. For example, a packet that is sent with destination port number 80 is an HTTP (Web server) request.

The service numbers for many common protocols are defined by the Internet Engineering Task Force (IETF) and published in RFC1700, “Assigned Numbers.” Service numbers for other applications are typically chosen from the range 1024 to 65535 by the authors of the application. For more information on this topic please see [Appendix B, “Networks, Routing, and Firewall Basics](#).

Although the FVL328 already holds a list of many service port numbers, you are not limited to these choices. Use the procedure below to create your own service definitions.

How to Define Services


1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default User Name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. Click the Services link of the Security menu to display the menu shown below.



Figure 5-8: Services menu

- To create a new service, click the Add Custom Service button.
- When there is an existing service, to edit the service, select the it from the list in the table and click Edit Service.
- To delete an existing Service, select its button on the left side of the table and click Delete Service.

3. Modify the menu shown below for defining or editing a service.

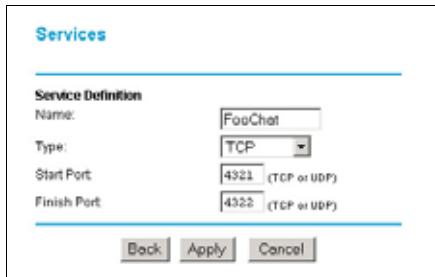

The screenshot shows a web interface titled "Services" in blue. Below the title is a horizontal line. Underneath, the text "Service Definition" is followed by four fields: "Name:" with the value "FooChat", "Type:" with a dropdown menu showing "TCP", "Start Port:" with the value "4321" and "(TCP or UDP)" to its right, and "Finish Port:" with the value "4322" and "(TCP or UDP)" to its right. At the bottom of the form are three buttons: "Back", "Apply", and "Cancel".

Figure 5-9: Add Services menu

4. Click Apply to save your changes.

Setting Times and Scheduling Firewall Services

The FVL328 Firewall uses the Network Time Protocol (NTP) to obtain the current time and date from one of several Network Time Servers on the Internet. The FVL328 includes a battery-backed real-time clock so time will persist if power is removed. In order to localize the time for your log entries, you must select your Time Zone from the list.

How to Set Your Time Zone

In order to localize the time for your log entries, you must specify your Time Zone:

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default User Name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.

- Click the Schedule link of the Security menu to display the menu shown below.

The screenshot shows the 'Schedule' configuration window. At the top, there is a checkbox labeled 'Use this schedule for rules'. Below this is a section titled 'Days:' with checkboxes for 'Every Day' (checked), 'Sunday', 'Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', and 'Saturday'. The next section is 'Time of day: (use 24-hour clock)' with a checked 'All Day' option and input fields for 'Start Time' and 'End Time' (each with hour and minute sub-fields). The 'Date/Time' section includes a 'Time Zone' dropdown menu set to '(GMT-08:00) Pacific Time (US Canada)', a 'Timekeeping' section with checkboxes for 'Synchronize clock to NTP Server' and 'Set clock to' (with fields for 00:00 am, Jan 01, 2002), and an unchecked 'Adjust for daylight savings time' checkbox. At the bottom, it displays 'Current time: Tues, 2002-09-03 08:37:30' and 'Apply' and 'Cancel' buttons.

Figure 5-10: Schedule Services menu

- Select your Time Zone. This setting will be used for the blocking schedule according to your local time zone and for time-stamping log entries.

Check the Daylight Savings Time box if your time zone is currently in daylight savings time.

Note: If your region uses Daylight Savings Time, you must manually check Adjust for Daylight Savings Time on the first day of Daylight Savings Time, and uncheck it at the end. Enabling Daylight Savings Time will cause one hour to be added to the standard time.

- Timekeeping** has 2 options:
 - Synchronize to NTP Server - If enabled, the RTC (Real-Time Clock) is updated regularly by contacting this server. If you prefer to use a particular NTP server, enter the server's IP address. If not enabled, the RTC is never updated.

- Set Clock - Use this to set a particular Date/Time to the RTC. This is only useful if “Synchronize to NTP Server” is disabled. Otherwise, your setting will be lost on the next synchronization.
5. Click Apply to save your settings.

How to Schedule Firewall Services

If you enabled services blocking in the Block Services menu or Port forwarding in the Ports menu, you can set up a schedule for when blocking occurs or when access is not restricted.

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default User Name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. Click the Schedule link of the Security menu to display menu shown above in the [Schedule Services menu](#).
3. To block Internet services based on a schedule, select Every Day or select one or more days. If you want to limit access completely for the selected days, select All Day. Otherwise, to limit access during certain times for the selected days, enter Start Blocking and End Blocking times.

Note: Enter the values in 24-hour time format. For example, 10:30 am would be 10 hours and 30 minutes and 10:30 pm would be 22 hours and 30 minutes.

4. Click Apply to save your changes.

Chapter 6

Virtual Private Networking

This chapter describes how to use the virtual private networking (VPN) features of the FVL328 Firewall. VPN tunnels provide secure, encrypted communications between your local network and a remote network or computer.

Overview of FVL328 Policy-Based VPN Configuration

The FVL328 uses state-of-the-art firewall and security technology to facilitate controlled and actively monitored VPN connectivity. Since the FVL328 strictly conforms to Internet Engineering Task Force (IETF) standards, it is interoperable with devices from major network equipment vendors.

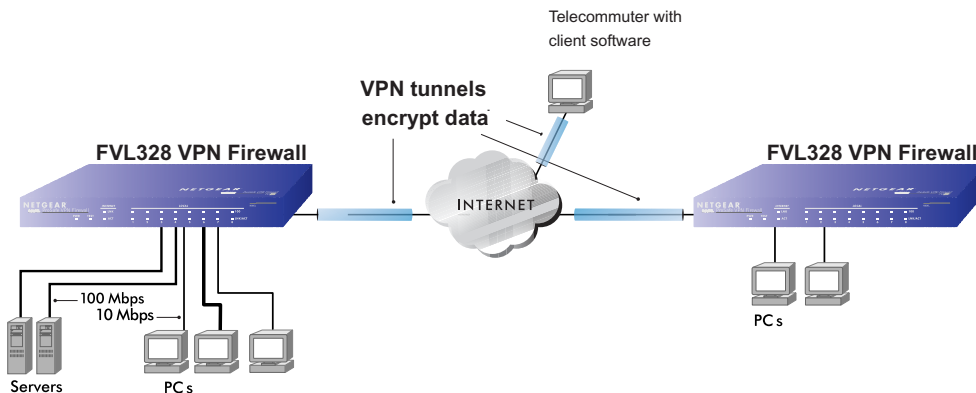


Figure 6-1: Secure access through FVL328 VPN routers

Using Policies to Manage VPN Traffic

You create policy definitions to manage VPN traffic on the FVL328. There are two kinds of policies:

- **IKE Policies:** Define the authentication scheme and automatically generate the encryption keys. As an alternative option, to further automate the process, you can create an Internet Key Exchange (IKE) policy which uses a trusted certificate authority to provide the authentication while the IKE policy still handles the encryption.
- **VPN Policies:** Apply the IKE policy to specific traffic which requires a VPN tunnel. Or, you can create a VPN policy which does not use an IKE policy but in which you manually enter all the authentication and key parameters.

Since the VPN Auto policies require IKE policies, you must define the IKE policy first. The FVL328 also allows you to manually input the authentication scheme and encryption key values. VPN Manual policies manage the keys according to settings you select and do not use IKE policies.

In order to establish secure communication over the Internet with the remote site you need to configure matching VPN parameters on both the local and remote sites. The outbound VPN parameters on one end must match to the inbound VPN parameters on other end, and vice versa.

When the network traffic enters into the FVL328 from the LAN network interface, if there is no VPN policy found for a type of network traffic, then that traffic passes through without any change. However, if the traffic is selected by a VPN policy, then the Internet Protocol security IPSec authentication and encryption rules will be applied to it as defined in the VPN policy.

By default, a new VPN policy is added with the least priority, that is, at the end of the VPN policy table. You can change the priority by selecting the VPN policy from the policy table and clicking Move.

Using Automatic Key Management

The most common configuration scenarios will use IKE policies to automatically manage the authentication and encryption keys. Based on the IKE policy, some parameters for the VPN tunnel are generated automatically. The IKE protocols perform negotiations between the two VPN endpoints to automatically generate required parameters.

Some organizations will use an IKE policy with a Certificate Authority (CA) to perform authentication. Typically, CA authentication is used in large organizations which maintain their own internal CA server. This requires that each VPN gateway have a certificate and trust certificate root from the CA. Using CAs reduces the amount of data entry required on each VPN endpoint.

IKE Policies' Automatic Key and Authentication Management

Click the IKE Policies link from the VPN section of the main menu, and then click the Add button of the IKE Policies screen to display the IKE Policy Configuration menu shown in [Figure 6-2](#).

IKE Policies

Policy Table

#	Name	Mode	Local ID	Remote ID
---	------	------	----------	-----------

Add **Edit** **Move**

IKE Policy Configuration

General

Policy Name:

Direction/Type:

Exchange Mode:

Local

Local Identity Type:

Local Identity Data:

Remote

Remote Identity Type:

Remote Identity Data:

IKE SA Parameters

Encryption Algorithm:

Authentication Algorithm:

Authentication Method: ☒ Pre-shared Key

☐ RSA Signature (requires Certificate)

Diffie-Hellman (DH) Group:

SA Life Time: (secs)

Back **Apply** **Cancel**

Figure 6-2: IKE - Policy Configuration Menu

The IKE Policy Configuration fields are defined in the following table.

Table 6-1. IKE Policy Configuration Fields

Field	Description
General	These settings identify this policy and determine its major characteristics.
Policy Name	The descriptive name of the IKE policy. Each policy should have a unique policy name. This name is not supplied to the remote VPN endpoint. It is only used to help you identify IKE policies.
Direction/Type	<p>This setting is used when determining if the IKE policy matches the current traffic. The drop-down menu includes the following:</p> <ul style="list-style-type: none"> • Initiator – Outgoing connections are allowed, but incoming are blocked. • Responder – Incoming connections are allowed, but outgoing are blocked. • Both Directions – Both outgoing and incoming connections are allowed. • Remote Access – This is to allow only incoming client connections, where the IP address of the remote client is unknown. <p>If Remote Access is selected, the “Exchange Mode” MUST be “Aggressive,” and the ‘Identities’ below (both Local and Remote) MUST be “Name.” On the matching VPN Policy, the IP address of the remote VPN endpoint should be set to 0.0.0.0.</p>
Exchange Mode	<p>Main Mode or Aggressive Mode. This setting must match the setting used on the remote VPN endpoint.</p> <ul style="list-style-type: none"> • Main Mode is slower but more secure. • Aggressive Mode is faster but less secure.
Local	These parameters apply to the Local FVL328 firewall.
Local Identity Type	<p>Use this field to identify the local FVL328. You can choose one of the following four options from the drop-down list:</p> <ul style="list-style-type: none"> • By its Internet (WAN) port IP address. • By its Fully Qualified Domain Name (FQDN) – your domain name. • By a Fully Qualified User Name – your name, E-mail address, or other ID. • By DER ASN.1 DN – the binary Distinguished Encoding Rules (DER) encoding of your ASN.1 X.500 Distinguished Name.
Local Identity Data	This field lets you identify the local FVL328 by name.
Remote	These parameters apply to the target remote FVL328 firewall, VPN gateway, or VPN client.

Table 6-1. IKE Policy Configuration Fields

Field	Description
Remote Identity Type	Use this field to identify the remote FVL328. You can choose one of the following four options from the drop-down list: <ul style="list-style-type: none"> • By its Internet (WAN) port IP address. • By its Fully Qualified Domain Name (FQDN) – your domain name. • By a Fully Qualified User Name – your name, E-mail address, or other ID. • By DER ASN.1 DN – the binary DER encoding of your ASN.1 X.500 Distinguished Name.
Remote Identity Data	This field lets you identify the target remote FVL328 by name.
IKE SA Parameters	These parameters determine the properties of the IKE Security Association.
Encryption Algorithm	Choose the encryption algorithm for this IKE policy: <ul style="list-style-type: none"> • DES • 3DES is more secure and is the default
Authentication Algorithm	If you enable Authentication Headers (AH), this menu lets you select from these authentication algorithms: <ul style="list-style-type: none"> • MD5 — the default • SHA-1 – more secure
Authentication Method	You can select Pre-Shared Key or RSA Signature.
Pre-Shared Key	Specify the key according to the requirements of the Authentication Algorithm you selected. <ul style="list-style-type: none"> • For MD5, the key length should be 16 bytes. • For SHA-1, the key length should be 20 bytes.
RSA Signature	RSA Signature requires a certificate.
Diffie-Hellman (DH) Group	The Diffie-Hellman groups are MODP Oakley Groups 1 and 2. The DH Group setting determines the size of the key used in the key exchange. This must match the value used on the remote VPN gateway or client. Select Group 1 (768 bit) or Group 2 (1024 bit).
SA Life Time	The amount of time in seconds before the Security Association expires; over an hour (3600) is common.

VPN Policy Configuration for Auto Key Negotiation

An already defined IKE policy is required for VPN - Auto Policy configuration. From the VPN Policies section of the main menu, you can navigate to the VPN - Auto Policy configuration menu.

The screenshot displays the VPN configuration interface. On the left, the 'VPN Policies' menu is visible, featuring a 'Policy Table' with columns for Enable, Name, Type, Local, Remote, AH, and ESP. Below the table are buttons for Edit, Move, Delete, Apply, Cancel, Add Auto Policy (highlighted with a red circle), and Add Manual. The main area on the right is the 'VPN - Auto Policy' configuration form, which is divided into several sections:

- General**: Includes fields for Policy Name, IKE policy (set to FVS310), Remote VPN Endpoint (Address Type: IP Address, Address Data:), SA Life Time (300 seconds, 0 Kbytes), and PFS Key Group (Group 1 (768 Bit)).
- Traffic Selector**: Includes fields for Local IP (Start IP address, Finish IP address, Subnet Mask) and Remote IP (Start IP address, Finish IP address, Subnet Mask).
- AH Configuration**: Includes a checkbox for Enable Authentication Authentication Algorithm (MD5).
- ESP Configuration**: Includes checkboxes for Enable Encryption (Encryption Algorithm: DES) and Enable Authentication Authentication Algorithm (MD5).
- NETBIOS Enable**: Includes a checkbox for NETBIOS Enable.

At the bottom of the form are buttons for Back, Apply, and Cancel.

Figure 6-3: VPN - Auto Policy Menu

The VPN Auto Policy fields are defined in the following table.

Table 6-1. VPN Auto Policy Configuration Fields

Field	Description
General	These settings identify this policy and determine its major characteristics.
Policy Name	The descriptive name of the VPN policy. Each policy should have a unique policy name. This name is not supplied to the remote VPN endpoint. It is only used to help you identify VPN policies.
IKE Policy	The existing IKE policies are presented in a drop-down list. Note: Create the IKE policy BEFORE creating a VPN - Auto policy.
Remote VPN Endpoint	The address used to locate the remote VPN firewall or client to which you want to connect. The remote VPN endpoint must have this FVL328's Local Identity Data entered as its "Remote VPN Endpoint": <ul style="list-style-type: none"> • By its IP Address. • By its Fully Qualified Domain Name (FQDN) – your domain name.
SA Life Time	The duration of the Security Association before it expires. <ul style="list-style-type: none"> • Seconds - the amount of time before the SA expires. Over an hour is common (3600). • Kbytes - the amount of traffic before the SA expires. One of these can be set without setting the other.
IPSec PFS	If enabled, security is enhanced by ensuring that the key is changed at regular intervals. Also, even if one key is broken, subsequent keys are no easier to break. Each key has no relationship to the previous key.
PFS Key Group	If PFS is enabled, this setting determines the DH group bit size used in the key exchange. This must match the value used on the remote gateway. Select Group 1 (768 bit) or Group 2 (1024 bit).
Traffic Selector	These settings determine if and when a VPN tunnel will be established. If network traffic meets <i>all</i> criteria, then a VPN tunnel will be created.

Table 6-1. VPN Auto Policy Configuration Fields

Field	Description
Local IP	<p>The drop-down menu allows you to configure the source IP address of the outbound network traffic for which this VPN policy will provide security. Usually, this address will be from your network address space. The choices are:</p> <ul style="list-style-type: none"> • ANY for all valid IP addresses in the Internet address space • Note: Choosing ANY sends <i>all</i> traffic through the tunnel, which will eliminate activities such as Web access. • Single IP Address • Range of IP Addresses • Subnet Address
Remote IP	<p>The drop-down menu allows you to configure the destination IP address of the outbound network traffic for which this VPN policy will provide security. Usually, this address will be from the remote site's corporate network address space. The choices are:</p> <ul style="list-style-type: none"> • ANY for all valid IP addresses in the Internet address space • Note: Choosing ANY sends <i>all</i> traffic to the WAN through the tunnel, preventing for example, remote management or response to ping. • Single IP Address • Range of IP Addresses • Subnet Address
Authenticating Header (AH) Configuration	AH specifies the authentication protocol for the VPN header. These settings must match the remote VPN endpoint.
Enable Authentication	Use this check box to enable or disable AH for this VPN policy.
Authentication Algorithm	If you enable AH, then select the authentication algorithm: MD5 – the default, or SHA1 - more secure
Encapsulated Security Payload (ESP) Configuration	ESP provides security for the payload (data) sent through the VPN tunnel. Generally, you will want to enable both Encryption and Authentication. Two ESP modes are available: Plain ESP encryption or ESP encryption with authentication These settings must match the remote VPN endpoint.
Enable Encryption	Use this check box to enable or disable ESP Encryption.
Encryption Algorithm	If you enable ESP encryption, then select the encryption algorithm: DES – the default, or 3DES - more secure
Enable Authentication	Use this check box to enable or disable ESP transform for this VPN policy.

Table 6-1. VPN Auto Policy Configuration Fields

Field	Description
Authentication Algorithm	If you enable AH, then use this menu to select which authentication algorithm will be employed. The choices are: MD5 – the default, or SHA1 – more secure
NetBIOS Enable	Check this if you want NetBIOS traffic to be forwarded over the VPN tunnel. The NetBIOS protocol is used by Microsoft Networking for such features as Network Neighborhood.

VPN Policy Configuration for Manual Key Exchange

With Manual Key Management, you will not use an IKE policy. You must manually type in all the required key information. Click the VPN Policies link from the VPN section of the main menu to display the menu shown below.



General
Policy Name:
Remote VPN Endpoint: Address Type: IP Address
Address Data:

Traffic Selector
Local IP: - Select -
Start IP address: . . .
Finish IP address: . . .
Subnet Mask: . . .
Remote IP: - Select -
Start IP address: . . .
Finish IP address: . . .
Subnet Mask: . . .

AH Configuration
SPI - Incoming: (Hex, 3 - 8 Characters)
SPI - Outgoing: (Hex, 3 - 8 Characters)
☐ Enable Authentication Authentication Algorithm: MD5
Key - In:
Key - Out:
(MD5 - 16 chars; SHA-1 - 20 chars)

ESP Configuration
SPI - Incoming: (Hex, 3 - 8 Characters)
SPI - Outgoing: (Hex, 3 - 8 Characters)
☐ Enable Encryption Encryption Algorithm: DES
Key - In:
Key - Out:
(DES - 8 chars; 3DES - 24 chars)
☐ Enable Authentication Authentication Algorithm: MD5
Key - In:
Key - Out:
(MD5 - 16 chars; SHA-1 - 20 chars)
☐ NETBIOS Enable

Figure 6-4: VPN - Manual Policy Menu

The VPN Manual Policy fields are defined in the following table.

Table 6-1. VPN Manual Policy Configuration Fields

Field	Description
General	These settings identify this policy and determine its major characteristics.
Policy Name	The name of the VPN policy. Each policy should have a unique policy name. This name is not supplied to the remote VPN Endpoint. It is used to help you identify VPN policies.
Remote VPN Endpoint	The WAN Internet IP address or Fully Qualified Domain Name of the remote VPN firewall or client to which you want to connect. The remote VPN endpoint must have this FVL328's WAN Internet IP address entered as its "Remote VPN Endpoint."
Traffic Selector	These settings determine if and when a VPN tunnel will be established. If network traffic meets <i>all</i> criteria, then a VPN tunnel will be created.
Local IP	<p>The drop-down menu allows you to configure the source IP address of the outbound network traffic for which this VPN policy will provide security. Usually, this address will be from your network address space. The choices are:</p> <ul style="list-style-type: none"> • ANY for all valid IP addresses in the Internet address space • Single IP Address • Range of IP Addresses • Subnet Address <p>Note: Choosing ANY sends <i>all</i> traffic through the tunnel, which will eliminate activities such as Web access.</p>
Remote IP	<p>The drop-down menu allows you to configure the destination IP address of the outbound network traffic for which this VPN policy will provide security. Usually, this address will be from the remote site's corporate network address space. The choices are:</p> <ul style="list-style-type: none"> • ANY for all valid IP addresses in the Internet address space • Single IP Address • Range of IP Addresses • Subnet Address <p>Note: Choosing ANY sends <i>all</i> traffic to the WAN through the tunnel, preventing for example, remote management or response to ping.</p>

Table 6-1. VPN Manual Policy Configuration Fields

Field	Description
Authenticating Header (AH) Configuration	<p>AH specifies the authentication protocol for the VPN header. These settings must match the remote VPN endpoint.</p> <p>Note: The "Incoming" settings must match the "Outgoing" settings on the remote VPN endpoint, and the "Outgoing" settings must match the "Incoming" settings on the remote VPN endpoint.</p>
SPI - Incoming	Enter a Hex value (3 - 8 chars). Any value is acceptable, provided the remote VPN endpoint has the same value in its "Outgoing SPI" field.
SPI - Outgoing	Enter a Hex value (3 - 8 chars). Any value is acceptable, provided the remote VPN endpoint has the same value in its "Incoming SPI" field.
Enable Authentication	Use this check box to enable or disable AH. Authentication is often not used, so you can leave the check box unselected.
Authentication Algorithm	<p>If you enable AH, then select the authentication algorithm:</p> <ul style="list-style-type: none"> • MD5 – the default • SHA1 – more secure <p>Enter the keys in the fields provided. For MD5, the keys should be 16 characters. For SHA-1, the keys should be 20 characters.</p>
Key - In	<p>Enter the keys.</p> <ul style="list-style-type: none"> • For MD5, the keys should be 16 characters. • For SHA-1, the keys should be 20 characters. <p>Any value is acceptable, provided the remote VPN endpoint has the same value in its Authentication Algorithm "Key - Out" field.</p>
Key - Out	<p>Enter the keys in the fields provided.</p> <ul style="list-style-type: none"> • For MD5, the keys should be 16 characters. • For SHA-1, the keys should be 20 characters. <p>Any value is acceptable, provided the remote VPN endpoint has the same value in its Authentication Algorithm "Key - In" field.</p>
Encapsulated Security Payload (ESP) Configuration	<p>ESP provides security for the payload (data) sent through the VPN tunnel. Generally, you will want to enable both encryption and authentication. when you use ESP. Two ESP modes are available:</p> <ul style="list-style-type: none"> • Plain ESP encryption • ESP encryption with authentication <p>These settings must match the remote VPN endpoint.</p>
SPI - Incoming	Enter a Hex value (3 - 8 chars). Any value is acceptable, provided the remote VPN endpoint has the same value in its "Outgoing SPI" field.

Table 6-1. VPN Manual Policy Configuration Fields

Field	Description
SPI - Outgoing	Enter a Hex value (3 - 8 chars). Any value is acceptable, provided the remote VPN endpoint has the same value in its "Incoming SPI" field.
Enable Encryption	Use this check box to enable or disable ESP Encryption.
Encryption Algorithm	If you enable ESP Encryption, then select the Encryption Algorithm: <ul style="list-style-type: none"> • DES - the default • 3DES -more secure
Key - In	Enter the key in the fields provided. <ul style="list-style-type: none"> • For DES, the key should be 8 characters. • For 3DES, the key should be 24 characters. Any value is acceptable, provided the remote VPN endpoint has the same value in its Encryption Algorithm "Key - Out" field.
Key - Out	Enter the key in the fields provided. <ul style="list-style-type: none"> • For DES, the key should be 8 characters. • For 3DES, the key should be 24 characters. Any value is acceptable, provided the remote VPN endpoint has the same value in its Encryption Algorithm "Key - In" field.
Enable Authentication	Use this check box to enable or disable ESP authentication for this VPN policy.
Authentication Algorithm	If you enable authentication, then use this menu to select the algorithm: <ul style="list-style-type: none"> • MD5 – the default • SHA1 – more secure
Key - In	Enter the key. <ul style="list-style-type: none"> • For MD5, the key should be 16 characters. • For SHA-1, the key should be 20 characters. Any value is acceptable, provided the remote VPN endpoint has the same value in its Authentication Algorithm "Key - Out" field.
Key - Out	Enter the key in the fields provided. <ul style="list-style-type: none"> • For MD5, the key should be 16 characters. • For SHA-1, the key should be 20 characters. Any value is acceptable, provided the remote VPN endpoint has the same value in its Authentication Algorithm "Key - In" field.
NetBIOS Enable	Check this if you want NetBIOS traffic to be forwarded over the VPN tunnel. The NetBIOS protocol is used by Microsoft Networking for such features as Network Neighborhood.

Using Digital Certificates for IKE Auto-Policy Authentication

Digital certificates are character strings generated using encryption and authentication schemes which cannot be duplicated by anyone without access to the different values used in the production of the string. They are issued by Certification Authorities (CAs) to authenticate a person or a workstation uniquely. The CAs are authorized to issue these certificates by Policy Certification Authorities (PCAs), who are in turn certified by the Internet Policy Registration Authority (IPRA). The FVL328 is able to use certificates to authenticate users at the endpoints during the IKE key exchange process.

The certificates can be obtained from a certificate server an organization might maintain internally or from the established public CAs. The certificates are produced by providing the particulars of the user being identified to the CA. The information provided may include the user's name, e-mail ID, domain name, etc.

A CA is part of a trust chain. A CA has a public key which is signed. The combination of the signed public key and the private key enables the CA process to eliminate 'man in the middle' security threats. A 'self' certificate has your public key and the name of your CA, and relies on the CA's certificate to authenticate. Each CA has its own certificate. The certificates of a CA are added to the FVL328 and can then be used to form IKE policies for the user. Once a CA certificate is added to the FVL328 and a certificate is created for a user, the corresponding IKE policy is added to the FVL328. Whenever the user tries to send traffic through the FVL328, the certificates are used in place of pre-shared keys during initial key exchange as the authentication and key generation mechanism. Once the keys are established and the tunnel is set up the connection proceeds according to the VPN policy.

Certificate Revocation List (CRL)

Each Certification Authority (CA) maintains a list of the revoked certificates. The list of these revoked certificates is known as the Certificate Revocation List (CRL).

Whenever an IKE policy receives the certificate from a peer, it checks for this certificate in the CRL on the FVL328 obtained from the corresponding CA. If the certificate is not present in the CRL it means that the certificate is not revoked. IKE can then use this certificate for authentication. If the certificate is present in the CRL it means that the certificate is revoked, and the IKE will not authenticate the client.

You must manually update the FVL328 CRL regularly in order for the CA-based authentication process to remain valid.

Walk-Through of Configuration Scenarios

There are a variety of configurations you might implement with the FVL328. The scenarios listed below illustrate typical configurations you might use in your organization.

In order to help make it easier to set up an IPsec system, the following two scenarios are provided. These scenarios were developed by the VPN Consortium (<http://www.vpnc.org>). The goal is to make it easier to get the systems from different vendors to interoperate. NETGEAR is providing you with both of these scenarios in the following two formats:

- VPN Consortium Scenarios without any product implementation details
- VPN Consortium Scenarios based on the FVL328 user interface

The purpose of providing these two versions of the same scenarios is to help you determine where the two vendors use different vocabulary. Seeing the examples presented in these different ways will reveal how systems from different vendors do the same thing. See [Appendix E, “Virtual Private Networking”](#) for a full discussion of VPN and the configuration templates NETGEAR developed for publishing multi-vendor VPN integration configuration case studies.



Note: See [Appendix F, “NETGEAR VPN Configuration FVS318 or FVM318 to FVL328](#) for a detailed procedure for configuring VPN communications between a NETGEAR FVS318 and a FVL328. NETGEAR publishes additional interoperability scenarios with various gateway and client software products. Look on the NETGEAR Web site at www.netgear.com/docs for more details.

VPNC Scenario 1: Gateway-to-Gateway with Preshared Secrets

The following is a typical gateway-to-gateway VPN that uses a preshared secret for authentication.

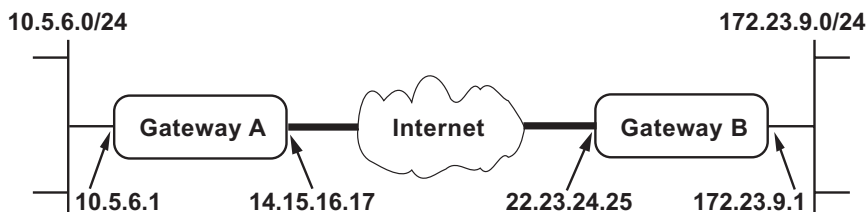


Figure 6-5: VPN Consortium Scenario 1

Gateway A connects the internal LAN 10.5.6.0/24 to the Internet. Gateway A's LAN interface has the address 10.5.6.1, and its WAN (Internet) interface has the address 14.15.16.17.

Gateway B connects the internal LAN 172.23.9.0/24 to the Internet. Gateway B's WAN (Internet) interface has the address 22.23.24.25. Gateway B's LAN interface address, 172.23.9.1, can be used for testing IPsec but is not needed for configuring Gateway A.

Note: The /24 after the IP address refers to the full range of IP addresses. For example, 10.5.6.0/24 refers to IP address 10.5.6.0 with the netmask 255.255.255.0.

The IKE Phase 1 parameters used in Scenario 1 are:

- Main mode
- TripleDES
- SHA-1
- MODP group 2 (1024 bits)
- pre-shared secret of "hr5xb84l6aa9r6"
- SA lifetime of 28800 seconds (eight hours) with no kbytes rekeying

The IKE Phase 2 parameters used in Scenario 1 are:

- TripleDES
- SHA-1
- ESP tunnel mode
- MODP group 2 (1024 bits)
- Perfect forward secrecy for rekeying
- SA lifetime of 3600 seconds (one hour) with no kbytes rekeying
- Selectors for all IP protocols, all ports, between 10.5.6.0/24 and 172.23.9.0/24, using IPv4 subnets

FVL328 Scenario 1: How to Configure the IKE and VPN Policies

Note: This scenario assumes all ports are open on the FVL328. You can verify this by reviewing the security settings as seen in the “Rules menu” on page 5-6.

Use this scenario illustration and configuration screens as a model to build your configuration.

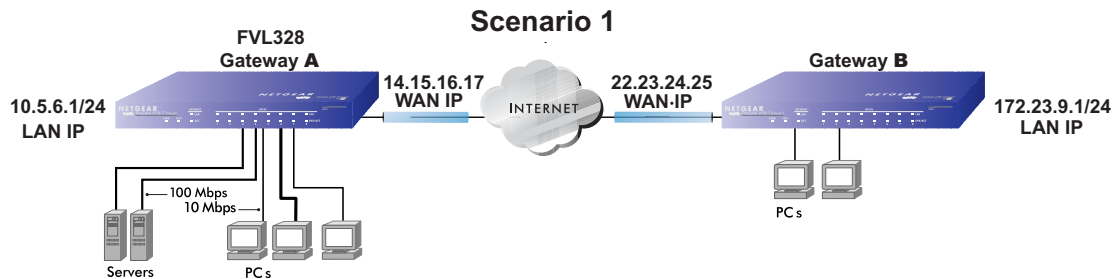


Figure 6-6: LAN to LAN VPN access from an FVL328 to an FVL328

1. Log in to the FVL328 labeled Gateway A as in the illustration.

Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default user name of **admin** and default password of **password**, or using whatever Password and LAN address you have chosen for the firewall.

2. Configure the WAN (Internet) and LAN IP addresses of the FVL328.

- a. From the main menu Setup section, click the Basic Settings link.



Figure 6-7: FVL328 Internet IP Address menu

- b. Select whether enable or disable NAT (Network Address Translation). NAT allows all LAN computers to gain Internet access via this Router, by sharing this Router's WAN IP address. In most situations, NAT is essential for Internet access via this Router. You should only disable NAT if you are sure you do not require it. When NAT is disabled, only standard routing is performed by this Router.
- c. Configure the WAN Internet Address according to the settings in [Figure 6-6](#) above and click Apply to save your settings. For more information on configuring the WAN IP settings in the Basic Setup topics, please see [“How to Complete a Manual Configuration” on page 3-15](#).
- d. From the main menu Advanced section, click the LAN IP Setup link.

LAN IP Setup

LAN TCP/IP Setup

IP Address: 10 . 5 . 6 . 1

IP Subnet Mask: 255 . 255 . 255 . 0

RIP Direction: None ▼

RIP Version: Disabled ▼

☒ **Use router as DHCP server**

Starting IP Address: 10 . 5 . 6 . 2

Ending IP Address: 10 . 5 . 6 . 254

Reserved IP Table

#	IP Address	Mac Address	Device Name
---	------------	-------------	-------------

Add Edit Delete

Apply Cancel

- e. Configure the LAN IP address according to the settings in [Figure 6-6](#) above and click Apply to save your settings. For more information on LAN TCP/IP setup topics, please see [“How to Configure LAN TCP/IP Setup Settings” on page 4-3](#).

Note: After you click Apply to change the LAN IP address settings, your workstation will be disconnected from the FVL328. You will have to log on with `http://10.5.6.1` which is now the address you use to connect to the built-in Web-based configuration manager of the FVL328.

3. Set up the IKE Policy illustrated below on the FVL328.
 - a. From the main menu VPN section, click the IKE Policies link, and then click the Add button to display the screen below.

IKE Policy Configuration

General

Policy Name:

Direction/Type:

Exchange Mode:

Local

Local Identity: ☒ Local IP address
☐ Name:

Remote

Remote Identity: ☒ Remote IP address
☐ Name:

IKE SA Parameters

Encryption Algorithm:

Authentication Algorithm:

Authentication Method: ☒ Pre-shared Key

☐ RSA Signature

Diffie-Hellman (DH) Group:

SA Life Time: (secs)

Figure 6-8: Scenario 1 IKE Policy

- b. Configure the IKE Policy according to the settings in the illustration above and click Apply to save your settings. For more information on IKE Policy topics, please see [“IKE Policies’ Automatic Key and Authentication Management”](#) on page 6-3.

4. Set up the FVL328 VPN -Auto Policy illustrated below.

- a. From the main menu VPN section, click the VPN Policies link, and then click the Add Auto Policy button.

VPN - Auto Policy

General

Policy Name:

IKE policy:

Remote VPN Endpoint: Address Type: Address Data:

SA Life Time: (Seconds) (Kbytes)

☐ IPsec PFS PFS Key Group:

Traffic Selector

Local IP: Start IP address: Finish IP address: Subnet Mask:

Remote IP: Start IP address: Finish IP address: Subnet Mask:

AH Configuration

☐ Enable Authentication Authentication Algorithm:

ESP Configuration

☐ Enable Encryption Encryption Algorithm:

☐ Enable Authentication Authentication Algorithm:

☐ NETBIOS Enable

Figure 6-9: Scenario 1 VPN - Auto Policy

- b. Configure the IKE Policy according to the settings in the illustration above and click Apply to save your settings. For more information on IKE Policy topics, please see [“IKE Policies’ Automatic Key and Authentication Management”](#) on page 6-3.

5. After applying these changes, you will see a table entry like the one below.

VPN Policies

Policy Table

#	Enable	Name	Type	Local	Remote	Auth	ESP
1	<input checked="" type="checkbox"/>	scenario1a	Auto	10.5.8.0/255.255.255.0	172.23.9.0/255.255.255.0	Disabled	ESP

Edit Move Delete

Apply Cancel

Add Auto Policy Add Manual Policy

Figure 6-10: VPN Policies table

Now all traffic from the range of LAN IP addresses specified on FVL328 A and FVL328 B will flow over a secure VPN tunnel.

How to Check VPN Connections

You can test connectivity and view VPN status information on the FVL328.

1. To test connectivity between the Gateway A FVL328 LAN and the Gateway B LAN, follow these steps:
 - a. Using our example, from a computer attached to the FVL328 on LAN A, on a Windows computer click the Start button on the taskbar and then click Run.
 - b. Type `ping -t 172.23.9.1`, and then click OK.
 - c. This will cause a continuous ping to be sent to the LAN interface of Gateway B. After between several seconds and two minutes, the ping response should change from “timed out” to “reply.”
 - d. At this point the connection is established.

2. To test connectivity between the FVL328 Gateway A and Gateway B WAN ports, follow these steps:
 - a. Using our example, log in to the FVL328 on LAN A, go to the main menu Maintenance section and click the Diagnostics link.
 - b. To test connectivity to the WAN port of Gateway B, enter **22.23.24.25**, and then click Ping.
 - c. This will cause a ping to be sent to the WAN interface of Gateway B. After between several seconds and two minutes, the ping response should change from “timed out” to “reply.” You may have to run this test several times before you get the “reply” message back from the target FVL328.
 - d. At this point the connection is established.

Note: If you want to ping the FVL328 as a test of network connectivity, be sure the FVL328 is configured to respond to a ping on the Internet WAN port by checking the check box seen in [“Rules menu” on page 5-6](#). However, to preserve a high degree of security, you should turn off this feature when you are finished with testing.
3. To view the FVL328 event log and status of Security Associations, follow these steps:
 - a. Go to the FVL328 main menu VPN section and click the VPN Status link.
 - b. The log screen will display a history of the VPN connections, and the IPSec SA and IKE SA tables will report the status and data transmission statistics of the VPN tunnels for each policy.

FVL328 Scenario 2: Authenticating with RSA Certificates

The following is a typical gateway-to-gateway VPN that uses Public Key Infrastructure X.509 (PKIX) certificates for authentication. The network setup is identical to the one given in Scenario 1. The IKE Phase 1 and Phase 2 parameters are identical to the ones given in Scenario 1, with the exception that the identification is done with signatures authenticated by PKIX certificates.

Note: Before completing this configuration scenario, make sure the correct Time Zone is set on the FVL328. For instructions on this topic, please see, [“How to Set Your Time Zone” on page 5-14](#).

1. Obtain a root certificate.

- a. Obtain the root certificate (which includes the CA’s public key) from a Certificate Authority (CA).

Note: The procedure for obtaining certificates differs between a CA like Verisign and a CA such as a Windows 2000 certificate server, which an organization operates for providing certificates for its members. For example, an administrator of a Windows 2000 certificate server might provide it to you via e-mail.

- b. Save the certificate as a text file called *trust.txt*.

2. Install the trusted CA certificate for the Trusted Root CA.

- a. Log in to the FVL328.
- b. From the main menu VPN section, click the CAs link.
- c. Click Add to add a CA.
- d. Click Browse to locate the *trust.txt* file.
- e. Click Upload.

Certificate Authorities

Trusted Certificates (Certificate of CAs)

	#	CA Identity (Subject Name)	Issuer Name	Expiry Time
<input checked="" type="radio"/>	1	/O=VPN/C=US/OU=Conformance testing root 1	/O=VPN/C=US/OU=Conformance testing root 1	Jan 11 00:34:20 2011 GMT
<input type="radio"/>	2	/C=F/O=SSH Communications Security/OU=Web test/CN=Test CA 1	/C=F/O=SSH Communications Security/OU=Web test/CN=Test CA 1	Dec 31 23:59:59 2003 GMT

Add

Delete

Figure 6-11: Certificate Authorities table

You will now see a screen such as the one above showing that the Certificate Authority is now registered with the FVL328.

3. Create a certificate request for the FVL328.

- a. From the main menu VPN section, click the Certificates link.

- b. Click the Generate Request button to display the screen illustrated in [Figure 6-12](#) below.

Generate Self Certificate Request

Required

Name

Subject

Hash Algorithm

Signature Algorithm

Signature Key Length

Optional

IP Address

Domain Name

E-mail Address

Figure 6-12: Generate Self Certificate Request menu

- c. Fill in the fields on the Add Self Certificate screen.
- Required
 - Name. Enter a name to identify this certificate.
 - Subject. This is the name other organizations will see as the holder (owner) of this certificate. This should be your registered business name or official company name. Generally, all certificates should have the same value in the Subject field.
 - Hash Algorithm. Select the desired option: MD5 or SHA1.
 - Signature Algorithm: RSA.
 - Signature Key Length. Select the desired option: 512, 1024, or 2048.
 - Optional
 - IP Address. If you have a fixed IP address on your WAN (Internet) port, you can enter it here. Otherwise, you should leave this blank.
 - Domain Name. If you have a domain name, you can enter it here. Otherwise, you should leave this blank.
 - E-mail Address. You can enter your e-mail address here.

- d. Click the Next button to continue. The FVL328 generates a Self Certificate Request as shown below.

Self Certificate Request

Certificate Details

Subject Name	test
Hash Algorithm	SHA1
Signature Algorithm	RSA
Key Length	1024

Data to supply to CA

```

-----BEGIN CERTIFICATE REQUEST-----
MIIBTjCBuAIBAjAPMQowCwYDVQQDEwROZXMOMIGfMA0GCSqGSIb3DQEBAQUAA4GN
ADCBiQKBgQC5cI3OM9NZyJ2Hpvj83JEmBo+xbkJc0YVCPDop7ud+b6EYbQd0o4v
bt6pCChZTmZCk1p8yE94IB25wjcgR8ntJotZP2MhEL1ItehXT11U09sUWtMwp7Tl
T3Q6Q/1Jr37extkgdtHw17rhxo0wt0IJYUACvIgZ872HSp4ZT0er8wIDAQABoAAw
DQYJKoZIhvcNAQEFBQADgYEAtnWmKz0zrZeR68BieAV6FddG4WcljA8401dRdkdi
bx1TrMgYzfHv8e0simPtQML5aVXFd6iFYHOF4aXQpCitv/FLce80Gv15wqe0FIGA
c1j18mRGa70MiJtTY+Ro+PevIbs1T3B1AewTj4qMYRYk0vJ9yFIAYcRnggf+NPS/
cfU=
-----END CERTIFICATE REQUEST-----

```

Back Done Cancel

Highlight, copy and paste this data into a text file.

Figure 6-13: Self Certificate Request data

4. Transmit the Self Certificate Request data to the Trusted Root CA.

- a. Highlight the text in the Data to supply to CA area, copy it, and paste it into a text file.
- b. Give the certificate request data to the CA. In the case of a Windows 2000 internal CA, you might simply e-mail it to the CA administrator. The procedures of a CA like Verisign and a CA such as a Windows 2000 certificate server administrator will differ. Follow the procedures of your CA.
- c. When you have finished gathering the Self Certificate Request data, click the Done button. You will return to the Certificates screen where your pending “FVL328” Self Certificate Request will be listed, as illustrated in [Figure 6-14](#) below.

The screenshot shows the 'Certificates' page with two main sections. The first section, 'Active Self Certificates', contains a table with one entry for 'Netgear' and a 'Delete' button. The second section, 'Self Certificate Requests', is circled and contains a table with one entry for 'FVL328' with the status 'Waiting for Certificate upload'. Below this table are 'Delete' and 'Upload Certificate' buttons. At the bottom of the page is a 'Generate Request' button.

Active Self Certificates				
#	Name	Subject Name	Issuer Name	Expiry Time
1	Netgear	FQDN: netgear.com	/O=VPNC/OU=Conformance testing root 1	Mar 26 22:53:29 2011 GMT

Delete

Self Certificate Requests		
#	Name	Status
1	FVL328	Waiting for Certificate upload

Delete Upload Certificate

Generate Request

Figure 6-14: Self Certificate Requests table**5. Receive the certificate back from the Trusted Root CA and save it as a text file.**

Note: In the case of a Windows 2000 internal CA, the CA administrator might simply email it to back to you. Follow the procedures of your CA. Save the certificate you get back from the CA as a text file called *final.txt*.

6. Upload the new certificate.

- From the main menu VPN section, click the Certificates link.
- Click the radio button of the Self Certificate Request you want to upload.
- Click the Upload Certificate button.
- Browse to the location of the file you saved in step 5 above, which contains the certificate from the CA.
- Click the Upload button.

- f. You will now see the “FVL328” entry in the Active Self Certificates table and the pending “FVL328” Self Certificate Request is gone, as illustrated below.

Certificates

Active Self Certificates

#	Name	Subject Name	Issuer Name	Expiry Time
1	Netgear	FQDN: netgear.com	/O=VPNC/OU=Conformance testing root 1	Mar 26 22:53:29 2011 GMT
2	FVL328	/CN=test	/C=FI/O=SSH Communications Security/OU=Web test/CN=Test CA 1	Dec 1 00:00:00 2003 GMT

Delete

Self Certificate Requests

#	Name	Status
---	------	--------

Delete Upload Certificate

Generate Request

Figure 6-15: Self Certificates table

7. Associate the new certificate and the Trusted Root CA certificate on the FVL328.

- a. Create a new IKE policy called **Scenario_2** with all the same properties of **Scenario_1** (see “[Scenario 1 IKE Policy](#)” on page 6-19) except now use the RSA Signature instead of the shared key.

IKE SA Parameters

Encryption Algorithm: 3DES

Authentication Algorithm: SHA-1

Authentication Method: ☒ RSA Signature (requires Certificate)

Diffie-Hellman (DH) Group: Group 2 (1024 Bit)

SA Life Time: 2000 (secs)

Figure 6-16: IKE policy using RSA Signature

- b. Create a new VPN Auto Policy called **scenario2a** with all the same properties as **scenario1a** except that it uses the IKE policy called Scenario_2.

Now, the traffic from devices within the range of the LAN subnet addresses on FVL328 Gateway A and Gateway B will be authenticated using the certificates and generated keys rather than via a shared key.

8. Set up Certificate Revocation List (CRL) checking.

- a. Get a copy of the CRL from the CA and save it as a text file.

Note: The procedure for obtaining a CRL differs from a CA like Verisign and a CA such as a Windows 2000 certificate server, which an organization operates for providing certificates for its members. Follow the procedures of your CA.

- b. From the main menu VPN section, click the CRL link.
- c. Click Add to add a CRL.
- d. Click Browse to locate the CRL file.
- e. Click Upload.

Now expired or revoked certificates will not be allowed to use the VPN tunnels managed by IKE policies which use this CA.

Note: You must update the CRLs regularly in order to maintain the validity of the certificate-based VPN policies.

Chapter 7

Managing Your Network

This chapter describes how to perform network management tasks with your FVL328 Prosafe High Speed VPN Firewall.

Network Management

The FVL328 provides remote management access and a variety of status and usage information which is discussed below.

How to Configure Remote Management

Using the Remote Management page, you can allow a user or users on the Internet to configure, upgrade and check the status of your FVL328 Prosafe High Speed VPN Firewall.



Note: Be sure to change the router's default password to a very secure password. The ideal password should contain no dictionary words from any language, and should be a mixture of letters (both upper and lower case), numbers, and symbols. Your password can be up to 30 characters.

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default user name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
2. In the Advanced section on the left navigator, select Remote Management.
3. Select the Turn Remote Management On check box.
4. Specify what external addresses will be allowed to access the firewall's remote management.

Note: For security reasons, restrict access to as few external IP addresses as practical.

- a. To allow access from any IP address on the Internet, select Everyone.
- b. To allow access from a range of IP addresses on the Internet, select IP address range. Enter a beginning and ending IP address to define the allowed range.

- c. To allow access from a single IP address on the Internet, select Only this PC.
Enter the IP address that will be allowed access.
5. Specify the Port Number that will be used for accessing the management interface.

Web browser access normally uses the standard HTTP service port 80. For greater security, you can change the remote management Web interface to a custom port by entering that number in the box provided. Choose a number between 1024 and 65535, but do not use the number of any common service port. The default is 8080, which is a common alternate for HTTP.
6. The IP Address to connect to this device is used to manage this router via the Internet. You need its public IP Address, as seen from the Internet. This public IP Address is allocated by your ISP, and is shown here. But if your ISP account uses a Dynamic IP Address, the address can change each time you connect to your ISP. There are 2 solutions to this problem:
 - a. Have your ISP allocate you a Fixed IP address.
 - b. Use the DDNS (Dynamic DNS) feature so you can connect using a domain name, rather than an IP address.
7. Click Apply to have your changes take effect.

When accessing your router from the Internet, the Secure Sockets Layer (SSL) will be enabled. You will enter *https://* and type your router's WAN IP address into your browser's Address (in IE) or Location (in Netscape) box, followed by a colon (:) and the custom port number. For example, if your external address is 134.177.0.123 and you use port number 8080, enter in your browser:

`https://134.177.0.123:8080`

Note: When you remotely connect to the FVL with a browser via SSL, you may get a message regarding the SSL certificate. If you are using a Windows computer with Internet Explorer 5.5 or higher, simply click Yes to accept the certificate.

Tip: If you are using a dynamic DNS service such as TZO, you can always identify the IP address of your FVL328 by running TRACERT from the Windows Start menu Run option. For example, **tracert yourFVL328.mynetgear.net** and you will see the IP address your ISP has currently assigned to the FVL328.

Viewing Router Status and Usage Statistics

From the main menu, under Maintenance, select Router Status to view the screen in [Figure 7-1](#) below.

The screenshot shows the 'Router Status' screen with the following information:

Router Status	
System Name	FVL328
Firmware Version	Version 1.5 Release 07
LAN Port	
MAC Address	00:09:5b:2c:77:fe
IP Address	192.168.0.1
DHCP	ON
IP Subnet Mask	255.255.255.0
WAN Port	
NAT (Network Address Translation)	ON
MAC Address	00:09:5b:2c:77:ff
IP Address	0.0.0.0
DHCP	DHCP Client
IP Subnet Mask	0.0.0.0
Domain Name Server	

At the bottom, there are two buttons: 'Show Statistics' and 'WAN Status'.

Figure 7-1: Router Status screen

The Router Status menu provides a limited amount of status and usage information.

This screen shows the following parameters:


Table 7-1. Router Status Fields

Field	Description
System Name	This field displays the Host Name assigned to the firewall in the Basic Settings menu.
Firmware Version	This field displays the firewall firmware version.
LAN Port	These parameters apply to the Local (WAN) port of the firewall.
MAC Address	This field displays the Ethernet MAC address being used by the Local (LAN) port of the firewall.
IP Address	This field displays the IP address being used by the Local (LAN) port of the firewall. The default is 192.168.0.1

Table 7-1. Router Status Fields

Field	Description
DHCP	If set to OFF, the firewall will not assign IP addresses to local computers on the LAN. If set to ON, the firewall is configured to assign IP addresses to local computers on the LAN.
IP Subnet Mask	This field displays the IP Subnet Mask being used by the Local (LAN) port of the firewall. The default is 255.255.255.
WAN Port	These parameters apply to the Internet (WAN) port of the firewall.
Network Address Translation (NAT)	NAT allows all LAN computers to gain Internet access via this Router, by sharing this Router's WAN IP address. You should only turn NAT OFF if you are sure you do not require it..
MAC Address	This field displays the Ethernet MAC address being used by the Internet (WAN) port of the firewall.
IP Address	This field displays the IP address being used by the Internet (WAN) port of the firewall. If no address is shown, the firewall cannot connect to the Internet.
DHCP	If set to None, the firewall is configured to use a fixed IP address on the WAN. If set to Client, the firewall is configured to obtain an IP address dynamically from the ISP
IP Subnet Mask	This field displays the IP Subnet Mask being used by the Internet (WAN) port of the firewall.
Domain Name Server (DNS)	This field displays the DNS Server IP addresses being used by the firewall. These addresses are usually obtained dynamically from the ISP.

Click the “Show Statistics” button to display firewall usage statistics, as shown in [Figure 7-2](#) below:

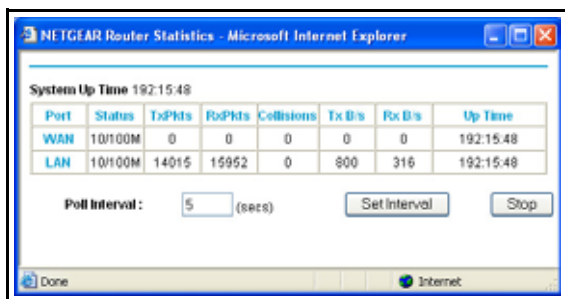**Figure 7-2. Router Statistics screen**

This screen shows the following statistics:

Table 7-2. Router Statistics Fields

Field	Description
System up Time	The time elapsed since the last power cycle or reset.
WAN or LAN Port	The statistics for the WAN (Internet) and LAN (local) ports. For each port, the screen displays:
Status	The link status of the port.
TxPkts	The number of packets transmitted on this port since reset or manual clear.
RxPkts	The number of packets received on this port since reset or manual clear.
Collisions	The number of collisions on this port since reset or manual clear.
Tx B/s	The current line utilization—percentage of current bandwidth used on this port.
Rx B/s	The average line utilization —average CLU for this port.
Up Time	The time elapsed since this port acquired the link.
Poll Interval	Specifies the intervals at which the statistics are updated in this window. Click Stop to freeze the display. Click Set Interval to set the polling refresh interval.

Viewing Attached Devices

The Attached Devices menu contains a table of all IP devices that the firewall has discovered on the local network. From the main menu of the browser interface, under the Maintenance heading, select Attached Devices to view the table, shown in [Figure 7-3](#)

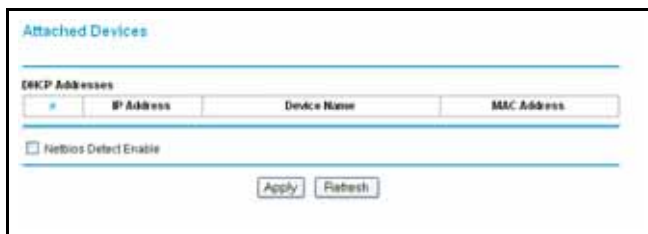


Figure 7-3: Attached Devices menu

For each device, the table shows the IP address, Device Name (NetBIOS Host Name, if available), and the Ethernet MAC address.

Select the check box if you want to enable NetBIOS detection. If the NetBIOS name is not available, “Unknown” is listed as the Device Name.

If the firewall is rebooted, the table data is lost until the firewall rediscovers the devices. To force the firewall to look for attached devices, click the Refresh button.

Viewing, Selecting, and Saving Logged Information

The firewall logs security-related events such as denied incoming service requests, hacker probes, and administrator logins. If you enabled content filtering in the Block Sites menu, the Logs page shows you when someone on your network tries to access a blocked site. If you enabled e-mail notification, you will receive these logs in an e-mail message. If you do not have e-mail notification enabled, you can view the logs here. An example is shown below.

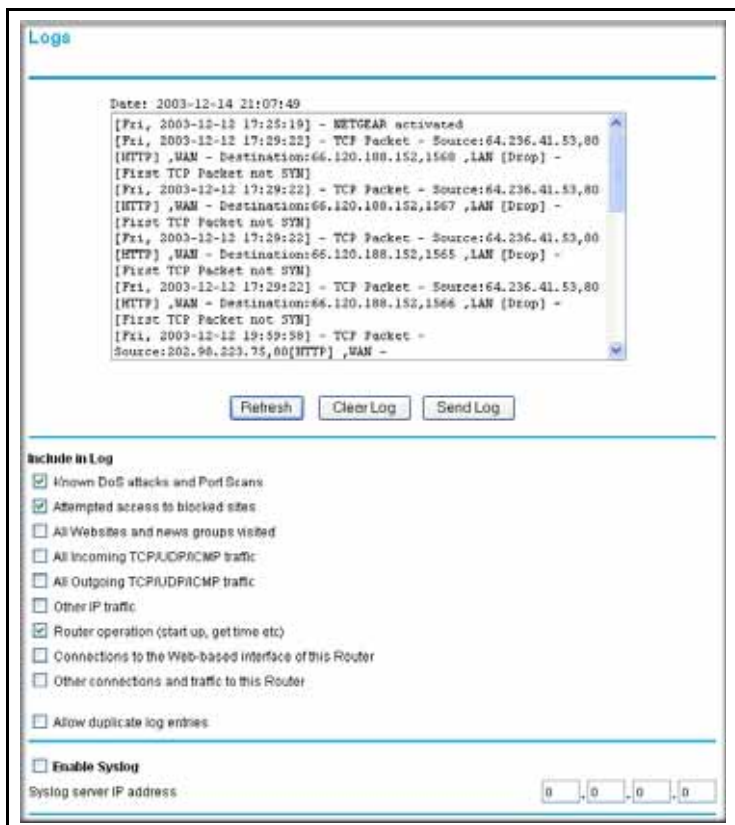


Figure 7-4: Security Logs menu

Log entries are described below:

Table 7-5: Security Log entry descriptions

Field	Description
Date and Time	The date and time the log entry was recorded.
Description or Action	The type of event and what action was taken if any.
Source IP	The IP address of the initiating device for this log entry.
Source port and interface	The service port number of the initiating device, and whether it originated from the LAN or WAN.
Destination	The name or IP address of the destination device or Web site.
Destination port and interface	The service port number of the destination device, and whether it's on the LAN or WAN.

Log action buttons are described below:

Table 7-6: Security Log action buttons

Field	Description
Refresh	Click this button to refresh the log screen.
Clear Log	Click this button to clear the log entries.
Send Log	Click this button to e-mail the log immediately.
Apply	Click this button to apply any changed settings.
Cancel	Click this button to clear any changed settings.

Changing the Include in Log Settings

You can choose to log additional information. Those optional selections are as follows:

- Known DoS attacks and Port Scans
- Attempted access to blocked sites
- All Web sites and news groups visited
- All Incoming TCP/UDP/ICMP traffic
- All Outgoing TCP/UDP/ICMP traffic
- Other IP traffic — if selected, all other traffic (IP packets which are not TCP, UDP, or ICMP) is logged
- Router operation (start up, get time, etc.) — if selected, Router operations, such as starting up and getting the time from the Internet Time Server, are logged.
- Connection to the Web-based interface of this Router
- Other connections and traffic to this Router — if selected, this will log traffic sent to this Router (rather than through this Router to the Internet).
- Allow duplicate log entries — if selected, events or packets that fall within more than one (1) category above will have a log entry for each category in which they belong. This will generate a large number of log entries.

If not selected, then events or packets will only be logged once. Usually, you should not allow duplicate log entries.


Enabling the Syslog Feature

You can choose to write the logs to a computer running a SYSLOG program. To use this feature, check the box under Syslog and enter the IP address of the server where the log file will be written. Then click Apply to activate the Syslog feature.

For a detailed description of the log files, see [Appendix D, “Firewall Log Formats”](#).

Enabling Security Event E-mail Notification

In order to receive logs and alerts by e-mail, you must provide your e-mail information in the E-mail menu:

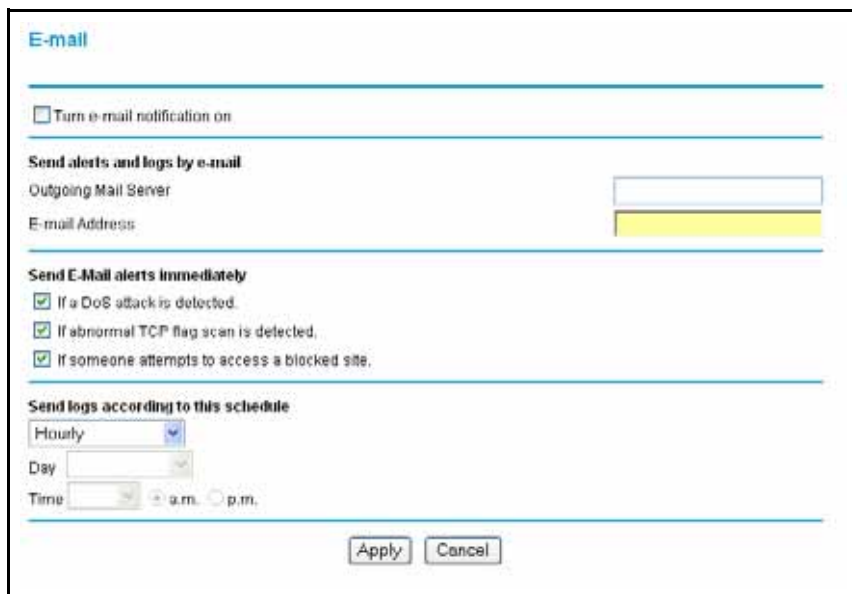

The screenshot shows the 'E-mail' configuration window. At the top, there is a checkbox labeled 'Turn e-mail notification on'. Below this, a section titled 'Send alerts and logs by e-mail' contains two text input fields: 'Outgoing Mail Server' and 'E-mail Address'. The 'E-mail Address' field is highlighted in yellow. Underneath, a section titled 'Send E-Mail alerts immediately' has three checked checkboxes: 'If a DoS attack is detected.', 'If abnormal TCP flag scan is detected.', and 'If someone attempts to access a blocked site.'. The final section, 'Send logs according to this schedule', includes a dropdown menu set to 'Hourly', and fields for 'Day' and 'Time' (with 'a.m.' and 'p.m.' radio buttons). 'Apply' and 'Cancel' buttons are at the bottom right.

Figure 7-7: E-mail notification menu

To enable E-mail notification, configure the following fields:

- **Turn e-mail notification on**
Select this check box if you want to receive e-mail logs and alerts from the firewall.
- **Your outgoing mail server**
Enter the name or IP address of your ISP's outgoing (SMTP) mail server (such as **mail.myISP.com**). You may be able to find this information in the configuration menu of your e-mail program. If you leave this box blank, log and alert messages will not be sent via e-mail.
- **Send to this e-mail address**
Enter the e-mail address to which logs and alerts will be sent. This e-mail address will also be used as the From address. If you leave this box blank, log and alert messages will not be sent via e-mail.

You can specify that logs are automatically sent to the specified e-mail address with these options:

- Send alert immediately
Select this check box if you want immediate notification of a significant security event, such as a known attack, abnormal TCP flag, or attempted access to a blocked site.
- Send logs according to this schedule
Specify how often to send the logs: None, Hourly, Daily, Weekly, or When Full.
 - Day for sending log
Specify which day of the week to send the log. Relevant when the log is sent weekly or daily.
 - Time for sending log
Specify the time of day to send the log. Relevant when the log is sent daily or weekly.

If the Weekly, Daily or Hourly option is selected and the log fills up before the specified period, the log is automatically e-mailed to the specified e-mail address. After the log is sent, the log is cleared from the firewall's memory. If the firewall cannot e-mail the log file, the log buffer may fill up. In this case, the firewall overwrites the log and discards its contents.

Backing Up, Restoring, or Erasing Your Settings

The configuration settings of the FVL328 Firewall are stored in a configuration file in the firewall. This file can be backed up to your computer, restored, or reverted to factory default settings. The procedures below explain how to do these tasks.

How to Back Up the FVL328 Configuration to a File

1. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default User Name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.

- From the Maintenance heading of the main menu, select the Settings Backup menu as seen below.

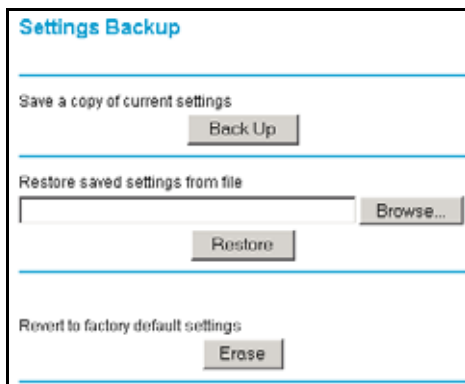


Figure 7-8: Settings Backup menu

- Click Backup to save a copy of the current settings.
- Store the .cfg file on a computer on your network.

How to Restore a Configuration from a File

- Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default user name of **admin**, default password of **password**, or using whatever Password and LAN address you have chosen for the firewall.
- From the Maintenance heading of the main menu, select the Settings Backup menu as seen in [Figure 7-8](#).
- Under Restore saved settings from file, enter the full path to the file on your network or click the Browse button to browse to the file.
- When you have located the .cfg file, click the Restore button to upload the file to the firewall.
- The firewall will then reboot automatically.

How to Erase the Configuration

It is sometimes desirable to restore the firewall to the factory default settings. This can be done by using the Erase function.

1. To erase the configuration, from the Settings Backup menu, click the Erase button under Revert to factory default settings.
2. The firewall will then reboot automatically.

After an erase, the firewall's password will be **password**, the LAN IP address will be 192.168.0.1, and the router's DHCP client will be enabled.

Note: To restore the factory default configuration settings without knowing the login password or IP address, you must use the Default Reset button on the rear panel of the firewall. See [“How to Use the Default Reset Button” on page 8-7](#).

Running Diagnostic Utilities and Rebooting the Router

The FVL328 Firewall has a diagnostics feature. You can use the diagnostics menu to perform the following functions from the firewall:

- Ping an IP Address to test connectivity to see if you can reach a remote host.
- Perform a DNS Lookup to test if an Internet name resolves to an IP address to verify that the DNS server configuration is working.
- Display the Routing Table to identify what other routers the router is communicating with.
- Reboot the Router to enable new network configurations to take effect or to clear problems with the router's network connection.

From the main menu of the browser interface, under the Maintenance heading, select the Diagnostics link to display the menu shown below. Then select the function you want to activate.


The image shows a web-based diagnostics menu for a Netgear firewall. The menu is titled "Diagnostics" in a blue header. It contains four sections, each with a title, input fields, and a button. 1. "Ping an IP address" section: Includes an "IP Address" label and four small input boxes for IP octets, followed by a "Ping" button. 2. "Perform a DNS Lookup" section: Includes an "Internet Name" label and a text input box, followed by a "Lookup" button. Below this is an "IP address:" label and a "DNS Server:" label, each followed by a text input box. 3. "Display the Routing Table" section: Includes a "Display" button. 4. "Reboot the Router" section: Includes a "Reboot" button.

Figure 7-9: Diagnostics menu

Upgrading the Router's Firmware

The software of the FVL328 Firewall is stored in FLASH memory, and can be upgraded as new software is released by NETGEAR. Upgrade files can be downloaded from the NETGEAR Web site. If the upgrade file is compressed (.ZIP file), you must first extract the binary (.BIN or .IMG) file before uploading it to the firewall.

The Web browser used to upload new firmware into the firewall must support HTTP uploads. Use Microsoft Internet Explorer 5.0 or above, or Netscape Navigator 4.7 or above.

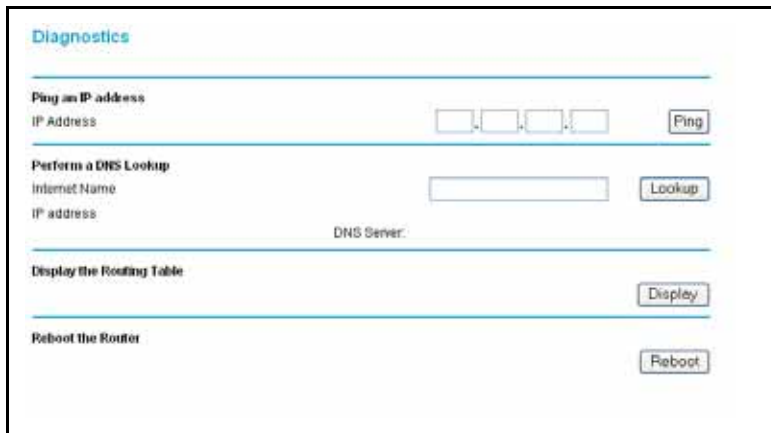

Note: Product updates are available on the NETGEAR, Inc. Web site at <http://www.netgear.com/support/main.asp>. Documentation updates are available on the NETGEAR, Inc. Web site at <http://www.netgear.com/docs>.

How to Upgrade the Router

1. Download and unzip the new software file from NETGEAR.
2. Log in to the firewall at its default LAN address of <http://192.168.0.1> with its default user name of **admin**, default password of **password**, or using whatever password and LAN address you have chosen for the firewall.
3. From the main menu of the browser interface, under the Maintenance heading, select the Router Upgrade heading to display the menu shown in [Figure 7-10](#).

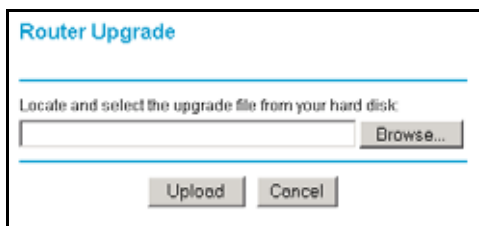


Figure 7-10: Router Upgrade menu

4. In the Router Upgrade menu, click Browse to locate the binary (.BIN or .IMG) upgrade file.
5. Click Upload.



Note: Do not interrupt the process of uploading software to the firewall by closing the window, clicking a link, or loading a new page. Interrupting the upgrade may corrupt the software. When the upload is complete, your firewall will automatically restart. The upgrade process will typically take about one minute. In some cases, you may need to clear the configuration and reconfigure the firewall after upgrading.

Chapter 8

Troubleshooting

This chapter gives information about troubleshooting your FVL328 Prosafe High Speed VPN Firewall. For the common problems listed, go to the section indicated.

- Is the firewall on?
- Have I connected the firewall correctly?
Go to [“Basic Functions” on page 8-1](#).
- I can’t access the firewall’s configuration with my browser.
Go to [“Troubleshooting the Web Configuration Interface” on page 8-3](#).
- I’ve configured the firewall but I can’t access the Internet.
Go to [“Troubleshooting the ISP Connection” on page 8-4](#).
- I can’t remember the firewall’s configuration password, or I want to clear the configuration and start over again.
Go to [“Restoring the Default Configuration and Password” on page 8-7](#).
- Is there a new version of the firmware that corrects known problems or adds new features?



Note: Product updates are available on the NETGEAR Web site at www.netgear.com/support/main.asp. Documentation updates are available on the NETGEAR, Inc. Web site at www.netgear.com/docs.

Basic Functions

After you turn on power to the firewall, the following sequence of events should occur:

1. When power is first applied, verify that the Power LED is on.
2. Verify that the Test LED lights within a few seconds, indicating that the self-test procedure is running.
3. After approximately 10 seconds, verify that:

- a. The Test LED is not lit.
- b. The Local port Link LEDs are lit for any local ports that are connected.
- c. The Internet Link port LED is lit.

If a port's Link LED is lit, a link has been established to the connected device. If a port is connected to a 100 Mbps device, verify that the port's 100 LED is lit.

If any of these conditions does not occur, refer to the appropriate following section.

Power LED Not On

If the Power and other LEDs are off when your firewall is turned on:

- Make sure that the power cord is properly connected to your firewall and that the power supply adapter is properly connected to a functioning power outlet.
- Check that you are using the 12VDC power adapter supplied by NETGEAR for this product.

If the error persists, you have a hardware problem and should contact technical support.

Test LED Never Turns On or Test LED Stays On

When the firewall is turned on, the Test LED turns on for about 10 seconds and then turns off. If the Test LED does not turn on, or if it stays on, there is a fault within the firewall.

If you experience problems with the Test LED:

- Cycle the power to see if the firewall recovers and the LED blinks for the correct amount of time.

If all LEDs including the Test LED are still on one minute after power up:

- Cycle the power to see if the firewall recovers.
- Clear the firewall's configuration to factory defaults. This will set the firewall's IP address to 192.168.0.1. This procedure is explained in [“How to Use the Default Reset Button” on page 8-7](#).

If the error persists, you might have a hardware problem and should contact technical support.

Local or Internet Port Link LEDs Not On

If either the Local or Internet Port Link LEDs do not light when the Ethernet connection is made, check the following:

- Make sure that the Ethernet cable connections are secure at the firewall and at the hub or computer.
- Make sure that power is turned on to the connected hub or computer.
- Be sure you are using the correct cable:
 - When connecting the firewall's Internet port to a cable or DSL modem, use the cable that was supplied with the cable or DSL modem. This cable could be a standard straight-through Ethernet cable or an Ethernet crossover cable.

Troubleshooting the Web Configuration Interface

If you are unable to access the firewall's Web Configuration interface from a computer on your local network, check the following:

- Check the Ethernet connection between the computer and the firewall as described in the previous section.
- Make sure your computer's IP address is on the same subnet as the firewall. If you are using the recommended addressing scheme, your computer's address should be in the range of 192.168.0.2 to 192.168.0.254. Refer to [“Verifying TCP/IP Properties” on page C-5](#) or [“Configuring the Macintosh for TCP/IP Networking” on page C-6](#) to find your computer's IP address. Follow the instructions in [Appendix C](#) to configure your computer.

Note: If your computer's IP address is shown as 169.254.x.x:

Recent versions of Windows and MacOS will generate and assign an IP address if the computer cannot reach a DHCP server. These auto-generated addresses are in the range of 169.254.x.x. If your IP address is in this range, check the connection from the computer to the firewall and reboot your computer.

- If your firewall's IP address has been changed and you don't know the current IP address, clear the firewall's configuration to factory defaults. This will set the firewall's IP address to 192.168.0.1. This procedure is explained in [“How to Use the Default Reset Button” on page 8-7](#).
- Make sure your browser has Java, JavaScript, or ActiveX enabled. If you are using Internet Explorer, click Refresh to be sure the Java applet is loaded.

- Try quitting the browser and launching it again.
- Make sure you are using the correct login information. The factory default login name is **admin** and the password is **password**. Make sure that CAPS LOCK is off when entering this information.

If the firewall does not save changes you have made in the Web configuration interface, check the following:

- When entering configuration settings, be sure to click the Apply button before moving to another menu or tab, or your changes are lost.
- Click the Refresh or Reload button in the Web browser. The changes may have occurred, but the Web browser may be caching the old configuration.

Troubleshooting the ISP Connection

If your firewall is unable to access the Internet, you should first determine whether the firewall is able to obtain a WAN IP address from the ISP. Unless you have been assigned a static IP address, your firewall must request an IP address from the ISP. You can determine whether the request was successful using the Web configuration manager.

To check the WAN IP address:

1. Launch your browser and select an external site such as www.netgear.com.
2. Access the main menu of the firewall's configuration at <http://192.168.0.1>.
3. Under the Maintenance heading, select Router Status.
4. Check that an IP address is shown for the WAN Port.
If 0.0.0.0 is shown, your firewall has not obtained an IP address from your ISP.

If your firewall is unable to obtain an IP address from the ISP, you may need to force your cable or DSL modem to recognize your new firewall by performing the following procedure:

1. Turn off power to the cable or DSL modem.
2. Turn off power to your firewall.
3. Wait five minutes and reapply power to the cable or DSL modem.
4. When the modem's LEDs indicate that it has reacquired sync with the ISP, reapply power to your firewall.

If your firewall is still unable to obtain an IP address from the ISP, the problem may be one of the following:

- Your ISP may require a login program.
Ask your ISP whether they require PPP over Ethernet (PPPoE) or some other type of login.
- If your ISP requires a login, you may have incorrectly set the login name and password.
- Your ISP may check for your computer's host name.
Assign the PC Host Name of your ISP account as the Account Name in the Basic Settings menu.
- Your ISP only allows one Ethernet MAC address to connect to Internet, and may check for your computer's MAC address. In this case:

Inform your ISP that you have bought a new network device, and ask them to use the firewall's MAC address.

OR

Configure your firewall to spoof your computer's MAC address. This can be done in the Basic Settings menu. Refer to [“Manually Configuring Your Internet Connection” on page 3-14](#).

If your firewall can obtain an IP address, but your computer is unable to load any Web pages from the Internet:

- Your computer may not recognize any DNS server addresses.

A DNS server is a host on the Internet that translates Internet names (such as [www.netgear.com](#)) to numeric IP addresses. Typically your ISP will provide the addresses of one or two DNS servers for your use. If you entered a DNS address during the firewall's configuration, reboot your computer and verify the DNS address as described in [“Verifying TCP/IP Properties” on page C-6](#). Alternatively, you may configure your computer manually with DNS addresses, as explained in your operating system documentation.
- Your computer may not have the firewall configured as its TCP/IP gateway.

If your computer obtains its information from the firewall by DHCP, reboot the computer and verify the gateway address as described in [“Verifying TCP/IP Properties” on page C-6](#).

Troubleshooting a TCP/IP Network Using a Ping Utility

Most TCP/IP terminal devices and routers contain a ping utility that sends an echo request packet to the designated device. The device then responds with an echo reply. Troubleshooting a TCP/IP network is made easier by using the ping utility in your PC or workstation.

How to Test the LAN Path to Your Firewall

You can ping the firewall from your computer to verify that the LAN path to your firewall is set up correctly.

To ping the firewall from a PC running Windows 95 or later:

1. From the Windows toolbar, click the Start button and select Run.
2. In the field provided, type Ping followed by the IP address of the firewall, as in this example:

```
ping 192.168.0.1
```

3. Click OK.

You should see a message like this one:

```
Pinging <IP address> with 32 bytes of data
```

If the path is working, you see this message:

```
Reply from < IP address >: bytes=32 time=NN ms TTL=xxx
```

If the path is not working, you see this message:

```
Request timed out
```

If the path is not functioning correctly, you could have one of the following problems:

- Wrong physical connections
 - Make sure the LAN port LED is on. If the LED is off, follow the instructions in [“Local or Internet Port Link LEDs Not On”](#) on [page 8-3](#).
 - Check that the corresponding Link LEDs are on for your network interface card and for the hub ports (if any) that are connected to your workstation and firewall.
- Wrong network configuration
 - Verify that the Ethernet card driver software and TCP/IP software are both installed and configured on your PC or workstation.
 - Verify that the IP address for your firewall and your workstation are correct and that the addresses are on the same subnet.

How to Test the Path from Your PC to a Remote Device

After verifying that the LAN path works correctly, test the path from your PC to a remote device. From the Windows run menu, type:

PING -n 10 <IP address>

where <IP address> is the IP address of a remote device such as your ISP's DNS server.

If the path is functioning correctly, replies as in the previous section are displayed. If you do not receive replies:

- Check that your PC has the IP address of your firewall listed as the default gateway. If the IP configuration of your PC is assigned by DHCP, this information will not be visible in your PC's Network Control Panel. Verify that the IP address of the firewall is listed as the default gateway as described in [“Verifying TCP/IP Properties” on page C-5](#).
- Check to see that the network address of your PC (the portion of the IP address specified by the netmask) is different from the network address of the remote device.
- Check that your cable or DSL modem is connected and functioning.
- If your ISP assigned a host name to your PC, enter that host name as the Account Name in the Basic Settings menu.
- Your ISP could be rejecting the Ethernet MAC addresses of all but one of your computers. Many broadband ISPs restrict access by only allowing traffic from the MAC address of your broadband modem, but some ISPs additionally restrict access to the MAC address of a single PC connected to that modem. If this is the case, you must configure your firewall to “clone” or “spoof” the MAC address from the authorized PC. Refer to [“Manually Configuring Your Internet Connection” on page 3-14](#).

Restoring the Default Configuration and Password

This section explains how to restore the factory default configuration settings, change the firewall's administration password to **password** and the IP address to 192.168.0.1. You can erase the current configuration and restore factory defaults in two ways:

- Use the Erase function of the Web Configuration Manager (see [“Backing Up, Restoring, or Erasing Your Settings” on page 7-10](#)).
- Use the Default Reset button on the rear panel of the firewall. Use this method for cases when the administration password or IP address is not known.

How to Use the Default Reset Button

To restore the factory default configuration settings without knowing the administration password or IP address, you must use the Default Reset button on the rear panel of the firewall.

1. Press and hold the Default Reset button until the Test LED turns on (about 10 seconds).
2. Release the Default Reset button and wait for the firewall to reboot.

Problems with Date and Time

The E-mail menu in the Security section displays the current date and time of day. The FVL328 Firewall uses the Network Time Protocol (NTP) to obtain the current time from one of several Network Time Servers on the Internet. Each entry in the log is stamped with the date and time of day. Problems with the date and time function can include:

- Date shown is January 1, 2000.
Cause: The firewall has not yet successfully reached a Network Time Server. Check that your Internet access settings are configured correctly. If you have just completed configuring the firewall, wait at least five minutes and check the date and time again.
- Time is off by one hour.
Cause: The firewall does not automatically sense Daylight Savings Time. In the Schedule menu, select or clear the check box marked Adjust for Daylight Savings Time.

Appendix A

Technical Specifications

This appendix provides technical specifications for the FVL328 Prosafe High Speed VPN Firewall.

Network Protocol and Standards Compatibility

Data and Routing Protocols: TCP/IP, RIP-1, RIP-2, DHCP
PPP over Ethernet (PPPoE)

Power Adapter

North America: 120V, 60 Hz, input
United Kingdom, Australia: 240V, 50 Hz, input
Europe: 230V, 50 Hz, input
Japan: 100V, 50/60 Hz, input
All regions (output): 12 V DC @ 1.2A output, 20W maximum

Physical Specifications

Dimensions: H: 1.56 in (3.96 cm)
W: 10.0 in (25.4 cm)
D: 9.0 in (17.8 cm)
Weight: 2.72 lb. (1.23 Kg)

Environmental Specifications

Operating temperature: 32°-140° F (0° to 40° C)
Operating humidity: 90% maximum relative humidity, noncondensing

Electromagnetic Emissions

Meets requirements of:	FCC Part 15 Class B
	VCCI Class B
	EN 55 022 (CISPR 22), Class B

Interface Specifications

Local:	10BASE-T or 100BASE-Tx, RJ-45
--------	-------------------------------

Internet:	10BASE-T or 100BASE-Tx, RJ-45
-----------	-------------------------------

Certifications

Firewall:	ICSA Certified, Small/Medium Business (SMB) Category version 4.0
-----------	--

VPN:	VPNC Certified - VPNC Logos:
------	------------------------------

Basic Interoperability

Basic Conformance

Rekeying Conformance

Certificates Conformance

Appendix B

Networks, Routing, and Firewall Basics

This appendix provides an overview of IP networks, routing, and firewalls.

Related Publications

As you read this document, you may be directed to various RFC documents for further information. An RFC is a Request For Comment (RFC) published by the Internet Engineering Task Force (IETF), an open organization that defines the architecture and operation of the Internet. The RFC documents outline and define the standard protocols and procedures for the Internet. The documents are listed on the World Wide Web at www.ietf.org and are mirrored and indexed at many other sites worldwide.

Basic Router Concepts

Large amounts of bandwidth can be provided easily and relatively inexpensively in a local area network (LAN). However, providing high bandwidth between a local network and the Internet can be very expensive. Because of this expense, Internet access is usually provided by a slower-speed wide-area network (WAN) link such as a cable or DSL modem. In order to make the best use of the slower WAN link, a mechanism must be in place for selecting and transmitting only the data traffic meant for the Internet. The function of selecting and forwarding this data is performed by a router.

What is a Router?

A router is a device that forwards traffic between networks based on network layer information in the data and on routing tables maintained by the router. In these routing tables, a router builds up a logical picture of the overall network by gathering and exchanging information with other routers in the network. Using this information, the router chooses the best path for forwarding network traffic.

Routers vary in performance and scale, number of routing protocols supported, and types of physical WAN connection they support.

Routing Information Protocol

One of the protocols used by a router to build and maintain a picture of the network is the Routing Information Protocol (RIP). Using RIP, routers periodically update one another and check for changes to add to the routing table.

The FVL328 Firewall supports both the older RIP-1 and the newer RIP-2 protocols. Among other improvements, RIP-2 supports subnet and multicast protocols. RIP is not required for most home applications.

IP Addresses and the Internet

Because TCP/IP networks are interconnected across the world, every machine on the Internet must have a unique address to make sure that transmitted data reaches the correct destination. Blocks of addresses are assigned to organizations by the Internet Assigned Numbers Authority (IANA). Individual users and small organizations may obtain their addresses either from the IANA or from an Internet service provider (ISP). You can contact IANA at www.iana.org.

The Internet Protocol (IP) uses a 32-bit address structure. The address is usually written in dot notation (also called dotted-decimal notation), in which each group of eight bits is written in decimal form, separated by decimal points.

For example, the following binary address:

```
11000011 00100010 00001100 00000111
```

is normally written as:

```
195.34.12.7
```

The latter version is easier to remember and easier to enter into your computer.

In addition, the 32 bits of the address are subdivided into two parts. The first part of the address identifies the network, and the second part identifies the host node or station on the network. The dividing point may vary depending on the address range and the application.

There are five standard classes of IP addresses. These address classes have different ways of determining the network and host sections of the address, allowing for different numbers of hosts on a network. Each address type begins with a unique bit pattern, which is used by the TCP/IP software to identify the address class. After the address class has been determined, the software can correctly identify the host section of the address. The follow figure shows the three main address classes, including network and host sections of the address for each address type.

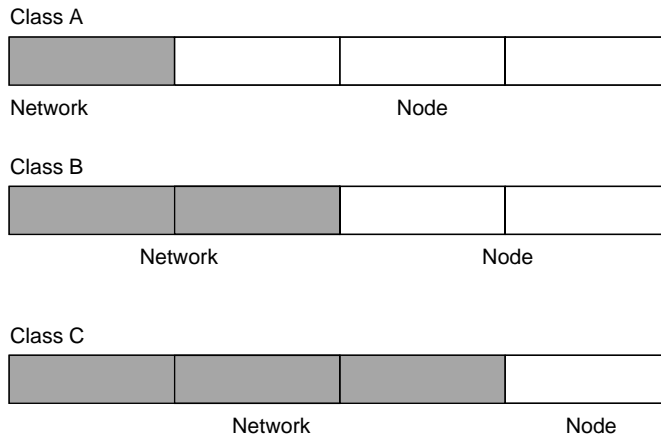


Figure 8-1: Three Main Address Classes

The five address classes are:

- **Class A**
Class A addresses can have up to 16,777,214 hosts on a single network. They use an eight-bit network number and a 24-bit node number. Class A addresses are in this range:
1.x.x.x to 126.x.x.x.
- **Class B**
Class B addresses can have up to 65,354 hosts on a network. A Class B address uses a 16-bit network number and a 16-bit node number. Class B addresses are in this range:
128.1.x.x to 191.254.x.x.
- **Class C**
Class C addresses can have 254 hosts on a network. Class C addresses use 24 bits for the network address and eight bits for the node. They are in this range:
192.0.1.x to 223.255.254.x.
- **Class D**
Class D addresses are used for multicasts (messages sent to many hosts). Class D addresses are in this range:
224.0.0.0 to 239.255.255.255.
- **Class E**
Class E addresses are for experimental use.

This addressing structure allows IP addresses to uniquely identify each physical network and each node on each physical network.

For each unique value of the network portion of the address, the base address of the range (host address of all zeros) is known as the network address and is not usually assigned to a host. Also, the top address of the range (host address of all ones) is not assigned, but is used as the broadcast address for simultaneously sending a packet to all hosts with the same network address.

Netmask

In each of the address classes previously described, the size of the two parts (network address and host address) is implied by the class. This partitioning scheme can also be expressed by a netmask associated with the IP address. A netmask is a 32-bit quantity that, when logically combined (using an AND operator) with an IP address, yields the network address. For instance, the netmasks for Class A, B, and C addresses are 255.0.0.0, 255.255.0.0, and 255.255.255.0, respectively.

For example, the address 192.168.170.237 is a Class C IP address whose network portion is the upper 24 bits. When combined (using an AND operator) with the Class C netmask, as shown here, only the network portion of the address remains:

```
11000000 10101000 10101010 11101101 (192.168.170.237)
```

combined with:

```
11111111 11111111 11111111 00000000 (255.255.255.0)
```

Equals:

```
11000000 10101000 10101010 00000000 (192.168.170.0)
```

As a shorter alternative to dotted-decimal notation, the netmask may also be expressed in terms of the number of ones from the left. This number is appended to the IP address, following a backward slash (/), as “/n.” In the example, the address could be written as 192.168.170.237/24, indicating that the netmask is 24 ones followed by 8 zeros.

Subnet Addressing

By looking at the addressing structures, you can see that even with a Class C address, there are a large number of hosts per network. Such a structure is an inefficient use of addresses if each end of a routed link requires a different network number. It is unlikely that the smaller office LANs would have that many devices. You can resolve this problem by using a technique known as subnet addressing.

Subnet addressing allows us to split one IP network address into smaller multiple physical networks known as subnetworks. Some of the node numbers are used as a subnet number instead. A Class B address gives us 16 bits of node numbers translating to 64,000 nodes. Most organizations do not use 64,000 nodes, so there are free bits that can be reassigned. Subnet addressing makes use of those bits that are free, as shown below.



Figure 8-2: Example of Subnetting a Class B Address

A Class B address can be effectively translated into multiple Class C addresses. For example, the IP address of 172.16.0.0 is assigned, but node addresses are limited to 255 maximum, allowing eight extra bits to use as a subnet address. The IP address of 172.16.97.235 would be interpreted as IP network address 172.16, subnet number 97, and node number 235. In addition to extending the number of addresses available, subnet addressing provides other benefits. Subnet addressing allows a network manager to construct an address scheme for the network by using different subnets for other geographical locations in the network or for other departments in the organization.

Although the preceding example uses the entire third octet for a subnet address, note that you are not restricted to octet boundaries in subnetting. To create more network numbers, you need only shift some bits from the host address to the network address. For instance, to partition a Class C network number (192.68.135.0) into two, you shift one bit from the host address to the network address. The new netmask (or subnet mask) is 255.255.255.128. The first subnet has network number 192.68.135.0 with hosts 192.68.135.1 to 192.68.135.126, and the second subnet has network number 192.68.135.128 with hosts 192.68.135.129 to 192.68.135.254.



Note: The number 192.68.135.127 is not assigned because it is the broadcast address of the first subnet. The number 192.68.135.128 is not assigned because it is the network address of the second subnet.

The following table lists the additional subnet mask bits in dotted-decimal notation. To use the table, write down the original class netmask and replace the 0 value octets with the dotted-decimal value of the additional subnet bits. For example, to partition your Class C network with subnet mask 255.255.255.0 into 16 subnets (4 bits), the new subnet mask becomes 255.255.255.240.

Table 8-1. Netmask Notation Translation Table for One Octet

Number of Bits	Dotted-Decimal Value
1	128
2	192
3	224
4	240
5	248
6	252
7	254
8	255

The following table displays several common netmask values in both the dotted-decimal and the masklength formats.

Table 8-2. Netmask Formats

Dotted-Decimal	Masklength
255.0.0.0	/8
255.255.0.0	/16
255.255.255.0	/24
255.255.255.128	/25
255.255.255.192	/26
255.255.255.224	/27
255.255.255.240	/28
255.255.255.248	/29
255.255.255.252	/30
255.255.255.254	/31
255.255.255.255	/32

NETGEAR strongly recommends that you configure all hosts on a LAN segment to use the same netmask for the following reasons:

- So that hosts recognize local IP broadcast packets.

When a device broadcasts to its segment neighbors, it uses a destination address of the local network address with all ones for the host address. In order for this scheme to work, all devices on the segment must agree on which bits comprise the host address.

- So that a local router or bridge recognizes which addresses are local and which are remote.

Private IP Addresses

If your local network is isolated from the Internet (for example, when using NAT), you can assign any IP addresses to the hosts without problems. However, the IANA has reserved the following three blocks of IP addresses specifically for private networks:

10.0.0.0 - 10.255.255.255
172.16.0.0 - 172.31.255.255
192.168.0.0 - 192.168.255.255

NETGEAR recommends that you choose your private network number from this range. The DHCP server of the FVL328 Firewall is preconfigured to automatically assign private addresses.

Regardless of your particular situation, do not create an arbitrary IP address; always follow the guidelines explained here. For more information about address assignment, refer to RFC 1597, *Address Allocation for Private Internets*, and RFC 1466, *Guidelines for Management of IP Address Space*. The Internet Engineering Task Force (IETF) publishes RFCs on its Web site at www.ietf.org.

Single IP Address Operation Using NAT

In the past, if multiple computers on a LAN needed to access the Internet simultaneously, you had to obtain a range of IP addresses from the ISP. This type of Internet account is more costly than a single-address account typically used by a single user with a modem, rather than a router. The FVL328 Firewall employs an address-sharing method called Network Address Translation (NAT). This method allows several networked computers to share an Internet account using only a single IP address, which may be statically or dynamically assigned by your ISP.

The router accomplishes this address sharing by translating the internal LAN IP addresses to a single address that is globally unique on the Internet. The internal LAN IP addresses can be either private addresses or registered addresses. For more information about IP address translation, refer to RFC 1631, *The IP Network Address Translator (NAT)*.

The following figure illustrates a single IP address operation.

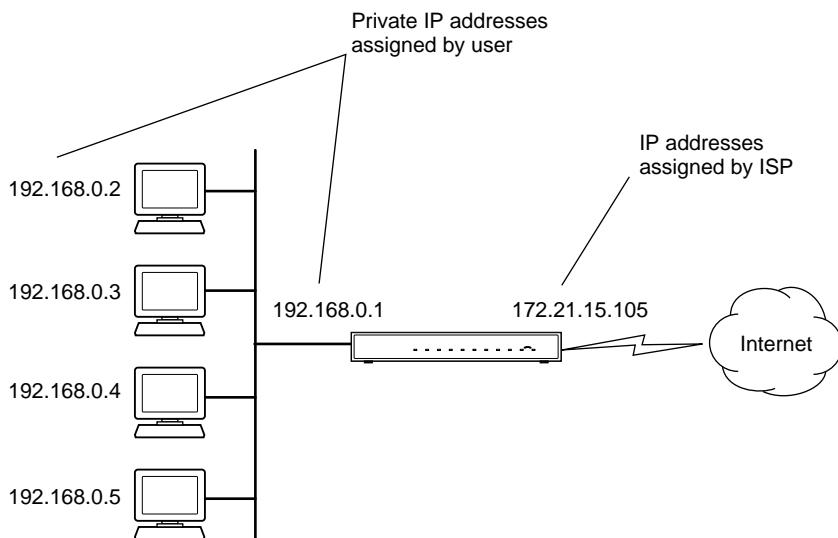


Figure 8-3: Single IP Address Operation Using NAT

This scheme offers the additional benefit of firewall-like protection because the internal LAN addresses are *not* available to the Internet through the translated connection. All incoming inquiries are filtered out by the router. This filtering can prevent intruders from probing your system. However, using port forwarding, you can allow one PC (for example, a Web server) on your local network to be accessible to outside users.

MAC Addresses and Address Resolution Protocol

An IP address alone cannot be used to deliver data from one LAN device to another. To send data between LAN devices, you must convert the IP address of the destination device to its media access control (MAC) address. Each device on an Ethernet network has a unique MAC address, which is a 48-bit number assigned to each device by the manufacturer. The technique that associates the IP address with a MAC address is known as address resolution. Internet Protocol uses the Address Resolution Protocol (ARP) to resolve MAC addresses.

If a device sends data to another station on the network and the destination MAC address is not yet recorded, ARP is used. An ARP request is broadcast onto the network. All stations on the network receive and read the request. The destination IP address for the chosen station is included as part of the message so that only the station with this IP address responds to the ARP request. All other stations discard the request.

Related Documents

The station with the correct IP address responds with its own MAC address directly to the sending device. The receiving station provides the transmitting station with the required destination MAC address. The IP address data and MAC address data for each station are held in an ARP table. The next time data is sent, the address can be obtained from the address information in the table.

For more information about address assignment, refer to the IETF documents RFC 1597, *Address Allocation for Private Internets*, and RFC 1466, *Guidelines for Management of IP Address Space*.

For more information about IP address translation, refer to RFC 1631, *The IP Network Address Translator (NAT)*.

Domain Name Server

Many of the resources on the Internet can be addressed by simple descriptive names such as *www.NETGEAR.com*. This addressing is very helpful at the application level, but the descriptive name must be translated to an IP address in order for a user to actually contact the resource. Just as a telephone directory maps names to phone numbers, or as an ARP table maps IP addresses to MAC addresses, a domain name system (DNS) server maps descriptive names of network resources to IP addresses.

When a PC accesses a resource by its descriptive name, it first contacts a DNS server to obtain the IP address of the resource. The PC sends the desired message using the IP address. Many large organizations, such as ISPs, maintain their own DNS servers and allow their customers to use the servers to look up addresses.

IP Configuration by DHCP

When an IP-based local area network is installed, each PC must be configured with an IP address. If the computers need to access the Internet, they should also be configured with a gateway address and one or more DNS server addresses. As an alternative to manual configuration, there is a method by which each PC on the network can automatically obtain this configuration information. A device on the network may act as a Dynamic Host Configuration Protocol (DHCP) server. The DHCP server stores a list or pool of IP addresses, along with other information (such as gateway and DNS addresses) that it may assign to the other devices on the network. The FVL328 Firewall has the capacity to act as a DHCP server.

The FVL328 Firewall also functions as a DHCP client when connecting to the ISP. The firewall can automatically obtain an IP address, subnet mask, DNS server addresses, and a gateway address if the ISP provides this information by DHCP.

Internet Security and Firewalls

When your LAN connects to the Internet through a router, an opportunity is created for outsiders to access or disrupt your network. A NAT router provides some protection because by the very nature of the Network Address Translation (NAT) process, the network behind the NAT router is shielded from access by outsiders on the Internet. However, there are methods by which a determined hacker can possibly obtain information about your network or at the least can disrupt your Internet access. A greater degree of protection is provided by a firewall router.

What is a Firewall?

A firewall is a device that protects one network from another, while allowing communication between the two. A firewall incorporates the functions of the NAT router, while adding features for dealing with a hacker intrusion or attack. Several known types of intrusion or attack can be recognized when they occur. When an incident is detected, the firewall can log details of the attempt, and can optionally send e-mail to an administrator notifying them of the incident. Using information from the log, the administrator can take action with the ISP of the hacker. In some types of intrusions, the firewall can fend off the hacker by discarding all further packets from the hacker's IP address for a period of time.

Stateful Packet Inspection

Unlike simple Internet sharing routers, a firewall uses a process called stateful packet inspection to ensure secure firewall filtering to protect your network from attacks and intrusions. Since user-level applications such as FTP and Web browsers can create complex patterns of network traffic, it is necessary for the firewall to analyze groups of network connection "states." Using stateful packet inspection, an incoming packet is intercepted at the network layer and then analyzed for state-related information associated with all network connections. A central cache within the firewall keeps track of the state information associated with all network connections. All traffic passing through the firewall is analyzed against the state of these connections in order to determine whether or not it will be allowed to pass through or be rejected.

Denial of Service Attack

A hacker may be able to prevent your network from operating or communicating by launching a Denial of Service (DoS) attack. The method used for such an attack can be as simple as merely flooding your site with more requests than it can handle. A more sophisticated attack may attempt to exploit some weakness in the operating system used by your router or gateway. Some operating systems can be disrupted by simply sending a packet with incorrect length information.

Ethernet Cabling

Although Ethernet networks originally used thick or thin coaxial cable, most installations currently use unshielded twisted pair (UTP) cabling. The UTP cable contains eight conductors, arranged in four twisted pairs, and terminated with an RJ45 type connector. A normal "straight-through" UTP Ethernet cable follows the EIA568B standard wiring as described in [Table 8-1](#).

Table 8-1. UTP Ethernet cable wiring, straight-through

Pin	Wire color	Signal
1	Orange/White	Transmit (Tx) +
2	Orange	Transmit (Tx) -
3	Green/White	Receive (Rx) +
4	Blue	
5	Blue/White	
6	Green	Receive (Rx) -
7	Brown/White	
8	Brown	

Uplink Switches and Crossover Cables

In the wiring table, the concept of transmit and receive are from the perspective of the PC. For example, the PC transmits on pins 1 and 2. At the hub, the perspective is reversed, and the hub receives on pins 1 and 2. When connecting a PC to a PC, or a hub port to another hub port, the transmit pair must be exchanged with the receive pair. This exchange is done by one of two mechanisms. Most hubs provide an uplink switch which will exchange the pairs on one port, allowing that port to be connected to another hub using a normal Ethernet cable. The second method is to use a crossover cable, which is a special cable in which the transmit and receive pairs are exchanged at one of the two cable connectors. Crossover cables are often unmarked as such, and must be identified by comparing the two connectors. Since the cable connectors are clear plastic, it is easy to place them side by side and view the order of the wire colors on each. On a straight-through cable, the color order will be the same on both connectors. On a crossover cable, the orange and blue pairs will be exchanged from one connector to the other.

Cable Quality

A twisted pair Ethernet network operating at 10 Mbits/second (10BASE-T) will often tolerate low quality cables, but at 100 Mbits/second (10BASE-Tx) the cable must be rated as Category 5, or "Cat 5", by the Electronic Industry Association (EIA). This rating will be printed on the cable jacket. A Category 5 cable will meet specified requirements regarding loss and crosstalk. In addition, there are restrictions on maximum cable length for both 10 and 100 Mbits/second networks.

Appendix C

Preparing Your Network

This appendix describes how to prepare your network to connect to the Internet through the FVL328 Prosafe High Speed VPN Firewall and how to verify the readiness of broadband Internet service from an Internet service provider (ISP).



Note: If an ISP technician configured your computer during the installation of a broadband modem, or if you configured it using instructions provided by your ISP, you may need to copy the current configuration information for use in the configuration of your firewall. Write down this information before reconfiguring your computers. Refer to “[Obtaining ISP Configuration Information for Windows Computers](#)” on [page C-10](#) or “[Obtaining ISP Configuration Information for Macintosh Computers](#)” on [page C-11](#) for further information.

Preparing Your Computers for TCP/IP Networking

Computers access the Internet using a protocol called TCP/IP (Transmission Control Protocol/Internet Protocol). Each computer on your network must have TCP/IP installed and selected as its networking protocol. If a Network Interface Card (NIC) is already installed in your PC, then TCP/IP is probably already installed as well.

Most operating systems include the software components you need for networking with TCP/IP:

- Windows® 95 or later includes the software components for establishing a TCP/IP network.
- Windows 3.1 does not include a TCP/IP component. You need to purchase a third-party TCP/IP application package such as NetManage Chameleon.
- Macintosh Operating System 7 or later includes the software components for establishing a TCP/IP network.
- All versions of UNIX® or Linux® include TCP/IP components. Follow the instructions provided with your operating system or networking software to install TCP/IP on your computer.

In your IP network, each PC and the firewall must be assigned a unique IP addresses. Each PC must also have certain other IP configuration information such as a subnet mask (netmask), a domain name server (DNS) address, and a default gateway address. In most cases, you should install TCP/IP so that the PC obtains its specific network configuration information automatically from a DHCP server during bootup. For a detailed explanation of the meaning and purpose of these configuration items, refer to “[Appendix B, “Networks, Routing, and Firewall Basics.”](#)”

The FVL328 Firewall is shipped preconfigured as a DHCP server. The firewall assigns the following TCP/IP configuration information automatically when the computers are rebooted:

- PC or workstation IP addresses—192.168.0.2 through 192.168.0.254
- Subnet mask—255.255.255.0
- Gateway address (the firewall)—192.168.0.1

These addresses are part of the IETF-designated private address range for use in private networks.

Configuring Windows 95, 98, and Me for TCP/IP Networking


As part of the PC preparation process, you need to manually install and configure TCP/IP on each networked PC. Before starting, locate your Windows CD; you may need to insert it during the TCP/IP installation process.

Install or Verify Windows Networking Components

To install or verify the necessary components for IP networking:

1. On the Windows taskbar, click the Start button, point to Settings, and then click Control Panel.
2. Double-click the Network icon.

The Network window opens, which displays a list of installed components:

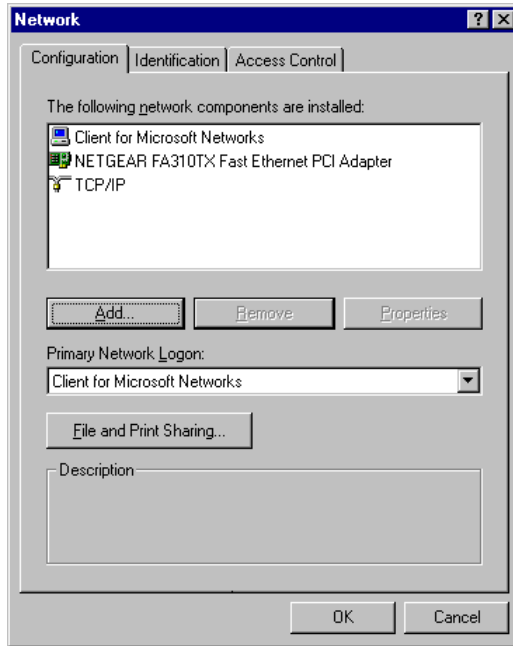

You must have an Ethernet adapter, the TCP/IP protocol, and Client for Microsoft Networks.



Note: It is not necessary to remove any other network components shown in the Network window in order to install the adapter, TCP/IP, or Client for Microsoft Networks.

If you need to install a new adapter, follow these steps:

- a. Click the Add button.
- b. Select Adapter, and then click Add.
- c. Select the manufacturer and model of your Ethernet adapter, and then click OK.

If you need TCP/IP:

- a. Click the Add button.
- b. Select Protocol, and then click Add.
- c. Select Microsoft.
- d. Select TCP/IP, and then click OK.

If you need Client for Microsoft Networks:

- a. Click the Add button.
 - b. Select Client, and then click Add.
 - c. Select Microsoft.
 - d. Select Client for Microsoft Networks, and then click OK.
3. Restart your PC for the changes to take effect.

Enabling DHCP to Automatically Configure TCP/IP Settings

After the TCP/IP protocol components are installed, each PC must be assigned specific information about itself and resources that are available on its network. The simplest way to configure this information is to allow the PC to obtain the information from the internal DHCP server of the FVL328 Firewall. To use DHCP with the recommended default addresses, follow these steps:

1. Connect all computers to the firewall, then restart the firewall and allow it to boot.
2. On each attached PC, open the Network control panel (refer to the previous section) and select the Configuration tab.
3. From the components list, select TCP/IP->(your Ethernet adapter) and click Properties.
4. In the IP Address tab, select “Obtain an IP address automatically”.
5. Select the Gateway tab.
6. If any gateways are shown, remove them.
7. Click OK.
8. Restart the PC.

Repeat steps 2 through 8 for each PC on your network.

Selecting Windows' Internet Access Method

1. On the Windows taskbar, click the Start button, point to Settings, and then click Control Panel.
2. Double-click the Internet Options icon.
3. Select “I want to set up my Internet connection manually” or “I want to connect through a Local Area Network” and click Next.
4. Select “I want to connect through a Local Area Network” and click Next.

5. Uncheck all boxes in the LAN Internet Configuration screen and click Next.
6. Proceed to the end of the Wizard.

Verifying TCP/IP Properties

After your PC is configured and has rebooted, you can check the TCP/IP configuration using the utility *winipcfg.exe*:

1. On the Windows taskbar, click the Start button, and then click Run.
2. Type **winipcfg**, and then click OK.

The IP Configuration window opens, which lists (among other things), your IP address, subnet mask, and default gateway.

3. From the drop-down box, select your Ethernet adapter.

The window is updated to show your settings, which should match the values below if you are using the default TCP/IP settings that NETGEAR recommends:

- The IP address is between 192.168.0.2 and 192.168.0.254
- The subnet mask is 255.255.255.0
- The default gateway is 192.168.0.1

Configuring Windows NT, 2000 or XP for IP Networking

As part of the PC preparation process, you need to manually install and configure TCP/IP on each networked PC. Before starting, locate your Windows CD; you may need to insert it during the TCP/IP installation process.

Installing or Verifying Windows Networking Components

To install or verify the necessary components for IP networking:

1. On the Windows taskbar, click the Start button, point to Settings, and then click Control Panel.
2. Double-click the Network and Dialup Connections icon.
3. If an Ethernet adapter is present in your PC, you should see an entry for Local Area Connection. Double-click that entry.
4. Select Properties.

5. Verify that 'Client for Microsoft Networks' and 'Internet Protocol (TCP/IP)' are present. If not, select Install and add them.
6. Select 'Internet Protocol (TCP/IP)', click Properties, and verify that "Obtain an IP address automatically" is selected.
7. Click OK and close all Network and Dialup Connections windows.
8. Make sure your PC is connected to the firewall, then reboot your PC.

Verifying TCP/IP Properties

To check your PC's TCP/IP configuration:

1. On the Windows taskbar, click the Start button, and then click Run.

The Run window opens.

2. Type `cmd` and then click OK.

A command window opens

3. Type `ipconfig /all`

Your IP Configuration information will be listed, and should match the values below if you are using the default TCP/IP settings that NETGEAR recommends:

- The IP address is between 192.168.0.2 and 192.168.0.254
- The subnet mask is 255.255.255.0
- The default gateway is 192.168.0.1

4. Type `exit`


Configuring the Macintosh for TCP/IP Networking

Beginning with Macintosh Operating System 7, TCP/IP is already installed on the Macintosh. On each networked Macintosh, you will need to configure TCP/IP to use DHCP.

MacOS 8.6 or 9.x

1. From the Apple menu, select Control Panels, then TCP/IP.

The TCP/IP Control Panel opens:

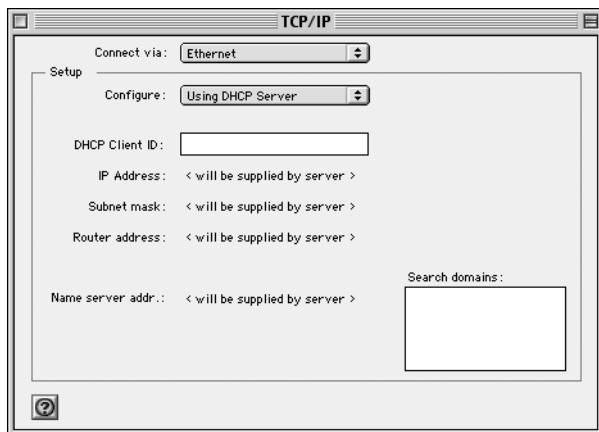


2. From the “Connect via” box, select your Macintosh’s Ethernet interface.
3. From the “Configure” box, select Using DHCP Server.
You can leave the DHCP Client ID box empty.
4. Close the TCP/IP Control Panel.
5. Repeat this for each Macintosh on your network.

MacOS X

1. From the Apple menu, choose System Preferences, then Network.
2. If not already selected, select Built-in Ethernet in the Configure list.
3. If not already selected, Select Using DHCP in the TCP/IP tab.
4. Click Save.

Verifying TCP/IP Properties for Macintosh Computers

After your Macintosh is configured and has rebooted, you can check the TCP/IP configuration by returning to the TCP/IP Control Panel. From the Apple menu, select Control Panels, then TCP/IP.

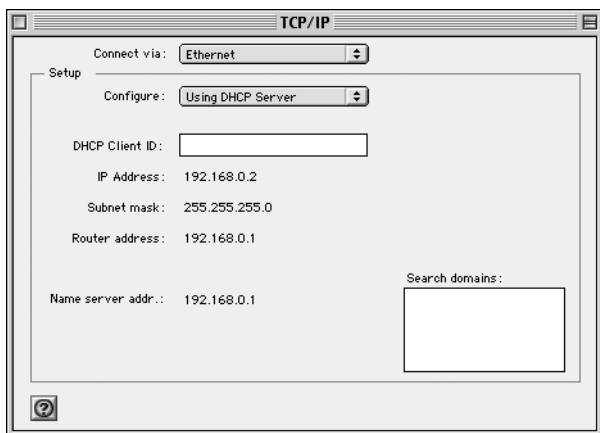

The panel is updated to show your settings, which should match the values below if you are using the default TCP/IP settings that NETGEAR recommends:

- The IP Address is between 192.168.0.2 and 192.168.0.254
- The Subnet mask is 255.255.255.0
- The Router address is 192.168.0.1

If you do not see these values, you may need to restart your Macintosh or you may need to switch the “Configure” setting to a different option, then back again to “Using DHCP Server”.

Verifying the Readiness of Your Internet Account

For broadband access to the Internet, you need to contract with an Internet service provider (ISP) for a single-user Internet access account using a cable modem or DSL modem. This modem must be a separate physical box (not a card) and must provide an Ethernet port intended for connection to a Network Interface Card (NIC) in a computer. Your firewall does not support a USB-connected broadband modem.

For a single-user Internet account, your ISP supplies TCP/IP configuration information for one computer. With a typical account, much of the configuration information is dynamically assigned when your PC is first booted up while connected to the ISP, and you will not need to know that dynamic information.

In order to share the Internet connection among several computers, your firewall takes the place of the single PC, and you need to configure it with the TCP/IP information that the single PC would normally use. When the firewall's Internet port is connected to the broadband modem, the firewall appears to be a single PC to the ISP. The firewall then allows the computers on the local network to masquerade as the single PC to access the Internet through the broadband modem. The method used by the firewall to accomplish this is called Network Address Translation (NAT) or IP masquerading.

Are Login Protocols Used?

Some ISPs require a special login protocol, in which you must enter a login name and password in order to access the Internet. If you normally log in to your Internet account by running a program such as WinPOET or EnterNet, then your account uses PPP over Ethernet (PPPoE).

When you configure your router, you will need to enter your login name and password in the router's configuration menus. After your network and firewall are configured, the firewall will perform the login task when needed, and you will no longer need to run the login program from your PC. It is not necessary to uninstall the login program.

What Is Your Configuration Information?

More and more, ISPs are dynamically assigning configuration information. However, if your ISP does not dynamically assign configuration information but instead uses fixed configurations, your ISP should have given you the following basic information for your account:

- An IP address and subnet mask
- A gateway IP address, which is the address of the ISP's router
- One or more domain name server (DNS) IP addresses
- Host name and domain suffix

For example, your account's full server names may look like this:

`mail.xxx.yyy.com`

In this example, the domain suffix is `xxx.yyy.com`.

If any of these items are dynamically supplied by the ISP, your firewall automatically acquires them.

If an ISP technician configured your PC during the installation of the broadband modem, or if you configured it using instructions provided by your ISP, you need to copy the configuration information from your PC's Network TCP/IP Properties window or Macintosh TCP/IP Control Panel before reconfiguring your PC for use with the firewall. These procedures are described next.

Obtaining ISP Configuration Information for Windows Computers

As mentioned above, you may need to collect configuration information from your PC so that you can use this information when you configure the FVL328 Firewall. Following this procedure is only necessary when your ISP does not dynamically supply the account information.

To get the information you need to configure the firewall for Internet access:

1. On the Windows taskbar, click the Start button, point to Settings, and then click Control Panel.
2. Double-click the Network icon.

The Network window opens, which displays a list of installed components.

3. Select TCP/IP, and then click Properties.

The TCP/IP Properties dialog box opens.

4. Select the IP Address tab.

If an IP address and subnet mask are shown, write down the information. If an address is present, your account uses a fixed (static) IP address. If no address is present, your account uses a dynamically-assigned IP address. Click "Obtain an IP address automatically".

5. Select the Gateway tab.

If an IP address appears under Installed Gateways, write down the address. This is the ISP's gateway address. Select the address and then click Remove to remove the gateway address.

6. Select the DNS Configuration tab.

If any DNS server addresses are shown, write down the addresses. If any information appears in the Host or Domain information box, write it down. Click Disable DNS.

7. Click OK to save your changes and close the TCP/IP Properties dialog box.

You are returned to the Network window.

8. Click OK.

9. Reboot your PC at the prompt. You may also be prompted to insert your Windows CD.

Obtaining ISP Configuration Information for Macintosh Computers

As mentioned above, you may need to collect configuration information from your Macintosh so that you can use this information when you configure the FVL328 Firewall. Following this procedure is only necessary when your ISP does not dynamically supply the account information.

To get the information you need to configure the firewall for Internet access:

1. From the Apple menu, select Control Panels, then TCP/IP.

The TCP/IP Control Panel opens, which displays a list of configuration settings. If the "Configure" setting is "Using DHCP Server", your account uses a dynamically-assigned IP address. In this case, close the Control Panel and skip the rest of this section.

2. If an IP address and subnet mask are shown, write down the information.
3. If an IP address appears under Router address, write down the address. This is the ISP's gateway address.
4. If any Name Server addresses are shown, write down the addresses. These are your ISP's DNS addresses.
5. If any information appears in the Search domains information box, write it down.
6. Change the "Configure" setting to "Using DHCP Server".
7. Close the TCP/IP Control Panel.

Restarting the Network

Once you have set up your computers to work with the firewall, you must reset the network for the devices to be able to communicate correctly. Restart any computer that is connected to the firewall.

After configuring all of your computers for TCP/IP networking and restarting them, and connecting them to the local network of your FVL328 Firewall, you are ready to access and configure the firewall.

Appendix D

Firewall Log Formats

Action List

Drop:	Packet dropped by Firewall current inbound or outbound rules.
Reset:	TCP session reset by Firewall.
Forward:	Packet forwarded by Firewall to the next hop based on matching the criteria in the rules table.
Receive:	Packet was permitted by the firewall rules and modified prior to being forwarded and/or replied to.

Field List

<DATE><TIME>:	Log's date and time
<EVENT>:	Event is that access the device or access other host via the device
<PKT_TYPE>:	Packet type pass Firewall
<SRC_IP><DST_IP>:	IP address in the packet
<SRC_PORT><DST_PORT>:	Port in the packet
<SRC_INF><DST_INF>:	Include `LAN` and `WAN` (optional)
<ACTION>:	As `Action List` referenced
<DESCRIPTION>:	A complement to the log (optional)
<DIRECTION>:	Inbound and Outbound
<SERVICE>:	Firewall costumed service

Outbound Log

Outgoing packets that match the Firewall rules are logged.

The format is:

```
<DATE> <TIME> <PKT_TYPE> <SRC_IP> <SRC_INF> <DST_IP > <DST_INF>
<ACTION><DESCRIPTION>

[Fri, 2003-12-05 22:19:42] - UDP Packet - Source:172.31.12.233,138 ,WAN -
Destination:172.31.12.255,138 ,LAN [Drop] - [Inbound Default rule match]
[Fri, 2003-12-05 22:35:04] - TCP Packet - Source:172.31.12.156,34239 ,WAN -
Destination:192.168.0.10,21[FTP Control] ,LAN [Forward] - [Inbound Rule(1)
match]
[Fri, 2003-12-05 22:35:11] - UDP Packet - Source:172.31.12.200,138 ,WAN -
Destination:172.31.12.255,138 ,LAN [Forward] - [Inbound Rule(1) not match]
```

Notes:

SRC_INF = WAN

DST_INF = LAN

DESCRIPTION = "Inbound rule match", "Inbound Default rule match"

PKT_TYPE = "UDP packet", "TCP connection", "ICMP packet"

Inbound Log

Incoming packets that match the Firewall rules are logged.

The format is:

```
<DATE> <TIME> <PKT_TYPE> <SRC_IP> <SRC_INF> <DST_IP > <DST_INF>
<ACTION><DESCRIPTION>

[Fri, 2003-12-05 22:59:56] - ICMP Packet [Echo Request] - Source:192.168.0.10,LAN
- Destination:192.168.0.1,WAN [Forward] - [Outbound Default rule match]

[Fri, 2003-12-05 23:00:58] - ICMP Packet [Echo Request] - Source:192.168.0.10,LAN
- Destination:172.31.12.200,WAN [Forward] - [Outbound Default rule match]

[Fri, 2003-12-05 23:02:30] - TCP Packet - Source:192.168.0.10,3472 ,LAN -
Destination:216.239.39.99,80[HTTP] ,WAN [Forward] - [Outbound Default rule
match]
```

Notes:

SRC_INF = LAN

DST_INF = WAN

DESCRIPTION = "Outbound rule match", "Outbound Default rule match"

PKT_TYPE = "UDP packet", "TCP connection", "ICMP packet"

Other IP Traffic

Some special packets matching the Firewall rules, like VPN connection, etc. are logged.

The format is:

```
<DATE><TIME><PKT_TYPE>< SRC_IP><SRC_PORT ><SRC_INF>< DST_IP><DST_PORT  
><DST_PORT><ACTION><DESCRIPTION>
```

```
<DATE><TIME> <PKT_TYPE> <SRC_IP> <SRC_INF> <DST_IP> <DST_INF> <ACTION>  
<DESCRIPTION>
```

```
[Wed, 2003-07-30 17:43:28] - IPSEC Packet - Source: 64.3.3.201, 37180 WAN -  
Destination: 10.10.10.4,80[HTTP] LAN - [Drop] [VPN Packet]
```

```
[Wed, 2003-07-30 18:44:50] - IP Packet [Type Field: 321] - Source 18.7.21.69  
192.168.0.3 - [Drop]
```

Notes:

DESCRIPTION = "VPN Packet"

PKT_TYPE = "GRE", "AH", "ESP", "IP packet [Type Field: Num]", "IPSEC"

ACTION = "Forward", "Drop"

Router Operation

Operations that the router initiates are logged.

The format is:

```
<DATE><TIME><EVENT>
```

```
[Wed, 2003-07-30 16:30:59] - Log emailed  
[Wed, 2003-07-30 13:38:31] - NETGEAR activated  
[Wed, 2003-07-30 13:42:01] - NTP Reply Invalid
```

The format is:

```
<DATE><TIME><EVENT><DST_IP>  
<DATE><TIME><EVENT><SRC_IP>
```

```
[Wed, 2003-07-30 16:32:33] - Send out NTP Request to 207.46.130.100  
[Wed, 2003-07-30 16:35:27] - Receive NTP Reply from 207.46.130.100
```

Other Connections and Traffic to this Router

The format is:

```
<DATE><TIME>< PKT_TYPE ><SRC_IP><DST_IP><ACTION>
```

```
[Fri, 2003-12-05 22:31:27] - ICMP Packet[Echo Request] - Source: 192.168.0.10 -  
Destination: 192.168.0.1 - [Receive]  
[Wed, 2003-07-30 16:34:56] - ICMP Packet[Type: 238] - Source: 64.3.3.201 -  
Destination: 192.168.0.3 - [Drop]  
[Fri, 2003-12-05 22:59:56] - ICMP Packet[Echo Request] - Source:192.168.0.10 -  
Destination:192.168.0.1 - [Receive]
```

The format is:

```
<DATE><TIME><EVENT>< SRC_IP><SRC_PORT ><SRC_INF><  
DST_IP><DST_PORT><DST_INF><ACTION>
```

```
[Wed, 2003-07-30 16:24:23] - UDP Packet - Source: 207.46.130.100 WAN -  
Destination: 10.10.10.4,1234 LAN - [Drop]  
[Wed, 2003-07-30 17:48:09] - TCP Packet[SYN] - Source: 64.3.3.201,65534 WAN -  
Destination: 10.10.10.4,1765 LAN - [Receive]  
[Fri, 2003-12-05 22:07:11] - IP Packet [Type Field:8], from 20.97.173.18 to  
172.31.12.157 - [Drop]
```

Notes:

ACTION = "Drop", "Receive"

EVENT = "ICMP Packet", "UDP Packet", "TCP Packet", "IP Packet"

DoS Attack/Scan

Common attacks and scans are logged.

The format is:

```
<DATE><TIME><PKT_TYPE>< SRC_IP><SRC_PORT ><SRC_INF>< DST_IP><DST_PORT
><DST_PORT><ACTION><DESCRIPTION>
<DATE> <TIME> <PKT_TYPE> <SRC_IP> <SRC_INF> <DST_IP> <DST_INF> <ACTION>
<DESCRIPTION>
```

```
[Fri, 2003-12-05 21:22:07] - TCP Packet - Source:172.31.12.156,54611 ,WAN -
Destination:172.31.12.157,134 ,LAN [Drop] - [FIN Scan]
[Fri, 2003-12-05 21:22:38] - TCP Packet - Source:172.31.12.156,59937 ,WAN -
Destination:172.31.12.157,670 ,LAN [Drop] - [Nmap Xmas Scan]
[Fri, 2003-12-05 21:23:06] - TCP Packet - Source:172.31.12.156,39860 ,WAN -
Destination:172.31.12.157,18000 ,LAN [Drop] - [Null Scan]
[Fri, 2003-12-05 21:27:55] - TCP Packet - Source:172.31.12.156,38009 ,WAN -
Destination:172.31.12.157,15220 ,LAN [Drop] - [Full Sapu Scan]
[Fri, 2003-12-05 21:28:56] - TCP Packet - Source:172.31.12.156,35128 ,WAN -
Destination:172.31.12.157,38728 ,LAN [Drop] - [Full Xmas Scan]
[Fri, 2003-12-05 21:30:30] - IP Packet - Source:227.113.223.77,WAN -
Destination:172.31.12.157,LAN [Drop] - [Fragment Attack]
[Fri, 2003-12-05 21:30:30] - IP Packet - Source:20.97.173.18,WAN -
Destination:172.31.12.157,LAN [Drop] - [Targa3 Attack]
[Fri, 2003-12-05 21:30:30] - TCP Packet - Source:3.130.176.84,37860 ,WAN -
Destination:172.31.12.157,63881 ,LAN [Drop] - [Vecna Scan]
[Fri, 2003-12-05 21:30:31] - ICMP Packet [Type 238] - Source:100.110.182.63,WAN -
Destination:172.31.12.157,LAN [Drop] - [ICMP Flood]
[Fri, 2003-12-05 21:33:52] - UDP Packet - Source:127.0.0.1,0 ,WAN -
Destination:172.31.12.157,0 ,LAN [Drop] - [Fragment Attack]
[Fri, 2003-12-05 19:20:00] - TCP Session - Source:54.148.179.175,58595 ,LAN -
Destination:192.168.0.1,20[FTP Data] ,WAN [Reset] - [SYN Flood]
[Fri, 2003-12-05 19:21:22] - UDP Packet - Source:172.31.12.156,7 ,LAN -
Destination:172.31.12.157,7 ,WAN [Drop] - [UDP Flood]
[Fri, 2003-12-05 20:59:08] - ICMP Echo Request packet - Source:192.168.0.5,LAN -
Destination:172.31.12.99,WAN [Drop] - [ICMP Flood]
[Fri, 2003-12-05 18:07:29] - TCP Packet - Source:192.168.0.10,1725 ,LAN -
Destination:61.177.58.50,1352 ,WAN [Drop] - [TCP incomplete sessions overflow]
[Fri, 2003-12-05 21:11:24] - TCP Packet - Source:192.168.0.10,2342 ,LAN -
Destination:61.177.58.50,1352 ,WAN [Drop] - [First TCP Packet not SYN]
```

Notes:

DESCRIPTION = "SYN Flood", "UDP Flood", "ICMP Flood", "IP Spoofing", "TearDrop",
 "Brute Force", "Ping of Death", "Fragment Attack", "Targa3 Attack", "Big Bomb"
 "SYN with Data", "Full Xmas Scan", "Full Head Scan", "Full Sapu Scan", "FIN
 Scan", "SYN FIN Scan", "Null Scan", "Nmap Xmas Scan", "Vecna Scan", "Tcp SYN RES
 Set", "Other Scan"
 "TCP incomplete sessions overflow", "TCP preconnect traffic", "TCP invalid
 traffic", "First TCP Packet not SYN", "First TCP Packet with no SYN"

```
<DATE><TIME><PKT_TYPE>< SRC_IP >< DST_IP><ACTION>
```

```
[Wed, 2003-07-30 17:45:17] - TCP Packet [Malformed, Length=896] - Source:
64.3.3.201 - Destination: 10.10.10.4 - [Drop]
[Wed, 2003-07-30 17:45:17] - TCP Packet [Malformed, Length=1000] - Source:
64.3.3.201- Destination: 10.10.10.4 - [Forward]
```

Notes:

PKT_TYPE = "TCP", "UDP", "ICMP", "Proto: Number"

Access Block Site

If keyword blocking is enabled and a keyword is specified, attempts to access a site whose URL contains a specified keyword are logged.

The format is

```
<DATE> <TIME> <EVENT> <SRC_IP> <SRC_INF> <DST_IP> <DST_INF> <ACTION>
```

```
[Fri, 2003-12-05 23:01:47] - Attempt to access blocked sites -  
Source:192.168.0.10,LAN - Destination:www.google.com/,WAN - [Drop]
```

Notes:

EVENT = Attempt to access blocked sites

SRC_INF = LAN

DST_INF = WAN

All Web Sites and News Groups Visited

All Web sites and News groups that you visit are logged.

The format is

```
<DATE> <TIME> <EVENT> <SRC_IP> <SRC_INF> <DST_IP> <DST_INF> <ACTION>
```

```
[Fri, 2003-12-05 23:03:49] - Access site - Source:192.168.0.10,LAN -  
Destination:euro.allyes.com,WAN - [Forward]
```

Notes:

EVENT = Attempt to access blocked sites

SRC_INF = LAN or WAN

DST_INF = WAN or LAN

System Admin Sessions

Administrator session logins and failed attempts are logged, as well as manual or idle-time logouts.

The format is:

```
<DATE><TIME><EVENT ><SRC_IP>
<DATE><TIME><EVENT ><SRC_IP><SRC_PORT><DST_IP><DST_PORT><ACTION>

[Fri, 2003-12-05 21:07:43] - Administrator login successful - IP:192.168.0.10
[Fri, 2003-12-05 21:09:16] - Administrator logout - IP:192.168.0.10
[Fri, 2003-12-05 21:09:31] - Administrator login fail, Username error -
IP:192.168.0.10
[Fri, 2003-12-05 21:09:25] - Administrator login fail, Password error -
IP:192.168.0.10
[Fri, 2003-12-05 21:16:15] - Login screen timed out - IP:192.168.0.10
[Fri, 2003-12-05 21:07:43] - Administrator Interface Connecting[TCP] - Source
192.168.0.10,2440 - Destination 192.168.0.1,80 - [Receive]
```

Notes:

ACTION: Receive or Drop

Policy Administration LOG

```
<DATE> <TIME> <EVENT> <DIRECTION> <SERVICE>< DESCRIPTION >

[Fri, 2003-12-05 21:48:41] - Administrator Action - Inbound Policy to Service
[BGP] is Added
[Fri, 2003-12-05 21:49:41] - Administrator Action - Outbound Policy to Service
[BGP] is Added
[Fri, 2003-12-05 21:50:14] - Administrator Action - Inbound Policy to Service
[BGP] is Modified
[Fri, 2003-12-05 21:50:57] - Administrator Action - Outbound Policy to Service
[BGP] is Modified
[Fri, 2003-12-05 21:51:14] - Administrator Action - Inbound Policy to Service
[BGP] is Deleted
[Fri, 2003-12-05 21:52:12] - Administrator Action - Inbound Policy to Service
[BGP] is Moved to Index [0]
[Fri, 2003-12-05 21:54:41] - Administrator Action - Outbound Policy to Service
[FTP] is Moved to Index [1]
[Fri, 2003-12-05 22:01:47] - Administrator Action - Inbound Policy to Service
[BGP] is changed to Disable
[Fri, 2003-12-05 22:02:14] - Administrator Action - Inbound Policy to Service
[BGP] is changed to Enable
[Fri, 2003-12-05 22:02:35] - Administrator Action - Outbound Policy to Service
[NFS] is changed to Disable
[Fri, 2003-12-05 22:02:52] - Administrator Action - Outbound Policy to Service
[NFS] is changed to Enable
```

Notes:

DIRECTION: Inbound or Outbound

SERVICE: Supported service name

Appendix E

Virtual Private Networking

There have been many improvements in the Internet including Quality of Service, network performance, and inexpensive technologies, such as DSL. But one of the most important advances has been in Virtual Private Networking (VPN) Internet Protocol security (IPSec). IPSec is one of the most complete, secure, and commercially available, standards-based protocols developed for transporting data.

What is a VPN?

A VPN is a shared network where private data is segmented from other traffic so that only the intended recipient has access. The term VPN was originally used to describe a secure connection over the Internet. Today, however, VPN is also used to describe private networks, such as Frame Relay, Asynchronous Transfer Mode (ATM), and Multiprotocol Label Switching (MPLS).

A key aspect of data security is that the data flowing across the network is protected by encryption technologies. Private networks lack data security, which allows data attackers to tap directly into the network and read the data. IPSec-based VPNs use encryption to provide data security, which increases the network's resistance to data tampering or theft.

IPSec-based VPNs can be created over any type of IP network, including the Internet, Frame Relay, ATM, and MPLS, but only the Internet is ubiquitous and inexpensive.

VPNs are traditionally used for:

- **Intranets:** Intranets connect an organization's locations. These locations range from the headquarters offices, to branch offices, to a remote employee's home. Often this connectivity is used for e-mail and for sharing applications and files. While Frame Relay, ATM, and MPLS accomplish these tasks, the shortcomings of each limits connectivity. The cost of connecting home users is also very expensive compared to Internet-access technologies, such as DSL or cable. Because of this, organizations are moving their networks to the Internet, which is inexpensive, and using IPSec to create these networks.

- **Remote Access:** Remote access enables telecommuters and mobile workers to access e-mail and business applications. A dial-up connection to an organization's modem pool is one method of access for remote workers, but is expensive because the organization must pay the associated long distance telephone and service costs. Remote access VPNs greatly reduce expenses by enabling mobile workers to dial a local Internet connection and then set up a secure IPSec-based VPN communications to their organization.
- **Extranets:** Extranets are secure connections between two or more organizations. Common uses for extranets include supply-chain management, development partnerships, and subscription services. These undertakings can be difficult using legacy network technologies due to connection costs, time delays, and access availability. IPSec-based VPNs are ideal for extranet connections. IPSec-capable devices can be quickly and inexpensively installed on existing Internet connections.

What Is IPSec and How Does It Work?

IPSec is an Internet Engineering Task Force (IETF) standard suite of protocols that provides data authentication, integrity, and confidentiality as data is transferred between communication points across IP networks. IPSec provides data security at the IP packet level. A packet is a data bundle that is organized for transmission across a network, and includes a header and payload (the data in the packet). IPSec emerged as a viable network security standard because enterprises wanted to ensure that data could be securely transmitted over the Internet. IPSec protects against possible security exposures by protecting data while in transit.

IPSec Security Features

IPSec is the most secure method commercially available for connecting network sites. IPSec was designed to provide the following security features when transferring packets across networks:

- **Authentication:** Verifies that the packet received is actually from the claimed sender.
- **Integrity:** Ensures that the contents of the packet did not change in transit.
- **Confidentiality:** Conceals the message content through encryption.

IPSec Components

IPSec contains the following elements:

- **Encapsulating Security Payload (ESP):** Provides confidentiality, authentication, and integrity.
- **Authentication Header (AH):** Provides authentication and integrity.
- **Internet Key Exchange (IKE):** Provides key management and Security Association (SA) management.


Encapsulating Security Payload (ESP)

ESP provides authentication, integrity, and confidentiality, which protect against data tampering and, most importantly, provide message content protection.

IPSec provides an open framework for implementing industry standard algorithms, such as SHA and MD5. The algorithms IPSec uses produce a unique and unforgeable identifier for each packet, which is a data equivalent of a fingerprint. This fingerprint allows the device to determine if a packet has been tampered with. Furthermore, packets that are not authenticated are discarded and not delivered to the intended receiver.

ESP also provides all encryption services in IPSec. Encryption translates a readable message into an unreadable format to hide the message content. The opposite process, called decryption, translates the message content from an unreadable format to a readable message. Encryption/decryption allows only the sender and the authorized receiver to read the data. In addition, ESP has an option to perform authentication, called ESP authentication. Using ESP authentication, ESP provides authentication and integrity for the payload and not for the IP header.

Original Packet



Packet with IPSec Encapsulating Security Payload (ESP)

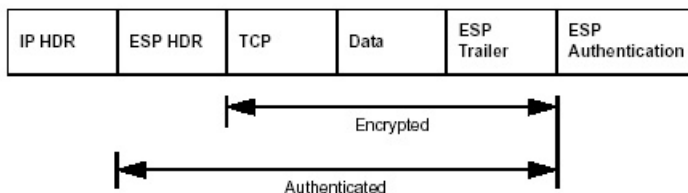


Figure 8-4: Original packet and packet with IPSec Encapsulated Security Payload

The ESP header is inserted into the packet between the IP header and any subsequent packet contents. However, because ESP encrypts the data, the payload is changed. ESP does not encrypt the ESP header, nor does it encrypt the ESP authentication.

Authentication Header (AH)

AH provides authentication and integrity, which protect against data tampering, using the same algorithms as ESP. AH also provides optional anti-replay protection, which protects against unauthorized retransmission of packets. The authentication header is inserted into the packet between the IP header and any subsequent packet contents. The payload is not touched.

Although AH protects the packet's origin, destination, and contents from being tampered with, the identity of the sender and receiver is known. In addition, AH does not protect the data's confidentiality. If data is intercepted and only AH is used, the message contents can be read. ESP protects data confidentiality. For added protection in certain cases, AH and ESP can be used together. In the following table, IP HDR represents the IP header and includes both source and destination IP addresses.

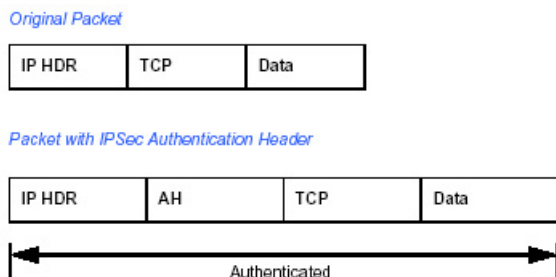


Figure 8-5: Original packet and packet with IPSec Authentication Header

IKE Security Association

IPSec introduces the concept of the Security Association (SA). An SA is a logical connection between two devices transferring data. An SA provides data protection for unidirectional traffic by using the defined IPSec protocols. An IPSec tunnel typically consists of two unidirectional SAs, which together provide a protected, full-duplex data channel.

The SAs allow an enterprise to control exactly what resources may communicate securely, according to security policy. To do this an enterprise can set up multiple SAs to enable multiple secure VPNs, as well as define SAs within the VPN to support different departments and business partners.

Mode

SAs operate using modes. A mode is the method in which the IPSec protocol is applied to the packet. IPSec can be used in tunnel mode or transport mode. Typically, the tunnel mode is used for gateway-to-gateway IPSec tunnel protection, while transport mode is used for host-to-host IPSec tunnel protection. A gateway is a device that monitors and manages incoming and outgoing network traffic and routes the traffic accordingly. A host is a device that sends and receives network traffic.

- Transport Mode:** The transport mode IPSec implementation encapsulates only the packet's payload. The IP header is not changed. After the packet is processed with IPSec, the new IP packet contains the old IP header (with the source and destination IP addresses unchanged) and the processed packet payload. Transport mode does not shield the information in the IP header; therefore, an attacker can learn where the packet is coming from and where it is going to. The previous packet diagrams show a packet in transport mode.
- Tunnel Mode:** The tunnel mode IPSec implementation encapsulates the entire IP packet. The entire packet becomes the payload of the packet that is processed with IPSec. A new IP header is created that contains the two IPSec gateway addresses. The gateways perform the encapsulation/decapsulation on behalf of the hosts. Tunnel mode ESP prevents an attacker from analyzing the data and deciphering it, as well as knowing who the packet is from and where it is going.

Note: AH and ESP can be used in both transport mode or tunnel mode.

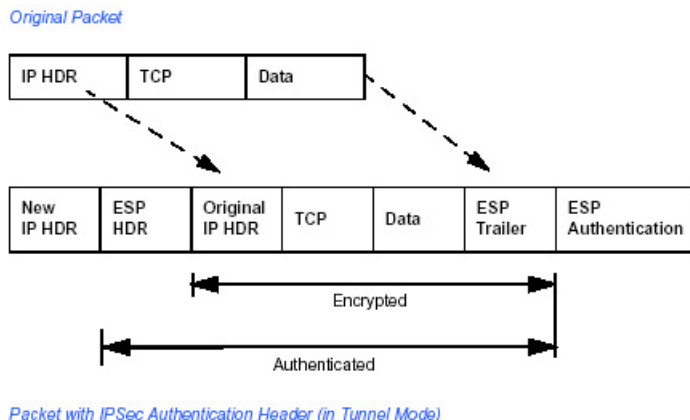


Figure 8-6: Original packet and packet with IPSec ESP in Tunnel mode

Key Management

IPSec uses the Internet Key Exchange (IKE) protocol to facilitate and automate the SA setup and the exchange of keys between parties transferring data. Using keys ensures that only the sender and receiver of a message can access it.

IPSec requires that keys be re-created, or refreshed, frequently so that the parties can communicate securely with each other. IKE manages the process of refreshing keys; however, a user can control the key strength and the refresh frequency. Refreshing keys on a regular basis ensures data confidentiality between sender and receiver.

Understand the Process Before You Begin

This document provides case studies on how to configure secure IPSec VPN tunnels. This document assumes the reader has a working knowledge of NETGEAR management systems.

NETGEAR is a member of the VPN Consortium, a group formed to facilitate IPSec VPN vendor interoperability. The VPN Consortium has developed specific scenarios to aid system administrators in the often confusing process of connecting two different vendor implementations of the IPSec standard. The case studies in this appendix follow the addressing and configuration mechanics defined by the VPN Consortium. Additional information regarding inter-vendor interoperability may be found at <http://www.vpnc.org/interop.html>.

It is a good idea to gather all the necessary information required to establish a VPN before you begin the configuration process. You should understand whether the firmware is up to date, all of the addresses that will be necessary, and all of the parameters that need to be set on both sides. Try to understand any incompatibilities before you begin, so that you minimize any potential complications which may arise from normal firewall or WAN processes.

If you are not a full-time system administrator, it is a good idea to familiarize yourself with the mechanics of a VPN. The brief description in this appendix will help. Other good sources include:

- The NETGEAR VPN Tutorial – http://www.netgear.com/planetvpn/pvpn_2.html
- The VPN Consortium – <http://www.vpnc.org/>
- The VPN bibliography in “Additional Reading” on page E-11.

VPN Process Overview

Even though IPSec is standards-based, each vendor has its own set of terms and procedures for implementing the standard. Because of these differences, it may be a good idea to review some of the terms and the generic processes for connecting two gateways before diving into the specifics.

Network Interfaces and Addresses

The VPN gateway is aptly named because it functions as a “gatekeeper” for each of the computers connected on the Local Area Network behind it.

In most cases, each Gateway will have a “public” facing address (WAN side) and a “private” facing address (LAN side). These addresses are referred to as the “network interface” in documentation regarding the construction of VPN communication. Please note that the addresses used in the example do not use full TCP/IP notation.

Interface Addressing

This TechNote uses example addresses provided the VPN Consortium. It is important to understand that you will be using addresses specific to the devices that you are attempting to connect via IPSec VPN.

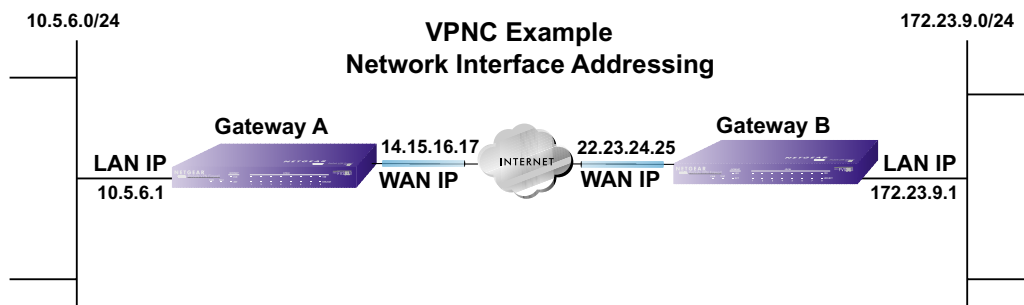


Figure 8-7: VPNC Example Network Interface Addressing

It is also important to make sure the addresses do not overlap or conflict. That is, each set of addresses should be separate and distinct.

Table 8-1. WAN (Internet/Public) and LAN (Internal/Private) Addressing

Gateway	LAN or WAN	VPNC Example Address
Gateway A	LAN (Private)	10.5.6.1
Gateway A	WAN (Public)	14.15.16.17
Gateway B	LAN (Private)	22.23.24.25
Gateway B	WAN (Public)	172.23.9.1

It will also be important to know the subnet mask of both gateway LAN Connections.

Table 8-2. Subnet Addressing

Gateway	LAN or WAN	Interface Name	Example Subnet Mask
Gateway A	LAN (Private)	Subnet Mask A	255.255.255.0
Gateway B	LAN (Private)	Subnet Mask B	255.255.255.0

Firewalls

It is important to understand that many gateways are also firewalls. VPN tunnels cannot function properly if firewall settings disallow all incoming traffic. Please refer to the firewall instructions for both gateways to understand how to open specific protocols, ports, and addresses that you intend to allow.

Setting Up a VPN Tunnel Between Gateways

An SA, frequently called a tunnel, is the set of information that allows two entities (networks, PCs, routers, firewalls, gateways) to “trust each other” and communicate securely as they pass information over the Internet.

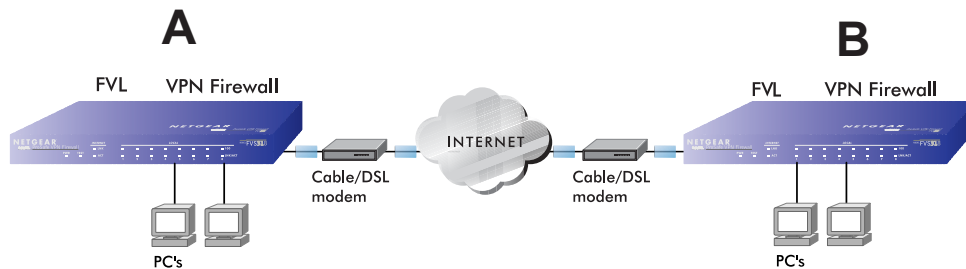


Figure 8-8: VPN Tunnel SA

The SA contains all the information necessary for gateway A to negotiate a secure and encrypted communication stream with gateway B. This communication is often referred to as a “tunnel.” The gateways contain this information so that it does not have to be loaded onto every computer connected to the gateways.

Each gateway must negotiate its Security Association with another gateway using the parameters and processes established by IPSec. As illustrated below, the most common method of accomplishing this process is via the Internet Key Exchange (IKE) protocol which automates some of the negotiation procedures. Alternatively, you can configure your gateways using manual key exchange, which involves manually configuring each parameter on both gateways.

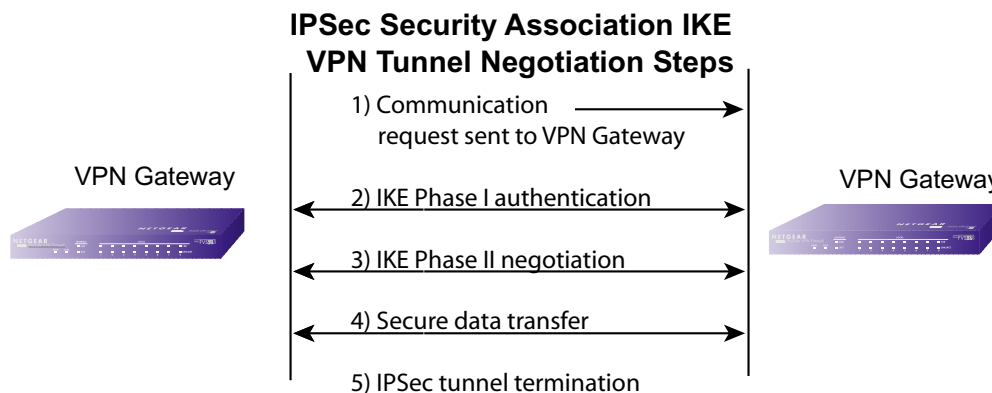


Figure 8-9: IPSec SA negotiation

1. **The IPSec software on Host A initiates the IPSec process in an attempt to communicate with Host B.** The two computers then begin the Internet Key Exchange (IKE) process.

2. IKE Phase I.

- a. The two parties negotiate the encryption and authentication algorithms to use in the IKE SAs.
- b. The two parties authenticate each other using a predetermined mechanism, such as preshared keys or digital certificates.
- c. A shared master key is generated by the Diffie-Hellman Public key algorithm within the IKE framework for the two parties. The master key is also used in the second phase to derive IPSec keys for the SAs.

3. IKE Phase II.

- a. The two parties negotiate the encryption and authentication algorithms to use in the IPSec SAs.
 - b. The master key is used to derive the IPSec keys for the SAs. Once the SA keys are created and exchanged, the IPSec SAs are ready to protect user data between the two VPN gateways.
4. **Data transfer.** Data is transferred between IPSec peers based on the IPSec parameters and keys stored in the SA database.
5. **IPSec tunnel termination.** IPSec SAs terminate through deletion or by timing out.

VPNC IKE Security Parameters

It is important to remember that both gateways must have the identical parameters set for the process to work correctly. The settings in these examples follow the examples given for Scenario 1 of the VPN Consortium.

VPNC IKE Phase I Parameters

The IKE Phase 1 parameters used:

- Main mode
- TripleDES
- SHA-1
- MODP group 1
- pre-shared secret of "hr5xb84l6aa9r6"
- SA lifetime of 28800 seconds (eight hours)

VPNC IKE Phase II Parameters

The IKE Phase 2 parameters used in Scenario 1 are:

- TripleDES
- SHA-1
- ESP tunnel mode
- MODP group 1
- Perfect forward secrecy for rekeying
- SA lifetime of 28800 seconds (one hour)

Testing and Troubleshooting

Once you have completed the VPN configuration steps you can use PCs, located behind each of the gateways, to ping various addresses on the LAN-side of the other gateway.

You can troubleshoot connections using the VPN status and log details on the NETGEAR gateway to determine if IKE negotiation is working. Common problems encountered in setting up VPNs include:

- Parameters may be configured differently on Gateway A vs. Gateway B.
- Two LANs set up with similar or overlapping addressing schemes.
- So many required configuration parameters mean errors such as mistyped information or mismatched parameter selections on either side are more likely to happen.

Additional Reading

- *Building and Managing Virtual Private Networks*, Dave Kosiur, Wiley & Sons; ISBN: 0471295264
- *Firewalls and Internet Security: Repelling the Wily Hacker*, William R. Cheswick and Steven M. Bellovin, Addison-Wesley; ISBN: 0201633574
- *VPNs A Beginners Guide*, John Mains, McGraw Hill; ISBN: 0072191813
- [FF98] Floyd, S., and Fall, K., Promoting the Use of End-to-End Congestion Control in the Internet. IEEE/ACM Transactions on Networking, August 1999.

Relevant RFCs listed numerically:

- [RFC 791] *Internet Protocol DARPA Internet Program Protocol Specification*, Information Sciences Institute, USC, September 1981.
- [RFC 1058] *Routing Information Protocol*, C Hedrick, Rutgers University, June 1988.
- [RFC 1483] *Multiprotocol Encapsulation over ATM Adaptation Layer 5*, Juha Heinanen, Telecom Finland, July 1993.
- [RFC 2401] S. Kent, R. Atkinson, Security Architecture for the Internet Protocol, RFC 2401, November 1998.
- [RFC 2407] D. Piper, The Internet IP Security Domain of Interpretation for ISAKMP, November 1998.
- [RFC 2474] K. Nichols, S. Blake, F. Baker, D. Black, Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers, December 1998.
- [RFC 2475] S. Blake, D. Black, M. Carlson, E. Davies, Z. Wang, and W. Weiss, An Architecture for Differentiated Services, December 1998.
- [RFC 2481] K. Ramakrishnan, S. Floyd, A Proposal to Add Explicit Congestion Notification (ECN) to IP, January 1999.
- [RFC 2408] D. Maughan, M. Schertler, M. Schneider, J. Turner, Internet Security Association and Key Management Protocol (ISAKMP).
- [RFC 2409] D. Harkins, D. Carrel, Internet Key Exchange (IKE) protocol.
- [RFC 2401] S. Kent, R. Atkinson, Security Architecture for the Internet Protocol.

Appendix F

NETGEAR VPN Configuration

FVS318 or FVM318 to FVL328

This appendix provides a case study on how to configure a secure IPSec VPN tunnel between a NETGEAR FVS318 or FVM318 to a FVL328v2. The configuration options and screens for the FVS318 and FVM318 are the same.

Configuration Template

The configuration in this document follows the addressing and configuration mechanics defined by the VPN Consortium. Gather all the necessary information before you begin the configuration process. Verify whether the firmware is up to date, all of the addresses that will be necessary, and all of the parameters that need to be set on both sides. Check that there are no firewall restrictions.

Table F-1. Summary

VPN Consortium Scenario:		Scenario 1
Type of VPN		LAN-to-LAN or Gateway-to-Gateway (not PC/Client-to-Gateway)
Security Scheme:		IKE with Preshared Secret/Key (not Certificate-based)
Date Tested:		December 2003
Model/Firmware Tested:		
	NETGEAR-Gateway A	FVS318 firmware version A1.4 or FVM318 firmware version 1.1
	NETGEAR-Gateway B	FVL328 with firmware version 1.5 Release 07
IP Addressing:		
	NETGEAR-Gateway A	Static IP address
	NETGEAR-Gateway B	Static IP address

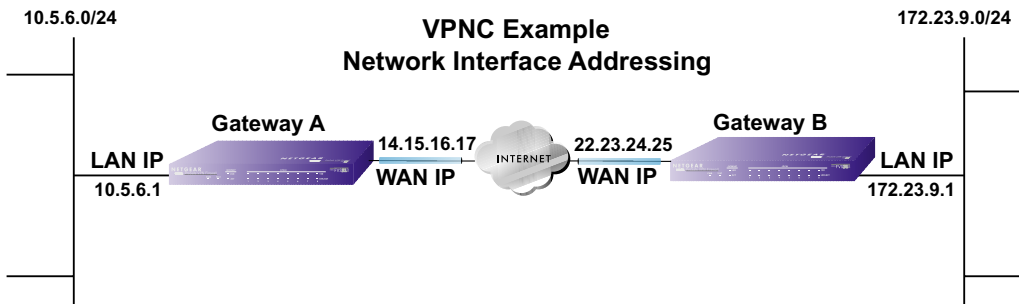


Figure F-1: Addressing and Subnet Used for Examples

Step-By-Step Configuration of FVS318 or FVM318 Gateway A

- Log in to the FVS318 or FVM318 labeled Gateway A as in the illustration.

Out of the box, the FVS318 or FVM318 is set for its default LAN address of <http://192.168.0.1> with its default user name of **admin** and default password of **password**. For this example we will assume you have set the local LAN address as 10.5.6.1 for Gateway A and have set your own password.

VPN Settings

#	Enable	Connection Name	Local IPSec ID	Remote IPSec ID
1	-	-	-	-
2	-	-	-	-
3	-	-	-	-
4	-	-	-	-
5	-	-	-	-
6	-	-	-	-
7	-	-	-	-
8	-	-	-	-

Figure F-2: NETGEAR FVS318 VPN Settings Pre-Configuration

- Click the VPN Settings link on the left side of the Settings management GUI. Click the radio button of first available VPN leg (all 8 links are available in the example). Click the Edit button below. This will take you to the VPN Settings – Main Mode Menu.

VPN Settings - Main Mode

Connection Name	toFVL328
Local IPsec Identifier	14.15.16.17
Remote IPsec Identifier	22.23.24.25
Tunnel can be accessed from	a subnet of local address ▼
Local LAN start IP Address	10 . 5 . 6 . 0
Local LAN finish IP Address	0 . 0 . 0 . 0
Local LAN IP Subnetmask	255 . 255 . 255 . 0
Tunnel can access	a subnet of remote address ▼
Remote LAN start IP Address	172 . 23 . 9 . 0
Remote LAN finish IP Address	0 . 0 . 0 . 0
Remote LAN IP Subnetmask	255 . 255 . 255 . 0
Remote WAN IP or FQDN	22.23.24.25

Figure F-3: Figure 3 – NETGEAR FVS318 VPN Settings (part 1) – Main Mode

- In the Connection Name box, enter in a unique name for the VPN tunnel to be configured between the NETGEAR devices. For this example we have used **toFVL328**.
- Enter a Local IPsec Identifier name for the NETGEAR FVS318 Gateway A. This name must be entered in the other endpoint as Remote IPsec Identifier. In this example we used **14.15.16.17** as the local identifier.
- Enter a Remote IPsec Identifier name for the remote NETGEAR FVL328 Gateway B. This name must be entered in the other endpoint as Local IPsec Identifier. In this example we used **22.23.24.25** as the remote identifier.
- Choose a subnet from local address from the Tunnel can be accessed from pull-down menu.
- Type the starting LAN IP Address of Gateway A (**10.5.6.1** in our example) in the Local IP Local LAN start IP Address field.
- Type the finishing LAN IP Address of Gateway A (**0.0.0.0** in our example) in the Local IP Local LAN finish IP Address field.
- Type the LAN Subnet Mask of Gateway A (**255.255.255.0** in our example) in the Local LAN IP Subnetmask field.

- Choose a subnet from local address from the Tunnel can access pull-down menu.
- Type the starting LAN IP Address of Gateway B (**172.23.9.1** in our example) in the Local IP Remote LAN Start IP Address field.
- Type the finishing LAN IP Address of Gateway B (**0.0.0.0** in our example) in the Local IP Remote LAN Finish IP Address field.
- Type the LAN Subnet Mask of Gateway B (**255.255.255.0** in our example) in the Remote LAN IP Subnetmask field.
- Type the WAN IP address (**22.23.24.25** in our example) of Gateway B in the Remote WAN IP or FQDN field.

Secure Association	Main Mode
Perfect Forward Secrecy	<input checked="" type="radio"/> Enabled <input type="radio"/> Disabled
Encryption Protocol	3DES
PreShared Key	hr5xb8416aa9r6
Key Life	3600 Seconds
IKE Life Time	28800 Seconds
<input checked="" type="checkbox"/> NETBIOS Enable	
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

Figure F-4: Figure 4 – NETGEAR FVS318 VPN Settings (part 2) – Main Mode

- From the Secure Association drop-down box, select Main Mode.
- Next to Perfect Forward Secrecy, select the Enabled radio button.
- From the Encryption Protocol drop-down box, select 3DES.
- In the PreShared Key box, type a unique text string to be used as the shared key between Gateway A and Gateway B. In this example we used **hr5xb8416aa9r6**. You must make sure the key is the same for both gateways.
- In the Key Life box, enter in 3600 seconds.
- In the IKE Life Time, enter 28800 seconds.
- Check the NETBIOS Enable box if you wish to pass NetBIOS traffic over the VPN tunnel, allowing functions such as Microsoft Network Neighborhood browsing.

- Click the Apply button in the lower center of the screen to save all changes. This will return you to the VPN Settings screen.

VPN Policies

Policy Table

#	Enable	Name	Type	Local	Remote	AH	ESP
1	<input checked="" type="checkbox"/>	to318	Auto	172.23.9.1/255.255.255.0	10.5.6.1/255.255.255.0	Disabled	ESP

Figure F-5: NETGEAR FVS318 VPN Settings After Inputting Configuration Info

- When the screen returns to the VPN Settings, make sure the Enable check box is selected.

Step-By-Step Configuration of FVL328 Gateway B

- Log in to the NETGEAR FVL328 labeled Gateway B as in the illustration.

Out of the box, the FVL328 is set for its default LAN address of <http://192.168.0.1> with its default user name of **admin** and default password of **password**. For this example we will assume you have set the local LAN address as 172.23.9.1 for Gateway B and have set your own user name and password.

- Click the IKE Policies link under the VPN category link on the left side of the Settings management GUI. This will open the IKE Policies Menu. Click Add. This will open a new screen titled IKE Policy Configuration.

IKE Policy Configuration

General

Policy Name:

Direction/Type:

Exchange Mode:

Local

Local Identity Type:

Local Identity Data:

Remote

Remote Identity Type:

Remote Identity Data:

Figure F-6: NETGEAR FVL328 IKE Policy Configuration – Part 1

- Enter an appropriate name for the policy in the Policy Name field. This name is not supplied to the remote VPN Endpoint. It is used to help you manage the IKE policies. In our example we have used FVS318 as the Policy Name. In the Policy Name field type **FVS318**.
- From the Direction/Type drop-down box, select Both Directions.
- From the Exchange Mode drop-down box, select Main Mode.
- From the Local Identity drop-down box, select WAN IP Address (WAN IP address will automatically be populated into the Local Identity Data field after policy is applied).
- From the Remote Identity drop-down box, select Remote WAN IP (WAN IP address will automatically be populated into the Local Identity Data field after policy is applied).

IKE SA Parameters

Encryption Algorithm: 3DES

Authentication Algorithm: MD5

Authentication Method: ☒ Pre-shared Key

Pre-shared Key: hr5xb84l6aa9r6

☐ RSA Signature (requires Certificate)

Diffie-Hellman (DH) Group: Group 1 (768 Bit)

SA Life Time: 28800 (secs)

Back Apply Cancel

Figure F-7: NETGEAR FVL328 IKE Policy Configuration – Part 2

- From the Encryption Algorithm drop-down box, select 3DES.
 - From the Authentication Algorithm drop-down box, select MD5.
 - From the Authentication Method radio button, select Pre-shared Key.
 - In the Pre-Shared Key field, type **hr5xb84l6aa9r6**. You must make sure the key is the same for both gateways.
 - From the Diffie-Hellman (DH) Group drop-down box, select Group 1 (768 Bit).
 - In the SA Life Time field, type 28800.
3. Click the Apply Button. This will bring you back to the IKE Policies Menu.

IKE Policies

Policy Table


	#	Name	Mode	Local ID	Remote ID	Encr	Auth	DH
	1	FVS318	Main	22.23.24.25	14.15.16.17	3DES	MD5	Group 1 (768 Bit)

Add Edit Move Delete

Figure F-8: NETGEAR FVL328 IKE Policies (Post Configuration)

The FVS318 IKE Policy is now displayed in the IKE Policies page.

4. Click the VPN Policies link under the VPN category link on the left side of the Settings management GUI. This will take you to the VPN Policies Menu page. Click Add Auto Policy. This will open a new screen titled VPN – Auto Policy.

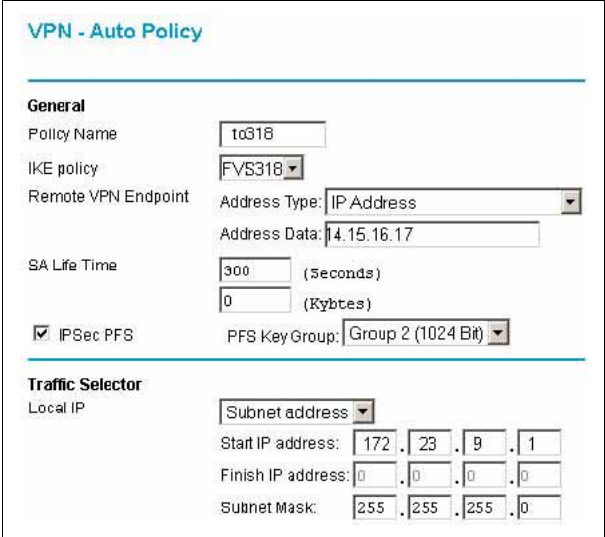

VPN - Auto Policy

General

Policy Name:

IKE policy:

Remote VPN Endpoint: Address Type: Address Data:

SA Life Time: (Seconds) (Kbytes)

☒ IPsec PFS PFS Key Group:

Traffic Selector

Local IP:

Start IP address: . . .

Finish IP address: . . .

Subnet Mask: . . .

Figure F-9: NETGEAR FVL328 VPN – Auto Policy (part 1)

- Enter a unique name to identify this policy. This name is not supplied to the remote VPN endpoint. In our example we have used “to318” as the Policy Name. In the Policy Name field type **to318**.
- From the IKE policy drop-down box, select the IKE Policy that was set up in the earlier step – this being the FVS318 IKE Policy.
- From the Remote VPN Endpoint Address Type drop-down box, select IP Address.
- Type the WAN IP Address of Gateway A (**14.15.16.17** in our example) in the **Remote** VPN Endpoint Address Data field.
- Type **300** in the SA Life Time (Seconds) field.
- Type **0** in the SA Life Time (Kbytes) field.
- Check the IPsec PFS check box.
- From the PFS Key Group drop-down box, select Group 2 (1024 Bit).
- From the Traffic Selector Local IP drop-down box, select Subnet address.
- Type the starting LAN IP Address of Gateway B (**172.23.9.1** in our example) in the Local IP Start IP Address field.
- Type the finishing LAN IP Address of Gateway B (**0.0.0.0** in our example) in the Local IP Finish IP Address field.

- Type the LAN Subnet Mask of Gateway B (**255.255.255.0** in our example) in the Local IP Subnet Mask field.

Figure F-10: NETGEAR FVL328 VPN – Auto Policy (part 2)

- From the Traffic Selector Remote IP drop-down box, select Subnet address.
 - Type the starting LAN IP Address of Gateway A (**10.5.6.1** in our example) in the Remote IP Start IP Address field.
 - Type the finishing LAN IP Address of Gateway A (**0.0.0.0** in our example) in the Remote IP Finish IP Address field.
 - Type the LAN Subnet Mask of Gateway A (**255.255.255.0** in our example) in the Remote IP Subnet Mask field.
 - From the AH Configuration Authentication Algorithm drop-down box, select MD5.
 - Select Enable Encryption in the ESP Configuration Enable Encryption check box.
 - From the ESP Configuration Encryption Algorithm drop-down box, select 3DES.
 - Select Enable Authentication in the ESP Configuration Enable Authentication check box.
 - From the ESP Configuration Authentication Algorithm drop-down box, select MD5.
 - Select NETBIOS Enable in the NETBIOS Enable check box.
5. Click the Apply Button. You will be taken back to the VPN Policies Menu page.

VPN Policies								
Policy Table								
	#	Enable	Name	Type	Local	Remote	AH	ESP
	1	<input checked="" type="checkbox"/>	to318	Auto	172.23.9.1/255.255.255.0	10.5.6.1/255.255.255.0	Disabled	ESP

Buttons: Edit, Move, Delete, Apply, Cancel

Buttons: Add Auto Policy, Add Manual Policy

Figure F-11: NETGEAR FVL328 VPN Policies Menu (Post Configuration)

- When the screen returns to the **VPN Policies**, make sure the **Enable** check box is selected. Click the **Apply** button.

Test the VPN Connection

- From a PC behind the NETGEAR FVS318 or FVM318 gateway A attempt to ping the remote FVL328v2 gateway B LAN Interface address (example address 172.23.9.1)
- From a PC behind the FVL328v2 gateway B attempt to ping the remote NETGEAR FVS318 or FVM318 gateway A LAN Interface address (example address 10.5.6.1)
- Click the Router Status link on the left side of the Settings management GUI. Click the Show VPN Status button below. This will take you to the IPSec Connection Status Screen. If the connection is functioning properly, the State fields will show “Estab.”
- Click the Router Status link on the left side of the Settings management GUI. Click the Show VPN Logs button below. NETGEAR log files should be similar to the example below.

```

13:19:02 - FVS318 IPsec:sizeof(connection)=1724 sizeof(state)=10048 sizeof(SA)=732
13:19:42 - FVS318 IPsec:call ipsecdoi_initiate
13:19:42 - FVS318 IPsec:New State index:0, sno:1
13:19:42 - FVS318 IPsec:Initiating Main Mode
13:19:42 - FVS318 IPsec:main_out1() policy=65
13:19:42 - FVS318 IKE:[toFVL328] Initializing IKE Main Mode
13:19:42 - FVS318 IKE:[toFVL328] TX >> MM_I1 : 22.23.24.25
13:19:42 - FVS318 IPsec:inserting event EVENT_RETRANSMIT, timeout in 10 seconds for #1
13:19:42 - FVS318 IPsec:Receive Packet address:0x1806f14 from 22.23.24.25
13:19:42 - FVS318 IPsec:main_inR1_out12()
13:19:42 - FVS318 IKE:[toFVL328] RX << MM_R1 : 22.23.24.25
13:19:42 - FVS318 IPsec:Oakley Transform 1 accepted
13:19:42 - FVS318 IKE:OAKLEY_PRESHARED_KEY/OAKLEY_3DES_CBC/MODP1536
13:19:42 - FVS318 IKE:[toFVL328] TX >> MM_I2 : 22.23.24.25
13:19:42 - FVS318 IPsec:inserting event EVENT_RETRANSMIT, timeout in 10 seconds for #1
13:19:44 - FVS318 IPsec:Receive Packet address:0x1806f14 from 22.23.24.25
13:19:44 - FVS318 IPsec:main_inR2_out13()
13:19:44 - FVS318 IKE:[toFVL328] RX << MM_R2 : 22.23.24.25
13:19:44 - FVS318 IKE:[toFVL328] TX >> MM_I3 : 22.23.24.25
13:19:44 - FVS318 IPsec:inserting event EVENT_RETRANSMIT, timeout in 10 seconds for #1
13:19:46 - FVS318 IPsec:Receive Packet address:0x1806f14 from 22.23.24.25
13:19:46 - FVS318 IPsec:main_inR3()
13:19:46 - FVS318 IKE:[toFVL328] RX << MM_R3 : 22.23.24.25
13:19:46 - FVS318 IPsec:Decoded Peer's ID is ID_IPV4_ADDR:22.23.24.25and 22.23.24.25in st
13:19:46 - FVS318 IPsec:inserting event EVENT_SA_REPLACE, timeout in 28740 seconds for #1
13:19:46 - FVS318 IPsec:STATE_MAIN_I4: ISAKMP SA established
13:19:46 - FVS318 IPsec:New State index:1, sno:2
13:19:46 - FVS318 IPsec:quick_out1()
13:19:46 - FVS318 IPsec:New Message ID generated:570001
13:19:46 - FVS318 IPsec:initiating Quick Mode PSK+ENCRYPT+TUNNEL+PFS
13:19:46 - FVS318 IKE:[toFVL328] TX >> QM_I1 : 211.26.0.186
13:19:46 - FVS318 IPsec:in get_ipsec_spi() spi=cf01ea7d
13:19:46 - FVS318 IPsec:My generated SPI=cf01ea7d
13:19:46 - FVS318 IPsec:inserting event EVENT_RETRANSMIT, timeout in 10 seconds for #2
13:19:48 - FVS318 IPsec:Receive Packet address:0x1806f14 from 22.23.24.25
13:19:48 - FVS318 IPsec:loglog[3] ignoring informational payload, type IPSEC_RESPONDER_LIFETIME
13:19:48 - FVS318 IPsec:quick_inR1_out12()
13:19:48 - FVS318 IKE:[toFVL328] RX << QM_R1 : 22.23.24.25
13:19:48 - FVS318 IKE:[ESP_3DES/AUTH_ALGORITHM_HMAC_SHA1/In SPI:cf01ea7d,Out
SPI:e51e148d]
13:19:48 - FVS318 IPsec:****Install OUTBOUND SA:
13:19:48 - FVS318 IPsec: ESP(3DES-CBC SHA-1)
13:19:48 - FVS318 IPsec:****Install INBOUND SA:
13:19:48 - FVS318 IPsec: ESP(3DES-CBC SHA-1)
13:19:48 - FVS318 IKE:[toFVL328] TX >> QM_I2 : 22.23.24.25
13:19:48 - FVS318 IKE:[toFVL328] established with 22.23.24.25 successfully
13:19:48 - FVS318 IPsec:inserting event EVENT_SA_REPLACE, timeout in 3540 seconds for #2
13:19:48 - FVS318 IPsec:STATE_QUICK_I2: sent QI2, IPsec SA established

```

End of Log -----

Appendix G

FVL328 to Windows 2000 Server and SSH Sentinel VPN Configuration

This appendix gives information on configuring FVL328 to Windows 2000 server VPN.

Configuring FVL328 to Windows 2000 Server VPN

192.168.0.x---FVL328---172.16.6.97---172.16.9.10 ---Win2K---11.5.0.10

FVL328 LAN IP:192.168.0.1 WAN IP:172.16.6.97

Windows 2000 Server LAN IP: 11.5.0.10 WAN IP:172.16.9.10


Windows 2000 Server configuration

This example shows how to create an IP Security Policy. The following steps should be performed in this order:

1. [“Create an IP Security Policy called DUT To Win2K” on page G-1](#)
2. [“Create an IP Filter called To DUT” on page G-3](#)
3. [“Create an IP Filter Called To Win2K” on page G-7](#)
4. [“Configure the General Properties” on page G-12](#)
5. [“Configure the FVL328 IKE policy” on page G-14](#)
6. [“Configure the FVL328 VPN policy” on page G-15](#)

Create an IP Security Policy called DUT To Win2K

1. Select Start → Run and type secpol.msc.
2. Right-click “IP Security Policies on Local Machine” and click Create IP Security Policy.

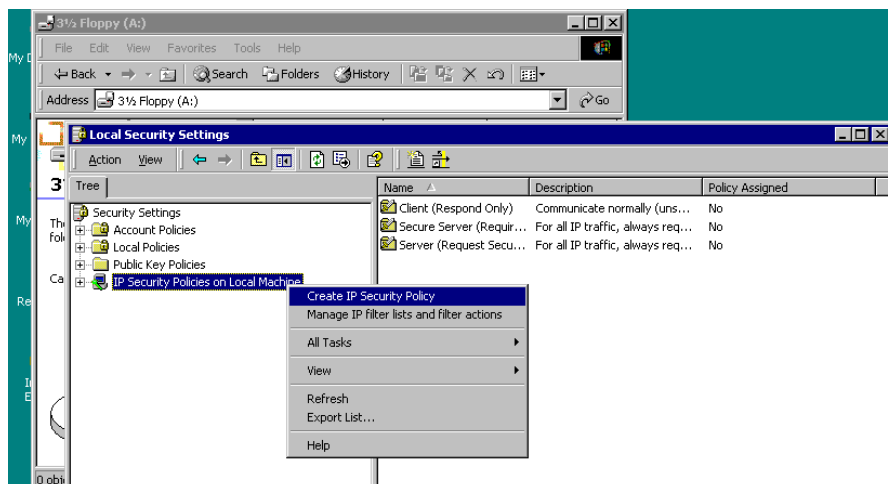


3. Click Next, then type the policy name, for example, DUT To Win2K. DUT in this example refers to Device Under Test. Click Next.
4. Clear the Activate to default response rule check box. Click Next, then click finish.




Create an IP Filter called To DUT


1. Click Add. Type To DUT and then click Add.

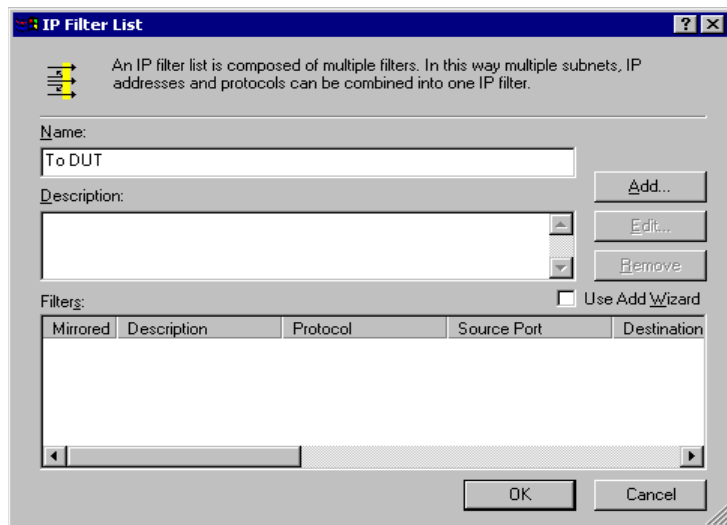


2. Type the Source IP address and the Destination IP address.

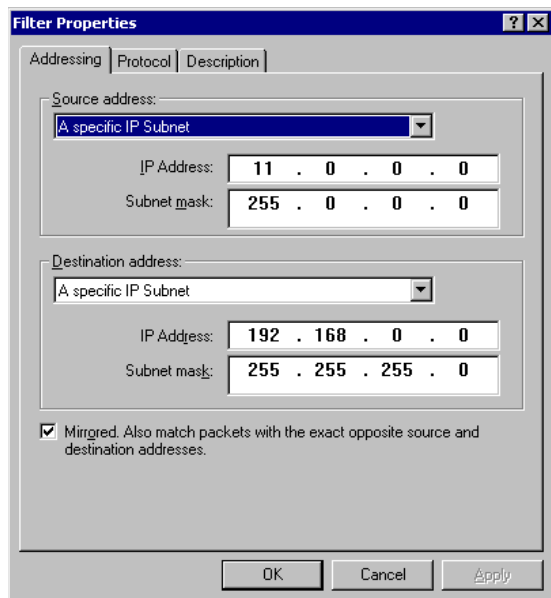


3. Click OK, then close the window.

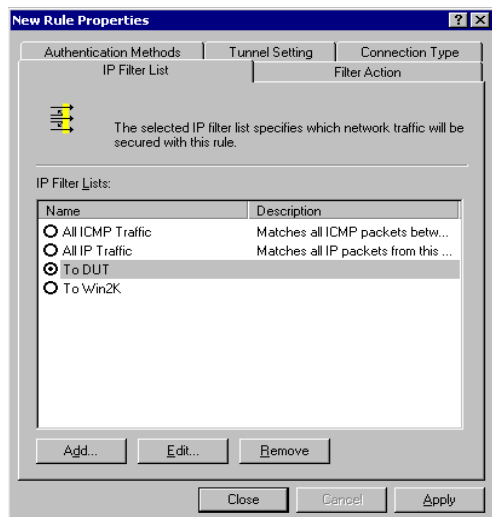


- Click the Filter Action tab. Select the Require Security check box and click Edit.

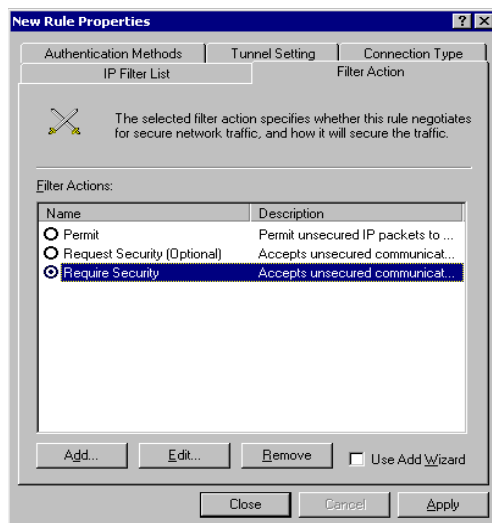


- Click Edit.

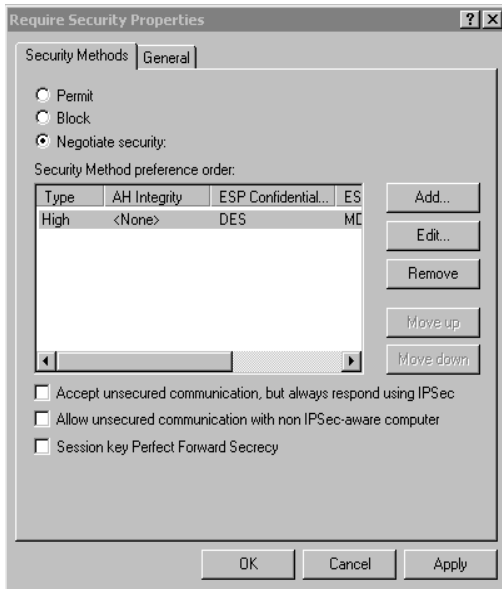


6. Select High [ESP], then click OK and OK to go back to the Filter Action.

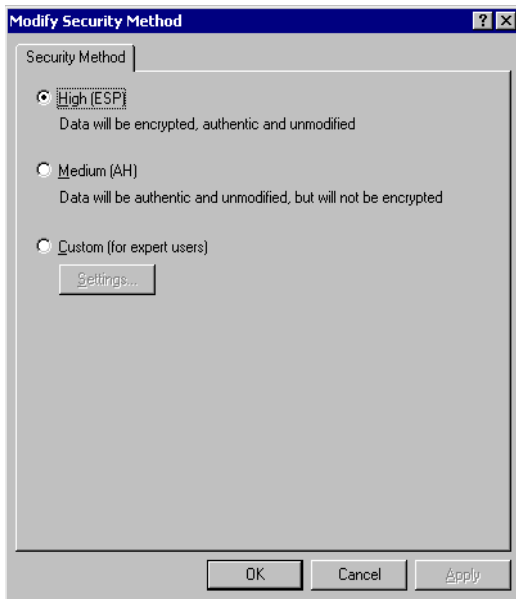


7. Click the Tunnel Setting tab, then type the DUT WAN IP address.

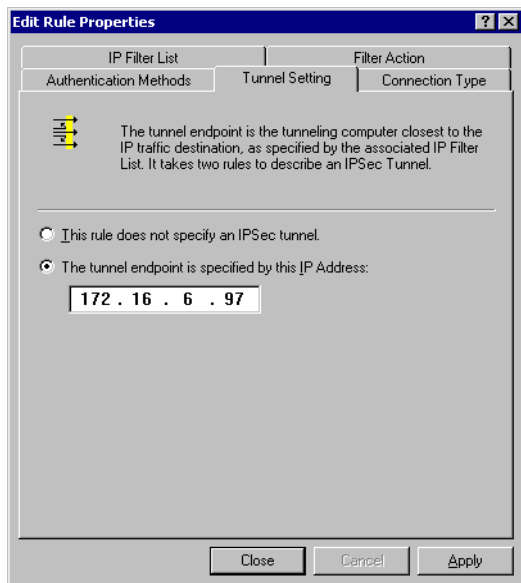

8. Click the Authentication Methods tab. Click Edit. Select the Use this string...(preshared key) check box, then type 12345678.

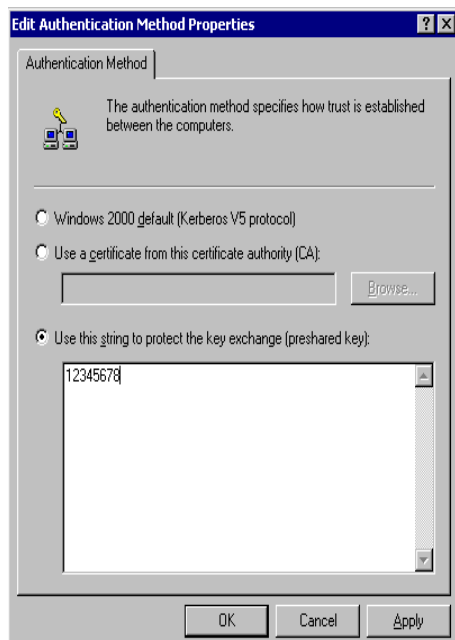


9. Click OK, then close the window and go back to the DUT to Win2K properties.

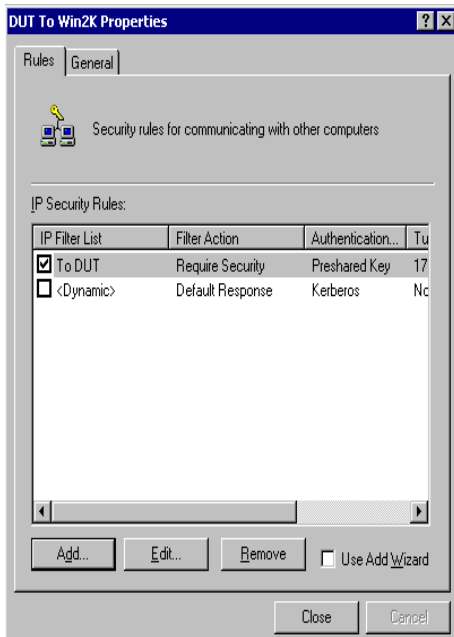


Create an IP Filter Called To Win2K

1. Click Add. Type To Win2K and click Add.

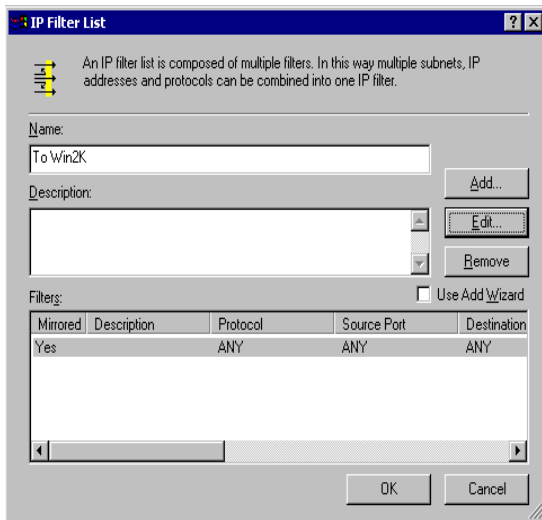


2. Type the Source IP address and the Destination IP address.

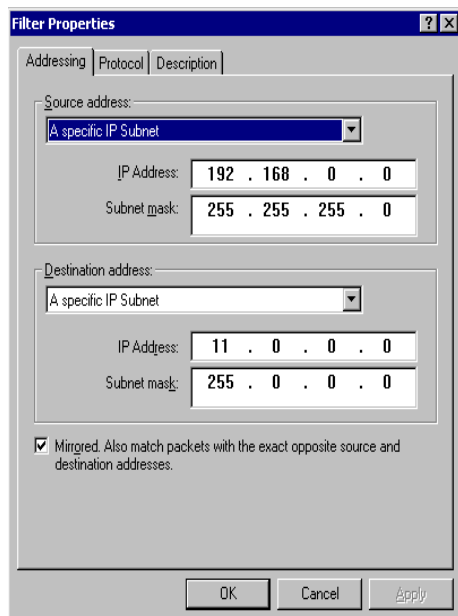

The **Filter Properties** dialog box has three tabs: **Addressing**, **Protocol**, and **Description**. The **Addressing** tab is active. It contains two sections: **Source address:** and **Destination address:**. Each section has a dropdown menu set to "A specific IP Subnet", an **IP Address** field, and a **Subnet mask** field. The Source IP Address is 192 . 168 . 0 . 0 and the Source Subnet mask is 255 . 255 . 255 . 0. The Destination IP Address is 11 . 0 . 0 . 0 and the Destination Subnet mask is 255 . 0 . 0 . 0. At the bottom, there is a checkbox labeled "Mirrored. Also match packets with the exact opposite source and destination addresses." which is checked. At the very bottom are **OK**, **Cancel**, and **Apply** buttons.

3. Click OK, then close the window.

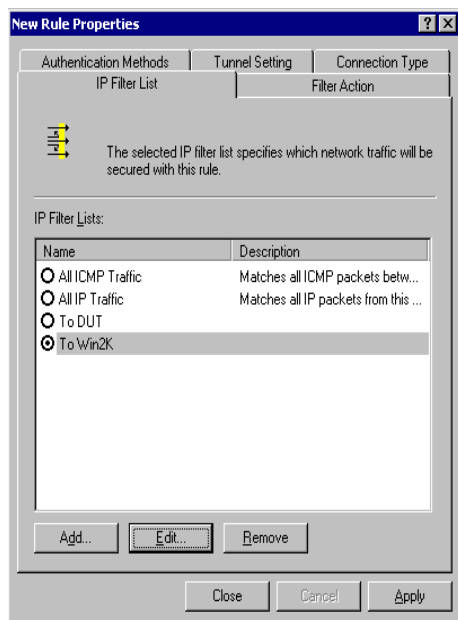


The **New Rule Properties** dialog box has three tabs: **Authentication Methods**, **Tunnel Setting**, and **Connection Type**. The **Authentication Methods** tab is active. It has two sub-tabs: **IP Filter List** and **Filter Action**. The **IP Filter List** sub-tab is active. It shows a list of IP Filter Lists with a description: "The selected IP filter list specifies which network traffic will be secured with this rule." Below this is a table of IP Filter Lists:


Name	Description
<input type="radio"/> All ICMP Traffic	Matches all ICMP packets between...
<input type="radio"/> All IP Traffic	Matches all IP packets from this ...
<input type="radio"/> To DUT	
<input checked="" type="radio"/> To Win2K	

At the bottom of the table are **Add...**, **Edit...**, and **Remove** buttons. At the very bottom of the dialog are **Close**, **Cancel**, and **Apply** buttons.


4. Click the Filter Action tab. Select the Require Security check box and click Edit.

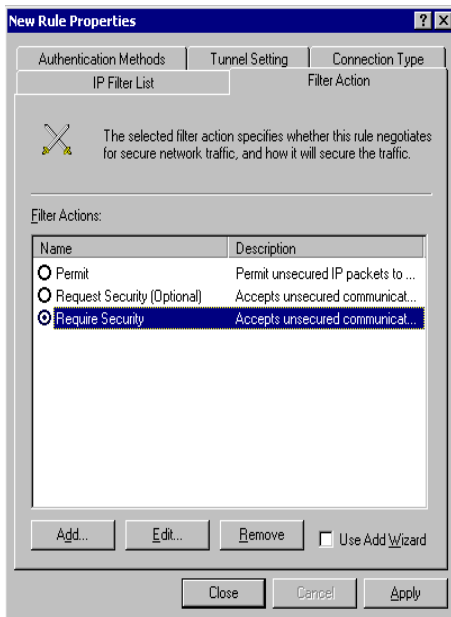


5. Click Edit.

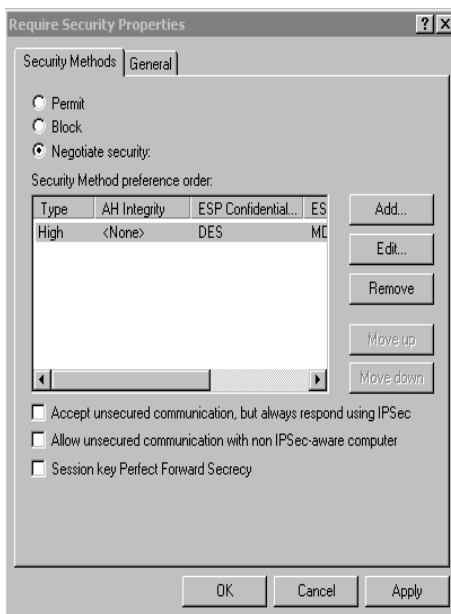


6. Select High [ESP], then click OK. Click OK to return to the Filter Action tab.

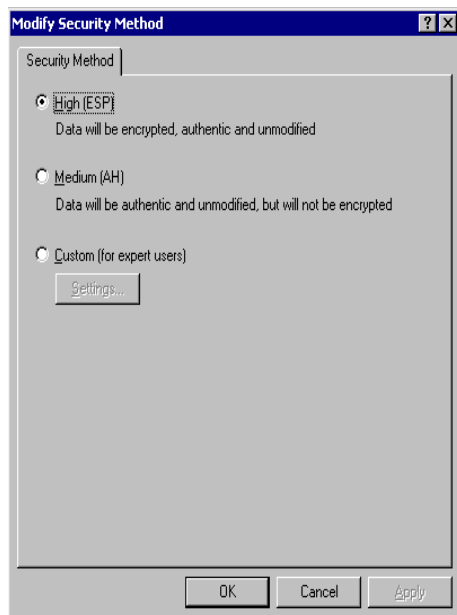


7. Click the Tunnel Setting tab, then type the Win2K WAN IP address.

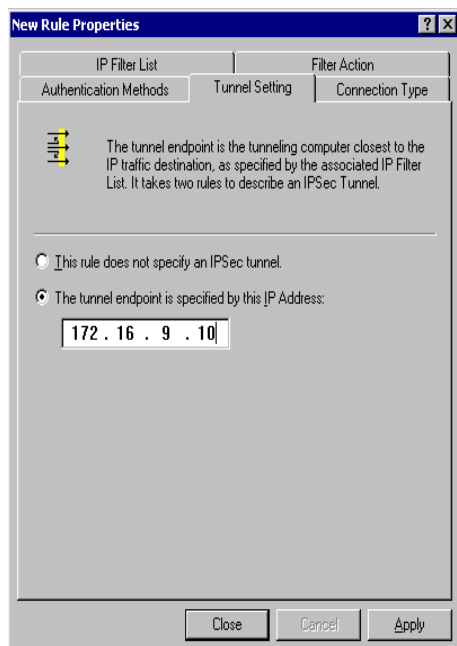

8. Click Authentication Methods and click Edit. Select the Use this string...(preshared key) check box, then type 12345678.

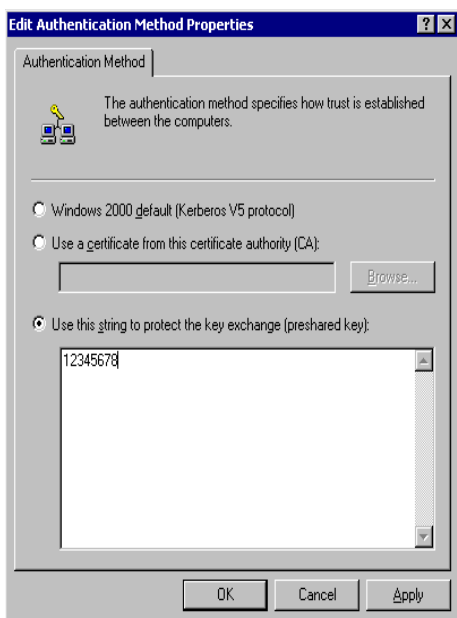


9. Click OK, then close the window to return to the DUT to Win2K properties.

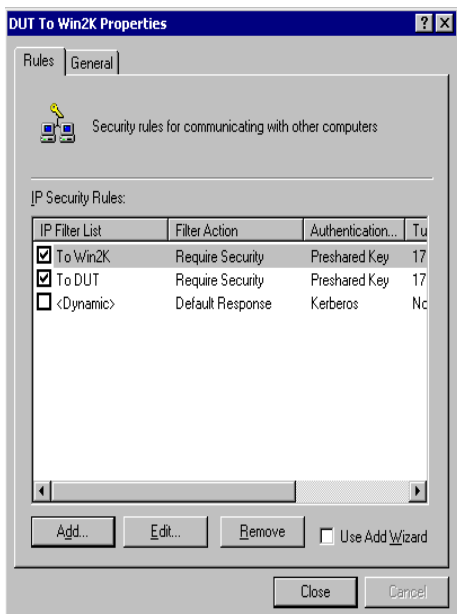


Configure the General Properties


1. Click General.

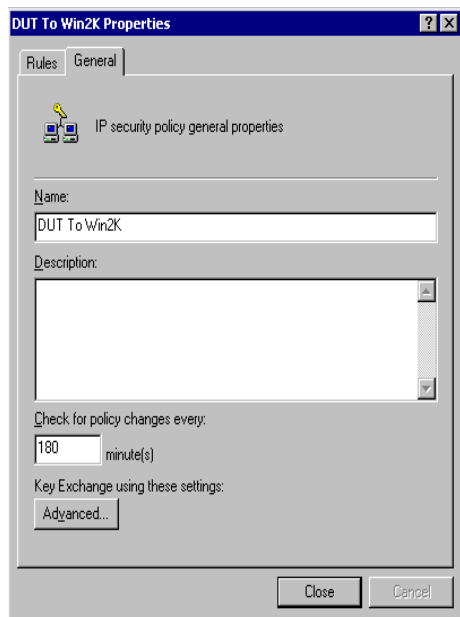


2. Click Advanced.

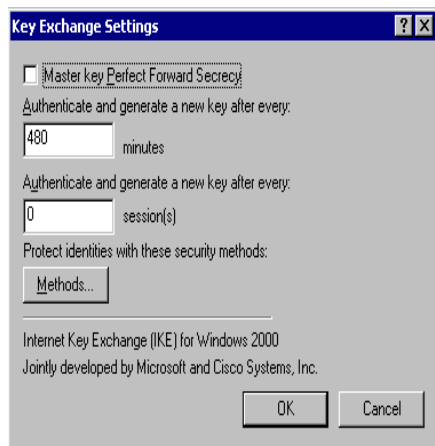


3. Click Methods.

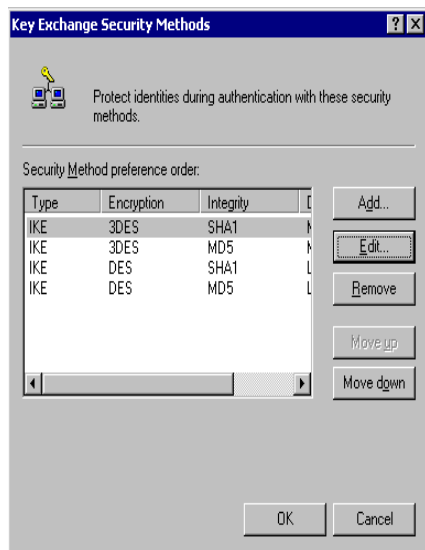


- Click Edit, select Integrity Algorithm SHA1 and Encryption algorithm 3DES, DH Low. Click OK, then OK again. Close the window.

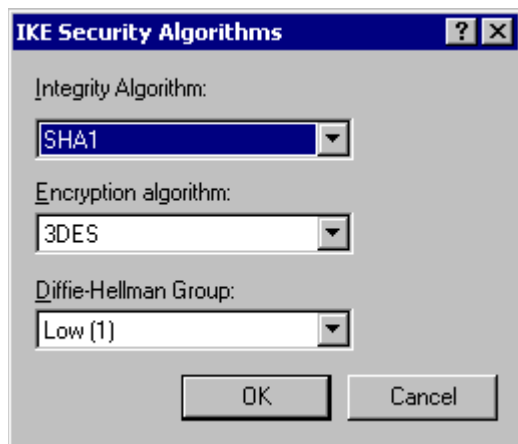

- Right-click DUT to Win2K Policy and then click Assign to assign the Policy.

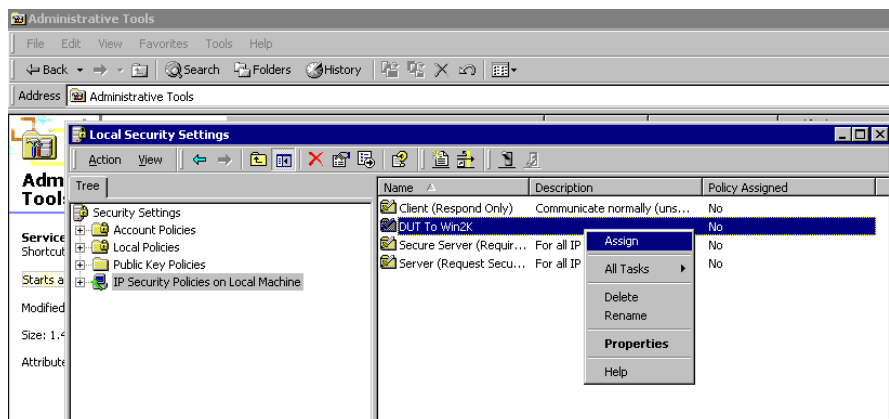

Configure the FVL328 IKE policy

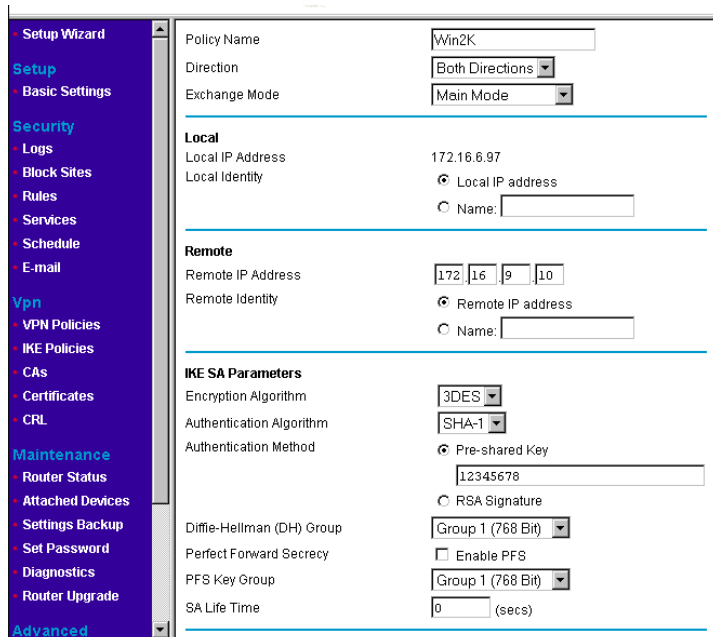

Configure the FVL328 VPN policy

Setup Wizard

Setup

- Basic Settings
- Security
 - Logs
 - Block Sites
 - Rules
 - Services
 - Schedule
 - E-mail
- VPN
 - VPN Policies
 - IKE Policies
 - CAs
 - Certificates
 - CRL
- Maintenance
 - Router Status
 - Attached Devices
 - Settings Backup
 - Set Password
 - Diagnostics
 - Router Upgrade
- Advanced

Policy Name:

IKE policy:

Remote VPN Gateway:

SA Life Time: (Seconds)
 (Kbytes)

Traffic Selector

Local IP:

Start IP address:

Finish IP address:

Subnet Mask:

Remote IP:

Start IP address:

Finish IP address:

Subnet Mask:

AH Configuration

☐ Enable Authentication Authentication Algorithm:


ESP Configuration

☒ Enable Encryption Encryption Algorithm:


☒ Enable Authentication Authentication Algorithm:

[illegible]


1. Right-click on the SSH icon and click Run Policy Editor.

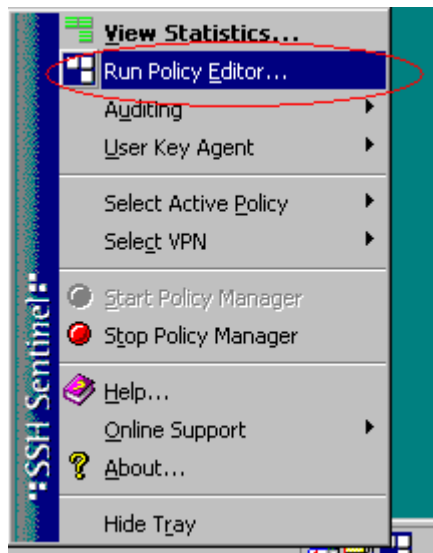


2. Select the Key Management tab.
 - a. Click Add.

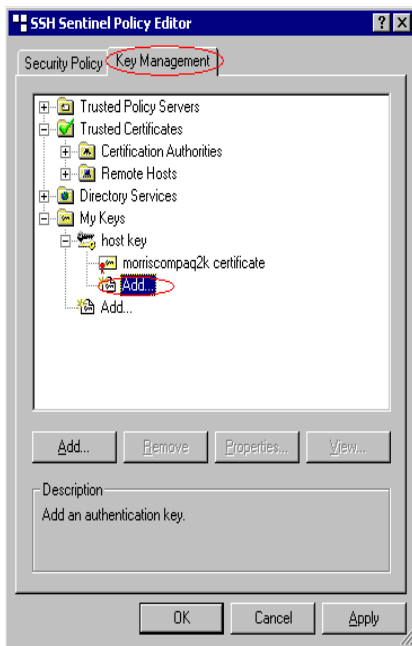


- b. Select Create a preshared key and click Next.

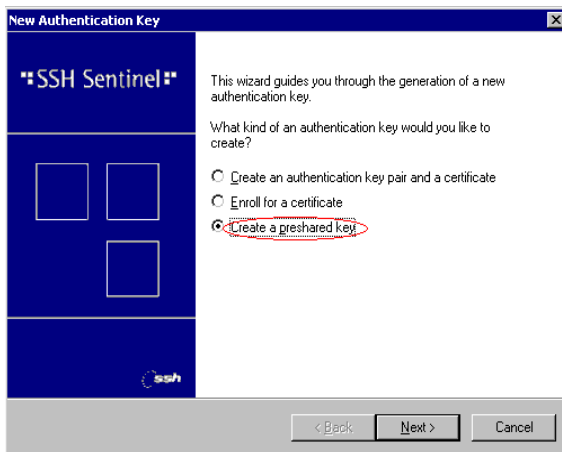


- c. Type the same preshared key as in the FVL328 and click Finish.

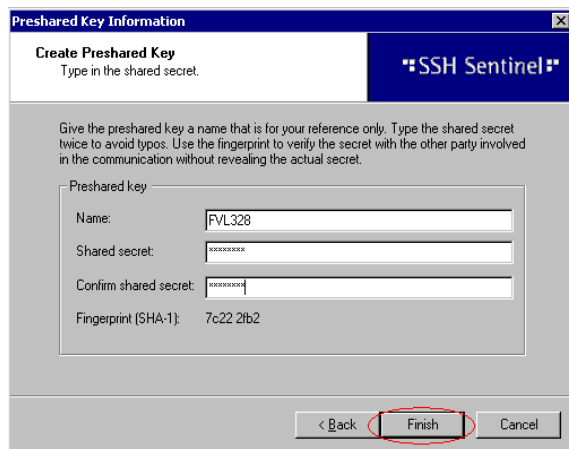


d. You will see the FVL328 under My Keys. Click Apply.

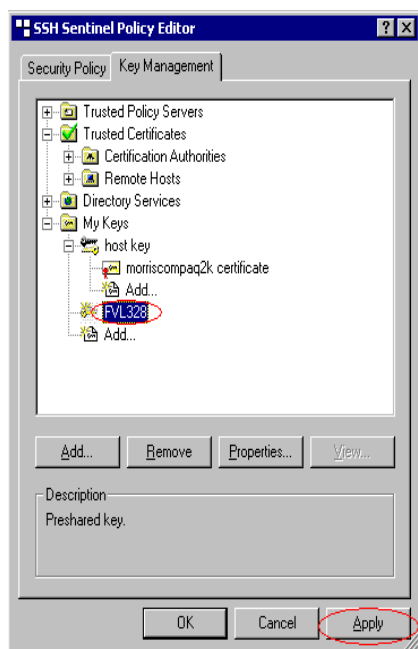


3. Select the Security Policy tab.
 - a. Under VPN Connections, click Add.

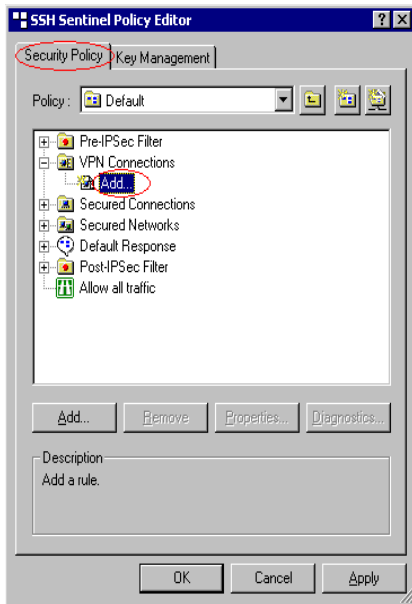


- b. Click the IP button and type the Gateway IP Address. Select FVL328 for the Authentication key. Select the Use legacy proposal check box. Click the "..." button to bring up the Network Editor screen.

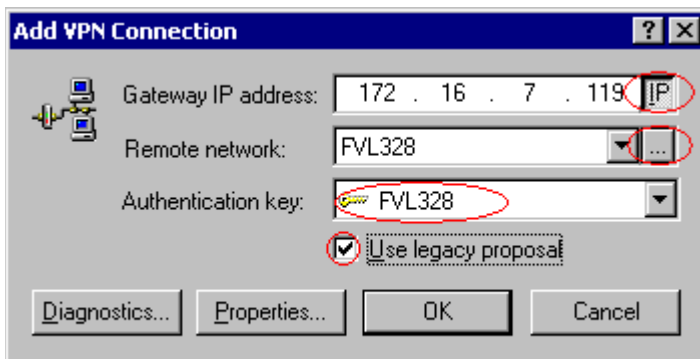


- c. Click New and type a Network name, the remote intranet network IP address and Subnet mask. Click OK.

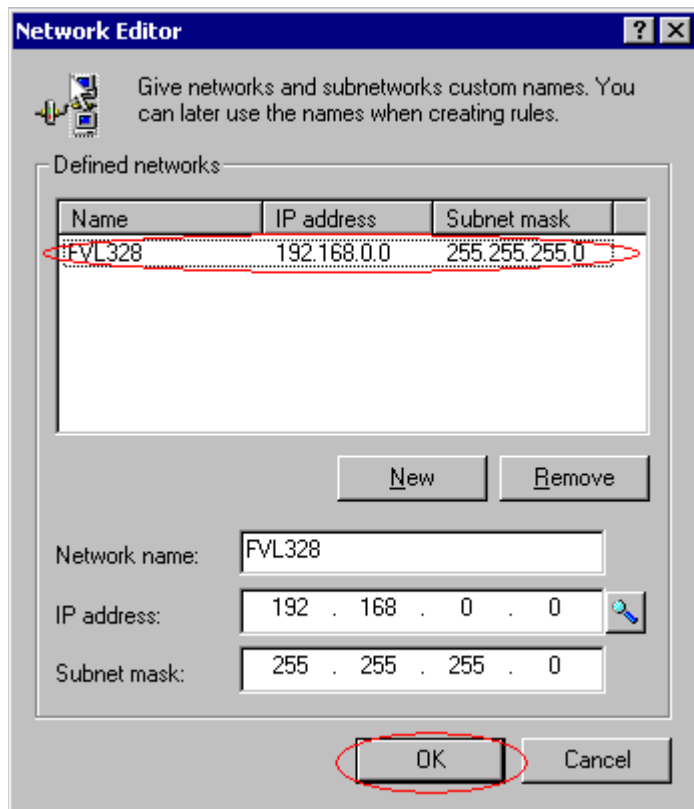


- d. Click Properties and check the VPN policy settings.

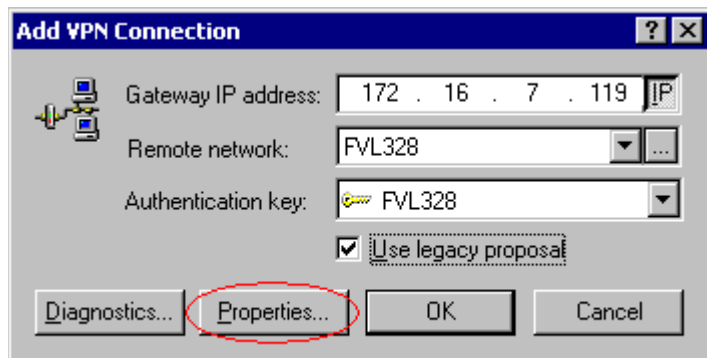


- e. Click Settings.

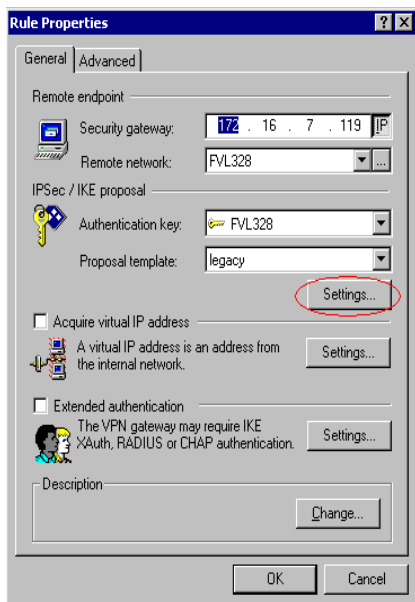


f. Configure the settings below, then click OK. Click OK, and then OK again.

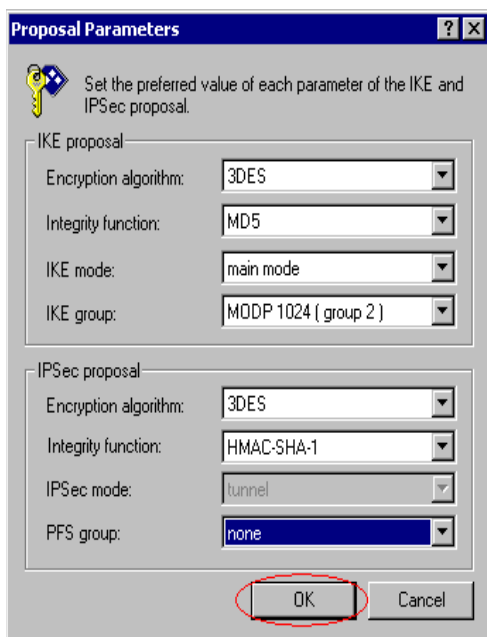

g. Click Apply.

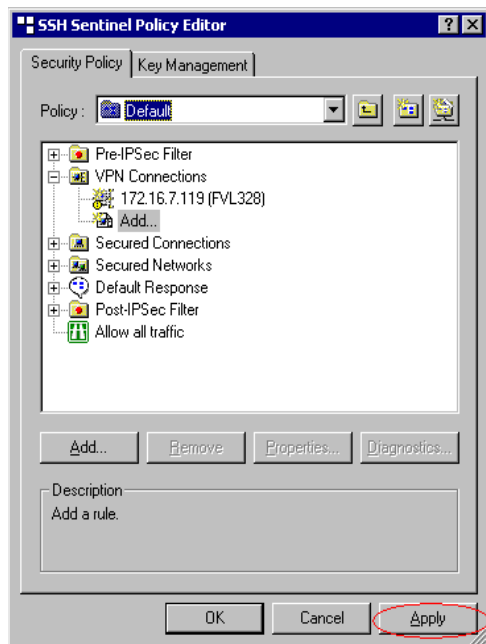

4. Right-click on the icon, click Select VPN, and choose the one you just configured.

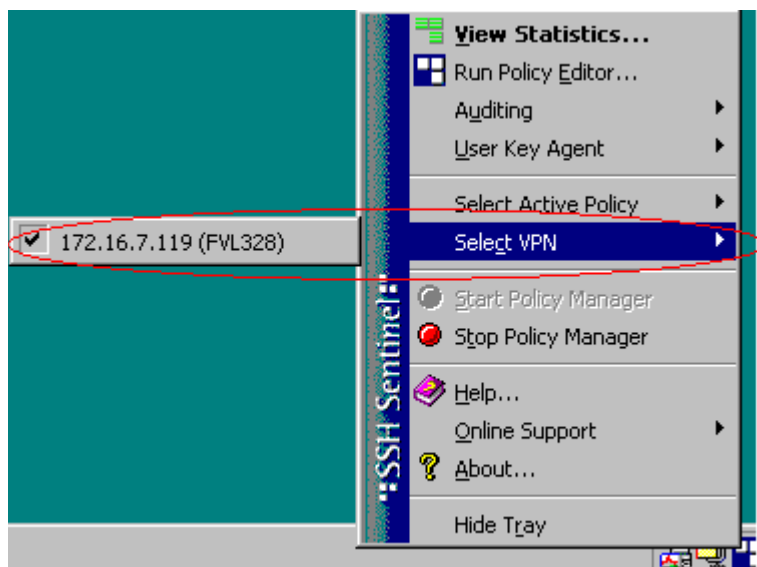

Create the FVL328 IKE Policy

General

Policy Name:

Direction/Type:

Exchange Mode:

Local

Local Identity: ☒ Local IP address

☐ Name:

Remote

Remote Identity: ☒ Remote IP address

☐ Name:

IKE SA Parameters

Encryption Algorithm:

Authentication Algorithm:

Authentication Method: ☒ Pre-shared Key

☐ RSA Signature

Diffie-Hellman (DH) Group:

SA Life Time: (secs)

Create the FVL328 VPN Policy

Policy Name:

IKE policy:

Remote VPN Endpoint:

SA Life Time: (Seconds)

(Kbytes)

☐ IPsec PFS

PFS Key Group:

Traffic Selector

Local IP:

Start IP address:

Finish IP address:

Subnet Mask:

Remote IP:

Start IP address:

Finish IP address:

Subnet Mask:

AH Configuration

☐ Enable Authentication

Authentication Algorithm:

ESP Configuration

☒ Enable Encryption

Encryption Algorithm:

☒ Enable Authentication

Authentication Algorithm:

Ping a PC to Bring Up the Tunnel

Appendix H

NETGEAR VPN Client to NETGEAR FVL328 or FWAG114 VPN Router

Follow these procedures to configure a VPN tunnel from a NETGEAR ProSafe VPN Client to an FVL328. This case study follows the Virtual Private Network Consortium (VPNC) interoperability profile guidelines. The configuration options for the FVS328 and FWAG114 are the same.

Configuration Profile

The configuration in this document follows the addressing and configuration mechanics defined by the VPN Consortium. Gather all the necessary information before you begin the configuration process. Verify whether the firmware is up to date, all of the addresses that will be necessary, and all of the parameters that need to be set on both sides. Check that there are no firewall restrictions.

Table H-1. Summary

VPN Consortium Scenario:		Scenario 1
Type of VPN		PC/Client-to-Gateway
Security Scheme:		IKE with Preshared Secret/Key (not Certificate-based)
Date Tested:		December 2003
Model/Firmware Tested:		
	Gateway	NETGEAR FVL328 firmware v 1.5 or FWAG114 firmware v 2.1
	Client	NETGEAR ProSafe VPN Client v10.1
IP Addressing:		
	Gateway	Static IP address
	Client	Dynamic

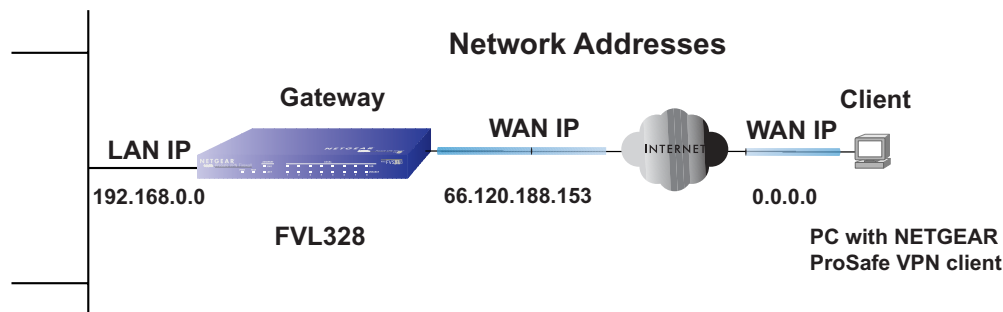


Figure H-1: Addressing and Subnet Used for Examples



Note: Product updates are available on the NETGEAR Web site at www.netgear.com/support/main.asp. VPNC Interoperability guidelines can be found at <http://www.vpnc.org/InteropProfiles>.

Step-By-Step Configuration of FVL328 or FWAG114 Gateway

1. Log in to the FVL328 gateway as in the illustration.

Out of the box, the FVL328 is set for its default LAN address of <http://192.168.0.1> with its default user name of **admin** and default password of **password**. Even though the remainder of this document will refer to the FVL328, the login procedures and configuration menu screens are the same for the FVL328 and the FWAG114.

- Click **IKE Policies** under the VPN menu and click **Add** on the IKE Policies Menu.

IKE Policy Configuration

General

Policy Name: VPNclient

Direction/Type: Remote Access

Exchange Mode: Aggressive Mode

Local

Local Identity Type: Fully Qualified Domain Name

Local Identity Data: FVL328

Remote

Remote Identity Type: Fully Qualified Domain Name

Remote Identity Data: VPNclient

IKE SA Parameters

Encryption Algorithm: 3DES

Authentication Algorithm: SHA-1

Authentication Method: ☒ Pre-shared Key

Pre-shared Key: hr5xb8416aa9r6

☐ RSA Signature (requires Certificate)

Diffie-Hellman (DH) Group: Group 2 (1024 Bit)

SA Life Time: 86400 (secs)

Back Apply Cancel

Figure H-2: NETGEAR FVL328 IKE Policy Configuration

- Enter a descriptive name for the policy in the Policy Name field. This name is not supplied to the remote VPN endpoint. It is used to help you manage the IKE policies. In our example, we used **VPNclient** as the Policy Name.
- From the Direction/Type drop-down box, select **Remote Access**.
- From the Exchange Mode drop-down box, select **Aggressive Mode**. This will also be selected in the NETGEAR ProSafe VPN Client My Identity ID Type fields, as seen in [“Security Policy” on page H-10](#).
- From the Local Identity drop-down box, select **Fully Qualified Domain Name** (the actual WAN IP address of the FVL328 will also be used in the Connection ID Type fields of the NETGEAR ProSafe VPN Client as seen in [“Security Policy Editor New Connection” on page H-8](#)).

- For this example we typed **FVL328** in the Local Identity Data field.
- From the Remote Identity drop-down box, select **Fully Qualified Domain Name**.
- Type **VPNclient** in the Remote Identity Data. This will also be entered in the NETGEAR ProSafe VPN Client My Identity ID Type fields, as seen in [“My Identity” on page H-9](#).
- From the Encryption Algorithm drop-down box, select **3DES**. This will also be selected in the NETGEAR ProSafe VPN Client Security Policy Authentication Phase 1 Proposal 1 Encrypt Alg field, as seen in [“Connection Security Policy Authentication \(Phase 1\)” on page H-11](#).
- From the Authentication Algorithm drop-down box, select **SHA-1**. This will also be selected in the NETGEAR ProSafe VPN Client Security Policy Authentication Phase 1 Proposal 1 Hash Alg field, as seen in [“Connection Security Policy Authentication \(Phase 1\)” on page H-11](#).
- From the Authentication Method radio button, select **Pre-shared Key**. This will also be selected in the NETGEAR ProSafe VPN Client Security Policy Authentication Phase 1 Proposal 1 Authentication Method field, as seen in [“Connection Security Policy Authentication \(Phase 1\)” on page H-11](#).
- In the Pre-Shared Key field, type **hr5xb84l6aa9r6**. You must make sure the key is the same for both the FVL328 and the NETGEAR VPN Client. This will also be selected in the NETGEAR ProSafe VPN Client Security Policy Authentication Phase 1 Proposal 1 Encrypt Alg field, as seen in [“Connection Identity Pre-Shared Key” on page H-10](#).
- From the Diffie-Hellman (DH) Group drop-down box, select **Group 2 (1024 Bit)**. This will also be selected in the NETGEAR ProSafe VPN Client Security Policy Authentication Phase 1 Proposal 1 Key Group field, as seen in [“Connection Security Policy Authentication \(Phase 1\)” on page H-11](#).
- In the SA Life Time field, type **86400**.

Click **Apply**. This will bring you back to the IKE Policies Menu. The FVL328 IKE Policy is now displayed in the IKE Policies page.

- Click the **VPN Policies** link under the VPN category on the left side of the main menu. This will take you to the VPN Policies Menu page. Click **Add Auto Policy**. This will open a new screen titled VPN – Auto Policy.

VPN - Auto Policy

General

Policy Name:

IKE policy:

Remote VPN Endpoint: Address Type: Address Data:

SA Life Time: (Seconds) (Kbytes)

☒ IPsec PFS PFS Key Group:

Traffic Selector

Local IP: Subnet address Start IP address: Finish IP address: Subnet Mask:

Remote IP: Single address Start IP address: Finish IP address: Subnet Mask:

AH Configuration

☐ Enable Authentication Authentication Algorithm:

ESP Configuration

☒ Enable Encryption Encryption Algorithm:

☒ Enable Authentication Authentication Algorithm:

☒ NETBIOS Enable

Figure H-3: NETGEAR FVL328 VPN – Auto Policy General settings

- Enter a unique name to identify this policy. This name is not supplied to the remote VPN endpoint. In our example, we use **VPNclient** as the Policy Name.
- From the IKE policy drop-down box, select **VPNclient** which is the IKE Policy that was set up in the earlier step.

- From the Remote VPN Endpoint Address Type drop-down box, select **IP Address**.
- Type **0.0.0.0** as the Address Data of the client because we are assuming the remote PC will have a dynamically assigned IP address. This will also be entered in the NETGEAR ProSafe VPN Client Internal Network IP Address field, as seen in [“My Identity” on page H-9](#).
- Type **86400** in the SA Life Time (Seconds) field.
- Type **0** in the SA Life Time (Kbytes) field.
- Check the **IPSec PFS** check box to enable Perfect Forward Secrecy. This will also be entered in the NETGEAR ProSafe VPN Client Security Policy Enable Perfect Forward Secrecy check box, as seen in [“Security Policy” on page H-10](#).
- From the PFS Key Group drop-down box, select **Group 2 (1024 Bit)**. This will also be entered in the NETGEAR ProSafe VPN Client Security Policy PFS Key Group drop-down selection box, as seen in [“Security Policy” on page H-10](#).
- From the Traffic Selector Local IP drop-down box, select **Subnet addresses**. This will also be entered in the NETGEAR ProSafe VPN Client Connection Remote Party Identity and Addressing ID Type field, as seen in [“Security Policy Editor New Connection” on page H-8](#).
- Type the starting LAN IP Address of the FVL328 in the Local IP Start IP Address field. For this example, we used **192.168.0.0** which is the default LAN IP address of the FVL328. This will also be entered in the NETGEAR ProSafe VPN Client Connection Remote Party Identity and Addressing Subnet field, as seen in [“Security Policy Editor New Connection” on page H-8](#).
- Type the LAN Subnet Mask of the FVL328 (**255.255.255.0** in our example) in the Local IP Subnet Mask field. This will also be entered in the NETGEAR ProSafe VPN Client Connection Remote Party Identity and Addressing Mask field, as seen in [“Security Policy Editor New Connection” on page H-8](#).
- From the Traffic Selector Remote IP drop-down box, select **Single addresses**.
- Type **0.0.0.0** as the start IP Address of the in the Remote IP Start IP Address field because we are assuming the remote PC will have a dynamically assigned IP address. This will also be entered in the NETGEAR ProSafe VPN Client My Identity Internal Network IP Address field, as seen in [“My Identity” on page H-9](#).
- Select the **Enable Encryption** check box. This will also be selected in the NETGEAR ProSafe VPN Client Security Policy Key Exchange (Phase 2) Encapsulation Protocol (ESP) check box, as seen in [“Connection Security Policy Key Exchange \(Phase 2\)” on page H-12](#).

- From the ESP Configuration Encryption Algorithm drop-down box, select **3DES**. This will also be entered in the NETGEAR ProSafe VPN Client Security Policy Key Exchange (Phase 2) Encrypt Alg field, as seen in [“Connection Security Policy Key Exchange \(Phase 2\)” on page H-12](#).
- Select **Enable Authentication** in the ESP Configuration Enable Authentication check box.
Note: Do not confuse this with the Authentication Protocol (AH) option. Using the AH option will prevent clients behind a home NAT router from connecting.
- From the ESP Configuration Authentication Algorithm drop-down box, select **SHA-1**. This will also be entered in the NETGEAR ProSafe VPN Client Security Policy Key Exchange (Phase 2) Hash Alg field, as seen in [“Connection Security Policy Key Exchange \(Phase 2\)” on page H-12](#).
- Select the **NETBIOS Enable** check box to enable networking features like Windows Network Neighborhood.

Click **Apply** to save your changes. You will be taken back to the VPN Policies Menu page.

4. When the screen returns to the VPN Policies, make sure the Enable check box is selected. Click **Apply** to save your changes.

Step-By-Step Configuration of the NETGEAR VPN Client B



Note: The NETGEAR ProSafe VPN Client has the ability to “Import” a predefined configuration profile. The FVL328.SPD file on the NETGEAR ProSafe VPN Client *Resource CD (230-10007-01)* includes all the settings identified in this procedure.

Whenever importing policy settings, you should first export any existing settings you may have configured to prevent the new imported settings from replacing an existing working configuration.

To import this policy, use the Security Policy Editor File menu to select Import Policy, and select the FVL328.SPD file at D:\Software\Policies where D is the drive letter of your CD-ROM drive.

This procedure describes linking a remote PC and a LAN. The LAN will connect to the Internet using an FVL328 with a static IP address. The PC can be directly connected to the Internet through dialup, cable or DSL modem, or other means, and we will assume it has a dynamically assigned IP address.

1. Install the NETGEAR VPN Client Software on the PC.



Note: Before installing the NETGEAR ProSafe VPN Client software, be sure to turn off any virus protection or firewall software you may be running on your PC.

- You may need to insert your Windows CD to complete the installation.
- Reboot your PC after installing the client software.

2. Configure the Connection Network Settings.


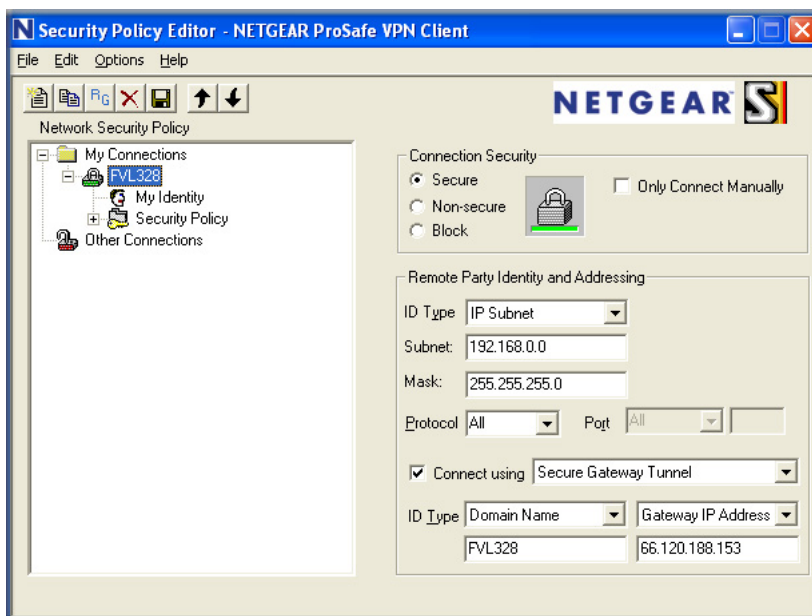


Figure H-4: Security Policy Editor New Connection

- a. Run the Security Policy Editor program and create a VPN Connection.

Figure H-5: Security Policy Editor Options menu

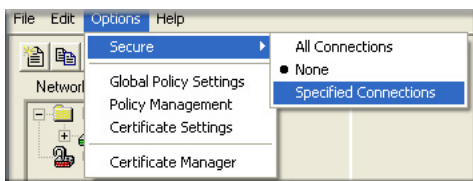

Note: If the configuration settings on this screen are not available for editing, go to the Options menu, select Secure, and Specified Options to enable editing these settings.

From the Edit menu of the Security Policy Editor, click **Add**, then **Connection**. A “New Connection” listing appears. Rename the “New Connection” to **FVL328**.

- b. ensure that the following settings are configured:
 - In the Connection Security box, Secure is selected.
 - In the Protocol menu, All is selected.
 - The Connect using Secure Gateway Tunnel check box is selected.
- c. In this example, select IP Subnet as the ID Type, **192.168.0.0** in the Subnet field (the Subnet address is the LAN IP Address of the FVL328 with 0 as the last number), and **255.255.255.0** in the Mask field, which is the LAN Subnet Mask of the FVL328.
- d. In the ID Type menus, select **Domain Name** and **Gateway IP Address**. Enter **FVL328** in the Domain Name field. In this example, **66.120.188.153** would be used for the Gateway IP Address, which is the static IP address for the FVL328 WAN port.

3. Configure the Connection Identity Settings.

- a. In the Network Security Policy list, click the My Identity subheading.

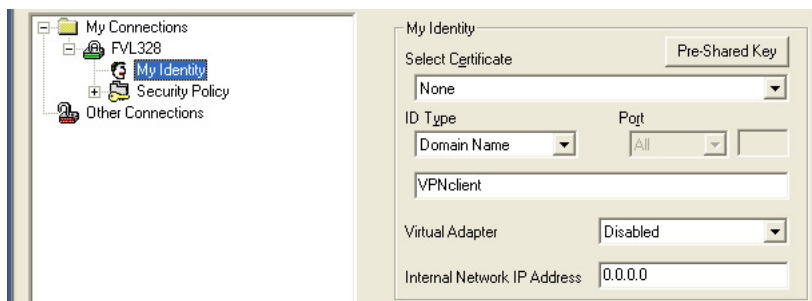


Figure H-6: My Identity

In this example, select Domain Name as the ID Type, and enter **VPNclient**. Also, accept the default Internal Network IP Address of 0.0.0.0.


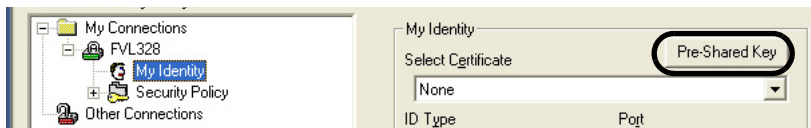


Figure H-7: My Identity Pre-Shared Key

- b. Click **Pre-Shared Key**.

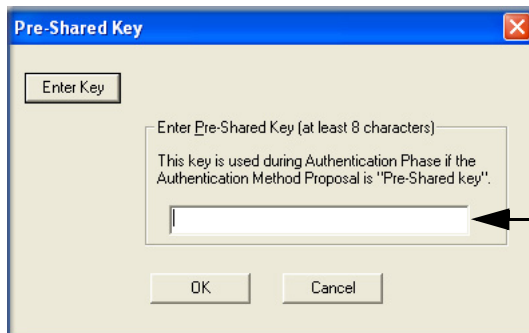

In this example, enter this pre-shared key in this field:
hr5xb84l6aa9r6

Figure H-8: Connection Identity Pre-Shared Key

- c. Enter **hr5xb84l6aa9r6** which is the same Pre-Shared Key entered in the FVL328.
 - d. Click **OK**.
4. **Configure the Connection Identity Settings.**
 - a. In the Network Security Policy list, click the Security Policy subheading.

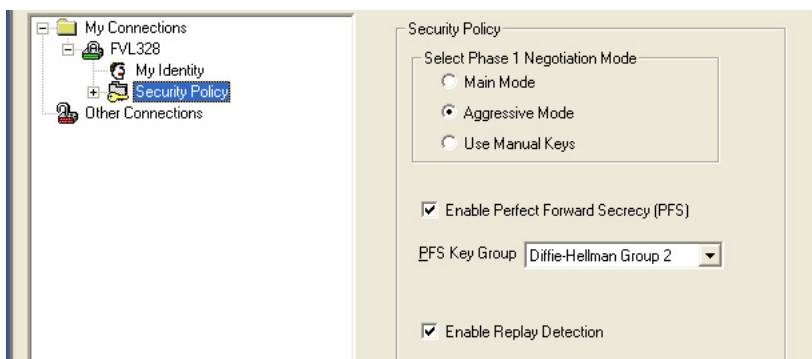


Figure H-9: Security Policy

- b. For this example, ensure that the following settings are configured:
 - In the Select Phase 1 Negotiation Mode menu, select **Aggressive Mode**.
 - Select the **Enable Perfect Forward Secrecy (PFS)** check box.
 - In the PFS Key Group drop-down list, **Diffie-Hellman Group 2**.
 - Select the Enable Replay Detection check box.

5. Configure the Connection Security Policy

In this step, you will provide the authentication (IKE Phase 1) settings, and the key exchange (Phase 2) settings. The setting choices in this procedure follow the VPNC guidelines.

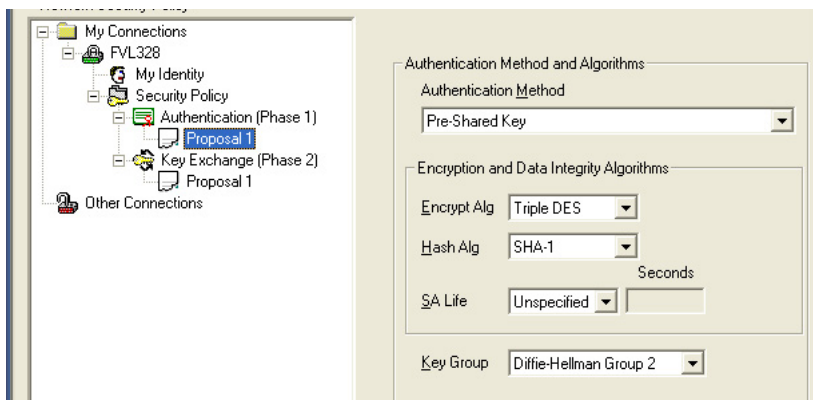


Figure H-10: Connection Security Policy Authentication (Phase 1)

- a. Configure the Authentication (Phase 1) Settings.
 - Expand the Security Policy heading, then expand the Authentication (Phase 1) heading, and click on Proposal 1.
 - For this example, ensure that the following settings are configured:
 - In the Encrypt Alg menu, select **Triple DES**.
 - In the Hash Alg, select **SHA-1**.
 - In the SA Life, select Unspecified.
 - In the Key Group menu, select **Diffie-Hellman Group 2**.

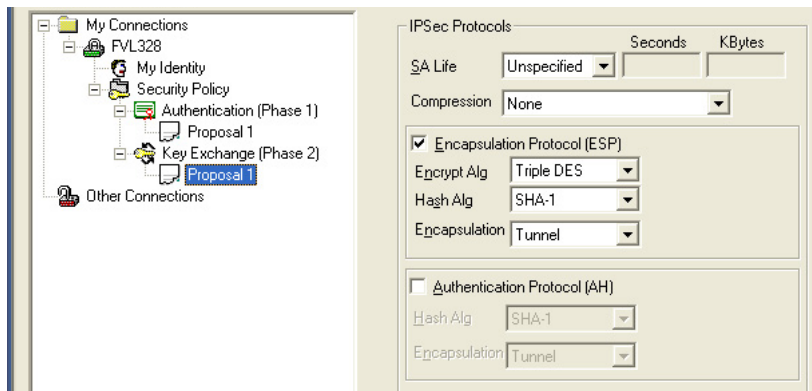


Figure H-11: Connection Security Policy Key Exchange (Phase 2)

- b. Configure the Key Exchange (Phase 2).
- Expand the Key Exchange (Phase 2) heading, and click on Proposal 1.
 - For this example, ensure that the following settings are configured:
 - In the SA Life menu, select **Unspecified**.
 - In the Compression menu, select **None**.
 - Check the **Encapsulation Protocol (ESP)** check box.
 - In the Encrypt Alg menu, select **Triple DES**.
 - In the Hash Alg, select **SHA-1**.
 - In the Encapsulation menu, select **Tunnel**.

6. Configure the Global Policy Settings.

- a. From the Options menu at the top of the Security Policy Editor window, select **Global Policy Settings**.

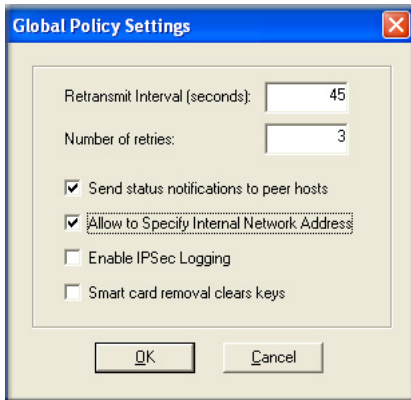


Figure H-12: Security Policy Editor Global Policy Options

- b. Increase the Retransmit Interval period to **45** seconds.
- c. Select the Allow to Specify Internal Network Address check box and click **OK**.

7. Save the VPN Client Settings.

From the File menu at the top of the Security Policy Editor window, select Save.

After you have configured and saved the VPN client information, your PC will automatically open the VPN connection when you attempt to access any IP addresses in the range of the remote VPN router's LAN.



Note: Whenever you make changes to a Security Policy, save them first, then deactivate the security policy, reload the security policy, and finally activate the security policy. This ensures that your new settings will take effect.

Testing the VPN Connection

You can test the VPN connection in several ways:

- From the client PC to the FVL328
- From the FVL328 to the client PC


These procedures are explained below.



Note: Virus protection or firewall software can interfere with VPN communications. Be sure such software is not running on the remote PC with the NETGEAR VPN Client and that the firewall features of the FVL328 are not set in such a way as to prevent VPN communications.

From the Client PC to the FVL328

To check the VPN Connection, you can initiate a request from the remote PC to the FVL328 by using the “Connect” option of the NETGEAR VPN Client popup menu.

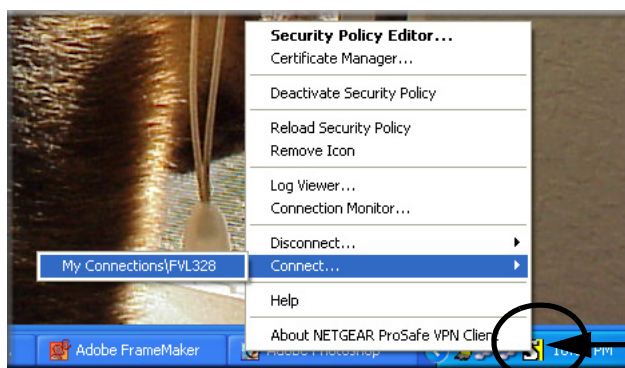

Right-mouse-click on the system tray icon to open the popup menu.

Figure H-13: Connecting the PC to the FVL328 over the VPN tunnel

1. Open the popup menu by right-clicking on the system tray icon.
2. Select **Connect** to open the My Connections list.
3. Choose **FVL328**.

The NETGEAR VPN Client will report the results of the attempt to connect.

Once the connection is established, you can access resources of the network connected to the FVL328.

Another method is to ping from the remote PC to the LAN IP address of the FVL328. To perform a ping test using our example, start from the remote PC:

1. Establish an Internet connection from the PC.
2. On the Windows taskbar, click the Start button, and then click Run.
3. Type `ping -t 192.168.0.1` and click OK.

This will cause a continuous ping to be sent to the first FVL328. After a period of up to two minutes, the ping response should change from “timed out” to “reply.”

To test the connection to a computer connected to the FVL328, simply ping the IP address of that computer.

Once connected, you can open a browser on the remote PC and enter the LAN IP Address of the FVL328, which is `http://192.168.0.1` in this example. After a short wait, you should see the login screen of the FVL328.

From the FVL328 to the Client PC

You can use the FVL328 Diagnostic utilities to test the VPN connection from the FVL328 to the client PC. Run ping tests from the Diagnostics link of the FVL328 main menu.

Monitoring the PC VPN Connection

Information on the progress and status of the VPN client connection can be viewed by opening the NETGEAR VPN Client Connection Monitor or Log Viewer. To launch these functions, click on the Windows Start button, then select Programs, then NETGEAR ProSafe VPN Client, then either the Connection Monitor or Log Viewer.

The Log Viewer screen for a successful connection is shown below:

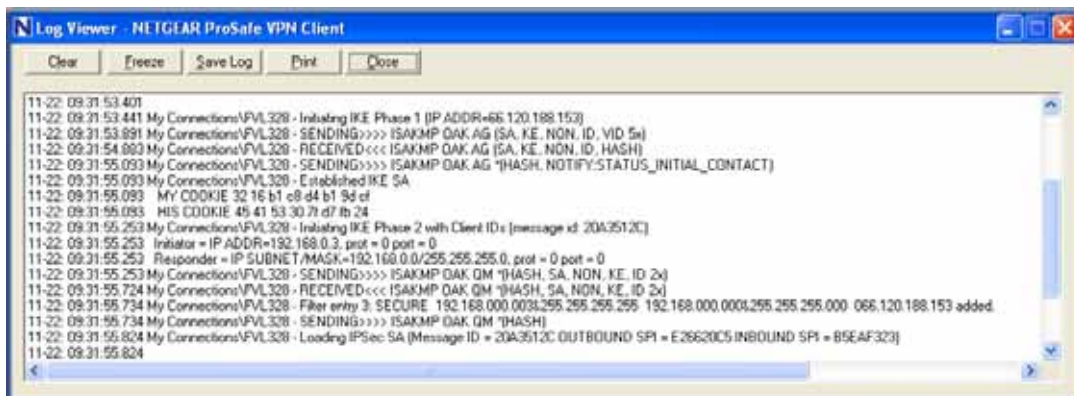


Figure H-14: Log Viewer screen

A sample Connection Monitor screen for a different connection is shown below:

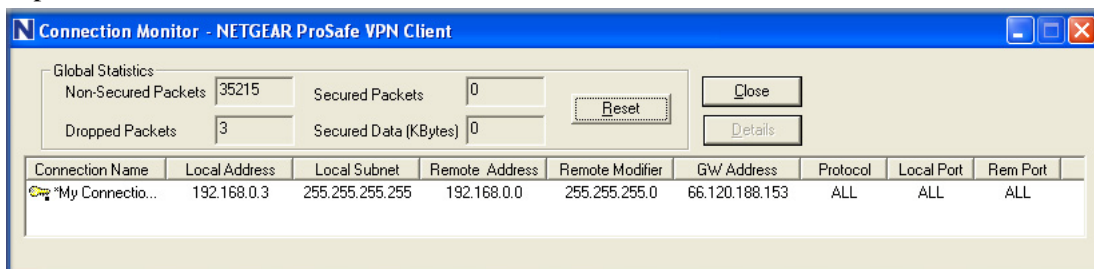


Figure H-15: Connection Monitor screen

In this example the following connection options apply:

- The FVL328 has a public IP WAN address of 66.120.188.153
- The FVL328 has a LAN IP address of 192.168.0.1
- The VPN client PC is behind a home NAT router and has a dynamically assigned address of 192.168.0.3

While the connection is being established, the Connection Name field in this menu will say “SA” before the name of the connection. When the connection is successful, the “SA” will change to the yellow key symbol shown in the illustration above.

Viewing the FVL328 VPN Status and Log Information

Information on the status of the VPN client connection can be viewed by opening the FVL328 VPN Status screen. To view this screen, click the VPN Status link on the FVL328 main menu.

The FVL328 VPN Status screen for a successful connection is shown below:

VPN Status/Log

```
[2003-11-22 09:39:44]**** SENT OUT SECOND MESSAGE OF AGGR MODE ****
[2003-11-22 09:39:45]**** RECEIVED THIRD MESSAGE OF AGGR MODE ****
[2003-11-22 09:39:45]<POLICY: VPNclient> PAYLOADS: HASH,NOTIFY
[2003-11-22 09:39:45]**** AGGR MODE COMPLETED ****
[2003-11-22 09:39:45][==== IKE PHASE 1 ESTABLISHED====]
[2003-11-22 09:39:45][==== IKE PHASE 2(from 64.175.249.42) START (responder) ===
[2003-11-22 09:39:45]**** RECEIVED FIRST MESSAGE OF QUICK MODE ****
[2003-11-22 09:39:45]**** FOUND IDs,EXTRACE ID INFO ****
[2003-11-22 09:39:45]<Initiator IPADDR=192.168.0.3>
[2003-11-22 09:39:45]<Responder IPADDR=192.168.0.0 MASK=255.255.255.0>
[2003-11-22 09:39:45]**** SENT OUT SECOND MESSAGE OF QUICK MODE ****
[2003-11-22 09:39:45]**** RECEIVED THIRD MESSAGE OF QUICK MODE ****
[2003-11-22 09:39:45]<POLICY: VPNclient> PAYLOADS: HASH
[2003-11-22 09:39:46]**** QUICK MODE COMPLETED ****
[2003-11-22 09:39:46][==== IKE PHASE 2 ESTABLISHED====]
```

IPSec SA

#	SPI	Policy Name	Endpoint	Protocol	Tx (KBytes)	HLifeTime	SLifeTime
1	3693815379	c0a80003	64.175.249.42	ESP	0	28760	28670
2	3797946439	INc0a80003	66.120.188.153	ESP	0	28760	0

IKE SA

#	Policy Name	Endpoint	State	LifeTime in Secs
1	VPNclient	64.175.249.42	SA_MATURE	0

Figure H-16: FVL328 VPN Status screen

VPN Status/Log

```
[2003-11-22 09:39:44]**** SENT OUT SECOND MESSAGE OF AGGR MODE ****
[2003-11-22 09:39:45]**** RECEIVED THIRD MESSAGE OF AGGR MODE ****
[2003-11-22 09:39:45]<POLICY: VPNclient> PAYLOADS: HASH,NOTIFY
[2003-11-22 09:39:45]**** AGGR MODE COMPLETED ****
[2003-11-22 09:39:45][==== IKE PHASE 1 ESTABLISHED====]
[2003-11-22 09:39:45][==== IKE PHASE 2(from 64.175.249.42) START (responder) ===
[2003-11-22 09:39:45]**** RECEIVED FIRST MESSAGE OF QUICK MODE ****
[2003-11-22 09:39:45]**** FOUND IDs,EXTRACE ID INFO ****
[2003-11-22 09:39:45]<Initiator IPADDR=192.168.0.3>
[2003-11-22 09:39:45]<Responder IPADDR=192.168.0.0 MASK=255.255.255.0>
[2003-11-22 09:39:45]**** SENT OUT SECOND MESSAGE OF QUICK MODE ****
[2003-11-22 09:39:45]**** RECEIVED THIRD MESSAGE OF QUICK MODE ****
[2003-11-22 09:39:45]<POLICY: VPNclient> PAYLOADS: HASH
[2003-11-22 09:39:46]**** QUICK MODE COMPLETED ****
[2003-11-22 09:39:46][==== IKE PHASE 2 ESTABLISHED====]
```

Refresh

Clear Log

IPSec SA

#	SPI	Policy Name	Endpoint	Protocol	Tx (KBytes)	HLifeTime	SLifeTime
1	3693815379	c0a80003	64.175.249.42	ESP	0	28760	28670
2	3797946439	INc0a80003	66.120.188.153	ESP	0	28760	0

IKE SA

#	Policy Name	Endpoint	State	LifeTime in Secs
1	VPNclient	64.175.249.42	SA_MATURE	0

Appendix I

NETGEAR VPN Configuration

FVS318 or FVM318 with FQDN to FVL328

This appendix provides a case study on how to configure a VPN tunnel between a NETGEAR FVS318 or FVM318 to a FVL328 using a Fully Qualified Domain Name (FQDN) to resolve the public address of one or both routers. The configurations screens and settings for the FVS318 and FVM318 are the same.

Configuration Template

The configuration in this document follows the addressing and configuration mechanics defined by the VPN Consortium. Gather all the necessary information before you begin the configuration process. Verify whether the firmware is up to date, all of the addresses that will be necessary, and all of the parameters that need to be set on both sides. Check that there are no firewall restrictions.

Table I-1. Summary

VPN Consortium Scenario:		Scenario 1
Type of VPN		LAN-to-LAN or Gateway-to-Gateway (not PC/Client-to-Gateway)
Security Scheme:		IKE with Preshared Secret/Key (not Certificate-based)
Date Tested:		December 2003
Model/Firmware Tested:		
	NETGEAR-Gateway A	FVS318 firmware version A1.4 or FVM318 firmware version 1.1
	NETGEAR-Gateway B	FVL328 with firmware version 1.5 Release 07
IP Addressing:		
	NETGEAR-Gateway A	Fully Qualified Domain Name (FQDN)
	NETGEAR-Gateway B	Static IP address

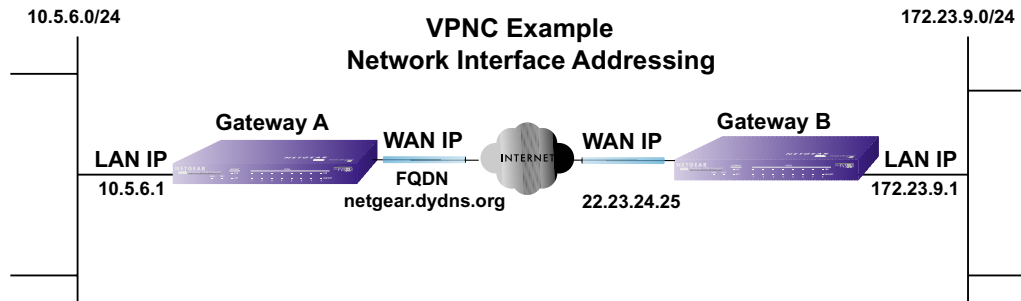


Figure I-1: Addressing and Subnet Used for Examples

Using DDNS and Fully Qualified Domain Names (FQDN)

Many ISPs (Internet Service Providers) provide connectivity to their customers using dynamic instead of static IP addressing. This means that a user's IP address does not remain constant over time, which presents a challenge for gateways attempting to establish VPN connectivity.

A Dynamic DNS (DDNS) service allows a user whose public IP address is dynamically assigned to be located by a host or domain name. It provides a central public database where information (such as email addresses, host names and IP addresses) can be stored and retrieved. Now, a gateway can be configured to use a 3rd party service in lieu of a permanent and unchanging IP address to establish bi-directional VPN connectivity.

To use DDNS, you must register with a DDNS service provider. Example DDNS Service Providers include:

Table I-1. Example DDNS Service Providers

DynDNS	www.dyndns.org
TZO.com	netgear.tzo.com
ngDDNS	ngddns.iego.net

In this example, Gateway A is configured using an example FQDN provided by a DDNS Service provider. In this case we established the hostname **netgear.dyndns.org** for Gateway A using the

DynDNS service. Gateway B will use the DDNS Service Provider when establishing a VPN tunnel.

In order to establish VPN connectivity Gateway A must be configured to use Dynamic DNS, and Gateway B must be configured to use a DNS hostname to find Gateway A provided by a DDNS Service Provider. Again, the following step-by-step procedures assume that you have already registered with a DDNS Service Provider and have the configuration information necessary to set up the gateways.

Step-By-Step Configuration of FVS318 or FVM318 Gateway A

1. Log in to the FVS318 or FVM318 labeled Gateway A as in the illustration.

Out of the box, the FVS318 or FVM318 is set for its default LAN address of <http://192.168.0.1> with its default user name of **admin** and default password of **password**. For this example we will assume you have set the local LAN address as 10.5.6.1 for Gateway A and have set your own password.

2. Click the Dynamic DNS link on the left side of the Settings management GUI.
3. Access the Web site of one of the dynamic DNS service providers whose names appear in the 'Use a dynamic DNS service' list, and register for an account.
For example, for dyndns.org, click the link or go to www.dyndns.org.

Dynamic DNS

Use a dynamic DNS service

☐ None

☒ DynDNS.org [Click here for information](#)

☐ TZO.com [Click here for free trial](#)

☐ Oray.net [Click here for information](#)

DynDNS

Host and Domain Name

example: yourname.dyndns.org

User Name

Password

☐ Use wildcards

Figure I-2: Dynamic DNS Setup menu

4. Select the Use a dynamic DNS service radio button for the service you are using. In this example we are using www.DynDNS.org as the service provider.
 - Type the Host Name that your dynamic DNS service provider gave you. The dynamic DNS service provider may call this the domain name. In this example we are using dyndns.org as the domain suffix.
 - Type the User Name for your dynamic DNS account. In this example we used netgear as the Host Name. This means that the complete FQDN we are using is netgear.dyndns.org and the Host Name is “netgear.”
 - Type the Password (or key) for your dynamic DNS account.
5. Click Apply to save your configuration.



Note: The router supports only basic DDNS and the login and password may not be secure. If your ISP assigns a private WAN IP address such as 192.168.x.x or 10.x.x.x, the dynamic DNS service will not work because private addresses will not be routed on the Internet.

6. Click on the VPN Settings link on the left side of the Settings management GUI.

VPN Settings

	#	Enable	Connection Name	Local IPSec ID	Remote IPSec ID
<input checked="" type="radio"/>	1	-	-	-	-
<input type="radio"/>	2	-	-	-	-
<input type="radio"/>	3	-	-	-	-
<input type="radio"/>	4	-	-	-	-
<input type="radio"/>	5	-	-	-	-
<input type="radio"/>	6	-	-	-	-
<input type="radio"/>	7	-	-	-	-
<input type="radio"/>	8	-	-	-	-

Figure I-3: NETGEAR FVS318 VPN Settings Pre-Configuration

7. Click the VPN Settings link on the left side of the Settings management GUI. Click the radio button of first available VPN leg (all 8 links are available in the example). Click the Edit button below. This will take you to the VPN Settings – Main Mode Menu.

VPN Settings - Main Mode

Connection Name	toFVL328
Local IPSec Identifier	netgear.dyndns.org
Remote IPSec Identifier	22.23.24.25
Tunnel can be accessed from	a subnet of local address ▼
Local LAN start IP Address	10 . 5 . 6 . 0
Local LAN finish IP Address	0 . 0 . 0 . 0
Local LAN IP Subnetmask	255 . 255 . 255 . 0
Tunnel can access	a subnet of remote address ▼
Remote LAN start IP Address	172 . 23 . 9 . 0
Remote LAN finish IP Address	0 . 0 . 0 . 0
Remote LAN IP Subnetmask	255 . 255 . 255 . 0
Remote WAN IP or FQDN	22.23.24.25
Secure Association	Main Mode ▼

Figure I-4: NETGEAR FVS318 VPN Settings (part 1) – Main Mode

- In the Connection Name box, enter in a unique name for the VPN tunnel to be configured between the NETGEAR devices. For this example we have used **toFVL328**.
- Enter a Local IPSec Identifier name for the NETGEAR FVS318 Gateway A. This name must be entered in the other endpoint as Remote IPSec Identifier. In this example we used **netgear.dyndns.org** (the FQDN) as the local identifier.
- Enter a Remote IPSec Identifier name for the remote NETGEAR FVL328 Gateway B. This name must be entered in the other endpoint as Local IPSec Identifier. In this example we used **22.23.24.25** as the remote identifier.
- Choose a subnet from local address from the Tunnel can be accessed from pull-down menu.
- Type the starting LAN IP Address of Gateway A (**10.5.6.1** in our example) in the Local IP Local LAN start IP Address field.
- Type the finishing LAN IP Address of Gateway A (**0.0.0.0** in our example) in the Local IP Local LAN finish IP Address field.
- Type the LAN Subnet Mask of Gateway A (**255.255.255.0** in our example) in the **Local LAN IP Subnetmask** field.
- Choose a subnet from local address from the Tunnel can access pull-down menu.
- Type the starting LAN IP Address of Gateway B (**172.23.9.1** in our example) in the Local IP Remote LAN Start IP Address field.

- Type the finishing LAN IP Address of Gateway B (**0.0.0.0** in our example) in the Local IP Remote LAN Finish IP Address field.
- Type the LAN Subnet Mask of Gateway B (**255.255.255.0** in our example) in the Remote LAN IP Subnetmask field.
- Type the WAN IP address (**22.23.24.25** in our example) of Gateway B in the Remote WAN IP or FQDN field.

Secure Association	Main Mode
Perfect Forward Secrecy	<input checked="" type="radio"/> Enabled <input type="radio"/> Disabled
Encryption Protocol	3DES
PreShared Key	hr5xb8416aa9r6
Key Life	3600 Seconds
IKE Life Time	28800 Seconds
<input checked="" type="checkbox"/> NETBIOS Enable	
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

Figure I-5: Figure 4 – NETGEAR FVS318 VPN Settings (part 2) – Main Mode

- From the Secure Association drop-down box, select Main Mode.
 - Next to Perfect Forward Secrecy, select the Enabled radio button.
 - From the Encryption Protocol drop-down box, select 3DES.
 - In the PreShared Key box, type a unique text string to be used as the shared key between Gateway A and Gateway B. In this example we used **hr5xb8416aa9r6**. You must make sure the key is the same for both gateways.
 - In the Key Life box, enter in 3600 seconds.
 - In the IKE Life Time, enter 28800 seconds.
 - Check the NETBIOS Enable box if you wish to pass NetBIOS traffic over the VPN tunnel, allowing functions such as Microsoft Network Neighborhood browsing.
8. Click the Apply button in the lower center of the screen to save all changes. This will return you to the VPN Settings screen.

#	Enable	Connection Name	Local IPSec ID	Remote IPSec ID
1	<input checked="" type="checkbox"/>	toFVL328	netgear.dyndns.org	22.23.24.25
2	<input type="checkbox"/>	-	-	-
3	<input type="checkbox"/>	-	-	-
4	<input type="checkbox"/>	-	-	-
5	<input type="checkbox"/>	-	-	-
6	<input type="checkbox"/>	-	-	-
7	<input type="checkbox"/>	-	-	-
8	<input type="checkbox"/>	-	-	-

Edit Delete Cancel

Figure I-6: NETGEAR FVS318 VPN Settings After Inputting Configuration Info

9. When the screen returns to the VPN Settings, make sure the Enable check box is selected.

Step-By-Step Configuration of FVL328 Gateway B

1. Log in to the NETGEAR FVL328, labeled Gateway B in the illustration.

Out of the box, the FVL328 is set for its default LAN address of <http://192.168.0.1> with its default user name of **admin** and default password of **password**. For this example we will assume you have set the local LAN address as 172.23.9.1 for Gateway B.

2. Click IKE Policies link under the VPN category and click Add on the IKE Policies Menu.

IKE Policy Configuration

General

Policy Name	<input type="text" value="FVS318"/>
Direction/Type	<input type="button" value="Both Directions"/>
Exchange Mode	<input type="button" value="Main Mode"/>

Local

Local Identity Type	<input type="button" value="WAN IP Address"/>
Local Identity Data	<input type="text" value="22.23.24.25"/>

Remote

Remote Identity Type	<input type="button" value="Fully Qualified Domain Name"/>
Remote Identity Data	<input type="text" value="netgear.dyndns.org"/>

Figure I-7: NETGEAR FVL328 IKE Policy Configuration – Part 1

- Enter an appropriate name for the policy in the Policy Name field. This name is not supplied to the remote VPN Endpoint. It is used to help you manage the IKE policies. In our example we have used FVS318 as the Policy Name. In the Policy Name field type **FVS318**.
- From the Direction/Type drop-down box, select Both Directions.
- From the Exchange Mode drop-down box, select Main Mode.
- From the Local Identity drop-down box, select WAN IP Address (WAN IP address will automatically be populated into the Local Identity Data field after policy is applied).
- From the Remote Identity drop-down box, select Fully Qualified Domain Name.
- Type the FQDN (**netgear.dnydns.org** in our example) in the Remote Identity Data field.


IKE SA Parameters

Encryption Algorithm	<input type="button" value="3DES"/>
Authentication Algorithm	<input type="button" value="MD5"/>
Authentication Method	<input checked="" type="radio"/> Pre-shared Key <input type="text" value="hr5xb84l6aa9l6"/>
	<input type="radio"/> RSA Signature (requires Certificate)
Diffie-Hellman (DH) Group	<input type="button" value="Group 1 (768 Bit)"/>
SA Life Time	<input type="text" value="28800"/> (secs)

<input type="button" value="Back"/>	<input type="button" value="Apply"/>	<input type="button" value="Cancel"/>
-------------------------------------	--------------------------------------	---------------------------------------

Figure I-8: NETGEAR FVL328 IKE Policy Configuration – Part 2

- From the Encryption Algorithm drop-down box, select 3DES.
 - From the Authentication Algorithm drop-down box, select MD5.
 - From the Authentication Method radio button, select Pre-shared Key.
 - In the Pre-Shared Key field, type **hr5xb84l6aa9r6**. You must make sure the key is the same for both gateways.
 - From the Diffie-Hellman (DH) Group drop-down box, select Group 1 (768 Bit).
 - In the SA Life Time field, type 28800.
3. Click Apply. This will bring you back to the IKE Policies Menu.

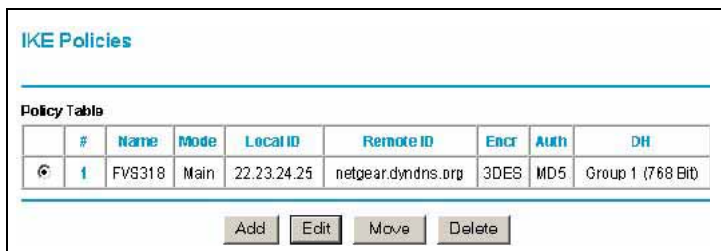

#	Name	Mode	Local ID	Remote ID	Encr	Auth	DH
1	FVS318	Main	22.23.24.25	netgear.dyndns.org	3DES	MD5	Group 1 (768 Bit)

Add Edit Move Delete

Figure I-9: NETGEAR FVL328 IKE Policies (Post Configuration)

The FVS318 IKE Policy is now displayed in the IKE Policies page.

4. Click the VPN Policies link under the VPN category on the left side of the Settings management GUI. This will take you to the VPN Policies Menu page. Click Add Auto Policy. This will open a new screen titled VPN – Auto Policy.

VPN - Auto Policy

General

Policy Name:

IKE policy:

Remote VPN Endpoint Address Type:

Address Data:

SA Life Time: (Seconds)

(Kbytes)

☒ IPSec PFS PFS Key Group:

Traffic Selector

Local IP:

Start IP address: . . .

Finish IP address: . . .

Subnet Mask: . . .

Figure I-10: NETGEAR FVL328 VPN – Auto Policy (part 1)

- Enter a unique name to identify this policy. This name is not supplied to the remote VPN endpoint. In our example we have used to318 as the Policy Name. In the Policy Name field type **to318**.
- From the IKE policy drop-down box, select the IKE Policy that was set up in the earlier step – the FVS318 IKE Policy.
- From the Remote VPN Endpoint Address Type drop-down box, select IP Address.
- Type the WAN IP Address of Gateway A (**14.15.16.17** in our example) in the Remote VPN Endpoint Address Data field.
- Type **300** in the SA Life Time (Seconds) field.
- Type **0** in the SA Life Time (Kbytes) field.
- Check the IPSec PFS check box.
- From the PFS Key Group drop-down box, select Group 2 (1024 Bit).
- From the Traffic Selector Local IP drop-down box, select Subnet address.
- Type the starting LAN IP Address of Gateway B (**172.23.9.1** in our example) in the Local IP Start IP Address field.
- Type the finishing LAN IP Address of Gateway B (**0.0.0.0** in our example) in the Local IP Finish IP Address field.
- Type the LAN Subnet Mask of Gateway B (**255.255.255.0** in our example) in the Local IP Subnet Mask field.

Remote IP

Subnet address

Start IP address: 10 . 5 . 6 . 1

Finish IP address: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0

AH Configuration

☐ Enable Authentication Authentication Algorithm: MD5

ESP Configuration

☒ Enable Encryption Encryption Algorithm: 3DES

☒ Enable Authentication Authentication Algorithm: MD5

☒ NETBIOS Enable

Back Apply Cancel

Figure I-11: NETGEAR FVL328 VPN – Auto Policy (part 2)

- From the Traffic Selector Remote IP drop-down box, select Subnet address.
 - Type the starting LAN IP Address of Gateway A (**10.5.6.1** in our example) in the Remote IP Start IP Address field.
 - Type the finishing LAN IP Address of Gateway A (**0.0.0.0** in our example) in the Remote IP Finish IP Address field.
 - Type the LAN Subnet Mask of Gateway A (**255.255.255.0** in our example) in the Remote IP Subnet Mask field.
 - From the AH Configuration Authentication Algorithm drop-down box, select MD5.
 - Select the Enable Encryption check box.
 - From the ESP Configuration Encryption Algorithm drop-down box, select 3DES.
 - Select the Enable Authentication check box.
 - From the ESP Configuration Authentication Algorithm drop-down box, select MD5.
 - Select the NETBIOS Enable check box.
5. Click the Apply Button. You will be taken back to the VPN Policies Menu page.

The screenshot shows the 'VPN Policies' configuration page. At the top, there's a title 'VPN Policies'. Below it is a 'Policy Table' with the following data:

#	Enable	Name	Type	Local	Remote	AH	ESP
1	<input checked="" type="checkbox"/>	to318	Auto	172.23.9.1/255.255.255.0	10.5.6.1/255.255.255.0	Disabled	ESP

Below the table are buttons for 'Edit', 'Move', and 'Delete'. Further down are 'Apply' and 'Cancel' buttons. At the bottom are 'Add Auto Policy' and 'Add Manual Policy' buttons.

Figure I-12: NETGEAR FVL328 VPN Policies Menu (Post Configuration)

6. When the screen returns to the VPN Policies, make sure the Enable check box is selected. Click the Apply button.

Test the VPN Connection

1. From a PC behind the NETGEAR FVS318 or FVM318 Gateway A, attempt to ping the remote FVL328 Gateway B LAN Interface address (example address 172.23.9.1).
2. From the FVS318 or FVM318, click the Router Status link on the left side of the Settings management menu. Click the Show VPN Status button. This will take you to the IPSec Connection Status Screen. If the connection is functioning properly, the State fields will show "Estab."
3. From the FVL328, click the VPN Status link under the VPN section of the main menu. The VPN Logs and status are displayed.

Glossary

10BASE-T	IEEE 802.3 specification for 10 Mbps Ethernet over twisted pair wiring.
100BASE-Tx	IEEE 802.3 specification for 100 Mbps Ethernet over twisted pair wiring.
3DES	3DES (Triple DES) achieves a high level of security by encrypting the data three times using DES with three different, unrelated keys.
802.11b	IEEE specification for wireless networking at 11 Mbps using direct-sequence spread-spectrum (DSSS) technology and operating in the unlicensed radio spectrum at 2.5GHz.
AH	Authentication Header
CA	Certificate Authority. A trusted third-party organization or company that issues digital certificates used to create digital signatures and public-private key pairs. The role of the CA in this process is to guarantee that the individual granted the unique certificate is, in fact, who he or she claims to be. Usually, this means that the CA has an arrangement with a financial institution, such as a credit card company, which provides it with information to confirm an individual's claimed identity. CAs are a critical component in data security and electronic commerce because they guarantee that the two parties exchanging information are really who they claim to be.
CRL	Certificate Revocation List. Each Certificate Authority (CA) maintains a revoked certificates list.
Denial of Service attack	DoS. A hacker attack designed to prevent your computer or network from operating or communicating.
DES	The Data Encryption Standard (DES) processes input data that is 64 bits wide, encrypting these values using a 56 bit key. <i>See</i> also 3DES.
Deffie Helman	Deffie Helman shared secret algorithm. Deffie Helman shared secret algorithm is a method for securely exchanging a shared secret between two parties, in real-time, over an untrusted network. A shared secret allows two parties, who may not have ever communicated previously, to encrypt their communications. As such, it is used by several protocols, including Secure Sockets Layer (SSL) and Internet Protocol Security (IPSec).

DHCP	<i>See</i> Dynamic Host Configuration Protocol.
DMZ	A Demilitarized Zone is used by a company that wants to host its own Internet services without sacrificing unauthorized access to its private network. The DMZ sits between the Internet and an internal network's line of defense, usually some combination of firewalls and bastion hosts. Typically, the DMZ contains devices accessible to Internet traffic, such as Web (HTTP) servers, FTP servers, SMTP (e-mail) servers and DNS servers.
DNS	<i>See</i> Domain Name Server.
domain name	A descriptive name for an address or group of addresses on the Internet. Domain names are of the form of a registered entity name plus one of a number of predefined top level suffixes such as .com, .edu, .uk, etc. For example, in the address mail.NETGEAR.com, mail is a server name and NETGEAR.com is the domain.
Domain Name Server	DNS. A Domain Name Server resolves descriptive names of network resources (such as www.NETGEAR.com) to numeric IP addresses.
Dynamic Host Configuration Protocol	DHCP. An Ethernet protocol specifying how a centralized DHCP server can assign network configuration information to multiple DHCP clients. The assigned information includes IP addresses, DNS addresses, and gateway (router) addresses.
ESP	Encapsulating Security Payload.
gateway	A local device, usually a router, that connects hosts on a local network to other networks.
IETF	Internet Engineering Task Force. An open international community of network designers, operators, vendors, and researchers concerned with the evolution of the Internet architecture and the smooth operation of the Internet. Working groups of the IETF propose standard protocols and procedures for the Internet, which are published as RFCs (Request for Comment) at www.ietf.org .
IKE	Internet Key Exchange. An automated method for exchanging and managing encryption keys between two VPN devices.
IP	Internet Protocol. The main internetworking protocol used in the Internet. Used in conjunction with the Transfer Control Protocol (TCP) to form TCP/IP.

IP Address	A four-position number uniquely defining each host on the Internet. Ranges of addresses are assigned by Internic, an organization formed for this purpose. Usually written in dotted-decimal notation with periods separating the bytes (for example, 134.177.244.57).
IPSec	Internet Protocol Security. IPSec is a series of guidelines for securing private information transmitted over public networks. IPSec is a VPN method providing a higher level of security than PPTP.
ISP	Internet service provider.
LAN	<i>See</i> local area network.
LDAP	Lightweight Directory Access Protocol. A set of protocols for accessing information directories. LDAP is based on the standards contained within the X.500 standard, but is significantly simpler. And unlike X.500, LDAP supports TCP/IP, which is necessary for any type of Internet access. Because it's a simpler version of X.500, LDAP is sometimes called <i>X.500-lite</i> .
local area network	LAN. A communications network serving users within a limited area, such as one floor of a building. A LAN typically connects multiple personal computers and shared network devices such as storage and printers. Although many technologies exist to implement a LAN, Ethernet is the most common for connecting personal computers.
MAC address	Media Access Control address. A unique 48-bit hardware address assigned to every Ethernet node. Usually written in the form 01:23:45:67:89:ab.
Mbps	Megabits per second.
MSB	<i>See</i> Most Significant Bit or Most Significant Byte.
MTU	<i>See</i> Maximum Transmit Unit.
Maximum Transmit Unit	The size in bytes of the largest packet that can be sent or received.
Most Significant Bit or Most Significant Byte	MSB. The portion of a number, address, or field that is farthest left when written as a single number in conventional hexadecimal ordinary notation. The part of the number having the most value.
NAT	<i>See</i> Network Address Translation.

NetBIOS	Network Basic Input Output System. An application programming interface (API) for sharing services and information on local-area networks (LANs). Provides for communication between stations of a network where each station is given a name. These names are alphanumeric names, 16 characters in length. NetBIOS is needed to run Microsoft networking functions such as Network Neighborhood.
netmask	A number that explains which part of an IP address comprises the network address and which part is the host address on that network. It can be expressed in dotted-decimal notation or as a number appended to the IP address. For example, a 28-bit mask starting from the MSB can be shown as 255.255.255.192 or as /28 appended to the IP address.
Network Address Translation	A technique by which several hosts share a single IP address for access to the Internet.
PKIX	<i>See</i> Public Key Infrastructure.
packet	A block of information sent over a network. A packet typically contains a source and destination network address, some protocol and length information, a block of data, and a checksum.
PPP	<i>See</i> Point-to-Point Protocol.
PPP over Ethernet	PPPoE. PPP over Ethernet is a protocol for connecting remote hosts to the Internet over an always-on connection by simulating a dial-up connection.
PPTP	Point-to-Point Tunneling Protocol. A method for establishing a virtual private network (VPN) by embedding Microsoft's network protocol into Internet packets.
PSTN	Public Switched Telephone Network.
Point-to-Point Protocol	PPP. A protocol allowing a computer using TCP/IP to connect directly to the Internet.
Public Key Infrastructure	PKIX. The most widely used standard for defining digital certificates. X.509 is actually an ITU Recommendation, which means that has not yet been officially defined or approved. As a result, companies have implemented the standard in different ways. For example, both Netscape and Microsoft use X.509 certificates to implement SSL in their Web servers and browsers. But an X.509 Certificate generated by Netscape may not be readable by Microsoft products, and vice versa.

RFC	Request For Comment. Refers to documents published by the Internet Engineering Task Force (IETF) proposing standard protocols and procedures for the Internet. RFCs can be found at www.ietf.org .
RIP	<i>See</i> Routing Information Protocol.
router	A device that forwards data between networks. An IP router forwards data based on IP source and destination addresses.
Routing Information Protocol	RIP. A protocol in which routers periodically exchange information with one another so that they can determine minimum distance paths between sources and destinations.
subnet mask	<i>See</i> netmask.
URL	Universal Resource Locator, the global address of documents and other resources on the World Wide Web.
UTP	Unshielded twisted pair. The cable used by 10BASE-T and 100BASE-Tx Ethernet networks.
VPN	Virtual Private Network. A method for securely transporting data between two private networks by using a public network such as the Internet as a connection.
VPNC	Virtual Private Network Consortium. VPNC is the international trade association for manufacturers in the VPN market. It should be noted that VPNC does not create standards; instead, it strongly supports the current and future IETF standards. See http://www.vpnc.org/ for more information.
WAN	<i>See</i> wide area network.
wide area network	WAN. A long distance link used to extend or connect remotely located local area networks. The Internet is a large WAN.
Windows Internet Naming Service	WINS. Windows Internet Naming Service is a server process for resolving Windows-based computer names to IP addresses. If a remote network contains a WINS server, your Windows computers can gather information from that WINS server about its local hosts. This allows your computers to browse that remote network using Network Neighborhood.
WINS	<i>See</i> Windows Internet Naming Service.

Index

A

Account Name 3-9, 3-11, 3-15
Address Resolution Protocol B-9
Addressing E-7
Austria 3-15
Authentication Header (AH) E-3, E-4
Auto Uplink 2-3

B

backup configuration 7-10
BigPond 3-15

C

CA 6-22
Cabling B-12
Cat5 cable 3-1, B-13
Certificate Authority 6-22
configuration
 automatic by DHCP 2-4
 backup 7-10
 erasing 7-11
 router, initial 3-1
Connection Monitor H-15
content filtering 2-3
conventions
 typography 1-1, 1-2
crossover cable 2-3, 8-3, B-12
customer support 1-iii

D

date and time 8-8
Daylight Savings Time 5-15, 8-8

daylight savings time 5-15
Default DMZ Server 4-5
default reset button 8-7
Denial of Service (DoS) protection 2-2, 5-3
denial of service attack B-11
DHCP 2-4, 4-2, B-10
DHCP Client ID C-7
DHCP Setup field, Ethernet Setup menu 7-3
Disabling NAT 3-15, 3-16
DMZ Server 4-5
DNS Proxy 2-4
DNS server 3-10, 3-11, 3-15, 3-16, C-11
DNS, dynamic 4-6
domain C-11
Domain Name 3-9, 3-11, 3-15
domain name server (DNS) B-9
DoS attack B-11
Dynamic DNS 2-4, 4-6

E

Encapsulating Security Payload E-3
EnterNet C-9
EPROM, for firmware upgrade 2-5
ESP E-3
Ethernet 2-3
Ethernet cable B-12

F

factory settings, restoring 7-11
features 2-1
firewall features 2-2

FLASH memory 7-13
FQDN 2-2
front panel 2-6
Fully Qualified Domain Name 2-2

G

gateway address C-11
General 6-4, 6-7, 6-11

H

host name 3-9, 3-11, 3-15

I

IANA
 contacting B-2
IETF B-1
 Web site address B-7
IKE Security Association E-4
inbound rules 5-7
installation 2-4
Internet account
 address information C-9
 establishing C-9
Internet Key Exchange (IKE) E-3
Internet Protocol security E-1
Internet Service Provider 3-1
Intranets E-1
IP addresses C-10, C-11
 and NAT B-7
 and the Internet B-2
 assigning B-2, B-9
 auto-generated 8-3
 private B-7
 translating B-9
IP configuration by DHCP B-10
IP networking
 for Macintosh C-6
 for Windows C-2, C-5
IPSec E-1
IPSec Components E-2

IPSec SA negotiation E-9
IPSec Security Features E-2
ISP 3-1

L

LAN IP Setup Menu 4-3
LEDs
 description 2-6
 troubleshooting 8-3
log
 sending 7-9
Log Viewer H-15

M

MAC address 8-7, B-9
 spoofing 3-11, 3-16, 8-5
Macintosh C-10
 configuring for IP networking C-6
 DHCP Client ID C-7
 Obtaining ISP Configuration Information C-11
masquerading C-9
metric 4-9
MTU 4-6
multicasting 4-2

N

NAT C-9
NAT. *See* Network Address Translation
netmask
 translation table B-6
Network Address Translation 2-4, B-7, C-9
Network Time Protocol 5-14, 8-8
NTP 5-14, 8-8

O

order of precedence 5-12
outbound rules 5-10

P

- package contents 2-5
- password
 - restoring 8-7
- PC, using to configure C-12
- ping 4-6
- PKIX 6-22
- port filtering 5-10
- port forwarding 5-7
- port forwarding behind NAT B-8
- port numbers 5-12
- PPP over Ethernet 2-4, C-9
- PPPoE 2-4, 3-9, C-9
- PPTP 3-15
- Primary DNS Server 3-10, 3-11, 3-13, 3-15, 3-16
- protocols
 - Address Resolution B-9
 - DHCP 2-4, B-10
 - Routing Information 2-3, B-2
 - support 2-3
 - TCP/IP 2-3
- publications, related B-1

R

- rear panel 2-7
- reset button, clearing config 8-7
- restore factory settings 7-11
- RFC
 - 1466 B-7, B-9
 - 1597 B-7, B-9
 - 1631 B-8, B-9
 - finding B-7
- RIP (Router Information Protocol) 4-1
- router concepts B-1
- Routing Information Protocol 2-3, B-2
- rules
 - inbound 5-7
 - order of precedence 5-12
 - outbound 5-10

S

- SA E-4
- Scope of Document 1-1
- Secondary DNS Server 3-10, 3-11, 3-13, 3-15, 3-16
- service blocking 5-10
- service numbers 5-13
- Setup Wizard 3-1
- SMTP 7-9
- spoof MAC address 8-5
- stateful packet inspection 2-2, B-11
- Static Routes 4-3
- subnet addressing B-4
- subnet mask B-5, C-10, C-11
- Syslog 7-8

T

- TCP/IP
 - configuring C-1, D-1, E-1, F-1, G-1
 - network, troubleshooting 8-5
- TCP/IP properties
 - verifying for Macintosh C-8
 - verifying for Windows C-5, C-6
- Telstra 3-15
- Testing and Troubleshooting E-11
- time of day 8-8
- time zone 5-15
- timeout, administrator login 5-2
- time-stamping 5-15
- Transport Mode E-5
- troubleshooting 8-1
- Trusted Host 5-4
- Tunnel Mode E-5
- typographical conventions 1-2

U

- Uplink switch B-12
- URL 5-4
- USB C-9

V

Virtual Private Networking 2-3

VPN E-1

VPN Consortium E-6

VPN Process Overview E-7

VPNC IKE Phase I Parameters E-10

VPNC IKE Phase II Parameters E-11

W

Windows, configuring for IP routing C-2, C-5

winipcfg utility C-5

WinPOET C-9

World Wide Web 1-iii