
Instructions

RCU Rack Mount Frame WV-Q70 for WV-RC700



Panasonic.

Before attempting to connect or operate this product, please read these instructions completely

PREFACE

The RCU Rack Mount Frame WV-Q70 is provided for mounting the Remote Control Unit WV-RC700 on the EIA 19* rack.

MAJOR COMPONENT

1. Rack-mounting Spacer

This is used to mount the single Remote Control Unit on the rack.

2. Rack Mounting Angles

Two Rack-mounting Angles should be used to mount the double Remote Control Units on the rack.

3. RCU Jointing Bars

These bars are used to joint double Remote Control Units.

INSTALLATION


1. Mounting of the single Remote Control Unit

- 1-1. Fix one Rack-mounting Angle(1) to the either side by using two screws (M4×10, provided).
- 1-2. Attach the Rack-mounting Spacer(2) to the Remote Control Unit by using four screws (Two M5×10 and two M4×10, provided).
- 1-3. Mount the Remote Control Unit onto the EIA 19" rack by using four rack mounting screws (not provided) as shown in Fig. 1.

Mounting of double Remote Control Units.

Upper joint

2-1. Fix two RCU Jointing Bars(3) on the side of Remote Control Units by using four screws (M5×16, provided) as shown in Fig.2.

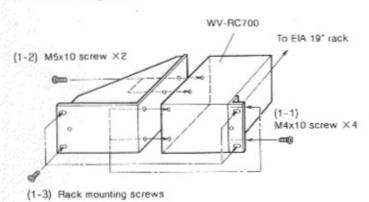




Fig. 1

Fig. 2

- 2-2. Attach two Remote Control Units by using four screws (M4×25, provided), as shown in Fig.3.
- 2-3. Fix two Rack Mounting Angles(1) on both side of the jointed Remote Control Units.
- 2-4. Mount two Remote Control Units onto the EIA 19" rack by using four rack mounting screws (not provided).

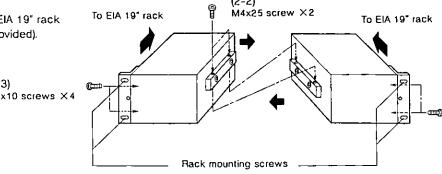


Fig. 3

(2-3)M4x10 screws X4

COMPOSITION

Rack Mounting Angle	2 pcs.
RCU Jointing Bar	2 pcs.
Back-mounting Spacer	. 1 pc.

SPECIFICATIONS

Dimensions:

9-9/16"(W) × 5-3/16"(H) × 11"(D) Rack-mounting Spacer:

 $243.5 \text{mm}(W) \times 132 \text{mm}(H) \times 280 \text{mm}(D)$

 $1-1/8"(W) \times 5-3/16"(H) \times 1-1/8"(D)$ **RCU Mounting Angle:**

 $30mm(W) \times 132mm(H) \times 30mm(D)$

RCU Jointing Bar: $4-11/16"(W) \times 9/16"(H) \times 5/16"(D)$

 $120mm(W) \times 15mm(H) \times 7.5mm(D)$

Weights:

3.5 lbs.(1.6 kg) Rack-mounting Spacer:

Dimensions and weights are approximate. Specifications are subject to change without notice.

STANDARD ACCESSORIES

M5×10 Screw	 2 pcs.
M5×16 Screw	 4 pcs.
M4×25 Screw	 2 pcs.
MAY 10 Scrow	4 nce

anasonic

Communications & Systems Company

Division of Matsushita Electric Corporation of America

PROFESSIONAL/INDUSTRIAL VIDEO

HEADOUARTERS:

50 Meadowland Parkway, Secaucus, New Jersey 07094

EASTERN ZONE: 50 Meadowland Parkway, Secaucus, NJ 07094 (201) 348-7620

CENTRAL ZONE:

425 E. Algonquin Road, Arlington Hts. IL 60005 (708) 981-4826

SOUTHERN ZONE:

Dallas Region: 4500 Amon Carter Blvd., Ft Worth. TX 76155 (817) 685-1117

Atlanta Region: 1854 Shackleford Ct. Suite 115 Norcross. GA 30093 (404) 925-6841 WESTERN ZONE:

Seattle Region: 1200 Westlake Ave. N., Suite 508, Seattle, WA 98109 (206) 285-8883 Los Angeles Region: 6550 Katella Ave., Cypress. CA 90630 (714) 373-7275

MATSUSHITA ELECTRIC OF CANADA LIMITED

5770 Ambler Drive, Mississauga, Ontario, Canada L4W 2T3 (416) 624-5010

PANASONIC SALES COMPANY

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

San Gabriel Industrial Park, 65th Infantry, Ave. KM. 9.5 Carolina, Puerto Rico 00630 (809) 750-4300

N0791-0

YWV8QA2529AN