Extract from the online catalog

SPC 5/ 4-STCL-7,62

Order No.: 1718504

The figure shows a 5-pos. version of the product

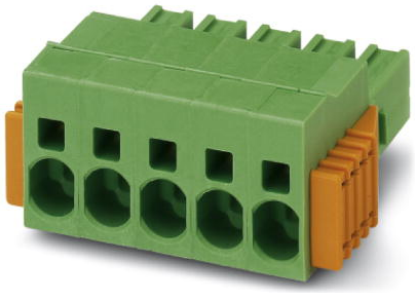

http://eshop.phoenixcontact.net/phoenix/treeViewClick.do?UID=1718504

Plug component, Nominal current: 41 A, Nom. voltage: 1000 V, Pitch: 7.62 mm, Number of positions: 4, Connection type: Spring-cage conn., Color: green

Commercial data	
EAN	4046356175173
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.021927 KG
Catalog page information	Page 385 (CC-2009)

Product notes

WEEE/RoHS-compliant since: 11/23/2006

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	7.62 mm
Dimension a	22.86 mm
Number of positions	4

Technical data

Insulating material group	I
Rated surge voltage (III/3)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	41 A
Nominal voltage U_N	1000 V
Nominal cross section	10 mm²
Maximum load current	41 A
Insulating material	PA
Inflammability class acc. to UL 94	V0
Stripping length	15 mm

Connection data

Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	10 mm²
Conductor cross section stranded min.	0.2 mm²
Conductor cross section stranded max.	6 mm²
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm²
Conductor cross section stranded, with ferrule without plastic sleeve max.	6 mm²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm²
Conductor cross section stranded, with ferrule with plastic sleeve max.	4 mm²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	8
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.25 mm²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm²

Certificates / Approvals

Certification	CUL, UL

CUL

Nominal voltage U_N	600 V
Nominal current I_N	35 A
AWG/kcmil	24-8

UL

Nominal voltage U_N	600 V
Nominal current I_N	35 A
AWG/kcmil	24-8

Diagrams/Drawings

Diagram

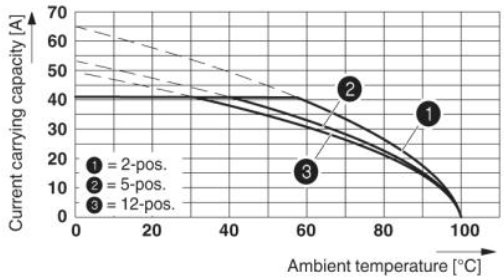

Derating curve for: SPC 5/...-ST-7.62 with PC 5/...-G-7.62

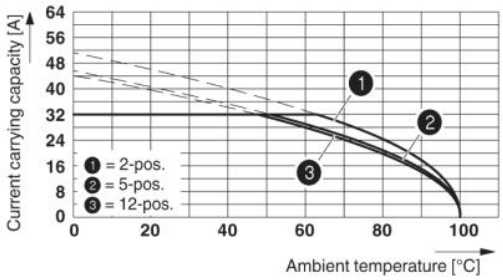

Derating curve for: SPC 5/...-ST-7.62 with PC 5/...-G-7.62
Conductor cross-section: 6 mm²

Dimensioned drawing

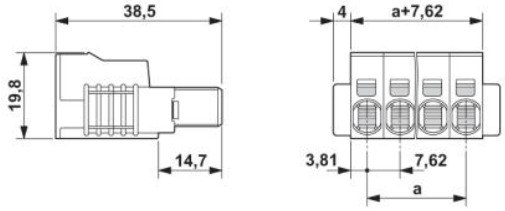

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
http://www.phoenixcontact.com

© 2010 Phoenix Contact
Technical modifications reserved;