

Bourdon Tube Pressure Switches

Type B1S-.../B2S-...

Mechanical single/dual pressure switch
Repeatability $\pm 1.0\%$ at constant temperature

Features

Bourdon tube pressure switch
 All welded parts wetted.
 Direct acting, no friction, high accuracy

Adjustment ranges

4.8 ... 950 bar

Applications

Pump control,
 Die-casting machines,
 Press control,
 Power plants,
 Alarm functions



Index: D

Technical Data

Wetted parts:	
Process connection:	Stainless steel 1.4401
Bourdon tube:	Stainless steel 1.4401
Repeatability:	$\pm 1\%$ at constant temperature
Switching rate:	max. 20/min
Temperature range:	$-40^{\circ}\text{C} \dots +75^{\circ}\text{C}$
Protection class:	IP00
Housing:	Without housing for installation in control panels:
Process connection:	1/4" NPT female thread except ranges marked with *). These switches have proof pressures above 500 bar and are provided with high pressure thread with adapter "G1/4 female".
Electrical connection:	Lead wire PVC 1.5 mm ² , length appr. 450 mm

Electrical ratings and hysteresis:	A large variety of micro switches offers different electrical ratings and hysteresis for many applications.
Weight:	B1S-...: approx. 0.6 kg B2S-...: approx. 0.7 kg
Set point adjustment:	Turn the adjustment screw clockwise to decrease the set point
Intrinsically safe:	The switches are designed for intrinsically safe applications. Please add "Exi" to your ordering details when placing an order. To comply with the intrinsically safe approval following max. ratings must not be exceeded: U _{max} = 28 V I _{max} = 50 mA
Approval:	---

Pressure ranges

Pressure range code	Adjustment range [bar]		Max. operating pressure [bar]	Test pressure [bar] (short term)	Max. hysteresis of switch types in bar (end of range)	
	Increasing press.	Decreasing press.			H, GH [bar]	M, GM [bar]
12SS	4.8 ... 82	3.4 ... 81	90	100	0.96	1.86
32SS	13.7 ... 220	11.0 ... 217	250	280	2.68	5.44
48SS	22.4 ... 330	16.5 ... 325	370	415	2.75	5.90
65SS*	30.3 ... 448	22.5 ... 440	500	560	3.58	7.92
120SS*	79.3 ... 827	41.4 ... 790	850	1035	16.90	37.90
180SS*	79.3 ... 950	41.4 ... 950	999	1380	16.90	37.90

Specifications are subject to changes without notice.


Pressure

Bourdon Tube Pressure Switches

Type B1S-.../B2S-...

Dimensions (in mm / inch)

Index: D

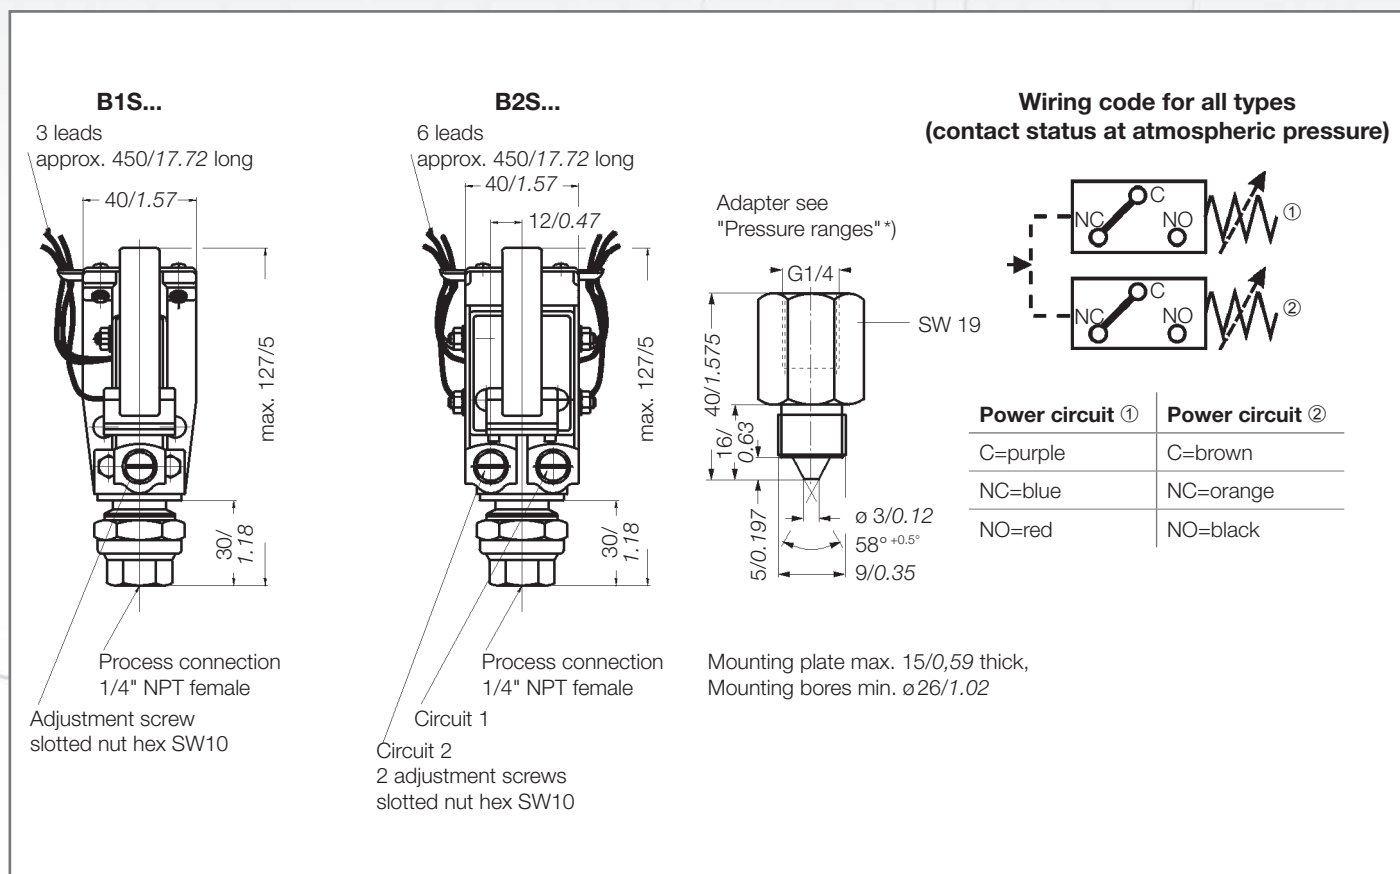

Electrical ratings

Micro switch	Special features	Volt AC 50/60 Hz	Ind. load A	Res. load A	Volt DC	Ind. load A	Res. load A	Comments
H	Micro switch with silver contacts	125 250 480*	10 10 3	10 10 3	6 to 24	0.50	0.5	Small hysteresis; High AC / low DC loads
M	Micro switch with silver contacts	125 250 480*	10 10 3	10 10 3	12 24 250	5.00 1.00 0.25	15.0 2.0 0.4	Medium hysteresis; High AC and DC loads
GH GM	Micro switch with gold-plated contacts for low voltage and/or low current	125 30	1 0.1	1 0.1	24 30	1.00 0.10	1.0 0.1	Small hysteresis Medium hysteresis

* on request

Ordering

Example for order number

Type **B1S** or **B2S** — Micro switch **H** — Pressure range code **48SS**

Your order number

Type or — Micro switch — Pressure range code

Barksdale

Specifications are subject to changes without notice.