

APPLICATION NOTE

Date : 25th May. 2005

SUBJECT:

RF characteristics data of MGF0915A for Freq.=2.5-2.7GHz band

SUMMARY: This application note show the RF characteristics data of MGF0915.A

- Sample history:
MGF0915A : Lot number "46G"
- Evaluate conditions(In "○"part shown as follows, there is an evaluation result.)

CW(1tone)		IDQ		Tc=25deg.C Freq.=2.6GHz
		0.8	0.64	
VD				
	10	○	○	
	9	○	-	

Tc	CW	ACLR	Vd=10V,IDQ=0.8A Freq.=2.6GHz
-20	○	○	
+25	○	○	
+80	○	○	





ACLR		IDQ		Tc=25deg.C Freq.=2.6GHz
		0.8	0.64	
VD				
	10	○	○	
	9	○	-	

IMD		IDQ		Tc=25deg.C Freq.=2.6GHz
		0.8	0.64	
VD				
	10	○	-	
	9	-	-	

- Results
Page2-3 shows the RF characteristics data.
Page 4 shows the Equivalent Circuit.

May. 2005





MGF0915A RF TEST DATA for Freq.=2.5-2.7GHz BAND

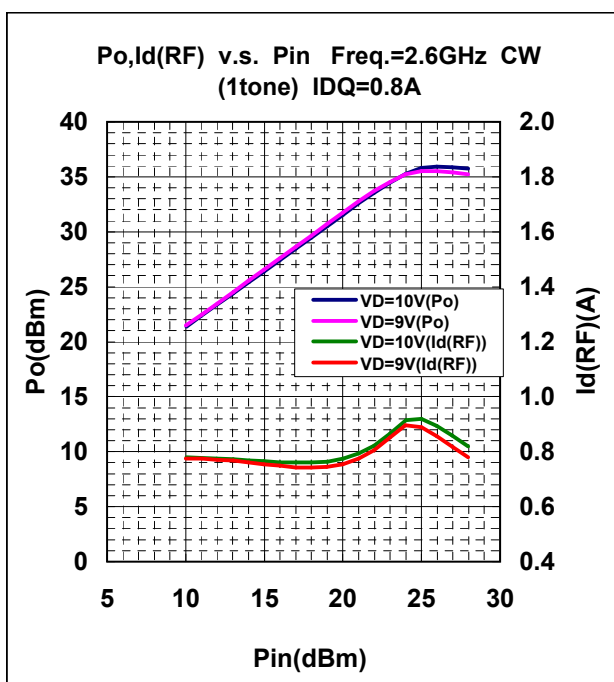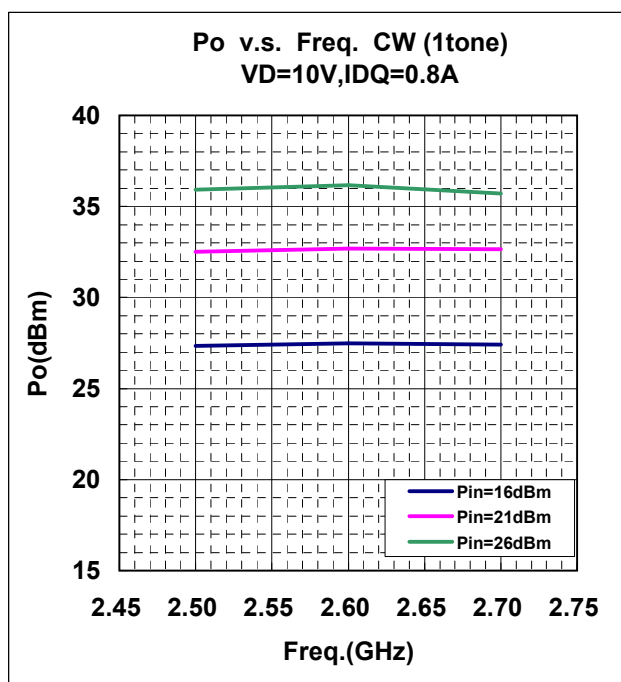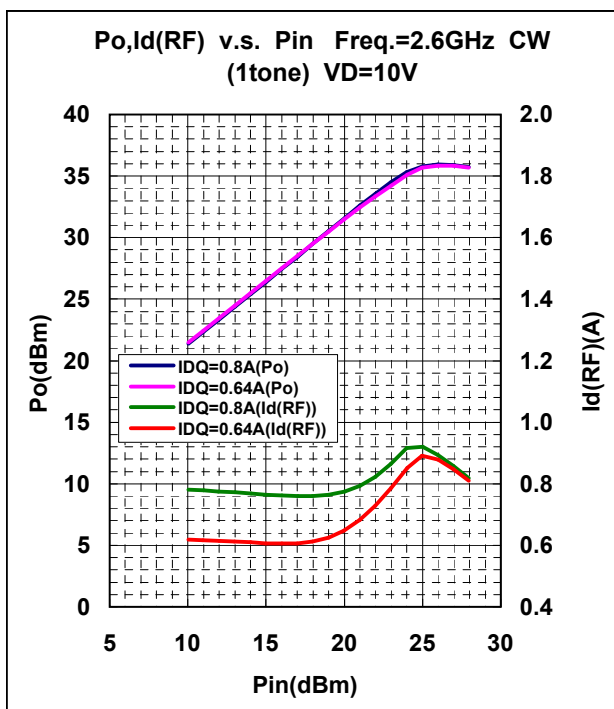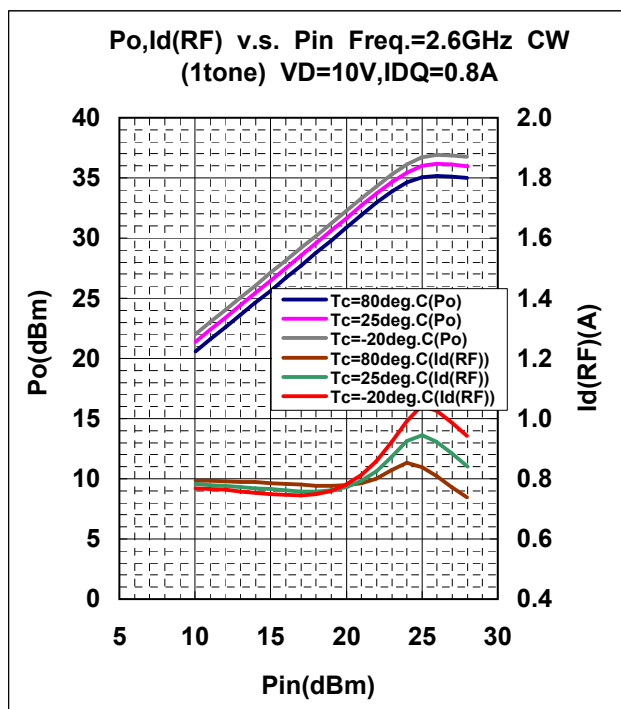

May. 2005


MGF0915A RF TEST DATA for Freq.=2.5-2.7GHz BAND

ACLR v.s. Po(W-CDMA) ; 3GPP TEST MODEL1 64ch's Single Signal

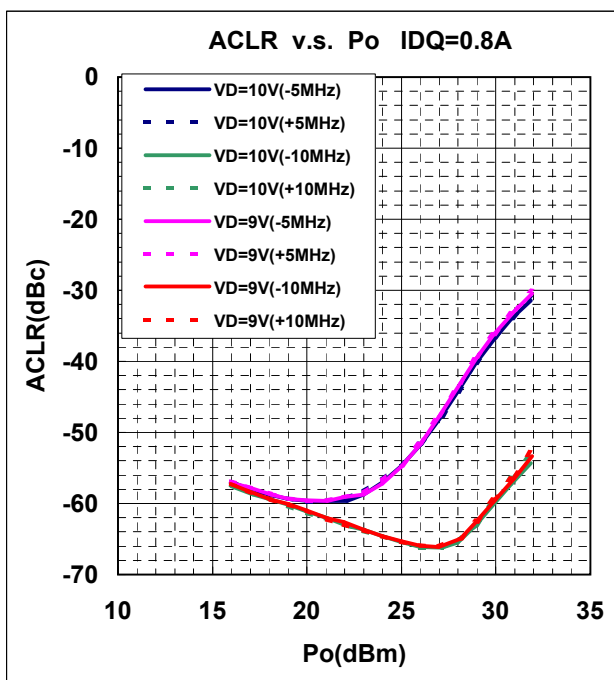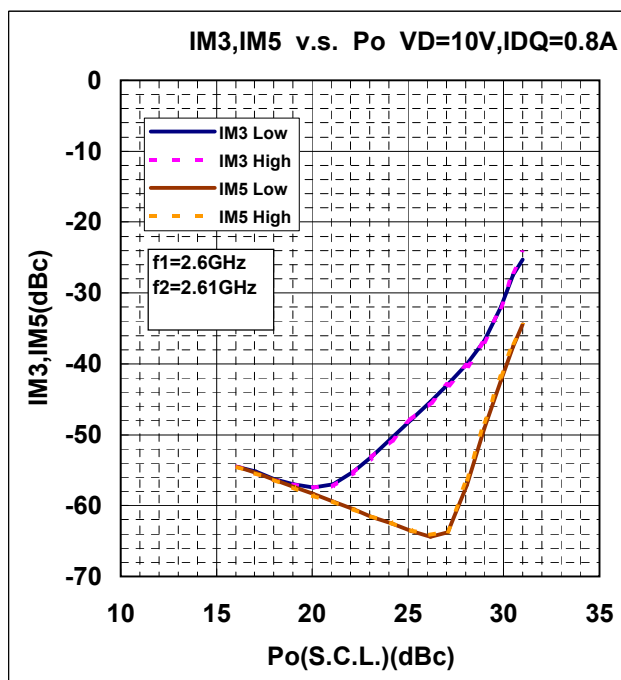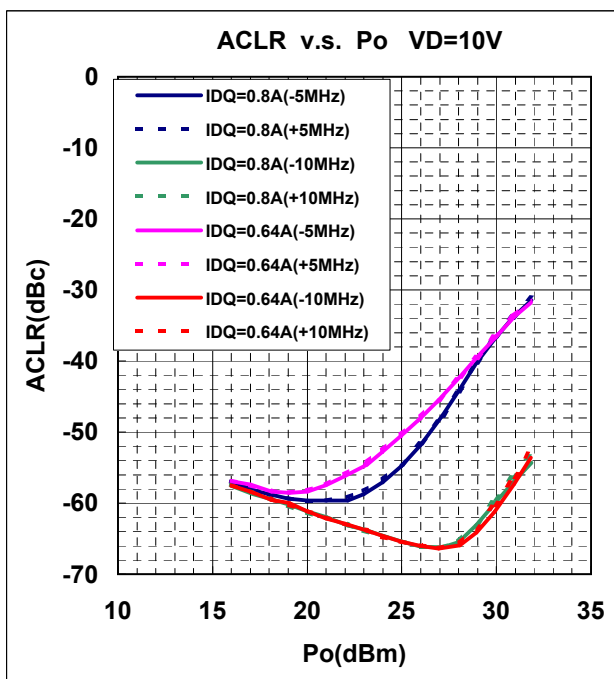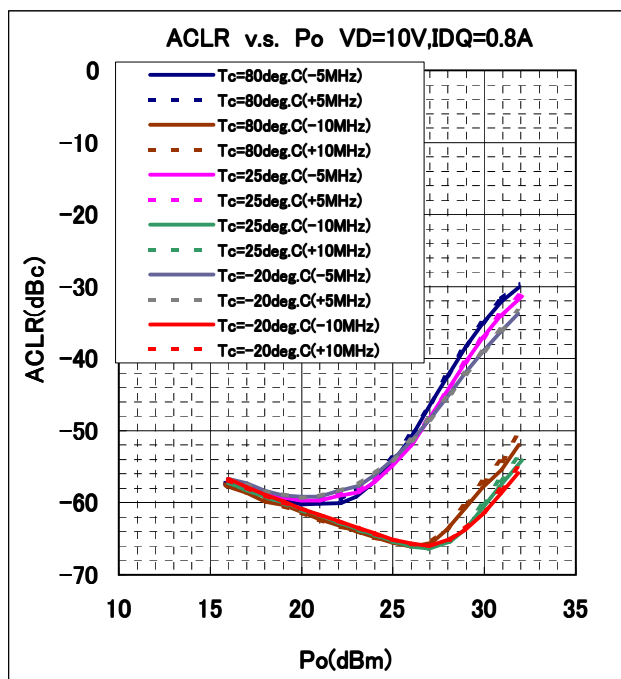

May. 2005

MGF0915A TEST FIXTURE $f=2.6\text{GHz}$

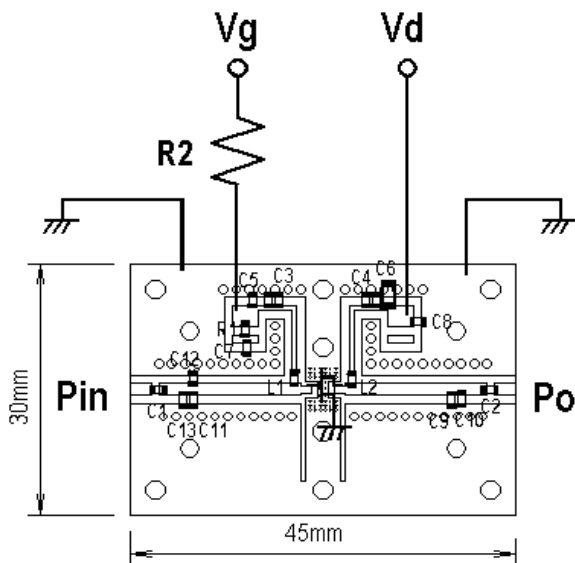

C1,C2,C3,C4=20pF
C5,C7,C8=1000pF
C9,C10=1pF
C=Electrolytic condenser 47uF
C11,C12=0.5pF
C6=4.7uF
C13=3.5pF
L1,L2=12nH
R1=51ohm
R2=100ohm

Board material:FR4 Thickness=0.8(mm)
Specific dielectric constant=4.4