

## Preface

### Copyright

This publication, including all photographs, illustrations and software, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without written consent of the author.

Version 1.0

### Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

### Trademark Recognition

Microsoft, MS-DOS and Windows are registered trademarks of Microsoft Corp.

MMX, Pentium, Pentium-II, Pentium-III, Celeron are registered trademarks of Intel Corporation.

Other product names used in this manual are the properties of their respective owners and are acknowledged.

### Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment onto an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Shielded interconnect cables and a shielded AC power cable must be employed with this equipment to ensure compliance with the pertinent RF emission limits governing this device. Changes or modifications not expressly approved by the system's manufacturer could void the user's authority to operate the equipment.

## Preface

## Declaration of Conformity

This device complies with part 15 of the FCC rules. Operation is subject to the following conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation

## Canadian Department of Communications

This class B digital apparatus meets all requirements of the Canadian Interference-causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

## About the Manual

The manual consists of the following:

<b>Chapter 1</b> <b>Introducing the Motherboard</b>	Describes features of the motherboard. Go to ➞ page 1
<b>Chapter 2</b> <b>Installing the Motherboard</b>	Describes installation of motherboard components. Go to ➞ page 7
<b>Chapter 3</b> <b>Using BIOS</b>	Provides information on using the BIOS Setup Utility. Go to ➞ page 25
<b>Chapter 4</b> <b>Using the Motherboard Software</b>	Describes the motherboard software. Go to ➞ page 45
<b>Chapter 5</b> <b>Setting Up eJIFFY</b>	Describes the eJIFFY setting up Go to ➞ page 49
<b>Chapter 6</b> <b>Trouble Shooting</b>	Provides basic troubleshooting tips Go to ➞ page 63

## TABLE OF CONTENTS

---

<b>Preface</b>	<b>i</b>
<b>Chapter 1</b>	<b>1</b>
<b>Introducing the Motherboard</b>	<b>1</b>
Introduction.....	1
Feature.....	2
Motherboard Components.....	5
 <b>Chapter 2</b>	 <b>7</b>
<b>Installing the Motherboard</b>	<b>7</b>
Safety Precautions.....	7
Choosing a Computer Case.....	7
Installing the Motherboard in a Case.....	7
Checking Jumper Settings.....	8
<i>Setting Jumpers</i> .....	8
<i>Checking Jumper Settings</i> .....	9
<i>Jumper Settings</i> .....	9
Installing Hardware.....	10
<i>Installing the Processor</i> .....	10
<i>Installing Memory Modules</i> .....	12
<i>Expansion Slots</i> .....	15
<i>Connecting Optional Devices</i> .....	17
<i>Installing a Hard Disk Drive/CD-ROM/SATA Hard Drive</i> .....	19
Connecting I/O Devices.....	21
Connecting Case Components.....	22
<i>Front Panel Header</i> .....	24
 <b>Chapter 3</b>	 <b>25</b>
<b>Using BIOS</b>	<b>25</b>
About the Setup Utility.....	25
<i>The Standard Configuration</i> .....	25
<i>Entering the Setup Utility</i> .....	25
<i>Resetting the Default CMOS Values</i> .....	26
Using BIOS.....	27
<i>Standard CMOS Setup</i> .....	28
<i>Advanced Setup</i> .....	30
<i>Advanced Chipset Setup</i> .....	32
<i>Integrated Peripherals</i> .....	33
<i>Power Management Setup</i> .....	34

<i>PCI/PnP Setup</i> .....	36
<i>PC Health Status</i> .....	36
<i>Frequency/Voltage Control</i> .....	41
<i>Load Default Settings</i> .....	42
<i>Supervisor Password</i> .....	42
<i>User Password</i> .....	43
<i>Save &amp; Exit Setup</i> .....	43
<i>Exit Without Saving</i> .....	43
<i>Updating the BIOS</i> .....	44
 Chapter 4	<b>45</b>
<b>Using the Motherboard Software</b>	<b>45</b>
About the Software DVD-ROM/CD-ROM.....	45
Auto-installing under Windows Vista/7.....	45
<i>Running Setup</i> .....	46
Manual Installation.....	48
Utility Software Reference.....	48
 Chapter 5	<b>49</b>
<b>Setting Up eJIFFY</b>	<b>49</b>
Introduction.....	49
Installation and BIOS Setup.....	50
Entering eJIFFY.....	53
Features Icons.....	54
Usage FAQ.....	55
 Chapter 6	<b>63</b>
<b>Trouble Shooting</b>	<b>63</b>
Start up problems during assembly.....	63
Start up problems after prolong use.....	64
Maintenance and care tips.....	64
Basic Troubleshooting Flowchart.....	65

## Chapter 1

### *Introducing the Motherboard*

---

#### **Introduction**

Thank you for choosing the G41T-M6 motherboard. This motherboard is a high performance, enhanced function motherboard designed to support the LGA775 socket Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron® 400 series processors for high-end business or personal desktop markets.

The motherboard incorporates the Intel® G41 Northbridge (NB) and Intel® ICH7 Southbridge (SB) chipsets. The Northbridge supports a Front Side Bus (FSB) frequency of 1333/1066/800 MHz using a scalable FSB Vcc\_CPU. The memory controller supports DDR3 memory DIMM frequencies of 1066. It supports two DDR3 sockets with up to maximum memory of 8 GB. DDR3 Maximum memory bandwidth of 12.8 GB/s in dual-channel symmetric mode assuming DDR3 1066 MHz. High resolution graphics via one PCI Express x16 slot, intended for Graphics Interface, is fully compliant to the PCI Express Gen 1.

The ICH7 Southbridge supports one PCI slot which is PCI v2.3 compliant. In addition, two PCI Express x1 slots are supported, fully compliant to the PCI Express Base Specification revision 1.0a. It implements an EHCI compliant interface that provides 480 Mb/s bandwidth for eight USB 2.0 ports (four USB ports and two USB 2.0 headers support additional four USB ports). One onboard IDE connector supports two IDE devices in Ultra ATA100/66/33 mode. The Southbridge integrates a Serial ATA host controller, supporting four SATA ports with maximum transfer rate up to 3.0 Gb/s each.

The motherboard is equipped with advanced full set of I/O ports in the rear panel, including PS/2 mouse and keyboard connectors, one optional DVI port, one VGA port, one optional LPT port, four USB ports, one LAN port, and audio jacks for microphone, line-in and line-out.

## Feature

### Processor

The motherboard uses an LGA775 type of Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron® 400 series processors that carries the following features:

- Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron® 400 series processors
- Supports a system bus (FSB) of 1333/1066/800 MHz
- Supports “Hyper-Threading” technology CPU

“Hyper-Threading” technology enables the operating system into thinking it’s hooked up to two processors, allowing two threads to be run in parallel, both on separate “logical” processors within the same physical processor.



*This board supports CPU up to 95W TDP.*

### Chipset

The Intel® G41 Northbridge (NB) and Intel® ICH7 Southbridge (SB) chipsets are based on an innovative and scalable architecture with proven reliability and performance.

- |                  |  |
|------------------|--|
| <b>G41 (NB)</b>  | <ul style="list-style-type: none"> <li>• Supports 36-bit host bus addressing, allowing the CPU to access the entire 64 GB of the memory address space</li> <li>• 2 GB/s point-to-point Direct Media Interface (DMI) to ICH7 (1 GB/s each direction)</li> <li>• Supports 1-Gb, 512 Mb DDR3 DRAM technologies for x8 and x16 devices</li> <li>• One, 16-lane (x16) PCI Express port intended for external device attach, fully compatible to the PCI Express Gen 1</li> <li>• An integrated graphics device (IGD) delivering cost competitive 3D, 2D and video capabilities</li> <li>• Microsoft DX10 and 128 MB share memory are supported</li> </ul> |
| <b>ICH7 (SB)</b> | <ul style="list-style-type: none"> <li>• Enhanced DMA Controller, interrupt controller, and timer functions</li> <li>• Compliant with PCI Express Base Specification, Revision 1.0a</li> <li>• Compliant with PCI v2.3 specification</li> <li>• Integrated SATA 3.0 Gb/s Host Controller</li> <li>• Integrated USB 2.0 Host Controller supporting up to eight USB 2.0 ports</li> <li>• Integrated IDE controller supports Ultra ATA 100/66/33</li> </ul>   |

### Memory

- Supports DDR3 1066 DDR3 SDRAM with dual-channel architecture
- Accommodates two unbuffered DIMMs
- 2 x 240-pin DDR3 DIMM sockets support up to 8 GB

Introducing the Motherboard

### Onboard LAN (optional)

- PCI Express base 1.1 compliant
- Integrated PHY for 10/100/1000 Mbps
- IEEE 802.3x compliant flow control support
- IEEE 802.3ab Auto-Negotiation support
- IEEE 802.3ab PHY compliance and compatibility

- PCI Express base 1.1 compliant
- Integrated PHY for 10/100 Mbps
- IEEE 802.3x compliant flow control support
- IEEE 802.3ab Auto-Negotiation support

### Audio (optional)

This motherboard may support either of the following Audio chipsets:

- 5.1 Channel High Definition Audio Codec
- Exceeds Microsoft Windows Logo Program (WLP) Requirements
- ADCs support 44.1K/48K/88.2K/96K/192KHz sample rate
- Power Support: Digital: 3.3V; Analog: 5.0V

- 5.1 Channel High Definition Audio Codec
- ADCs support 44.1k/48k/96kHz sample rate
- Meets Microsoft WLP 3.10 Vista premium and mobile PCs audio requirements
- Direct Sound 3D™ compatible

- 7.1 channel High Definition Audio Codec
- Compliant with Intel High Definition Audio Specification Rev.1.0
- Exceeds Microsoft Windows Logo Program (WLP) Requirements
- ADCs support 44.1K/48K/88.2K/96K/192KHz sample rate

### Expansion Options

The motherboard comes with the following expansion options:

- One PCI Express x16 slot for Graphic Interface
- Two PCI Express x1 slots
- One 32-bit PCI v2.3 compliant slot
- One IDE connector that supports two IDE devices
- Four 7-pin SATA connectors

### Integrated I/O

The motherboard has a full set of I/O ports and connectors:

- Two PS/2 ports for mouse and keyboard
- One optional parallel port
- One optional DVI port
- One VGA port
- Four USB ports
- One LAN port
- Audio jacks for microphone, line-in and line-out

## Introducing the Motherboard

## BIOS Firmware

This motherboard uses AMI BIOS that enables users to configure many system features including the following:

- Power management
- Wake-up alarms
- CPU parameters
- CPU and memory timing

The firmware can also be used to set parameters for different processor clock speeds.




*1. Some hardware specifications and software items are subject to change without prior notice.*

*2. Due to chipset limitation, we recommend that motherboard be operated in the ambience between 0 and 50° C.*



## Motherboard Components

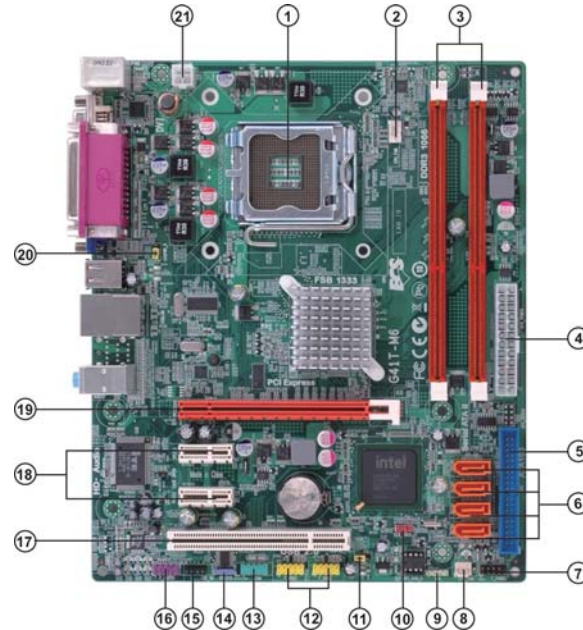

**Table of Motherboard Components**

LABEL	COMPONENTS
1. CPU Socket	LGA775 socket for Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron® 400 series processors
2. CPU_FAN	CPU cooling fan connector
3. DDR3_1~2	240-pin DDR3 SDRAM slots
4. ATX_POWER	Standard 24-pin ATX power connector
5. IDE	Primary IDE channel
6. SATA1~4	Serial ATA connectors
7. F_PANEL	Front panel switch/LED header
8. SYS_FAN	System cooling fan connector
9. SPK	Speaker header
10. CLR_CMOS	Clear CMOS jumper
11. USBPWR_F	Front panel USB power select jumper
12. F_USB1~2	Front panel USB headers
13. COM	Onboard serial port header
14. SPDIF_O	SPDIF out header
15. CD_IN	Analog audio input header
16. F_AUDIO	Front panel audio header
17. PCI1	32-bit add-on card slot
18. PCIE1~2	PCI Express x1 slots
19. PCIE16	PCI Express x16 graphics card slot
20. USBPWR_R	Rear panel USB PS/2 power select jumper
21. ATX12V	4-pin +12V power connector

This concludes Chapter 1. The next chapter explains how to install the motherboard.

## Introducing the Motherboard

*Memo*

Introducing the Motherboard

## Chapter 2

### *Installing the Motherboard*

---

#### **Safety Precautions**

- Follow these safety precautions when installing the motherboard
- Wear a grounding strap attached to a grounded device to avoid damage from static electricity
- Discharge static electricity by touching the metal case of a safely grounded object before working on the motherboard
- Leave components in the static-proof bags they came in
- Hold all circuit boards by the edges. Do not bend circuit boards

#### **Choosing a Computer Case**

There are many types of computer cases on the market. The motherboard complies with the specifications for the Micro ATX system case. First, some features on the motherboard are implemented by cabling connectors on the motherboard to indicators and switches on the system case. Make sure that your case supports all the features required. Secondly, this motherboard supports two enhanced IDE drives. Make sure that your case has sufficient power and space for all drives that you intend to install.

Most cases have a choice of I/O templates in the rear panel. Make sure that the I/O template in the case matches the I/O ports installed on the rear edge of the motherboard.


This motherboard carries a Micro ATX form factor of 244 x 204 mm. Choose a case that accommodates this form factor.

#### **Installing the Motherboard in a Case**

Refer to the following illustration and instructions for installing the motherboard in a case.

Most system cases have mounting brackets installed in the case, which correspond the holes in the motherboard. Place the motherboard over the mounting brackets and secure the motherboard onto the mounting brackets with screws.

Ensure that your case has an I/O template that supports the I/O ports and expansion slots on your motherboard.

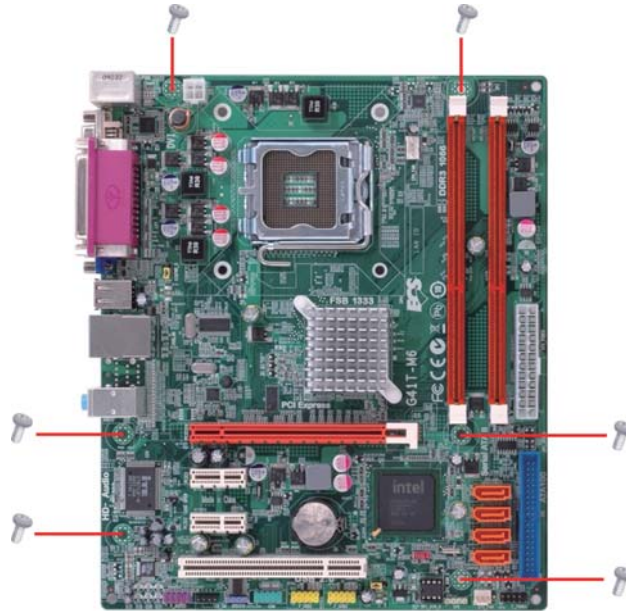

*Do not over-tighten the screws as this can stress the motherboard.*

## Checking Jumper Settings

This section explains how to set jumpers for correct configuration of the motherboard.

### Setting Jumpers

Use the motherboard jumpers to set system configuration options. Jumpers with more than one pin are numbered. When setting the jumpers, ensure that the jumper caps are placed on the correct pins.

The illustrations show a 2-pin jumper. When the jumper cap is placed on both pins, the jumper is **SHORT**. If you remove the jumper cap, or place the jumper cap on just one pin, the jumper is **OPEN**.




**SHORT**



**OPEN**


This illustration shows a 3-pin jumper. Pins 1 and 2 are **SHORT**.






## Installing the Motherboard

### Checking Jumper Settings

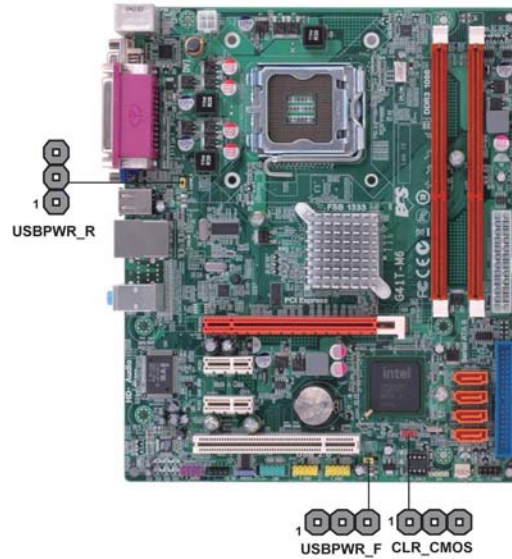The following illustration shows the location of the motherboard jumpers. Pin 1 is labeled.



### Jumper Settings

Jumper	Type	Description	Setting (default)	
CLR_CMOS	3-pin	Clear CMOS	1-2: NORMAL 2-3: CLEAR Before clearing the CMOS, make sure to turn off the system.	1  CLR_CMOS
USBPWR_F	3-pin	Front Panel USB Power Select Jumper	1-2: VCC 2-3: 5VSB	1  USBPWR_F
USBPWR_R	3-pin	Rear USB PS/2 Power Select Jumper	1-2: VCC 2-3: 5VSB	1  USBPWR_R



1. To avoid the system instability after clearing CMOS, we recommend users to enter the main BIOS setting page to “Load Default Settings” and then “Save and Exit Setup”.
2. Make sure the power supply provides enough 5VSB voltage before selecting the 5VSB function.
3. It is required that users place the USBPWR\_F & USBPWR\_R cap onto 2-3 pin rather than 1-2 pin as default if you want to wake up the computer by USB/PS2 KB/Mouse.

### Installing the Motherboard

## Installing Hardware

### *Installing the Processor*



*Caution: When installing a CPU heatsink and cooling fan make sure that you DO NOT scratch the motherboard or any of the surface-mount resistors with the clip of the cooling fan. If the clip of the cooling fan scrapes across the motherboard, you may cause serious damage to the motherboard or its components.*

*On most motherboards, there are small surface-mount resistors near the processor socket, which may be damaged if the cooling fan is carelessly installed.*

*Avoid using cooling fans with sharp edges on the fan casing and the clips. Also, install the cooling fan in a well-lit work area so that you can clearly see the motherboard and processor socket.*

### **Before installing the Processor**

This motherboard automatically determines the CPU clock frequency and system bus frequency for the processor. You may be able to change the settings in the system Setup Utility. We strongly recommend that you do not over-clock processors or other components to run faster than their rated speed.



*Warning:*

*1. Over-clocking components can adversely affect the reliability of the system and introduce errors into your system. Over-clocking can permanently damage the motherboard by generating excess heat in components that are run beyond the rated limits.*

*2. Always remove the AC power by unplugging the power cord from the power outlet before installing or removing the motherboard or other hardware components.*

This motherboard has an LGA775 socket. When choosing a processor, consider the performance requirements of the system. Performance is based on the processor design, the clock speed and system bus frequency of the processor, and the quantity of internal cache memory and external cache memory.

## Installing the Motherboard

## CPU Installation Procedure

The following illustration shows CPU installation components.

- A. Read and follow the instructions shown on the sticker on the CPU cap.
- B. Unload the cap
  - Use thumb & forefinger to hold the lifting tab of the cap.
  - Lift the cap up and remove the cap completely from the socket.
- C. Open the load plate
  - Use thumb & forefinger to hold the hook of the lever, pushing down and pulling aside unlock it.
  - Lift up the lever.
  - Use thumb to open the load plate. Be careful not to touch the contacts.
- D. Install the CPU on the socket
  - Orientate CPU package to the socket. Make sure you match triangle marker to pin 1 location.
- E. Close the load plate
  - Slightly push down the load plate onto the tongue side, and hook the lever.
  - CPU is locked completely.
- F. Apply thermal grease on top of the CPU.
- G. Fasten the cooling fan supporting base onto the CPU socket on the motherboard.
- H. Make sure the CPU fan is plugged to the CPU fan connector. Please refer to the CPU cooling fan user's manual for more detail installation procedure.



1. To achieve better airflow rates and heat dissipation, we suggest that you use a high quality fan with 3800 rpm at least. CPU fan and heatsink installation procedures may vary with the type of CPU fan/heatsink supplied. The form and size of fan/heatsink may also vary.

2. DO NOT remove the CPU cap from the socket before installing a CPU.

3. Return Material Authorization (RMA) requests will be accepted only if the motherboard comes with the cap on the LGA775 socket.

## Installing the Motherboard

**Installing Memory Modules**

This motherboard accommodates two memory modules. It can support two 240-pin DDR3 1066. The total memory capacity is 8 GB.

**DDR3 SDRAM memory module table**

Memory module	Memory Bus
DDR3 1066	533 MHz

You must install at least one module in any of the two slots. The total memory capacity is up to 8 GB.




*Do not remove any memory module from its antistatic packaging until you are ready to install it on the motherboard. Handle the modules only by their edges. Do not touch the components or metal parts. Always wear a grounding strap when you handle the modules.*

**Installation Procedure**

Refer to the following to install the memory modules.

- 1 This motherboard supports unbuffered DDR3 SDRAM .
- 2 Push the latches on each side of the DIMM slot down.
- 3 Align the memory module with the slot. The DIMM slots are keyed with notches and the DIMMs are keyed with cutouts so that they can only be installed correctly.
- 4 Check that the cutouts on the DIMM module edge connector match the notches in the DIMM slot.
- 5 Install the DIMM module into the slot and press it firmly down until it seats correctly. The slot latches are levered upwards and latch on to the edges of the DIMM.
- 6 Install any remaining DIMM modules.

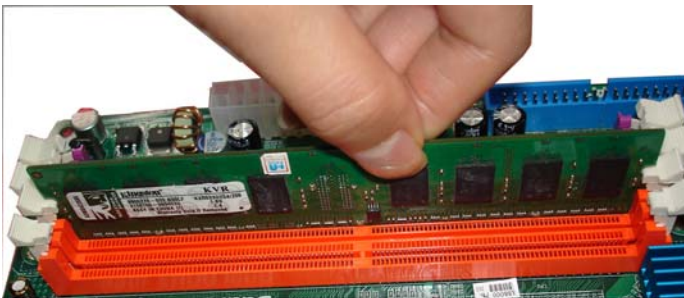

*\* For reference only*



**Table A: DDR3 (memory module) QVL (Qualified Vendor List)**

The following DDR3 memory modules have been tested and qualified for use with this motherboard.

Type	Size	Vendor	Module Name
DDR3 1066	512 MB	ELPIDA	PC3-8500U-7-00-AP
	1 GB	A-data	M3OSS3H3I3120B5Z
		Corsair	CM3X1024-1066C7
		Hynix	HYMT112U64ZNF8-G8 AA
			HMT112U6AFP8C-G7N0 AA
		Kingston	KVR1066D3N7/1G
		Micron	MT8JTF12864AY-1G1D1
		Ramaxel	RMR1810NA48E7F-1066-LF
		Samsung	M378B2873DZ1-CF8
			Golden Bar M378B2873DZ1-CF8 0818
		Unifosa	GU502202EP0200
	2 GB	Elixir	M2F2G64CB8HA4N-BE
		Hynix	HMT125U6AFP8C-G7N0 AA
			HYMT125U64ZNF8-G8 AA
		Kingston	KVR1066D3N7
		Micron	MT16JTF25664AY-1G1D1
		Samsung	M378B5673DZ1-CF8
			GU512302EP0200
			M378B5673DZ1-CF8 0842
DDR3 1333	1 GB	A-DATA	M3OAD6H3I3120F1C5E
			AD31333001GOU(AD6311A08)
		Apacer	AHU01GFA33C9N1C
		Hynix	HMT112U6AFP8C-H9N0 AA
		KingMax	FLFD45F-B8KG9 NAES
		Kingston	KVR1333D3N9/1G
		Micron	MT8JTF12864AY-1G4D1
		Ramaxel	RMR1810KD48E7F-1333
		Samsung	M378B2873EH1-CH9
			M378B2873DZ1-CH9
		Unifosa	GU502203EP0200

**Table B: DDR3 (memory module) QVL (Qualified Vendor List)**


The following DDR3 memory modules have been tested and qualified for use with this motherboard.

Type	Size	Vendor	Module Name
DDR3 1333	2 GB	A-DATA	AD31333002GOU(AD6311B16)
			M3OAD6H3J4130F1C5E
		elixir	M2F2G64CB8HA4N-CG 0903.TW
		Hynix	HMT125U6AFP8C-H9N0 AA
		Kingston	KVR1333D3N9/2G
		Micron	MT16JTF25664AY-1G4D1
		Ramaxel	RMR186EA48D8F-1333
		Samsung	M378B5673EH1-CH9
			M378B5673DZ1-CH9
		Unifosa	GU512303EP0200
	4 GB	Kingston	KVR1333D3N9
DDR3 1600	1 GB	Kingston	KHX12800D3K3/3GX
DDR3 1800	1 GB	Kingston	KHX14400D3K3/3GX

## Expansion Slots

### Installing Add-on Cards

The slots on this motherboard are designed to hold expansion cards and connect them to the system bus. Expansion slots are a means of adding or enhancing the motherboard's features and capabilities. With these efficient facilities, you can increase the motherboard's capabilities by adding hardware that performs tasks that are not part of the basic system.

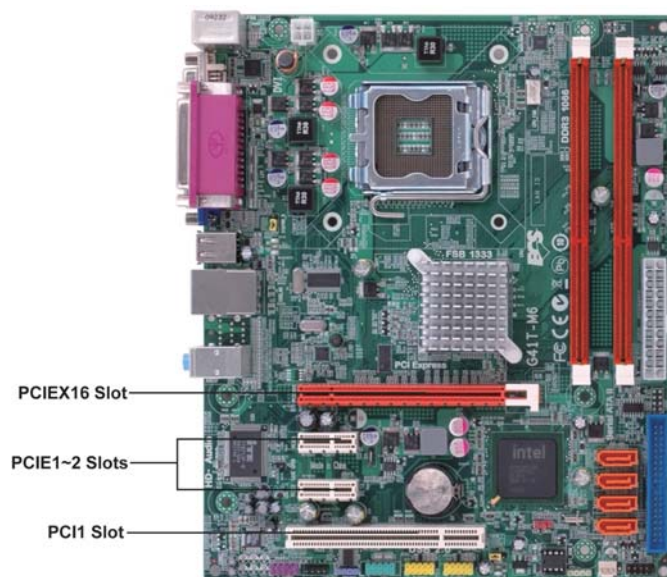

**PCIEX16 Slot** The PCI Express slot is used to install an external PCI Express graphics card that is fully compliant to the PCI Express Gen 1.

**PCIEX1~2 Slots** The PCI Express x1 slots are fully compliant to the PCI Express Base Specification revision 1.0a.

**PCI Slot** This motherboard is equipped with one standard PCI slot. PCI stands for Peripheral Component Interconnect and is a bus standard for expansion cards, which for the most part, is a supplement of the older ISA bus standard. The PCI slot on this board is PCI v2.3 compliant.



*Before installing an add-on card, check the documentation for the card carefully. If the card is not Plug and Play, you may have to manually configure the card before installation.*

## Installing the Motherboard

Follow these instructions to install an add-on card:

- 1 Remove a blanking plate from the system case corresponding to the slot you are going to use.
- 2 Install the edge connector of the add-on card into the expansion slot. Ensure that the edge connector is correctly seated in the slot.
- 3 Secure the metal bracket of the card to the system case with a screw.




1. For some add-on cards, for example graphics adapters and network adapters, you have to install drivers and software before you can begin using the add-on card.
2. The onboard PCI interface does not support 64-bit SCSI cards.

## Installing the Motherboard

### Connecting Optional Devices

Refer to the following for information on connecting the motherboard's optional devices:

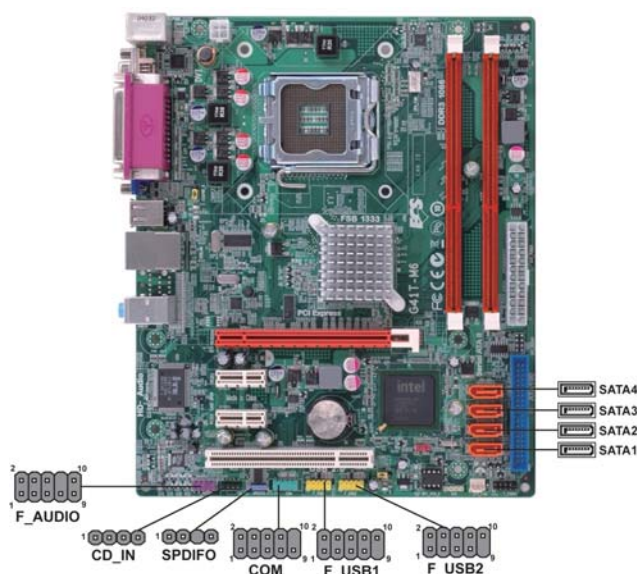

#### SATA1~4: Serial ATA connectors

These connectors are used to support the new Serial ATA devices for the highest data transfer rates (3.0 Gb/s), simpler disk drive cabling and easier PC assembly. It eliminates limitations of the current Parallel ATA interface. But maintains register compatibility and software compatibility with Parallel ATA.

Pin	Signal Name	Pin	Signal Name
1	Ground	2	TX+
3	TX-	4	Ground
5	RX-	6	RX+
7	Ground	-	-

#### F\_AUDIO: Front Panel Audio header for Azalia

This header allows the user to install auxiliary front-oriented microphone and line-out ports for easier access.

Pin	Signal Name	Pin	Signal Name
1	PORT 1L	2	AUD_GND
3	PORT 1R	4	PRESENCE#
5	PORT 2R	6	SENSE_SEND
7	AUD_GND	8	KEY
9	PORT 2L	10	SENSE_SEND

Installing the Motherboard

### F\_USB1~2: Front Panel USB headers

The motherboard has four USB ports installed on the rear edge I/O port array. Additionally, some computer cases have USB ports at the front of the case. If you have this kind of case, use auxiliary USB connector to connect the front-mounted ports to the motherboard.

Pin	Signal Name	Function
1	USBPWR	Front Panel USB Power
2	USBPWR	Front Panel USB Power
3	USB_FP_P0-	USB Port 0 Negative Signal
4	USB_FP_P1-	USB Port 1 Negative Signal
5	USB_FP_P0+	USB Port 0 Positive Signal
6	USB_FP_P1+	USB Port 1 Positive Signal
7	GND	Ground
8	GND	Ground
9	Key	No pin
10	USB_FP_OC0	Overcurrent signal



Please make sure that the USB cable has the same pin assignment as indicated above. A different pin assignment may cause damage or system hang-up.

### CD\_IN: Analog Audio Input header

Pin	Signal Name	Function
1	CD_L	CD In left channel
2	GND	Ground
3	GND	Ground
4	CD_R	CD In right channel

### SPDIFO: SPDIF out header

This is an optional header that provides an S/PDIF (Sony/Philips Digital Interface) output to digital multimedia device through optical fiber or coaxial connector.

Pin	Signal Name	Function
1	SPDIF	SPDIF digital output
2	+5VA	5V analog Power
3	Key	No pin
4	GND	Ground

### COM: Onboard serial port header

Connect a serial port extension bracket to this header to add a second serial port to your system.

Pin	Signal Name	Function
1	DCDB	Data Carrier Detect
2	SINB	Serial Input
3	SOUTB	UART B Serial Output
4	DTRB	UART B Data Terminal Ready
5	GND	Ground
6	DSRB	Data Set Ready
7	RTSB	UART B Request to Send
8	CTSB	Clear to Send
9	RI	Ring Indicator
10	Key	No pin

### *Installing a Hard Disk Drive/CD-ROM/SATA Hard Drive*


This section describes how to install IDE devices such as a hard disk drive and a CD-ROM drive.

#### About IDE Devices

Your motherboard has one IDE channel interface.

#### IDE: IDE Connector

This motherboard supports four high data transfer SATA ports with each runs up to 3.0 Gb/s. To get better system performance, we recommend users connect the CD-ROM to the IDE channel, and set up the hard drives on the SATA ports.

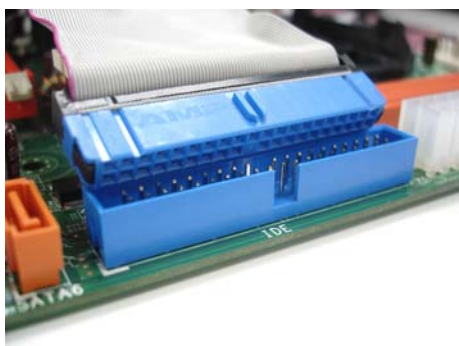

IDE devices enclose jumpers or switches used to set the IDE device as MASTER or SLAVE. Refer to the IDE device user's manual. Installing two IDE devices on one cable, ensure that one device is set to MASTER and the other device is set to SLAVE. The documentation of your IDE device explains how to do this.

## Installing the Motherboard

### About SATA Connectors

Your motherboard features four SATA connectors supporting a total of four drives. SATA refers to Serial ATA (Advanced Technology Attachment) is the standard interface for the IDE hard drives which are currently used in most PCs. These connectors are well designed and will only fit in one orientation. Locate the SATA connectors on the motherboard and follow the illustration below to install the SATA hard drives.

### Installing Serial ATA Hard Drives

To install the Serial ATA (SATA) hard drives, use the SATA cable that supports the Serial ATA protocol. This SATA cable comes with an SATA power cable. You can connect either end of the SATA cable to the SATA hard drive or the connector on the motherboard.



**SATA cable (optional)**



**SATA power cable (optional)**

Refer to the illustration below for proper installation:

- 1 Attach either cable end to the connector on the motherboard.
- 2 Attach the other cable end to the SATA hard drive.
- 3 Attach the SATA power cable to the SATA hard drive and connect the other end to the power supply.




*This motherboard does not support the “Hot-Plug” function.*



## Connecting I/O Devices

The backplane of the motherboard has the following I/O ports:

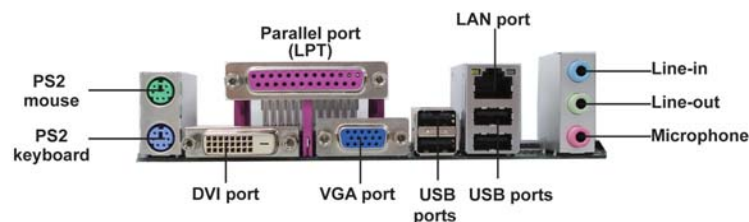


<b>PS2 Mouse</b>	Use the upper PS/2 port to connect a PS/2 pointing device.
<b>PS2 Keyboard</b>	Use the lower PS/2 port to connect a PS/2 keyboard.
<b>DVI Port (optional)</b>	Use the DVI port to connect the monitor.
<b>Parallel Port (LPT) (optional)</b>	Use LPT to connect printers or other parallel communications devices.
<b>VGA Port</b>	Connect your monitor to the VGA port.
<b>LAN Port</b>	Connect an RJ-45 jack to the LAN port to connect your computer to the Network.
<b>USB Ports</b>	Use the USB ports to connect USB devices.
<b>Audio Ports</b>	Use the three audio ports to connect audio devices. The first jack is for stereo line-in signal. The second jack is for stereo line-out signal. The third jack is for microphone.

## Installing the Motherboard

## Connecting Case Components


After you have installed the motherboard into a case, you can begin connecting the motherboard components. Refer to the following:

- 1 Connect the CPU cooling fan cable to **CPU\_FAN**.
- 2 Connect the standard power supply connector to **ATX\_POWER**.
- 3 Connect the case switches and indicator LEDs to the **F\_PANEL**.
- 4 Connect the system cooling fan connector to **SYS\_FAN**.
- 5 Connect the case speaker cable to **SPK**.
- 6 Connect the auxiliary case power supply connector to **ATX12V**.

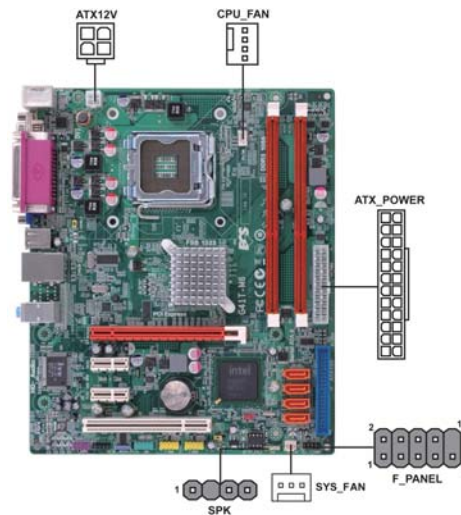

### Connecting 24-pin power cable

The ATX\_POWER 24-pin connector allows you to connect to ATX v2.x power supply.




*24-pin power cable*

With ATX v2.x power supply, users please note that when installing 24-pin power cable, the latches of power cable and the ATX\_POWER match perfectly.



### Connecting 4-pin power cable

The ATX12V power connector is used to provide power to the CPU.



*4-pin power cable*

When installing 4-pin power cable, the latches of power cable and the ATX12V match perfectly.

**CPU\_FAN: CPU Cooling FAN Power Connector**

Pin	Signal Name	Function
1	GND	System Ground
2	+12V	Power +12V
3	Sense	Sensor
4	PWM	PWM



Users please note that the fan connector supports the CPU cooling fan of 1.1A ~ 2.2A (26.4W max) at +12V.

**ATX\_POWER: ATX 24-pin Power Connector**

Pin	Signal Name	Pin	Signal Name
1	+3.3V	13	+3.3V
2	+3.3V	14	-12V
3	Ground	15	Ground
4	+5V	16	PS_ON
5	Ground	17	Ground
6	+5V	18	Ground
7	Ground	19	Ground
8	PWRGD	20	-5V
9	+5VSB	21	+5V
10	+12V	22	+5V
11	+12V	23	+5V
12	+3.3V	24	Ground

**SYS\_FAN: System Cooling FAN Power Connector**

Pin	Signal Name	Function
1	GND	System Ground
2	+12V	Power +12V
3	Sense	Sensor

**SPK: Internal speaker**

Pin	Signal Name
1	VCC
2	Key
3	NC
4	Signal


**ATX12V: ATX 12V Power Connector**

Pin	Signal Name
1	Ground
2	Ground
3	+12V
4	+12V

Installing the Motherboard

**Front Panel Header**

The front panel header (F\_PANEL) provides a standard set of switch and LED headers commonly found on ATX or micro-ATX cases. Refer to the table below for information:



Pin	Signal	Function	Pin	Signal	Function
1	HD_LED_P	Hard disk LED (+)	2	FP PWR/SLP	*MSG LED (+)
3	HD_LED_N	Hard disk LED (-)	4	FP PWR/SLP	*MSG LED (-)
5	RST_SW_N	Reset Switch (-)	6	PWR_SW_P	Power Switch (+)
7	RST_SW_P	Reset Switch (+)	8	PWR_SW_N	Power Switch (-)
9	RSVD	Reserved	10	Key	No pin

*\* MSG LED (dual color or single color)*

**Hard Drive Activity LED**

Connecting pins 1 and 3 to a front panel mounted LED provides visual indication that data is being read from or written to the hard drive. For the LED to function properly, an IDE drive should be connected to the onboard IDE interface. The LED will also show activity for devices connected to the SCSI (hard drive activity LED) connector.

**Power/Sleep/Message waiting LED**

Connecting pins 2 and 4 to a single or dual-color, front panel mounted LED provides power on/off, sleep, and message waiting indication.

**Reset Switch**

Supporting the reset function requires connecting pins 5 and 7 to a momentary-contact switch that is normally open. When the switch is closed, the board resets and runs POST.

**Power Switch**

Supporting the power on/off function requires connecting pins 6 and 8 to a momentary-contact switch that is normally open. The switch should maintain contact for at least 50 ms to signal the power supply to switch on or off. The time requirement is due to internal de-bounce circuitry. After receiving a power on/off signal, at least two seconds elapses before the power supply recognizes another on/off signal.

This concludes Chapter 2. The next chapter covers the BIOS.

## Chapter 3

### *Using BIOS*

---

#### **About the Setup Utility**

The computer uses the latest “American Megatrends Inc.” BIOS with support for Windows Plug and Play. The CMOS chip on the motherboard contains the ROM setup instructions for configuring the motherboard BIOS.

The BIOS (Basic Input and Output System) Setup Utility displays the system’s configuration status and provides you with options to set system parameters. The parameters are stored in battery-backed-up CMOS RAM that saves this information when the power is turned off. When the system is turned back on, the system is configured with the values you stored in CMOS.

The BIOS Setup Utility enables you to configure:

- Hard drives, diskette drives and peripherals
- Video display type and display options
- Password protection from unauthorized use
- Power Management features

The settings made in the Setup Utility affect how the computer performs. Before using the Setup Utility, ensure that you understand the Setup Utility options.

This chapter provides explanations for Setup Utility options.

#### ***The Standard Configuration***

A standard configuration has already been set in the Setup Utility. However, we recommend that you read this chapter in case you need to make any changes in the future.

This Setup Utility should be used:

- when changing the system configuration
- when a configuration error is detected and you are prompted to make changes to the Setup Utility
- when trying to resolve IRQ conflicts
- when making changes to the Power Management configuration
- when changing the password or making other changes to the Security Setup


#### ***Entering the Setup Utility***

When you power on the system, BIOS enters the Power-On Self Test (POST) routines. POST is a series of built-in diagnostics performed by the BIOS. After the POST routines are completed, the following message appears:

**Press DEL to enter SETUP**

Using BIOS



Press the delete key to access the BIOS Setup Utility.

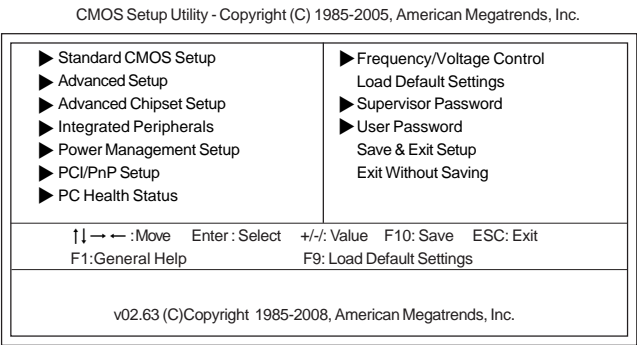

***Resetting the Default CMOS Values***

When powering on for the first time, the POST screen may show a “CMOS Settings Wrong” message. This standard message will appear following a clear CMOS data at factory by the manufacturer. You simply need to Load Default Settings to reset the default CMOS values.

Note: Changes to system hardware such as different CPU, memories, etc. may also trigger this message.

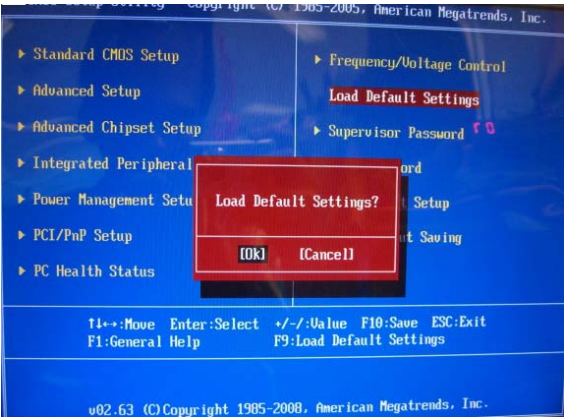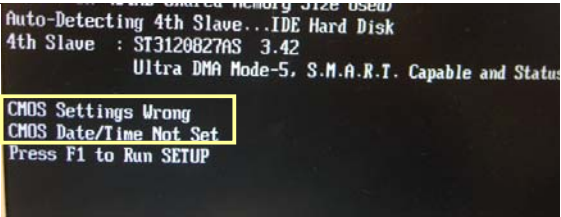

Using BIOS

## Using BIOS

When you start the Setup Utility, the main menu appears. The main menu of the Setup Utility displays a list of the options that are available. A highlight indicates which option is currently selected. Use the cursor arrow keys to move the highlight to other options. When an option is highlighted, execute the option by pressing <Enter>.

Some options lead to pop-up dialog boxes that prompt you to verify that you wish to execute that option. Other options lead to dialog boxes that prompt you for information.

Some options (marked with a triangle ►) lead to submenus that enable you to change the values for the option. Use the cursor arrow keys to scroll through the items in the submenu.

In this manual, default values are enclosed in parenthesis. Submenu items are denoted by a triangle ►.



*The default BIOS setting for this motherboard apply for most conditions with optimum performance. We do not suggest users change the default values in the BIOS setup and take no responsibility to any damage caused by changing the BIOS settings.*

### BIOS Navigation Keys

The BIOS navigation keys are listed below:

KEY	FUNCTION
<b>ESC</b>	Exits the current menu
<b>↑↓→←</b>	Scrolls through the items on a menu
<b>+/-</b>	Modifies the selected field's values
<b>Enter</b>	Select
<b>F9</b>	Loads an optimized setting for better performance
<b>F10</b>	Saves the current configuration and exits setup
<b>F1</b>	Displays a screen that describes all key functions



For the purpose of better product maintenance, the manufacture reserves the right to change the BIOS items presented in this manual. The BIOS setup screens shown in this chapter are for reference only and may differ from the actual BIOS. Please visit the manufacture’s website for updated manual.

**Standard CMOS Setup**

This option displays basic information about your system.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Standard CMOS Setup

Date	Fri 06/26/2009	Help Item
Time	00:01:48	Use [ENTER], [TAB] or [SHIFT-TAB] to select a field.
▶ Primary IDE Master	Not Detected	Use [+] or [-] to configure system Date.
▶ Primary IDE Slave	Not Detected	
▶ SATA1	Hard Disk	
▶ SATA2	Not Detected	
▶ SATA3	Not Detected	
▶ SATA4	Not Detected	
IDE BusMaster	Enabled	

↑↓ → ← : Move    Enter : Select    +/- : Value    F10: Save    ESC: Exit  
F1: General Help    F9: Load Default Settings

**Date & Time**

The Date and Time items show the current date and time on the computer. If you are running a Windows OS, these items are automatically updated whenever you make changes to the Windows Date and Time Properties utility.



### ► Primary IDE Master/Slave; SATA1~4

Your computer has one IDE channel and each channel can be installed with one or two devices (Master and Slave). In addition, this motherboard supports four SATA channels and each channel allows one SATA device to be installed. Use these items to configure each device on the SATA channel.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Primary IDE Master

Primary IDE Master		Help Item
Device	: ATAPI CDROM	Select the type of device connected to the system.
Vendor	: DVD-ROM DDU1632	
LBA Mode	: Supported	
PIO Mode	: 4	
Async DMA	: MultiWord DMA-2	
Ultra DMA	: Ultra DMA-2	
Type	Auto	
PIO Mode	Auto	
DMA Mode	Auto	

↑↓ → ← : Move Enter : Select +/- : Value F10: Save ESC: Exit  
F1: General Help F9: Load Default Settings

#### **Type (Auto)**

Use this item to configure the type of the IDE device that you specify. If the feature is enabled, it will enhance hard disk performance by reading or writing more data during each transfer.

#### **PIO Mode (Auto)**

Use this item to set the PIO mode to enhance hard disk performance by optimizing the hard disk timing.

#### **DMA Mode (Auto)**

DMA capability allows user to improve the transfer-speed and data-integrity for compatible IDE devices.

Press <Esc> to return to the Standard CMOS Setup page.

#### **IDE BusMaster (Enabled)**

This item enables or disables the DMA under DOS mode. We recommend you to leave this item at the default value.

Press <Esc> to return to the main menu setting page.

Advanced Setup

This page sets up more advanced information about your system. Handle this page with caution. Any changes can affect the operation of your computer.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Advanced Setup

		Help Item
Thermal Management	Enabled	
TM Status	TM1/TM2	
Limit CPUID MaxVal	Disabled	For the processor its CPUID belows 0F41h.
Enhanced Halt (C1E)	Enabled	TM2 only can be enable under below setting.
Intel XD Bit	Disabled	1.Freq.>=3.6GHz FSB800
Intel Virtualization Technol	Enabled	2.Freq.>=2.8GHz FSB533
Intel EIST	Enabled	
Quick Power on Self Test	Enabled	
Boot Up Numlock Status	On	
APIC Mode	Enabled	
1st Boot Device	Hard Disk Drive	
2nd Boot Device	CD/DVD	
3rd Boot Device	Removable Dev.	
► Hard Disk Drives	Press Enter	
Boot Other Device	Yes	
ECS eJFFY Function	Disabled	

↑↓←→ : Move    Enter : Select    +/- : Value    F10: Save    ESC: Exit  
F1: General Help    F9: Load Default Settings

Thermal Management (Enabled)

This item displays CPU’s temperature and enables you to set a safe temperature to Prescott CPU.

TM Status (TM1/TM2)

This item shows TM function status if CPU can support TM function.

Limit CPUID MaxVal (Disabled)

Use this item to enable or disable the Max CPU ID value limit. When supports Prescott and LGA775 CPUs, enables this to prevent the system from “rebooting” when trying to install Windows NT 4.0.

Enhanced Halt (C1E) (Enabled)

This item enables or disables enhanced halt (C1E).

Intel XD Bit (Disabled)

This item allows users to enable or disable the Intel XD bit.

Intel Virtualization Technol (Enabled)

Hardware Virtualization Technology enables processor feature for running multiple simultaneous Virtual Machines allowing specialized software applications to run in full isolation of each other.

Intel EIST (Enabled)

This item allows users to enable or disable the EIST (Enhanced Intel SpeedStep technology).

Quick Power on Self Test (Enabled)

Enable this item to shorten the power on testing (POST) and have your system start up faster. You might like to enable this item after you are confident that your system hardware is operating smoothly.

### Boot Up Numlock Status (On)

This item defines if the keyboard Num Lock key is active when your system is started.

### APIC Mode (Enabled)

This item allows you to enable or disable the APIC (Advanced Programmable Interrupt Controller) mode. APIC provides symmetric multi-processing (SMP) for systems, allowing support for up to 60 processors.

### 1st/2nd/3rd Boot Device (Hard Disk Drive/CD/DVD/Removable Dev.)

Use this item to determine the device order the computer used to look for an operating system to load at start-up time. The devices showed here will be different depending on the exact devices installed on your motherboard.

#### ► Hard Disk Drives (Press Enter)

Scroll to this item and press <Enter> to view the following screen:

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Hard Disk Drives

Hard Disk Drives		Help Item
1st Drive	ST31000340AS	Specifies the boot sequence from the available devices.
2nd Drive	SD/MMC Card	

↑↓ → ← : Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Load Default Settings

Press <Esc> to return to the Advanced Setup page.

### Boot Other Device (Yes)

When enabled, the system searches all other possible locations for an operating system if it fails to find one in the devices specified under the First, Second and Third boot devices.

### ECS eJIFFY Function (Disabled)

Use this item to enable or disable the ECS eJIFFY Function. eJIFFY is ECS unique software program for the quick access to the internet without entering O.S. Please refer to Chapter 6 to know more about eJIFFY.

Press <Esc> to return to the main menu setting page.

**Advanced Chipset Setup**

This page sets up more advanced information about your system. Handle this page with caution. Any changes can affect the operation of your computer.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Advanced Chipset Setup

DRAM Frequency	Auto	Help Item
Configure DRAM Timing by SPD	Enabled	Options
Share Memory Size	Enabled, 64MB	
DVMT Memory	256MB	
Memory Remap Feature	Enabled	Auto
HPET	Enabled	667 MHz
		800 MHz

↑↓ → ← : Move    Enter : Select    +/- : Value    F10: Save    ESC: Exit  
F1: General Help                      F9: Load Default Settings

- DRAM Frequency (Auto)**

This item enables users to adjust the DRAM frequency. The default setting is auto and we recommend users leave the setting unchanged. Modify it at will may cause the system to be unstable.
- Configure DRAM Timing by SPD (Enabled)**

When this item is set to enable, the DDR timing is configured using SPD. SPD (Serial Presence Detect) is located on the memory modules, BIOS reads information coded in SPD during system boot up.
- Share Memory Size (Enabled, 64MB)**

This item displays the VGA Share Memory Value.
- DVMT Memory (256MB)**

When set to Fixed Mode, the graphics driver will reserve a fixed portion of the system memory as graphics memory, according to system and graphics requirements.
- Memory Remap Feature (Enabled)**

This item allows you to remap the overlapped PCI memory above the total physical memory if you have a 64 bit OS and 8 GB of RAM.
- HPET (Enabled)**

This item enables or disables HPET (High Precision Event Timer) support.
- Press <Esc> to return to the main menu setting page.

## Integrated Peripherals

This page sets up some parameters for peripheral devices connected to the system.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Integrated Peripherals

Onboard IDE Controller	Enabled	Help Item
Onboard SATA Controller	Enhanced	DISABLED: disables the integrated IDE Controller. ENABLED: enables both Controllers.
Onboard Audio Function	Enabled	
Onboard LAN Function	Enabled	
Onboard LAN Boot ROM	Disabled	
Serial Port1 Address	3F8/IRQ4	
Parallel Port Address	378	
Parallel Port Mode	ECP	
ECP Mode DMA Channel	DMA3	
Parallel Port IRQ	IRQ7	
USB Functions	Enabled	
Legacy USB Support	Enabled	

↑↓ → ← : Move Enter: Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Load Default Settings

### Onboard IDE Controller (Enabled)

Use this item to enable or disable the onboard IDE interface.

### Onboard SATA Controller (Enhanced)

This item allows you to enable or disable the onboard SATA controller.

### Onboard Audio Function (Enabled)

Use this item to enable or disable the onboard audio device.

### Onboard LAN Function (Enabled)

Use this item to enable or disable the onboard LAN function.

### Onboard LAN Boot ROM (Disabled)

Use this item to enable or disable the booting from the onboard LAN or a network add-in card with a remote boot ROM installed.

### Serial Port1 Address (3F8/IRQ4)

Use this item to enable or disable the onboard COM1 serial port, and to assign a port address.

### Parallel Port Address (378)

Use this item to enable or disable the onboard Parallel port, and to assign a port address.

### Parallel Port Mode (ECP)

Use this item to select the parallel port mode. You can select Normal (Standard Parallel Port), ECP (Extended Capabilities Port), EPP (Enhanced Parallel Port), or BPP (Bi-Directional Parallel Port).

### ECP Mode DMA Channel (DMA3)

Use this item to assign the DMA Channel under ECP Mode function.

Using BIOS

**Parallel Port IRQ (IRQ7)**

Use this item to assign IRQ to the parallel port.

**USB Functions (Enabled)**

Use this item to enable or disable the USB function.

**Legacy USB Support (Enabled)**

Use this item to enable or disable support for legacy USB devices.

Press <Esc> to return to the main menu setting page.

**Power Management Setup**

This page sets up some parameters for system power management operation.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Power Management Setup

ACPI Suspend Type	S3	Help Item
PWRON After PWR-Fail	Power Off	Select the ACPI state used for System Suspend.
Resume By RING	Disabled	
Resume By PCI/PCI-E/Lan PME	Disabled	
Resume By USB (S3)	Disabled	
Resume By PS2 KB (S3)	Disabled	
Resume By PS2 MS (S3)	Disabled	
Resume on RTC Alarm	Disabled	

↑↓ → ← : Move   Enter : Select   +/- : Value   F10: Save   ESC: Exit  
F1: General Help   F9: Load Default Settings

**ACPI Suspend Type (S3)**

Use this item to define how your system suspends. In the default, S3, the suspend mode is a suspend to RAM, i.e, the system shuts down with the exception of a refresh current to the system memory.

**PWRON After PWR-Fail (Power Off)**

This item enables your computer to automatically restart or return to its operating status.

**Resume By RING (Disabled)**

An input signal on the serial Ring Indicator (RI) line (in other words, an incoming call on the modem) awakens the system from a soft off state.

**Resume By PCI/PCI-E/Lan PME (Disabled)**

These items specify whether the system will be awakened from power saving modes when activity or input signal of the specified hardware peripheral or component is detected.

**Resume By USB (S3) (Disabled)**

This item allows you to enable/disable the USB device wakeup function from S3/S4 mode.

**Resume By PS2 KB (S3) (Disabled)**

This item enables or disables you to allow keyboard activity to awaken the system from power saving mode.

**Resume By PS2 MS (S3) (Disabled)**

This item enables or disables you to allow mouse activity to awaken the system from power saving mode.

**Resume on RTC Alarm (Disabled)**

The system can be turned off with a software command. If you enable this item, the system can automatically resume at a fixed time based on the system's RTC (realtime clock). Use the items below this one to set the date and time of the wake-up alarm. You must use an ATX power supply in order to use this feature.

Press <Esc> to return to the main menu setting page.

PCI/PnP Setup

This page sets up some parameters for devices installed on the PCI bus and those utilizing the system plug and play capability.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
PCI/PnP Setup

Init Display First	PCI	Help Item
		Select which graphics controller to use as the primary boot device.

↑↓→← : Move    Enter : Select    +/- : Value    F10: Save    ESC: Exit  
F1: General Help                    F9: Load Default Settings

Init Display First (PCI)

Use this item to select which graphics controller to use as the primary boot devices.

Press <Esc> to return to the main menu setting page.

PC Health Status

On motherboards support hardware monitoring, this item lets you monitor the parameters for critical voltages, temperatures and fan speeds.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
PC Health Status

-- System Hardware Monitor -- ▶ Smart Fan Function    Press Enter CPU Fan Speed            : 2163 RPM CPU Vcore                : 1.088 V VDIMM                    : 1.856 V VBAT                      : 3.264 V Case Open Warning        Disabled Chassis Opened           No  -- PECE Mode -- Offset to TCC Activation Temp.: -63	Help Item
--	-----------

↑↓→← : Move    Enter : Select    +/- : Value    F10: Save    ESC: Exit  
F1: General Help                    F9: Load Default Settings



### ► Smart Fan Function (Press Enter)

Scroll to this item and press <Enter> to view the following screen:

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Smart Fan Function

Smart Fan Function	Enabled	Help Item
SMART Fan Mode	Normal	Options
SMART Fan start PWM value	28	Disabled
CPU DeltaT	+3	Enabled
SMART Fan start TEMP. (°C)	43	
SMART Fan Slope PWM value	5 PWM value/°C	
CPU FAN Full Limit Temp(-)	63° C	

↑↓ → ← : Move   Enter : Select   +/- : Value   F10: Save   ESC: Exit  
F1: General Help   F9: Load Default Settings

### **SMART Fan Function (Enabled)**

This item allows you to enable/disable the control of the CPU fan speed by changing the fan voltage.

### **SMART Fan Mode (Normal)**

This item allows you to select the fan mode (Normal, Quiet, Silent, or Manual) for a better operation environment. If you choose Normal mode, the fan speed will be auto adjusted depending on the CPU temperature. If you choose Quiet mode, the fan speed will be auto minimized for quiet environment. If you choose Silent mode, the fan speed will be auto restricted to make system more quietly. If you choose Manual mode, the fan speed will be adjust depending on users' parameters.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Smart Fan Function

		Help Item
Smart Fan Function	Enabled	Normal: auto adjusts depending on the CPU temperature.
SMART Fan Mode	Quiet	
SMART Fan start PWM value	20	
CPU DeltaT	+3	Quiet: auto minimizes fan speed for quiet environment operation.
SMART Fan start TEMP. (°C)	68	
SMART Fan Slope PWM value	14 PWM value/°C	Silent: auto restricts fan speed to make system more quietly.
CPU FAN Full Limit Temp	75° C	
		Manual: the fan adjust depending on user's parameter.

↑↓→← :Move    Enter : Select    +/-: Value    F10: Save    ESC: Exit  
F1: General Help    F9: Load Default Settings

Press <Esc> to return to the Smart Fan Function page.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Smart Fan Function

		Help Item
Smart Fan Function	Enabled	Normal: auto adjusts depending on the CPU temperature.
SMART Fan Mode	Silent	
SMART Fan start PWM value	5	
CPU DeltaT	+3	Quiet: auto minimizes fan speed for quiet environment operation.
SMART Fan start TEMP. (°C)	70	
SMART Fan Slope PWM value	12 PWM value/°C	Silent: auto restricts fan speed to make system more quietly.
CPU FAN Full Limit Temp	80° C	
		Manual: the fan adjust depending on user's parameter.

↑↓→← :Move    Enter : Select    +/-: Value    F10: Save    ESC: Exit  
F1: General Help    F9: Load Default Settings

Press <Esc> to return to the Smart Fan Function page.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Smart Fan Function

		Help Item
Smart Fan Function	Enabled	Normal: auto adjusts depending on the CPU temperature.
SMART Fan Mode	Manual	
SMART Fan start PWM value	5	
CPU DeltaT	+3	Quiet: auto minimizes fan speed for quiet environment operation.
SMART Fan start TEMP. (°C)	70	
SMART Fan Slope PWM value	12 PWM value/°C	Silent: auto restricts fan speed to make system more quietly.
CPU FAN Full Limit Temp	80° C	
		Manual: the fan adjust depending on user's parameter.

↑↓ → ← : Move Enter : Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Load Default Settings

Press <Esc> to return to the Smart Fan Function page.




*ECS supports the latest PECI host technology. While using Core™ 2 Quad or Core™ 2 Duo CPU which supports PECI, the original images of the BIOS item “PC Health Status” and “Smart FAN Function” will be replaced by PECI mode and negative number. (The max data from PECI is zero.)*

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
PC Health Status

	Help Item
<p>-- System Hardware Monitor--</p> <p>▶ Smart Fan Function      <b>Press Enter</b></p> <p>CPU Fan Speed            : 2509 RPM</p> <p>CPU Vcore                : 1.088 V</p> <p>VDIMM                    : 1.824 V</p> <p>-- PECI Mode --</p> <p>Offset to TCC Activation Temp. : -60</p>	

↑↓ → ← : Move Enter : Select +/-: Value F10: Save ESC: Exit  
F1: General Help F9: Load Default Settings

Using BIOS

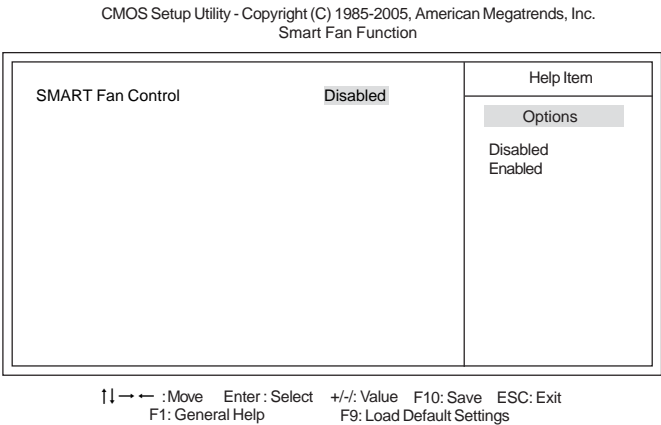

Press <Esc> to return to the PC Health Status page.

**System Component Characteristics**

These items display the monitoring of the overall inboard hardware health events, such as System & CPU temperature, CPU & DIMM voltage, CPU & system fan speed,...etc.

- CPU Fan Speed
- CPU Vcore
- VDIMM

**Case Open Warning (Disabled)**

This item enables or disables the warning if the case is opened up, and the item below indicates the current status of the case.

**Chassis Opened (No)**

This item indicates whether the case has been opened.

Press <Esc> to return to the main menu setting page.

### ***Frequency/Voltage Control***

This page enables you to set the clock speed and system bus for your system. The clock speed and system bus are determined by the kind of processor you have installed in your system.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Frequency/Voltage Control

Manufacturer: Intel		Help Item
Ratio Actual Value: 8		
CPU Frequency Setting :	333MHz	
Auto Detect DIMM/PCI Clk	Enabled	Options
Spread Spectrum	Enabled	Disabled
		Enabled

↑↓ ← → : Move   Enter : Select   +/- : Value   F10: Save   ESC: Exit  
F1: General Help   F9: Load Default Settings

#### **Manufacturer: Intel**

This item displays the information of current manufacturer of the CPU installed in your computer.

#### **Ratio Actual Value: 8**

This item shows the actual ratio of the CPU installed in your system.

#### **CPU Frequency Setting (333MHz)**

This item is used to set the CPU Frequency.

#### **Auto Detect DIMM/PCI Clk (Enabled)**

When this item is enabled, BIOS will disable the clock signal of free DIMM/PCI slots.

#### **Spread Spectrum (Enabled)**

If you enable spread spectrum, it can significantly reduce the EMI (Electro-Magnetic Interference) generated by the system.

Press <Esc> to return to the main menu setting page.

**Load Default Settings**

This option opens a dialog box that lets you install stability-oriented defaults for all appropriate items in the Setup Utility. Select <OK> and then press <Enter> to install the defaults. Select <Cancel> and then press <Enter> to not install the defaults.

**Supervisor Password**

This page helps you install or change a password.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
Supervisor Password

Supervisor Password : Not Installed	Help Item
Change Supervisor Password      Press Enter	Install or Change the password.

↑↓→← : Move    Enter : Select    +/- : Value    F10: Save    ESC: Exit  
F1: General Help    F9: Load Default Settings

**Supervisor Password (Not Installed)**

This item indicates whether a supervisor password has been set. If the password has been installed, *Installed* displays. If not, *Not Installed* displays.

**Change Supervisor Password (Press Enter)**

You can select this option and press <Enter> to access the sub menu. You can use the sub menu to change the supervisor password.

Press <Esc> to return to the main menu setting page.

### ***User Password***

This page helps you install or change a password.

CMOS Setup Utility - Copyright (C) 1985-2005, American Megatrends, Inc.  
User Password

User Password : Not Installed <hr/> Change Password <span style="border: 1px solid black; padding: 2px;">Press Enter</span>	Help Item Install or Change the password.
--	--

↑↓←→ : Move   Enter : Select   +/- : Value   F10: Save   ESC: Exit  
F1: General Help   F9: Load Default Settings

### **User Password (Not Installed)**

This item indicates whether a user password has been set. If the password has been installed, *Installed* displays. If not, *Not Installed* displays.

### **Change Supervisor Password (Press Enter)**

You can select this option and press <Enter> to access the sub menu. You can use the sub menu to change the user password.

Press <Esc> to return to the main menu setting page.

### ***Save & Exit Setup***

Highlight this item and press <Enter> to save the changes that you have made in the Setup Utility and exit the Setup Utility. When the Save and Exit dialog box appears, select [OK] to save and exit, or select [Cancel] to return to the main menu.

### ***Exit Without Saving***

Highlight this item and press <Enter> to discard any changes that you have made in the Setup Utility and exit the Setup Utility. When the Exit Without Saving dialog box appears, select [OK] to discard changes and exit, or select [Cancel] to return to the main menu.



*If you have made settings that you do not want to save, use the “Exit Without Saving” item and select [OK] to discard any changes you have made.*

### ***Updating the BIOS***

You can download and install updated BIOS for this motherboard from the manufacturer's Web site. New BIOS provides support for new peripherals, improvements in performance, or fixes for known bugs. Install new BIOS as follows:

- 1 If your motherboard has a BIOS protection jumper, change the setting to allow BIOS flashing.
- 2 If your motherboard has an item called Firmware Write Protect in Advanced BIOS features, disable it. (Firmware Write Protect prevents BIOS from being overwritten.)
- 3 Prepare a bootable device or create a bootable system disk. (Refer to Windows online help for information on creating a bootable system disk.)
- 4 Download the Flash Utility and new BIOS file from the manufacturer's Web site. Copy these files to the bootable device.
- 5 Turn off your computer and insert the bootable device in your computer. (You might need to run the Setup Utility and change the boot priority items on the Advanced BIOS Features Setup page, to force your computer to boot from the bootable device first.)
- 6 At the C:\ or A:\ prompt, type the Flash Utility program name and the file name of the new BIOS and then press <Enter>. Example: AFUDOS.EXE 040706.ROM
- 7 When the installation is complete, remove the bootable device from the computer and restart your computer. If your motherboard has a Flash BIOS jumper, reset the jumper to protect the newly installed BIOS from being overwritten. The computer will restart automatically.

This concludes Chapter 3. Refer to the next chapter for information on the software supplied with the motherboard.



## Chapter 4

### Using the Motherboard Software

#### About the Software DVD-ROM/CD-ROM

The support software DVD-ROM/CD-ROM that is included in the motherboard package contains all the drivers and utility programs needed to properly run the bundled products. Below you can find a brief description of each software program, and the location for your motherboard version. More information on some programs is available in a README file, located in the same directory as the software. Before installing any software, always inspect the folder for files named README.TXT or something similar. These files may contain important information that is not included in this manual.



1. *Never try to install all software from folder that is not specified for use with your motherboard.*

2. *The notice of Intel HD audio installation (optional): The Intel High Definition audio functionality unexpectedly quits working in Windows Server 2003 Service Pack 1 or Windows XP Professional x64 Edition. Users need to download and install the update packages from the Microsoft Download Center “before” installing HD audio driver bundled in the Driver CD. Please log on to <http://support.microsoft.com/default.aspx?scid=kb;en-us;901105#appliesto> for more information.*

#### Auto-installing under Windows Vista/7

The Auto-install DVD-ROM/CD-ROM makes it easy for you to install the drivers and software for your motherboard.



*If the Auto-install DVD-ROM/CD-ROM does not work on your system, you can still install drivers through the file manager for your OS (for example, Windows Explorer). Refer to the Utility Folder Installation Notes later in this chapter.*

The support software DVD-ROM/CD-ROM disc loads automatically under Windows Vista/7. When you insert the DVD-ROM/CD-ROM disc in the DVD-ROM/CD-ROM drive, the autorun feature will automatically bring up the install screen. The screen has three buttons on it, Setup, Browse CD and Exit.



*If the opening screen does not appear; double-click the file “setup.exe” in the root directory.*

#### Using the Motherboard Software

**Setup Tab**

<b>Setup</b>	Click the <b>Setup</b> button to run the software installation program. Select from the menu which software you want to install.
<b>Browse CD</b>	<p>The <b>Browse CD</b> button is the standard Windows command that allows you to open Windows Explorer and show the contents of the support disk.</p> <p>Before installing the software from Windows Explorer, look for a file named README.TXT something similar. This file may contain important information to help you install the software correctly.</p> <p>Some software is installed in separate folders for different operating systems, such as Windows Vista. Always go to the correct folder for the kind of OS you are using.</p> <p>In install the software, execute a file named SETUP.EXE by double-clicking the file and then following the instructions on the screen.</p>
<b>Exit</b>	The <b>Exit</b> button closes the Auto Setup window.

**Application Tab**

Lists the software utilities that are available on the disk.


**Read Me Tab**


Displays the path for all software and drivers available on the disk.

**Running Setup**

*Follow these instructions to install device drivers and software for the motherboard:*

1. Click **Setup**. The installation program begins:

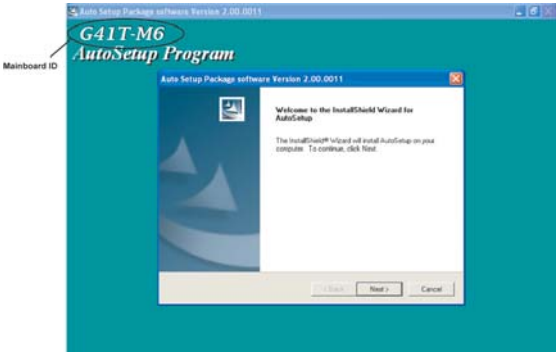


 *The following screens are examples only. The screens and driver lists will be different according to the motherboard you are installing.*


The motherboard identification is located in the upper left-hand corner.

Using the Motherboard Software

2. Click **Next**. The following screen appears:

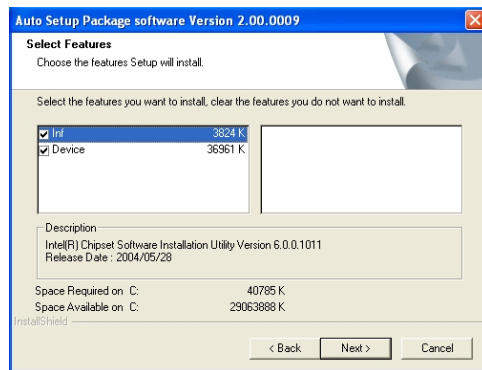

3. Check the box next to the items you want to install. The default options are recommended.
4. Click **Next** run the Installation Wizard. An item installation screen appears:

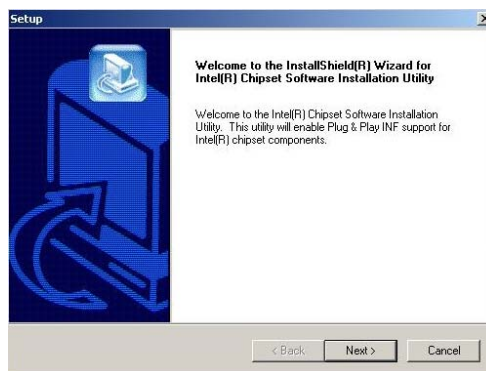

5. Follow the instructions on the screen to install the items.




1. Drivers and software are automatically installed in sequence. Follow the onscreen instructions, confirm commands and allow the computer to restart a few times to complete the installation.
2. During the Windows Vista Driver Auto Setup Procedure, users should use one of the following two methods to install the driver after the system restart.

## Using the Motherboard Software



Windows Vista/7 will appear below UAC (User Account Control) message after the system restart. You must select “Allow” to install the next driver. Continue this process to complete the drivers installation.

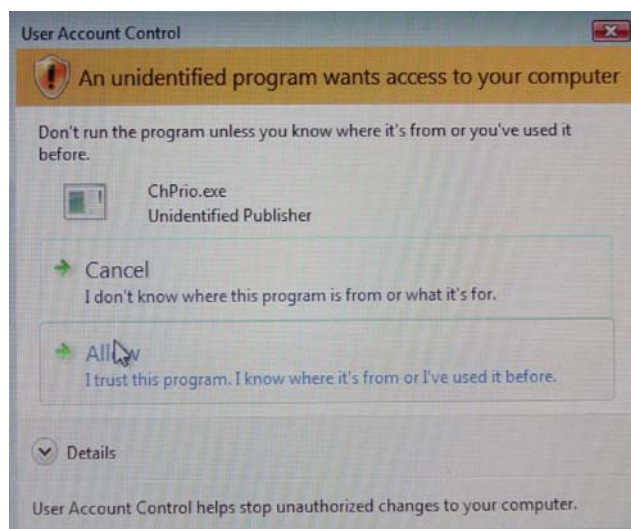

## Manual Installation

Insert the disk in the DVD-ROM/CD-ROM drive and locate the PATH.DOC file in the root directory. This file contains the information needed to locate the drivers for your motherboard.

Look for the chipset and motherboard model; then browse to the directory and path to begin installing the drivers. Most drivers have a setup program (SETUP.EXE) that automatically detects your operating system before installation. Other drivers have the setup program located in the operating system subfolder.

If the driver you want to install does not have a setup program, browse to the operating system subfolder and locate the readme text file (README.TXT or README.DOC) for information on installing the driver or software for your operating system.

## Utility Software Reference

All the utility software available from this page is Windows compliant. They are provided only for the convenience of the customer. The following software is furnished under license and may only be used or copied in accordance with the terms of the license.



*These software(s) are subject to change at anytime without prior notice. Please refer to the support disk for available software.*

This concludes Chapter 4.

## Using the Motherboard Software


## Chapter 5

### *Setting Up eJIFFY*

---

#### **Introduction**

eJIFFY is a fast boot program under Linux. Instead of waiting Windows O.S to start execution, eJIFFY is ready to provide users the instant enjoyment on web browsing, photo review and online chat just within several seconds after boot up.

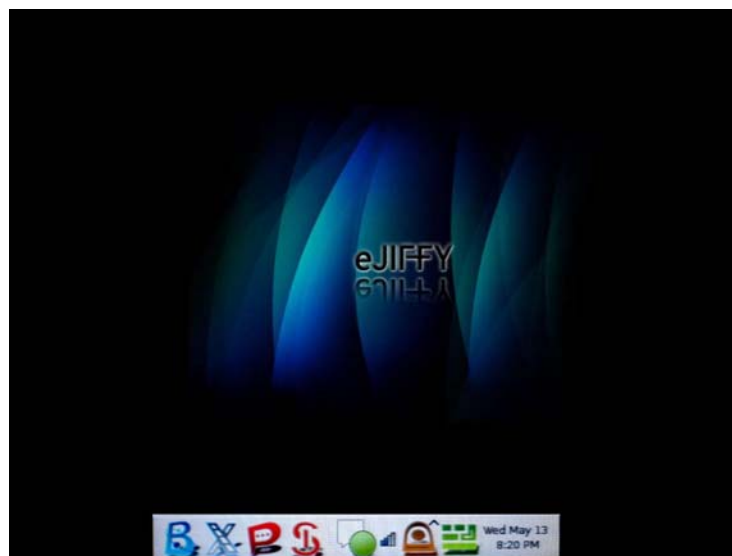

Note: According to your motherboard uses DVD or CD, the installation may different, please refer the following installation page for more detailed information.

Version: 3.0


Setting Up eJIFFY

## Installation and BIOS Setup

### *DVD Activation*

Finish the DVD utility setup, and then set the BIOS to complete eJIFFY activation.

1. Insert ECS software utility DVD and enter below “Utilities” screen. Click eJIFFY feature item to install.

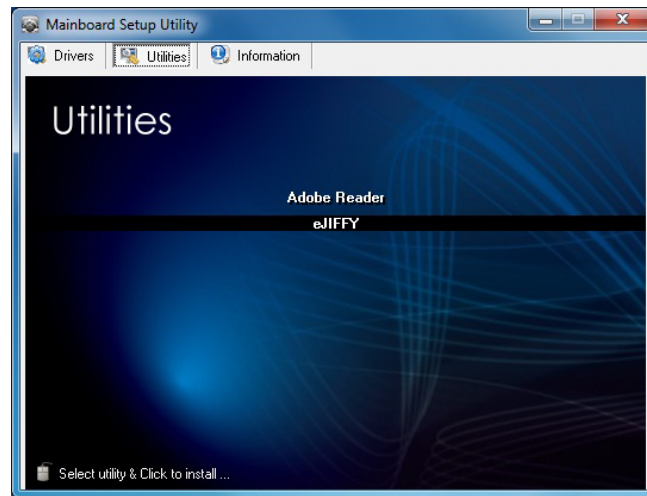

2. Follow the onscreen instructions to finish eJIFFY setup. Restart your computer after you finish.



Setting Up eJIFFY

3. Press <DEL> or click the BIOS Setup button on the post screen to enter the BIOS setup page after boot up.



4. And then enter the *Advanced Setup* page to enable the item *ECS eJIFFY Function*. Press F10 to save the configuration and exit. Restart your computer.




- Note: 1. eJIFFY is available in SATA/IDE/AHCI mode. It does not support RAID configuration and the onboard 34-pin floppy drives.  
2. Please refer to ECS website for new eJIFFY application updates.

## Setting Up eJIFFY

### CD Manually Setup

You need to finish the CD installation first before setting the BIOS.

1. Insert the eJIFFY CD in the CD-ROM drive. And follow the onscreen instructions to finish the OS installation.
2. Enter My Computer to find the eJIFFY setup program.

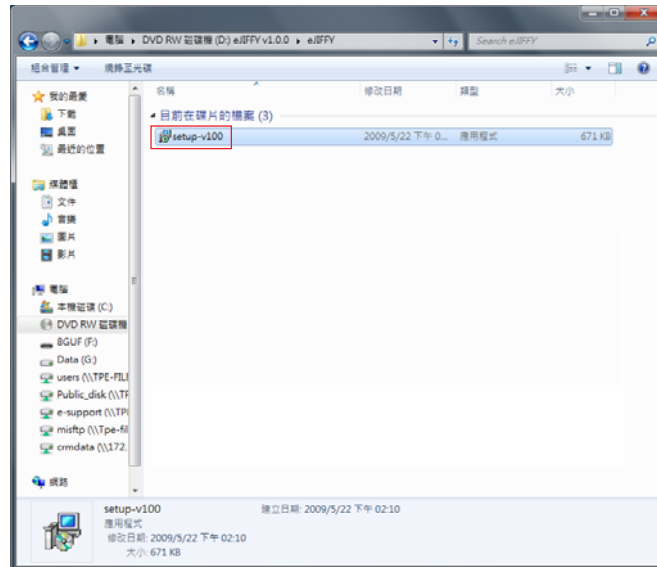

3. Click the setup button to run the eJIFFY software installation program, restart your computer after you finish.



Setting Up eJIFFY



4. Press <DEL> or click the BIOS Setup button on the post screen to enter the BIOS setup page after boot up.



5. And then enter the *Advanced Setup* page to enable the item *ECS eJIFFY Function*. Press F10 to save the configuration and exit. Restart your computer.



Note: 1. eJIFFY is available in SATA/IDE/AHCI mode. It does not support RAID configuration and the onboard 34-pin floppy drives.

2. Please refer to ECS website for new eJIFFY application updates.


## Setting Up eJIFFY

## Entering eJIFFY

The post screen appears within several seconds after boot up and it has three buttons on it, Operating system, eJIFFY and BIOS Setup.



If you click eJIFFY, the following screen will appear. And If you make no choice it will enter the normal OS automatically after ten seconds.

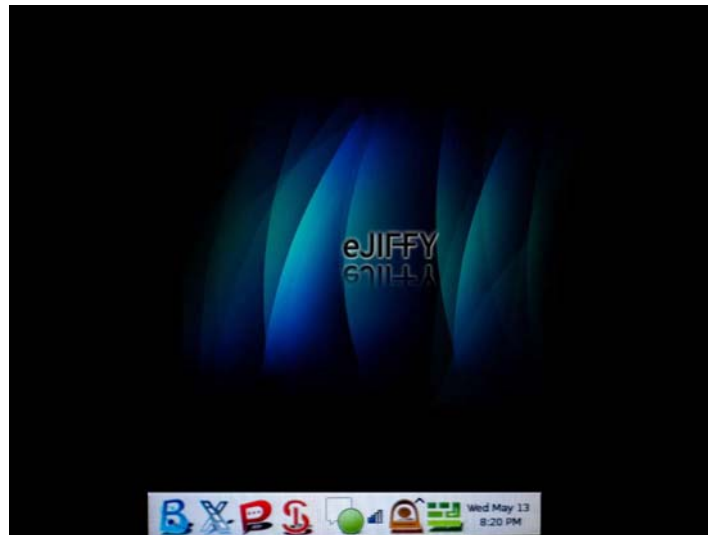

Setting Up eJIFFY

## Feature Icons

The following illustration shows the main feature icons that eJIFFY provides on the menu.



*eWeb: Firefox for web browsing/webmail and watching flash video.*



*ePix: Photo viewing.*



*ePal: On-line chat tool to use the most popular IMs in the world. (MSN, ICQ, AIM, etc.)*



*Shows ePal on-line connection status.*



*Shut Down/Restart: Ends your session and turns off the computer./Ends your session and restart the computer..*



*Click once to connect the storage disk to your computer. Click for the second time to remove your storage disk safely. (please refer to the FAQ for more usage information.)*



*Shows the network connection status.*



*Input Method Settings:*

*Click to change the default settings of language inputs. It is recommended to use the default settings and do not change the language method in case any inconvenience occurs with the changes.*

## Setting Up eJIFFY


## Usage FAQ



*eWeb: Firefox for web browsing/webmail and watching flash video.*

### Q1: How to download files to hard disk through eWeb?

Click on the file link directly. Then select “Save File” in the pop-up window.

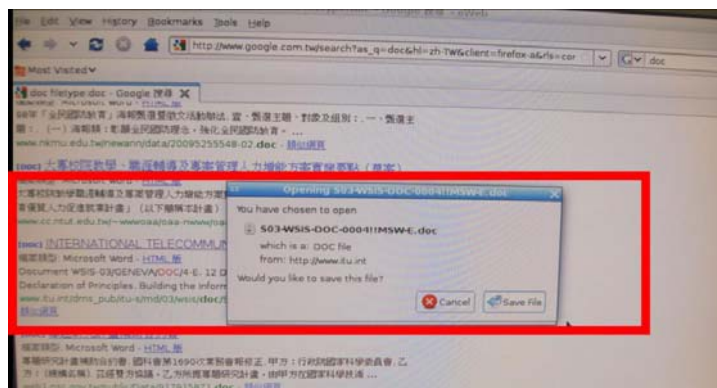

Note: 1. Before downloading files, please “mount” the storage devices to make sure the device is connected with eJIFFY interface. (Please refer to the usage FAQ to mount devices)


2. eWeb does not support Office Viewer/Reader/Writer format under eJIFFY interface. Please enter the Operating System to open Office files.

3. eWeb supports to open video/audio files online in Flash player format. Due to firefox limitation, the browser does not support files in Real player or Media player formats.


Setting Up eJIFFY

## Q2: How to switch to different languages settings?

Step1.

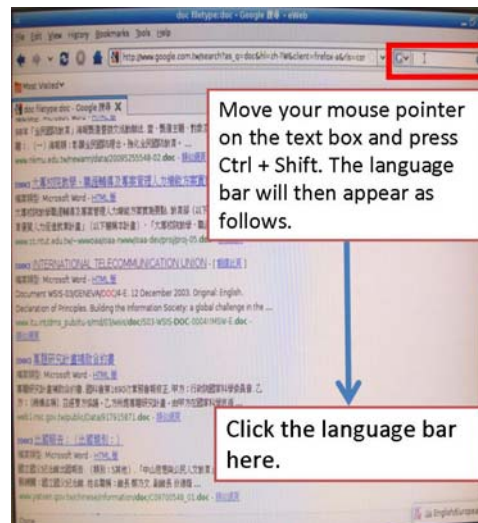


Step2.

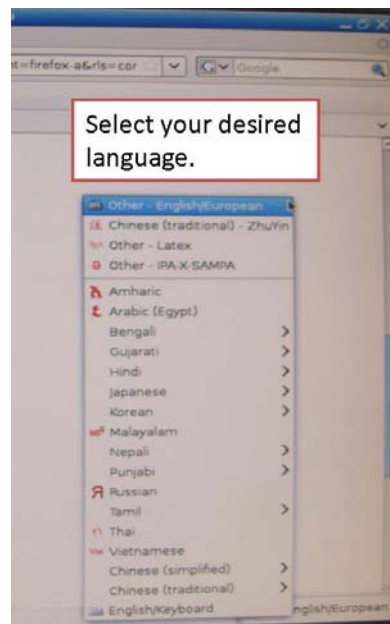


Setting Up eJIFFY

### Q3: How to save image file through eWeb?

1. Select the image you want to save and press the right key of your mouse to show the menu, then click the option "Save Image As" from the menu.

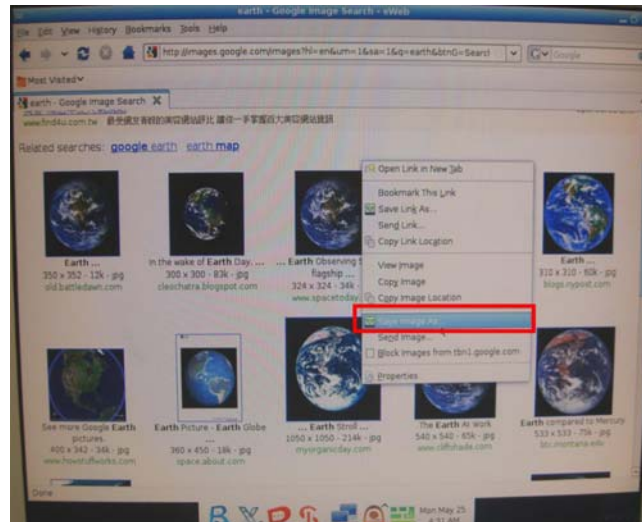

2. Then the "Save Image" window appears. You may rename the image file in the "Name" column and save the file in a folder as the following picture shows.

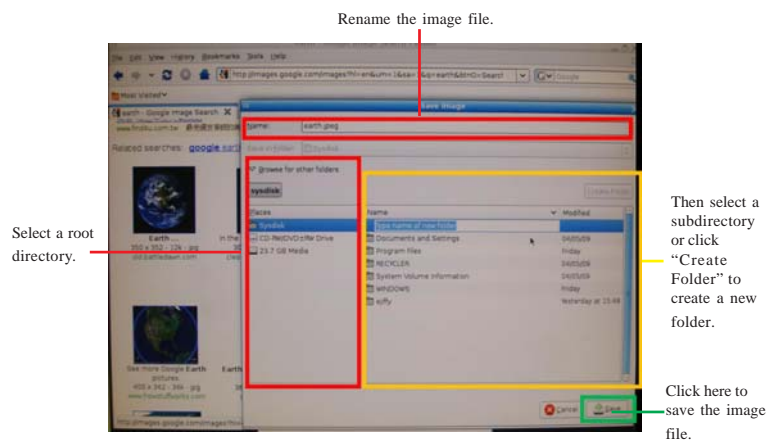


Setting Up eJIFFY



*ePix: Photo viewing.*

**Q1: How to find image files saved in hard disk through ePix?**

Enter the ePix window, then click the icon “Folder” located in the upper left-hand corner, then follow the path for the files you have saved to view the image files.

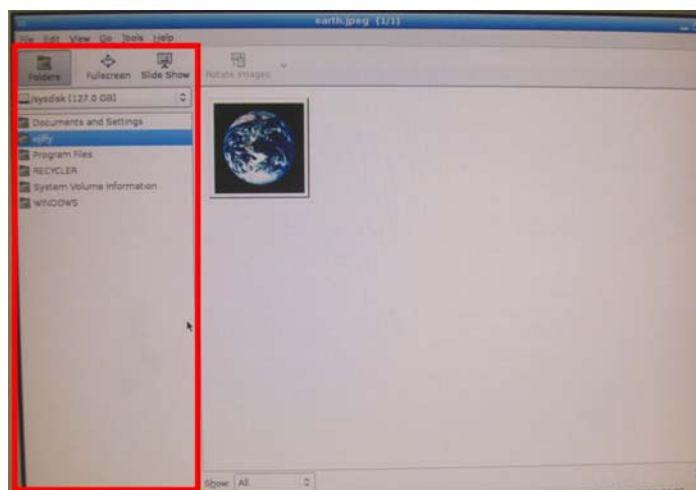


Setting Up eJIFFY

**Q2: How to use the fit function under slide show?**

1. Click “Edit” and select “Preferences” option from the menu.



2. Click “Viewer” and choose “Keep previous zoom” in “After loading an image”. Close the window and you can use the fit function under slide show now.

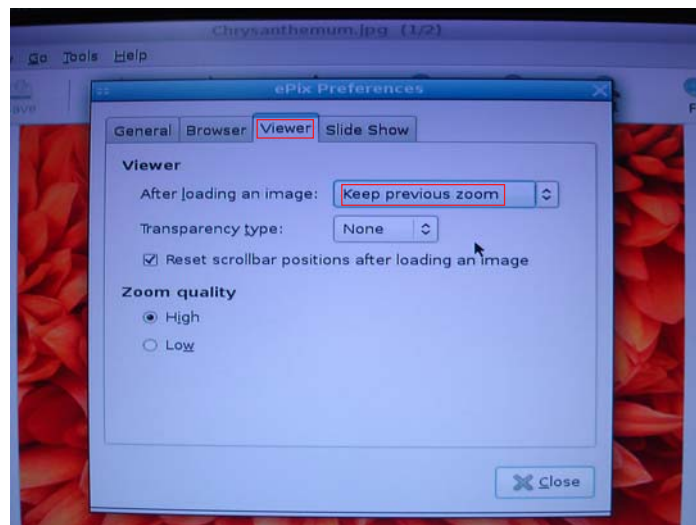

Note: ePix supports to view image files only. It cannot support Office Viewer or other forms beside image files. Supported image types are: BMP, JPEG, GIF (including GIF animations), PNG, TIFF, ICO and XPM.

Setting Up eJIFFY




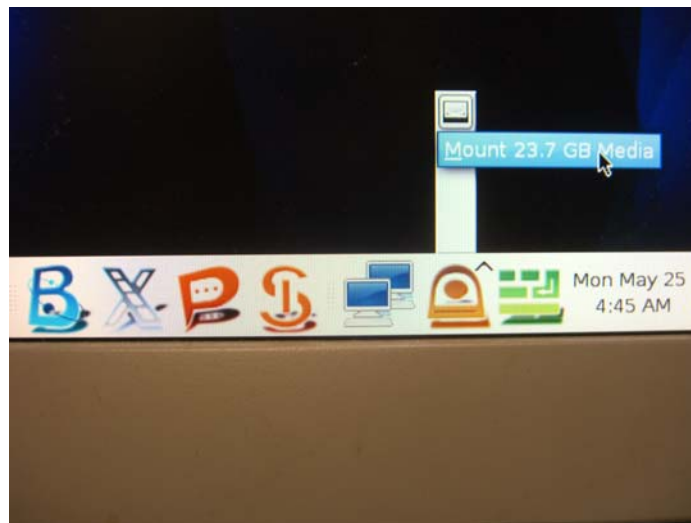


*Mount/Unmount Disk.*

**Q1: What does it mean for “Mount Disk”?**



“Mount” means to connect the storage devices to eJIFFY interface.


After plugging the external device to the computer such as USB drives, a new disk icon will appear as the following picture shows. Please click the “mount” prompt on the icon. It will change to  to show the device is detected successfully.



**Q2: What does it mean for “Unmount Disk”?**

“Unmount” is to safely remove the storage devices.

To unplug the external storage devices such as USB drives, users need to click the “Unmount” prompt as the following picture shows, then the icon  will change to  , you can remove the device now.

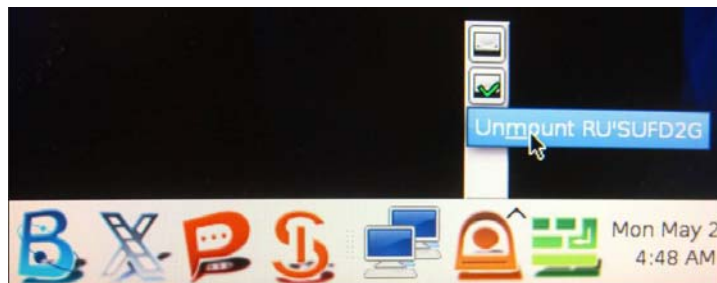

Setting Up eJIFFY

*Memo*

## Chapter 6

### *Trouble Shooting*

---

#### **Start up problems during assembly**

After assembling the PC for the first time you may experience some start up problems. Before calling for technical support or returning for warranty, this chapter may help to address some of the common questions using some basic troubleshooting tips.

##### ***a) System does not power up and the fans are not running.***

1. Disassemble the PC to remove the VGA adaptor card, DDR memory, LAN, USB and other peripherals including keyboard and mouse. Leave only the motherboard, CPU with CPU cooler and power supply connected. Turn on again to see if the CPU and power supply fans are running.
2. Make sure to remove any unused screws or other metal objects such as screwdrivers from the inside PC case. This is to prevent damage from short circuit.
3. Check the CPU FAN connector is connected to the motherboard.
4. For Intel platforms check the pins on the CPU socket for damage or bent. A bent pin may cause failure to boot and sometimes permanent damage from short circuit.
5. Check the 12V power connector is connected to the motherboard.
6. Check that the 12V power & ATX connectors are fully inserted into the motherboard connectors. Make sure the latches of the cable and connector are locked into place.

##### ***b) Power is on, fans are running but there is no display***

1. Make sure the monitor is turned on and the monitor cable is properly connected to the PC.
2. Check the VGA adapter card (if applicable) is inserted properly.
3. Listen for beep sounds. If you are using internal PC speaker make sure it is connected.
  - a. continuous 3 short beeps : memory not detected
  - b. 1 long beep and 8 short beeps : VGA not detected

***c) The PC suddenly shuts down while booting up.***

1. The CPU may experience overheating so it will shutdown to protect itself. Ensure the CPU fan is working properly.
2. From the BIOS setting, try to disable the Smartfan function to let the fan run at default speed. Doing a Load Optimised Default will also disable the Smartfan.

**Start up problems after prolong use**

After a prolong period of use your PC may experience start up problems again. This may be caused by breakdown of devices connected to the motherboard such as HDD, CPU fan, etc. The following tips may help to revive the PC or identify the cause of failure.

1. Clear the CMOS values using the CLR\_CMOS jumper. Refer to CLR\_CMOS jumper in Chapter 2 for Checking Jumper Settings in this user manual. When completed, follow up with a Load Optimised Default in the BIOS setup.
2. Check the CPU cooler fan for dust. Long term accumulation of dust will reduce its effectiveness to cool the processor. Clean the cooler or replace a new one if necessary.
3. Check that the 12V power & ATX connectors are fully inserted into the motherboard connectors. Make sure the latches of the cable and connector are locked into place.
4. Remove the hard drive, optical drive or DDR memory to determine which of these component may be at fault.

**Maintenance and care tips**

Your computer, like any electrical appliance, requires proper care and maintenance. Here are some basic PC care tips to help prolong the life of the motherboard and keep it running as best as it can.

1. Keep your computer in a well ventilated area. Leave some space between the PC and the wall for sufficient airflow.
2. Keep your computer in a cool dry place. Avoid dusty areas, direct sunlight and areas of high moisture content.
3. Routinely clean the CPU cooler fan to remove dust and hair.
4. In places of hot and humid weather you should turn on your computer once every other week to circulate the air and prevent damage from humidity.
5. Add more memory to your computer if possible. This not only speeds up the system but also reduces the loading of your hard drive to prolong its lifespan.
6. If possible, ensure the power cord has an earth ground pin directly from the wall outlet. This will reduce voltage fluctuation that may damage sensitive devices.



*Memo*

Trouble Shooting